

(51) International Patent Classification:
A61L 2/08 (2006.01)(21) International Application Number:
PCT/US2009/006642(22) International Filing Date:
18 December 2009 (18.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/203,626 24 December 2008 (24.12.2008) US(71) Applicant (for all designated States except US):
EXXONMOBIL RESEARCH AND ENGINEERING COMPANY [US/US]; 1545 Route 22 East, P. O. Box 900, Annandale, NJ 08801-0900 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DAKKA, Jihad, M.** [IL/US]; 3 Gleim Road, Whitehous Station, NJ 08889 (US). **MOZELESKI, Edmund, J.** [US/US]; 28 Hoffman Drive, Califon, NJ 07830 (US). **BAUGH, Lisa, S.** [US/US]; 71 Manners Road, Ringoes, NJ 08551 (US). **BERLUCHE, Enock** [US/US]; 55 Peddlers Lane, Phillipsburg, NJ 08551 (US).(74) Agents: **BAKUN, Estelle, C.** et al.; Exxonmobil Research And Engineering Company, 1545 Route 22 East, P. O. Box 900, Annandale, NJ 08801-0900 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: TRYGLYCERIDE PLASTICIZER AND PROCESS OF MAKING

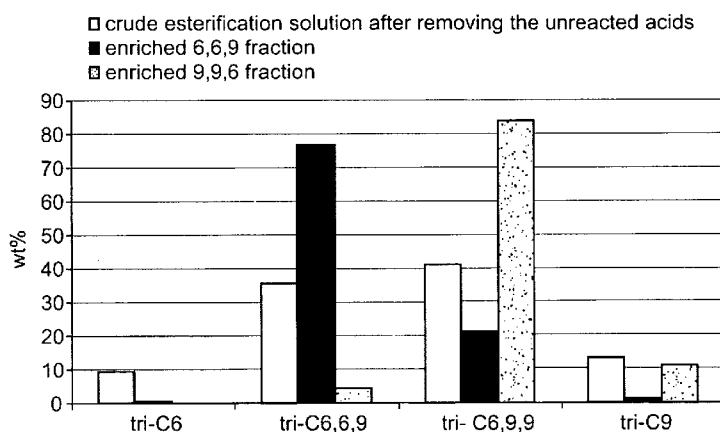


FIG. 2

(57) Abstract: Provided are compositions, processes for making, and processes for using triglycerides as plasticizers. Triglyceride plasticizers can be produced by recovery of linear or branched C4 to C10 aldehydes from a hydro formylation product, oxidation to the acid with oxygen and/or air, recovery of the resulting acid, and esterification with glycerol, wherein the total carbon number of the triester groups is from 20 to 25 for greater than or equal to 45 wt% of the plasticizer. Such plasticizers can be phthalate-free and provide outstanding properties including a suitable melting or glass transition or pour point, low volatility, increased compatibility, and excellent low temperature properties in a range of polymeric resins.

TRIGLYCERIDE PLASTICIZER AND PROCESS OF MAKING

FIELD

[0001] The present disclosure relates to triglycerides based on linear or branched alkyl groups, useful as plasticizers and viscosity depressants for a wide range of polymer resins.

BACKGROUND

[0002] Plasticizers are incorporated into a resin (usually a plastic or elastomer) to increase the flexibility, workability, or distensibility of the resin. The largest use of plasticizers is in the production of “plasticized” or flexible polyvinyl chloride (PVC) products. Typical uses of plasticized PVC include films, sheets, tubing, coated fabrics, wire and cable insulation and jacketing, toys, flooring materials such as vinyl sheet flooring or vinyl floor tiles, adhesives, sealants, inks, and medical products such as blood bags and tubing, and the like.

[0003] Other polymer systems that use small amounts of plasticizers include polyvinyl butyral, acrylic polymers, poly(vinylidene chloride), nylon, polyolefins, polyurethanes, and certain fluoroplastics. Plasticizers can also be used with rubber (although often these materials fall under the definition of extenders for rubber rather than plasticizers). A listing of the major plasticizers and their compatibilities with different polymer systems is provided in “Plasticizers,” A. D. Godwin, in Applied Polymer Science 21st Century, edited by C. D. Craver and C. E. Carraher, Elsevier (2000); pp. 157-175.

[0004] Plasticizers can be characterized on the basis of their chemical structure. The most important chemical class of plasticizers is phthalic acid esters, which accounted for about 85% worldwide of PVC plasticizer usage in 2002. However, in the recent past there has been an effort to decrease the use of

phthalate esters as plasticizers in PVC, particularly in end uses where the product contacts food, such as bottle cap liners and sealants, medical and food films, or for medical examination gloves, blood bags, and IV delivery systems, flexible tubing, or for toys, and the like. For these and most other uses of plasticized polymer systems, however, a successful substitute for phthalate esters has heretofore not materialized.

[0005] One such suggested substitute for phthalates are esters based on cyclohexanoic acid. In the late 1990's and early 2000's, various compositions based on cyclohexanoate, cyclohexanedioates, and cyclohexanepolyoate esters were said to be useful for a range of goods from semi-rigid to highly flexible materials. See, for instance, WO 99/32427, WO 2004/046078, WO 2003/029339, WO 2004/046078, U.S. Application No. 2006-0247461, and U.S. 7,297,738.

[0006] Other suggested substitutes include esters based on benzoic acid (see, for instance, U.S. 6,740,254, and also co-pending, commonly-assigned, U.S. Patent Application (serial # yet to be determined) [attorney docket no. 2008EM081]) and polyketones, such as described in 6,777,514; and also co-pending, commonly-assigned, U.S. Application (serial # yet to be determined) [attorney docket no. 2007EM102/2]. Epoxidized soybean oil, which has much longer alkyl groups (C_{16} to C_{18}) has been tried as a plasticizer, but is generally used as a PVC stabilizer. Stabilizers are used in much lower concentrations than plasticizers.

[0001] Typically, the best that has been achieved with substitution of the phthalate ester with an alternative material is a flexible PVC article having either reduced performance or poorer processability. Thus, heretofore efforts to make phthalate-free plasticizer systems for PVC have not proven to be entirely satisfactory, and this is still an area of intense research.


[0002] Plasticizers based on triglycerides have been tried in the past, but they have mostly been based on natural triglycerides from various vegetable oils. The

alkyl groups on these natural triglycerides are linear, and can cause compatibility problems when the alkyl chain is too long.

[0003] “Structural Expressions of Long-Chain Esters on Their Plasticizing Behavior in Poly(vinyl Chloride”, H. K. Shobha and K. Kishore, *Macromolecules* **1992**, 25, 6765-6769, reported the influence of branching and molecular weight in long-chain esters in PVC. Triglycerides (TGE's) having linear alkyl groups were studied.

[0004] “A Method for Determining Compatibility Parameters of Plasticizers for Use in PVC Through Use of Torsional Modulus”, G. R. Riser and W. E. Palm, *Polymer Engineering and Science*, April 1967, 110-114, also investigate the use of triglycerides and their plasticizing behavior with PVC, including tri-iso-valerin (3-methyl butanoate) triglyceride. It was reported that “these materials have volatilities that are much too high for good long-time permanence”.

[0005] Nagai et al. in U.S. Pat. No. 5,248,531, teaches the use of articles comprising vinyl chloride-type resins (among others) using triglyceride compounds as a hemolysis depressant, and also comprising 10 to 45 wt% of plasticizers selected from trialkyl trimellitates, di-normal alkyl phthalates, and tetraalkyl pyromellitates. The alkyl chains of the acid-derived moiety R^1 - R^3 in the structure below, formula (I), are independently an aliphatic hydrocarbon group of one to 20 carbon atoms and in embodiments at least one of the alkyl chains is branched. One specific triglyceride disclosed is glyceryl tri-2-ethylhexanoate.



[0006] Zhou et al. discloses, in U.S. Patent Nos. 6,652,774; 6,740,254; and

6,811,722; phthalate-free plasticizers comprising a mixture of different triesters of glycerin, preferably wherein the phthalate-free plasticizer is formed by a process of esterifying glycerin with a mixture comprising a mixture of alkyl acids and aryl acids. Zhou et al. also discloses that glyceryl tribenzoate and glyceryl tri(2-ethyl)hexanoate have not been used as primary plasticizers in vinyl polymers, such as PVC because they are known to be incompatible with such resins.

[0007] Nielsen et al., in U.S. Pat. No. 6,734,241, teach a composition comprising a thermoplastic polymer as in formula (I) above, wherein at least one of the R groups is an alkyl group having from one to five carbon atoms and at least one of the R groups is a saturated branched alkyl group having from 9 to 19 carbon atoms and a hydrophilic group.

[0008] Among the problems presented by the aforementioned triglycerides is they cannot be made conveniently and thus generally are quite expensive and/or are specialty chemicals not suitable as replacements for phthalates from an economic standpoint and/or are not as compatible with the range of polymer systems that phthalates are compatible with, and thus are not viable replacements for phthalates from a physical property standpoint.

[0009] For instance, some synthesis methods involve at least two separate steps, such as where the glycerol is first partially esterified with the C₁₀ to C₂₀ branched chain acyl group and then reacted with acetic acid or acetic anhydride.

[0010] Other syntheses involving mixed acid feeds will require addition of a hydrocarbon solvent for azeotropic distillation of the water to drive the esterification reaction to completion (as measured by the hydroxyl number of the ester, which is a measure of the amount of unreacted OH groups), due to the spread in boiling points between the mixed acids. In addition, the use of mixed acid feedstock such as cited in Zhou et al. and in Nielsen et al. can reduce the capability of recycling unreacted acids.

[0011] Triglycerides based on acids derived from natural products will be limited to naturally occurring linear alkyl groups with even carbon numbers, which offer very little flexibility in designing an appropriate plasticizer system for a given polymer system.

[0012] Thus what is needed is a method of making a general purpose non-phthalate plasticizer having high throughput and providing a plasticizer having a suitable melting or glass transition or pour point, increased compatibility, good performance and low temperature properties.

[0013] The present inventors have surprisingly discovered that triglycerides with a total carbon number of the triester groups between 20 and 25 (not including the three glycerol backbone carbons), produced by esterification of glycerol with a combination of acids derived from the hydroformylation and subsequent oxidation of C₃ to C₉ olefins, provide for triglycerides for excellent compatibility with a wide variety of resins and that can be made with a high throughput. Esterification of glycerol using a combination of acids eliminates many of the aforementioned problems, and enables high yield of the glycerol triesters to be obtained, having excellent compatibility with vinyl polymers.


SUMMARY

[0014] The present disclosure is directed to a process for producing a plasticizer including: (i) recovering at least one linear C₄ to C₁₀ aldehyde, one branched C₄ to C₁₀ aldehyde, or a combination thereof from a hydroformylation product; (ii) oxidizing the linear, branched or combination thereof C₄ to C₁₀ aldehyde to form a linear, branched or combination thereof C₄ to C₁₀ acid; (iii) esterifying the linear, branched or combination thereof C₄ to C₁₀ acid with a polyol to yield a linear alkyl triglyceride, a branched alkyl triglyceride, or a combination thereof; (iv) purifying the linear, branched or combination thereof alkyl triglyceride to form a plasticizer, wherein the total carbon number of the

triester groups (not including the three glycerol backbone carbons) ranges from 20 to 25 for greater than or equal to 45 wt% of the plasticizer.

[0015] The present disclosure is also directed to a process for producing a plasticizer including: (i) recovering an aldehyde/alcohol mixture including at least one linear C₄ to C₁₀ aldehyde, one branched C₄ to C₁₀ aldehyde, or a combination thereof and at least one linear C₄ to C₁₀ alcohol, one branched C₄ to C₁₀ alcohol, or a combination thereof from a hydroformylation process; (ii) oxidizing the aldehyde/alcohol mixture to form a linear, branched or combination thereof C₄ to C₁₀ acid; (iii) esterifying the linear, branched or combination thereof C₄ to C₁₀ acid with a polyol to yield a linear alkyl triglyceride, a branched alkyl triglyceride, or a combination thereof; and (iv) purifying the linear, branched or combination thereof alkyl triglyceride to form a plasticizer, wherein the total carbon number of the triester groups (not including the three glycerol backbone carbons) ranges from 20 to 25 for greater than or equal to 45 wt% of the plasticizer.

[0016] The present disclosure is also directed to a plasticizer comprising a triglyceride according to the formula:



wherein each of R¹, R², and R³ are independently selected from C₃ to C₉ linear or branched alkyl groups, and wherein the total carbon number of the triester groups ranges from 20 to 25 (not including the three glycerol backbone carbons).

[0017] The present disclosure is still further directed to resin compositions, plastisols and articles comprising the above plasticizer compositions to provide phthalate-free plasticizers, resin compositions, plastisols and articles.

[0018] These and other objects, features, and advantages will become apparent as reference is made to the following detailed description, embodiments, examples, and appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] In the accompanying drawings, like reference numerals are used to denote like parts throughout the several views.

[0020] Figure 1 is a schematic representation of a process according to a preferred embodiment of the invention.

[0021] Figure 2 is a graph of the composition of the combined fractions and the mother solution before distillation of Example 1.

[0022] Figure 3 is a graph of the composition of the combined fractions and the mother solution before distillation of Example 2.

[0023] Figure 4 shows Differential Scanning Calorimetry (DSC) curves (solid lines) for (top) neat PVC and (bottom) PVC plasticized with mixed triglyceride ester 2-B, overlaid with Dynamic Mechanical Thermal Analysis (DMTA) curves (dotted lines). Note: The tan delta onset value shown for the DMTA curve of neat PVC is a preliminary value; the actual value given in Table 9 is shown in Figure 5.


[0024] Figure 5 shows Dynamic Mechanical Thermal Analysis curves for (top) neat PVC and (bottom) PVC plasticized with mixed triglyceride ester 2-B. For each material, two repeat runs are shown.

DETAILED DESCRIPTION

[0025] The present disclosure provides triglycerides and methods of making triglycerides for use as plasticizers for polymer resins. In one form of the present disclosure, the triglyceride plasticizer is "phthalate-free". As used in the instant

specification and in the appended claims, the term “phthalate-free” means that the plasticizer does not contain any phthalate diesters, which are also known in the art simply as phthalates.


[0026] Referring to the triglyceride chemical formula below, for the instant application including the claims, the total carbon number of the triester groups is defined as the sum of the carbons for the R^1 , R^2 and R^3 groups plus the three carbons for the three carbonyl groups, and not including the three glycerol backbone carbons. Hence for illustrative purposes, for a C_8 triglyceride (also referred to as 888 triglyceride), the total carbon number would be 24 as defined herein ($7 + 7 + 7 = 21$ carbons from the R^1 , R^2 , and R^3 alkyl groups plus three carbonyl group carbons) because the three glycerol backbone carbons are not included in the calculation. For a C_7 triglyceride (also referred to as 777 triglyceride), the total carbon number would be 21 as defined herein ($6 + 6 + 6 = 18$ carbons from the R^1 , R^2 , and R^3 alkyl groups plus three carbonyl group carbons) because the three glycerol backbone carbons again are not included in the calculation.



[0027] According to the present disclosure, the triglycerides disclosed herein may be produced by esterification of one or more C_4 to C_{10} linear or branched acids with glycerol to form a triglyceride with a total carbon number of the linear or branched alkyl triester groups ranging from 20 to 25 (including the three carbons for the three carbonyl groups and not including the three glycerol backbone carbons).

[0028] In one embodiment, the at least one or more C₄ to C₁₀ linear or branched acids will be derived from the hydroformylation of light olefins, aldol condensation of the light aldehydes and then hydrogenation followed by oxidation and thus may be referred to herein as “oxo acids”. The OXO Process is *per se* well known. By way of recent examples, see, for instance, U.S. Patent Nos. 7,345,212; 7,186,874; 7,148,388; 7,081,554; 7,081,553; 6,982,295; 6,969,736; 6,969,735; 6,013,851; 5,877,358; and PCT publications WO 2007106215; WO 2007040812; WO 2006086067; WO 2006055106; WO 2003050070; WO 2000015190. As mentioned above, or alternatively directly oxidized to the desired acid(s). However, it will be recognized by one of skill in the art that the C₄ to C₁₀ linear or branched acids may be derived from other processes.

[0029] The present disclosure is also directed to the product of the process, which comprises at least one compound according to the following structure (I):



wherein the sum of the carbons for the linear or branched alkyl triester groups (R¹, R², and R³ plus three carbons for the three carbonyl groups and not including the three glycerol backbone carbons) may range from 20 to 25. Alternatively, the sum of the carbons for the linear or branched alkyl triester groups (R¹, R², and R³ plus three carbons for the three carbonyl groups and not including the three glycerol backbone carbons) may range from 20 to 24, or 20 to 23, or 20 to 22, or 20 to 21, or 22 to 25, or 23 to 25, or 24 to 25. In another form, the sum of the carbons for the R¹, R², and R³ plus three carbons for the three carbonyl groups and not including the three glycerol backbone carbons may be 20, or 21, or 22, or 23, or 24, or 25.

[0030] The present disclosure is also directed to the product of the process, which comprises at least one compound according to structure (I), wherein the sum of the carbons for the branched alkyl triester groups (R^1 , R^2 , and R^3 plus three carbons for the three carbonyl groups and not including the three glycerol backbone carbons) may range from 20 to 25, and also wherein R^1 , R^2 , and R^3 are independently selected from C_3 to C_9 alkyl groups having an average branching of from about 0.8 to 3.0 branches per group or from about 0.8 to about 2.2 branches per group. Average branching is determined by Nuclear Magnetic Resonance (NMR) spectroscopy. In another form of this embodiment, the average branching may range from about 0.8 to about 1.8 branches per group. In yet another form, the average branching of the C_3 to C_9 branched alkyl groups ranges from about 0.8 to about 3.0, or from about 0.8 to about 1.6, or from about 1.2 to about 1.4 branches per group. The average branching of the sidechain groups will be a function of the average branching of the precursor OXO acids used in the esterification process. The average branching per triglyceride of structure (I) will equal three times the average branching per group, since each triglyceride bears three alkyl groups.

[0031] NMR analyses of the branching found in the OXO acids finds that these branches are typically methyl groups. For example, with the branched C_7 OXO acid, typical isomers include 3-methylhexanoic acid, 4-methylhexanoic acid, 5-methylhexanoic acid, as well as some 3,4-dimethylpentanoic acid, 2,4-dimethylpentanoic acid and 2,3-dimethylpentanoic acid. Some n-heptanoic acid is also present. Similar products are found with mixtures of isomers in the C_8 and C_9 OXO acids. C_9 OXO acids when prepared from the OXO reaction using diisobutylene as the olefin feed will give mostly trimethyl branched acids, such as 3,5,5-trimethylhexanoic acid. The OXO acids generally provide more than one isomer.

[0032] In the first step of the process for producing triglycerides disclosed herein, linear or branched aldehydes may be produced by hydroformylation of C_3

to C₉ olefins that in turn have been produced by propylene, butene, and/or pentene oligomerization over solid phosphoric acid or zeolite catalysts. The oligomerization processes are per se well-known. See, for instance, U.S. Patent Nos. 7,253,330, and 7,145,049. The hydroformylation process step is depicted in Figure 1. The hydroformylation process produces a mixture of aldehydes and alcohols depending upon the catalyst used and the processing conditions. In one form, the hydroformylation reaction may be catalyzed by a metal selected from Groups 8-10 according to the new notation for the Periodic Table as set forth in Chemical Engineering News, 63(5), 27 (1985). In particular, Ru catalysts tend to be more selective toward forming aldehydes as opposed to alcohols compared to Co catalysts. The non-limiting exemplary metal catalysts selected from Rh and Co may also be used with an organic ligand to further improve catalyst activity and selectivity. In another form, the feed for the hydroformylation process may be formed by dimerizing a feedstock selected from propylene, butenes, pentenes and mixtures thereof by solid phosphoric acid or a zeolite dimerization.

[0033] In one form, the resulting C₄ to C₁₀ aldehydes can then be recovered from the crude hydroformylation product stream by fractionation as depicted in Figure 1 to remove unreacted olefins and the corresponding alcohols. These C₄ to C₁₀ aldehydes can then in turn be oxidized to their respective C₄ to C₁₀ acids using air or enriched air as an oxygen source as depicted in Figure 1. In an alternative form, that avoids the previous fractionation step, the one or more C₄ to C₁₀ linear or branched alkyl aldehydes/alcohols can be oxidized to the corresponding acids and alcohols and then the unreacted aldehydes purified by distillation. The separated unreacted aldehydes plus the alcohols are oxidized to their corresponding acids. This alternative form may be particularly suitable when using a Ru catalyst during the hydroformylation process. In either of the preceding forms, the distilled aldehydes may be oxidized to an acid followed by fractionation to remove unreacted alcohol. The oxidizing steps may be either catalyzed or non-catalyzed.

[0034] Non-limiting exemplary acids include acetic acid, bromoacetic acid, propanoic acid, 2-chloropropanoic acid, 3-chloropropanoic acid, 2-methylpropanoic acid, 2-ethylpropanoic acid, 2-methylbutanoic acid, 3-methylbutanoic acid, 2-ethylbutanoic acid, 2,2-dimethylbutanoic acid, 2,3-dimethylbutanoic acid, 3,3-dimethylbutanoic acid, 2-methylpentanoic acid, 3-methylpentanoic acid, 4-methylpentanoic acid, cyclopentyl acetic acid, cyclopentyl propanoic acid, cyclopentyl hexanoic acid, cyclohexane carboxylic acid, cyclohexane acetic acid, 2-ethylhexanoic acid, nonadecafluorodecanoic acid, decanoic acid, and undecanoic acid.

[0035] Following the oxidation reaction, the C₄ to C₁₀ acids can then be purified by fractionation to remove unreacted aldehydes, lights and heavies formed during oxidation.

[0036] The C₄ to C₁₀ acids can then be esterified as depicted in Figure 1 with glycerol or other alcohols including ethylene glycol, and other polyols. The esterification step may be catalyzed by at least one metal selected from Ti, Zr or Sn, or a mixture thereof, or catalyzed by an organic acid. In an alternative form, the esterification step may be uncatalyzed.

[0037] Single carbon number linear or branched acids can be used in the esterification, or linear or branched acids of differing carbon numbers can be used to optimize product cost and performance requirements. Hence, a combination of one or more linear or branched C₄ to C₁₀ acids may be esterified to form mixed triglycerides including linear or branched alkyl esters, wherein the total carbons for the triester groups (R¹, R², and R³ plus three carbons for the three carbonyl groups and not including the three glycerol backbone carbons) ranges from 20 to 25. Such range of total carbons for the triester groups yield triglycerides with outstanding performance when used as plasticizers for polymeric resins. More particularly, triglycerides with linear or branched alkyl groups and a total carbon number of the triester groups ranging from 20 to 25 have been discovered to yield

low volatility and excellent compatibility with a broad range of polymeric resins, including PVC. Such triglycerides also yield outstanding low temperature performance properties.



[0038] Glycerol is currently an attractive polyol for use to make plasticizers because it is abundantly available. It is, for instance, a major byproduct of biodiesel production. Other polyols, however, may be utilized to produce plasticizers, such as glycols, preferably ethylene glycol or propylene glycol. Mixtures of polyols may be used, such as a mixture of glycerol with propylene glycol.


[0039] It is preferred that the polyols be fully esterified so that there are a low to negligible amount of free hydroxyl groups. Thus, for example, it is preferred that glycerol is esterified to the triester.

[0040] Following the esterification process, a fractionation process, such as distillation, may be used to separate the C₂₀ to C₂₅ triglycerides from the lighter and heavier triglycerides. The light triglycerides may be recycled back to the esterification step of the process. The heavy triglycerides may also be recycled back to the esterification step of the process after adding fresh acids and polyol. The C₂₀ to C₂₅ triglyceride may be chosen from 669 triglyceride, 696 triglyceride, 699 triglyceride, 969 triglyceride, 5510 triglyceride, 5105 triglyceride, 51010 triglyceride, 10510 triglyceride, 677 triglyceride, 767 triglyceride, and 777 triglyceride. Note however that these C₂₀ to C₂₅ triglycerides may include other proportions (55 wt% or less relative to the total) of triglycerides which do not have a total carbon number of the triester groups falling within the 20 to 25 range. If the total weight % of these non-inventive triglycerides is greater than 55 wt%, plasticizer properties (volatility, compatibility, low temperature performance, etc.) will begin to be negatively impacted. Hence, for the C₂₀ to C₂₅ triglycerides disclosed herein, linear or branched alkyl triglycerides with a total carbon number of from 20 to 25 should comprise greater than or equal to 45 wt%, or greater than


or equal to 60 wt%, or greater than or equal to 75 wt%, or greater than or equal to 90 wt%, or greater than or equal to 95 wt%, or greater than or equal to 97 wt%, or greater than or equal to 99 wt%, or greater than or equal to 99.5 wt%, or greater than or equal to 99.9 wt% of the plasticizer. The fractionation process following the esterification step may be used to increase the purity of C₂₀ to C₂₅ triglycerides.

[0041] The chemistry and a simplified process to produce triglycerides via the route described above is shown in equations (1) - (3), below. For simplicity, the branched hexene feed example is shown in eqn (1), but the feed can be linear or branched butene, pentenes, hexenes, heptenes, octenes or nonenes as the starting olefins. As discussed above, the resulting C₄, C₅, C₆, C₇, C₈, C₉, and C₁₀ acids may be used individually or together in mixtures to make mixed carbon number esters to be used as plasticizers as long as the sum of carbons for the triester groups (R¹, R², and R³ plus three carbons for the three carbonyl groups and not including the three glycerol backbone carbons) for greater than or equal to 45 wt% of the plasticizer product is from 20 to 25. Correspondingly, the C₄-C₁₀ acids may be linear, branched, or a combination thereof. This mixing of carbon numbers and levels of branching may be manipulated to achieve the desired compatibility with PVC for the respective polyol used for the polar end of the plasticizer, and to meet other plasticizer performance properties.



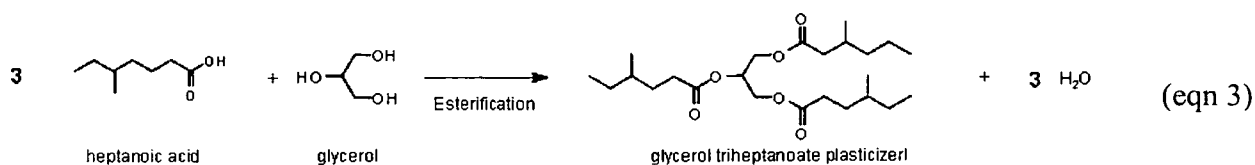

[0042] Equations 4-7 (designated 4-, 5-, 6- and 7- below) are as follows:

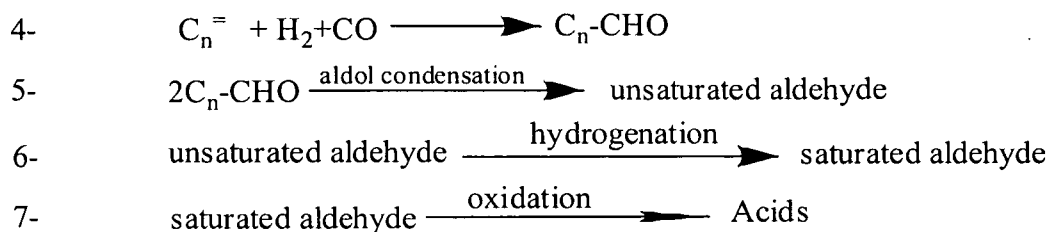

[0043] The applicability of the triglyceride structures as potential PVC plasticizers can be screened by estimating their relative solubility in PVC using Small's group contribution method to calculate solubility parameters for each structure (see The Technology of Plasticizers by J. Sears and J. Darbey, John Wiley & Sons, New York, 1982, pp 95-99, discussing using the Small formula to looking at plasticizer compatibility with PVC; this paper sites as a reference, the original work by Small: Small, P. A., "Some Factors Affecting the Solubility of Polymers", J. Appl. Chem, 3, pp 76-80 (1953); see also using Small's group contribution values from the Polymer Handbook, 3rd Ed., J. Brandrup & E. H. Immergut, Eds. John Wiley, New York, (1989)). These calculations are shown below in Table 1 for the C6 triglyceride (also referred to as 666 triglyceride):

Table 1**C₆ Triglyceride**

	Solubility	Number	Solubility Contrib	MW	MW Contrib
CH ₃	214	6	1284	15	90
--CH ₂ --	133	8	1064	14	112
--CH==	28	4	112	13	52
COO esters	310	3	930	44	132
			3390		386
<i>Solubility Parameter =</i>			8.43	<i>Density =</i>	0.96
<i>Delta to PVC =</i>			-1.23		

[0044] However, the solubility parameter data alone does not predict both compatibility and volatility in PVC. The C₆ triglyceride (also referred to as 666 triglyceride) composition with a total carbon number of 18 (excluding the three glycerol backbone carbons) yields excessive volatility when used in PVC resins as a plasticizer, although compatibility is adequate.

[0045] Likewise, the solubility may also be calculated for the C₇ triglyceride (also referred to as 777 triglyceride), as shown in Table 2:

Table 2**C₇ Triglyceride**

	Solubility	Number	Solubility Contrib	MW	MW Contrib
CH ₃	214	6	1284	15	90
--CH ₂ --	133	11	1463	14	154
--CH==	28	4	112	13	52
COO esters	310	3	930	44	132
			3789		428
<i>Solubility Parameter =</i>			8.50	<i>Density =</i>	0.96
<i>Delta to PVC =</i>			-1.16		

[0046] The C₇ triglyceride (also referred to as 777 triglyceride) composition with a total carbon number of 21 (excluding the three glycerol backbone carbons) yields adequate volatility and excellent compatibility when used in PVC resins as a plasticizer.

[0047] Table 3 shows the solubility values calculated by the same method for the C₈ triglyceride (also referred to as 888 triglyceride):

Table 3

C₈ Triglyceride

	Solubility	Number	Solubility Contrib	MW	MW Contrib
CH ₃	214	6	1284	15	90
--CH ₂ --	133	14	1862	14	196
--CH==	28	4	112	13	52
COO esters	310	3	930	44	132
			4188		470
<i>Solubility Parameter =</i>			8.55	<i>Density =</i>	0.96
<i>Delta to PVC =</i>			-1.11		

[0048] The C₈ triglyceride (also referred to as 888 triglyceride) composition with a total carbon number of 24 (excluding the three glycerol backbone carbons) yields adequate volatility and excellent compatibility when used in PVC resins as a plasticizer.

[0049] Table 4 shows the solubility values calculated by the same method for the C₉ triglyceride (also referred to as 999 triglyceride):

Table 4

C₉ Triglyceride

	Solubility	Number	Solubility Contrib	MW	MW Contrib
CH ₃	214	6	1284	15	90
--CH ₂ --	133	17	2261	14	238
--CH==	28	4	112	13	52
COO esters	310	3	930	44	132
			4587		512
<i>Solubility Parameter =</i>			8.6	<i>Density =</i>	0.96
<i>Delta to PVC =</i>			-1.06		

[0050] Again, however, the solubility parameter data alone does not predict both excellent compatibility and volatility in PVC. The C₉ triglyceride (also referred to as 999 triglyceride) composition with a total carbon number of 27

(excluding the three glycerol backbone carbons) yields adequate volatility, but inferior compatibility when used in PVC resins as a plasticizer.

[0051] The solubility parameter of PVC is calculated by the same Small's Group Contribution Method to be 9.66. The differences in solubility parameters between the triglyceride structures in Figure 1 and PVC are shown in Tables 1-4. These differences from PVC range from 1.23 for the C₆ triglyceride (also referred to as 666 triglyceride) to 1.06 units for the C₉ triglyceride (also referred to as 999 triglyceride), which indicates reasonable expected solubility in PVC for these materials. As references, the solubility parameters for two well-known phthalate plasticizers, di-isononyl phthalate (DINP) and diisodecyl phthalate (DIDP) are 8.88 (delta to PVC = 0.78), and 8.56 (delta to PVC = 1.10) respectively. The estimated solubility parameter for one non-phthalate plasticizer, di-isononyl cyclohexanoate, is 7.32 by Small's method. This is a difference of 2.34 solubility parameter units from PVC.

[0052] A non-limiting process embodiment is illustrated in Figure 1. Propylene is used as feedstock to an oligomerization reaction. The reaction may be continuous, batch, or semibatch. Unreacted C₃ olefins are distilled off and optionally recycled. Trimers and tetramers may be recovered as bottoms product with the desired dimer hexene taken as a sidestream and send to the hydroformylation reaction. Carbon monoxide and hydrogen, conveniently supplied as Syngas, are also supplied to the reactor. The products are then separated by fractionation, with light olefins optionally recycled and the C₇ aldehydes and C₇ alcohols being separated. The amount of aldehyde and alcohols produced may be attenuated in the hydrofinishing section. In an embodiment, the C₇ aldehydes are then oxidized with the addition of air and/or oxygen, and unreacted aldehydes and heavies are separated out. The desired product C₇ acid is then esterified with polyol, in this embodiment glycerol and recovered as the triglyceride with a total carbon number (excluding the three glycerol backbone carbons) of the triester groups of 21.

[0053] In another form of the present disclosure, a composition comprising a blend of two or more different triglycerides may also provide outstanding plasticizer performance in range of polymer resins, including PVC. The blend of the two or more different triglycerides should include triglycerides according to the composition and process of making disclosed herein. That is, each triglyceride in the mixed triglyceride blend includes a linear or branched alkyl triglyceride; wherein the total carbon number of the triester groups ranges from 20 to 25. In one form, the mixed triglyceride includes a two component blend of 669/696 triglyceride and 699/969 triglyceride. In another form, the mixed triglyceride includes a two component blend of 5510/5105 triglyceride and 51010/10510 triglyceride. In yet another form, the mixed triglyceride includes a two component blend of 677/767 triglyceride and 777 triglyceride. Note however that these mixed triglyceride blends may include other proportions (defined herein as 55 wt% or less relative to the total) of triglycerides which do not have a total carbon number of the triester groups falling within the 20 to 25 range. If the total weight % of these non-inventive triglycerides is greater than 55 wt% in the mixed triglyceride blend, plasticizer properties (volatility, compatibility, low temperature performance, etc.) will begin to be negatively impacted. Hence, for the mixed triglycerides disclosed herein, linear or branched alkyl triglycerides with a total carbon number (excluding the three glycerol backbone carbons) of from 20 to 25 should comprise greater than or equal to 45 wt%, or greater than or equal to 60 wt%, or greater than or equal to 75 wt%, or greater than or equal to 90 wt%, or greater than or equal to 95 wt%, or greater than or equal to 97 wt%, or greater than or equal to 99 wt%, or greater than or equal to 99.5 wt%, or greater than or equal to 99.9 wt% of the mixed triglyceride blend. These mixed triglyceride blends may also be used as plasticizers and yield outstanding properties and performance with a variety of polymer resins.

[0054] The plasticizers according to the current disclosure may also be used with vinyl chloride-type resins, polyesters, polyurethanes, ethylene-vinyl acetate

copolymer, rubbers, acrylics, polymer blends such as of polyvinyl chloride with an ethylene-vinyl acetate copolymer or polyvinyl chloride with a polyurethane or ethylene-type polymer.

EXAMPLES

General procedure for esterification:

[0055] Into a four necked 1000 mL round bottom flask equipped with an air stirrer, nitrogen inductor, thermometer, Dean-Stark trap and chilled water cooled condenser were added 0.8 mole glycerol, 1.6 mole acid which has n carbons and 1.6 mole acid which has m carbons (n and m could be equal or the same and could be linear or branched). The Dean-Stark trap was filled with the lighter boiling acid to maintain the same molar ratio of acids in the reaction flask. The reaction mixture was heated to 220°C with air stirring under a nitrogen sweep. The water collected in the Dean-Stark trap was drained frequently. The theoretical weight of water was obtained in about three hours at 220°C indicating 96% conversion. The reaction mixture was heated an additional 10 hours for a total of 13 hours to achieve complete conversion to the triglycerides. The data are shown in the following figures. Composition for the triglyceride products is given in the following manner: a mixed triglyceride of acids with X and Y carbon numbers may theoretically contain products with three chains of length X (denoted XXX), three chains of length Y (denoted YYY), and products with mixed distributions (XXY, XYX, XYY, or YXY where the first and third character represent the terminal (primary) glyceride chains and the second character represents the internal (secondary) glyceride chain). The sum of the carbon numbers for the three chains (including the three carbonyl carbons and not including the three glycerol backbone carbons) ranges from 20 to 25 for the at least 45 wt.% of the plasticizer product. Gas chromatography analysis on the products was conducted using a Hewlett-Packard 5890 GC equipped with a HP6890 autosampler, a HP flame-ionization detector, and a J&W Scientific DB-1 30 meter column (0.32

micrometer inner diameter, 1 micron film thickness, 100% dimethylpolysiloxane coating). The initial oven temperature was 60°C; injector temperature 290°C; detector temperature 300°C; the temperature ramp rate from 60 to 300°C was 10°C/minute with a hold at 300°C for 14 minutes. The calculated %'s reported for products were obtained from peak area, with an FID detector uncorrected for response factors. Table 5 provides branching characteristics for the OXO acids used in the Examples.

Table 5. ^{13}C NMR Branching Characteristics of Typical C_7 - C_{10} OXO Acids.

OXO Acid	Average Carbon No.	Pendant Methyls ^a	Total Methyls ^b	Pendant Ethyls	% Carbonyls α to Branch
C_7	6.88-7.92	0.98-1.27	1.94-2.48	0.16-0.26	11.3-16.4
C_8	8.1-8.3	n/a	2.7	n/a	12-15
C_9	9.4	n/a	n/a	n/a	12
C_{10}	10.2	n/a	n/a	n/a	12

^a C_1 Branches. ^bIncludes methyls on all branch lengths and chain end methyls.

Illustrative Example 1:

[0056] 2.5 mole glycerol (Aldrich 99.5%) was esterified with 5.0 mole 2-methylvaleric acid (six carbons and branched) and 5.0 mole OXO C_9 acid (nine carbons, and linear, branched and mixtures thereof). After unreacted acid was distilled away, the mixture was extracted once with 10 wt% sodium carbonate solution at room temperature, then dried by stirring over 5 wt% magnesium sulfate for one hour. The mother solution was analyzed by GC. This solution was fractionated under vacuum.

[0057] Fractions which have similar composition were combined for plasticizing performance tests. The compositions of the combined fractions as determined by GC and the mother solution before distillation are shown in Figure 2. The compositions of these triglyceride fractions are as follows:

Material 1-A: Unfractionated mother solution: 9.3% 666, 33.9% 669/696, 40.8% 699/969, 16.1% 999.

Material 1-B: 669/696-enriched product; 0.73% 666, 76.82% 669/696, 21.16% 699/969, 1.07% 999.

Material 1-C: 699/969-enriched product: 0.04% 666, 3.9% 669/696, 85.92% 699/969, 10.15% 999.

Illustrative Example 2:

[0058] 0.8 mole glycerol was esterified with 1.6 mole valeric acid (5 carbons and linear) and 1.6 mole OXO C₁₀ acid (10 carbons, and linear, branched and mixtures thereof). The unreacted acid was distilled. The mother solution was analyzed by GC. This solution was fractionated under vacuum.

[0059] Fractions which have similar composition were combined for plasticizing performance tests. The composition of the combined fractions and the mother solution before distillation are shown in Figure 4. The compositions of these triglyceride fractions are as follows:

Material 2-A: Unfractionated mother solution; 8.4% 555, 33.3% 5510/5105, 40.9% 51010/10510, 17.0% 101010.

Material 2-B: 5510/5105-enriched product; 1.0% 555, 91.3% 5510/5105, 7.7% 51010/10510, 0% 101010.

Material 2-C: 51010/10510-enriched product; 0% 555, 3.8% 5510/5105, 91.5% 51010/10510, 4.7% 101010.

Illustrative Example 3:

[0060] 2.0 mole glycerol (Aldrich 99.5%) was esterified with 4.0 mole 2-methylvaleric acid (six carbons and branched) and 4.0 mole 3,5,5-trimethylhexanoic acid (nine carbons and branched). The crude reaction

mixture was fractionated by distillation. Aliquots of the distillate cuts were also recombined to provide a material with a composition representative of an unfractionated material, which was analyzed by GC (composition: 99.9% triglyceride and 0.1% diglyceride). The compositions of these triglyceride fractions and the representative recombined material are as follows:

Fraction 3-A: Recombined material representative of mother solution: 9.9% 666, 34.7% 669/969, 43.4% 699/969, 11.9% 999.

Fraction 3-B: 666 and 669/696-enriched product: 25.0% 666, 56.2% 669/696, 14.7% 669/969, 2.4% 999 and 0.1% C9 acid.

Fraction 3-C: 669/696-enriched product; 1.2% 666, 51.4% 669/696, 41.0% 669/969, 5.1% 999.

Fraction 3-D: 699/969-enriched product; 5.0% 669/696, 76.2% 699/969, 17.2% 999.

Fraction 3-E: 999-enriched product, 49.0% 699/969, 49.6% 999.

Illustrative Example 4:

[0061] 0.8 mole glycerol was esterified with 1.6 mole 2-methylvaleric acid (six carbons and branched) and 1.6 mole C₇ OXO acid (seven carbons, and linear, branched and mixtures thereof). The unreacted acid was distilled. The mother solution was analyzed by GC. The compositional data was as follows: 0.59% 666, 9.05% 667/676, 40.3% 677/767, 50.1% 777 (denoted as Fraction 4).

Comparative Example C₁:

[0062] One mole glycerol was esterified with 3.3 mole 2-methylvaleric acid. The unreacted acid was distilled. The mother solution was analyzed by GC (99.8% 666 triglyceride). The plasticization of this material was not tested due to its unacceptable volatility.

Comparative Example C₂:

[0063] 0.53 mole glycerol was esterified with 1.9 mole C₉ OXO acid. The unreacted acid was distilled. The mother solution was analyzed by GC (100% 999 triglyceride).

Comparative Example C₃:

[0064] 1 mole glycerol was esterified with 3.3 mole 3,5,5-trimethylhexanoic acid. The unreacted acid was distilled. The mother solution was analyzed by GC (100% 999 triglyceride).

Comparative Example C₄:

[0065] 1 mole glycerol was esterified with 3.3 mole C₁₀ OXO acid. The unreacted acid was distilled. The mother solution was analyzed by GC (99.86% 101010 triglyceride). The plasticization of this material was not tested due to the known poor compatibility of the 999 triglycerides.

Illustrative Example 5:

[0066] One mole glycerol was esterified with a blend of 0.67 mole valeric acid (n-pentanoic acid), 0.67 mole 2-methylvaleric acid, 0.67 mole C₇ OXO acid, 0.67 mole C₈ OXO acid, 0.67 mole C₉ OXO acid, and 0.67 mole C₁₀ OXO acid. The unreacted acid was distilled. The mother solution was analyzed by GC (100% triglycerides) and contained the possible mixed triglyceride isomers of the various sidechains. Quantification of the isomer distribution was not possible; however, a similar triglyceride material prepared with linear C₅-C₁₀ acids had 67.74 wt% C₂₀-C₂₅ triglycerides by GC; it is assumed the content of this product is similar.

Illustrative Example 6. General procedure for the use of mixed triglyceride esters to plasticize poly(vinyl chloride).

[0067] A 4.5 g portion of the ester sample was weighed into an Erlenmeyer flask which had previously been rinsed with uninhibited tetrahydrofuran (THF) to remove dust. A 0.63 g portion of a 70:30 by weight solid mixture of powdered

Drapex[®] 6.8 (Crompton Corp.) and Mark[®] 4716 (Chemtura USA Corp.) stabilizers was added along with a stirbar. The solids were dissolved in 90 mL uninhibited THF. Oxy Vinyls[®] 240F PVC (9.0 g) was added in powdered form and the contents of the flask were stirred overnight at room temperature until dissolution of the PVC was complete (a PVC solution for preparation of an unplasticized comparative sample was prepared using an identical amount of stabilizer, 100 mL solvent, and 13.5 g PVC). The clear solution was poured evenly into a flat aluminum paint can lid (previously rinsed with inhibitor-free THF to remove dust) of dimensions 7.5" diameter and 0.5" depth. The lid was placed into an oven at 60°C for two hours with a moderate nitrogen purge. The pan was removed from the oven and allowed to cool for a ~5 min period. The resultant clear film was carefully peeled off of the aluminum, flipped over, and placed back evenly into the pan. The pan was then placed in a vacuum oven at 70°C overnight to remove residual THF. The dry, flexible, almost colorless film was carefully peeled away and exhibited no oiliness or inhomogeneity, except where noted in the Tables. The film was cut into small pieces to be used for preparation of test bars by compression molding (size of pieces was similar to the hole dimensions of the mold plate). The film pieces were stacked into the holes of a multi-hole steel mold plate, pre-heated to 170°C, having hole dimensions 20 mm x 12.8 mm x 1.8 mm (ASTM D1693-95 dimensions). The mold plate was pressed in a PHI company QL-433-6-M2 model hydraulic press equipped with separate heating and cooling platforms. The upper and lower press plates were covered in Teflon[™]-coated aluminum foil and the following multistage press procedure was used at 170°C with no release between stages: (1) three minutes with 1-2 ton overpressure; (2) one minute at 10 tons; (3) one minute at 15 tons; (4) three minutes at 30 tons; (5) release and three minutes in the cooling stage of the press (7°C) at 30 tons. A knockout tool was then used to remove the sample bars with minimal flexion. Near-colorless, flexible bars were obtained which, when stored at room temperature, showed no oiliness or exudation several weeks after pressing, except where noted in the Tables. The bars were allowed to age at room

temperature for at least one week prior to evaluation of phase behavior with Differential Scanning Calorimetry (DSC) and thermo-physical properties with Dynamic Mechanical Thermal Analysis (DMTA).

Illustrative Example 7: Differential Scanning Calorimetry (DSC) and Thermogravimetric Analysis (TGA) Property Study of Mixed Triglyceride Esters.

[0068] Thermogravimetric Analysis (TGA) was conducted on the neat esters prepared in Examples 1-4 and small portions of the neat and plasticized PVC bars prepared in Example 6, using a TA Instruments AutoTGA 2950HR instrument (25-600°C, 10°C/min, under 60 cc N₂/min flow through furnace and 40 cc N₂/min flow through balance; sample size 10-20 mg). Table 6 provides a volatility comparison of the different ester fractions. Table 7 provides a volatility comparison of the neat and plasticized PVC bars prepared in Example 6. Differential Scanning Calorimetry (DSC) was also performed on the neat plasticizers, using a TA Instruments 2920 calorimeter fitted with a liquid N₂ cooling accessory. Samples were loaded at room temperature and cooled to about -130°C at 10°C/min and analyzed on heating to 75°C at a rate of 10°C/min. Table 6 provides a glass transition (T_g) comparison of the different ester fractions. T_g s given in Table 6 are midpoints of the second heats (unless only one heat cycle was performed, in which case the first heat T_g , which is typically in very close agreement, is given).

Table 6. Volatility and Glass Transition Properties
of Mixed Triglyceride Esters.

Sample	TGA 1% Wt Loss (°C)	TGA 5% Wt Loss (°C)	TGA 10% Wt Loss (°C)	TGA Wt Loss at 220 °C (%)	DSC T_g (°C)
1-A	167.4	200.7	216.7	11.5	-89.9
1-B	165.5	198.9	213.2	13.7	-91.1
1-C	182.0	212.4	227.1	7.2	-87.0
2-A	171.7	203.7	219.3	10.3	-89.6
2-B	159.4	191.8	205.9	19.1	-91.6
2-C	175.7	212.7	227.9	7.0	-85.4
3-A	150.0	184.6	199.7	23.8	-82.7
3-B	---	---	---	---	---
3-C	---	---	---	---	---
3-D	---	---	---	---	---
3-E	---	---	---	---	---
4	162.3	191.3	205.5	19.0	-93.1
5	172.8	204.0	218.9	10.5	-88.9
C ₁	---	---	---	47.4	-97.1
C ₂	172.4	220.8	236.4	4.8	-82.1
C ₃	---	212.7	228.7	6.8	-68.1
C ₄	---	---	---	2.2	-79.6

--- Data not obtained.

Table 7. Volatility Properties of Neat PVC and PVC Sample Bars Plasticized With Mixed Triglyceride Esters.

Plasticizer Used in Bar	TGA 1% Wt Loss (°C)	TGA 5% Wt Loss (°C)	TGA 10% Wt Loss (°C)	TGA % Wt Loss at 220 °C
None (Neat PVC)	129.9	192.3	255.4	6.3
1-A	193.1	236.0	256.4	2.9
1-B	185.2	225.1	252.3	4.2
1-C	199.9	244.4	256.8	2.1
2-A	185.9	233.0	246.5	3.5
2-B	185.5	226.0	244.1	4.2
2-C	204.3	242.0	251.1	1.9
3-A*	188.5	233.3	251.8	3.4
3-B*	173.6	213.5	245.0	5.8
3-C*	180.8	218.1	251.0	5.3
3-D*	196.9	239.9	260.8	2.7
3-E*	196.7	242.6	261.0	2.6
4	180.5	218.8	241.2	5.2
5	190.2	229.9	250.6	2.0
C ₁	Not made	Not made	Not made	Not made
C ₂ *	---	---	---	---
C ₃ **	Not made	Not made	Not made	Not made
C ₄	Not made	Not made	Not made	Not made

--- Data not obtained. *Sample bars of C₂, 3-A, 3-D, and 3-E were oily; sample bars of fractions 3-B and 3-C were also noted to be slightly oily or oily after long storage periods and/or DMTA analysis. **The cast film of PVC/C₃ was oily/hazy; no sample bar was prepared.

Illustrative Example 8. Demonstration of plasticization of PVC with triglyceride esters via Differential Scanning Calorimetry (DSC).

[0069] Differential Scanning Calorimetry (DSC) was performed on the compression-molded sample bars prepared in Example 6 (PVC : plasticizer ratio 2:1) using a TA Instruments 2920 calorimeter fitted with a liquid N₂ cooling accessory. Samples were loaded at room temperature and cooled to -90°C at 10°C/min, and then analyzed on heating at a rate of 10°C/min to 150-170°C for plasticized PVC bars, and to 100°C for the comparative neat PVC bar. Small

portions of the sample bars (typical sample mass 5-7 mg) were cut for analysis, making only vertical cuts perpendicular to the largest surface of the bar to preserve the upper and lower compression molding “skins”; the pieces were then placed in the DSC pans so that the upper and lower “skin” surfaces contacted the bottom and top of the pan. Table 8 provides the first heat T_g onset, midpoint, and end for neat PVC and the plasticized bars. A lowering and broadening of the glass transition for neat PVC is observed upon addition of the esters, indicating plasticization and extension of the flexible temperature range of use for neat PVC (for aid in calculating the numerical values of these broad transitions, the DSC curve for each plasticized bar was overlaid with the analogous Dynamic Mechanical Thermal Analysis (DMTA) curve, taken and analyzed as described in Example 9, since the DMTA curve provides additional guidance about the proper temperature regions for the onset, midpoint, and end of T_g). Figure 4 shows DSC curves for neat PVC and a typical curve for a plasticized bar (containing material 2-B), overlaid with representative analogous DMTA curves.

Table 8. Glass Transition Onset, Midpoint, and End for Plasticized PVC Bars

Plasticizer Used in Bar	T_g Onset (°C)	T_g Midpt (°C)	T_g End (°C)	T_m Max (°C) and ΔH_f (J/g) ^a
None (Neat PVC)	44.5	46.4	48.9	not calc.
1-A	-10.5	-6.3	-5.9	not calc.
1-B	-52.2	-29.6	-12.7	56.7 (1.00)
1-C	-49.9	-27.9	-10.1	53.9 (0.85)
2-A	-63.9	-40.1	-16.3	not calc.
2-B	-62.9	-40.6	-18.6	not calc.
2-C	-61.5	-41.3	-21.8	61.6 (0.99)
3-A*	---	---	---	---
3-B*	-28.2	-17.3	-6.3	not calc.
3-B*	-27.7	-15.4	-3.3	55.6 (0.77)
3-D*	-28.6	-14.8	-0.9	52.3 (0.77)
3-E*	-27.0	-14.5	-2.0	not calc.
4	-60.7	-42	-23.4	not calc.
C ₁	Not made	Not made	Not made	Not made
C ₂ *	---	---	---	---
C ₃ **	Not made	Not made	Not made	Not made
C ₄	Not made	Not made	Not made	Not made

--- Data not obtained. *Sample bars of C₂, 3-A, 3-D, and 3-E were oily; sample bars of fractions 3-B and 3-C were also noted to be slightly oily or oily after long storage periods and/or DMTA analysis. **The cast film of PVC/C₃ was oily/hazy; no sample bar was prepared. ^aMost sample bars showed a weak melting point (T_m) from the crystalline portion of PVC. Often this weak transition was not specifically analyzed, but data is given here in instances where it was recorded.

Illustrative Example 9. Demonstration of plasticization of PVC with mixed triglyceride esters via Dynamic Mechanical Thermal Analysis (DMTA).

[0070] Three-point bend Dynamic Mechanical Thermal Analysis (DMTA) with a TA Instruments DMA Q980 fitted with a liquid N₂ cooling accessory and a three-point bend clamp assembly was used to measure the thermo-mechanical performance of neat PVC and the PVC/plasticizer blend sample bars prepared in Example 6. Samples were loaded at room temperature and cooled to -60°C at a cooling rate of 3°C/min. After equilibration, a dynamic experiment was

performed at one frequency using the following conditions: 3°C/min heating rate, 1 Hz frequency, 20 micrometer amplitude, 0.01 pre-load force, force track 120%. Two or three bars of each sample were typically analyzed; numerical data was taken from the bar typically exhibiting the highest room temperature storage modulus (the bar assumed to have the fewest defects). Glass transition onset values were obtained by extrapolation of the tan delta curve from the first deviation from linearity. The DMTA measurement gives storage modulus (elastic response modulus) and loss modulus (viscous response modulus); the ratio of loss to storage moduli at a given temperature is tan delta. The beginning (onset) of the T_g (temperature of brittle-ductile transition) was obtained for each sample by extrapolating a tangent from the steep inflection of the tan delta curve and the first deviation of linearity from the baseline prior to the beginning of the peak. Table 9 provides a number of DMTA parameters for neat PVC and PVC bars plasticized with triglyceride esters: T_g onset (taken from tan delta); peak of the tan delta curve; storage modulus at 25°C; and the temperature at which the storage modulus equals 100 MPa (this temperature was chosen to provide an arbitrary measure of the temperature at which the PVC loses a set amount of rigidity; too much loss of rigidity may lead to processing complications for the PVC material). The flexible use temperature range of the plasticized PVC samples is evaluated as the range between the T_g onset and the temperature at which the storage modulus was 100 MPa. A lowering and broadening of the glass transition for neat PVC is observed upon addition of the esters, indicating plasticization and extension of the flexible temperature range of use for neat PVC. Plasticization (enhanced flexibility) is also demonstrated by lowering of the PVC room temperature storage modulus upon addition of the esters.

[0071] Figure 5 shows DMTA tan delta and storage modulus curves versus temperature for neat PVC and PVC plasticized with a typical mixed triglyceride (material 2-B). Differences in blend performance (shape of the tan delta and storage modulus versus temperature curves) in the temperature range between -40

and -20°C are likely to be optimizable by adjusting the ratio of PVC to ester in the blend.

Table 9. Various DMTA Thermal Parameters for PVC Bars
Plasticizer with Mixed Triglyceride Esters

Plasticizer Used in Bar	Tan ΔT_g Onset (°C)	Tan Δ Peak (°C)	25°C Storage Mod. (MPa)	Temp. of 100 MPa Storage Mod. (°C)	Flexible Use Range (°C) ^a
None (Neat PVC)	44.0	61.1	1433	57.1	13.1
1-A	-41.0	23.5	56.2	16.6	57.6
1-B	-41.8	18.0	56.2	19.8	61.6
1-C	-42.1	39.2	64.9	19.7	61.8
2-A	-49.3	21.4	50.2	15.4	64.7
2-B	-48.6	13.7	26.0	7.8	56.4
2-C	-45.9	30.5	81.1	22.3	68.2
3-A*	-46.8	42.7	153.1	30.3	77.1
3-B*	-42.8	29.4	70.3	21.5	64.3
3-C*	-41.5	31.8	104.7	25.5	67.0
3-D*	-35.5	54.6	383.7	41.8	77.3
3-E*	-18.3	56.2	376.8	43.8	62.1
4	-48.3	15.2	37.9	12.9	61.2
5	-49.1	29.4	69.5	19.8	68.9

--- Data not obtained. *Sample bars of fractions 3-A, 3-D, and 3-E were oily; sample bars of fractions 3-B and 3-C were also noted to be slightly oily or oily after long storage periods and/or DMTA analysis. ^aDifference between temperature of 100 MPa storage modulus and onset of T_g .

[0072] All patents and patent applications, test procedures (such as ASTM methods, UL methods, and the like), and other documents cited herein are fully incorporated by reference to the extent such disclosure is not inconsistent with this invention and for all jurisdictions in which such incorporation is permitted.

[0073] When numerical lower limits and numerical upper limits are listed herein, ranges from any lower limit to any upper limit are contemplated. While the illustrative embodiments of the invention have been described with particularity, it will be understood that various other modifications will be

apparent to and can be readily made by those skilled in the art without departing from the spirit and scope of the invention. Accordingly, it is not intended that the scope of the claims appended hereto be limited to the examples and descriptions set forth herein but rather that the claims be construed as encompassing all the features of patentable novelty which reside in the present invention, including all features which would be treated as equivalents thereof by those skilled in the art to which the invention pertains.

[0074] The invention has been described above with reference to numerous embodiments and specific examples. Many variations will suggest themselves to those skilled in this art in light of the above detailed description. All such obvious variations are within the full intended scope of the appended claims.

CLAIMS:

1. A process for producing a plasticizer comprising:
 - (i) recovering at least one linear C₄ to C₁₀ aldehyde, one branched C₄ to C₁₀ aldehyde, or a combination thereof from a hydroformylation product;
 - (ii) oxidizing the linear, branched or combination thereof C₄ to C₁₀ aldehyde to form a linear, branched or combination thereof C₄ to C₁₀ acid;
 - (iii) esterifying the linear, branched or combination thereof C₄ to C₁₀ acid with a polyol to yield a linear alkyl triglyceride, a branched alkyl triglyceride, or a combination thereof;
 - (iv) purifying the linear, branched or combination thereof alkyl triglyceride to form a plasticizer, wherein the total carbon number of the triester groups ranges from 20 to 25 for greater than or equal to 45 wt% of the plasticizer.
2. The process of claim 1, wherein the at least one branched C₄ to C₁₀ aldehyde is characterized by a branching of from about 0.8 to about 3.0 branches per molecule.
3. The process of claim 1, wherein the oxidizing step is with oxygen and/or air.
4. The process of claim 1, further including recovering at least one linear C₄ to C₁₀ alcohol, one branched C₄ to C₁₀ alcohol, or a combination thereof from the hydroformylation product, oxidizing the linear, branched or combination thereof C₄ to C₁₀ alcohol to form a linear, branched or combination thereof C₄ to C₁₀ acid; and feeding the linear, branched or combination thereof C₄ to C₁₀ acid to step (iii) of claim 1.
5. The process of claim 1, wherein the hydroformylation product includes a mixture of at least one linear C₄ to C₁₀ aldehyde, one branched C₄ to C₁₀ aldehyde, or a

combination thereof and at least one at least one linear C₄ to C₁₀ alcohol, one branched C₄ to C₁₀ alcohol, or a combination thereof.

6. The process of claim 1, further including purifying the linear, branched or combination thereof C₄ to C₁₀ acid of step (ii) from the unreacted linear, branched or combination thereof C₄ to C₁₀ aldehyde via distillation before the esterifying step (iii).

7. The process of claim 1, wherein the polyol is selected from glycerol, ethylene glycol, and propylene glycol, and mixtures thereof.

8. The process of claim 7, wherein the polyol comprises glycerol.

9. The process of claim 1, further comprising providing a feed for the hydroformylation process from dimerization of a feedstock.

10. The process of claim 9, wherein the feedstock comprises an olefin selected from propylene, butenes, pentenes and mixtures thereof.

11. The process of claim 9, wherein the hydroformylation reaction is catalyzed by a metal selected from Groups 8-10 according to the new notation for the Periodic Table as set forth in Chemical Engineering News, 63(5), 27 (1985).

12. The process of claim 11, wherein the hydroformylation reaction is catalyzed by a metal selected from Rh, Co, and mixtures thereof.

13. The process of claim 12, wherein the hydroformylation reaction is catalyzed by a metal selected from Rh, Co, and mixtures thereof including an organic ligand.

14. The process of claim 1, wherein the total carbon number of the triester groups ranges from 20 to 25 for greater than or equal to 75 wt% of the plasticizer.

15. The process of claim 14, wherein the total carbon number of the triester groups ranges from 20 to 25 for greater than or equal to 95 wt% of the plasticizer.
16. The process of claim 1, wherein the oxidizing step is catalyzed.
17. The process of claim 1, wherein the oxidizing step is not catalyzed.
18. The process of claim 1, wherein the esterifying step is catalyzed by at least one metal selected from Ti, Zr or Sn, or a mixture thereof, or catalyzed by an organic acid.
19. The process of claim 1, further comprising dimerizing a feedstock selected from propylene, butenes, pentenes and mixtures thereof by solid phosphoric acid or a zeolite dimerization to provide a feed for the hydroformylation process.
20. A plasticizer made by the process of claim 1.
21. The plasticizer of claim 20 characterized as being phthalate-free.
22. A resin composition comprising the plasticizer of claim 20 and a resin.
23. The resin composition of claim 22, wherein the resin is selected from vinyl chloride resins, polyesters, polyurethanes, ethylene-vinyl acetate copolymer, rubbers, acrylics, and mixtures thereof.
24. The resin composition of claim 22, further comprising stabilizers, fillers, pigments, biocides, carbon black, adhesion promoters, viscosity reducers, thixotropic agents, thickening agents, blowing agents, and mixtures thereof.

25. The resin composition of claim 22, further comprising at least one plasticizer selected from phthalates, adipates, trimellitates, cyclohexanoates, benzoates, and combinations thereof.


26. A plastisol comprising the plasticizer of claim 20.

27. An article comprising the plasticizer of claim 20, the resin composition of claim 22, or the plastisol of claim 26.

28. The article of claim 27, wherein the article is selected from toys, films and sheets, tubing, coated fabrics, wire and cable insulation and jacketing, flooring materials, preferably vinyl sheet flooring or vinyl floor tiles, adhesives, sealants, inks, and medical products, preferably blood bags and medical tubing.

29. The article of claim 28, made by a process including steps of dryblending and extrusion.

30. A plasticizer comprising a triglyceride according to the formula:



wherein each of R¹, R², and R³ are independently selected from C₃ to C₉ linear or branched alkyl groups, and wherein the total carbon number of the triester groups ranges from 20 to 25.

31. The plasticizer of claim 30, wherein each of R¹, R², and R³ is a linear or branched C₆ alkyl group.

32. The plasticizer of claim 30, wherein each of R¹, R², and R³ is a linear or branched C₇ alkyl group.

33. The plasticizer of claim 30, wherein R¹, R², and R³ comprise two C₅ linear or branched alkyl groups and one C₈ linear or branched alkyl group.

34. The plasticizer of claim 30, wherein R¹, R², and R³ comprise one C₅ linear or branched alkyl group and two C₈ linear or branched alkyl groups.

35. The plasticizer of claim 30, wherein R¹, R², and R³ comprise two C₄ linear or branched alkyl groups and one C₉ linear or branched alkyl group.

36. The plasticizer of claim 30, wherein R¹, R², and R³ comprise two C₉ linear or branched alkyl group and one C₄ linear or branched alkyl groups.

37. The plasticizer of claim 30, wherein R¹, R², and R³ comprise two C₆ linear or branched alkyl group and one C₅ linear or branched alkyl groups.

38. The plasticizer of claim 30, wherein the average branching of the C₃ to C₉ branched alkyl groups is from about 0.8 to about 3.0 branches per group.
39. The plasticizer of claim 30, wherein the triglyceride comprises greater than or equal to 45 wt% of the plasticizer.
40. The plasticizer of claim 39, wherein the triglyceride comprises greater than or equal to 75 wt% of the plasticizer.
41. The plasticizer of claim 40, wherein the triglyceride comprises greater than or equal to 90 wt% of the plasticizer.
42. A plasticizer comprising a blend of two or more different triglycerides according to claim 30.
43. The plasticizer of claim 42, wherein the blend comprises greater than or equal to 45 wt% of the plasticizer.
44. The plasticizer of claim 43, wherein the blend comprises greater than or equal to 75 wt% of the plasticizer.
45. The plasticizer of claim 44, wherein the blend comprises greater than or equal to 95 wt% of the plasticizer.
46. The plasticizer of claim 30 characterized as being phthalate-free.
47. A resin composition comprising the plasticizer of claim 30 or claim 42 and a resin.

48. The resin composition of claim 47, wherein the resin is selected from vinyl chloride resins, polyesters, polyurethanes, ethylene-vinyl acetate copolymer, rubbers, acrylics, and mixtures thereof.

49. A plastisol comprising the plasticizer of claim 30 or claim 42.

50. An article comprising the plasticizer of claim 30 or claim 42, the resin composition of claim 47, or the plastisol of claim 49.

51. The article of claim 50, wherein the article is selected from toys, films and sheets, tubing, coated fabrics, wire and cable insulation and jacketing, flooring materials, preferably vinyl sheet flooring or vinyl floor tiles, adhesives, sealants, inks, and medical products, preferably blood bags and medical tubing.

52. A process for producing a plasticizer comprising:

(i) recovering an aldehyde/alcohol mixture including at least one linear C₄ to C₁₀ aldehyde, one branched C₄ to C₁₀ aldehyde, or a combination thereof and at least one linear C₄ to C₁₀ alcohol, one branched C₄ to C₁₀ alcohol, or a combination thereof from a hydroformylation process;

(ii) oxidizing the aldehyde/alcohol mixture to form a linear, branched or combination thereof C₄ to C₁₀ acid;

(iii) esterifying the linear, branched or combination thereof C₄ to C₁₀ acid with a polyol to yield a linear alkyl triglyceride, a branched alkyl triglyceride, or a combination thereof;

(iv) purifying the linear, branched or combination thereof alkyl triglyceride to form a plasticizer, wherein the total carbon number of the triester groups ranges from 20 to 25 for greater than or equal to 45 wt% of the plasticizer.

53. The process of claim 52, further including purifying the aldehyde/alcohol mixture of step (i) via distillation before the oxidizing step (ii).

54. The process of claim 52, wherein the at least one branched C₄ to C₁₀ aldehyde is characterized by a branching of from about 0.8 to about 3.0 branches per molecule.

55. The process of claim 52, wherein the oxidizing step is with oxygen and/or air.

56. The process of claim 52, further including purifying the linear, branched or combination thereof C₄ to C₁₀ acid of step (ii) from the unreacted aldehyde/alcohol mixture via distillation before the esterfying step (iii).

57. The process of claim 52, wherein said polyol is selected from glycerol, ethylene glycol, and propylene glycol, and mixtures thereof.

58. The process of claim 52, further comprising providing a feed for the hydroformylation process from dimerization of a feedstock.

59. The process of claim 58, wherein the feedstock comprises an olefin selected from propylene, butenes, pentenes and mixtures thereof.

60. The process of claim 59, wherein the hydroformylation reaction is catalyzed by a metal selected from Groups 8-10 according to the new notation for the Periodic Table as set forth in Chemical Engineering News, 63(5), 27 (1985).

61. The process of claim 60, wherein the hydroformylation reaction is catalyzed by a metal selected from Rh, Co, and mixtures thereof.

62. The process of claim 61, wherein the hydroformylation reaction is catalyzed by a metal selected from Rh, Co, and mixtures thereof including an organic ligand.

63. The process of claim 52, wherein the total carbon number of the triester groups ranges from 20 to 25 for greater than or equal to 75 wt% of the plasticizer.

64. The process of claim 63, wherein the total carbon number of the triester groups ranges from 20 to 25 for greater than or equal to 95 wt% of the plasticizer.

65. The process of claim 52, wherein the oxidizing step is catalyzed.

66. The process of claim 52, wherein the oxidizing step is not catalyzed.

67. The process of claim 52, wherein the esterifying step is catalyzed by at least one metal selected from Ti, Zr or Sn, or a mixture thereof, or catalyzed by an organic acid.

68. The process of claim 52, further comprising dimerizing a feedstock selected from propylene, butenes, pentenes and mixtures thereof by solid phosphoric acid or a zeolite dimerization to provide a feed for the hydroformylation process.

69. A plasticizer made by the process of claim 52.

70. The plasticizer of claim 69 characterized as being phthalate-free.

71. A resin composition comprising the plasticizer of claim 69 and a resin.

72. The resin composition of claim 71, wherein the resin is selected from vinyl chloride resins, polyesters, polyurethanes, ethylene-vinyl acetate copolymer, rubbers, acrylics, and mixtures thereof.

73. A plastisol comprising the plasticizer of claim 69.

74. An article comprising the plasticizer of claim 69, the resin composition of claim 71, or the plastisol of claim 73.

75. The article of claim 74, wherein the article is selected from toys, films and sheets, tubing, coated fabrics, wire and cable insulation and jacketing, flooring materials, preferably vinyl sheet flooring or vinyl floor tiles, adhesives, sealants, inks, and medical products, preferably blood bags and medical tubing.

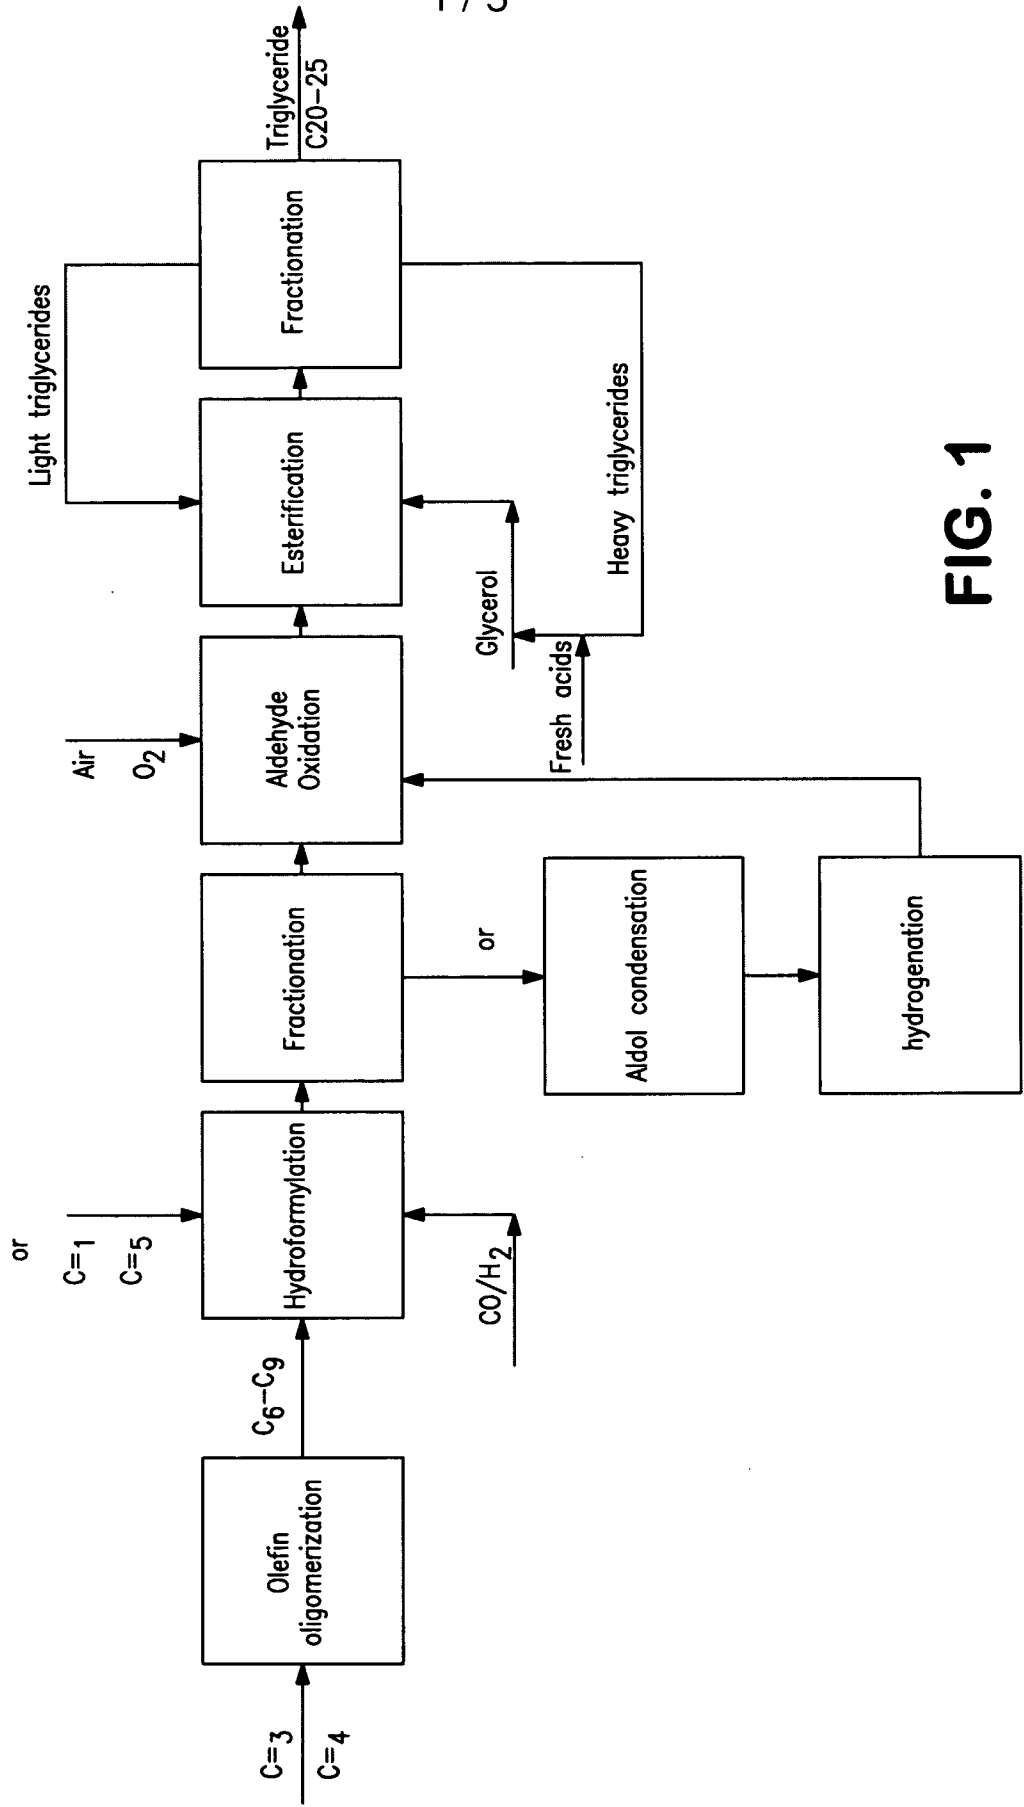
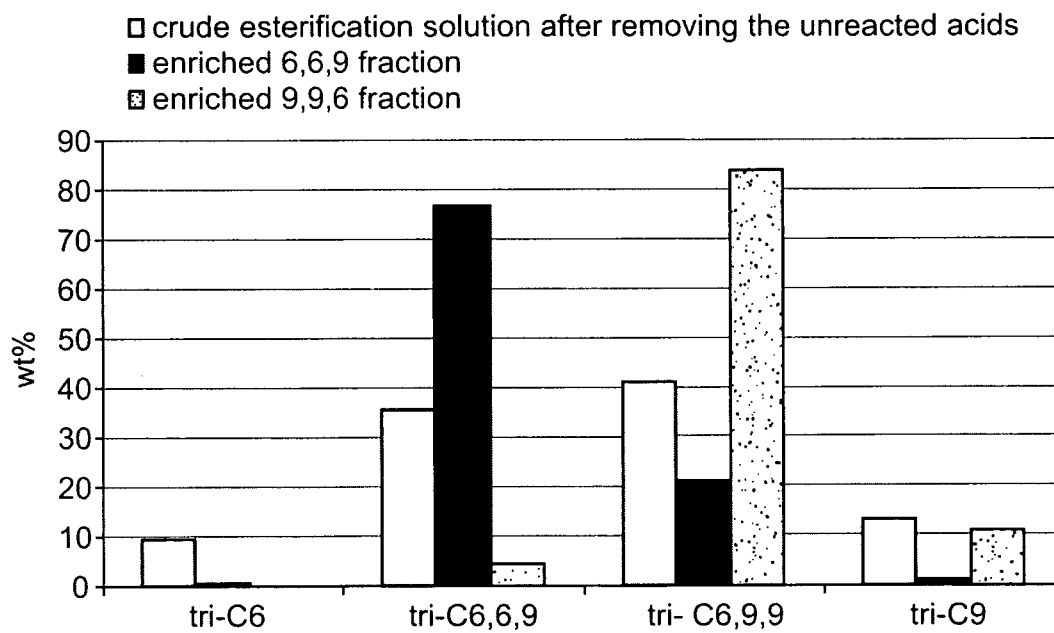
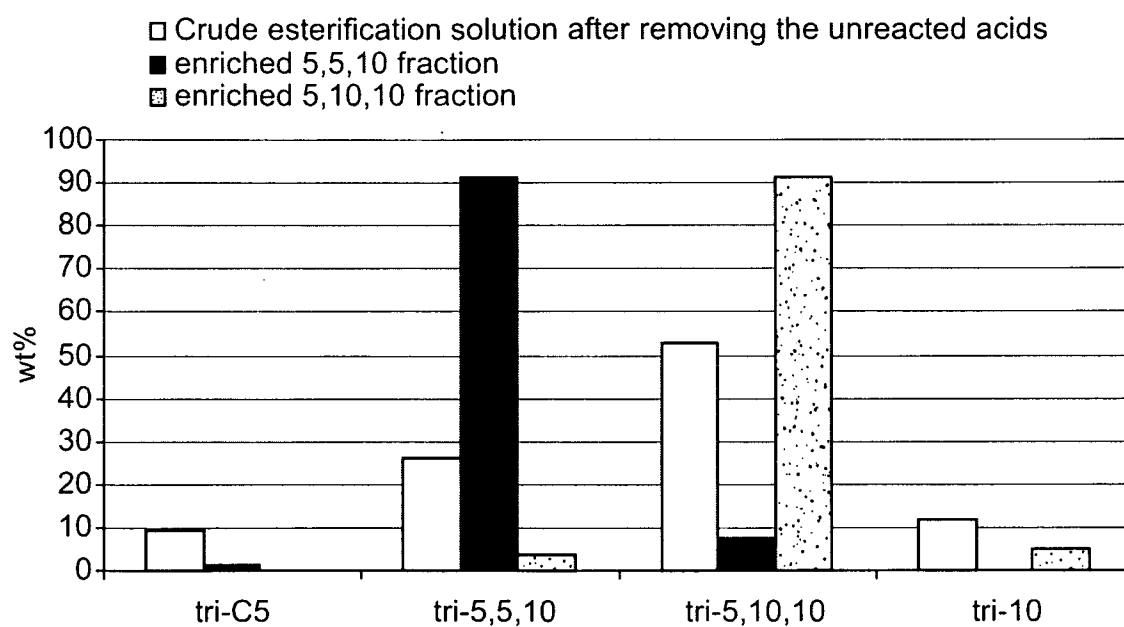


FIG. 1

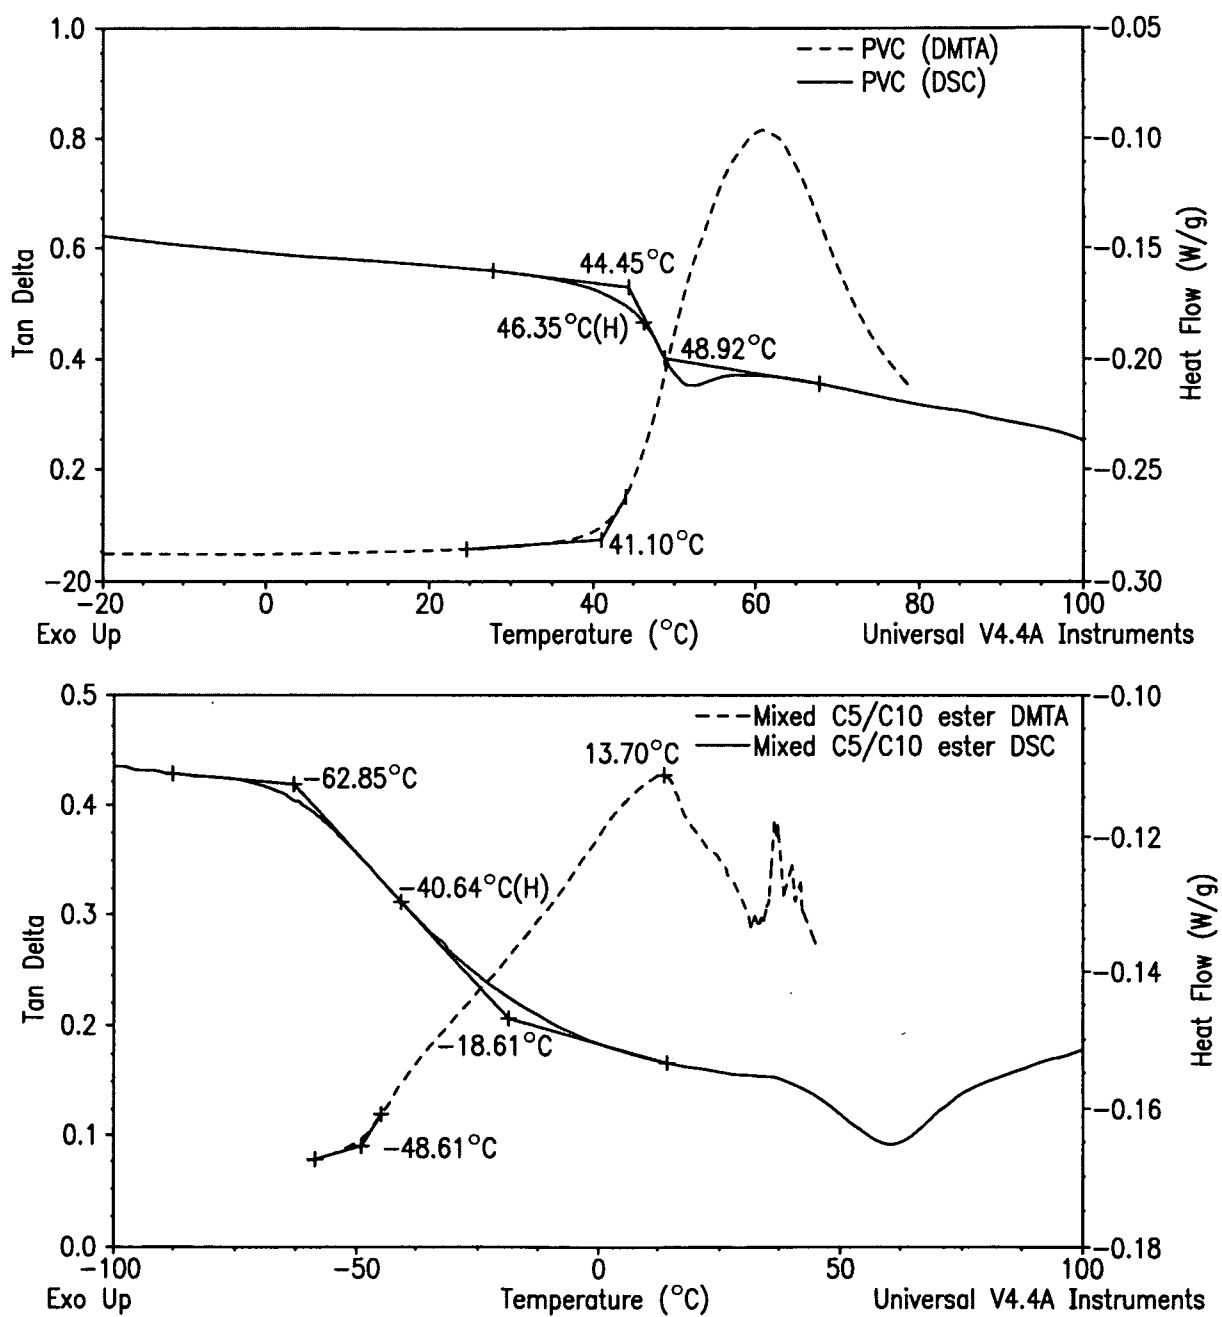
2 / 5

**FIG. 2**

3 / 5

**FIG. 3**

4 / 5

**FIG. 4**

5 / 5

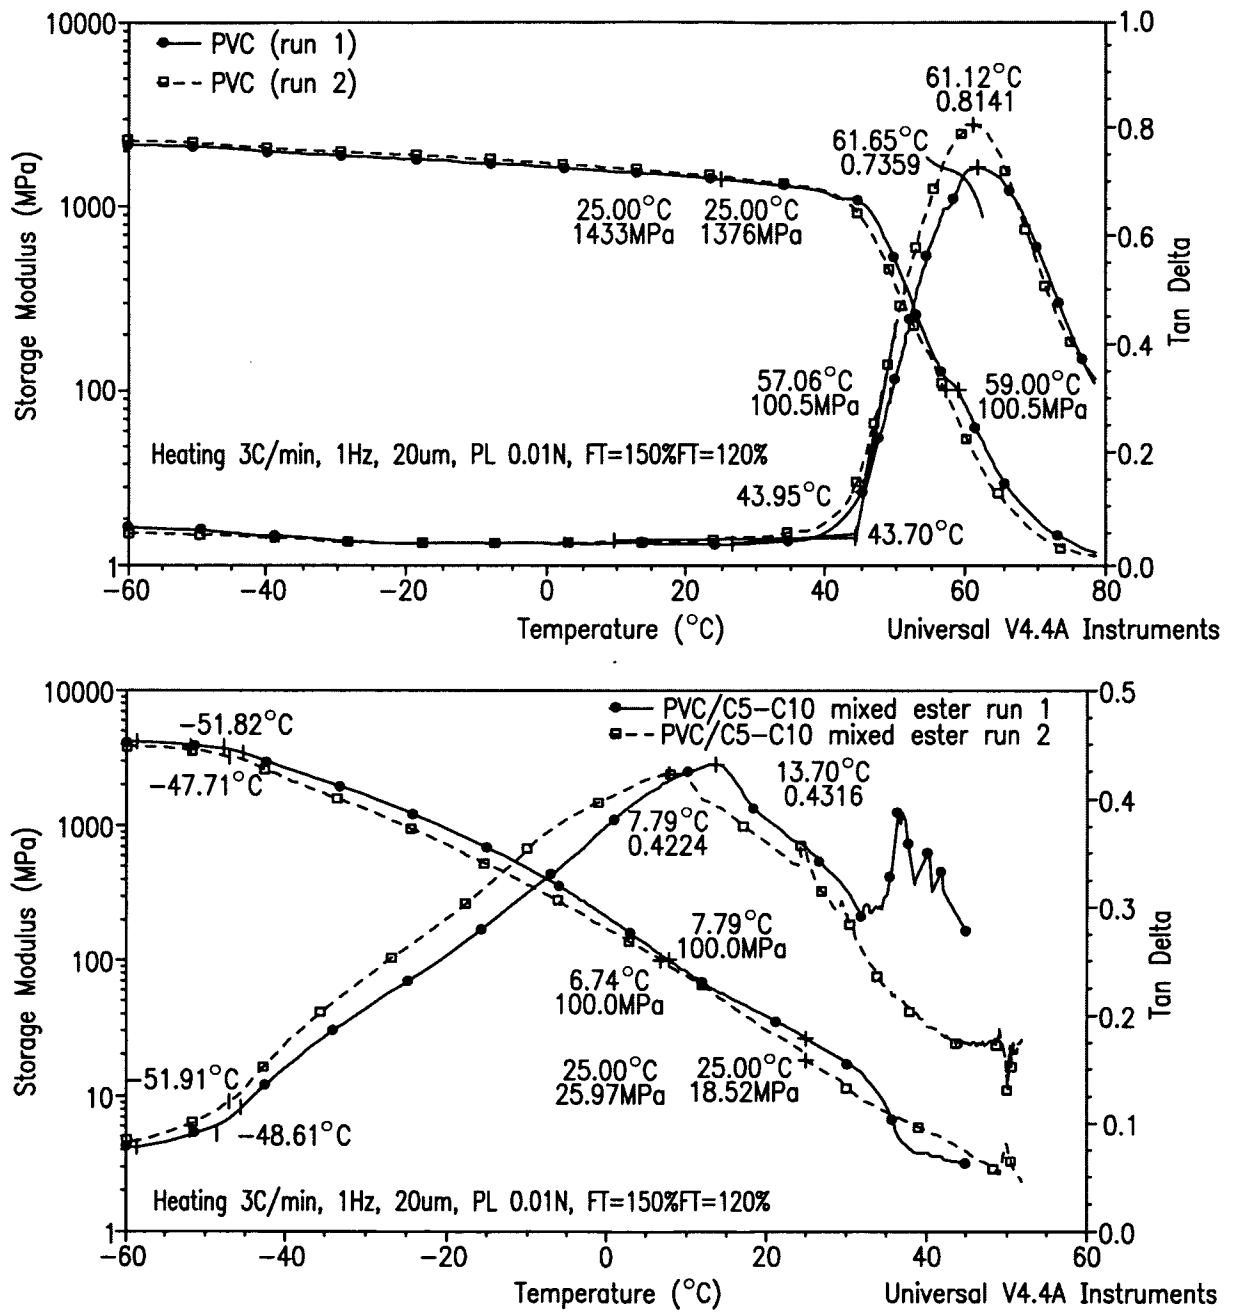


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/06642

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61L 2/08 (2010.01)

USPC - 524/569

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC- 524/569

IPC (8): A61L 2/08 (2010.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

USPC- 524/569 ; 524/313 ; 524/482; 524/486 (See keywords below)

IPC (8): A61L 2/08 (2010.01) (See keywords below)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WEST: DB=PGPB,USPT,USOC,EPAB,JPAB

Google: Scholar/Patents: triglyceride plasticizer hydroformylation feedstock cobalt

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- Y	US 6,652,774 B2 (ZHOU et al) 25 November 2003 (25.11.2003) Col 1, ln 35-44; Col 2, ln 8-66; Col 4, ln 5-67; Col 5, ln 1-2	30-48 1-29;49;52-75
Y	US 4,273,936 A (FIATO et al) 16 June 1981 (16.06.1981) Col 4, ln 31-38; Col 4, ln 58-61; Col 5, ln 5-47; Col 6, ln 1-17; Col 9, ln 30-53	1-29; 52-75
Y	US 2004/0242948 A1 (MATHYS et al) 02 December 2004 (02.12.2004) para [0012]-[0013]; [0017];[0025];[0062];[0104];[0106]	9-13;19;58-62;68
Y	US 5,137,952 A (MILLER et al) 11 August 1992 (11.08.1992) Col 3, ln 2-19; Col 14, ln 12-33; Col 14, ln 65-68; Col 15, ln 1-6	24-29; 49; 73-75

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

16 February 2010 (16.02.2010)

Date of mailing of the international search report

03 MAR 2010

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 09/06642

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 50-51
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.