



(51) International Patent Classification:

H01M 4/505 (2010.01)

(21) International Application Number:

PCT/US2012/038505

(22) International Filing Date:

18 May 2012 (18.05.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/487,364

18 May 2011 (18.05.2011)

US

(71) Applicant (for all designated States except US): BAT-

TELLE MEMORIAL INSTITUTE [US/US]; P.O. Box 999, K1-53, Richland, Washington 99352 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LIU, Jun [US/US];

2660 Hawkstone Court, Richland, Washington 99354 (US). CAO, Yuliang [CN/CN]; College of Chemistry and Molecular Science, Wuhan University, Wuhan, CN 430072 (CN). XIAO, Lifan [CN/CN]; 152 Luoyu Road, Wuhan, CN 430079 (CN). YANG, Zhenguo [US/US]; 2926 Rock Creek Court, Richland, Washington 99354 (US). WANG, Wei [CN/US]; 5507 W. 18th Avenue, Kennewick, Washington 99338 (US). CHOI, Daiwon [KR/US]; 1409

Chardonay Drive, Richland, Washington 99352 (US).

NIE, Zimin [US/US]; 2860 Hawkstone Court, Richland, Washington 99352 (US).

(74) Agent: GOKCEK, Aj; P.O. Box 999, K1-53, Richland,

Washington 99352 (US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: NANOMATERIALS FOR SODIUM-ION BATTERIES

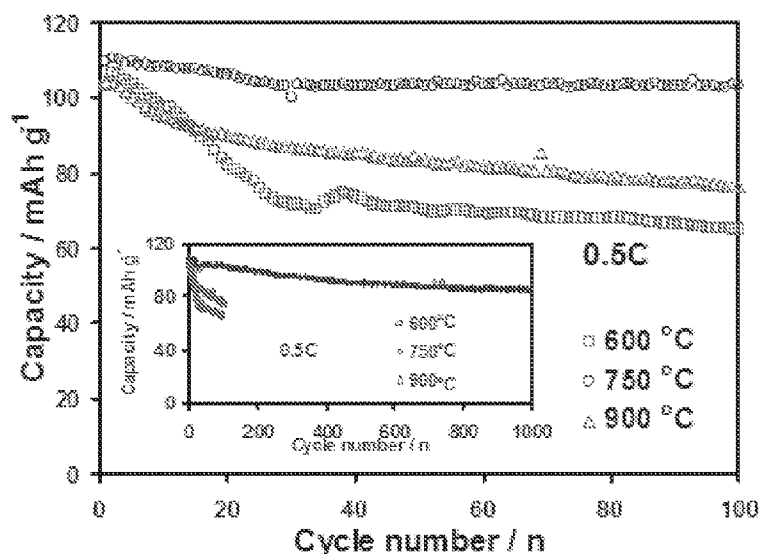


Figure 4C

(57) Abstract: A crystalline nanowire and method of making a crystalline nanowire are disclosed. The method includes dissolving a first nitrate salt and a second nitrate salt in an acrylic acid aqueous solution. An initiator is added to the solution, which is then heated to form polyacrylates. The polyacrylates are dried and calcined. The nanowires show high reversible capacity, enhanced cycleability, and promising rate capability for a battery or capacitor.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

NANOMATERIALS FOR SODIUM-ION BATTERIES

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application Ser. No. 61/487,364, filed May 18, 2011, titled "NANOMATERIALS FOR SODIUM-ION BATTERIES", hereby incorporated by reference in its entirety for all of its teachings.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] This invention was made with Government support under Contract DE-AC05-76RLO1830 awarded by the U.S. Department of Energy. The Government has certain rights in the invention.

TECHNICAL FIELD

[0003] This invention relates to crystalline nanomaterials. More specifically, this invention relates to crystalline nanomaterials made from nitrate salts.

BACKGROUND OF THE INVENTION

[0004] The emerging concerns over the depletion of the fossil fuel sources and the impact of greenhouse gas emission have created great demands for the development of large-scale energy storage systems for electric vehicles (EV) and renewable energy resources such as wind and solar. Lithium-ion batteries are considered as one of the most attractive technologies for rechargeable energy storage for electrical vehicles due to their high energy density and long service life. However, there is still great concern about the cost of Li-ion batteries and the potential limit of Li supplies available in terrestrial reserves, especially for

the large-scale energy storage applications for renewable energy and grid. Therefore, alternative energy storage mechanisms and devices using abundant and environmentally friendly materials are highly desirable.

[0005] Sodium-ion batteries have been discussed in the literature for some time. A battery that uses sodium ions instead of lithium ions is attractive because it could be potentially much cheaper and safer, and it is more environmentally benign. A sodium ion storage mechanism is also scientifically interesting and challenging because sodium ions are about 70% larger in radius than that of lithium ions. This makes it difficult to find a suitable host material to accommodate the sodium ions and allow reversible and rapid ion insertion/extraction.

[0006] In the literature, hard carbon based negative electrodes have been reported to deliver a capacity of 300 mAh g⁻¹ through Na ion insertion/deinsertion reaction. However, few studies have been reported for the Na-ion battery cathode materials with decent performance. For example, fluorophosphates materials were developed as a cathode material for Na-ion battery. Barke et al. studied a hard carbon/NaVPO₄F battery demonstrating a specific capacity of 79 mAh g⁻¹ from NaVPO₄F based in the initial cycle, but less than 50% of the original capacity after 30 cycles. Most of the research on cathode materials for rechargeable sodium batteries has been focused on the manganese oxides because of their large-size tunnels for Na ion insertion and deinsertion. Morales et al. reported that layered P2-Na_{0.6}MnO₂ can deliver 150 mAh g⁻¹ first cycle capacity, but this material exhibited a poor capacity retention capability with more than 50% of capacity loss after only ten cycles. For most layered and tunnel-type manganese oxides, the main cause of the structural instability during repetitive cycling is the inability to accommodate the Jahn-Teller distortion following the reduction of Mn(IV) to Mn(III) within the rigid close

packed oxide ion structures. A similar fading mechanism has been identified for the capacity degradation of the layered LiMnO_2 and spinel LiMn_2O_4 . A recent study by Kim and Johnson reported that a layered Na-Ni-Mn oxide with Li doping exhibited a capacity of about 95 mAhg⁻¹ with good capacity retention over 50 charge-discharge cycles. However, this kind of material still needs 20% molar ratio Li to stabilize the structure during cycling. A Li-free cathode material, with a much higher capacity and much longer cycle life is desired.

[0007] Recently, MnO_6 octahedra and MnO_5 square pyramids are found to form large, double ion channels in orthorhombic $\text{Na}_4\text{Mn}_9\text{O}_{18}$ ($\text{Na}_{0.44}\text{MnO}_2$) and offer better cycling stability due to the ability to tolerate some stress during structural changes, as shown in Figure 1A. There have been numerous studies on the structures and electrochemical properties of such materials, but the insertion/deinsertion behavior of sodium ions has not been well studied. Sauvage et al. have shown reversible insertion and deinsertion of sodium ion in pure $\text{Na}_4\text{Mn}_9\text{O}_{18}$ prepared with an initial capacity of about 80 mAh/g at a C/10 rate, but the cycling capacity faded rapidly with cycling and only half of the initial capacity was retained after 50 cycles. Compared with lithium-ion, the inferior sodium inserting/deinserting performance is mainly due to the failure of these $\text{Na}_4\text{Mn}_9\text{O}_{18}$ to accommodate the structural change during the insertion/extraction of large sodium ions, leading to slow kinetics and structure degradation.

SUMMARY OF THE INVENTION

[0008] The present invention is directed to a crystalline nanomaterial and a method of making a crystalline nanomaterial. In one embodiment of the present invention, a method of making a crystalline nanomaterial is disclosed. The method comprises dissolving a first nitrate salt and a second nitrate in an acrylic acid aqueous solution; and adding an initiator

to the acrylic acid solution. The method further comprises heating the solution to form polyacrylates; drying the polyacrylates and calcining the polyacrylates.

[0009] In one embodiment, the first nitrate salt is sodium nitrate and the second nitrate salt is manganese nitrate, and the polyacrylates are polyacrylates of sodium and manganese. In one embodiment, the initiator is ammonium persulfate.

[0010] In one embodiment, the solution is heated at a temperature in the range of 60° C to 100° C. In one embodiment, the polyacrylates are dried at a temperature in the range of 90° C to 150° C, and calcined at a temperature in the range of 500° C to 900° C.

[0011] In one embodiment, the crystalline nanomaterial forms an electrode. The electrode can be a cathode.

[0012] In another embodiment of the present invention, a method of making a crystalline nanomaterial is disclosed. The method comprises dissolving a stoichiometric amount of sodium nitrate and manganese nitrate in an acrylic acid aqueous solution, and adding an initiator to the acrylic acid solution. The method further comprises heating the solution to form polyacrylates of sodium and manganese; drying the polyacrylates; and calcining the polyacrylates. The initiator can be ammonium persulfate.

[0013] In another embodiment of the present invention, a crystalline nanomaterial is disclosed. The nanomaterial comprises sodium nitrate, manganese nitrate, acrylic acid aqueous solution, and an initiator. The nitrates are dissolved in the solution, and the initiator is added to the solution. In one embodiment, the molar ratio of sodium nitrate, manganese nitrate, and acrylic acid ranges from 0.1:1.5:2.5 to 1:2.5:3.5.

[0014] In another embodiment of the present invention, a device in which energy is stored is disclosed. The device comprises a crystalline nanowire represented by the formula $\text{Na}_x\text{A}_y\text{MnB}_z\text{O}_n\text{C}_\alpha$. A represents H, Li, Be, Mg, K, Ca, Rb, Sr, Cs, Ba, Fr, Ra or combinations

thereof. B represents V, Cr, Mo, Tc, Fe, Ru or combinations thereof. C represents N, P, S, F, Cl or combinations thereof. The device has an electrode capacity of at least 80 mAh/g. The device has an energy density of at least 800 kWh/kg. The device exhibits less than about 30% degradation after about 100 to about 2000 charge/discharge cycles. The device includes a single crystalline nanowire with a diameter of less than about 70 nm.

[0015] In another embodiment of the present, a device in which energy is stored is disclosed. The device comprises a crystalline nanowire represented by the formula Na_xMnO_y . The device has an electrode capacity of at least 80 mAh/g. The device has an energy density of at least 800 kWh/kg. The device exhibits less than about 30% degradation after about 100 to about 2000 charge/discharge cycles, and the device includes a single crystalline nanowire with a diameter of less than about 70 nm.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] Figure 1A shows the basic structure of orthorhombic $\text{Na}_4\text{Mn}_9\text{O}_{18}$.

[0017] Figure 1B shows XRD patterns of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ calcined at different temperatures.

[0018] Figure 2 shows SEM images of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ calcined at different temperatures: (A) 750 °C; (B) 450 °C; (C) 600 °C; and (D) 900 °C.

[0019] Figure 3 shows TEM images of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires: (A,B) calcined at 600 °C; (C) dispersing $\text{Na}_4\text{Mn}_9\text{O}_{18}$ (inset is image of a single nanowire); (D) incorporated $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires (inset of SADP); (E) expanded image of a single nanowire; and (F) high-resolution image of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowire.

[0020] Figure 4 shows electrochemical characterization and battery performance of samples of (A) CV curves of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires calcined at 750 C between 2.0 and 4.0 V at potential sweep rate of 0.1 mV s^{-1} ; (B) typical charge/discharge profile of $\text{Na}_4\text{Mn}_9\text{O}_{18}$

samples calcined at 600 °C, 750 °C and 900 °C between 2.0 and 4.0 V at a current density of 12 mA g⁻¹ (0.1C); (C) cycle performance of Na₄Mn₉O₁₈ samples calcined at 600 °C, 750 °C and 900 °C at a current density of 60 mA g⁻¹ (0.5C); (D) discharge capacity of Na₄Mn₉O₁₈ nanowires calcined at 750 °C as a function of charge/discharge cycles at different charge/discharge current densities of 12 (0.1C), 24 (0.2C), 60 (0.5C), 120 (1C) and 240 mA g⁻¹ (2C), respectively.

[0021] Figure 5 shows graphs of (A) typical discharge curves of Na₄Mn₉O₁₈ nanowires calcined at 750 °C as a function of charge/discharge cycles at different charge/discharge current densities of 12 mA g⁻¹ (0.1C), 24 mA g⁻¹ (0.2C), 60 mA g⁻¹ (0.5C), 120 mA g⁻¹ (1C), 120 mA g⁻¹ (1C), 600 mA g⁻¹ (5C) and 1200 mA g⁻¹ (10C), respectively; and (B) Log D vs. E plot for Na₄Mn₉O₁₈ nanowires calcined at 750 C obtained by EIS.

[0022] Figure 6 shows (A,B) TEM images of Na_{0.9}Li_{0.25}Mn_{0.75}O₂; (C) cycle performance of the different cathode samples at a current density of 60 mA g⁻¹ (0.5C).

[0023] Figure 7 shows diffusion coefficients of sodium ion of Na₄Mn₉O₁₈ nanowires calcined at 750 °C for different open circuit voltage (OCV) values.

[0024] Figure 8 shows structural parameters and calcining temperatures of Na₄Mn₉O₁₈ phases (space group: Pham) from Rietveld refinements.

[0025] Figure 9 shows cycle performance of the Na₄Mn₉O₁₈ cathode samples prepared by the polymer-pyrolysis method (PP) and solid-state reaction method (SS) at a current density of 60 mA g⁻¹ (0.5C).

[0026] Figure 10 shows (A) charge-discharge performance of the Na₄Mn₉O₁₈/pyrolyzed carbon sodium-ion battery in the potential range of 1.5~4.1 V (vs Na/Na⁺) at a constant current of 50 mA g⁻¹ (~0.5C); and (B) cycle performance of the Na₄Mn₉O₁₈/pyrolyzed carbon sodium-ion battery after 100 cycles.

[0027] Figure 11 shows (A) the average potential of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ calculated by using GGA+U functional. Na was added orderly as marked starting from $\text{Mn}_{18}\text{O}_{36}$ to $\text{Na}_{12}\text{Mn}_{18}\text{O}_{36}$; (B) structure of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ for first-principle calculations.

[0028] Figure 12 shows the changes of relative lattice constants (a, b and c axis) and (A) relative volume; and (B) calculated by using GGA+U functional from $\text{Na}_{0.22}\text{MnO}_2$ to $\text{Na}_{0.66}\text{MnO}_2$.

[0029] Figure 13 shows a SEM image of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ calcined at 750°C after 100 cycles.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0030] Various advantages and novel features of the present invention are described herein and will become further readily apparent to those skilled in this art from the following detailed description. In the preceding and following descriptions, the various embodiments, including the preferred embodiments, have been shown and described. Included herein is a description of the best mode contemplated for carrying out the invention. As will be realized, the invention is capable of modification in various respects without departing from the invention. Accordingly, the drawings and description of the preferred embodiments set forth hereafter are to be regarded as illustrative in nature, and not as restrictive.

[0031] The following description includes the preferred best mode of one embodiment of the present invention. It will be clear from this description of the invention that the invention is not limited to these illustrated embodiments but that the invention also includes a variety of modifications and embodiments thereto. Therefore the present description should be seen as illustrative and not limiting. While the invention is susceptible of various modifications and alternative constructions, it should be understood, that there is

no intention to limit the invention to the specific form disclosed, but, on the contrary, the invention is to cover all modifications, alternative constructions, and equivalents falling within the spirit and scope of the invention as defined in the claims.

[0032] Nanomaterials and nanotechnology have offered new opportunities to fine tune the structure and properties for energy application. In particular nanorods and nanowires have shown promising results to improve the capacity and stability for lithium ion batteries due to their short ion diffusion distance, good conductivity and excellent stress tolerance. Disclosed are new materials to make nanowires and nanowires made from nitrate salts.

[0033] In one embodiment, a nanomaterial is disclosed that includes sodium and manganese. In one particular embodiment, a single crystalline $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowire with high reversible capacity and exceptional cycling performance for sodium-ion battery is disclosed. The $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowire electrode material calcined at approximately 750 °C delivers a reversible capacity of 128 mAh g⁻¹ at 0.1C with an excellent capacity retention capability of about 77 % initial capacity retention even after 1000 cycles at 0.5°C.

[0034] In one embodiment, a method of making a crystalline nanomaterial is disclosed. The method includes dissolving a first nitrate salt and a second nitrate salt in an acrylic acid aqueous solution. The method also includes adding an initiator, such as ammonium persulfate, to the acrylic acid solution. The method further includes heating the solution to form polyacrylates. The method also includes drying and calcining the polyacrylates.

Experimental Section

[0035] The following examples serve to illustrate exemplary embodiments and aspects of the present invention and not to be construed as limiting the scope thereof.

Material Preparation

[0036] Single crystalline $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires were synthesized by a polymer-pyrolysis method. In a typical experiment, the precursor was prepared by first dissolving stoichiometric NaNO_3 and $\text{Mn}(\text{NO}_3)_2$ respectively in acrylic acid, and then acrylic acid was polymerized with the precursor solution at 80°C , followed by drying in air at 120°C for 24h. The obtained copolymeric precursor was finally calcined at 450, 600, 750 and 900°C for 24 hours in air, respectively.

[0037] In particular, single crystalline $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires were prepared by a polymer-pyrolysis method using polyacrylates of Na and Mn as precursor compounds. The copolymeric precursor was made from the solution polymerization of NaNO_3 ($\geq 99.0\%$, Sigma-Aldrich), $\text{Mn}(\text{NO}_3)_2$ (hydrate, 98%, Aldrich) and acrylate acid (99%, Aldrich) with 0.5 : 1 : 2.5 molar ratio using $(\text{NH}_4)_2\text{S}_2\text{O}_8$ as initiator. The typical experimental procedure is first to dissolve a stoichiometric amount of NaNO_3 and $\text{Mn}(\text{NO}_3)_2$ in acrylate acid solution under stirring. The acrylate acid solution was prepared by mixing acrylate acid with distilled water with 70:30 mass ratios. Then small amounts of 5% $(\text{NH}_4)_2\text{S}_2\text{O}_8$ aqueous solution as initiator was added to the mixed acrylate acid solution to promote the polymerization. Under heating at $\sim 80^\circ\text{C}$ for several hours, the mixing solution changed solid and to finally form polyacrylates of Na and Mn. The resulting polyacrylates were dried at 120°C for 24h. The obtained copolymeric precursor was then finally calcined at 600, 750 and 900°C for 24 hours in air, respectively.

Structural Characterization

[0038] SEM, TEM and HRTEM experiments were performed on an FEI Helios Nanolab dual-beam focused ion beam/scanning electron microscope (FIB/SEM) and JEOL-2010 high-resolution electron microscope, respectively. XRD measurements were carried out on a Philips Xpert X-ray diffractometer using $\text{Cu K}\alpha$ radiation at $\lambda = 1.54 \text{ \AA}$. Nitrogen adsorption-

desorption isotherms for surface-area and pore analysis were measured with a Quantachrome Autosorb Automated Gas Sorption System.

Electrochemical characterization

[0039] The $\text{Na}_4\text{Mn}_9\text{O}_{18}$ cathode was prepared by mixing 80wt.% $\text{Na}_4\text{Mn}_9\text{O}_{18}$ powder, 10wt.% Super-P carbon black, 10wt.% polyvinylidene difluoride (PVDF) dissolved in N-methyl-2-pyrrolidone (NMP) to form slurry, then pasting the electrode slurry on Al foil. Electrochemical tests of the electrode materials were performed using coin cells with the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ cathode and sodium metal as counter and reference electrode. The electrolyte was 1M NaClO_4 dissolved in a mixture of ethylene carbonate (EC) and dimethyl carbonate (DMC) (1:2 by wt.) and the separator was a microporous membrane (Celgard 2400). The cells were assembled in an argon-filled glove box. The galvanostatic charge-discharge test was conducted at a voltage interval of 0.01~1.5 V by a BT-2043 Arbin Battery Testing System. Cyclic voltammetric measurements were also carried out with the coin cell at the scan rate of 0.1mV s^{-1} by using SI 1287 electrochemical interface (Solartron). To obtain the diffusion coefficient of sodium ion within $\text{Na}_4\text{Mn}_9\text{O}_{18}$ cathode, electrochemical impedance spectroscopy (EIS) measurements were carried out using a frequency response analyzer (Solartron, SI 1260) in the frequency range 100 KHZ to 3 mHZ with an ac signal amplitude of 10 mV. The cell was charged at 20 mA g^{-1} and the current flux was stopped after an interval of 1 h. After the cell relaxed to its open circuit potential (OCV) for 3h, impedance response was measured.

First-principle Calculations and Discussion

[0040] The quantum mechanical calculations based on the density functional theory (DFT) formalism were carried out using the projector-augmented-wave (PAW)^[16] method as implemented in the *ab initio* total-energy and dynamics program VASP (Vienna

ab initio simulation Program)^[17]. The standard library potentials 'Na', 'O' and 'Mn' were used. To take into account the localized *3d* orbital dependence of the Coulomb and exchange interactions, the generalized gradient approximation^[18] (GGA) + *U*, which is aligned with the *LDA+U* formalism proposed by Dudarev *et al.*,^[19] was used for evaluating the exchange-correlation energy. Within this formalism, a value of $U_{eff}=4.0$ eV for Mn was used for all studied compounds. In conjunction, a plane-wave cut-off energy of 500 eV was used for all calculations. Gaussian smearing was used with a smearing parameter of 0.20 eV. All atoms and cell parameters of each structure were fully relaxed until the Hellmann-Feynman forces on each ion were negligible (<0.001 eV/Å). 13 supercells were generated by constructing a 1 conventional unit cell, containing 54-atoms and 66-atoms for MnO_2 and $Na_6Mn_9O_{18}$, respectively, as shown in Figure 11B. Brillouin-zone integration was performed using the Monkhorst-Pack grid, and employed 2x1x8 meshes for all structures. All calculations are performed with spin polarization to reproduce each structure with the ferromagnetic ground state for phases. Figure 11 shows (a) the average potential of $Na_4Mn_9O_{18}$ calculated by using GGA+U functional. Na was added orderly as marked starting from $Mn_{18}O_{36}$ to $Na_{12}Mn_{18}O_{36}$. Figure 8 shows structural parameters and calcining temperatures of $Na_4Mn_9O_{18}$ phases (space group: *Pham*) from Rietveld refinements.

[0041] $Na_4Mn_9O_{18}$ is isostructural with $Na_4Mn_4Ti_5O_{18}$ and has an orthorhombic lattice structure (*Pbam* space group, JCPDS No. 27-0750). The basic structure unit is made up of MnO_5 square pyramids and MnO_6 octahedra, which are arranged to form two types of tunnels: large S-shaped tunnels and smaller pentagon tunnels, as shown in Figure 1A. In this structure, three sodium sites exist: fully filled occupation by Na (1) in the small tunnels and half-filled occupation by Na(2) and Na(3) in the large S-shaped tunnels. Sodium ions in the large S-shaped tunnels are considered to be mobile and can be potentially reversibly

extracted, while the sodium ions in the small tunnels are fixed and cannot be extracted. The sodium ions in the large channels would produce a theoretical discharge capacity of 160 mAh/g. X-ray diffraction (XRD) patterns, as shown in Figure 1B, which confirms that the materials prepared by the polymer-pyrolysis method crystallize as the orthorhombic $\text{Na}_4\text{Mn}_9\text{O}_{18}$ phase (JCPDS No. 27-0750) with heat treatment to 600-900 °C. No impurity peaks were detected in all the XRD patterns, even for the sample with low temperature treatment (600 °C). The intensity and width of XRD peaks become stronger and sharper with increasing treatment temperature, corresponding to better crystallinity and a larger crystallite size.

[0042] The morphologies of the as-prepared $\text{Na}_4\text{Mn}_9\text{O}_{18}$ materials were characterized by scanning electron microscopy (SEM) and transmission electron microscopy (TEM). Figure 2 shows SEM images of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ sintered at 450, 600, 750 and 900 °C, respectively. At 750 °C, mostly well-defined, crystalline nanowires and nanorods are observed, as shown in Figure 2A. At 450 °C, the materials appear to be quite disordered and have poorly defined, flake-like morphologies, as shown in Figure 2B, indicating poor crystallization of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ at low temperatures. Some nanowires and nanorod structure begin to appear at 600 °C, as shown in Figure 2C, although plate-like features are still quite visible. 750 °C produces the best nanowire/nanorod morphologies. At a much higher temperature, sintering takes place and the nanowires fused into short plate-like structures, as shown in Figure 2D. A TEM image of the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ sample treated at 600 °C displays some thin nanowires morphologies, as shown in Figure 3A, but many cavities are observed inside the nanowires, as in Figure 2A, indicating incomplete crystallization and high density of defects. The high-resolution TEM image in Figure 3B shows the crystalline phase (A and B regions) as well as the cavities (C region). The lattice planes can be identified as the (151)

and (1 11 0) plane as labeled in Figure 3B, and the nanowire growth direction is [001] orientation. TEM image of the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ sample treated at 750 °C shows quite uniform nanowire with ~50 nm in diameter and high crystallinity, as shown in Figures 3C, 3E, and 3F. It is worth noting the presence of residual nanosheets consisting of parallel nanowires, as shown in Figure 3D. This result suggests a possible pathway to form a flake-like or sheet-like structure at a low temperature, as shown in Figure 2B. At a higher temperature, nanowires further crystallize and split from the nanosheets. Selected area electron diffraction (SAED), as shown in Figure 3D, revealed that the nanowires were a single-crystalline structure with orientation along [001] direction. Lattice fringe of the layer distance of the nanowire in the enlarged pictures of Figure 3E was ~ 1.33 nm, corresponding to the interplanar distance of (020) plane. The good crystalline structure is also confirmed by the high-resolution TEM image of Figure 3F that exhibits two perpendicular, (001) and (110) lattice planes. The BET surface area of the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires was measured to be $17.8 \text{ m}^2 \text{ g}^{-1}$ through N_2 adsorption/desorption measurements. Based on the average diameter (~50nm) observed from TEM images and the density of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ (4.25 g cm^{-3}), the surface area of the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires calculated is about $18.8 \text{ m}^2 \text{ g}^{-1}$, in a good agreement with the BET result.

[0043] Figure 12 shows the changes of relative lattice constants (a, b and c axis) and (A) relative volume; and (B) calculated by using GGA+U functional from $\text{Na}_{0.22}\text{MnO}_2$ to $\text{Na}_{0.66}\text{MnO}_2$.

[0044] Sodium ion insertion/deinsertion properties of the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ treated at different temperatures were investigated by cyclic voltammetry (CV) and galvanostatic charge-discharge cycling. Figure 4A shows the typical CV curves of a nanowire $\text{Na}_4\text{Mn}_9\text{O}_{18}$ electrode treated at 750 °C cycled in 1 M NaClO_4 EC/DMC electrolyte at a scan rate of 0.1

mV s^{-1} . The oxidation process of first cycle is different from the subsequent cycles. The three oxidation peaks in the initial anodic scan are stronger than those in the subsequent scans, indicating some degree of irreversible reactions. The initial irreversible phenomenon likely originates from the initial multi-transition processes to accommodate the structural strain for sodium ion insertion and deinsertion. After the first scan, the subsequent CV curves have at least six pairs of quite symmetrical redox peaks, implying a complex multiphase transition mechanism during sodium ion insertion and deinsertion process.^[4a] However, in situ XRD measurements studied by Sauvage F. et. al suggested that it is difficult to distinguish the appearance of a new phase during sodium ion insertion and deinsertion with only the shifts and splitting of few peaks observed, suggesting the phase structures during biphasic transitions are very close. The initial discharge profiles for the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ treated at different temperatures were tested in the potential range of 2~4 V (vs Na^+/Na) at a constant current of 12 mA g^{-1} (0.1 C), shown in Figure 4B. The $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowire electrode calcined at 600, 750 and 900 °C delivered a reversible discharge capacity of 130, 128 and 118 mA h g^{-1} , respectively. With increasing temperature, the discharge capacity of the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ electrode decreases slightly.

[0045] At 0.5C, however, the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ samples treated at different temperatures also exhibit different cycling performance, as shown in Figure 4C. The $\text{Na}_4\text{Mn}_9\text{O}_{18}$ sample treated at 600 and 900 °C can only deliver 63.1 % and 73.2 % of initial capacity after 100 cycles. In comparison, for the 750 °C nanowires, there is only a slight decrease of capacity after 30 cycles (less than 7%). The capacity loss after 30 cycles is very slow and almost unnoticeable for the plot for up to 100 cycles. Even after 1000 cycles, the 750 °C-synthesized nanowires still have a discharge capacity of 84.2 mAh g^{-1} , corresponding to a 77 % capacity retention! To the best of our knowledge, this material exhibits by far the best performance

in terms of high capacity and excellent cycling stability for sodium ion insertion. Figure 13 shows a SEM image of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ calcined at 750°C after 100 cycles.

[0046] The dependence of the capacity and stability on calcinations temperature is related to the crystallinity and the sizes of the nanowires. According to the XRD result and the morphology, shown in Figures 1 and 3, the excellent cycling performance of the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires synthesized at approximately 750°C is possibly a result of the formation of good crystalline structure and suitable particle size leading to reversible phase transition and effective accommodation of the structure strain during sodium ion insertion and deinsertion. At a lower temperature, a high initial capacity is obtained due to the existence of more accessible sites in the defected crystalline structure, as shown in Figure 3A and Figure 3B, but such disordered structures are also less stable in cycling. At a much higher temperature, significant crystal growth takes place (supporting information), and the large crystals produce more stress during Na ion insertion/extraction.

[0047] The polymer-pyrolysis method provides a precursor solution with homogeneous distribution of the constituents at the atomic level. The metal ions have strong binding to the carboxylate groups on the polymeric chains. This uniform immobilization of metallic ions in the polymer chains favors the formation of a uniformly distributed solid solution of the metallic oxides in the following pyrolysis process, facilitating the growth of high quality nanowires. To compare the polymer-pyrolysis method with the solid-state reaction method, we have prepared the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ by the solid-state reaction method, as previously reported. As can be seen from Figure 9, the cycling stability of the single crystalline $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowire by the polymer-pyrolysis method is much better than that by the solid-state reaction method.

[0048] The nanowire $\text{Na}_4\text{Mn}_9\text{O}_{18}$ electrode has demonstrated not only high reversible capacity and excellent cycling stability, but also good rate capability as shown in Figure 4D. The electrode delivers reversible capacity of 128 mA h g^{-1} at 0.1C, 94 mA h g^{-1} at 1C and 82 mA h g^{-1} even at 2C. The reversible capacity of the nanowire $\text{Na}_4\text{Mn}_9\text{O}_{18}$ electrode at 0.1C is actually higher than the theoretical capacity of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ with 4 Na ion insertion/extraction reaction from $\text{Na}_6\text{Mn}_9\text{O}_{18}$ to $\text{Na}_2\text{Mn}_9\text{O}_{18}$, implying that some Na (1) ions occupying the small tunnels in Figure 1A could also be extracted to some extent to contribute to reversible capacity, in agreement with the previous report. Sauvage F. et al. reported that the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ electrode capacity decreases drastically when the charge-discharge current is increased to larger than $C/20$, as a result of the sluggish kinetics involving the phase transition, sodium ion diffusion in solid state and structural reformation. Benefiting from the high crystallinity and nanowire morphology, the as-prepared $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires, however, demonstrate a much improved facile kinetic characteristics.

[0049] The importance of the ion diffusion in the nanowire structure is further demonstrated by the following calculation. Na-ion diffusion coefficient (D_{Na}) is determined from the low frequency Warburg contribution of the electrochemical impedance spectroscopy (EIS). The equation for D_{Na} based on EIS response can be written as^[13]

$$\textbf{[0050]} \quad D_{\text{Na}^+} = 1/2 \left[\left(\frac{V_m}{FSA_w} \right) \frac{dE}{dx} \right] \quad (1)$$

[0051] Where V_m is the molar volume of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ ($22.85 \text{ cm}^3 \text{ mol}^{-1}$), F is the Faraday constant ($96,486 \text{ C mol}^{-1}$), S is the contact area between electrolyte and electrode material (taken as the BET surface area, $17.8 \text{ m}^2 \text{ g}^{-1}$, for first approximation for $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires). A_w is the Warburg coefficient, which was determined as the average value of the slope of Z' and $-Z''$ vs. $\omega^{-1/2}$ plots (ω is the angular frequency), respectively. (dE/dx) is the

differential of the galvanostatic titration curve. The diffusion coefficients of sodium ion for different open circuit voltage (OCV) values were summarized in Figure 5B and Figure 7. As can be seen, D_{Na} for $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires is in the voltage range of 2.4-3.5 V is $8.67 \times 10^{-16} - 3.04 \times 10^{-15} \text{ cm}^2 \text{ s}^{-1}$. Based on the average D_{Na} value ($\sim 3 \times 10^{-15}$) and the equation for the diffusion time (r^2/D_{Na}), we estimate the diffusion time for Na^+ to diffuse over 25 nm (average radius of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires) to be 0.57 h. Hence, the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowire electrode does not present severe polarization for up to 2C rate. However, in the bulk material, the discharge capacity should decrease dramatically over 2C rate because of Na ion diffusion limitation. At a high charge/discharge current density of over 2C (5C and 10C), a drastic decrease of the discharge capacity is expected, as confirmed by experimental observations, 56 mA h g^{-1} at 5C and 26 mA h g^{-1} at 10C respectively, as shown in Figure 5A. This result clearly confirms that the rate limiting process in the electrode material is the Na ion diffusion, and highly crystalline, smaller nanowires could further improve the electrochemical performance.

[0052] We also investigated the performance of the sodium-ion full cell based on the as-prepared $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires as cathode and pyrolyzed carbon as anode. The charge-discharge profiles for full cell were tested in the potential range of 1.5~4.1 V (vs Na/Na^+) at a constant current of 50 mA g^{-1} ($\sim 0.5 \text{ C}$, based on the active mass of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ cathode), shown in Figure 10A. Figure 10A shows a slope charge-discharge curve, an average discharge voltage of 2.7V and reversible cycling performance. The $\text{Na}_4\text{Mn}_9\text{O}_{18}$ /pyrolyzed carbon sodium-ion battery can deliver 73% capacity retention after 100 cycles, as shown in Figure 10B. This result suggests that the sodium-ion battery could be a viable and low-cost potential alternative for an energy storage system.

[0053] $\text{Na}_4\text{Mn}_9\text{O}_{18}$ belongs to a large family of open structured MnO_2 structure. The structures and properties of this family of materials can be systematically varied by the rich chemistry and synthesis conditions. Great opportunities exist not only in terms of tuning the intrinsic properties but also in controlling the nanostructures. Using the same polymer-pyrolysis synthetic method, we demonstrated that we can prepare nanostructured, layered oxide materials ($\text{Na}_x\text{Li}_y\text{Ni}_{0.25}\text{Mn}_{0.75}\text{O}_4$, $x=1.0$ and 0.9 , $x+y=1$), as illustrated in Figure 6A and Figure 6B. As compared to pure $\text{Na}_4\text{Mn}_9\text{O}_{18}$, this material has an even higher initial discharge capacity, i.e., 130 mA h g^{-1} (60 mA/g , at 0.5C), but the initial stability is not as good as $\text{Na}_4\text{Mn}_9\text{O}_{18}$, as shown in Figure 6C. It is interesting that the capacity fading occurs only at first 10 cycles, as detailed in Figure 6C, possibly corresponding to the initial structural conversion. The $\text{Na}_{0.9}\text{Li}_{0.1}\text{Ni}_{0.25}\text{Mn}_{0.75}\text{O}_4$ electrode can still deliver a reversible capacity of 101 mA h g^{-1} after 50 cycles, but the performance of the same material without Li doping is poor.

[0054] The detailed Na-ion insertion/extraction mechanism and the possible multiphase transition in the nanostructured MnO_2 family materials deserve great in-depth study in the future. The Na-ion diffusion in these materials is actually comparable to the Li-ion diffusion in LiFePO_4 materials (10^{-15} - $10^{-17} \text{ cm}^2 \text{ s}^{-1}$). Therefore, the strategies used to improve the LiFePO_4 rate performance could shine light on the further enhancement of the rate performance of $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires through methods such as carbon coating, doping and optimization in particle size.

[0055] In summary, we prepared, in one embodiment, single crystalline $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires by a polymer-pyrolysis method using polyacrylates of Na and Mn as precursor compounds. The optimized $\text{Na}_4\text{Mn}_9\text{O}_{18}$ have high crystallinity and homogeneous nanowire structure, which provide stable structure and shorten the diffusion path for sodium ion

intercalation/deintercalation reaction. The $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires have shown a high reversible capacity (128 mA h g^{-1} at 0.1C), excellent cycleability (82% capacity retention for 500 cycles at 0.5 C) and promising rate capability for a sodium ion battery. The outstanding performance of the $\text{Na}_4\text{Mn}_9\text{O}_{18}$ nanowires makes itself a promising candidate to construct a viable and low-cost Na-ion batteries system for upcoming power and energy storage systems.

[0056] While a number of embodiments of the present invention have been shown and described, it will be apparent to those skilled in the art that many changes and modifications may be made without departing from the invention in its broader aspects. The appended claims, therefore, are intended to cover all such changes and modifications as they fall within the true spirit and scope of the invention.

Claims

We claim:

1. A method of making a crystalline nanomaterial comprising:
 - a. dissolving a first nitrate salt and a second nitrate salt in an acrylic acid aqueous solution;
 - b. adding an initiator to the acrylic acid solution;
 - c. heating the solution to form polyacrylates;
 - d. drying the polyacrylates; and
 - e. calcining the polyacrylates.
2. The method of Claim 1 wherein the first nitrate salt is sodium nitrate and the second nitrate salt is manganese nitrate.
3. The method of Claim 1 wherein the initiator is ammonium persulfate.
4. The method of Claim 2 wherein the polyacrylates are polyacrylates of sodium and manganese.
5. The method of Claim 1 wherein the heating the solution is performed at a temperature in a range of 60° C to 100° C.
6. The method of Claim 1 wherein the drying the polyacrylates is performed at a temperature in a range of 90° C to 150° C.

7. The method of Claim 1 wherein the calcining the polyacrylates is performed at a temperature in a range of 500° C to 900° C.
8. The method of Claim 1 wherein the crystalline nanomaterial forms an electrode.
9. The method of Claim 8 wherein the electrode is a cathode.
10. A method of making a crystalline nanomaterial comprising:
 - a. dissolving a stoichiometric amount of sodium nitrate and manganese nitrate in an acrylic acid aqueous solution;
 - b. adding an initiator to the acrylic acid solution;
 - c. heating the solution to form polyacrylates of sodium and manganese;
 - d. drying the polyacrylates; and
 - e. calcining the polyacrylates.
11. The method of Claim 10 wherein the initiator is ammonium persulfate.
12. The method of Claim 10 wherein the heating the solution is performed at a temperature in a range of 60° C to 100° C.
13. The method of Claim 10 wherein the drying the polyacrylates is performed at a temperature in a range of 90° C to 150° C.

14. The method of Claim 10 wherein the calcining the polyacrylates is performed at a temperature in a range of 500° C to 900° C.
15. The method of Claim 10 wherein the crystalline nanomaterial forms an electrode.
16. The method of Claim 15 wherein the electrode is a cathode.
17. A crystalline nanomaterial comprising
 - a. sodium nitrate;
 - b. manganese nitrate;
 - c. acrylic acid aqueous solution, wherein the nitrates are dissolved in the acrylic acid solution; and
 - d. an initiator added to the acrylic acid solution;
18. The nanomaterial of Claim 17 wherein the initiator is ammonium persulfate.
19. The nanomaterial of Claim 17 wherein the molar ratio of sodium nitrate, manganese nitrate, and acrylic acid ranges from 0.1:1.5:2.5 to 1: 2.5:3.5.
20. A device in which energy is stored comprising:

a crystalline nanowire represented by the formula Na_xMnO_y , wherein the device has an electrode capacity of at least 80 mAh/g; the device has an energy density of at least 800 kWh/kg; the device exhibits less than about 30%

degradation after about 100 to about 2000 charge/discharge cycles; and wherein the device includes a single crystalline nanowire with a diameter of less than about 70 nm.

21. The device of Claim 20 wherein the device is a battery or a capacitor.
22. A device in which energy is stored comprising:
a crystalline nanowire represented by the formula $\text{Na}_x\text{A}_y\text{MnB}_z\text{O}_n\text{C}_a$, wherein A represents H, Li, Be, Mg, K, Ca, Rb, Sr, Cs, Ba, Fr, Ra or combinations thereof; wherein B represents V, Cr, Mo, Tc, Fe, Ru or combinations thereof; wherein C represents N, P, S, F, Cl or combinations thereof; the device has an electrode capacity of at least 80 mAh/g; the device has an energy density of at least 800 kWh/kg; the device exhibits less than about 30% degradation after about 100 to about 2000 charge/discharge cycles; and wherein the device includes a single crystalline nanowire with a diameter of less than about 70 nm.
23. The device of Claim 1 wherein the device is a battery or a capacitor.

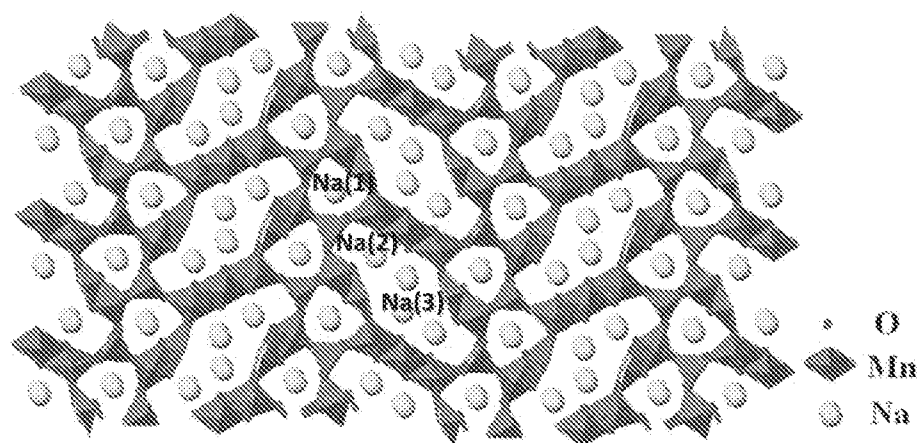


Figure 1A

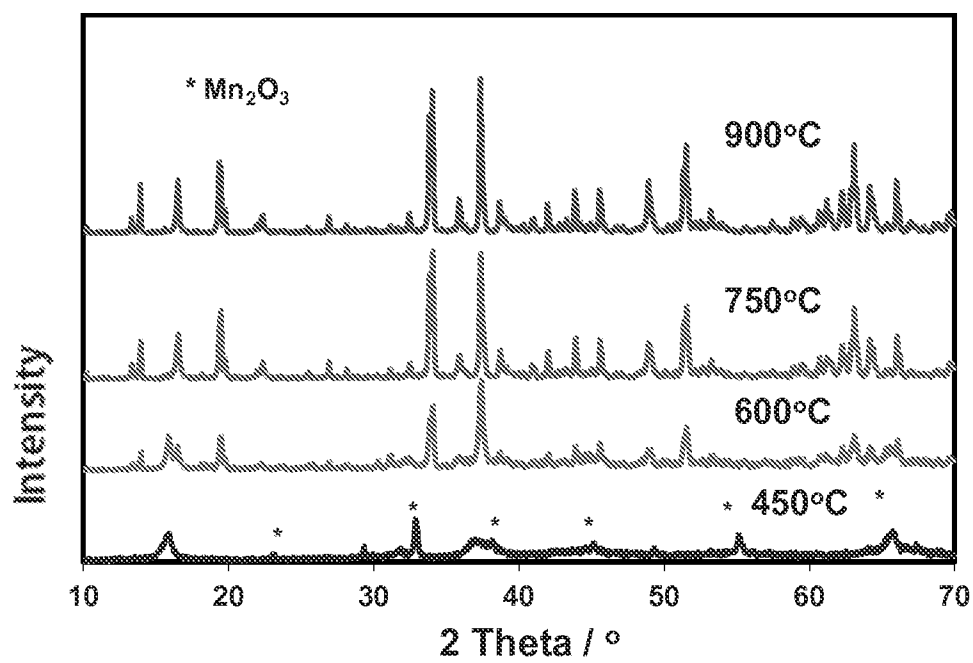


Figure 1B

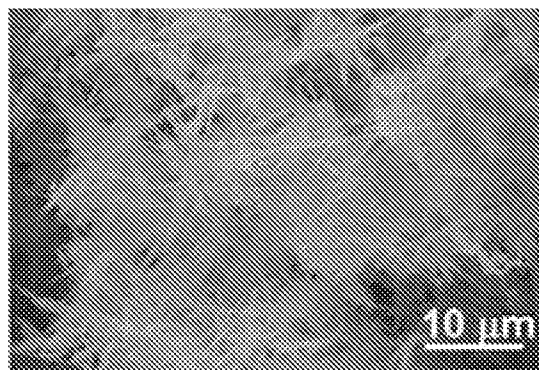


Figure 2A

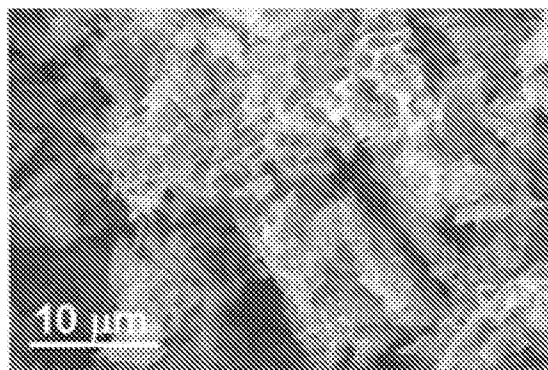


Figure 2B

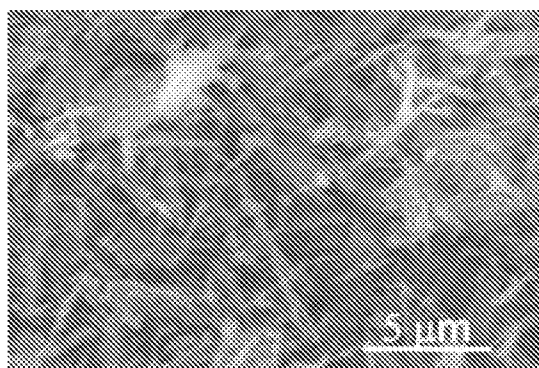


Figure 2C

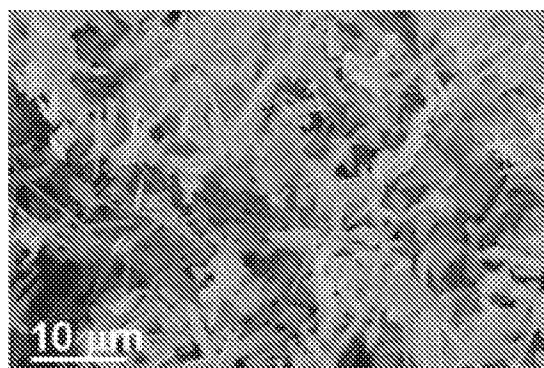


Figure 2D

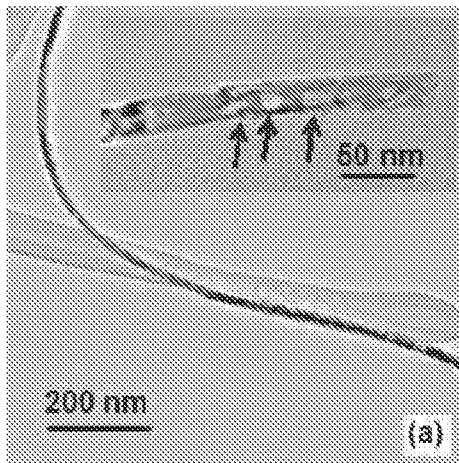


Figure 3A

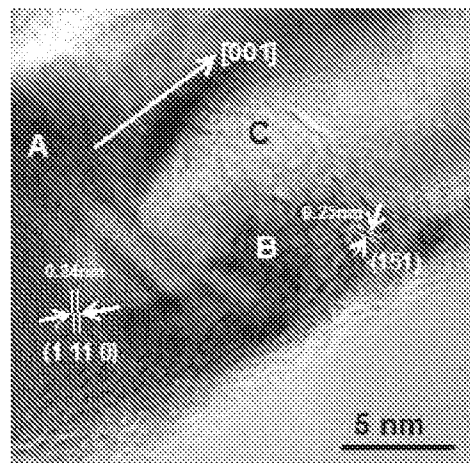


Figure 3B

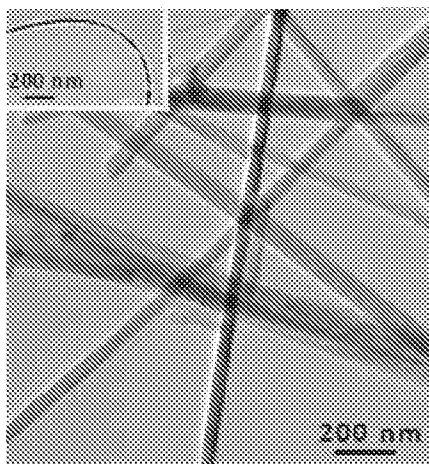


Figure 3C

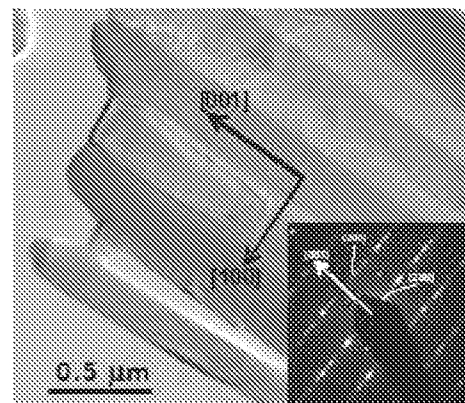


Figure 3D

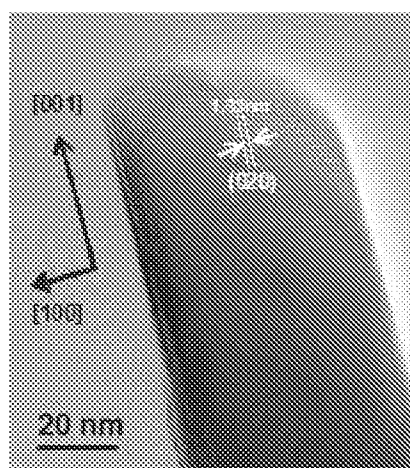


Figure 3E

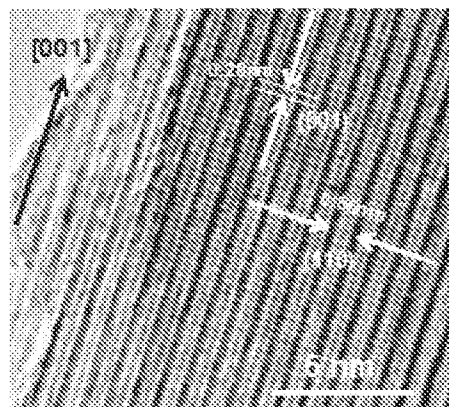


Figure 3F

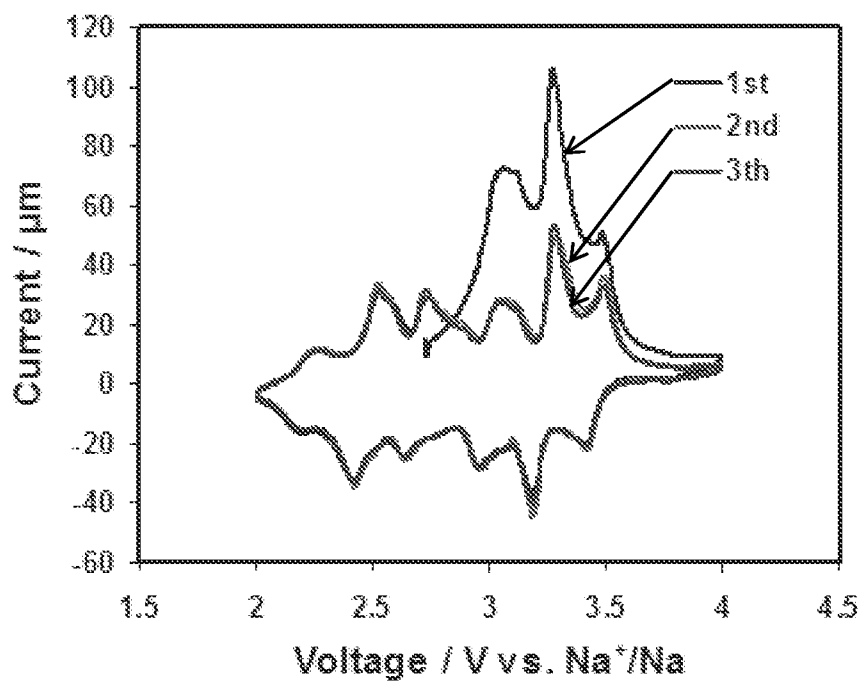


Figure 4A

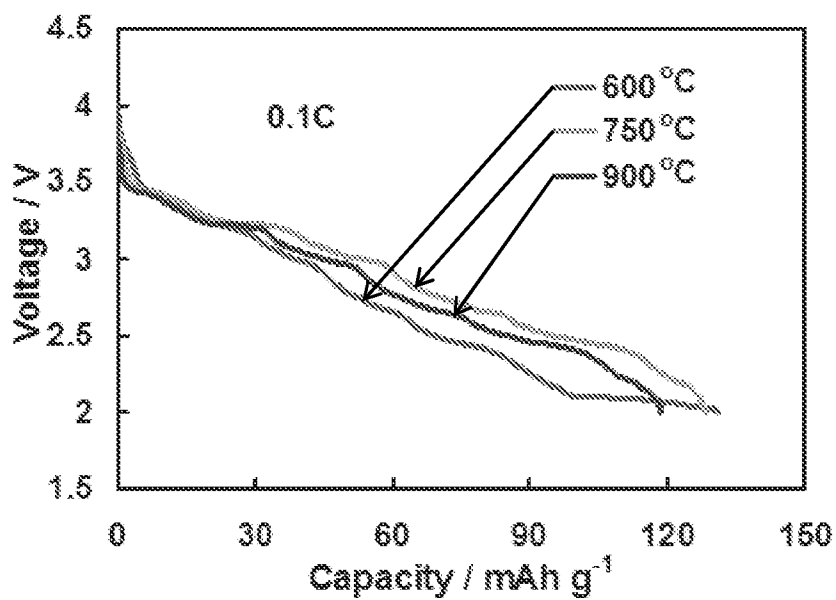


Figure 4B

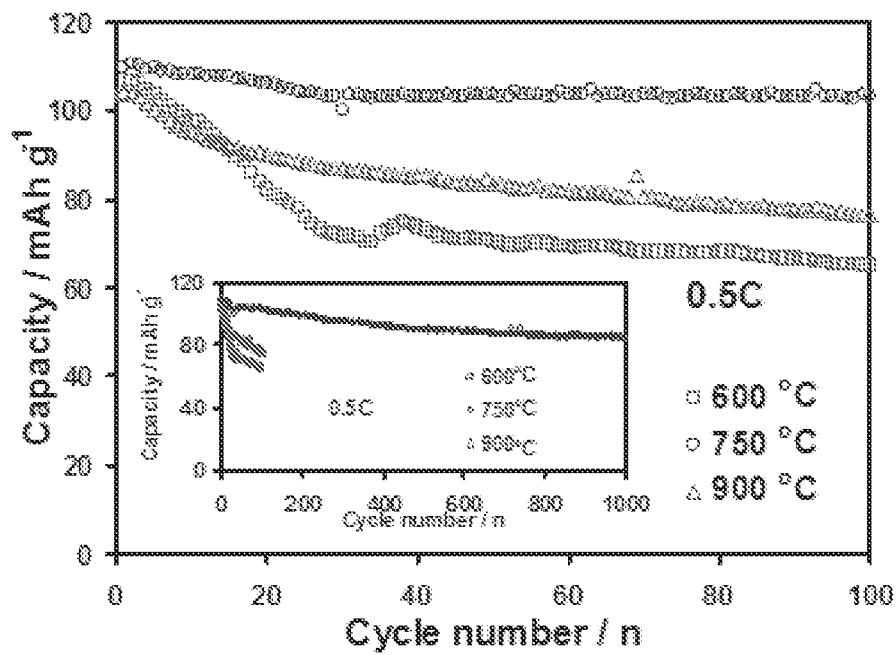


Figure 4C

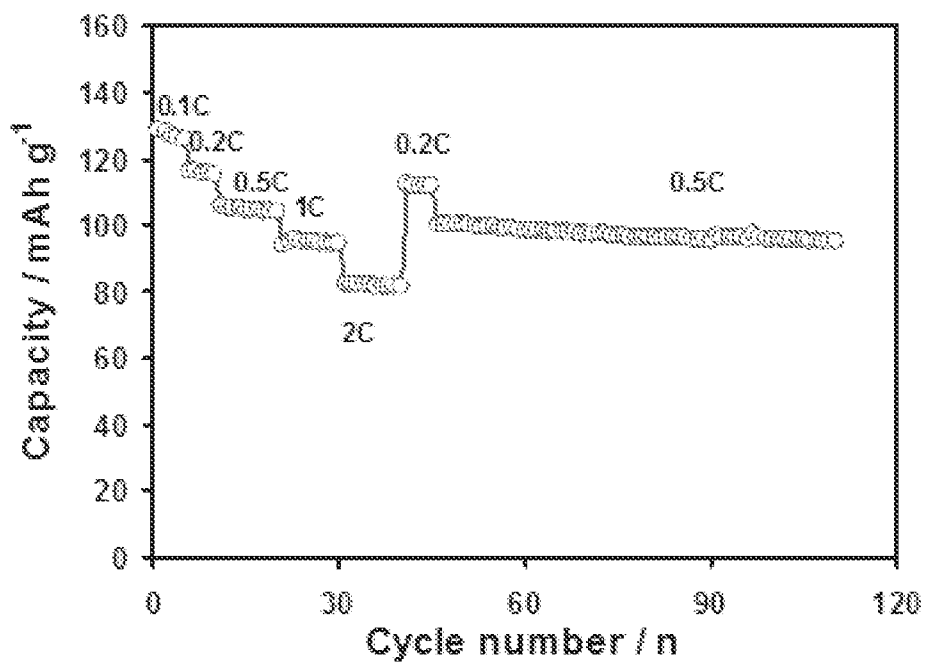


Figure 4D

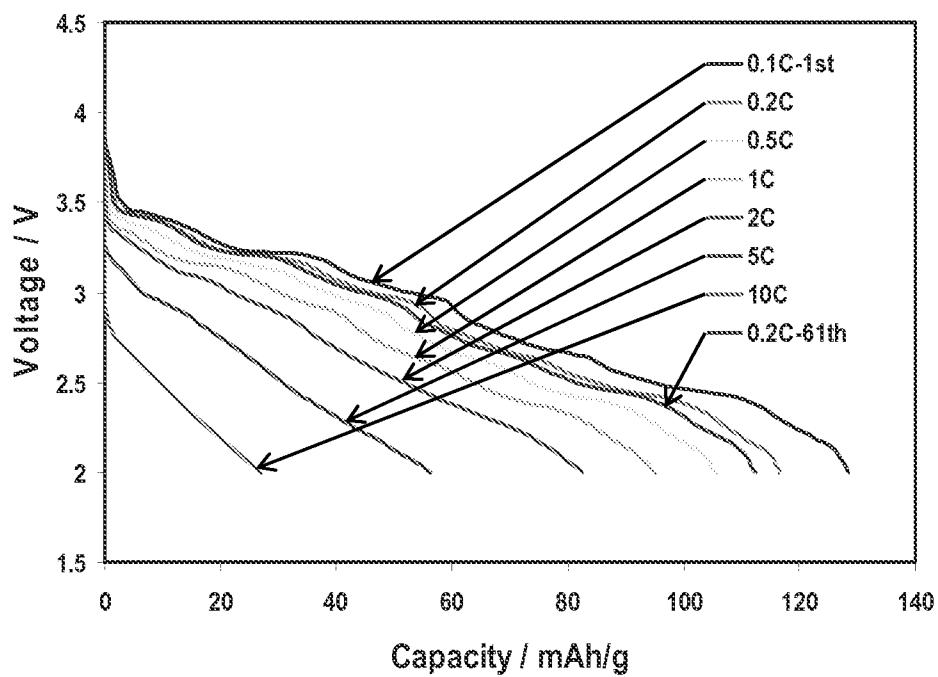


Figure 5A

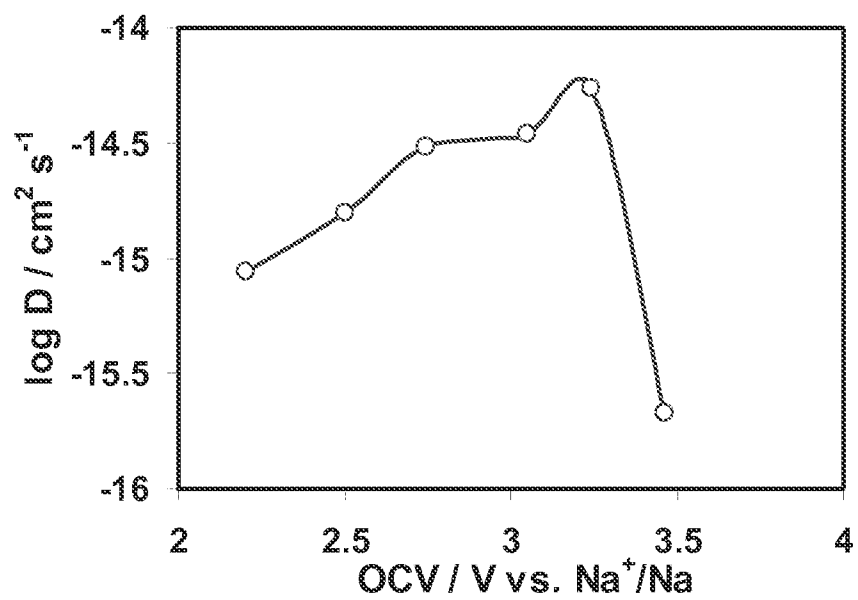


Figure 5B

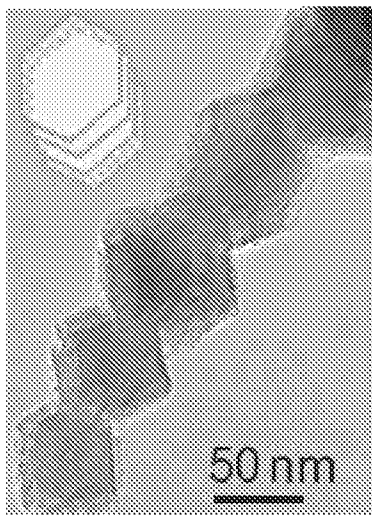


Figure 6A

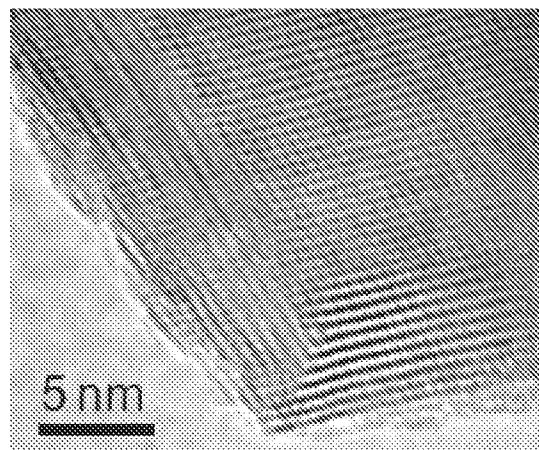


Figure 6B

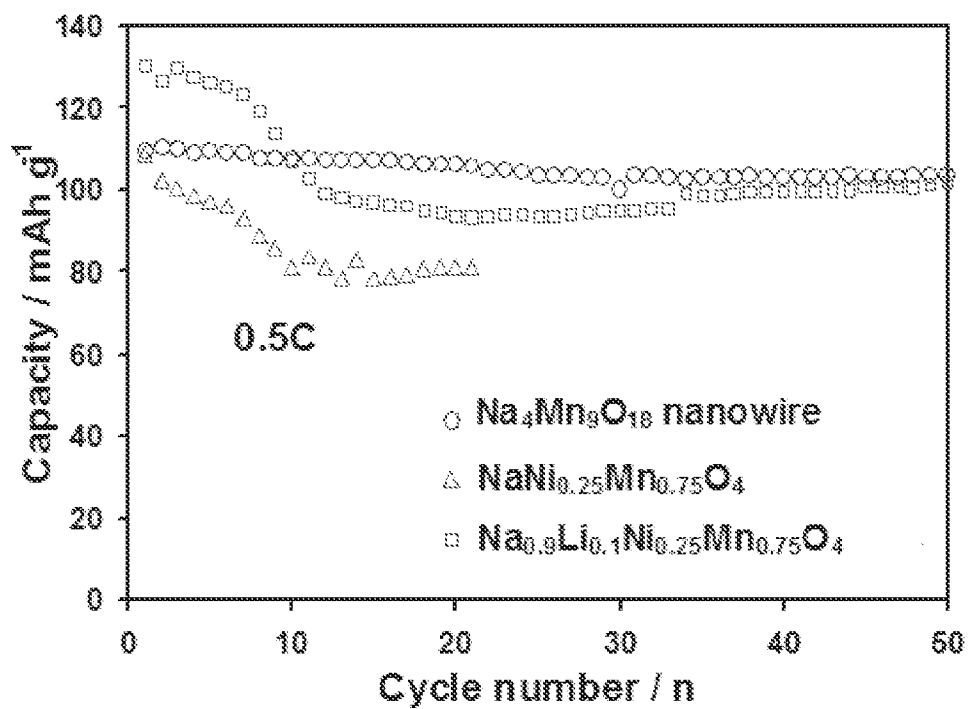


Figure 6C

x (Na _{0.66-x} MnO ₂)	OCV (V)	D _{Na} value (cm ² s ⁻¹)
0.0763	2.505	8.67×10 ⁻¹⁶
0.1526	2.7431	1.57×10 ⁻¹⁵
0.2289	3.0481	3.04×10 ⁻¹⁵
0.3052	3.2448	3.44×10 ⁻¹⁵
0.3815	3.4655	5.51×10 ⁻¹⁵
0.4101	3.5227	2.13×10 ⁻¹⁶

Figure 7

Calcining temperature	Unit cell parameters (Å)			Cell volume (Å ³)
	a	b	c	
600 °C	9.10281	26.44264	2.83849	683.27
750 °C	9.08894	26.45045	2.83362	681.22
900 °C	9.09814	26.39346	2.83325	680.35

Figure 8

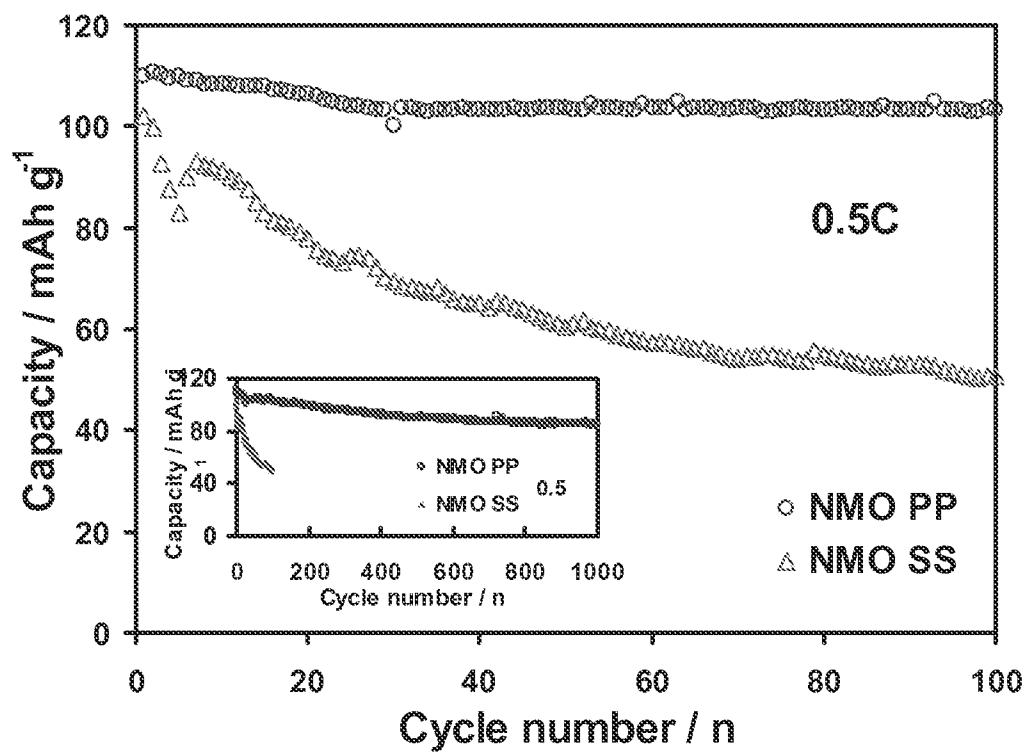


Figure 9

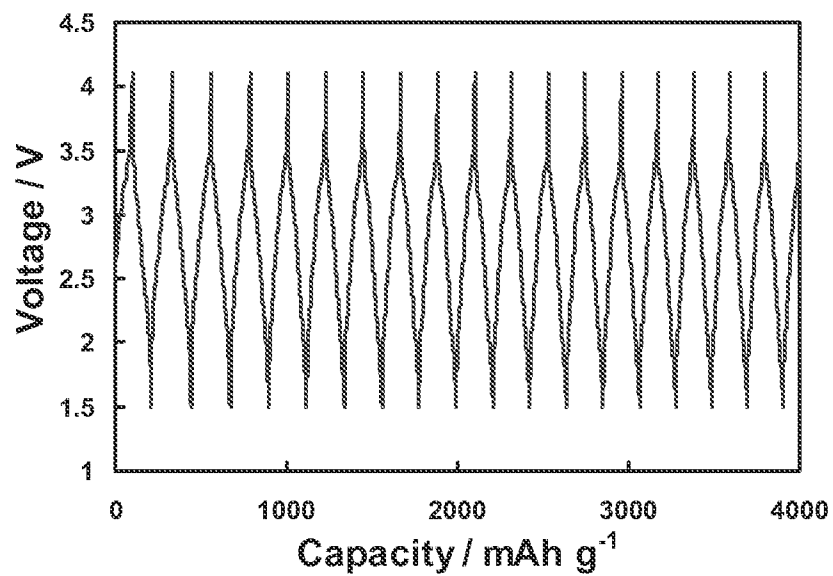


Figure 10A

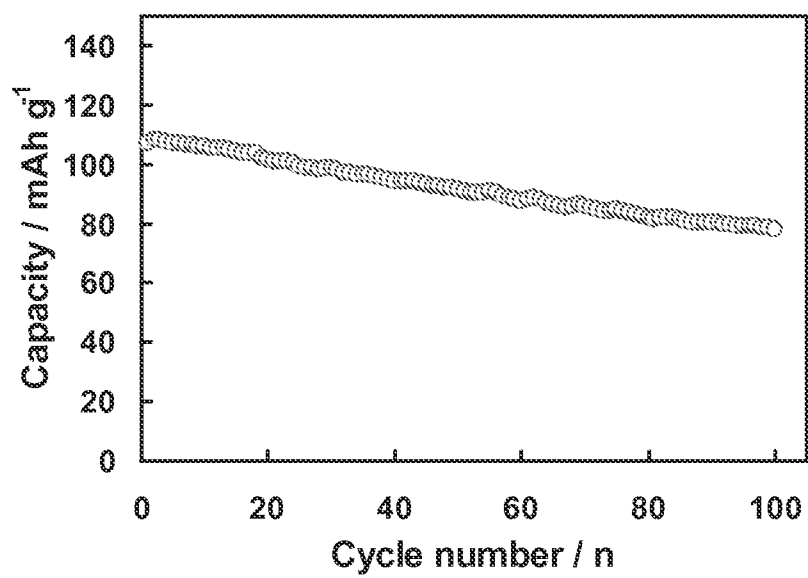


Figure 10B

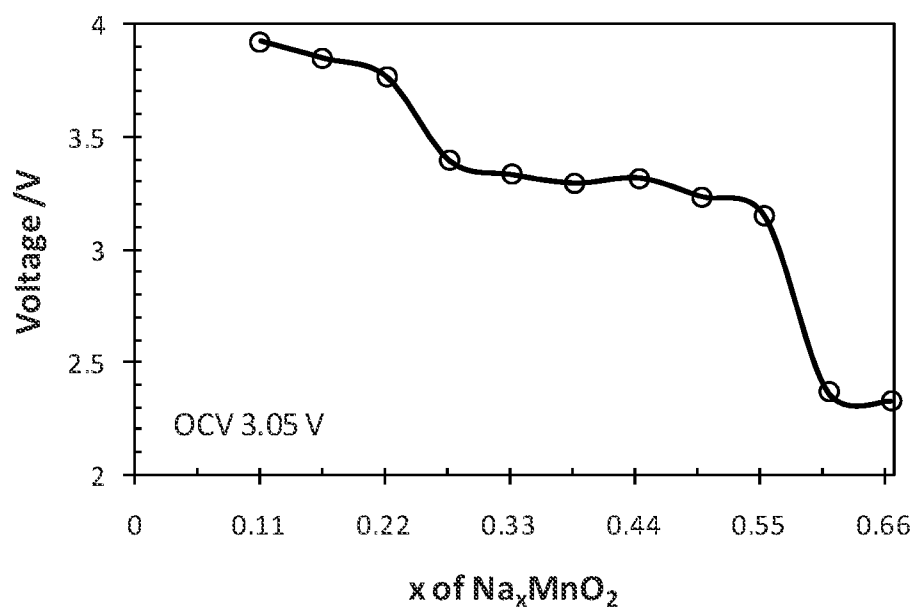


Figure 11A

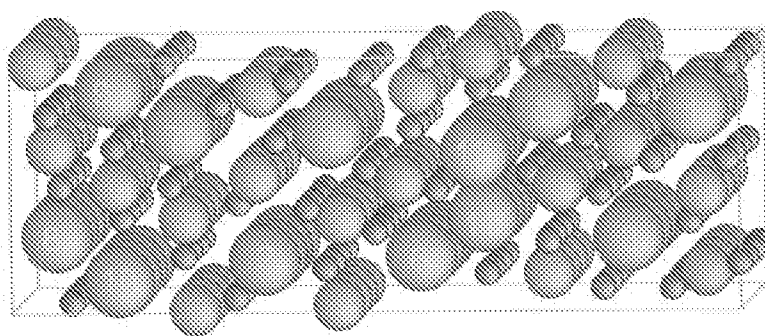


Figure 11B

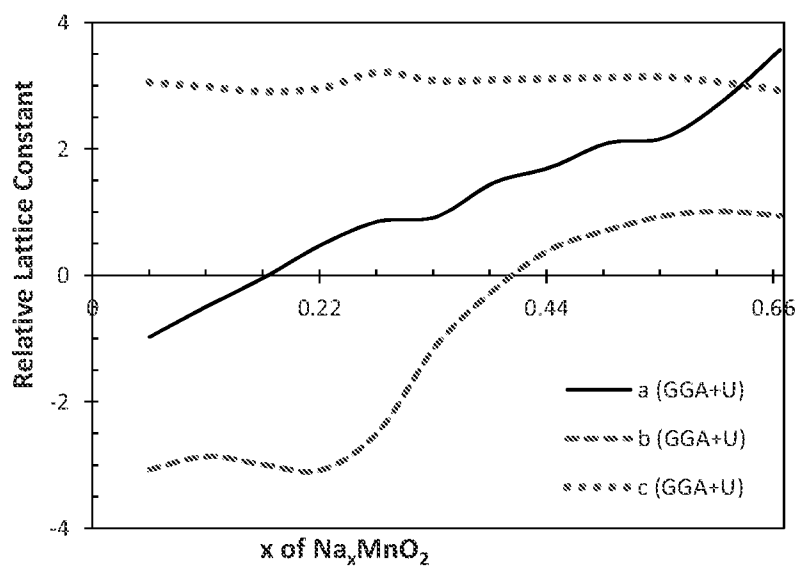


Figure 12A

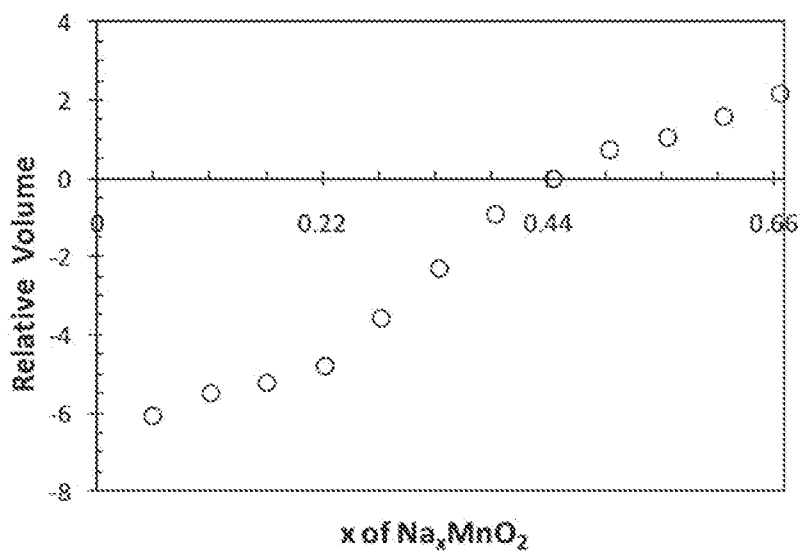


Figure 12B

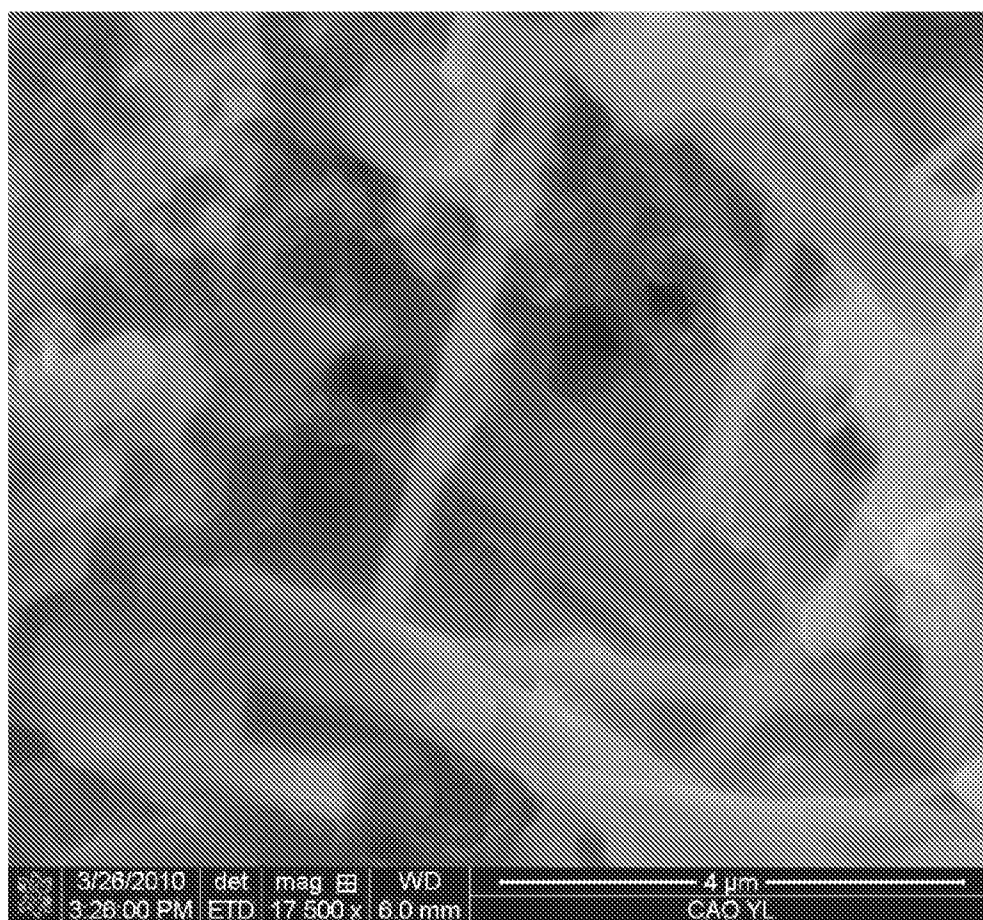


Figure 13