

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199672886 B2
(10) Patent No. 721719

(54) Title
Vapor-permeable shoe

(51)⁷ International Patent Classification(s)
A43B 007/12

(21) Application No: **199672886**

(22) Application Date: **1996.10.09**

(87) WIPO No: **WO97/14326**

(30) Priority Data

(31) Number	(32) Date	(33) Country
PD95A000190	1995.10.13	IT
PD96A000126	1996.05.17	IT

(43) Publication Date : **1997.05.07**

(43) Publication Journal Date : **1997.07.03**

(44) Accepted Journal Date : **2000.07.13**

(71) Applicant(s)
Nottingham Holding B.V.

(72) Inventor(s)
Mario Polegato

(74) Agent/Attorney
GRIFFITH HACK,GPO Box 4164,SYDNEY NSW 2001

(56) Related Art
EP 080710



IN

(51) International Patent Classification ⁶ :
A43B 7/12

A1

(11) International Publication Number: WO 97/14326

(43) International Publication Date: 24 April 1997 (24.04.97)

(21) International Application Number: PCT/EP96/04382

(22) International Filing Date: 9 October 1996 (09.10.96)

(30) Priority Data:
PD95A000190 13 October 1995 (13.10.95) IT
PD96A000126 17 May 1996 (17.05.96) IT

(71) Applicant (for all designated States except US): NOTTING-
TON HOLDING B.V. [NL/NL]; Hoekenrode 6-8, NL-1102
BR Amsterdam (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): POLEGATO, Mario [IT/IT];
Via Antonini, 7, I-31035 Crocetta del Montello (IT).


(74) Agent: MODIANO, Guido; Modiano & Associati, Via Merav-
igli, 16, I-20123 Milano (IT).

(81) Designated States: AL, AM, AU, AZ, BB, BG, BR, BY, CA,
CN, CZ, EE, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ,
LK, LR, LS, LT, LV, MD, MG, MK, MN, MW, MX, NO,
NZ, PL, RO, RU, SD, SG, SI, SK, TJ, TM, TR, TT, UA,
UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ,
UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF,
BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: VAPOR-PERMEABLE SHOE

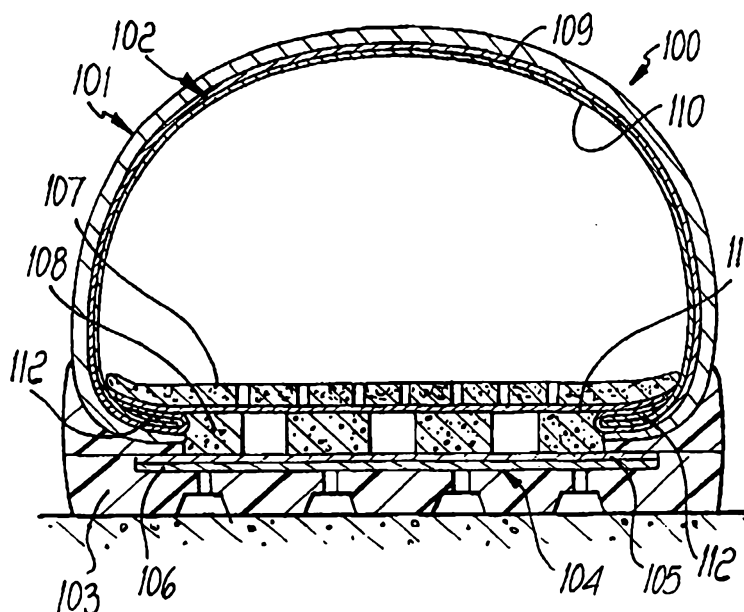

(57) Abstract

A vapor-permeable shoe, including the following combination of elements: a vapor-permeable upper (101) associated with a vapor-permeable or perforated lining (102); a tread (103) made of perforated elastomer; a mid-sole (104) comprising at least one membrane (105) made of waterproof vapor-permeable material that is associated with a lower protective layer (106) made of hydrolysis-resistant, water-repellent, vapor-permeable or perforated material; a vapor-permeable or perforated insole (107); a vapor-permeable or perforated filler layer (108) arranged between the insole (107) and the membrane (105). The lower part of the upper (101), the tread (103), the mid-sole (104) with the membrane (105) are perimetrically sealed in the coupling regions.

VAPOR-PERMEABLE SHOE

Technical field

The present invention relates to a vapor-permeable shoe.

Background Art

It is known that a shoe, in order to be comfortable, must ensure the correct exchange of heat and water vapor between the internal microclimate of the shoe and the external climate.

This exchange of heat and water vapor, however, must not compromise in any way the tightness of the shoe with respect to external moisture or water.

Currently commercially available shoes entrust this heat and water vapor exchange substantially to the upper or to the sole.

As regards the upper, shoes provided with perforations and/or with linings made of vapor-permeable and waterproof material are currently commercially available.

In some models, parts of the upper may be replaced with materials that are indeed waterproof and at the same time vapor-permeable.

Another category of shoes instead entrusts vapor-permeability to the sole, again by using layers of waterproof and vapor-permeable material, optionally associated with protective layers and fillers.

EP-A-0 080 710 discloses a vapor-permeable shoe in which the vapor-permeability is entrusted to a sole of the type made of a material, for example leather, which allows the vapor to exit through the sole. In order to contemporarily prohibit water to enter through the sole from the outside, functional microporous layers (which allow water flow therethrough only in the one direction from the inside of the shoe towards the outside) is arranged between various parts of the sole structure including the outsole (tread), the midsole, the insole, and the innersole insert.



EP-A- 728 424 discloses a vapor-permeable shoe in which the vapor-permeability is entrusted to a sole of the type including an outsole or tread made of impermeable material, such as polyurethane or rubber, which is however provided with a plurality of holes for permitting the passage of water vapor produced by foot transpiration from the inside of the shoe to the outside. Above the outsole there is provided a layer of impermeable and transpiring material such as Gore-Tex which still permits the outward transpiration of vapor but which blocks the entrance of water from the outside. Connected above the Gore-Tex layer, between the Gore-Tex layer and the transpiring inner sole, is a layer of resiliently deformable material, in particular a layer of corrugated felt which, on getting deformed as a result of foot pressure, has a pumping effect which facilitates and increases air circulation through the sole.

Disclosure of the Invention

It would be desirable if at least preferred embodiments of the present invention provide a vapor-permeable shoe that allows the exchange of heat and water vapor both through the upper and through the sole, ensuring at all times an optimum internal microclimate as a



function of the external climate.

It would also be advantageous if at least preferred embodiments of the present invention provide a vapor-permeable shoe the structure whereof is in no way restrictive in terms of styling and aesthetic research, allowing the greatest freedom in shoe shapes and types.

It would also be advantageous if at least preferred embodiments of the present invention provide a vapor-permeable shoe that is meant both for everyday use and for sports use.

It would also be advantageous if at least preferred embodiments of the present invention provide a vapor-permeable shoe the cost whereof is competitive with respect to the costs of conventional vapor-permeable shoes.

It would also be advantageous if at least preferred embodiments of the present invention provide a vapor-permeable shoe that can be manufactured with conventional technologies.

In one aspect, the present invention provides a vapor-permeable shoe comprising the following combination of elements:

- a vapor-permeable upper that is associated with a vapor-permeable or perforated lining;
- a tread made of perforated elastomer;
- a mid-sole comprising at least one membrane made of waterproof vapor-permeable material that is connected to a lower protective layer directed towards said tread, said lower protective layer being made of vapor-permeable material, said lower protective layer being arranged below said membrane between said membrane and said perforated elastomer tread and directly above said perforated elastomer tread, and said lower protective layer extending over said perforations of said perforated elastomer tread for protecting said membrane against external impacts of foreign object penetration through the perforations of said perforated elastomer tread;
- a vapor-permeable or perforated insole;
- a vapor-permeable or perforated filler layer arranged between said insole and said membrane;


the lower part of said upper, said tread, and said mid-sole being perimetrically sealed in perimetric coupling regions such that non-vapor-permeable regions are arranged so as to be substantially limited to the perimetric coupling regions of the sole and vapor-permeable regions are arranged substantially inside the perimetric coupling regions.



In a second aspect, the present invention provides a method for manufacturing a vapor-permeable shoe comprising:

- providing a mid-sole including at least one membrane made of waterproof vapor-permeable material and an impact resistant lower protective layer made of vapor-permeable material, connecting said membrane with said protective layer such that the protective layer is directed towards said tread and such that said lower protective layer is arranged below said membrane between said membrane and said perforated elastomer tread and directly above said perforated elastomer tread, said lower protective layer extending over said perforations of said perforated elastomer tread for protecting said membrane against external impacts or foreign object penetration through the perforations of said perforated elastomer tread;
- providing a vapor-permeable or perforated insole;
- providing a vapor-permeable or perforated filler layer and arranging said filler layer between said insole and said membrane; and
- perimetrically sealing the lower part of said upper, said tread, and said mid-sole in perimetric coupling regions, so as to arrange and substantially limit the non-vapor-permeable regions to the perimetric coupling regions of the sole and so as to arrange the vapor-permeable regions substantially inside the perimetric coupling regions.

Typically, the hydrolysis-resistant, water-repellent, vapor-permeable or perforated material is in the form of a non-woven fabric or needle-loomed felt or KEVLAR.



Brief Description of the Drawings

Further characteristics and advantages of the present invention will become apparent from the following detailed description of eight embodiments thereof, illustrated only by way of non-limitative example in the accompanying drawings, wherein:

figure 1 is a longitudinal sectional view of a shoe according to the invention, in a first embodiment;

10 figure 2 is an axonometric cutout view of a detail of the shoe of figure 1;

figure 3 is a transverse sectional view of a shoe according to the invention, in a second embodiment;

15 figure 4 is a transverse sectional view of a shoe according to the invention, in a third embodiment;

figure 5 is a longitudinal sectional view of a shoe according to the invention, in a fourth embodiment;

figure 6 is an axonometric cutout view of a detail of the shoe of figure 5;

20 figure 7 is a transverse sectional view of the shoe of figure 5;

figure 8 is a transverse sectional view of a shoe according to the invention in a fifth embodiment;

25 figure 9 is a transverse sectional view of a shoe according to the invention, in a sixth embodiment;

figure 10 is a front view of a detail of a shoe according to the invention, in a seventh embodiment;

figure 11 is a transverse sectional view of a shoe according to the invention, in a seventh embodiment;



figure 12 is a transverse sectional view of a shoe according to the invention, in an eighth embodiment.

Ways of carrying out the Invention

With particular reference to figures 1 and 2, a vapor-permeable shoe, according to the invention, is generally
5 designated by the reference numeral 10 in a first embodiment.

The shoe 10 comprises, in this case, an upper 11 that is vapor-permeable (made for example of natural leather without sealing pigments) and is associated with a vapor-
10 permeable or perforated lining 12 (for example made of so-called "cambrelle").

The lining 12 is associated with the upper 11 by spot gluing, so as to avoid compromising transpiration through said upper.

15 The shoe 10 furthermore comprises a tread 13 made of perforated elastomer and a mid-sole, generally designated by the reference numeral 14, that comprises a membrane 15 made of waterproof and vapor-permeable material, such as those commercially available and commonly defined by the trade
20 name GORE-TEX, associated with a protective layer 16 that is directed towards the tread 13 and is made of a hydrolysis-resistant, water-repellent, vapor-permeable or perforated material.

The shoe 10 also comprises: an insole 17 made of vapor-
25 permeable material (for example natural leather) or perforated material, with an optional heel seat made of soft leather with absorbent latex rubber, and a perforated filler layer 18 made of injected thermoplastic material that is arranged on the tread 13 with the membrane 15.

A vapor-permeable or perforated toe cup 19 is furthermore applied to the shoe 10, in this first embodiment, and is associated with the upper 11 by spot gluing so as to ensure its transpiration.

5 Likewise, a rear vapor-permeable or perforated counter 20 is associated with the upper 11 by spot gluing.

The upper 11, in this case, is associated with the insole 17 by applying a layer of glue along a perimetric band.

10 Limiting the gluing layer to a perimetric band allows to leave transpiration unaffected over much of the surface of the foot sole.

The shoe 10 in fact has a central part of the insole that is entirely free of any element that is impermeable to
15 water vapor (non-vapor-permeable).

Furthermore, the membrane 15 and the lower protective layer 16 are coupled one another by spot gluing, by using a commercially available adhesive that is resistant to hydrolysis (a type commonly known as "hot merc" or systems
20 with calendered powders).

As regards the protective layer 16, it can be conveniently made of water-repellent material capable of quickly drying, such as for example non-woven fabric or needle-loomed felt, or KEVLAR.

25 Said protective layer 16 is furthermore directed downwards, i.e., towards the tread 13, since it must protect the membrane 15 against external impacts or against foreign objects that may penetrate through the holes formed in said tread 13.

30 The association between the protective layer 16 and the

tread 13 occurs by means of a commercially available and hydrolysis-resistant adhesive by spot gluing or by gluing along a perimetric band, so as to ensure vapor-permeability of the sole as a whole.

Furthermore, the coupling of the membrane 15 to the filler layer 18 and to the tread 13 must be provided so as to ensure a seal against external water along its entire perimeter, and this can occur by perimetric gluing, by using hydrolysis-resistant adhesives or high-frequency welding or through overlap injection-molding, on the tread 13, of compatible material that allows perfect adhesion of the membrane 15 to the tread 13 directly or by means of the protective layer 16.

The shoe according to the invention, as shown by the description of this first embodiment thereof, is vapor-permeable as a whole, any non-vapor-permeable regions having been limited substantially to the perimetric regions of the sole, which must besides ensure a good seal against water and external moisture.

Vapor-permeability can be increased further, through the sole as a whole, if the insole 17 is applied to the upper 11 with stitches, so that the entire surface of said insole 17 is vapor-permeable because it is not affected by glue.

With particular reference to figure 3, a shoe according to the invention is generally designated by the reference numeral 100 in a second embodiment.

The shoe 100 comprises an upper 101 that is associated with an internal lining 102 that is generally vapor-permeable or perforated.



The shoe 100, like the shoe 10, comprises a perforated elastomeric tread 103 and a mid-sole, generally designated by the reference numeral 104, that comprises a membrane 105 of waterproof and vapor-permeable material associated with a
5 lower protective layer 106 made of hydrolysis-resistant, water-repellent, vapor-permeable or perforated material.

The shoe 100 furthermore comprises a vapor-permeable or perforated insole 107 and a vapor-permeable or perforated filler layer 108 that is arranged between said insole 107
10 and the membrane 105.

The shoe 100 differs from the shoe 10 in that the lining 102 is composite, since it is formed by an outer layer, constituted by a waterproof and vapor-permeable membrane 109 the characteristics whereof are similar to
15 those of the membrane 105, and by an inner layer, which is directed towards the foot, is designated by the reference numeral 110, and is made of leather or vapor-permeable fabric.

In this second embodiment, the perimetric region of the
20 shoe 100 is furthermore sealed by folding the advantageously protruding edge of the membrane 109, which is welded, again along a perimetric band, to the edge of a waterproof and vapor-permeable membrane 111 the characteristics whereof are similar to those of the membrane 105; said membrane 111 is
25 arranged below the insole 107 with which it is associated.

More specifically, the membrane 109 is cut so that it is larger than the upper 101 and its border protrudes from said upper.

During the application of the insole 107, of the mid-
30 sole 104, and of the tread 103, the excess border of the

membrane 109 is folded upwards and outwards, so as to provide a perimetric surface whereon the corresponding perimetric border of the membrane 111 is glued.

In this manner, the membrane 109 forms a perimetric
5 pocket 112 that seals the sole as a whole against water and external moisture.

Furthermore, if part of the insole 107 is glued to the tread 103, water is also sealed out of the lightening hollows.

10 With particular reference to figure 4, a shoe according to the invention is generally designated by the reference numeral 200 in a third embodiment.

The shoe 200 comprises an upper 201 that is associated with a lining 202.

15 The shoe 200 furthermore comprises a tread 203 made of perforated elastomer and a mid-sole, generally designated by the reference numeral 204, which comprises a membrane 205 made of waterproof and vapor-permeable material that is associated with a lower protective layer 206 made of a
20 hydrolysis-resistant, water-repellent, vapor-permeable or perforated material.

The shoe 200 furthermore comprises a vapor-permeable or perforated insole 207 and a vapor-permeable or perforated filler layer 208 that is arranged between the insole 207 and
25 the membrane 205.

As in the second embodiment, the shoe 200 has a lining 202 that is composite, since it is constituted by an outer layer, constituted by a membrane 209 made of vapor-permeable waterproof material with characteristics that are similar to
30 those of the membrane 205, and by an inner layer 210, made

of leather or vapor-permeable fabric.

This third embodiment differs from the second one in the method used to seal the lower perimetric regions.

In this third embodiment, the perimetric region is in fact waterproofed by welding the membrane 209 directly on the tread 203 or on a sealing element 211 that is also formed monolithically with respect to the tread 203.

With particular reference now to figures 5, 6, and 7, a vapor-permeable shoe according to the invention is generally designated by the reference numeral 310 in a fourth embodiment.

The shoe 310 comprises, in this case, a vapor-permeable upper 311 (made for example of natural leather without sealing pigments) associated with a vapor-permeable or perforated lining 312 (for example made of so-called "cambrelle").

The lining 312 is associated with the upper 311 by spot gluing, so as to avoid compromising transpiration through said upper.

The shoe 310 furthermore comprises a tread 313, which is made of elastomer, is perforated at the bottom, and has a raised border 313a, and a mid-sole, generally designated by the reference numeral 314, that comprises a membrane 315 made of waterproof and vapor-permeable material, such as those commercially available and commonly defined by the trade-name GORE-TEX, associated with a protective layer 316, which is directed towards the tread 313, is made of hydrolysis-resistant, water-repellent, vapor-permeable or perforated material, and is thinner in the perimetric regions to move the membrane 315 gradually closer to the

tread 313.

The mid-sole 314 is surrounded by the border 313a of the tread 313.

The shoe 310 furthermore comprises: an insole 317 made
5 of vapor-permeable material (for example natural leather) or perforated material, with an optional heel seat made of soft leather with absorbing latex rubber, and a filler layer 318 made of vapor-permeable felt arranged on the tread 313 with the membrane 315.

10 A vapor-permeable or perforated tip 319 is furthermore applied to the shoe 310, in this fourth embodiment, and is associated with the upper 311 by spot gluing so as to ensure its transpiration.

Likewise, a vapor-permeable or perforated rear counter
15 320 is associated with the upper 311 by spot gluing.

The upper 311, in this case, is associated with the insole 317 by applying a layer of glue along a perimetric band.

Limiting the gluing layer to a perimetric band allows
20 to keep transpiration intact for much of the surface of the foot sole.

In the shoe 310, the central part of the insole is in fact entirely free of any element that is impermeable to water vapor (non-vapor-permeable).

25 The membrane 315 and the protective layer 316 are coupled one another by spot gluing, by using a commercially available hydrolysis-resistant glue (of the type commonly known as "hot merc" or systems with calendered powders).

As regards the protective layer 316, it can be
30 conveniently made of water-repellent material capable of

drying quickly, such as for example non-woven fabric or needle-loomed felt.

Furthermore, said protective layer 316 is directed downwards, i.e., towards the tread 313, since it must
5 protect the membrane 315 against external impacts or against foreign objects that might penetrate through the holes formed in said tread 313.

According to the invention, the membrane 315 is joined to the tread 313 by means of a commercially available
10 hydrolysis-resistant adhesive along a perimetric band 315a, where the protective layer 316 is thinner and therefore the adhesive can penetrate so as to pass through it, forming a sandwich-like unit.

The membrane 315 must furthermore be fixed to the tread
15 313 so as to ensure tightness against external water along its entire perimeter, and this can occur by gluing, using hydrolysis-resistant glues or with high-frequency welds or also by overlap injection-molding, on the tread 313, of compatible material that allows perfect adhesion.

20 The shoe according to the invention, as shown by the description of this fourth embodiment, is generally vapor-permeable, any non-vapor-permeable regions having been limited substantially to the perimetric regions of the sole, which must in any case ensure tightness against water and
25 external moisture.

Transpiration can be increased further, through the sole as a whole, if the insole 317 is applied to the upper 311 with stitches, thus allowing the entire surface of the insole 317 to be vapor-permeable since it is not affected by
30 glue.

With particular reference to figure 8, a shoe according to the invention is generally designated by the reference numeral 400 in a fifth embodiment.

The shoe 400 comprises an upper 401 that is associated
5 with an internal lining 402 that is generally vapor-permeable or perforated.

The shoe 400, like the shoe 310, comprises a tread 403, made of perforated elastomer with a raised border 403a, and a mid-sole that is generally designated by the reference
10 numeral 404 and comprises a membrane 405, made of waterproof and vapor-permeable material, that is associated with a lower protective layer 406 made of hydrolysis-resistant, water-repellent, vapor-permeable or perforated material, the border 406a whereof is internal and spaced from the border
15 405a of the membrane 405, which preferably surrounds the perforated regions of the tread 403.

The shoe 400 furthermore comprises a vapor-permeable or perforated insole 407 and a vapor-permeable or perforated filler layer 408 that is arranged between said insole 407
20 and the membrane 405.

The shoe 400 differs, with respect to the shoe 310, in that the membrane 405 is perimetrically glued directly to the tread 403, this part being free from the protective layer 406.

25 With particular reference to figure 9, a shoe according to the invention is generally designated by the reference numeral 500 in a sixth embodiment.

The shoe 500 can be produced with the following method: an insole 517, made of vapor-permeable material (for example
30 natural leather) or perforated, is applied to an upper 511

that is also vapor-permeable (for example made of natural leather without sealing pigments) and is associated with a vapor-permeable or perforated lining 512.

Then, after inserting the upper 511 in the last 502 of
5 a mold 520, a vapor-permeable filler layer 518 is first applied in a downward region, followed by a membrane 515 made of waterproof and vapor-permeable material, of the type commercially available under the trade-name GORE-TEX.

The membrane 515 and the protective layer 518 arranged
10 above it are mutually assembled by perimetric gluing or by spot gluing, so as to avoid compromising the vapor-permeability of the shoe 500.

A protective layer 516 of hydrolysis-resistant, water-repellent, vapor-permeable or perforated material is
15 associated below the membrane 515 and is smaller than the membrane 515 or perimetrically thinner.

The vapor-permeable element composed of the filler layer 518, the membrane 515, and the protective layer 516 is applied perimetrically or by spots below the insole 517 or
20 is coupled or deposited above the hollow part of the mold 520 at the perforated part of the sole, above metallic pins 521 that will form holes 522.

The mold 520 is then closed over the upper 511, so that the contact between the insole 517, the vapor-permeable
25 element formed by the filler layer 518, the membrane 515, and the protective layer 516 and said mold 520 prevents infiltration of the material above the metallic pins 521, obstructing the holes 522.

The material of the tread 503 is injected; by adhering
30 to the membrane 515 around its perimeter, said material

seals said tread 503 against water infiltration.

Said seal can be further ensured by adhesives adapted for the automatic sealing of the two surfaces.

The described method can also be used to form the sole
5 on its own, without direct application to the upper.

With particular reference to figures 10 and 11, a vapor-permeable shoe according to the invention is generally designated by the reference numeral 600 in a seventh embodiment.

10 Said shoe 600 comprises a vapor-permeable upper 611 (made of natural leather without sealing pigments), which is associated with a vapor-permeable or perforated lining 612 by spot gluing, and an insole 617, which is also made of vapor-permeable material (for example natural leather) or is
15 perforated.

The shoe 600, in this case, is obtained by following a method that entails the insertion of an insert 610 made of synthetic material in a mold 620.

Said insert 610 is preformed by means of a
20 substantially lower first perforated tread element 613, above which a protective layer 616, a membrane 615, and then a perforated filler layer 618, which acts as upper seal, are associated.

Said components have the same vapor-permeable
25 characteristics described in the above embodiments, since they in fact ensure the flow of transpiration from the inside of the shoe outwards.

Thus, the membrane 615 is made of waterproof and vapor-permeable material, such as GORE-TEX, and the protective
30 layer 616 is made of hydrolysis-resistant, water-repellent,

vapor-permeable or perforated material.

Once said insert 610, which is present throughout the thickness of the sole, has been inserted in the mold 620, said mold is closed and the second substantially perimetric
5 tread element 603 is molded or injection-molded, so as to constitute an element that is monolithic with the insert 610 and with the upper 611.

With particular reference to figure 12, a vapor-permeable shoe according to the invention is generally
10 designated by the reference numeral 700 in an eighth embodiment.

The shoe 700 comprises an upper 711 that is associated with an internal lining 712, that is vapor-permeable or perforated as a whole and is provided with an insole 717
15 that is also made of vapor-permeable or perforated material and is assembled by spot gluing or along a perimetric band.

The shoe 700 is obtained by using a mold of the "two-color" type 720, according to a method for the injection-molding of a first substantially lower tread element 702
20 provided with holes 703.

Said first tread element 702 can conveniently also be molded separately and then inserted in the mold 720.

A protective layer 716 of the type used in the previous embodiments is arranged in an upward position at the region
25 affected by the holes 703 and is directed downwards; a membrane 715, made of waterproof and vapor-permeable material, is placed above said layer.

A filler layer 718 is arranged above said membrane 715 and is vapor-permeable, as in this case, or perforated; said
30 layer is smaller than the membrane 715, so as to leave a

perimetric surface 719 of said membrane exposed.

Said surface 719 can be coated with glue to improve the seal of the shoe 700 against any water infiltrations.

The mold 720 is then closed so that the insole 717
5 sufficiently compresses the vapor-permeable mid-sole, which is composed of the combination of the filler layer 718, of the membrane 715, and of the protective layer 716, so as to avoid relative movements among the various components of the shoe.

10 By injecting the second tread 704, the seal is formed on the perimetric surface 719 and the structure becomes monolithic.

There is also a final embodiment of a vapor-permeable shoe that uses a "single-color" mold for the injection-
15 molding of an entire tread monolithically.

This last vapor-permeable shoe configuration comprises an upper having an internal lining and an insole that are conveniently vapor-permeable or perforated.

A filler layer, a membrane, and a protective layer are
20 placed on the lower face of the insole; said protective layer is directed downwards.

Said filler layer is also smaller than the membrane, so as to leave a perimetric surface of said membrane exposed.

The shoe is completed by injecting the material of the
25 tread, on the lower face whereof holes are formed by means of metal pins.

In practice it has been observed that the present invention has achieved the intended aim and objects; in particular, it should be noted that the shoe according to
30 the invention perfectly complies with the requirement of

having an optimum exchange of heat and water vapor between the internal microclimate and the external climate, while nonetheless maintaining full waterproofing and moisture-proofing.

- 5 It should be noted that all this has been achieved while maintaining a shoe structure that is highly flexible and adaptable to any styling type and to any aesthetic and economical level required by the market.

10 It should also be noted that the shoe according to the invention can be mass-produced easily, since the operations can be fully automated.

15 Another remark should be made as to the fact that the shoe according to the invention allows a certain flexibility in terms of the association of its components, leading to considerable production savings in relation to flexibility and adaptability to various production conditions and situations.

20 The present invention is susceptible of numerous modifications and variations, all of which are within the scope of the inventive concept; all the details may furthermore be replaced with other technically equivalent elements.

The material and the dimensions may be any according to the requirements.

In the claims which follow and in the preceding description of the invention, except where the context requires otherwise due to express language or necessary implication, the words "comprises" and "comprising" are used in the sense of "includes" and "including", ie, the features specified may be associated with further features in various embodiments of the invention.



CLAIMS

1. Vapor-permeable shoe comprising the following combination of elements:

-- a vapor-permeable upper that is associated with a
5 vapor-permeable or perforated lining;

-- a tread made of perforated elastomer;

-- a mid-sole comprising at least one membrane made
of waterproof vapor-permeable material that is connected to
a lower protective layer directed towards said tread, said
10 lower protective layer being made of vapor-permeable
material, said lower protective layer being arranged below
said membrane between said membrane and said perforated
elastomer tread and directly above said perforated
elastomer tread, and said lower protective layer extending
15 over said perforations of said perforated elastomer tread
for protecting said membrane against external impacts of
foreign object penetration through the perforations of said
perforated elastomer tread;

-- a vapor-permeable or perforated insole;

-- a vapor-permeable or perforated filler layer
20 arranged between said insole and said membrane;

the lower part of said upper, said tread, and said
mid-sole being perimetrically sealed in perimetric coupling
regions such that non-vapor-permeable regions are arranged
25 so as to be substantially limited to the perimetric coupling
regions of the sole and vapor-permeable regions are
arranged substantially inside the perimetric coupling
regions.

2. Vapour permeable shoe according to claim 1,
30 wherein the material is in the form of a non-woven fabric
or needle-loomed felt or KEVLAR.



3. Vapor-permeable shoe according to claim 1, characterized in that said lining is composite, since it comprises an externally directed layer, constituted by a waterproof and vapor-permeable membrane, and an internally directed layer, made of leather or vapor-permeable fabric, said lining being larger than said upper, the protruding border of said lining being folded upwards and outwards and being glued to the perimetric border of a waterproof and vapor-permeable membrane arranged below said insole and associated therewith, the association of both membranes forming a perimetric pocket for sealing against moisture and water.

4. Vapor-permeable shoe according to claim 1, characterized in that said lining is composite and is welded directly to the tread or to a sealing element that is formed monolithically with said tread.

5. Vapor-permeable shoe according to one or more of the preceding claims, characterized in that it comprises a vapor-permeable or perforated tip that is associated with said upper by spot gluing.

6. Vapor-permeable shoe according to one or more of the preceding claims, characterized in that it comprises a vapor-permeable or perforated rear counter that is associated with said upper by spot gluing.

7. Vapor-permeable shoe according to one or more of the preceding claims, characterized in that said lining and said upper are associated one another by spot gluing.



8. Vapor-permeable shoe according to one or more of the preceding claims, characterized in that said upper and said insole are associated with and sealed to one another by means of adhesive arranged along a perimetric region, so as to allow full transpiration in the central region.

9. Vapor-permeable shoe according to one or more of the preceding claims, characterized in that said membrane and said protective layer are associated by spot gluing with hydrolysis-resistant adhesive or with calendered powders.

10. Vapor-permeable shoe according to one or more of the preceding claims, characterized in that said protective layer is made of non-woven fabric or needle-loomed felt.

11. Vapor-permeable shoe according to one or more of the preceding claims, characterized in that an association between said protective layer and said tread is provided by spot gluing with a hydrolysis-resistant adhesive.

12. Vapor-permeable shoe according to one or more of the preceding claims, characterized in that said tread and said membrane are sealed and associated with one another by gluing with hydrolysis-resistant adhesives or by high-frequency welding or by overlap injection-molding of a material that is compatible with the material of said tread, so as to form a perimetric seal.

13. Vapor-permeable shoe according to one or more of the preceding claims, characterized in that said upper and said insole are associated by means of stitches.



14. Vapor-permeable shoe according to claim 1, characterized in that said lower protective layer is thinner or not present in the perimetric coupling regions where said tread and said membrane are sealed.

15. Vapor-permeable shoe according to claim 14, characterized in that said tread has a raised border that contains said mid-sole.

16. Vapor-permeable shoe according to claim 14, characterized in that said filler layer is made of vapor-permeable felt.

17. Vapor-permeable shoe according to claim 14 characterized in that said upper and said insole are associated with one another by gluing or by means of stitches along a perimetric band.

18. Vapor-permeable shoe according to claim 14 characterized in that said membrane and said protective layer are associated by gluing with hydrolysis-resistant adhesive or by calendered powders.

19. Vapor-permeable shoe according to claim 14, characterized in that said protective layer is made of non-woven fabric or needle-loomed felt.



20. Vapor-permeable shoe according to claim 14, characterized in that the association and seal between said tread and said membrane is provided by gluing with hydrolysis-resistant adhesives or by high-frequency welding or by overlap injection-molding of a material that is compatible with the material of said tread, so as to form a perimetric seal.

21. Shoe according to claim 14 characterized in that said tread comprises two monolithic elements that are formed by successive injection-molding operations, a first element being arranged substantially below said membrane and a second element being perimetric.

22. Vapor-permeable shoe according to claim 1, characterized in that said vapor-permeable or perforated filler layer arranged between said insole and said membrane has perimetric dimensions that are smaller than those of said membrane, said tread and said membrane being sealed in the perimetric coupling regions.

23. Method for manufacturing the shoe of claim 1, comprising:

- providing a vapor-permeable upper and a vapor-permeable or perforated lining, and associating said upper and said lining;
- providing a tread made of perforated elastomer;



-- providing a mid-sole including at least one membrane made of waterproof vapor-permeable material of an impact resistant lower protective layer made of vapor-permeable material, connecting said membrane with said protective layer such that the protective layer is directed towards said tread and such that said lower protective layer is arranged below said membrane between said membrane and said perforated elastomer tread and directly above said perforated elastomer tread, said lower protective layer extending over said perforations of said perforated elastomer tread for protecting said membrane against external impacts or foreign object penetration through the perforations of said perforated elastomer tread;

-- providing a vapor-permeable or perforated insole;
-- providing a vapor-permeable or perforated filler layer and arranging said filler layer between said insole and said membrane; and

-- perimetrically sealing the lower part of said upper, said tread, and said mid-sole in perimetric coupling regions, so as to arrange and substantially limit the non-vapor-permeable regions to the perimetric coupling regions of the sole and so as to arrange the vapor-permeable regions substantially inside the perimetric coupling regions.

24. A method according to claim 23 wherein the material is in the form of a non-woven fabric or needleloomed-felt or KEVLAR.

25. A method according to claim 23 comprising:

-- fitting said upper, with said insole and said lining, on the last of a mold for injection-molding;
-- applying to said insole said filler layer with said membrane and said protective layer;



-- closing the mold and injecting said perforated tread so as to seal the entire assembly with respect to the upper at said perimetric coupling regions.

26. A method according to claim 23 comprising:

- molding an insert with a first perforated tread element, said membrane, said protective layer, and said filler layer made of perforated elastomer;
- inserting said insert in a mold and fitting the upper, with the insole and the lining, on the last;
- molding a second tread element and sealing the entire assembly at said perimetric coupling regions.

27. A method according to claim 23 comprising:

- fitting said upper, together with said insole and said lining, on the last of a mold for injection-molding;
- applying to said inside said filler layer, which has smaller dimensions, together with said membrane, said protective layer, and pre-molded parts of said perforated tread;
- closing the mold and injection-molding said tread so as to seal the entire assembly to the upper.

28. Method for producing a shoe according to claim 25 or 27 characterized in that auxiliary adhesives, adapted to seal the surfaces one another, are provided to contribute to the sealing action.



29. A vapor-permeable shoe substantially as
hereinbefore described with reference to the accompanying
drawings.

30. A method according to any one of claims 23 to 28
5 substantially as hereinbefore described with reference to
the accompanying drawings.

Dated this 7th day of December 1999


10 NOTTINGTON HOLDING B.V.


By their Patent Attorneys



GRIFFITH HACK



8
2
2



8
8
2
2





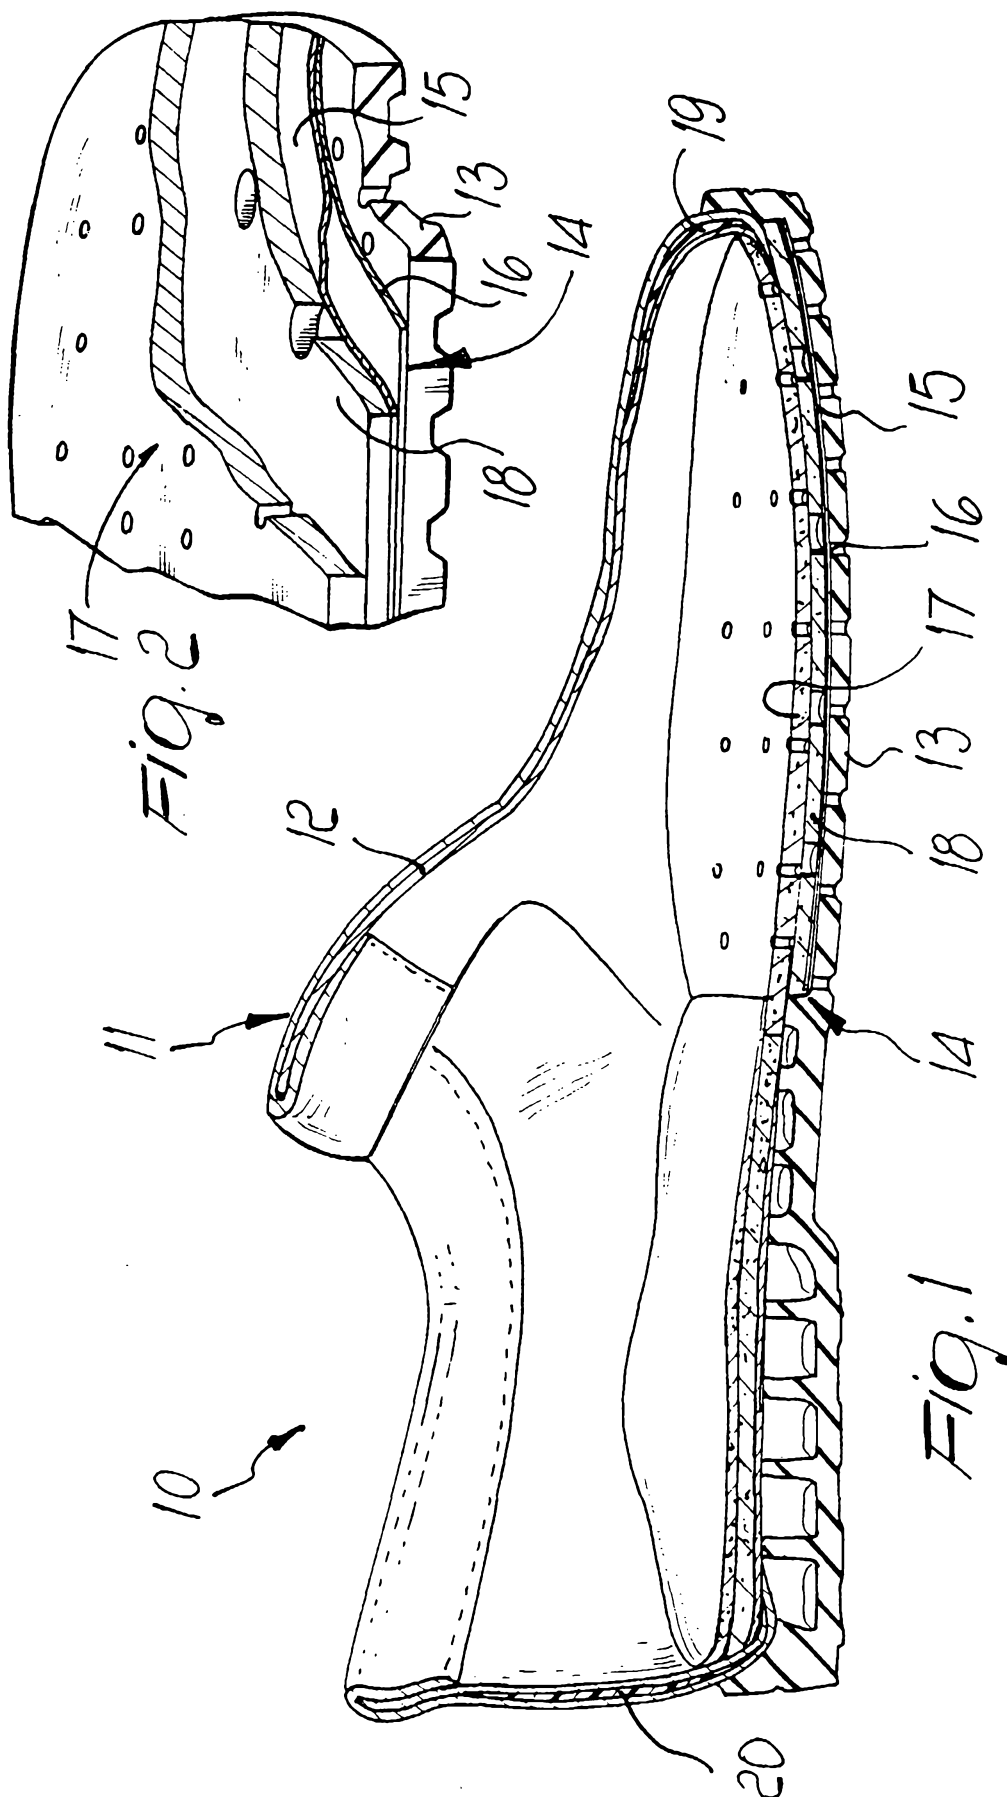

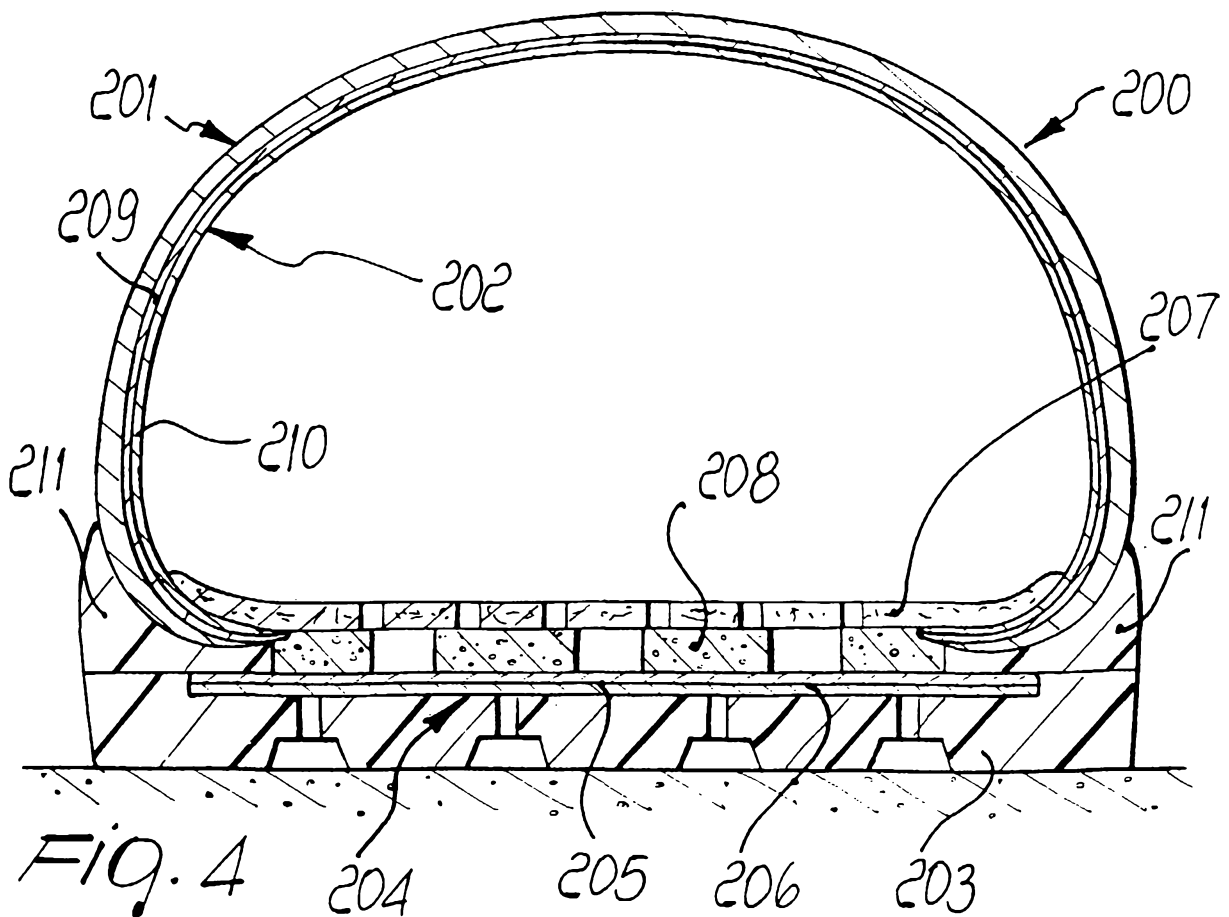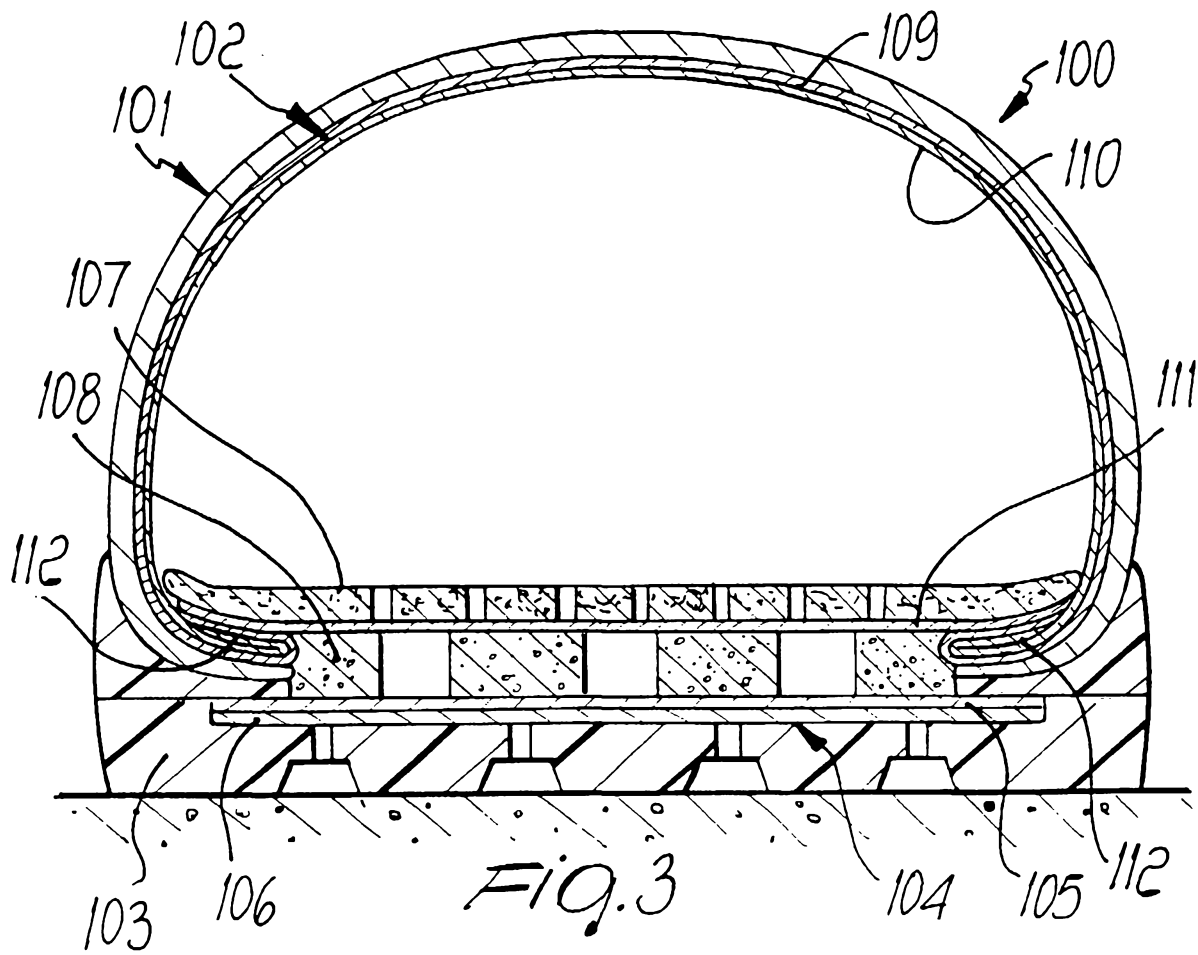

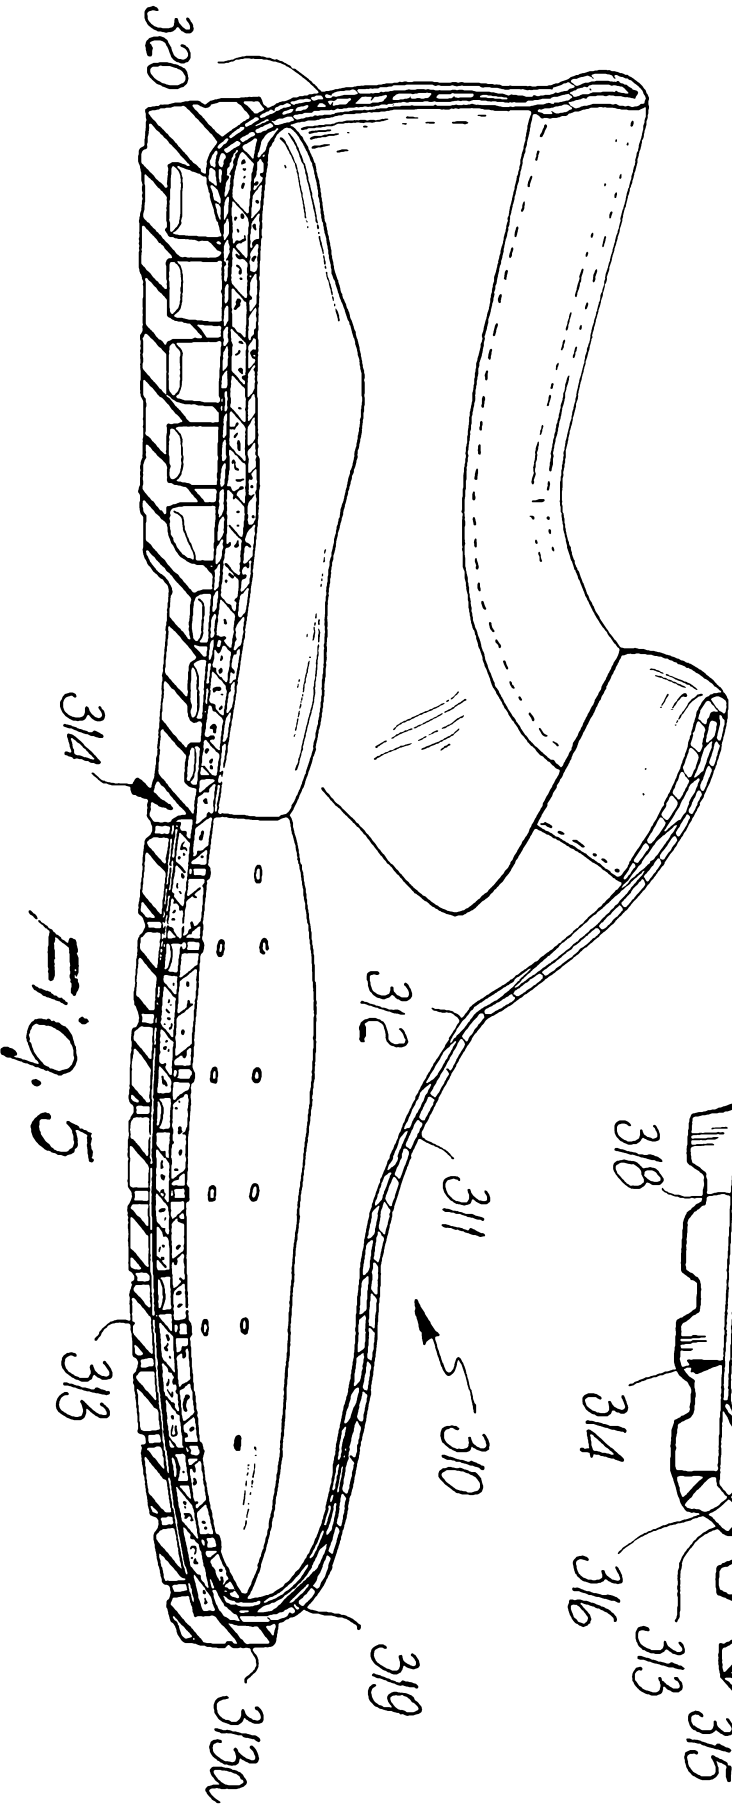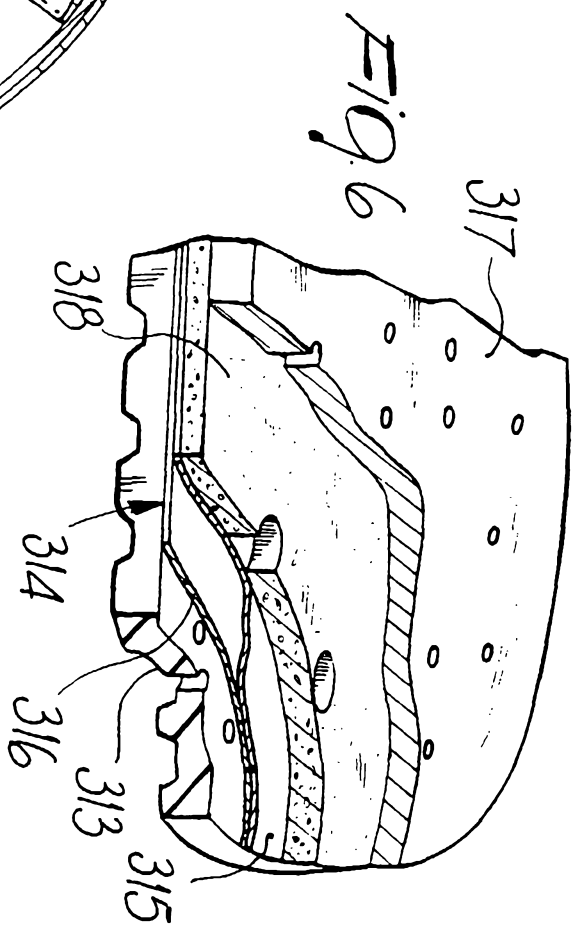

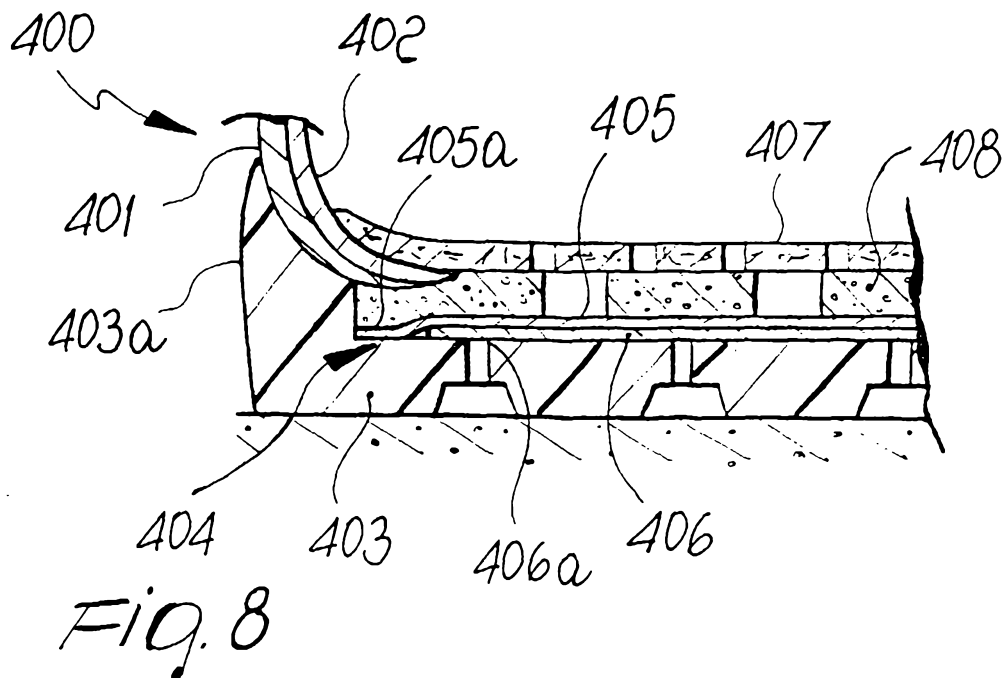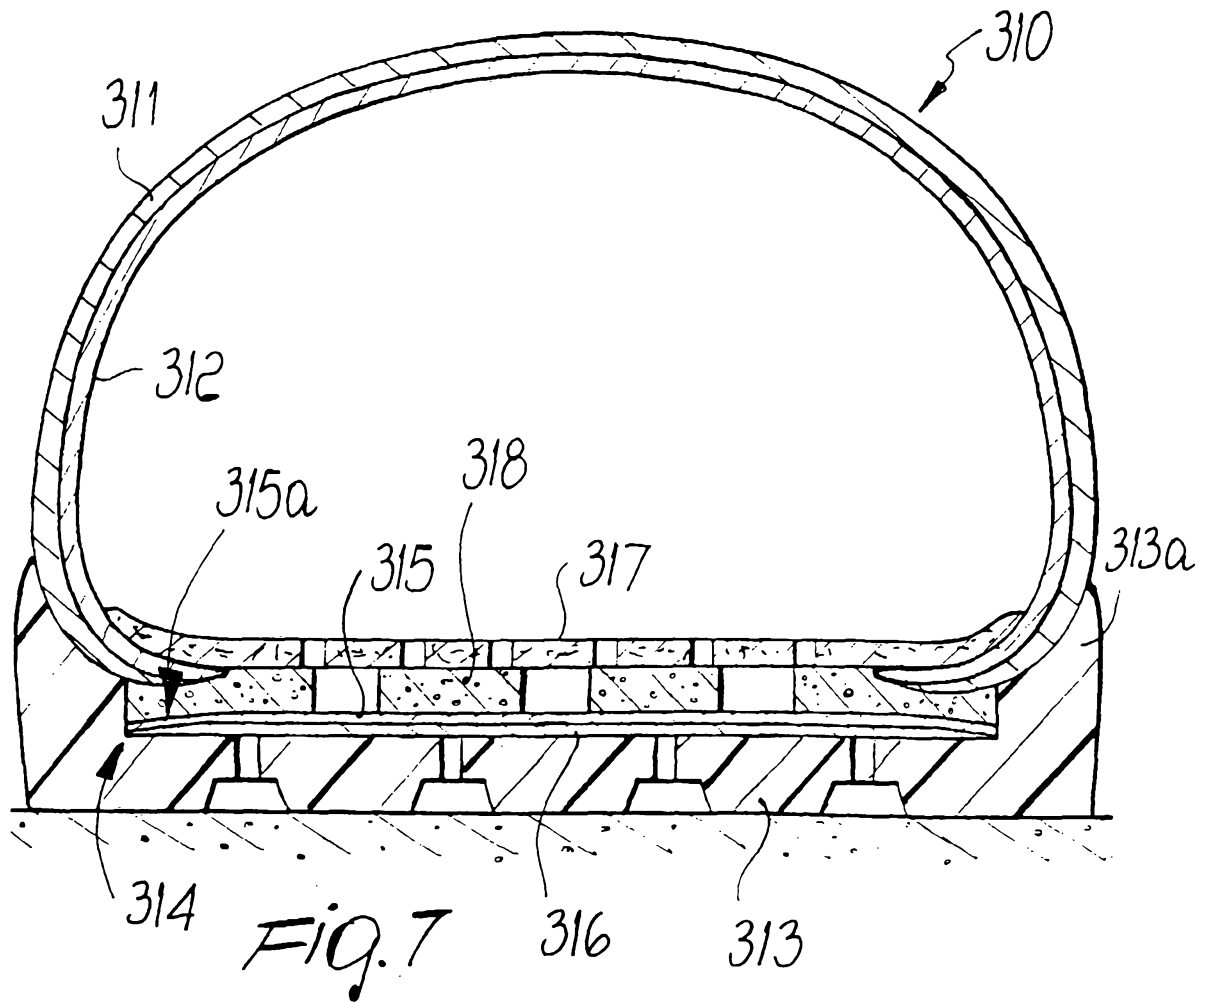

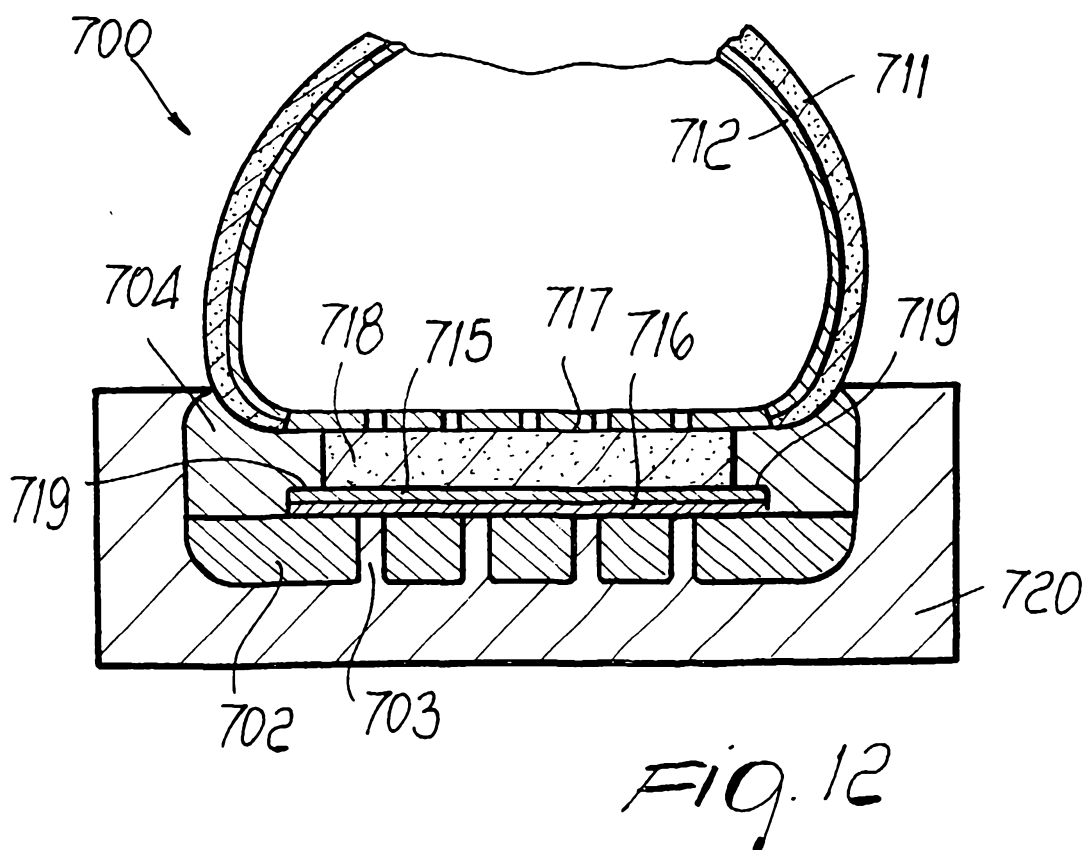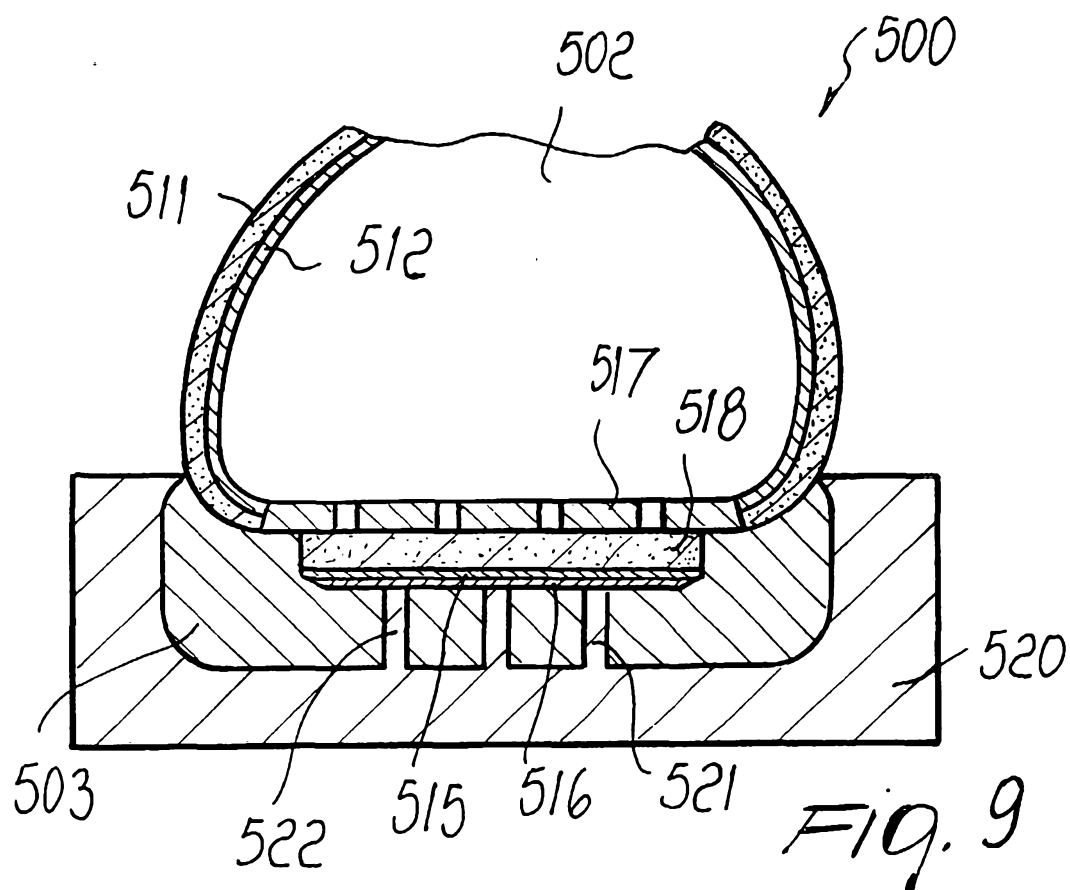

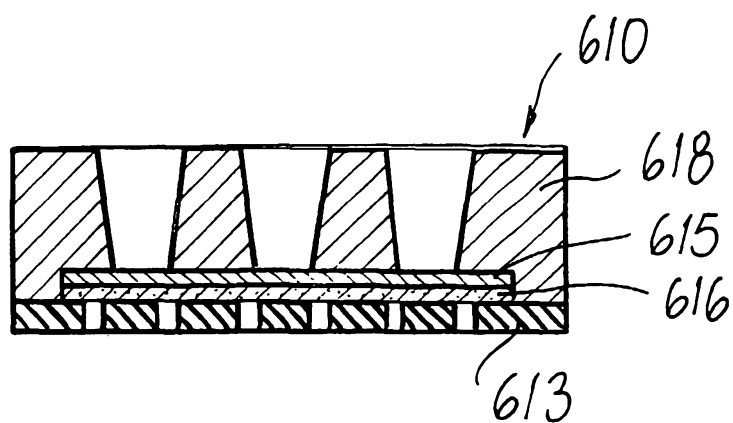


Fig. 10

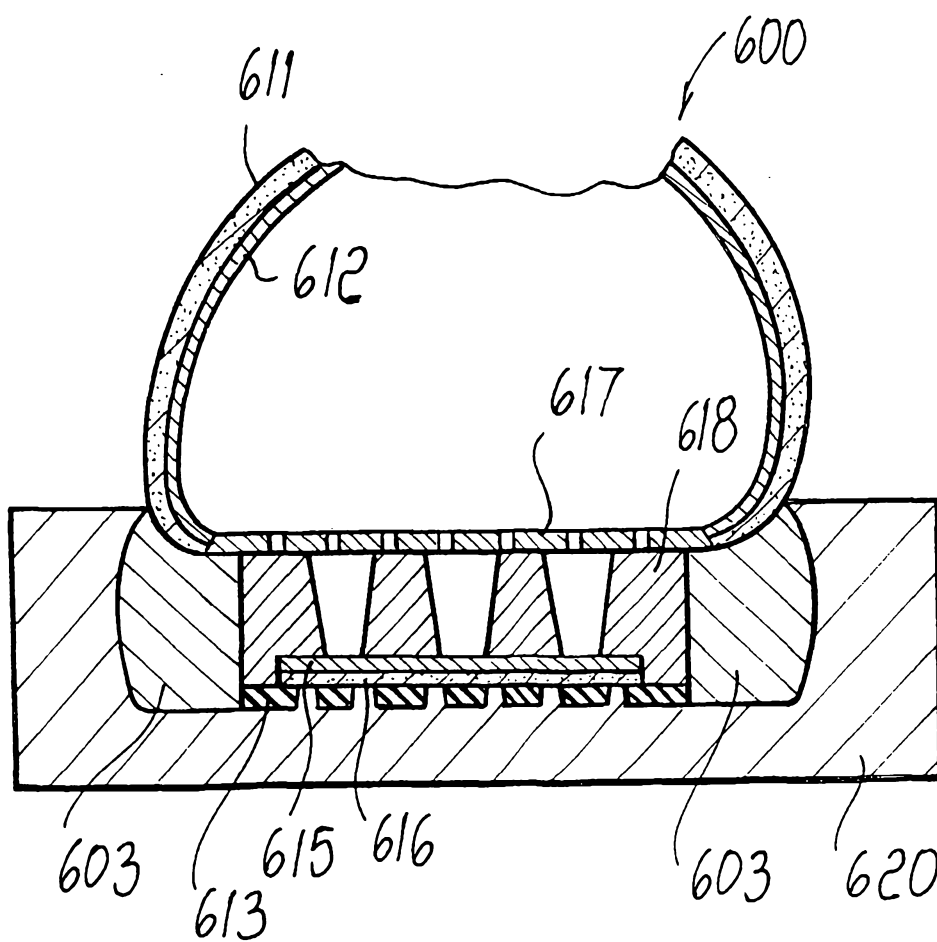


Fig. 11