



US 20140285913A1

(19) **United States**
(12) **Patent Application Publication**
Palmeri

(10) **Pub. No.: US 2014/0285913 A1**
(43) **Pub. Date: Sep. 25, 2014**

(54) **MOVEABLE MIRROR ASSEMBLY FOR ELECTRONIC DEVICE CASE**

(60) Provisional application No. 61/499,073, filed on Jun. 20, 2011, provisional application No. 61/794,629, filed on Mar. 15, 2013.

(71) Applicant: **RHP Multimedia Corp.**, Middletown, NY (US)

Publication Classification

(72) Inventor: **John Palmeri**, Middletown, NY (US)

(51) **Int. Cl.**
G02B 5/08 (2006.01)
H04N 5/238 (2006.01)
H04N 5/225 (2006.01)

(73) Assignee: **RHP Multimedia Corp.**, Middletown, NY (US)

(52) **U.S. Cl.**
CPC **G02B 5/08** (2013.01); **H04N 5/2254** (2013.01); **H04N 5/238** (2013.01)
USPC **359/876**

(21) Appl. No.: **14/218,732**


(22) Filed: **Mar. 18, 2014**


(57) **ABSTRACT**


Related U.S. Application Data

(63) Continuation-in-part of application No. 13/984,204, filed on Aug. 27, 2013, filed as application No. PCT/US12/43184 on Jun. 19, 2012.

A moveable mirror assembly can be used in connection with a case for a portable electronic device. The assembly can include a mirror housing and a mirror positioned within the mirror housing to redirect light to a portable electronic device within the case. The assembly can also include a rotational member coupled with the mirror housing and the case.

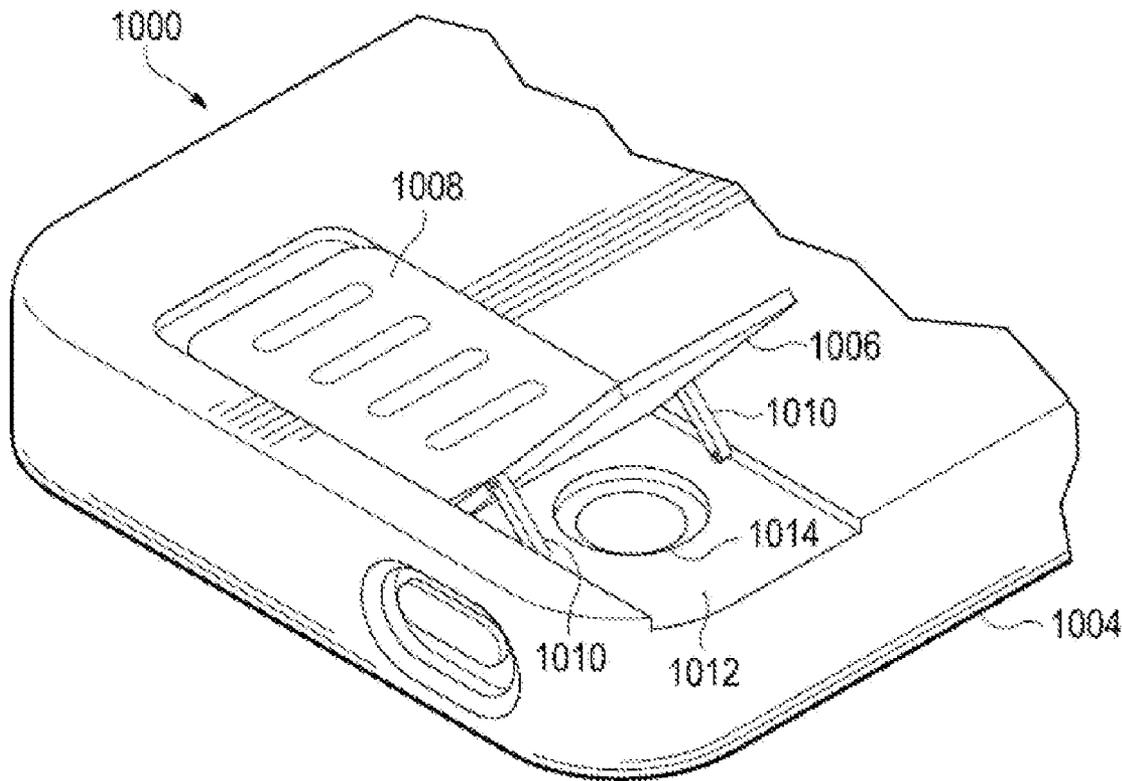

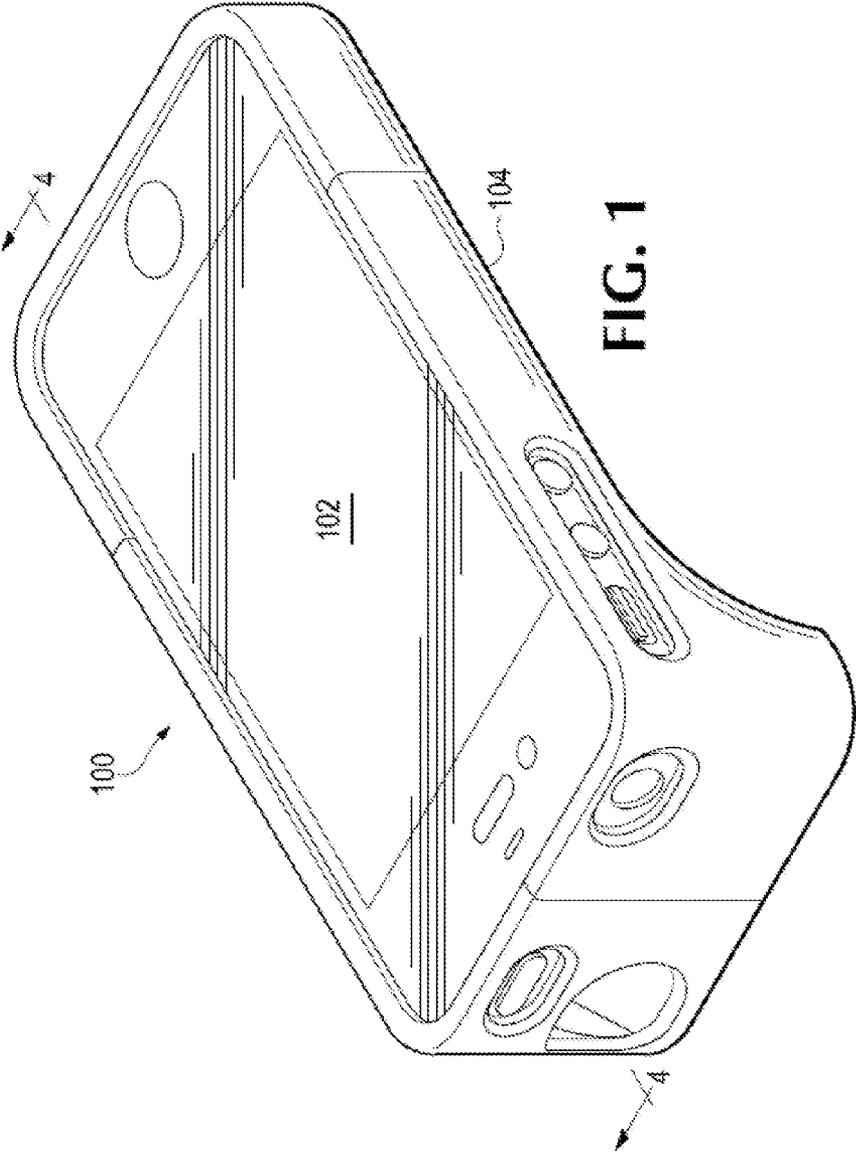

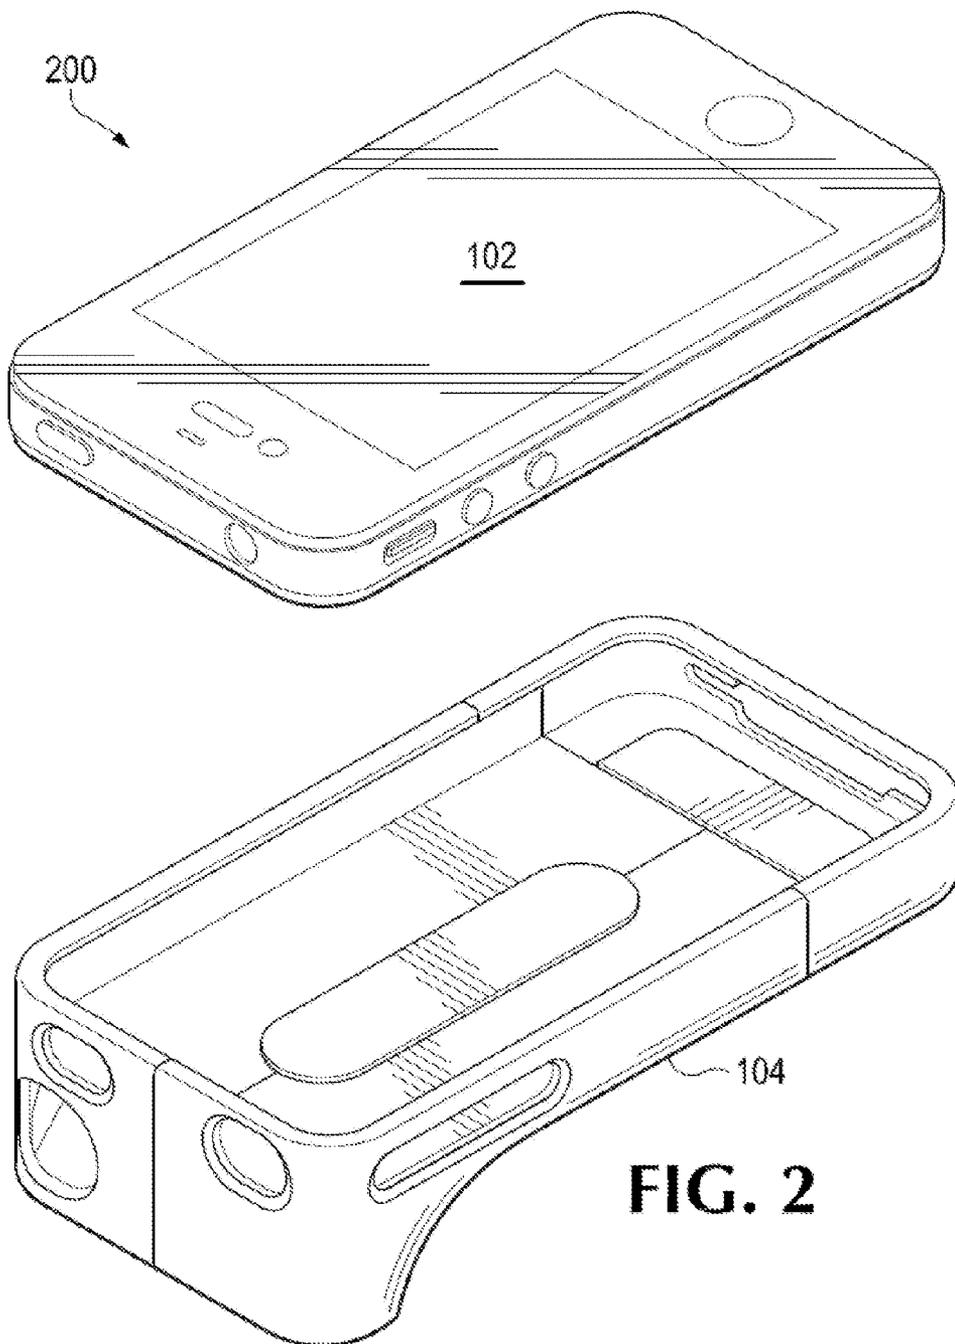

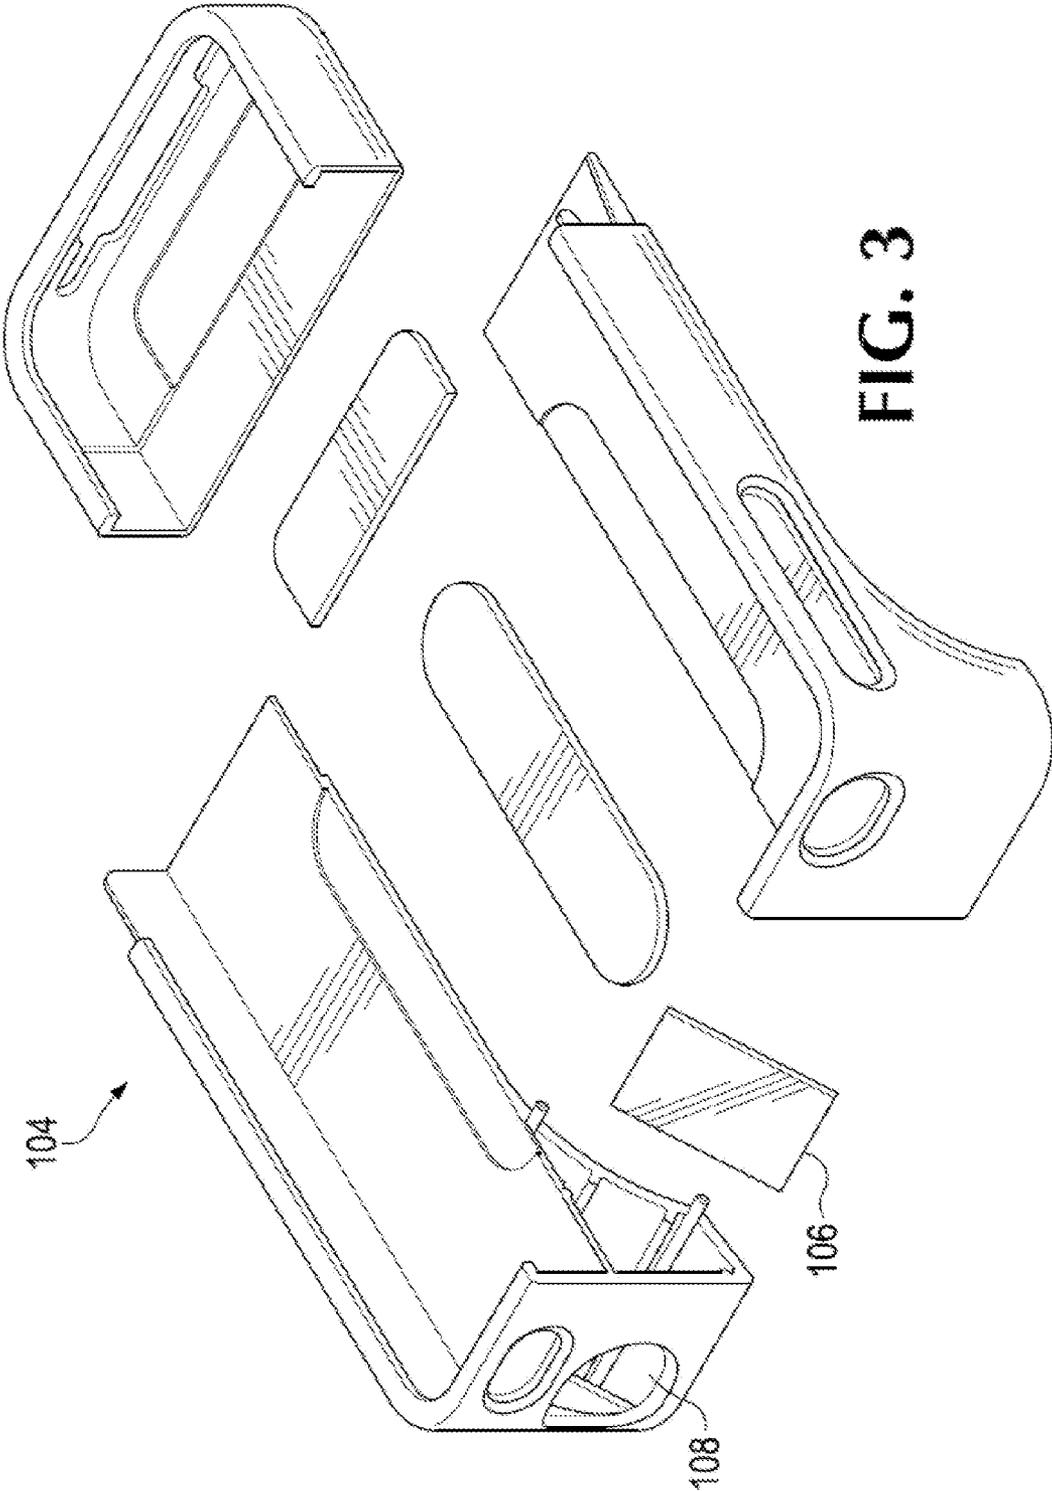


FIG. 3

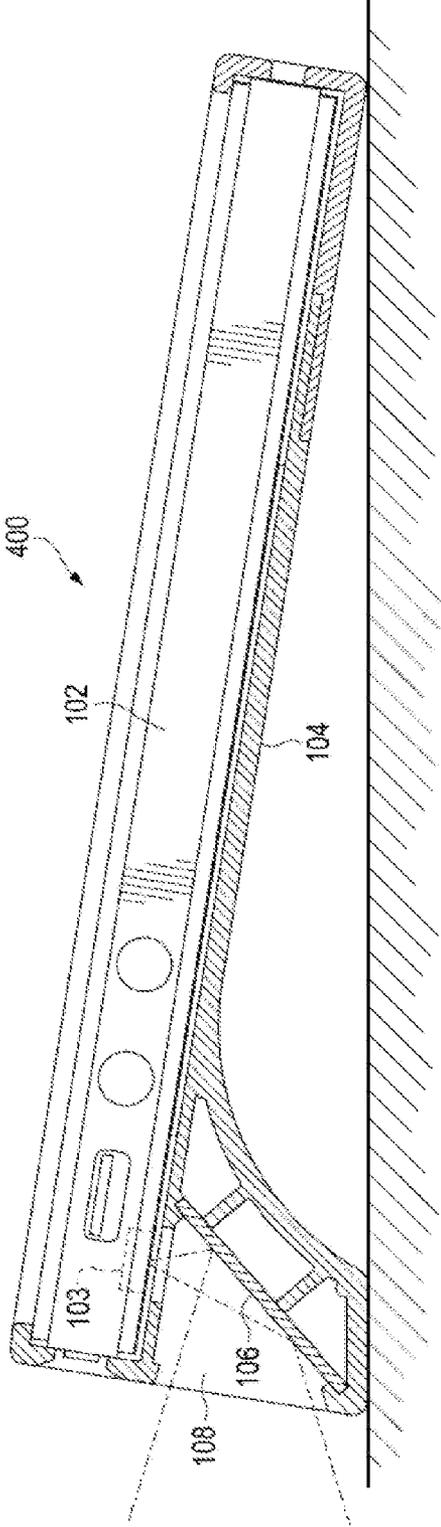


FIG. 4

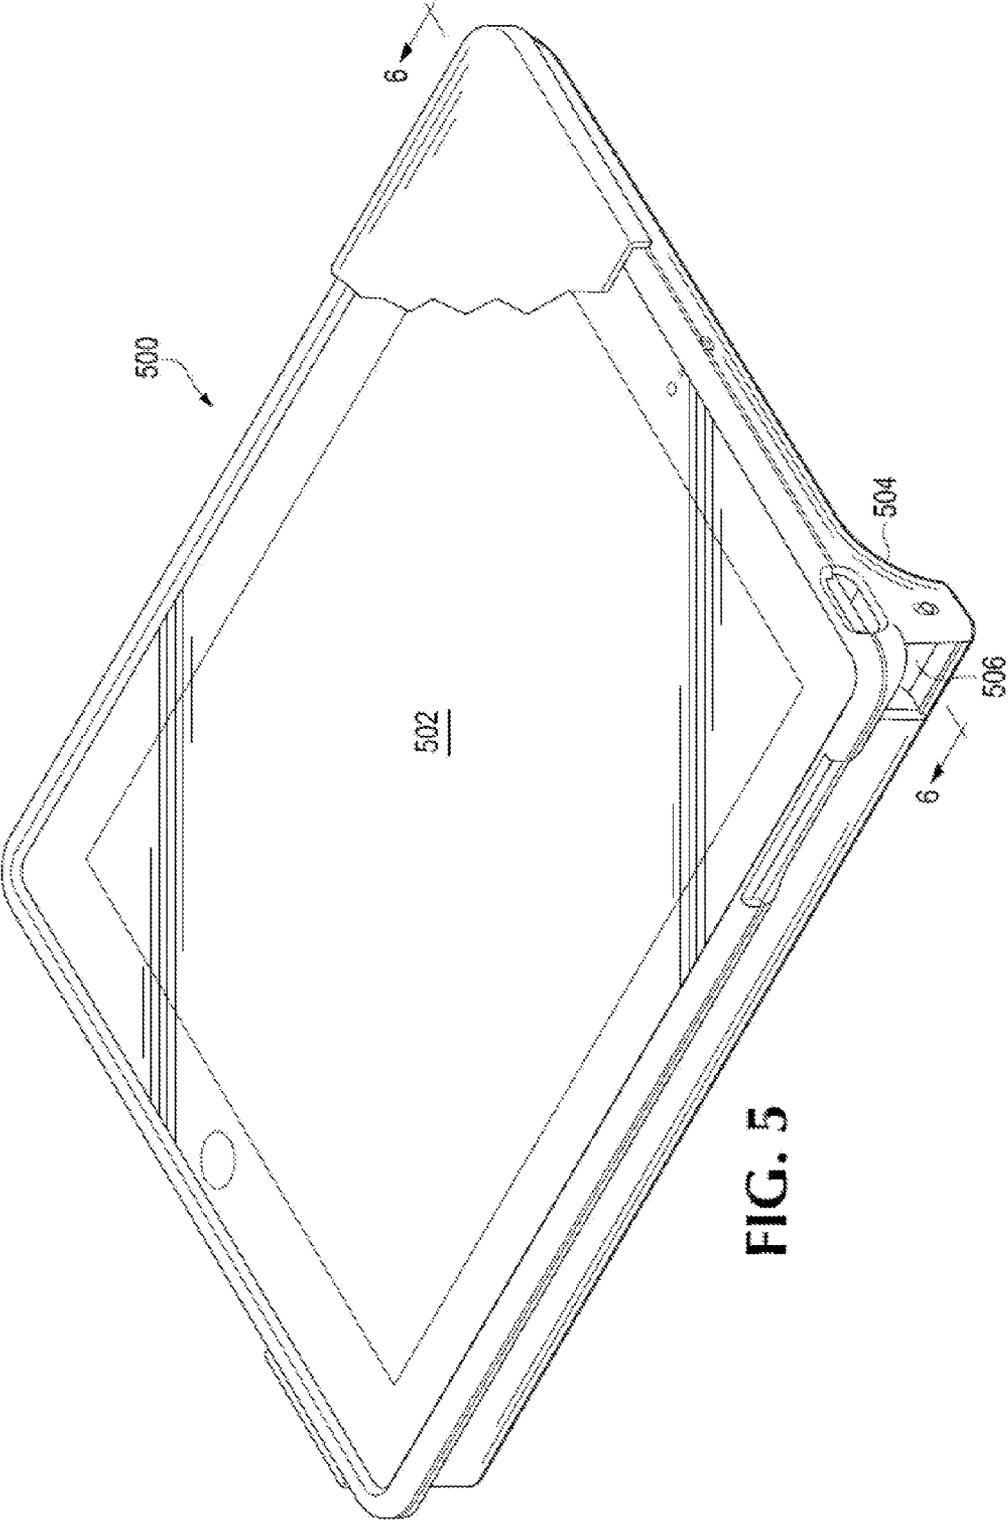


FIG. 5

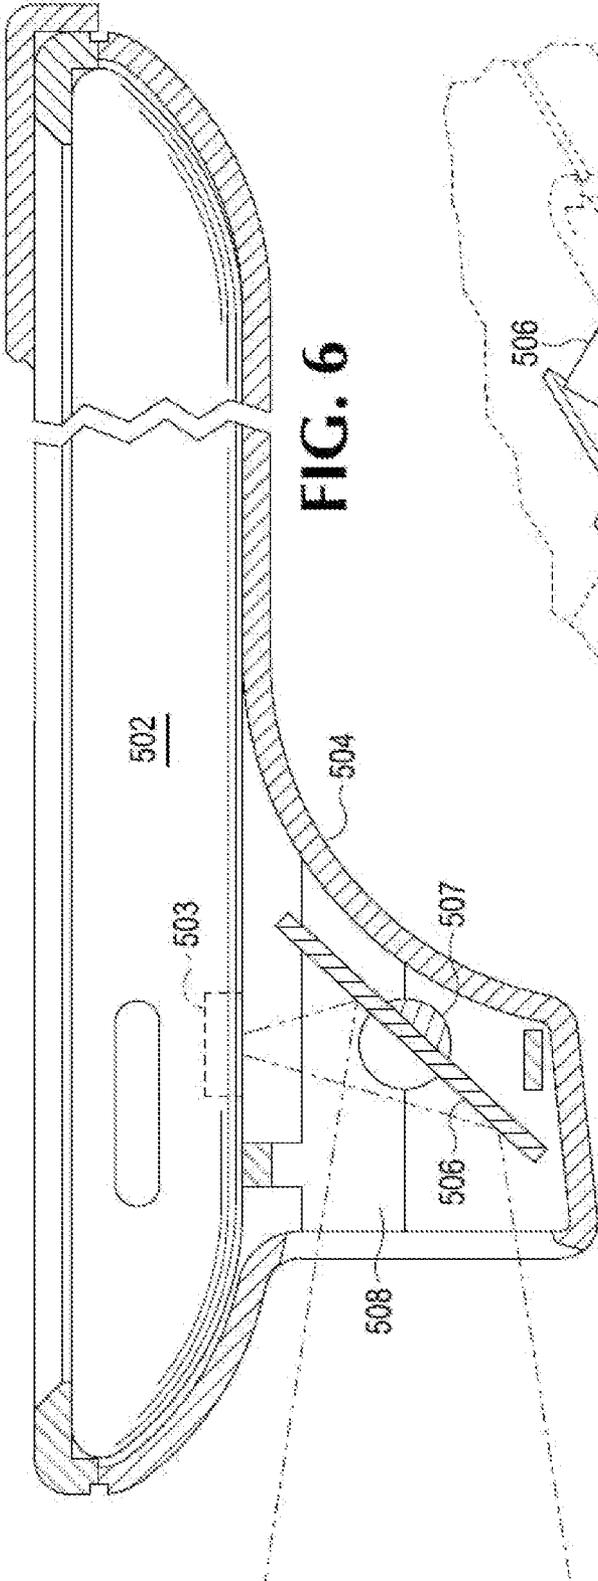


FIG. 6

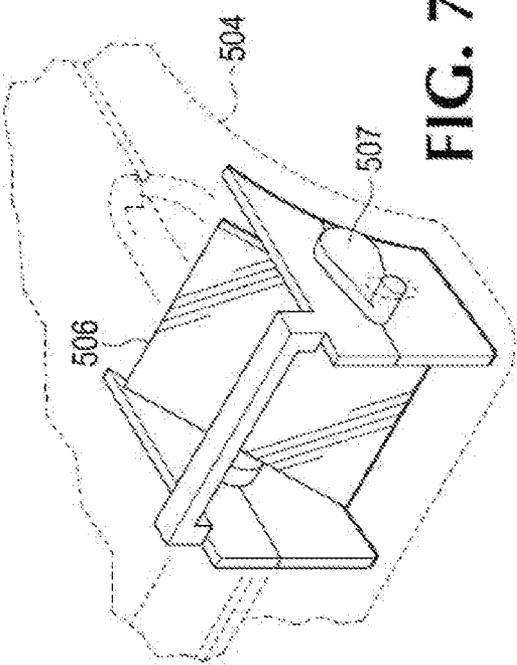
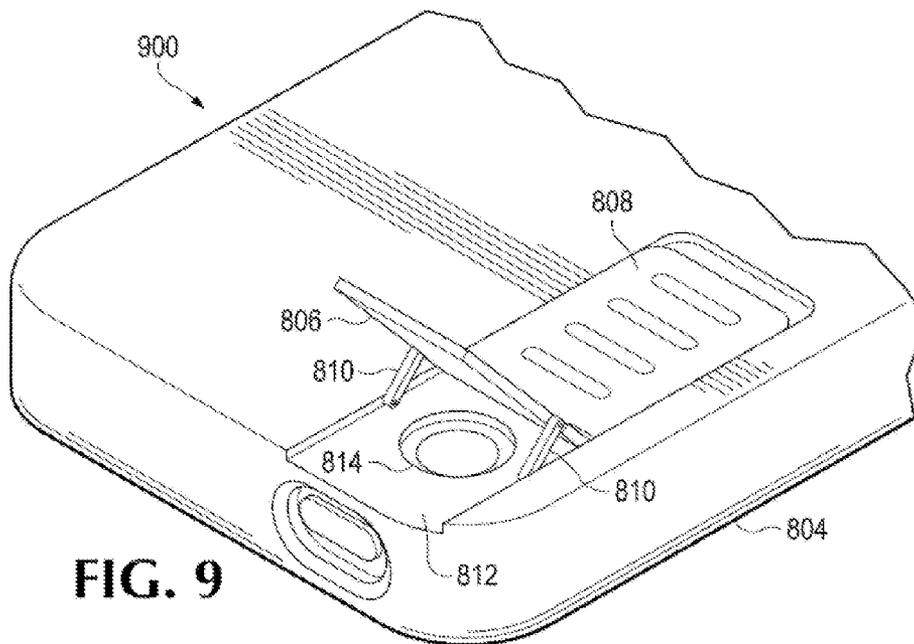
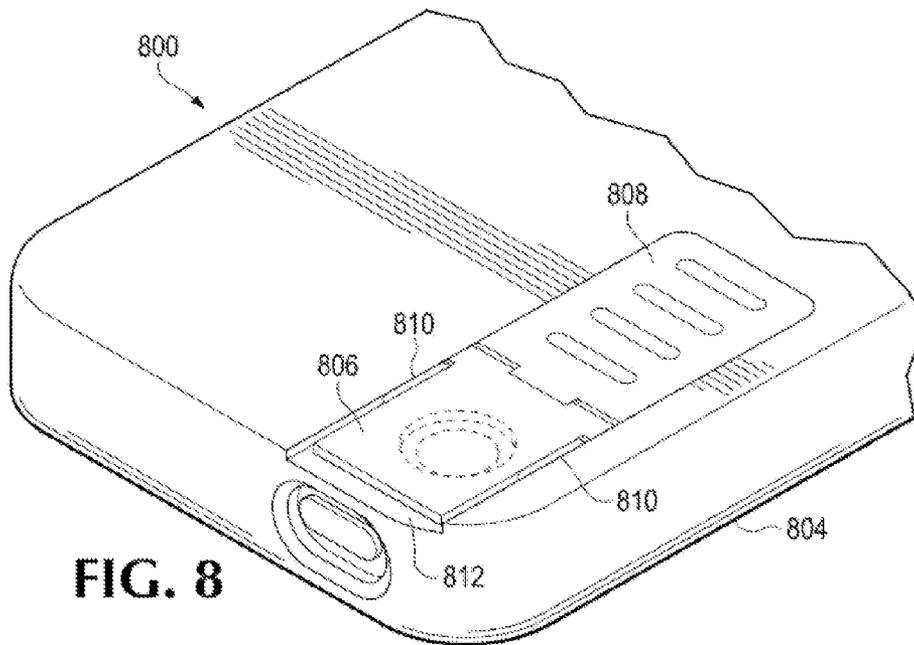


FIG. 7



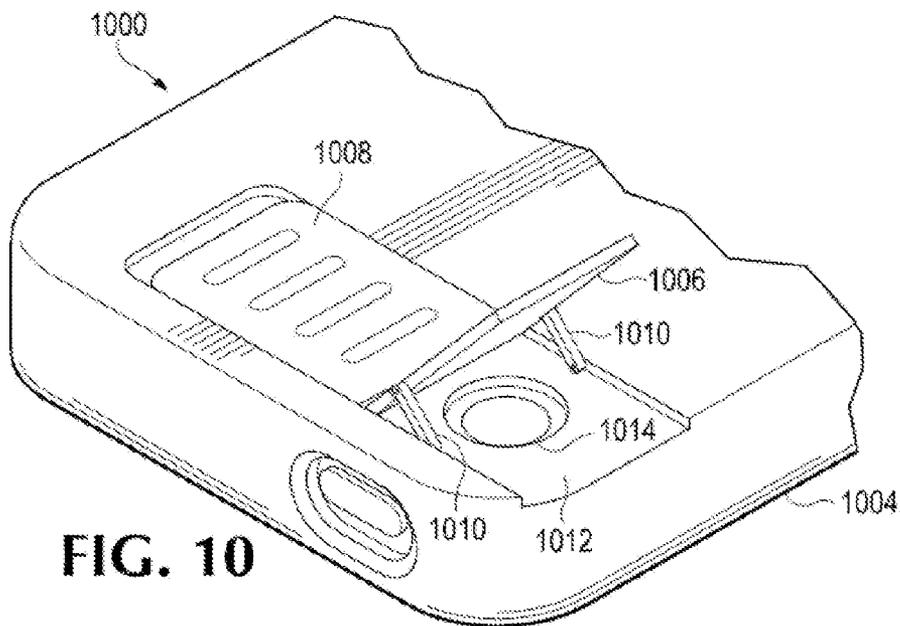


FIG. 10

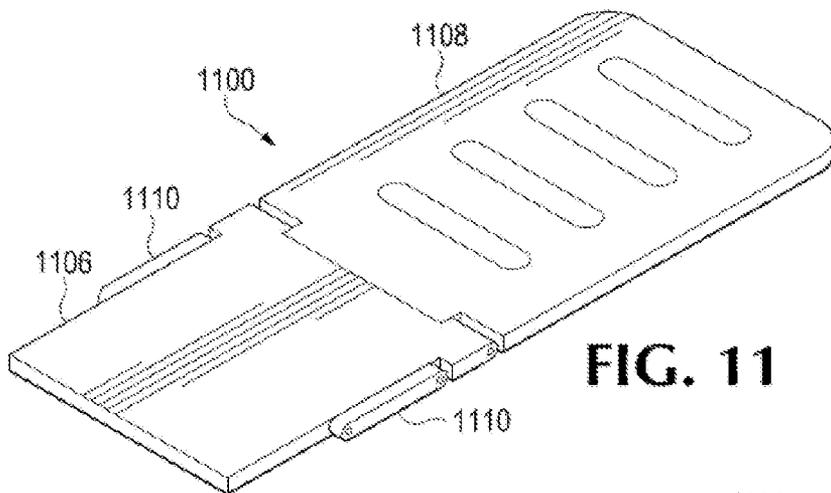


FIG. 11

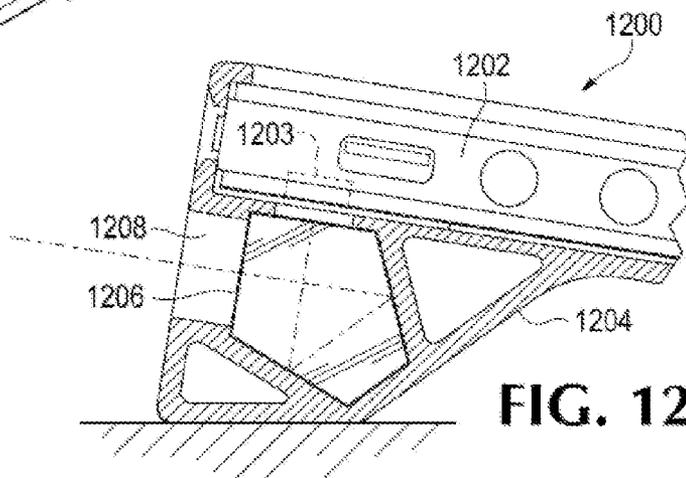


FIG. 12

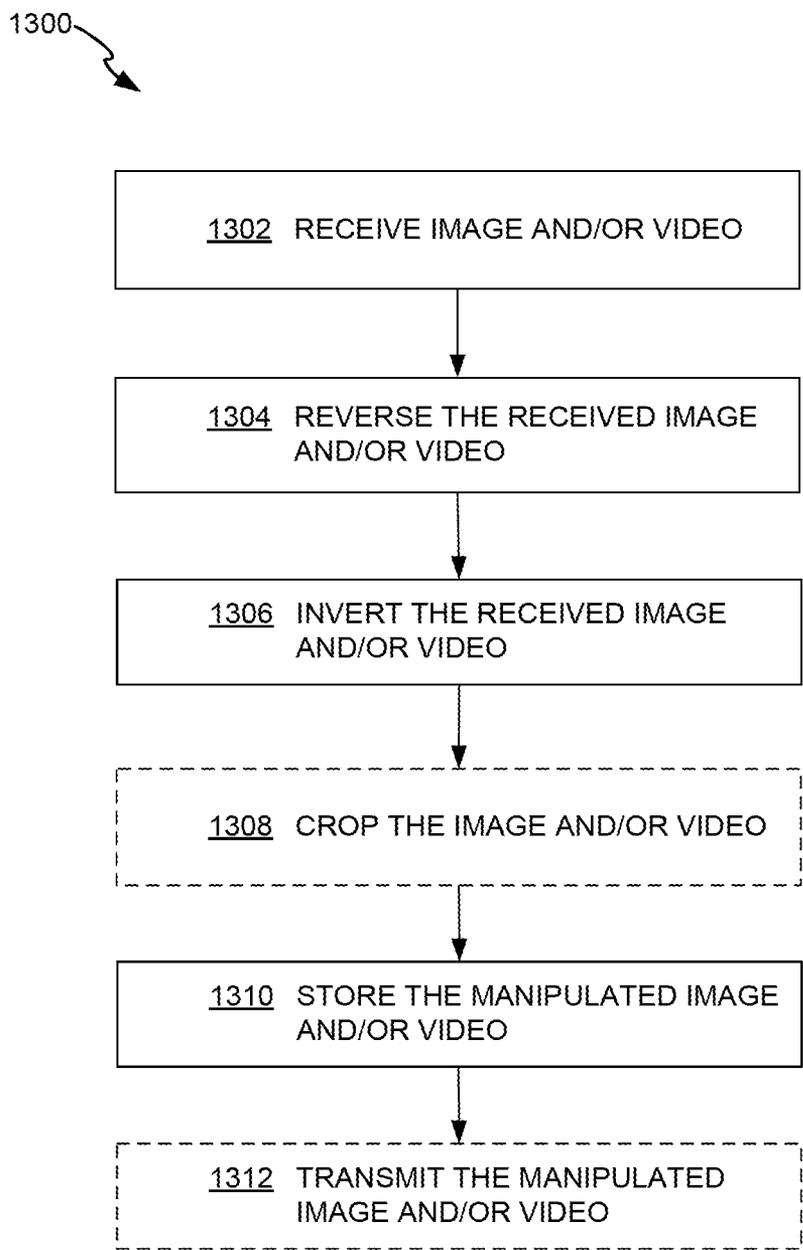


FIG. 13

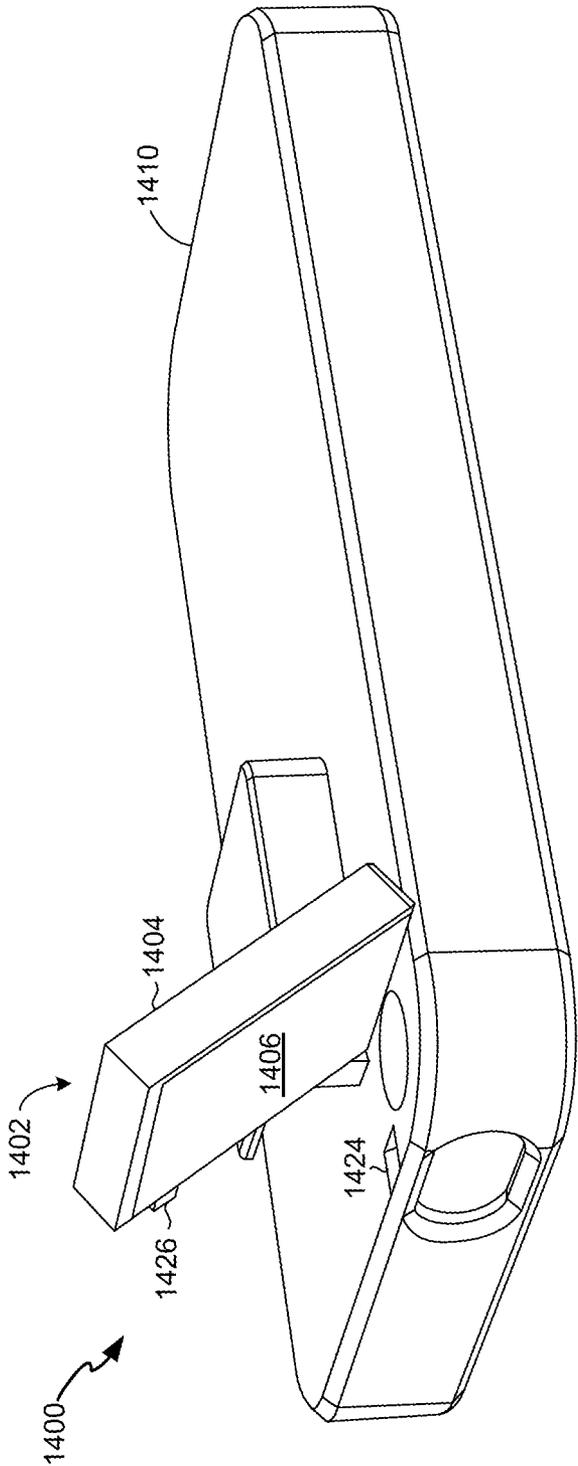


FIG. 14

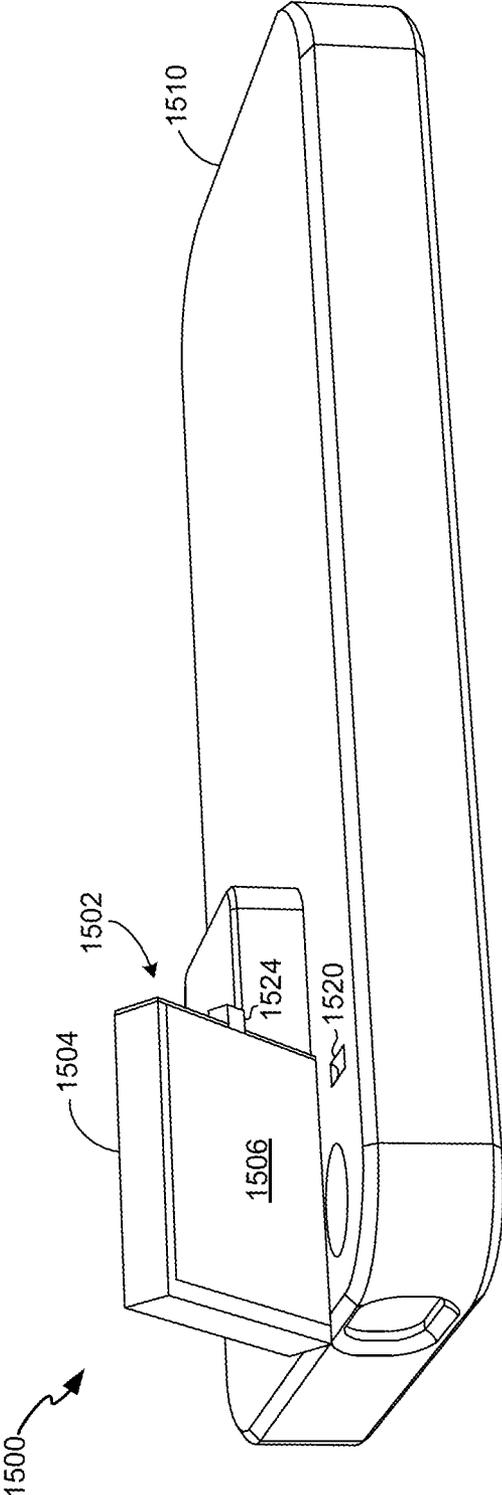


FIG. 15

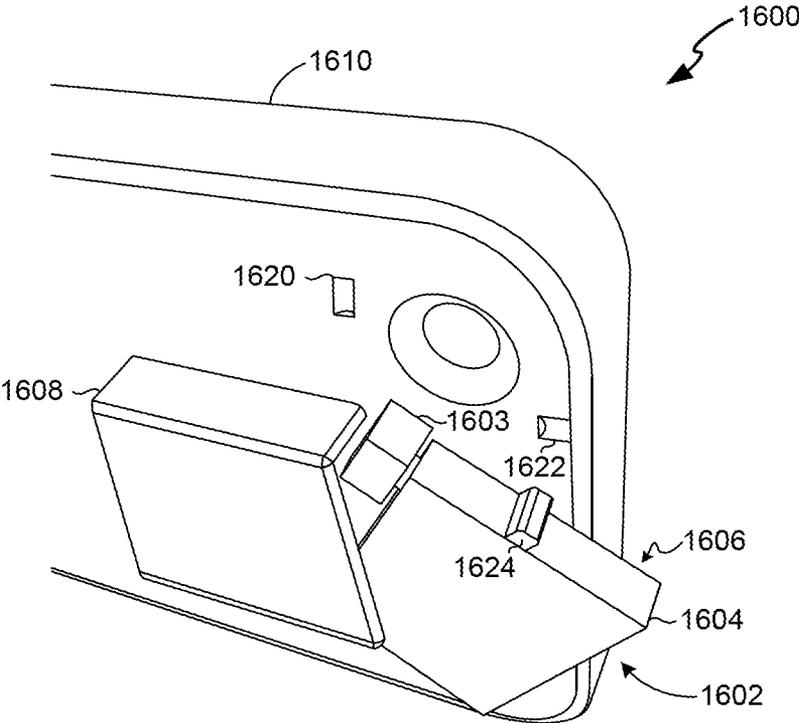


FIG. 16A

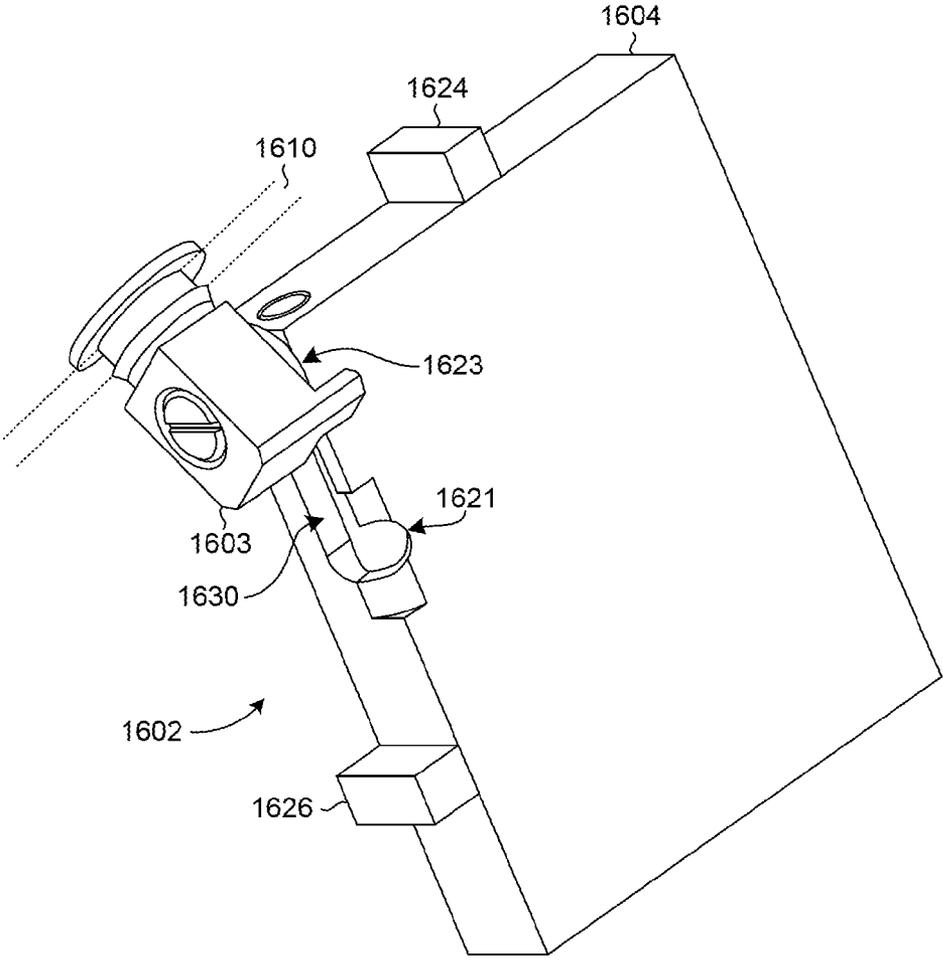


FIG. 16B

MOVEABLE MIRROR ASSEMBLY FOR ELECTRONIC DEVICE CASE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application is a continuation-in-part of U.S. patent application Ser. No. 13/984,204, which is titled "CASE FOR PORTABLE ELECTRONIC DEVICE" and was filed on Aug. 27, 2013, which claims the benefit of U.S. Provisional Patent Application Ser. No. 61/499,073, which is titled "ELECTRONIC DEVICE CASE WITH MIRROR" and was filed on Jun. 20, 2011, the content of which is hereby incorporated by reference herein in its entirety, and International Application No. PCT/US2012/043184, titled "CASE FOR PORTABLE ELECTRONIC DEVICE," filed Jun. 19, 2012, the content of which is hereby incorporated by reference herein in its entirety.

[0002] The present application claims the benefit of U.S. Provisional Patent Application Ser. No. 61/794,629, which is titled "MOVEABLE MIRROR ASSEMBLY FOR ELECTRONIC DEVICE CASE" and was filed on Mar. 15, 2013, the content of which is hereby incorporated by reference herein in its entirety.

TECHNICAL FIELD

[0003] The disclosed technology pertains to cases for portable electronic devices, and more particularly to moveable mirror assemblies suitable for use with cases for portable electronic devices.

BACKGROUND

[0004] To capture images and/or video using a portable electronic device, such as an Apple iPhone® or iPad® or any tablet computer or personal digital assistant (PDA) using an integrated rear-facing camera, a user would typically need to hold the device vertically in front of him or her due to the camera lens being located at the backside of the device and the viewing screen on the opposite side of the device. Such action generally draws attention from onlookers and may alert certain people to the fact that they are having their picture or video taken by the user. This could also be uncomfortable for the person taking the picture and/or video or waiting for a long period to get "the perfect shot" while holding the device in a vertical manner.

[0005] Consider an example in which a user attends a lecture and would like to capture a video and/or audio recording of the lecture using an electronic device so that he or she can later review the recording. Holding the device in front of him or her to do so would be not only awkward and uncomfortable but would also hinder his or her ability to take notes during the lecture.

[0006] Thus, there remains a need for an improved case for portable electronic devices, particularly with regard to capturing images and/or video using such a device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1 illustrates a first arrangement of a first example of a portable electronic device and a case therefor in accordance with embodiments of the disclosed technology.

[0008] FIG. 2 illustrates a second arrangement of the first example of a portable electronic device and case therefor illustrated in FIG. 1.

[0009] FIG. 3 illustrates an exploded view of the portable electronic device case illustrated in FIGS. 1 and 2.

[0010] FIG. 4 illustrates an example of the portable electronic device and case therefor illustrated in FIGS. 1-3 being used to capture images and/or video in accordance with embodiments of the disclosed technology.

[0011] FIG. 5 illustrates a second example of a portable electronic device and a case therefor in accordance with embodiments of the disclosed technology.

[0012] FIG. 6 illustrates an example of the portable electronic device and case therefor illustrated in FIG. 5 being used to capture images and/or video in accordance with embodiments of the disclosed technology.

[0013] FIG. 7 further illustrates the portable electronic device case illustrated in FIGS. 5 and 6.

[0014] FIG. 8 illustrates a first position for a third example of a portable electronic device and a case therefor in accordance with embodiments of the disclosed technology.

[0015] FIG. 9 illustrates a second position for the third example of a portable electronic device and case therefor illustrated in FIG. 8.

[0016] FIG. 10 illustrates a fourth example of a portable electronic device and a case therefor in accordance with embodiments of the disclosed technology.

[0017] FIG. 11 illustrates an example of a more detailed example of a moveable sub-assembly, such as those illustrated in FIGS. 8-10, in accordance with certain embodiments of the disclosed technology.

[0018] FIG. 12 illustrates a fifth example of a portable electronic device and a case therefor in accordance with embodiments of the disclosed technology.

[0019] FIG. 13 is a flowchart illustrating an example of a method of capturing image and/or video using a portable electronic device and case therefor in accordance with embodiments of the disclosed technology.

[0020] FIG. 14 illustrates a first example of a mirror assembly integrated or otherwise coupled with a portable electronic device case in accordance with certain embodiments of the disclosed technology.

[0021] FIG. 15 illustrates a second example of a mirror assembly integrated or otherwise coupled with a portable electronic device case in accordance with certain embodiments of the disclosed technology.

[0022] FIGS. 16A-16B illustrate a third example of a mirror assembly integrated or otherwise coupled with a portable electronic device case in accordance with certain embodiments of the disclosed technology.

DETAILED DESCRIPTION

[0023] Embodiments of the disclosed technology generally include the use of a light-redirecting component or assembly such as a mirror, prism, or other suitable component or assembly to redirect light corresponding to an image or video being captured or recorded by the camera of an electronic device. As used herein, a light-redirecting component generally refers to a particular component, assembly, or sub-assembly configured to receive light, e.g., from an object being photographed and/or videoed, and re-direct the light such that, upon leaving the light-redirecting component, the redirected light is now traveling in a path other than it would have but for the influence of the light-redirecting component.

[0024] Implementations of the disclosed technology generally allow a user of a portable electronic device within a case therefor to hold or place the electronic device and case in

a more vertical, normal usage manner than can be done with current devices. Such action is typically less conspicuous and/or easier for the user than with current portable electronic device cases. Also, the manner in which a user may hold the electronic device in these embodiments or place the device on a flat surface generally allows for easier manipulation of the controls on the front of the device by the user.

[0025] An electronic device case in accordance with embodiments of the disclosed technology may be configured to hold an electronic device, such as the Apple iPhone or iPad, iPad 2, or iPod Touch, or any tablet computer or PDA that has a built-in camera/video recorder at or on the rear of the electronic device, for example. The case may hold the device at an angle from a given plane, such as an artificial plane or physical plane, e.g., the surface of a table or desk, for ease of manipulating the face plate. The angle from the surface may be anywhere from 10 degrees to 35 degrees, for example. In certain embodiments, the camera and/or video recorder component(s) of the device may have a Field Of View (FOV) of approximately 40 degrees vertical and 52 degrees horizontal when held straight up and down. In such embodiments, the device may be rotated substantially 90 degrees left or right and change the image/video capture to a "landscape" format. Other embodiments may provide other FOVs. In some embodiments, a user may be able to perform certain operations with regard to use of the device, e.g., zoom features, which may serve to change or functionally alter a FOV.

[0026] Alternatively or in addition to other embodiments described herein, the electronic device case may be used by a user as a shoulder cradle, e.g., to use the device in a hands-free manner.

[0027] In certain embodiments, a light-redirecting component, e.g., mirror or prism, may be implemented in connection with a case for an electronic device to enable a user to take pictures and/or record videos while holding the electronic device in a more natural position. The light-redirecting component may be a built-in component or assembly and may be manipulated, e.g., moved, repositioned, and/or partially or fully removed, by the user. In alternative embodiments, the light-redirecting component may be removable. For example, such embodiments may include multiple types of minors, each of which may be placed or situated within or in connection with the case.

[0028] FIG. 1 illustrates a first arrangement 100 of a first example of a portable electronic device 102 and a case 104 therefor in accordance with embodiments of the disclosed technology. The portable electronic device 102 may be a personal digital assistant (PDA), smartphone (e.g., an Apple iPhone or Android-based device), or virtually any other type of portable electronic device. In the first arrangement 100, the device 102 is positioned within the case 104. The device 102 may be secured in that it does not readily fall out of the case 104. In the illustrated arrangement 100, the case 104 may provide the device 102 with protection as well as the other features described below.

[0029] FIG. 2 illustrates a second arrangement 200 of the first example of the portable electronic device 102 and case 104 therefor illustrated in FIG. 1. In the second arrangement 200, the device 102 is fully removed from the case 104. Embodiments of the disclosed technology generally provide a user with the ability to both easily remove the device 102 from the case 104 and also position the device 102 within the case 104, as illustrated in FIG. 1, for example.

[0030] FIG. 3 illustrates an exploded view of the portable electronic device case 104 illustrated in FIGS. 1 and 2. While this view shows a particular arrangement of the case 104, it will be appreciated that the case 104 may be constructed in a variety of manners using any of a number of design and manufacturing techniques and materials, such as high-density polyethylene (HDPE), acrylonitrile butadiene styrene (ABS), high-density rubber or metal, or any combination thereof.

[0031] In the illustrated example, a light-redirecting component 106, such as a mirror, is integrated with, e.g., within, the case 104. An opening 108 within the case 104 allows for light to easily pass therethrough and onto the light-redirecting component 106 when the case 104 is assembled and the device 102 is positioned therein, as in FIGS. 1 and 2, for example.

[0032] FIG. 4 illustrates an example 400 of the portable electronic device 102 and case 104 therefor illustrated in FIGS. 1-3 being used to capture images and/or video in accordance with embodiments of the disclosed technology. In the example 400, the case 104 has a light-redirecting component 106 and an opening 108 as illustrated in FIG. 3. The opening 108 in the case 104 allows for incoming light to pass therethrough and onto the light-redirecting component 106 such that the light may be redirected, e.g., reflected, and subsequently received by a camera component 103, e.g., camera lens, of a portable electronic device 102 positioned with the case 104. In this manner, the camera component 103 may capture light corresponding to a field of view that a user desires to record in the form of images, video, or both. The size and/or shape of the opening 108 may correspond to the size and/or shape of the camera component 103. For example, the opening 108 may be substantially the same shape as and/or slightly larger than the camera component 103. In some embodiments, a user may be able to perform certain operations with the device, e.g., zoom features, which may serve to reduce or fully eliminate certain issues that may otherwise result from the opening 108 having a size and/or shape that is substantially similar to or less than the camera component 103.

[0033] FIG. 5 illustrates a second example 500 of a portable electronic device 502 and a case 504 therefor in accordance with embodiments of the disclosed technology. In the example 500, the case 504 is similar to but larger than the case 104 of FIGS. 1-4 so as to accommodate a larger device 502, such as an Apple iPad, for example. In the illustrated example 500, the case 504 has a light-redirecting component 506 whose functionality is substantially similar to that of the light-redirecting component 106 of FIGS. 3 and 4. The light-redirecting component 506 may be permanently integrated with, e.g., positioned within, the case 504. In alternative embodiments, the light-redirecting component 506 may be removable, e.g., replaceable or swappable with other types of light-redirecting components or assemblies.

[0034] FIG. 6 illustrates an example of the portable electronic device 502 and case 504 therefor illustrated in FIG. 5 being used to capture images and/or video in accordance with embodiments of the disclosed technology. In the example, light may pass through the opening 508 and onto the light-redirecting component 506, which redirects, e.g., reflects, the light to the camera component 503. The example also illustrates a connecting mechanism 507 that may serve to couple the light-redirecting component 506 to the case 504 such that

the component **506** may be re-positioned with regard to the opening **508**. An example of this is described below with regard to FIG. 7.

[0035] FIG. 7 further illustrates the portable electronic device case **504** illustrated in FIGS. 5 and 6. In particular, FIG. 7 shows the light-redirecting component **506** and connecting mechanism **507**. In this example, the connecting mechanism **507** includes an axle and a handle such that a user may rotate, e.g., swivel, the light-redirecting component **506**, e.g., to change the angle of light redirection, e.g., reflection, to the camera component **503** of the portable electronic device **502**.

[0036] In certain embodiments, an electronic device case may include a light-redirecting component that includes a flip-out component incorporated with a stand. Such arrangements may be advantageous for larger electronic devices such as an Apple iPad device, for example.

[0037] FIG. 8 illustrates a first position **800** for a third example of a portable electronic device and a case **804** therefor in accordance with embodiments of the disclosed technology. In the example, the case **804** has integrated therewith a moveable sub-assembly that includes a sliding component **808** and a light-redirecting component **806**, such as a mirror. Two connecting pieces **810** are provided such that, when a user moves the sliding component **808** in a certain direction, the light-redirecting component **806** may move in response thereto. For example, the light-redirecting component **806** may slide along the case **804** and rotate such that light received by the light-redirecting component **806** may be redirected, e.g., reflected, to a camera component. In the example, a “sub-floor” portion **812**, discussed further below, is partially exposed.

[0038] FIG. 9 illustrates a second position **900** for the third example of a portable electronic device and case therefor illustrated in FIG. 8. In this example, the light-redirecting component **806** has moved and rotated responsive to a user moving, e.g., sliding, the sliding component **808**. An angle between the light-redirecting component **806** and a plane of the case **804** is larger than zero but less than ninety degrees. In certain embodiments, the light-redirecting component may lock once a particular angle has been established. Alternatively, a user may be able to easily establish, or re-establish, virtually any angle between zero and ninety degrees. In this example **900**, the “sub-floor” portion **812** is more fully exposed and reveals an opening **814** through which light may easily travel.

[0039] FIG. 10 illustrates a fourth example **1000** of a portable electronic device and a case therefor in accordance with embodiments of the disclosed technology. This example **1000** is similar to the arrangement illustrated in FIG. 9 in that an electronic device case **1004** has integrated therewith a moveable sub-assembly that includes a sliding component **1008**, a light-redirecting component **1006**, and connecting pieces **1010**, and a “sub-floor” portion **1012** having an opening **1014** through which light may easily travel. Whereas the moveable sub-assembly is in a substantially vertical (“portrait”) orientation with regard to the device within the case **804** illustrated in FIG. 9, however, the moveable sub-assembly is in a substantially horizontal (“landscape”) orientation with regard to the device within the case **1004** illustrated in FIG. 10.

[0040] FIG. 11 illustrates a more detailed example of a moveable sub-assembly **1100** in accordance with certain embodiments of the disclosed technology. The moveable sub-assembly **1100** is similar to the moveable sub-assemblies

described above in that it has a sliding component **1108**, a light-redirecting component **1106**, and connecting pieces **1110**. The connecting pieces may serve to connect the light-redirecting component **1106** to a case, such as the cases **804** and **1104** of FIGS. 8-9 and 10, respectively.

[0041] In certain embodiments, the moveable sub-assembly **1100** may be integrated into a portable electronic device case such that it can be easily moved and/or positioned away from an opening within the case when in a closed position, e.g., when flat against the case or otherwise substantially planar with the backside of the case. This functionality may be in place of or in addition to that provided by such a moveable sub-assembly as described above with particular regard to FIGS. 8-10. The sub-assembly **1100** may also have associated therewith a capability of being secured, e.g., locked, in such a “closed” position. In certain embodiments, a user may be able to rotate or otherwise move or re-position the moveable sub-assembly **1100** with respect to the case such that the sub-assembly **110** provides a “portrait” orientation (see, e.g., FIG. 9) when in a first position and a “landscape” orientation (see, e.g., FIG. 10) when in a second position.

[0042] An electronic device case in accordance with the disclosed technology may provide a user with ease of use in terms of covert recording. For example, a case with an integrated mirror could be used for covert, inconspicuous, or unobtrusive image capture or live video recording using an electronic device.

[0043] In certain embodiments, a software application component of the disclosed technology may include features such as “going to a blank screen” or other information on the screen during image capture or recording. Alternatively or in addition thereto, a small thumbnail of the actual image or video and/or a counter may be provided to confirm for the user that the image is being captured or video recorded.

[0044] FIG. 12 illustrates a fifth example **1200** of a portable electronic device **1202** and a case **1204** therefor in accordance with embodiments of the disclosed technology. In this example **1200**, the case **1204** has integrated therewith, e.g., within, a pentaprism **1206** configured to receive light through an opening **1208** in the case **1204** and redirect the light to a camera component **1203**, e.g., lens.

[0045] Certain embodiments may include a software application to perform certain functions, e.g., rotating and mirroring, on the captured image or video to allow the captured image or video to be recorded at a particular position, e.g., a normal viewable position. This is because, when capturing images or recording video through the mirror or a prism, the images/video will typically be upside down and reversed.

[0046] FIG. 13 is a flowchart illustrated an example of a method **1300** of capturing image and/or video using a portable electronic device and case therefor in accordance with embodiments of the disclosed technology. At **1302**, the device receives image and/or video in the form of light that is redirected, e.g., reflected, by a corresponding component, e.g., mirror or prism, that may be integrated with the case or part of a moveable mirror assembly in accordance with embodiments described below.

[0047] At **1304**, the device causes the received image and/or video to be reversed. This may be accomplished using any of a number of suitable data manipulation techniques. At **1306**, the device causes the received image and/or video to be inverted. As with the reversing operation at **1304**, the invert-

ing operation at **1306** may be accomplished using any of a number of suitable data manipulation techniques.

[0048] At **1308**, the image and/or video may be optionally cropped, e.g., to effectively remove any vignetting resulting from the size and/or shape of the opening in the case, through which light may pass, with respect to the size and/or shape of the camera component that receives the light passing through the opening. The operations at **1304**, **1306**, and **1308** may be performed fully separately from each other, or they may be performed at least partially concurrently with each other.

[0049] At **1310**, the device may store the manipulated image and/or video data, e.g., locally and/or at a remote device, network, etc. At **1312**, the device may optionally transmit the manipulated data to a particular destination.

[0050] FIG. 14 illustrates a first example **1400** of a moveable mirror assembly **1402** integrated with or otherwise coupled with a portable electronic device case **1410** in accordance with certain embodiments of the disclosed technology. The moveable mirror assembly **1402** may include a mirror housing **1404** and a mirror **1406** suitable for redirecting light, e.g., to and/or from an electronic device within the electronic device case **1410**.

[0051] In the example **1400**, the moveable mirror assembly **1402** may accommodate image/video projection and/or capture in a first (e.g., portrait) orientation. In a first, “closed” position, the mirror **1406** may be substantially parallel to—and in overall general close proximity to—a surface of the electronic device case **1410**. In a second, “open” position, however, the mirror housing **1404** may be rotated about an axis along the surface of the electronic device case **1410** such that an angle defined by the mirror **1406** and the electronic device case **1410** is greater than zero degrees but no more than 90 degrees.

[0052] In the example, the moveable mirror assembly **1402** includes a first tab **1426** integrated with the mirror housing **1404**, and a first opening **1424** in the case **1410** that corresponds to the first tab **1426**. The tab **1426** and corresponding opening **1424** are optional features. In certain embodiments, the tab **1426** and corresponding opening **1424** may be mated with each other in connection with switching the moveable mirror assembly **1402** from a first (e.g., portrait) orientation to a second (e.g., landscape) orientation. Another tab integrated with the mirror housing **1404**—and corresponding opening in the case **1410**—may be mated with each other in connection with the moveable mirror assembly being in the first (e.g., portrait) orientation. Because the moveable mirror assembly **1402** is in the portrait orientation in FIG. 14, such tab and opening are not visible.

[0053] FIG. 15 illustrates a second example **1500** of a moveable mirror assembly **1502** integrated with or otherwise coupled with a portable electronic device case **1510** in accordance with certain embodiments of the disclosed technology. The moveable mirror assembly **1502** may include a mirror housing **1504** and a mirror **1506** suitable for redirecting light, e.g., to and/or from an electronic device within the electronic device case **1510**.

[0054] In the example **1500**, the moveable mirror assembly **1502** may accommodate image/video projection and/or capture in a second (e.g., landscape) orientation. In a first, “closed” position, the mirror **1506** may be substantially parallel to—and in overall general close proximity to—a surface of the electronic device case **1510**. In a second, “open” position, however, the mirror housing **1504** may be rotated about an axis along the surface of the electronic device case **1510**

such that an angle defined by the mirror **1506** and the electronic device case **1510** is greater than zero degrees but no more than 90 degrees.

[0055] In the example, the moveable mirror assembly **1502** includes a first tab **1524** integrated with the mirror housing **1504**, and a first opening **1520** in the case **1510** that corresponds to the first tab **1524**. The tab **1524** and corresponding opening **1520** are optional features. In certain embodiments, the tab **1524** and corresponding opening **1520** may be mated with each other in connection with switching the moveable mirror assembly **1502** from a first position (e.g., a landscape orientation) to a second position (e.g., a portrait orientation). Another tab integrated with the mirror housing **1504**—and corresponding opening in the case **1510**—may be mated with each other in connection with the moveable mirror assembly being in the first (e.g., landscape) orientation. Because the moveable mirror assembly **1502** is in the landscape orientation in FIG. 15, such tab and opening are not visible.

[0056] FIGS. 16A-16B illustrate a third example **1600** of a moveable mirror assembly **1602** integrated or otherwise coupled with a portable electronic device case **1604** in accordance with certain embodiments of the disclosed technology. The moveable mirror assembly **1602** may include a mirror housing **1604** and a mirror **1606** suitable for redirecting light, e.g., to and/or from an electronic device within the electronic device case **1610**.

[0057] FIG. 16A illustrates how, in the example **1600**, the moveable mirror assembly **1602** may be rotated, e.g., moved rotationally, by way of a rotational member **1603** that is integrated with or otherwise coupled with the electronic device case **1601**. In a first, “closed” position, the moveable mirror assembly **1602** may be substantially within a mirror assembly protective housing **1608** that is integrated with or otherwise coupled with the electronic device case **1610**.

[0058] The moveable mirror assembly **1602** may be rotated by way of the rotational member **1603** such that it “exits” the protective housing **1608** until the moveable mirror assembly **1602** reaches a certain position, e.g., suitable for redirecting light to and/or from an electronic device within the electronic device case **1610**. In the example **1600**, the moveable mirror assembly **1602** is in transition between the first, “closed” position and a position suitable for redirecting light to and/or from an electronic device within the electronic device case **1610**.

[0059] FIG. 16B provides a closer look at the moveable mirror assembly **1602**. The rotational member **1603** is coupled with a channel **1630** in the mirror housing **1604**. A user may slide the mirror housing **1604** from a first position (e.g., a portrait orientation) to a second position (e.g., a landscape orientation) by way of interaction between the rotational member **1603** and the channel **1630**.

[0060] In the example, the moveable mirror assembly **1602** includes a first tab **1624** integrated with the mirror housing **1604**, and a first opening **1620** in the case **1610** that corresponds to the first tab **1624**. The tab **1624** and corresponding opening **1620** are optional features. In certain embodiments, the tab **1624** and corresponding opening **1620** may be mated with each other in connection with switching the moveable mirror assembly **1602** from a portrait orientation, e.g., from the “closed” position or from a landscape orientation.

[0061] The moveable mirror assembly **1602** also includes a second tab **1626** integrated with the mirror housing **1604**, and a second opening **1622** in the case **1610** that corresponds to the second tab **1626**. These features are also optional. In

certain embodiments, the tab **1626** and corresponding opening **1622** may be mated with each other in connection with switching the moveable mirror assembly **1602** from to a landscape orientation, e.g., from the “closed” position or from a portrait orientation.

[0062] Consider an example in which the moveable mirror assembly **1602** is in a first, “closed” position. In such position, the moveable mirror assembly **1602** is positioned substantially within a space defined by the protective housing **1608**. In the example, a user may shift the moveable mirror assembly **1602** to a second position (e.g., a “portrait orientation”) by rotating the mirror housing **1604** (and, thus, the mirror **1606**) about a point on the electronic device case **1610** by way of the rotational member **1603**. The user may “lock” the moveable mirror assembly **1602** in place by rotating the moveable mirror assembly “up” from the electronic device case **1610** such that the first tab **1624** is received by the corresponding opening **1620**. The user may now take photos or videos in a first (e.g., portrait) orientation by way of light being redirected from the mirror **1606**, e.g., to the lens of an electronic device within the electronic device case **1610** through a hole in the electronic device case **1610**.

[0063] In the example, the user may then rotate the moveable mirror assembly **1602** back “down” to the electronic device case **1610**. The user may then shift the moveable mirror assembly **1602** to a third position (e.g., a “landscape orientation”) by sliding the moveable mirror assembly **1602** along the electronic device case **1610**. For example, the user may slide the mirror housing **1604** such that the rotational member **1603** moves from a first location **1623** within the channel **1630** in the mirror housing **1604** to a second location **1621** within the channel **1630** in the mirror housing **1604**. The user may “lock” the moveable mirror assembly **1602** in place by rotating the moveable mirror assembly “up” from the electronic device case **1610** such that the second tab **1626** is received by the corresponding opening **1622**. The user may now take photos or videos in a second (e.g., landscape) orientation by way of light being redirected from the mirror **1606**, e.g., to the lens of an electronic device within the electronic device case **1610** through a hole in the electronic device case **1610**.

[0064] Having described and illustrated the principles of the invention with reference to illustrated embodiments, it will be recognized that the illustrated embodiments may be modified in arrangement and detail without departing from such principles, and may be combined in any desired manner. And although the foregoing discussion has focused on particular embodiments, other configurations are contemplated. In particular, even though expressions such as “according to an embodiment of the invention” or the like are used herein, these phrases are meant to generally reference embodiment possibilities, and are not intended to limit the invention to particular embodiment configurations. As used herein, these terms may reference the same or different embodiments that are combinable into other embodiments.

[0065] Consequently, in view of the wide variety of permutations to the embodiments described herein, this detailed description and accompanying material is intended to be illustrative only, and should not be taken as limiting the scope of the invention. What is claimed as the invention, therefore, is all such modifications as may come within the scope and spirit of the following claims and equivalents thereto.

What is claimed is:

1. A moveable mirror assembly configured to be used in connection with a case for a portable electronic device, the moveable mirror assembly comprising:

- a mirror housing;
- a mirror positioned substantially within the mirror housing and configured to redirect light to a portable electronic device within the case for a portable electronic device; and
- a rotational member coupled with the mirror housing and configured to be further coupled with the case for a portable electronic device.

2. The moveable mirror assembly of claim **1**, wherein the mirror housing is configured to be rotated about a point on the case for a portable electronic device by way of the rotational member.

3. The moveable mirror assembly of claim **1**, wherein the mirror housing is configured to be rotated to a “portrait orientation” position.

4. The moveable mirror assembly of claim **1**, wherein the mirror housing is configured to be rotated to a “landscape orientation” position.

5. The moveable mirror assembly of claim **2**, further comprising a mirror assembly protective housing configured to substantially contain the mirror housing when the mirror housing is in a “closed” position.

6. The moveable mirror assembly of claim **5**, wherein the mirror assembly protective housing is integrated with the case for a portable electronic device.

7. The moveable mirror assembly of claim **2**, wherein the mirror housing is further configured to be “locked” in place by way of a tab of the mirror housing mating with an opening on the case for a portable electronic device.

8. The moveable mirror assembly of claim **1**, wherein the mirror housing has a first position in which the mirror is substantially parallel to a surface of the case for a portable electronic device.

9. The moveable mirror assembly of claim **8**, wherein the mirror housing has a second position in which an angle defined by the mirror and the surface of the case for a portable electronic device is greater than zero degrees.

10. The moveable mirror assembly of claim **9**, wherein the angle defined by the mirror and the surface of the case for a portable electronic device is no greater than 90 degrees.

11. The moveable mirror assembly of claim **9**, wherein the mirror housing may be rotated from the first position to the second position along an axis that extends along the case for a portable electronic device.

12. The moveable mirror assembly of claim **11**, wherein the mirror housing may be rotated from the second position back to the first position.

13. The moveable mirror assembly of claim **9**, wherein the mirror is configured to redirect light in a portrait orientation when the mirror housing is in the second position.

14. The moveable mirror assembly of claim **9**, wherein the mirror is configured to redirect light in a landscape orientation when the mirror housing is in the second position.

15. The moveable mirror assembly of claim **1**, wherein the mirror housing includes a channel, wherein the rotational member is configured to couple with the mirror housing by way of the channel.

16. The moveable mirror assembly of claim **15**, wherein the mirror housing is configured to move from a first position to a second position by way of a user sliding the mirror

housing such that the rotational member moves from a first location within the channel to a second location within the channel.

17. A case for a portable electronic device, comprising:
a moveable mirror assembly that includes:
a mirror housing having a channel; and
a mirror positioned substantially within the mirror housing and configured to redirect light to a portable electronic device within the case;
a rotational member coupled with the mirror housing by way of the channel, wherein the rotation member is configured to be coupled with the case for a portable electronic device; and
a protective housing configured to substantially house the mirror housing when the mirror housing is in a "closed" position.

* * * * *