

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization

International Bureau

(43) International Publication Date  
04 June 2020 (04.06.2020)



(10) International Publication Number

WO 2020/109609 A1

(51) International Patent Classification:

B26B 21/52 (2006.01)

(21) International Application Number:

PCT/EP20 19/083 189

(22) International Filing Date:

29 November 2019 (29. 11.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

18209204.9 29 November 2018 (29. 11.2018) EP

(71) Applicant: BIC VIOLEX S.A. [GR/GR]; 58, Agiou Athanasiou St, 14569 ANOIXI (GR).

(72) Inventors: GRATSIAS, Spiros; c/o BIC VIOLEX IP department, 58, Agiou Athanasiou St, 14569 ANOIXI (GR). PETRATOU, Maria; c/o BIC VIOLEX IP department, 58, Agiou Athanasiou St, 14569 ANOIXI (GR).

(74) Agent: INTES, Didier et al.; CABINET BEAU DE LOMENIE, 158 Rue de l'Universite, 75340 PARIS CEDEX 07 (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: TRIPOD RAZOR HANDLE

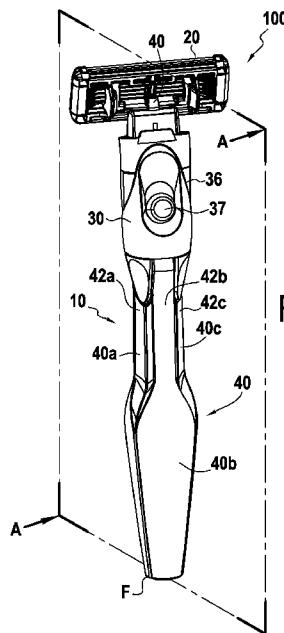


FIG.2A

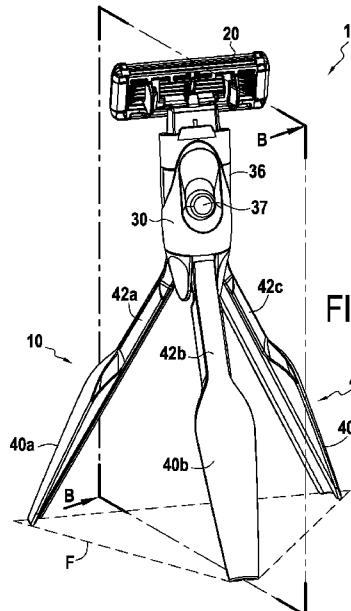


FIG.2B

(57) Abstract: A razor handle 10 comprising a top portion 30 configured to connect to a blade assembly 20; and a bottom portion 40 configured to support the top portion, and comprising more than one supporting member 40a, 40b, 40c, a respective proximal end of each supporting member being operatively connected to the top portion and the supporting members extending distally therefrom, wherein the supporting members are configured to adopt a first configuration and a second configuration, and wherein when at least one supporting member is in the second configuration, the razor handle has a broader footprint than when all of the supporting members are in the first configuration.

WO 2020/109609 A1

[Continued on next page]



---

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,  
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## TRIPOD RAZOR HANDLE

[0001] This application claims benefit from European patent application EP18209204.9 filed on 29th Nov 2018 its content being 5 incorporated herein by reference.

[0002] The present disclosure relates to a razor, and more specifically, to a deployable razor handle comprising more than one supporting member that is adapted to hold the razor handle in an upright configuration. Additionally, a razor may include the deployable razor 10 handle and blade assembly including at least one blade. The blade assembly may be fixed or detachable from the razor handle. The blade assembly may be interchangeable, in particular, when a blade or blades of the blade assembly have been blunted. The razor may be specifically adapted for shaving facial, head, and/or body hair.

15

## BACKGROUND

[0003] Two common problems with shaving blade assemblies are 20 storage of the razor and keeping a high level of hygiene. For example, shaving blade assemblies that require a tray or a holder are common, however the trays or holders may be difficult to store due to their bulky size and usually do not provide a means for draining fluid that may be collected in the tray and thus can leave the razor blades in a pool of fluid due to the orientation of the razor within the tray.

[0004] To address these issues, shaving blade assemblies comprising a mechanism to orient and hold the razor upright have 25 been developed. For example, US 5 839 198 A discloses a razor having integral means for holding the razor. The integral holding means allow the user of the razor to conveniently place the razor on a surface for temporary storage during shaving.

[0005] Another example is US 3 111 757 A which discloses an attachment which is adaptable for use with various makes of safety razors and which may be adjusted relative to the longitudinal axis of the handle of the safety razor to a proper position, to afford the proper 30 balance of the razor when held in a normal position by the hand.

[0006] Another example is US 2017/0036361 A1 which discloses a razor handle that provides maximum control when shaving is disclosed. The handle base may have a rectangular prism or tetrahedral frustum shape, with one unique side surface for each of a user's three fingertips. The base naturally stands upright when not in use, thereby keeping the blade from making direct contact with wet surfaces for extended periods of time.

[0007] Another example is US1966307 A which discloses a head, preferably curved, having a spindle thereon, a handle composed of two members functioning as a hand hold when the razor is in use, and capable also of being adjusted to a position where they contact with the outer ends of the head, to reduce the razor dimensions in one direction to facilitate the razor being packed in a small compass; and a clamping sleeve threaded on the spindle, the handle members being mounted on such sleeve.

[0008] Another example is GB628855 A which discloses a hollow handle having a grip being slit in appropriate proportions, the ends at the base being free, a metal band is placed over the slits keeping them in position. When the metal band is moved up the handle, it varies the flexibility as required, and also allows the slits to expand thus allowing the razor to stand upright on the base of the handle requiring less room on shelf or wash basin.

## SUMMARY

25

[0009] To address the problems of storing a razor easily and, at the same time, keeping a high level of hygiene, a razor handle according to claim 1 is provided.

[0010] In particular, a razor handle comprising a top portion configured to connect to a blade assembly; and a bottom portion configured to support the top portion. The bottom portion comprising more than one supporting member, a respective proximal end of each supporting member being operatively connected to the top portion and the supporting members extending distally therefrom. The supporting members are configured to adopt a first configuration and a second configuration, and when at least one supporting member is in the

second configuration, the razor handle has a broader footprint than when all of the supporting members are in the first configuration.

[0011] According to some embodiments, the razor handle may further include a connection member configured to engage engagement elements of the supporting members, wherein the connection member may further include a stop configured to limit rotational movement of the supporting members.

[0012] According to some embodiments, the supporting members may be formed as struts, which in the first configuration form the gripping portion of the razor handle.

[0013] According to some embodiments, the respective proximal ends of the supporting members may include at least one engagement element.

[0014] According to some embodiments, the top portion may include a connection member configured to engage the engagement elements of the supporting members.

[0015] According to some embodiments, the engagement elements of the supporting members and the connection member may be hingedly attached.

[0016] According to some embodiments, each of the supporting members may include a respective pivoting axis. A first supporting member may be configured to pivot about a pivot axis different from a second supporting member.

[0017] According to some embodiments, one of the engagement elements or the connection member may be protrusions and the other of the engagement elements and connection member may be recesses.

[0018] According to some embodiments, the stop may limit the rotation of the one or more supporting members in an angle of less than 60 degrees, defined by the supporting member axis and the handle longitudinal axis.

[0019] According to some embodiments, the stop may limit the rotation of the one or more supporting members in an angle in the range of 25 to 50 degrees, defined by the supporting member axis and the handle longitudinal axis.

[0020] According to some embodiments, the connection member may further include a stop configured to restrict the rotational movement of the supporting members.

5 [0021] According to some embodiments, the stop may be formed with a rounded surface that may be configured to permit rotational movement of the supporting members.

[0022] According to some embodiments, the proximal end of one or more supporting members may include a relief that is configured to permit rotational movement of the supporting member.

10 [0023] According to some embodiments, the footprint in the deployed configuration is at least two times larger than the footprint in the first configuration.

15 [0024] According to some embodiments, a method of configuring a razor handle to be stored in an upright configuration is disclosed. The method comprises providing the aforementioned razor handle; and moving at least one supporting member of the razor handle into the second configuration.

20 [0025] According to some embodiments, a razor assembly is disclosed. The razor assembly comprises a blade assembly and the aforementioned razor handle.

25 [0026] This configuration of a standing razor allows the razor handle or razor to be easily stored on a surface (e.g., countertop), for example, to fully dry after a wet shave. Additionally, this configuration allows the razor handle to have a small footprint, so it can be stored on a surface with limited available space. When a user is finished with the shaving and desires to store it in a confined space, such as a medicine cabinet or a toiletry bag, the razor or razor handle can be manipulated into the first configuration. This easily transformative configuration renders use of a tray optional or even obsolete.

30 [0027] The above summary is not intended to describe each and every implementation of the concept. In particular, selected features of any illustrative embodiment within this disclosure may be incorporated into additional embodiments unless clearly stated to the contrary.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The disclosure may be more completely understood in consideration of the following detailed description of examples of the disclosure in connection with the accompanying drawings, in which:

[0029] FIG. 1 is a perspective front view of a razor according to a first example when the supporting members are in a first configuration;

10 [0030] FIG. 2A is a perspective back view of the razor of FIG. 1;

[0031] FIG. 2B is a perspective back view of the razor of FIG. 2A when the supporting members are in a second configuration;

[0032] FIG. 3 is a perspective view of a razor handle according to the first example when the supporting members are in the first configuration;

15 [0033] FIG. 4 is an exploded view of a razor handle of FIG. 3;

[0034] FIG. 5 is a perspective bottom view of the connecting member;

[0035] FIG. 6 is a perspective top view of the connecting member and the supporting members in a second configuration;

20 [0036] FIG. 7A is a cross-section of the razor of FIG. 2A along plane A-A; and

[0037] FIG. 7B is a cross-section of the razor of FIG. 2B along plane B-B.

25 [0038] While examples of the disclosure are amenable to various modifications and alternative forms, specifics thereof have been shown by way of example in the drawings and will be described in detail. It should be understood, however, that the intention is not to limit examples of the disclosure to the particular embodiments described. On the contrary, the intention of this disclosure is to cover all modifications, equivalents, and alternatives falling within the scope of the disclosure.

30

## DETAILED DESCRIPTION

[0039] As used in this disclosure and the appended claims, the singular forms “a”, “an”, and “the” include plural referents unless the content clearly dictates otherwise. As used in this disclosure and the appended claims, the term “or” is generally employed in its sense including “and/or” unless the content clearly dictates otherwise.

[0040] The following detailed description should be read with reference to the drawings. The detailed description and the drawings, which are not necessarily to scale, depict illustrative examples and are not intended to limit the scope of the present disclosure. The illustrative examples depicted are intended only as exemplary.

[0041] FIG. 1 shows a perspective view of the front of a razor 100 having a blade assembly 20 and a razor handle 10. FIG. 1 shows the razor handle 10 in a closed, first configuration. The razor handle has a top portion 30 and a bottom portion 40. The bottom portion 40 may be connected to the top portion 30 and extend distally therefrom. The bottom portion comprises more than one supporting member 40a-40c. The razor handle 10 may be shaped to better adapt to the natural contours of a hand when in the closed, first configuration. Additionally, the razor handle may further comprise grips 42a-42c, made of the same or a different material (e.g. rubber) thus improving the handling. The blade assembly 20 may have a housing 22 that may be hollow and generally form a rectangular parallelepiped; however, the housing 22 may be of any other suitable shape.

[0042] Secured within the housing 22 is at least one blade 24. In this embodiment, a plurality of blades 24 are shown, however, it is contemplated that the blade assembly may have any number of blades 24. Additionally, the blades 24 that are shown are elongate in shape; however, it is contemplated that the blades 24 may be formed into any other suitable shape. Additionally, each blade may be one piece, bent to form an angle, or may comprise a blade support attached on it.

[0043] FIG. 2A, shows the back of the razor 10 in the closed, first configuration. FIG. 2B shows the back of the razor 10 in the second, deployed configuration. The bottom portion 40 of the razor handle 10 comprises more than one supporting member 40a-40c. Each of the

supporting members 40a-40c is operatively connected to the top portion 30. In the deployed configuration, the supporting members 40a-40c are moved away from each other thereby providing a wider footprint F than when in the first configuration.

5 [0044] The footprint F may be an area defined by the distal most ends of the supporting members 40a-40c. For example, the footprint F of the razor 10 in the deployed, second configuration may be larger than the footprint F of the razor 100 in the first, closed configuration. In examples, the footprint in the second (deployed) configuration may 10 be at least two times larger than the footprint of the razor in the first (closed) configuration. In alternatives, only one supporting member may be deployed, i.e. adopting the second configuration. In these cases, the footprint in the second (deployed) configuration may also be larger than the footprint with all supporting members in the first (closed) 15 configuration. In the deployed configuration, the top portion 30 of the razor handle 10 or the razor 100, when the blade assembly 20 is attached to the razor handle 10, can be supported by the supporting members 40a-40c in an upright configuration.

20 [0045] As shown in the examples of FIGS. 3 and 4, the top portion 30 of the razor handle 10 may include a blade assembly attachment mechanism 35 including a button 37.

25 [0046] The top portion 30 may also include a collar 34 that connects the cartridge connecting structure 32 to the button guard 36. The button guard 36 may include the button which may be configured to deform so as to allow a user to engage an ejector 33 of the cartridge connecting structure 32 in order to control the attachment and detachment of the blade assembly 20.

30 [0047] The button 37 may have a water tight seal with the button guard 36 to prevent debris and sediment from entering the blade assembly attachment mechanism 35 and interfering with the operation of the blade assembly attachment mechanism 35.

35 [0048] A connection member 38 may be attached to the button guard 36. However, it is also contemplated that the connection member 38 may be monolithically formed with the button guard 36. It is further contemplated that the connection member 38 may be modular. The connection member 38 may be configured to connect with each of the

supporting members 40a-40c. This connection may be a pin and hole, protrusion and relief, or any combination. In particular, a connection forming a hinge that allows each of the supporting members 40a-40c to pivot relative to the connection member 38 is envisioned.

5 [0049] FIG. 5 shows a bottom view of the connection member 38 and FIG. 6 shows the supporting members 40a-40c positioned within the connecting member 38. In this example, each of the supporting members 40a-40c may include a pair of engagement elements 46a-46c. The engagement elements 46a-46c may be formed as pins. The 10 connection member 38 may include a plurality of recesses 38a-38c that correspond with a pair of engagement elements 46a-46c of the supporting members 40a-40c. However, it is contemplated that the connection member 38 may have the engagement elements 46a-46c and the supporting members 40a-40c may have corresponding recesses. 15 Further, although in this example, the engagement elements 46a-46c are formed as pins, any other suitable shape may be used, for example, protrusions.

20 [0050] With this configuration the supporting members 40a-40c are secured within the connection member 38 and adapted to pivot relative to the connection member 38, e.g., hingedly attached to the connection member 38. Each supporting member 40a-40c may have a pivot axis Pa, Pb, Pc. At least one supporting member 40a-40c may pivot about its respective pivot axis Pa, Pb, Pc which may be different from the pivot axis Pa, Pb, Pc of another supporting member 40a-40c. 25 With this arrangement, the footprint F may become wider and the general balance of the razor when in an upright position is improved.

30 [0051] Shown in FIG. 5, the connection member 38 may include a stop 39. The stop 39 may limit the rotation of the one or more supporting member 40a-40c. In examples, the stop may limit rotation of one or more supporting members 40a-40c in an angle a of less than 60 degrees defined by the supporting member axis x' and the handle longitudinal axis X. In examples the angle a may be less or equal than 40 degrees. In another example the angle a may be between 10 and 35 degrees. When the angle a has the above mentioned values, the footprint F is small so it can be stored on a surface with limited 35 available space and at the same time it serves for a secure standing in

an upright position. The stop 39 may also be adapted to prevent over rotation of the supporting members 40a-40c. The stop 39 may have any appropriate shape to restrict the pivoting action of the supporting members 40a-40c, for example, a curved shape. Additionally, the 5 proximal ends of the one or more supporting members 40a-40c may include a relief 44a-44c. The reliefs 44a-44c may be adapted to prevent over rotation of the supporting members 40a-40c by allowing the supporting members 40a-40c to not be encumbered by the stop 39 until the supporting members 40a-40c are in a predetermined position.

10 [0052] It is contemplated that the supporting members 40a-40c may have a high resistance (e.g., due to frictional forces) with the connection member 38 in order to avoid accidental pivoting of the supporting members 40a-40c during use. Accordingly, the user may need to apply a pivoting force to the supporting members 40a-40c in 15 order place the razor 10 in the closed or deployed configuration. Further, the high resistance with the connection member 38 allows a user to place the razor 10 into a semi-deployed configuration. This semi-deployed configuration facilitates stability positioning the razor 10 without requiring full deployment of the supporting elements 40a- 20 40c.

[0053] FIG. 7A shows a cross section of the razor 100 of FIG. 2A along plane A-A. In this configuration, the supporting members 40a-40c are in the closed, first configuration. FIG. 7B shows a cross section of the razor 100 of FIG. 2B along plane B-B. In this configuration, the 25 supporting members 40a-40c are in the deployed, second configuration. Using supporting member 40b as an example, the relief 44b on the proximal end of the supporting member 40b is engaging the stop 39 of the connection member 38. Additionally, a portion of the proximal end of the supporting member 40b is positioned within a gap g formed 30 between the connection member 38 and the button guard 36.

[0054] In operation, when a user desires to use the razor 100 or to store the razor 100 in a confined space, for example, a travel bag, the razor handle 100 can be manipulated into the closed first configuration. However, if a user desires to have the razor 100 be 35 positioned into an unassisted upright configuration, the razor handle 10 can be manipulated into the deployed, second configuration.

[0055] This is beneficial because the razor may dry without use of a drying tray. Additionally, the razor can easily be converted between a compact storage/use configuration and an upright configuration. The upright configuration facilitates hygienic drying of the razor because the razor handle can be configured to position the razor blades away from a water or corrosive source while the blades are drying.

[0056] While it is disclosed that the user may open each of the supporting members 40a-40c individually, it is also contemplated that the razor 100 may be configured to allow the supporting members 40a-40c to move simultaneously, for example, implementing a center column and sliding ring that is attached to each of the supporting members 40a-40c such that the supporting members 40-40c can be moved in concert.

[0057] It is also contemplated that a spring device may be implemented such that the supporting members 40a-40c may be automatically deployed upon activation.

[0058] Although the described embodiments were provided as different exemplary embodiments, it is envisioned that these embodiments are combinable or, when not conflicting, the features recited in the described embodiments may be interchangeable.

[0059] Throughout the description, including the claims, the term "comprising a" should be understood as being synonymous with "comprising at least one" unless otherwise stated. In addition, any range set forth in the description, including the claims should be understood as including its end value(s) unless otherwise stated. Specific values for described elements should be understood to be within accepted manufacturing or industry tolerances known to one of skill in the art, and any use of the terms "substantially" and/or "approximately" and/or "generally" should be understood to mean falling within such accepted tolerances.

[0060] Although the present disclosure herein has been described with reference to particular embodiments, it is to be understood that these embodiments are merely illustrative of the principles and applications of the present disclosure.

[0061] It is intended that the specification and examples be considered as exemplary only, with a true scope of the disclosure being indicated by the following claims.

## CLAIMS

## 1. A razor handle (10) comprising:

5

a top portion (30) configured to connect to a blade assembly (20); and

10

a bottom portion (40) configured to support the top portion (30) and comprising more than one supporting members (40a-40c), a respective proximal end of each supporting member being operatively connected to the top portion (30) and the supporting members extending distally therefrom, wherein the supporting members (40a-40c) are configured to adopt a first configuration and a second configuration, and wherein

15

when at least one supporting member (40a-40c) is in the second configuration, the razor handle (10) has a broader footprint (F) than when all of the supporting members are in the first configuration,

20

wherein the razor handle further includes a connection member (38) configured to engage engagement elements (46a-46c) of the supporting members (40a-40c),

25

wherein the connection member (38) further includes a stop (39) configured to limit rotational movement of the supporting members (40a-40c).

## 2. The razor handle (10) of claim 1, wherein the supporting

30

members (40a-40c) are formed as struts, which in the first configuration form the gripping portion of the razor handle.

35

## 3. The razor handle (10) of any of the preceding claims, wherein the respective proximal ends of the supporting members (40a-40c) include the engagement elements (46a-46c).

40

## 4. The razor handle (10) of any of claims 1-3, wherein the top portion (30) includes the connection member (38) that is configured to engage the engagement elements (46a-46c) of the supporting members (40a-40c).

5. The razor handle (10) of any of claims 1-4, wherein the engagement elements (46a-46c) of the supporting members (40a-40c) and the connection member (38) are hingedly attached.
- 10 6. The razor handle (10) of any of the preceding claims, wherein each of the supporting members (40a-40c) include a respective pivoting axis (Pa, Pb, Pc) and wherein a first supporting member (40a-40c) may be configured to pivot about a pivot axis(Pa, Pb, Pc) different from a second supporting member (40a-40c).
- 15 7. The razor handle (10) of any of the preceding claims including three supporting members (40a-40c).
8. The razor handle (10) of claim 7, wherein the three supporting members (40a-40c) pivot about three different axes (Pa, Pb, Pc), respectively.
- 20 9. The razor handle (10) of any of claims 1-8, wherein one of the engagement elements (46a-46c) or the connection member (38) are protrusions and the other of the engagement elements (46a-46c) or connection member (38) are recesses.
- 25 10. The razor handle (10) of any of claims 1-9, wherein the stop (39) limits the rotation of the one or more supporting members (40a-40c) in an angle of less than 60 degrees, defined by the supporting member axis and the handle longitudinal axis.
- 30 11. The razor handle (10) of any of claims 1-10, wherein the stop (39) is further configured to restrict the rotational movement of the supporting members (40a-40c).
- 35 12. The razor handle (10) of any of claims 1-11, wherein the stop (39) is formed with a rounded surface configured to permit rotational movement of the supporting members (40a-40c).
- 40 13. The razor handle (10) of any of the preceding claims, wherein the proximal end of one or more supporting members (40a-40c) includes a relief (44a-44c) that is configured to permit rotational movement of the supporting member (40a-40c).
- 45 14. The razor handle (10) of any of the preceding claims, wherein the footprint (F) in the second configuration is at least two times larger than the footprint (F) in the first configuration.

15. A method of configuring a razor handle (10) to be stored in an upright configuration, wherein the method comprises:

5 providing a razor handle (10) according to any of claims 1-14; and

moving at least one supporting member (40a-40c) of the razor handle (10) into the second configuration.

10 16. A razor assembly (100) comprising:

a blade assembly (20); and

a razor handle (10) according to any of claims 1-14.

1/5

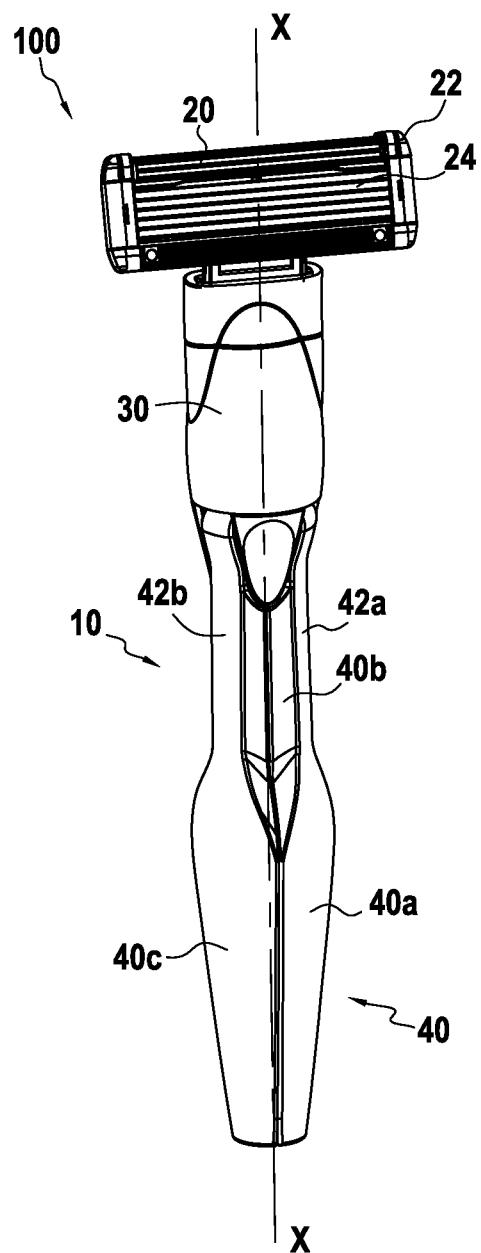


FIG.1

2/5

FIG.2B


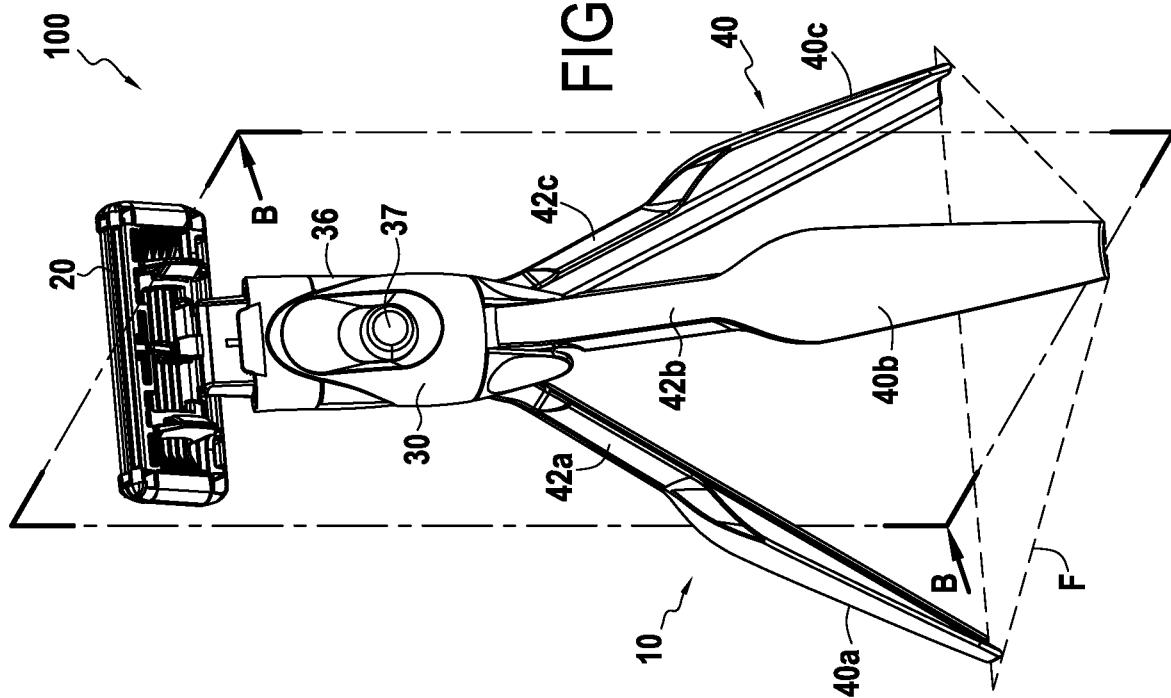


FIG.2A

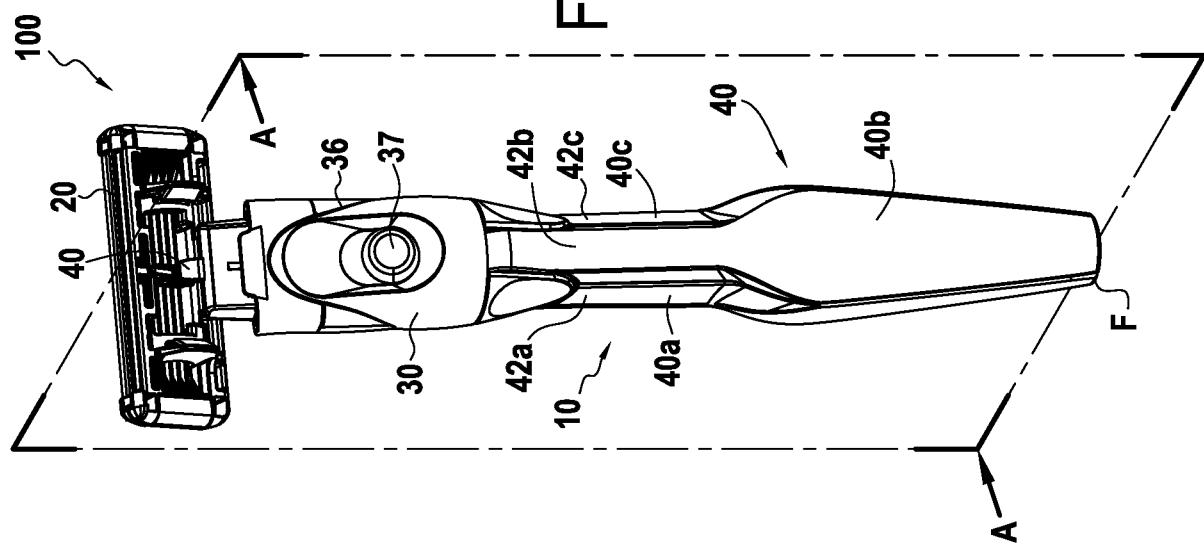

3/5

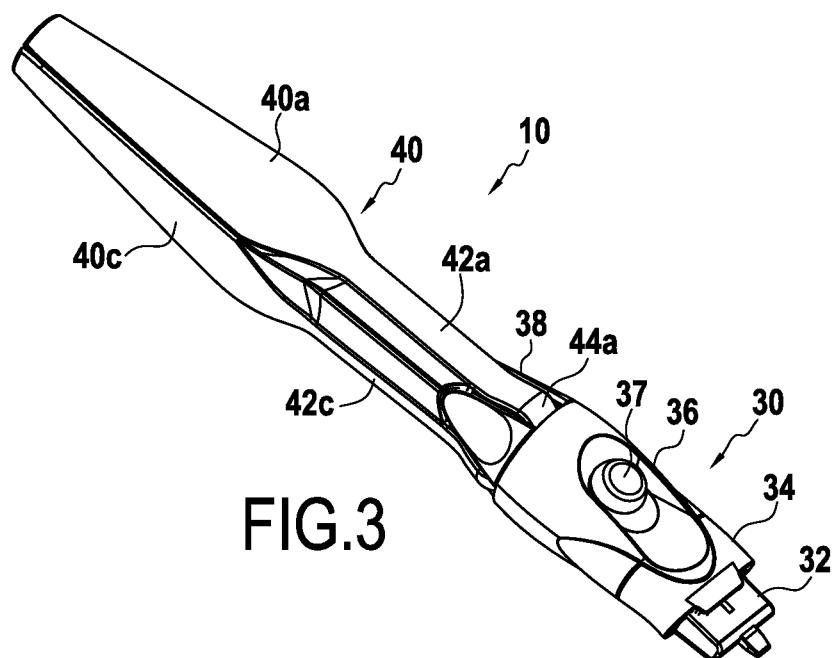


FIG.3

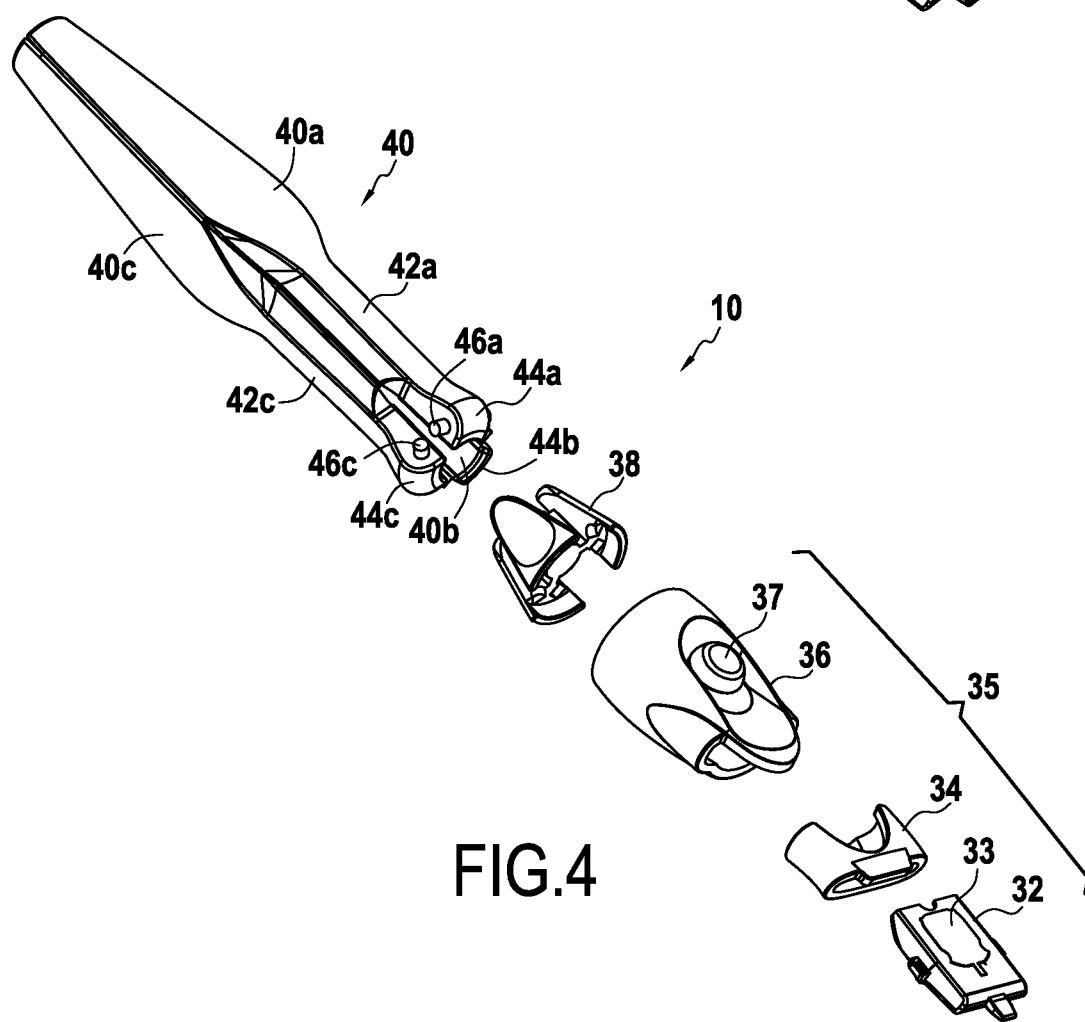


FIG.4

4/5

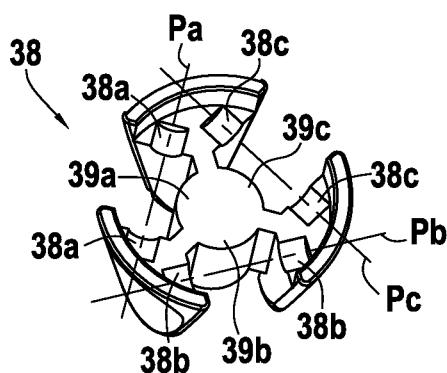


FIG.5

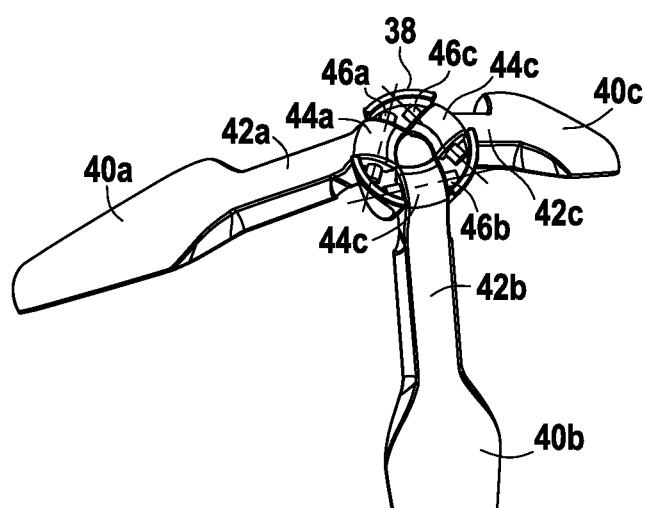


FIG.6

5/5

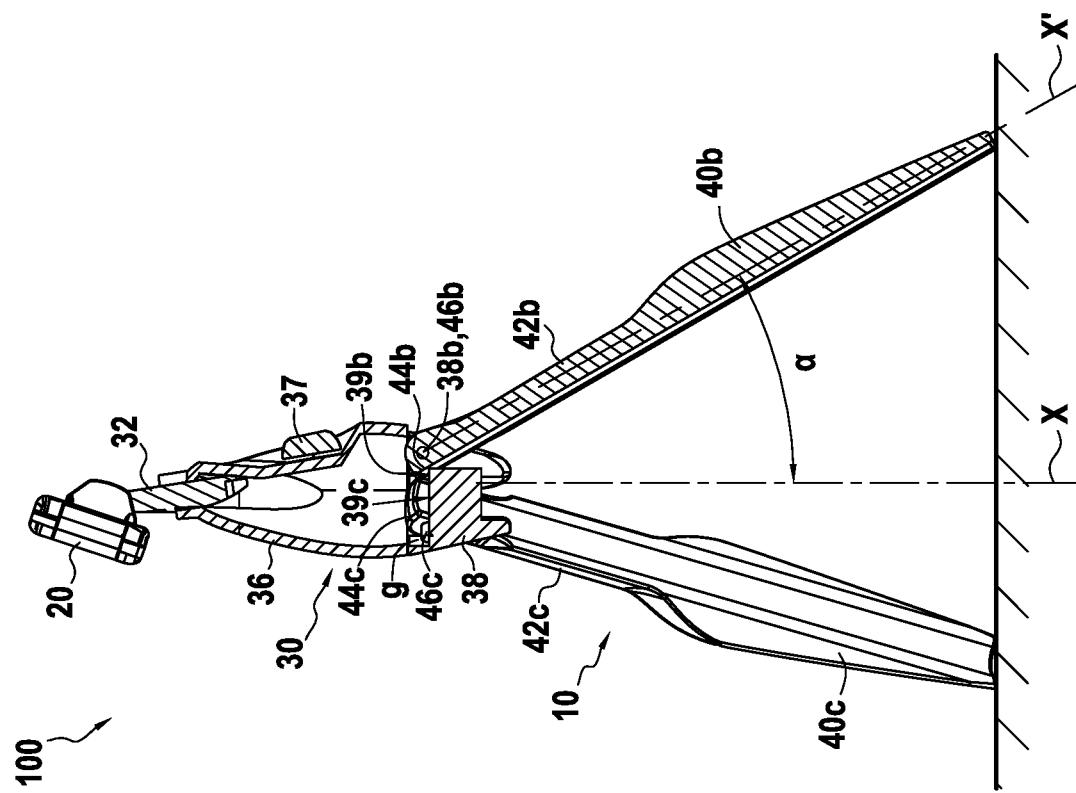


FIG. 7B

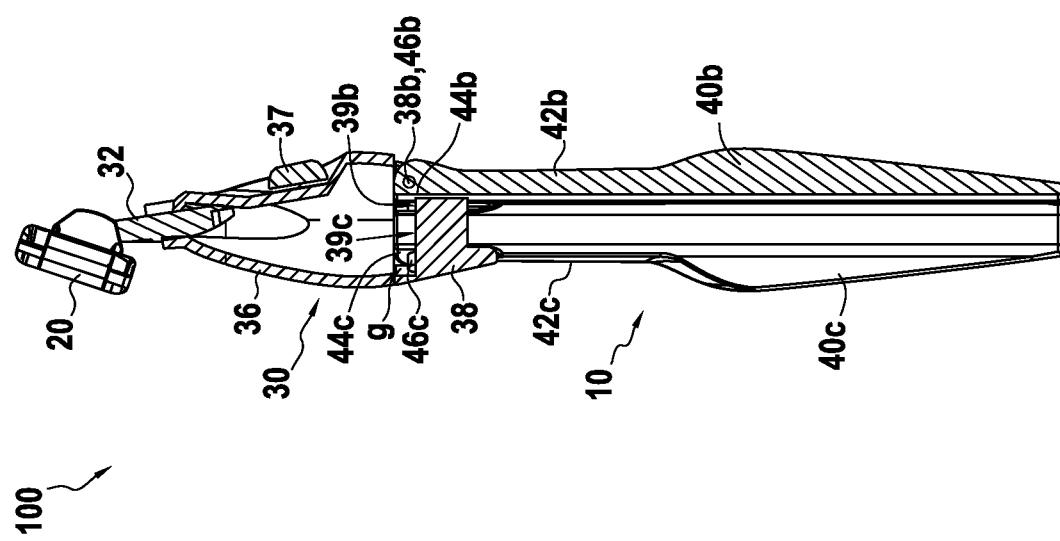


FIG. 7A

# INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2019/083189

A. CLASSIFICATION OF SUBJECT MATTER  
INV. B26B21/52  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
B26B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal , WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2016/046029 A1 (SAMUELS PEDRO A [CA] ET AL) 18 February 2016 (2016-02-18) paragraphs [0013] - [0019]; figures 1-4 -----	1-6,9, 11-16 7,8,10
A	US 1 966 307 A (OHMER WILFRED I) 10 July 1934 (1934-07-10) cited in the application page 1, lines 35-77; figures 1-6 -----	1-16
A	US 5 839 198 A (MCCOY CLARE [US]) 24 November 1998 (1998-11-24) cited in the application abstract; figures 1-3 -----	1-16
A	GB 628 855 A (JOE EDGAR BEVIS) 6 September 1949 (1949-09-06) cited in the application page 1, lines 45-76; figures 1, 2 ----- -/-	1-16

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier application or patent but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search  10 February 2020	Date of mailing of the international search report  20/02/2020
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3046	Authorized officer  Rattenberger , B

**INTERNATIONAL SEARCH REPORT**International application No  
**PCT/EP2019/083189****C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 320 374 A (GEORGES MONNET) 1 June 1943 (1943-06-01) column 2, lines 27-33; figure 1 -----	1-16
2		

**INTERNATIONAL SEARCH REPORT****Information on patent family members**International application No  
PCT/EP2019/083189

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016046029	A1	18-02-2016	NONE
US 1966307	A	10-07-1934	NONE
US 5839198	A	24-11-1998	NONE
GB 628855	A	06-09-1949	NONE
US 2320374	A	01-06-1943	NONE