



(86) Date de dépôt PCT/PCT Filing Date: 2003/05/17
(87) Date publication PCT/PCT Publication Date: 2004/04/15
(45) Date de délivrance/Issue Date: 2012/11/06
(85) Entrée phase nationale/National Entry: 2005/02/07
(86) N° demande PCT/PCT Application No.: US 2003/015706
(87) N° publication PCT/PCT Publication No.: 2004/031937
(30) Priorité/Priority: 2002/09/30 (US60/414,863)

(51) Cl.Int./Int.Cl. *G06F 3/14* (2006.01),
G06F 9/46 (2006.01)


(72) Inventeurs/Inventors:
SINCLAIR, ROBERT E., US;
WAGONER, PATRICIA M., US;
BURNS, HEATHER S., US;
REID, PAUL J., US;
MCKEON, BRENDAN, US

(73) Propriétaire/Owner:
MICROSOFT CORPORATION, US

(74) Agent: SMART & BIGGAR

(54) Titre : SYSTÈME ET PROCÉDE PERMETTANT A UNE INTERFACE ET A UN UTILISATEUR D'ÊTRE INFORMES
DES ÉLÉMENTS D'INTERFACE PRÉSENTS

(54) Title: SYSTEM AND METHOD FOR MAKING USER INTERFACE ELEMENTS KNOWN TO AN APPLICATION AND
USER

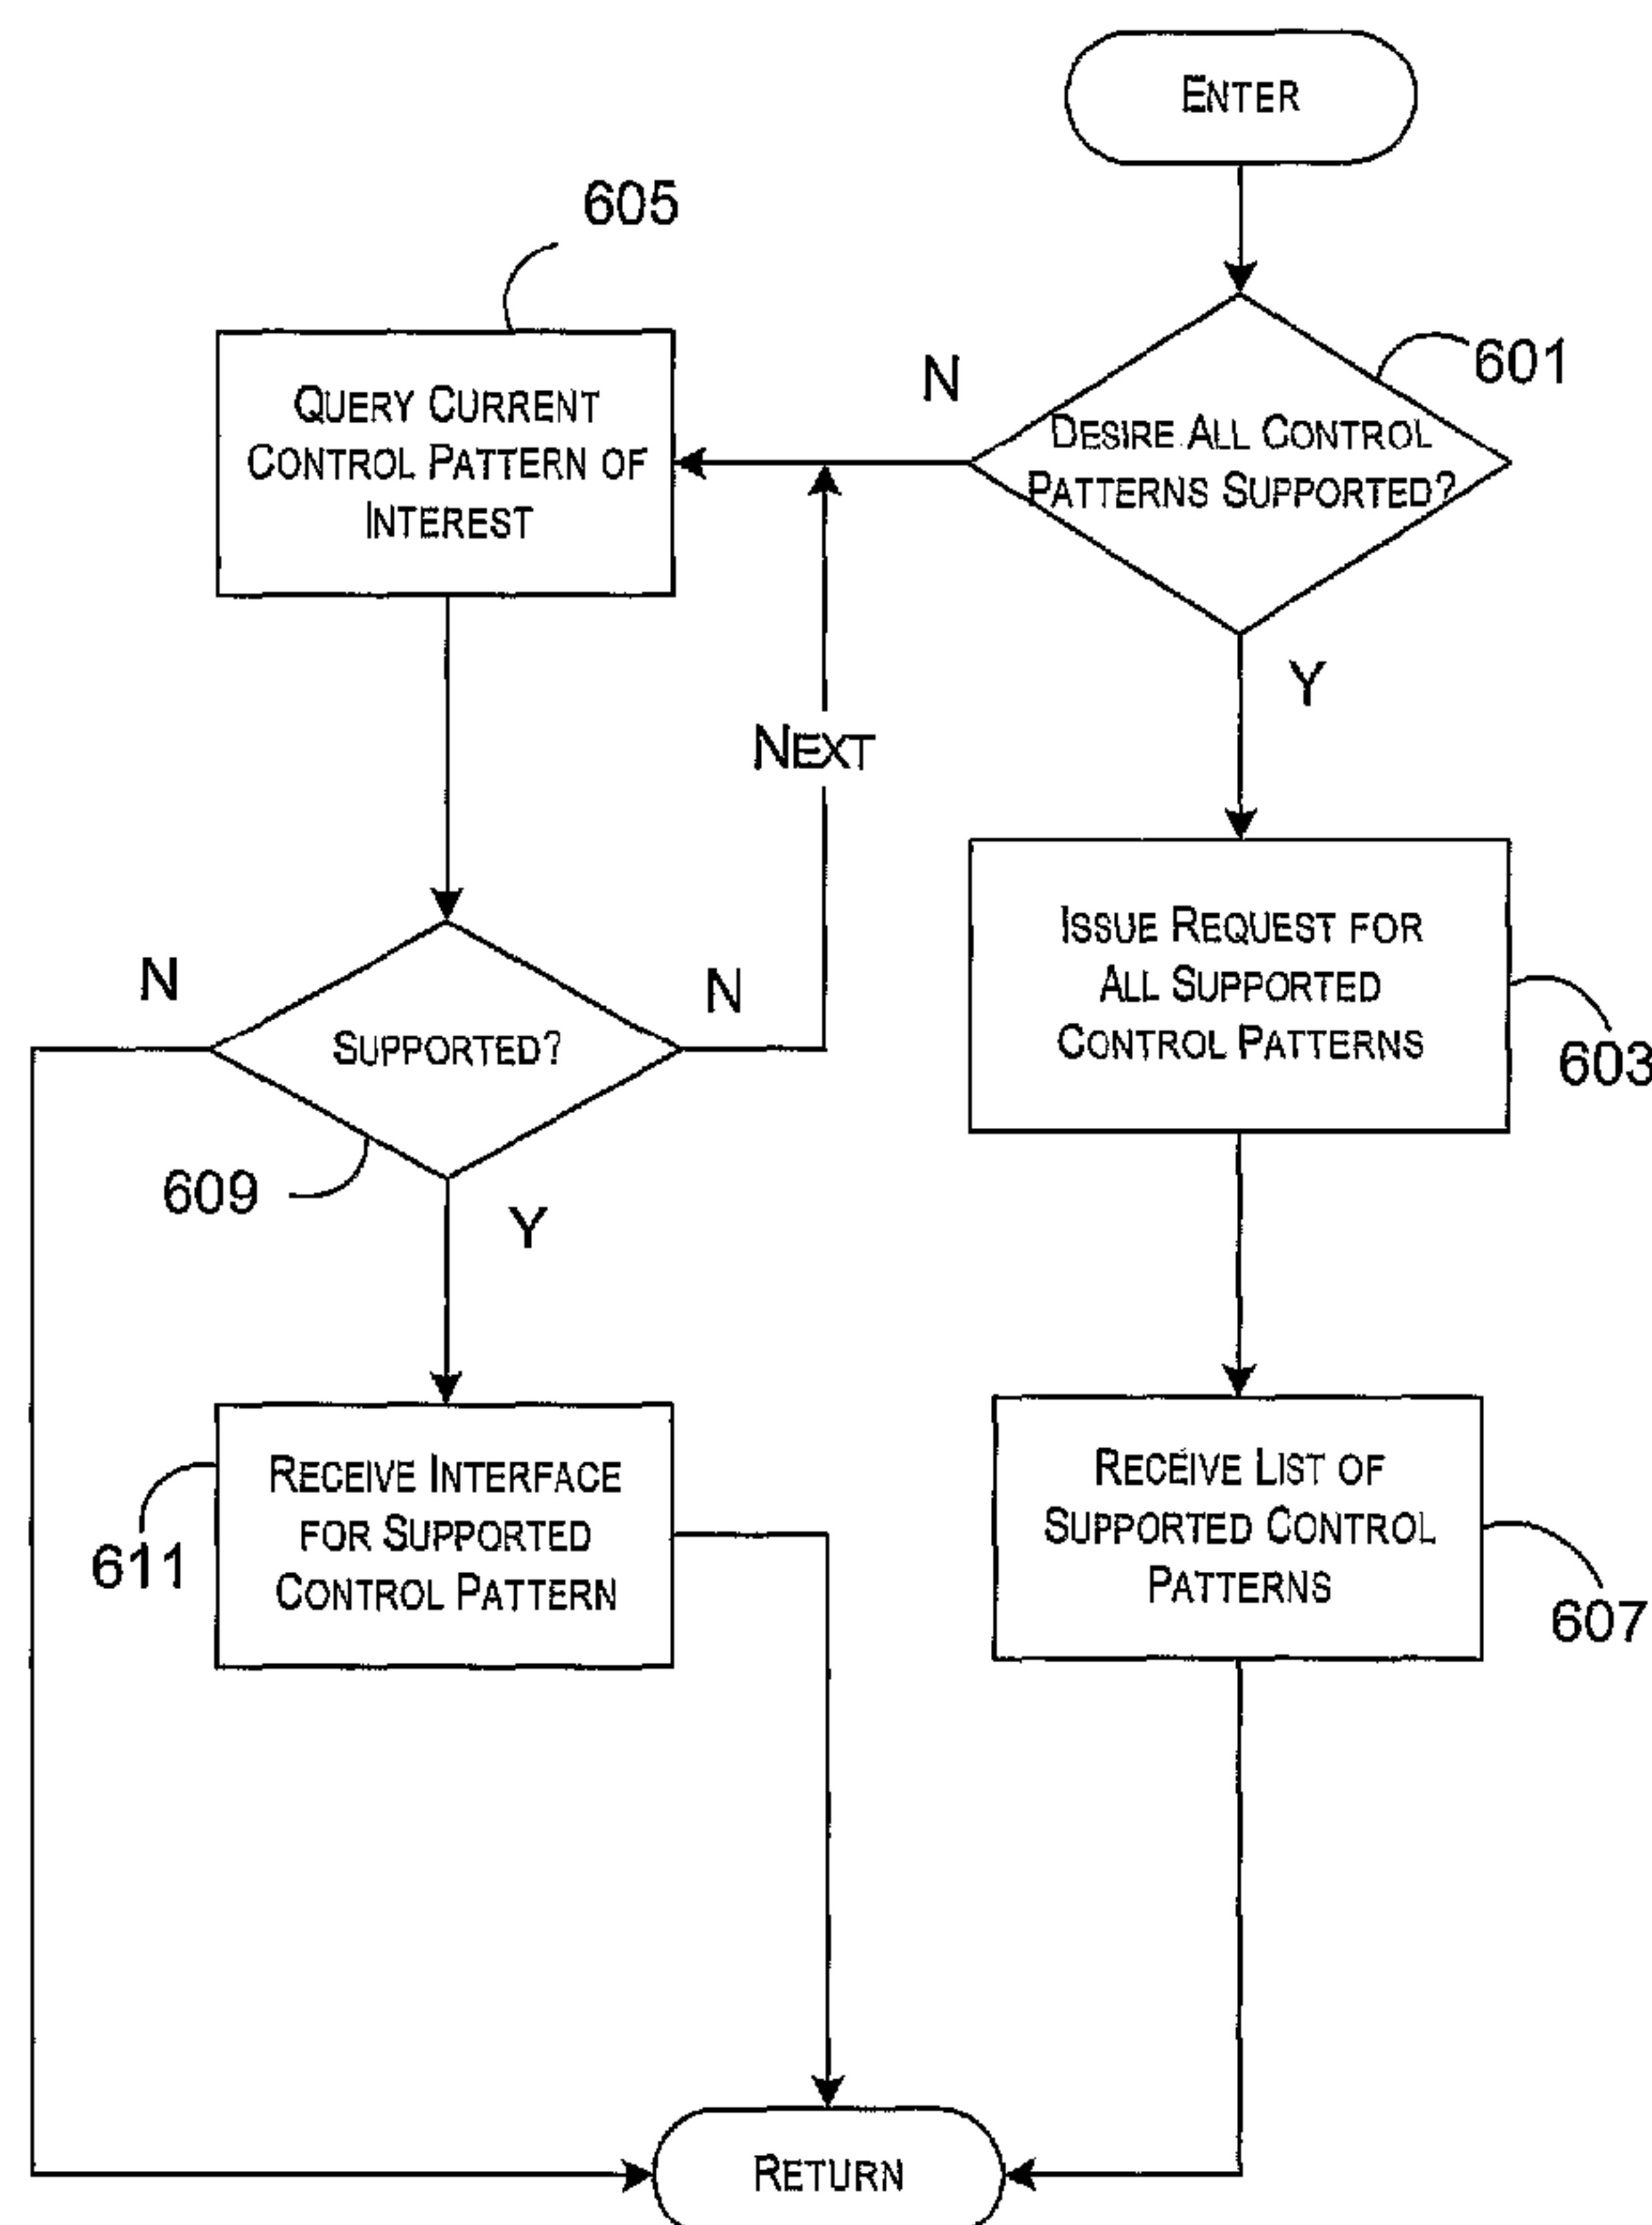

(57) Abrégé/Abstract:

Control patterns (603) are used to describe functionality that may be exposed by two or more types of elements or controls. Functionality that is common among two or more types of elements is described by the same control pattern. Certain predefined



(57) **Abrégé(suite)/Abstract(continued):**

methods, structures, properties, and/or events may be associated with a particular control pattern. Elements (601) that support the control pattern, when queried (605), return an interface (611) that describes those methods, structures, properties, and/or events. Control patterns are mutually exclusive in the functionality they represent, so they may be combined in arbitrary ways to expose the complete set of functionality offered by a particular control.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number
WO 2004/031937 A1

(51) International Patent Classification⁷: **G06F 3/14**, 9/14

(21) International Application Number:
PCT/US2003/015706

(22) International Filing Date: 17 May 2003 (17.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/414,863 30 September 2002 (30.09.2002) US

(71) Applicant: **MICROSOFT CORPORATION** [US/US];
One Microsoft Way, Redmond, WA 98052 (US).

(72) Inventors: **SINCLAIR, Robert, E.**; 24136 NE 6th Place,
Sammamish, WA 98074 (US). **WAGONER, Patricia,
M.**; 23723 NE 61st Street, Redmond, WA 98053 (US).

BURNS, Heather, S.; 17819-2 NE 96th Way, Redmond,
WA 98052 (US). **REID, Paul, J.**; 21400 NE 184th Place,
Woodinville, WA 98072 (US). **MCKEON, Brendan**;
1705 Summit Avenue, #307, Seattle, WA 98122 (US).


(74) Agent: **DAIGNAULT, Ronald, A.**; Merchant & Gould
P.C., P.O. Box 2903, Minneapolis, MN 55402-0903 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC,
VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: SYSTEM AND METHOD FOR MAKING USER INTERFACE ELEMENTS KNOWN TO AN APPLICATION AND USER

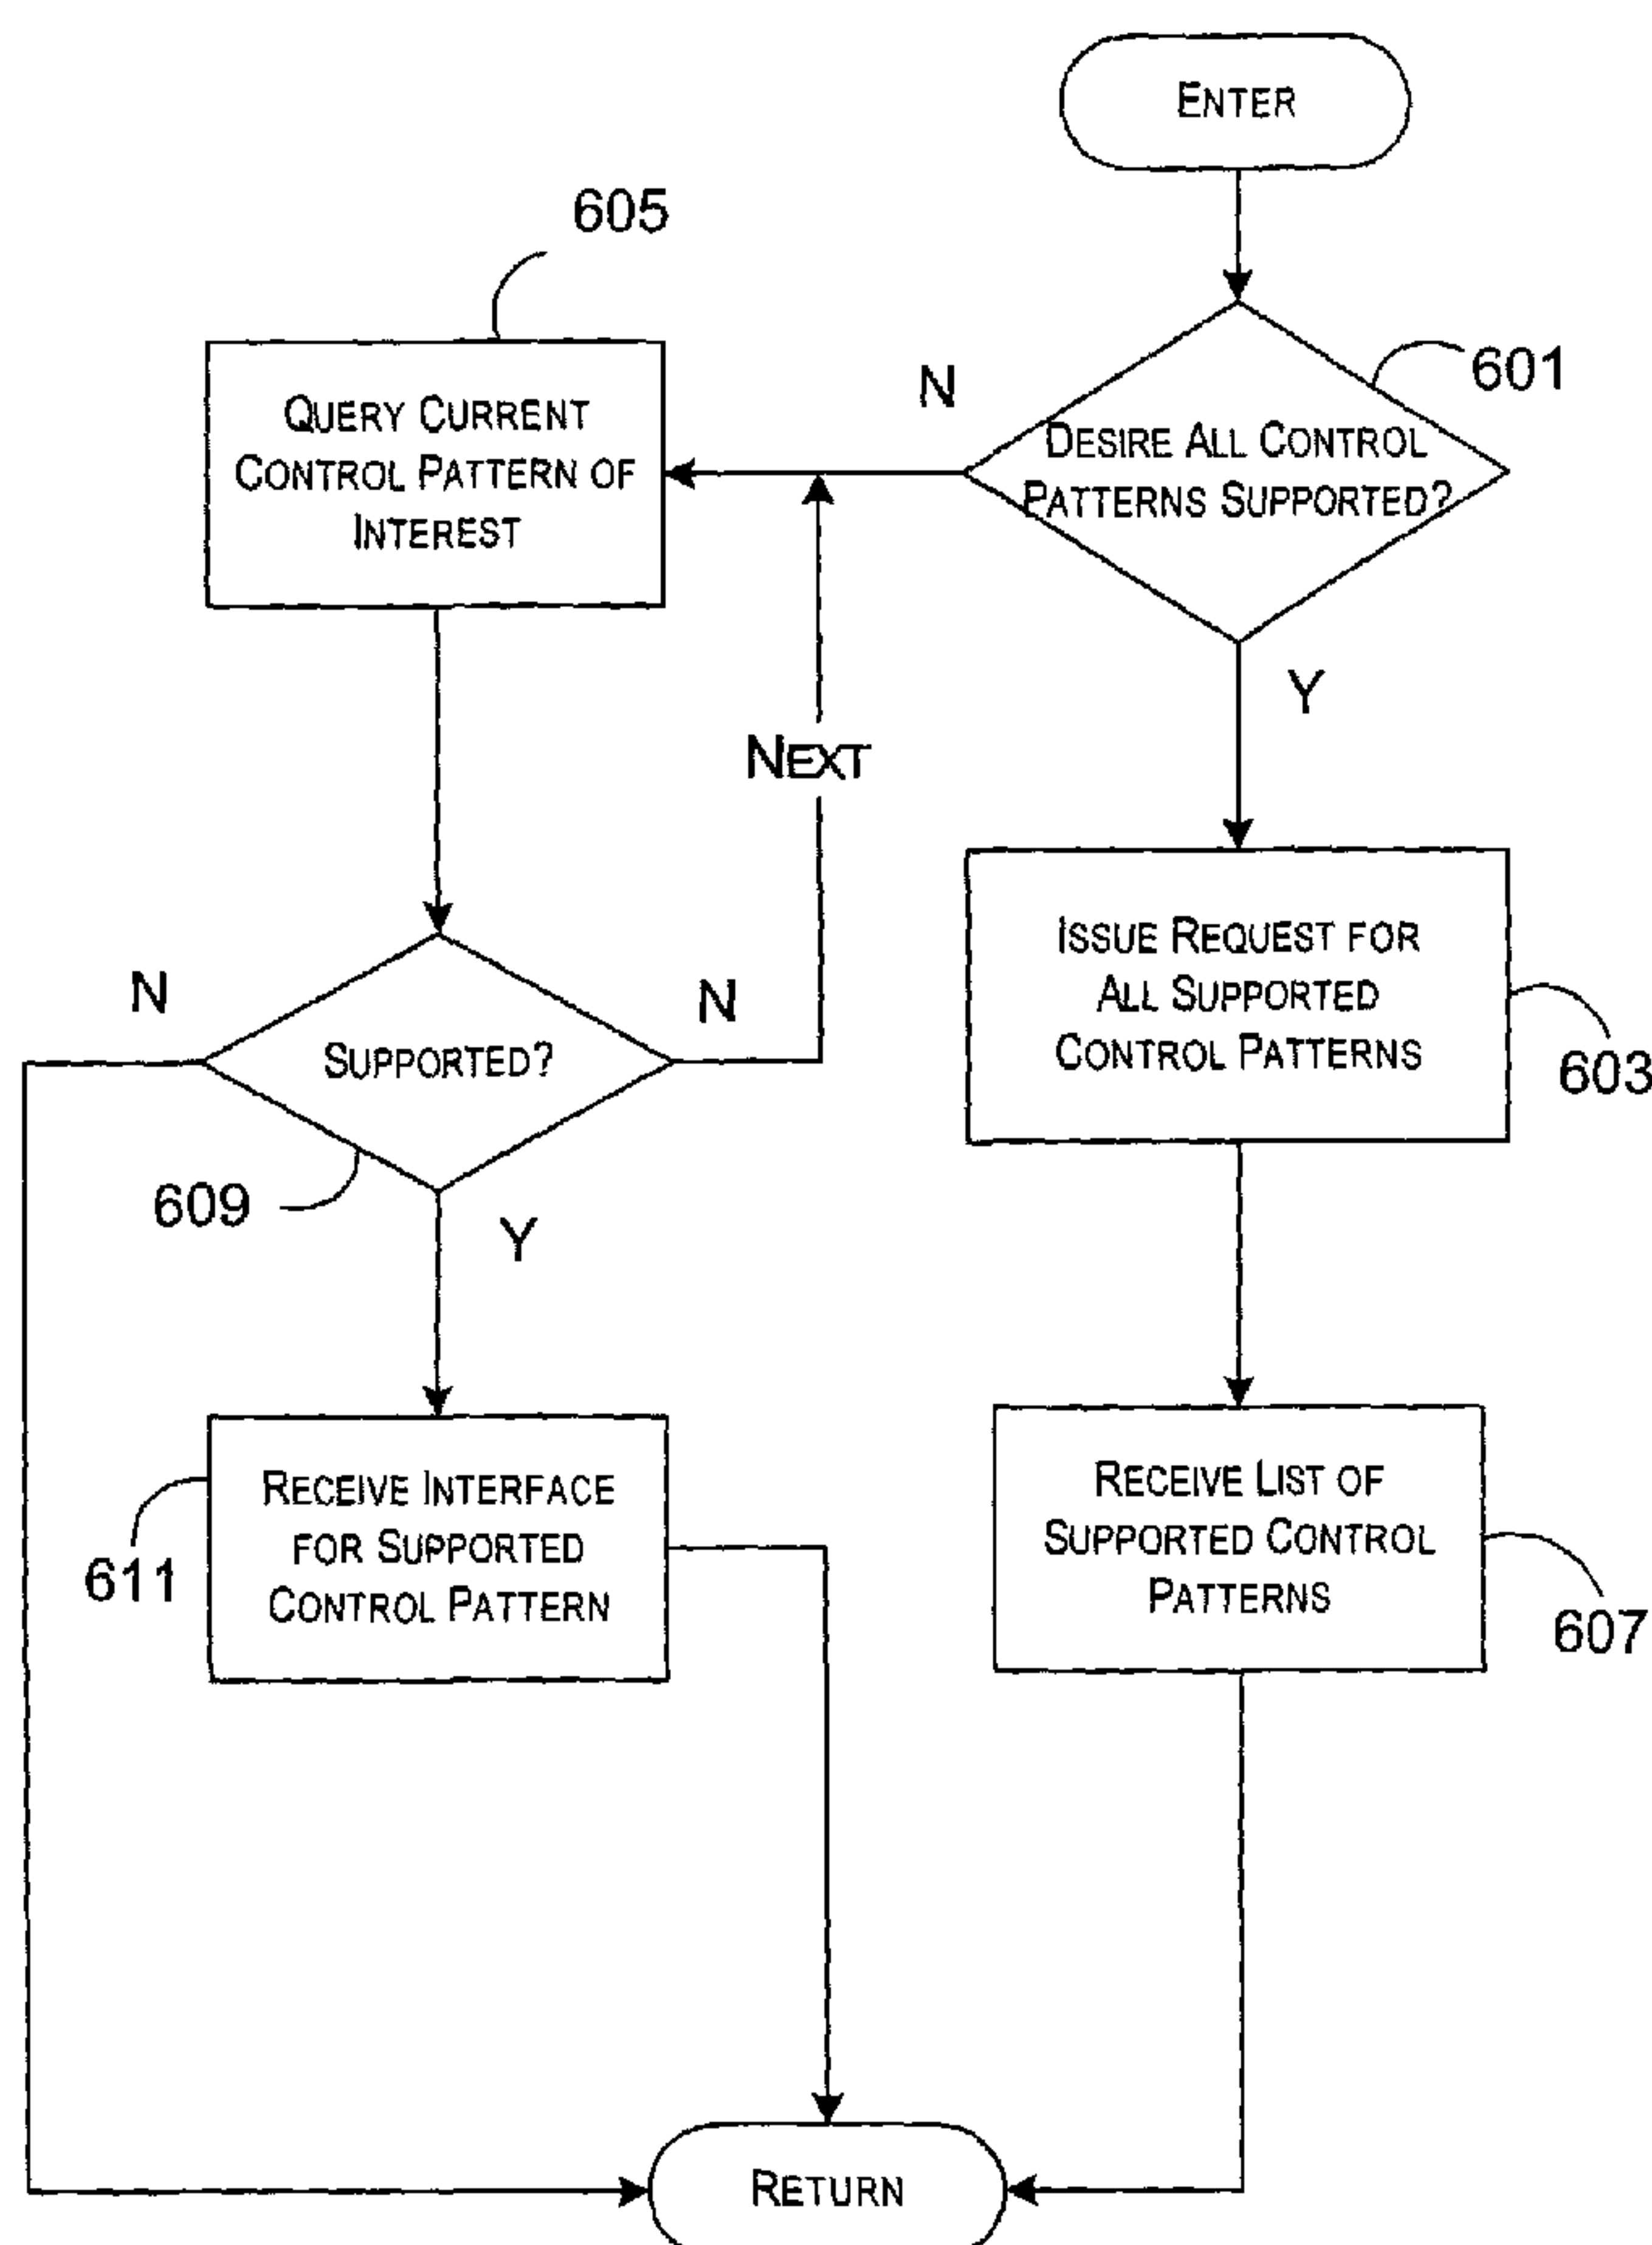

(57) Abstract: Control patterns (603) are used to describe functionality that may be exposed by two or more types of elements or controls. Functionality that is common among two or more types of elements is described by the same control pattern. Certain predefined methods, structures, properties, and/or events may be associated with a particular control pattern. Elements (601) that support the control pattern, when queried (605), return an interface (611) that describes those methods, structures, properties, and/or events. Control patterns are mutually exclusive in the functionality they represent, so they may be combined in arbitrary ways to expose the complete set of functionality offered by a particular control.

WO 2004/031937 A1

WO 2004/031937 A1



ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

**SYSTEM AND METHOD FOR MAKING USER INTERFACE ELEMENTS
KNOWN TO AN APPLICATION AND USER**

This application is being filed as a PCT application filed May 17, 2003 by
5 MICROSOFT CORPORATION., a United States national and resident, designating
all countries except US. Priority is claimed to US Provisional Application Serial
No. 60/414,863 filed on 30 September 2002.

Field of the Invention

The present invention relates to computer software, and more
10 particularly, to user interface accessibility features of computer software.

Background of the Invention

Some individuals may not be able to interact with a computer user
interface the way it is commonly used. For instance, small icons and type pose a
challenge for the visually impaired. Audible alerts and feedback are useless to the
15 hearing impaired. The computing industry is sensitive to these needs. Some
operating systems come with additional accessibility features that enable those with
disabilities to modify the user interface in ways that are more accommodating to
their needs. For instance, some operating systems allow users to enable visual
feedback where audible feedback would otherwise be used. In addition, extra large
20 screen fonts and high contrast schemes may be used for users with low vision. For
those with extreme visual impairments, such as the blind, some operating systems
provide "screen readers" that narrate the elements of the user interface to the user or
provide infrastructure allowing another company to provide such a screen reader.

A typical screen reader utility executes concurrently with whatever
25 application the user may be working with. As the user navigates from element to
element, such as by tabbing from one button to another, the screen reader sends
information about the current element to a text-to-speech engine and/or a refreshable
Braille display to convey that information to the user. Text-to-speech engines
translate this information into synthesized speech to announce it to the user.
30 Refreshable Braille displays translate that information into a well-defined pattern of
dots (i.e., Braille characters) and raise pins on a physical hardware device
corresponding to each dot in the Braille characters. In the case of a button, the

screen reader often conveys the name of the button and the current state of that button (e.g., it is currently disabled and therefore cannot be pressed). Similarly, if a user is in a word processing application, the screen reader can be configured to identify the foreground window (i.e., name of the application) and the current line,
5 sentence, word, or character closest to the insertion point. The screen reader can also describe attributes of that text, such as the font name, weight, color, emphasis, and justification. Often times, the screen reader also informs the user what actions the user may currently take. For instance, if the user has navigated to a button, the screen reader may notify the user that they may press the button by tapping the space
10 bar.

Screen readers are indispensable for computer users with certain visual impairments. In general, many users would simply not be able to take advantage of a computer without an assistive technology product that compensates for their loss of mobility, sensory perception, or other facilities that can be enhanced
15 through technology. However, current software design methodologies make assistive technology products, such as screen readers, difficult to design. As mentioned, the assistive technology product typically receives a notification of a change to a currently-running application or the operating system environment itself. Often this notification takes the form of an event indicating that focus has changed
20 from one element (e.g., a button or list box) to another element (e.g., an edit field, icon, or the like) or that a new element has been created or destroyed (e.g., a window has been opened or closed). A selection manager associated with the application raises the event and notifies the operating system of the change. In response, the assistive technology product may query the selection manager to determine what
25 element is associated with the event (e.g., which element has the focus) so it may obtain additional information to convey to the user.

Currently, assistive technology products essentially are only able to request from the element a limited set of information such as its type (e.g., button, list box, or the like), its location on the screen, or its caption. The assistive
30 technology product itself must then deduce from the returned element type what functionality is available to the user. In other words, the assistive technology product must understand what a "button" is and that the button may be pressed (invoked). Therefore, the designers of a good assistive technology product must

51028-41

predefine all of the types of elements that might be included in an application and identify their functionality. This is an impossible task because there are new types of screen elements or controls produced on a routine basis by software companies throughout the software industry. In addition, this is an inefficient use of resources
5 because not all elements are unique. Many elements share similar functionality, such as the ability to be invoked or the ability to manage a collection of items where one or more items may be selected.

A more general class of applications, automation utilities, has nearly the same set of requirements as these assistive technology products. In general,
10 automation utilities need the ability to dynamically discover screen elements (e.g., controls) whether by traversing the object hierarchy of elements or by receiving an event notification, such as when the focus changes from one control to another. These utilities also need a general mechanism for querying these elements for human-readable information that can be conveyed to the user or stored for later
15 reference. Finally, automation utilities need the ability to discover what functionality or behavior is offered by a particular screen element, even when the element is completely unknown to the automation utility. Unfortunately, a superior mechanism for discovering elements of a user interface and querying and manipulating their associated functionality in such a way that it can be applied to the full spectrum of
20 possible elements has eluded those skilled in the art.

51028-41

Summary of the Invention

Some embodiments of the present invention are directed at making functionality of a user interface element (or control) programmatically available to an application without having prior knowledge of the element's type. In addition, some
5 embodiments of the present invention are directed at a mechanism for providing software developers control over the information that may be conveyed to a user using an automation utility, such as an assistive technology product (e.g., a screen reader for the blind). Briefly stated, control patterns are used to describe functionality that may be exposed by one or more types of elements. Functionality that is
10 common among two or more types of elements is described by the same control pattern. Certain predefined methods, structures, properties, and/or events may be associated with a particular control pattern. Elements that support the control pattern, when queried, return an interface that describes those methods, structures, properties, and/or events. In this way, an automation utility may manipulate an
15 element without having prior knowledge of the functionality supported by the element, so long as the element is able to confirm that it supports a particular control pattern or set of control patterns.

In another aspect, a plurality of properties are included with each element that defines, in human-readable form, a set of information that may be useful
20 to the automation utility or a user of the utility. In this way, software developers have greater control over exactly what information may be gathered and presented to the user when an element is described, thereby improving the user experience.

According to one particular aspect of the invention, there is provided a computer-implemented method for programmatically manipulating a user interface
25 element, the method comprising: requesting from the user interface element whether the user interface element supports a control pattern, the user interface element being of a particular user interface element type, the control pattern describing basic functionality exposed by a plurality of types of user interface elements; and if the user

51028-41

interface element supports the control pattern, returning an interface that comprises at least one method supported by the user interface element and programmatically manipulating, by an automation utility, the user interface element using at least one method comprised in the returned interface and exposed by the user interface

5 element, the returned interface corresponds to the control pattern, whereby the user interface element is programmatically manipulated by the automation utility through the returned interface associated with the control pattern based on its support of the control pattern without reference to the user interface element's type.

There is also provided a computer program product comprising

10 computer-readable memory tangibly embodying computer-readable code for programmatically manipulating a user interface element, said code comprising: an automation utility configured to gather information about a user interface element, the information being stored within a property of the user interface element, the automation utility being further configured to programmatically manipulate the user

15 interface element by querying whether the user interface element supports a control pattern, and if so, programmatically manipulating the user interface element in accordance with the control pattern; wherein the control pattern describes basic functionality exposed by a plurality of types of user interface elements, and wherein programmatically manipulating the user interface element comprises returning an

20 interface and manipulating the user interface element by the automation utility through the returned interface associated with the control pattern using at least one method exposed by the user interface element that corresponds to the control pattern, said interface comprising said at least one method, and the returned interface being returned by the user interface element in response to the query

25 whether the user interface element supports the control pattern.

Brief Description of the Drawings

FIGURE 1 is a functional block diagram that illustrates a computing device that may be used in implementations of the present invention.

51028-41

FIGURE 2 is a functional block diagram generally illustrating a screen display of a system implementing an embodiment of the present invention.

FIGURE 3 is a graphical representation of an object tree that represents the elements shown in the screen display of FIGURE 2.

5 FIGURE 4 is a graphical representation of a sub-free of the object tree shown in FIGURE 3.

FIGURE 5 is a logical flow diagram generally illustrating a process that may be employed by an assistive technology product to describe and manipulate screen elements for a user, in accordance with an embodiment of the invention.

10 FIGURE 6 is a logical flow diagram generally illustrating a process for querying an object to determine what behavior it exposes, in accordance with an embodiment of the invention.

Detailed Description of the Preferred Embodiment

15 The invention provides a mechanism that enables an automation utility, such as an assistive technology product, automated testing script, macro recorder, or commanding application, to gather descriptive information about a user interface element and to determine what functionality that element provides without knowing exactly what type of element it is. Briefly stated, the inventors have determined that each element or control includes two aspects of interest to the

automation utility: (1) the information that describes its appearance, location, and current state, and (2) the functionality that the element exposes. In view of this determination, the invention involves assigning a plurality of properties to an element that includes a description of what the element is in such a fashion that it
5 may be communicated to a user (e.g., human readable form). The invention further involves identifying groups of functionality that may be made available by the element and which can be accessed directly without discovering exactly what the element is.

The invention will be described here first with reference to one
10 example of an illustrative computing environment in which embodiments of the invention can be implemented. Next, a detailed example of one specific implementation of the invention will be described. Alternative implementations may also be included with respect to certain details of the specific implementation. It will be appreciated that embodiments of the invention are not limited to those
15 described here.

Illustrative Computing Environment of the Invention

FIGURE 1 illustrates a computing device that may be used in illustrative implementations of the present invention. With reference to FIGURE 1, one exemplary system for implementing the invention includes a computing device,
20 such as computing device 100. In a very basic configuration, computing device 100 typically includes at least one processing unit 102 and system memory 104. Depending on the exact configuration and type of computing device, system memory 104 may be volatile (such as RAM), non-volatile (such as ROM, flash memory, etc.) or some combination of the two. System memory 104 typically
25 includes an operating system 105, one or more program modules 106, and may include program data 107. This basic configuration of computing device 100 is illustrated in FIGURE 1 by those components within dashed line 108.

Computing device 100 may have additional features or functionality. For example, computing device 100 may also include additional data storage devices
30 (removable and/or non-removable) such as, for example, magnetic disks, optical disks, or tape. Such additional storage is illustrated in FIGURE 1 by removable storage 109 and non-removable storage 110. Computer storage media may include volatile and nonvolatile, removable and non-removable media implemented in any

method or technology for storage of information, such as computer readable instructions, data structures, program modules, or other data. System memory 104, removable storage 109 and non-removable storage 110 are all examples of computer storage media. Computer storage media includes, but is not limited to, RAM, ROM, 5 EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by computing device 100. Any such computer storage media may be part of device 100.

10 Computing device 100 may also have input device(s) 112 such as keyboard 122, mouse 123, pen, voice input device, touch input device, scanner, etc. Output device(s) 114 such as a display, speakers, printer, etc. may also be included. These devices are well known in the art and need not be discussed at length here.

Computing device 100 may also contain communication connections 15 116 that allow the device to communicate with other computing devices 118, such as over a network. Communication connections 116 is one example of communication media. Communication media may typically be embodied by computer readable instructions, data structures, program modules, or other data in a modulated data signal, such as a carrier wave or other transport mechanism, and includes any 20 information delivery media. The term "modulated data signal" means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared and other wireless media. The term 25 computer readable media as used herein includes both storage media and communication media.

Illustrative Implementation of the Invention

FIGURE 2 is a functional block diagram generally illustrating components of one system implementing the present invention. Illustrated in 30 FIGURE 2 are an automation utility (e.g., an assistive technology product) 201 and an application 202. The application 202 includes multiple elements. For the purpose of this discussion, the term element means any component of the user interface with which a user can interact or that provides some meaningful

information to the user or functionality to the application 202. The term control is also used sometimes to identify such elements. The user can interact with many of the elements illustrated in application 202. For example, the application 202 includes a menu bar 212 with multiple menus, each menu having an associated series of menu items. An edit menu 214 includes a drop-down menu list with multiple menu items 215.

Some elements are included within other elements. For example, a list view 220 includes some icons, such as icon 222. A frame 225 contains a combo box 230 and two buttons, button 231 and button 232. In addition, both the frame 225 and the list view 220 are contained on a tabbed dialog element 221. In common computer terminology, each element that is contained within another element is considered a child of that containing element. Thus, the combo box 230 is a child of the frame 225. The frame 225 and the list box 220 are children of the tabbed dialog element 221.

A user may navigate from one element to another in several ways. One way is to maneuver a mouse pointer from one element to another element. Another way may be to press a tab key or a directional-arrow key. The element to which a user has navigated, the “currently-active” element, is considered to have “focus.” For instance, as illustrated in FIGURE 2, menu item 216 is selected and currently has focus. As the user navigates from one element to another element, the automation utility 201 can be notified automatically of the element which has gained focus. In the case where the automation utility 201 is a screen reader, it retrieves the name or label of the newly focused element and “speaks” that information to the user. The screen reader may read the title of the active window, menu options, the text that is typed, and the like. In actuality, the screen reader gathers textual information and then passes it to a text-to-speech engine that converts that text into synthesized speech output. Although described here as a screen reader, it will be appreciated that the automation utility may be any of a number of different types of utilities, such as speech and dictation software, command and control utilities, macro recorders, automated test script, commanding utility, or the like.

As described above, in the past, the automation utility 201 would have simply determined the type of element currently having focus and used its control type (e.g., button, menu item, editable text field, or the like) to extract

control-specific information to be conveyed to the user. As will be described in greater detail shortly, in accordance with the invention, the elements are configured to include a plurality of common and special properties that collectively describe that element and can be used by an automation utility 201 to supplement the user's
5 experience. By exposing information about an element through these properties, developers have greater control over defining what information will be conveyed to the user when using an automation utility 201 that utilizes the present invention. In other words, rather than being limited to type-based information associated with on-screen elements, the automation utility 201 can be made to convey any human-
10 readable string of information for a particular element and describe the behavior or purpose of that element to the user.

Many of the elements are interactive and present functionality that causes the application 202 to perform in its intended manner. For instance, clicking button 231 likely results in some reaction by the application 202. Clicking
15 button 232 likely results in some other reaction by the application 202. Selecting menu item 216 likely results in still some other reaction.

Although each of the elements may be slightly different, many expose similar basic functional characteristics. Those basic functional characteristics relate to the behavior of the element itself, as opposed to the
20 particular reaction that may occur by the application 202. In other words, button 231 and button 232 are both clickable, even though the application 202 may react in different ways depending on which button was clicked. Likewise, the menu items 215 and items within the combo box 230 are selectable. In contrast, most of the different types of elements also have some basic functionality that is different.
25 For instance, the combo box 230 allows text to be edited within an edit box portion 233 while the menu items 215 do not provide the ability to edit their content.

The inventors have determined certain patterns of basic functionality that are present in many different types of elements. This determination has enabled "control patterns" to be established to describe basic functionality that may be
30 exposed by an element. A control pattern is a mechanism for describing the behavior of an element. More specifically, a particular control pattern may define certain structure, properties, events, and methods supported by an element. Elements may (and likely do) support multiple control patterns. The collection of

control patterns supported by an element defines the totality of the element's behavior.

An application can query whether the element supports a particular control pattern to determine the element's behavior. Thus, without having prior knowledge of a particular element's type, a client application can discover the functionality available for that element by querying whether it supports a particular control pattern. The application may then programmatically manipulate the element through common interfaces associated with that control pattern. New elements may be created with slightly or drastically different behavior, yet applications could still interact with the new elements by querying for the control patterns that the new elements support. The following table represents some illustrative control patterns and the set of behaviors associated with that control pattern:

<u>Name</u>	<u>Description</u>
ApplicationWindow	Exposes the behavior and information typically associated with a top-level application window
Commands	Exposes the set of actions that can be performed by the user ("save" a document, "press" a button, etc.)
DescriptiveInformation	Exposes semantic information for UI elements, especially those which represent other objects (e.g., a list item in a mail program could use this pattern to indicate that it represents an e-mail message and can expose information about its importance, whether it's read or unread, etc.)
Dock	Expose an element's ability to change its docking state at run
ExpandCollapse	Exposes a control's ability to expand to display more content or collapse to hide content
Grid	Exposes basic grid functionality, size and moving to specified cells
GridItem	Used to expose the elements of a Grid
HierarchyItem	Expose and allow clients to traverse the hierarchal relationship between UI elements independent from their relationship in the logical tree. Hierarchy relationships are defined to be non-circular
Invoke	Exposed the ability of an element to be activated or invoked. For example, a button supports this pattern to allow an automation utility to programmatically <i>press</i> the button.
Multimedia	Exposes the ability of an element to present multimedia content, including multiple streams of data in a synchronized manner: closed captions, descriptive audio, ASL stream, alternative languages, etc.

MultipleView	Exposes an element's ability to switch between multiple representations of the same set of information, data, or children
RangeValue	Exposes a related set of properties that reflect a control's ability to manage a value within a finite range. It conveys a control's valid min and max values and its current value
Scroll	Exposes a control's ability to change the portion of its content that is visible to the user
Selection	Exposes the items within a container's collection of children which are currently selected.
SelectedItem	Defines a selectable item in a container and allows that item's selection to be manipulated directly
Sort	Expose a container's current sort order and allow clients to programmatically resort its elements
Split	Exposes the ability to divide an element's content area into multiple panes or interactive areas
Table	Used in conjunction with the Grid pattern to indicate that the Grid also has header information
TableItem	Represents a cell in a table; used to simplify the client's view of a table
Text	Exposes the behavior and functionality associated with editing, formatting, and interpreting large blocks of text
Value	Used to get and set values for controls that do not span a range
VisualInformation	Used to provide a description of the visual appearance of an image, element, animation, control, etc. that provides valuable information to the user
Window	Expose an element's ability to change its on-screen position or size, including being maximized, minimized, and fullscreen
Zoom	Exposes the a control's (e.g., a document viewer) ability to change its zoom level

Table 1. Description of Illustrative Control Patterns

Thus, the elements illustrated in FIGURE 2 can be configured with the appropriate control patterns to represent the type of behavior that may be expected of the particular type of element. What follows is a table that describes some common elements and some control patterns that may be used to define the behavior of those common elements:

<u>Element</u>	<u>Relevant Control Patterns</u>
Button	Commands, Invoke, VisualInformation (if appropriate)

Combo box	ExpandCollapse, Selection, Text, Value
List box	Selection, Scroll, DragAndDrop (if appropriate)
List view	Selection, Scroll, Sort, Grid (in some views), MultipleView, Table, DragAndDrop (if appropriate)
Text box, Edit	Commands, DragAndDrop, Scroll (if appropriate), Text, Zoom (if appropriate)

Table 2. Control Patterns for Common Elements

FIGURE 3 is a graphical illustration of an object tree 301 that represents the elements of the application 202 shown in FIGURE 2. It should be appreciated that one or more objects in the object tree 301 may be a proxy or wrapper object that represents a corresponding element of the application 202. However, for the purpose of simplicity only, this discussion will treat each object in the object tree 301 as the actual element. The main application window is represented as form object 305, and each element of the application 202 includes a corresponding object in the object tree 301. For instance, each portion of the tabbed dialog 221 in FIGURE 2 has a corresponding tab item (tab 306, tab 307, tab 308) in the object tree 301. Similarly, the list view 220 and frame 225 have corresponding objects (list view 311 and frame 312) in the object tree 301. The parent/child relationships are also represented in the object tree 301. For instance, the frame object 312 has child objects (combo box 230, button 321, and button 322) that correspond to the elements contained within the frame 225.

In operation, as the user navigates from one element to another in the application, a selection manager associated with the application 202 notifies the automation utility 201 (illustrated in FIGURE 3 as an object) that the focus has changed. In the case of a screen reader, this focus change may cause the automation utility 201 to query the particular object representing the current element with focus for a plurality of properties and for the control patterns supported by that element. A change in the focus is only one of many possible reasons that an automation utility may choose to query an element for this information.

A sub-tree 401 of the object tree 301 is illustrated in FIGURE 4. To further illustrate the operation, assume the automation utility 201 is a screen reader.

As the user navigates to the button 231, the screen reader may query its corresponding object (button 321) and retrieve its Name property 410, a human readable string, for narration to the user. The Name property 410 contains the string that would be associated with that control by a sighted user looking at the computer display. In this case, the screen reader sends the string "Help Button" to the text-to-speech engine which then narrates that information to the user.

In addition, the automation utility 201 may query the button 321 to identify the control patterns 412 supported by its corresponding element. In this case, one identified control pattern for the button 321 is the "Invoke" control pattern. The control patterns not only allow a client application to query an element's behavior, they also allow it to programmatically manipulate the element via interfaces designed for that particular control pattern. In this example, the automation utility 201 may query the button 321 directly to determine whether it supports the Invoke control pattern. The button 321 may indicate an affirmative response by returning an interface (Interface X 414) that includes a set of methods for taking advantage of the invoke behavior. In another example, a Selection control pattern (associated with the combo box 320) may provide methods to query for selected items, select or deselect a specific item, determine if the element supports single or multiple selection modes, and the like.

Through the mechanisms enabled by the present invention, automation utilities can be written that understand how to work with each control pattern, instead of each UI element or control. Since the discrete types of behaviors that elements will display are relatively few, there will be far fewer control patterns than there are types of elements or controls. This results in less code to write for an automation utility, and it encourages a more flexible architecture for automation utilities that can effectively interrogate and manipulate new elements that support known control patterns.

FIGURE 5 is a logical flow diagram generally illustrating a process that may be employed by an event-driven automation utility that relies on UI Automation events to discover screen elements to be interrogated for property information and manipulated using control patterns. The process begins by either traversing an object hierarchy to locate a particular element of interest (block 510), or it may idle in a loop (block 511) until it receives an event notification which it

previously registered to receive. When an event notification is received, the process continues at block 513.

At block 513, the element of current interest is queried for a plurality of property information required by the user or the automation utility. In one
5 implementation, an automation utility may retrieve from the current element properties that include human-readable strings intended for consumption by the user. The process continues at block 515.

At block 515, the element of interest is queried for control pattern support. One method of doing so is described below in conjunction with FIGURE 6.
10 Briefly stated, to determine how to programmatically manipulate the element, an automation utility may query whether the element supports a particular type of control pattern, or may query the element for the types of control patterns that it supports. Once the supported control patterns are known, the process continues at block 517.

At block 517, the element having focus is manipulated in accordance
15 with its supported control patterns. For example, in response to a query (e.g., block 515) whether a particular control pattern is supported, the element may return an interface including methods that embody the behavior corresponding to the control pattern. Through the use of that interface, the automation utility (or any
20 other client built on the UI Automation Framework and having the appropriate security permissions) may manipulate the element.

FIGURE 6 is a logical flow diagram generally illustrating a process for querying an object to determine what behavior it exposes. The process begins at decision block 601, where an element (represented by an object) has been
25 discovered by an event notification or some other mechanism, such as traversing the UI Automation object hierarchy.

At decision block 601, a determination is made whether knowledge is desired about all the supported control patterns for the element with focus. For instance, some circumstances may warrant querying the element to determine all of
30 its functionality rather than simply whether it behaves in a particular desired manner. One example of such an instance may be in a debugging or testing environment. In those cases, the process continues at block 603. However, more often than not, an

automation utility needs to know whether the element supports a particular behavior. In those cases, the process continues at block 605.

At block 603, a query for the supported control patterns is issued to the element of interest. The query may request a complete list of the control patterns supported by the element. The query may request simply a list or it may request interfaces to each of the supported control patterns. In response, at block 607, the list is received and the requesting utility or application handles it in any appropriate way; however, a common usage is to then use the methods for the returned control pattern to programmatically manipulate the element (e.g., use the InvokePattern.Invoke() method to press the button 321 and thereby display the Help window).

At block 605, a query is issued to the element to determine if it supports a particular control pattern. In many cases, when facilitating the navigation of an application, an automation utility may know what functionality or behavior is expected at a particular point in the application. Accordingly, rather than requesting a list of all the supported control patterns, the automation utility may query whether an element supports a particular control pattern. Thus, at block 605, the automation utility may query an element whether it supports that particular control pattern.

At decision block 609, a determination is made whether the particular control pattern is supported. For instance, the element queried may simply return a failure if the requested control pattern is not supported. In that case, the AT utility may repeat the query at block 605 with another desired control pattern, or it may end if none of the desired control patterns are supported. If the current control pattern is supported, the process continues at block 611. The automation utility can query for support of specific control patterns until all control patterns of interest have been tried. It should be repeated that notice of support for a particular control pattern may be provided by simply returning to the calling automation utility an interface with the method(s) that correspond to the supported control pattern.

At block 611, the interface is received that includes the method(s) that enable the behavior associated with the control pattern. At this point, the automation utility may use the associated control pattern methods to manipulate the element in any appropriate way in accordance with the behavior of the control pattern. It will be appreciated that the disclosed system, components, and processes

have enabled a mechanism by which user interface elements may be made known dynamically to a user and to an application, such as an automation utility, for programmatic manipulation.

5 The above specification, examples and data provide a complete description of the manufacture and use of the composition of the invention. Since many embodiments of the invention can be made without departing from the spirit and scope of the invention, the invention resides in the claims hereinafter appended.

51028-41

CLAIMS:

1. A computer-implemented method for programmatically manipulating a user interface element, the method comprising:

requesting from the user interface element whether the user interface
5 element supports a control pattern, the user interface element being of a particular user interface element type, the control pattern describing basic functionality exposed by a plurality of types of user interface elements; and

if the user interface element supports the control pattern, returning an interface that comprises at least one method supported by the user interface element
10 and programmatically manipulating, by an automation utility, the user interface element using at least one method comprised in the returned interface and exposed by the user interface element, the returned interface corresponds to the control pattern,

whereby the user interface element is programmatically manipulated by
15 the automation utility through the returned interface associated with the control pattern based on its support of the control pattern without reference to the user interface element's type.

2. The computer-implemented method of claim 1, wherein the basic functionality comprises one or more of predefined methods, structures, properties, or
20 events.

3. The computer-implemented method of claim 1, wherein the user interface element supports a plurality of different control patterns.

4. The computer-implemented method of claim 1, wherein the automation utility comprises an assistive technology product, commanding utility, automated test
25 script, macro recorder, speech or dictation software, or command and control utility.

5. The computer-implemented method of claim 1, further comprising:

51028-41

requesting from the user interface element a plurality of properties that can be used by an automation utility to gather information deemed to be important to the user; and

conveying that information to the user.

5 6. The computer-implemented method of claim 1, wherein the control pattern is at least one of a list comprising: ApplicationWindow, Calendar, Commands, DescriptiveInformation, Dock, ExpandCollapse, Graphic, Grid, GridItem, HierarchyItem, Invoke, Multimedia, MultipleView, RangeValue, Rotation, Scroll, Selection, SelectionItem, Sort, Split, Table, TableItem, Text, Value, VisualInformation,
10 Window, Zoom.

7. A computer-readable medium having computer executable instructions for performing the method of claim 1.

8. A computer program product comprising computer-readable memory tangibly embodying computer-readable code for programmatically manipulating a
15 user interface element, said code comprising:

an automation utility configured to gather information about a user interface element, the information being stored within a property of the user interface element, the automation utility being further configured to programmatically manipulate the user interface element by querying whether the user interface element
20 supports a control pattern, and if so, programmatically manipulating the user interface element in accordance with the control pattern;

wherein the control pattern describes basic functionality exposed by a plurality of types of user interface elements, and

wherein programmatically manipulating the user interface element
25 comprises returning an interface and manipulating the user interface element by the automation utility through the returned interface associated with the control pattern

51028-41

using at least one method exposed by the user interface element that corresponds to the control pattern, said interface comprising said at least one method, and the returned interface being returned by the user interface element in response to the query whether the user interface element supports the control pattern.

5 9. The computer program product of claim 8, wherein the control pattern comprises a means for describing behavior of a user interface element.

10. The computer program product of claim 8, wherein the control pattern defines structure, properties, events, and methods supported by the user interface element.

10 11. The computer program product of claim 8, wherein the user interface element supports a plurality of control patterns.

12. The computer program product of claim 8, wherein the user interface element information comprises human-readable text stored within a plurality of properties, the human-readable text referring to an attribute of the user interface
15 element.

13. The computer program product of claim 12, wherein the attribute of the user interface element comprises information about the user interface element that, if conveyed to a user, informs the user about the user interface element.

14. The computer program product of claim 8, wherein said user interface
20 element comprises:

a plurality of properties identifying information about the user interface element, the properties being capable of being conveyed to a user by said automation utility; and

a second field identifying one or more control patterns, each control
25 pattern being associated with a particular behavior of the user interface element.

51028-41


15. The computer program product of claim 14, wherein the properties comprise human-readable text strings.

16. The computer program product of claim 15, wherein the human-readable text strings further comprise information that describes the user interface
5 element such that conveyance of this information informs a user about the user interface element.

17. The computer program product of claim 14, wherein each control pattern describes structure, properties, events, and methods supported by the user interface element.

10 18. The computer program product of claim 14, wherein the control pattern comprises a means for describing basic functionality of a user interface element.

1/6

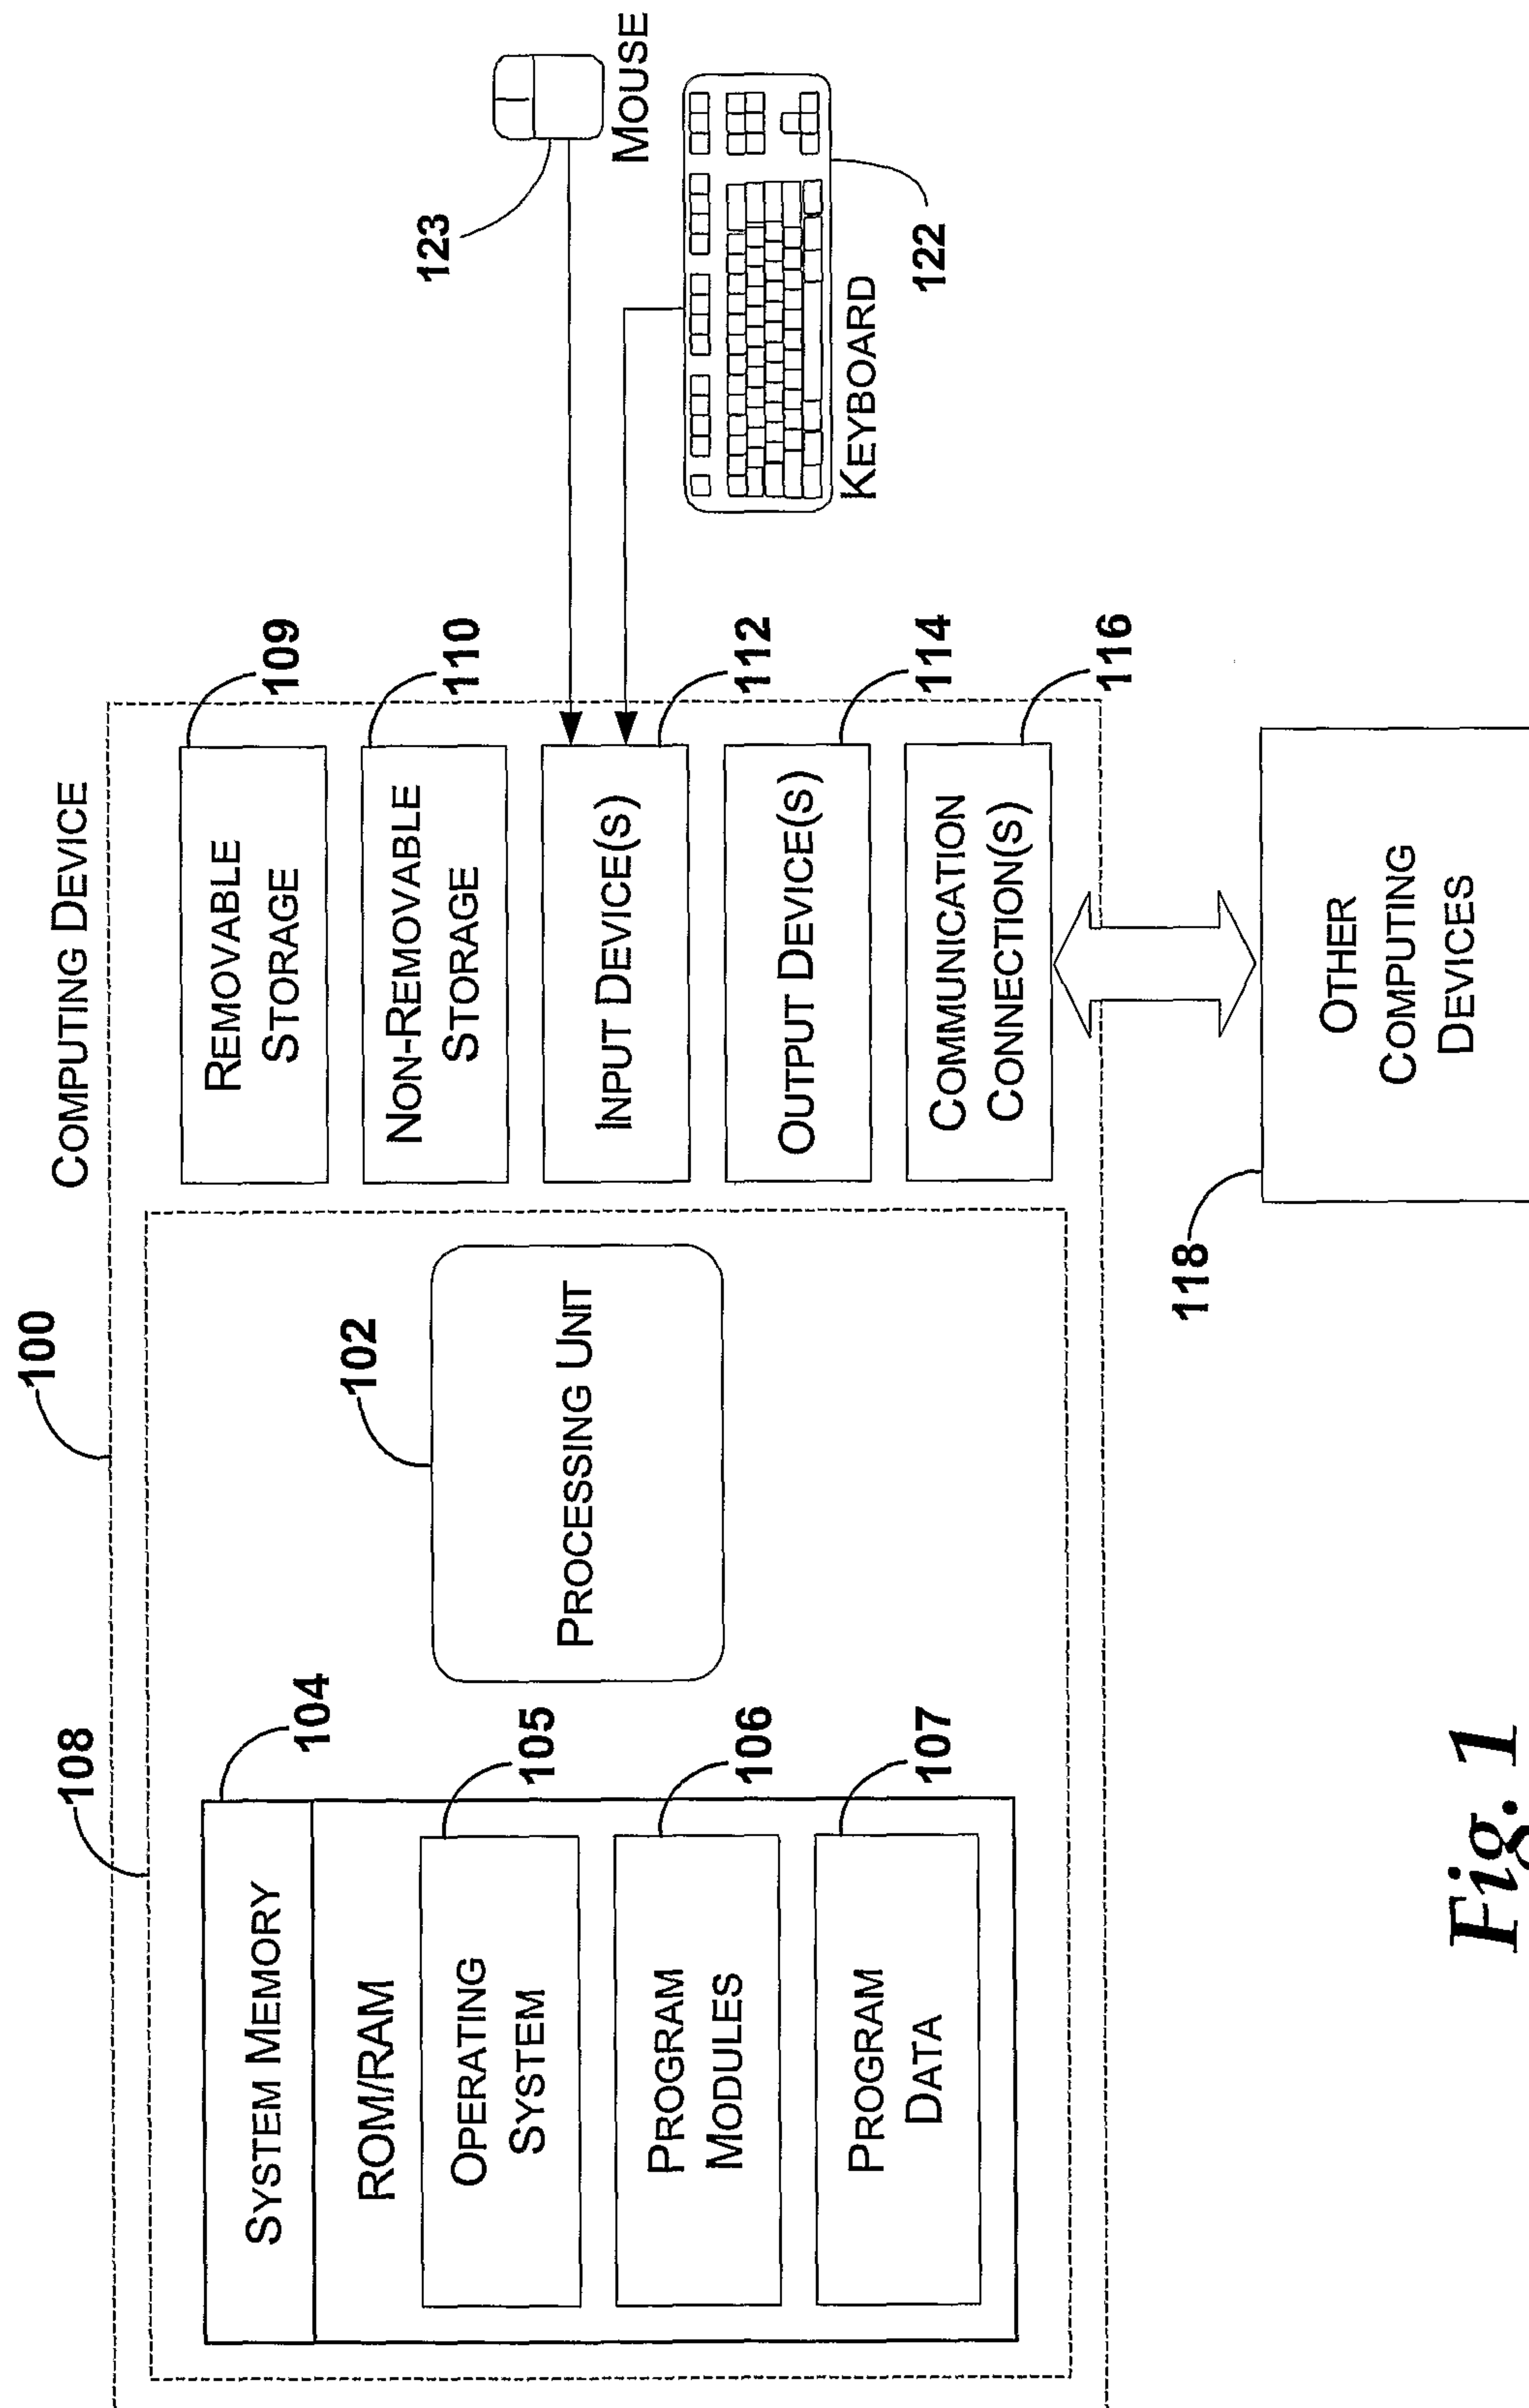*Fig. 1*

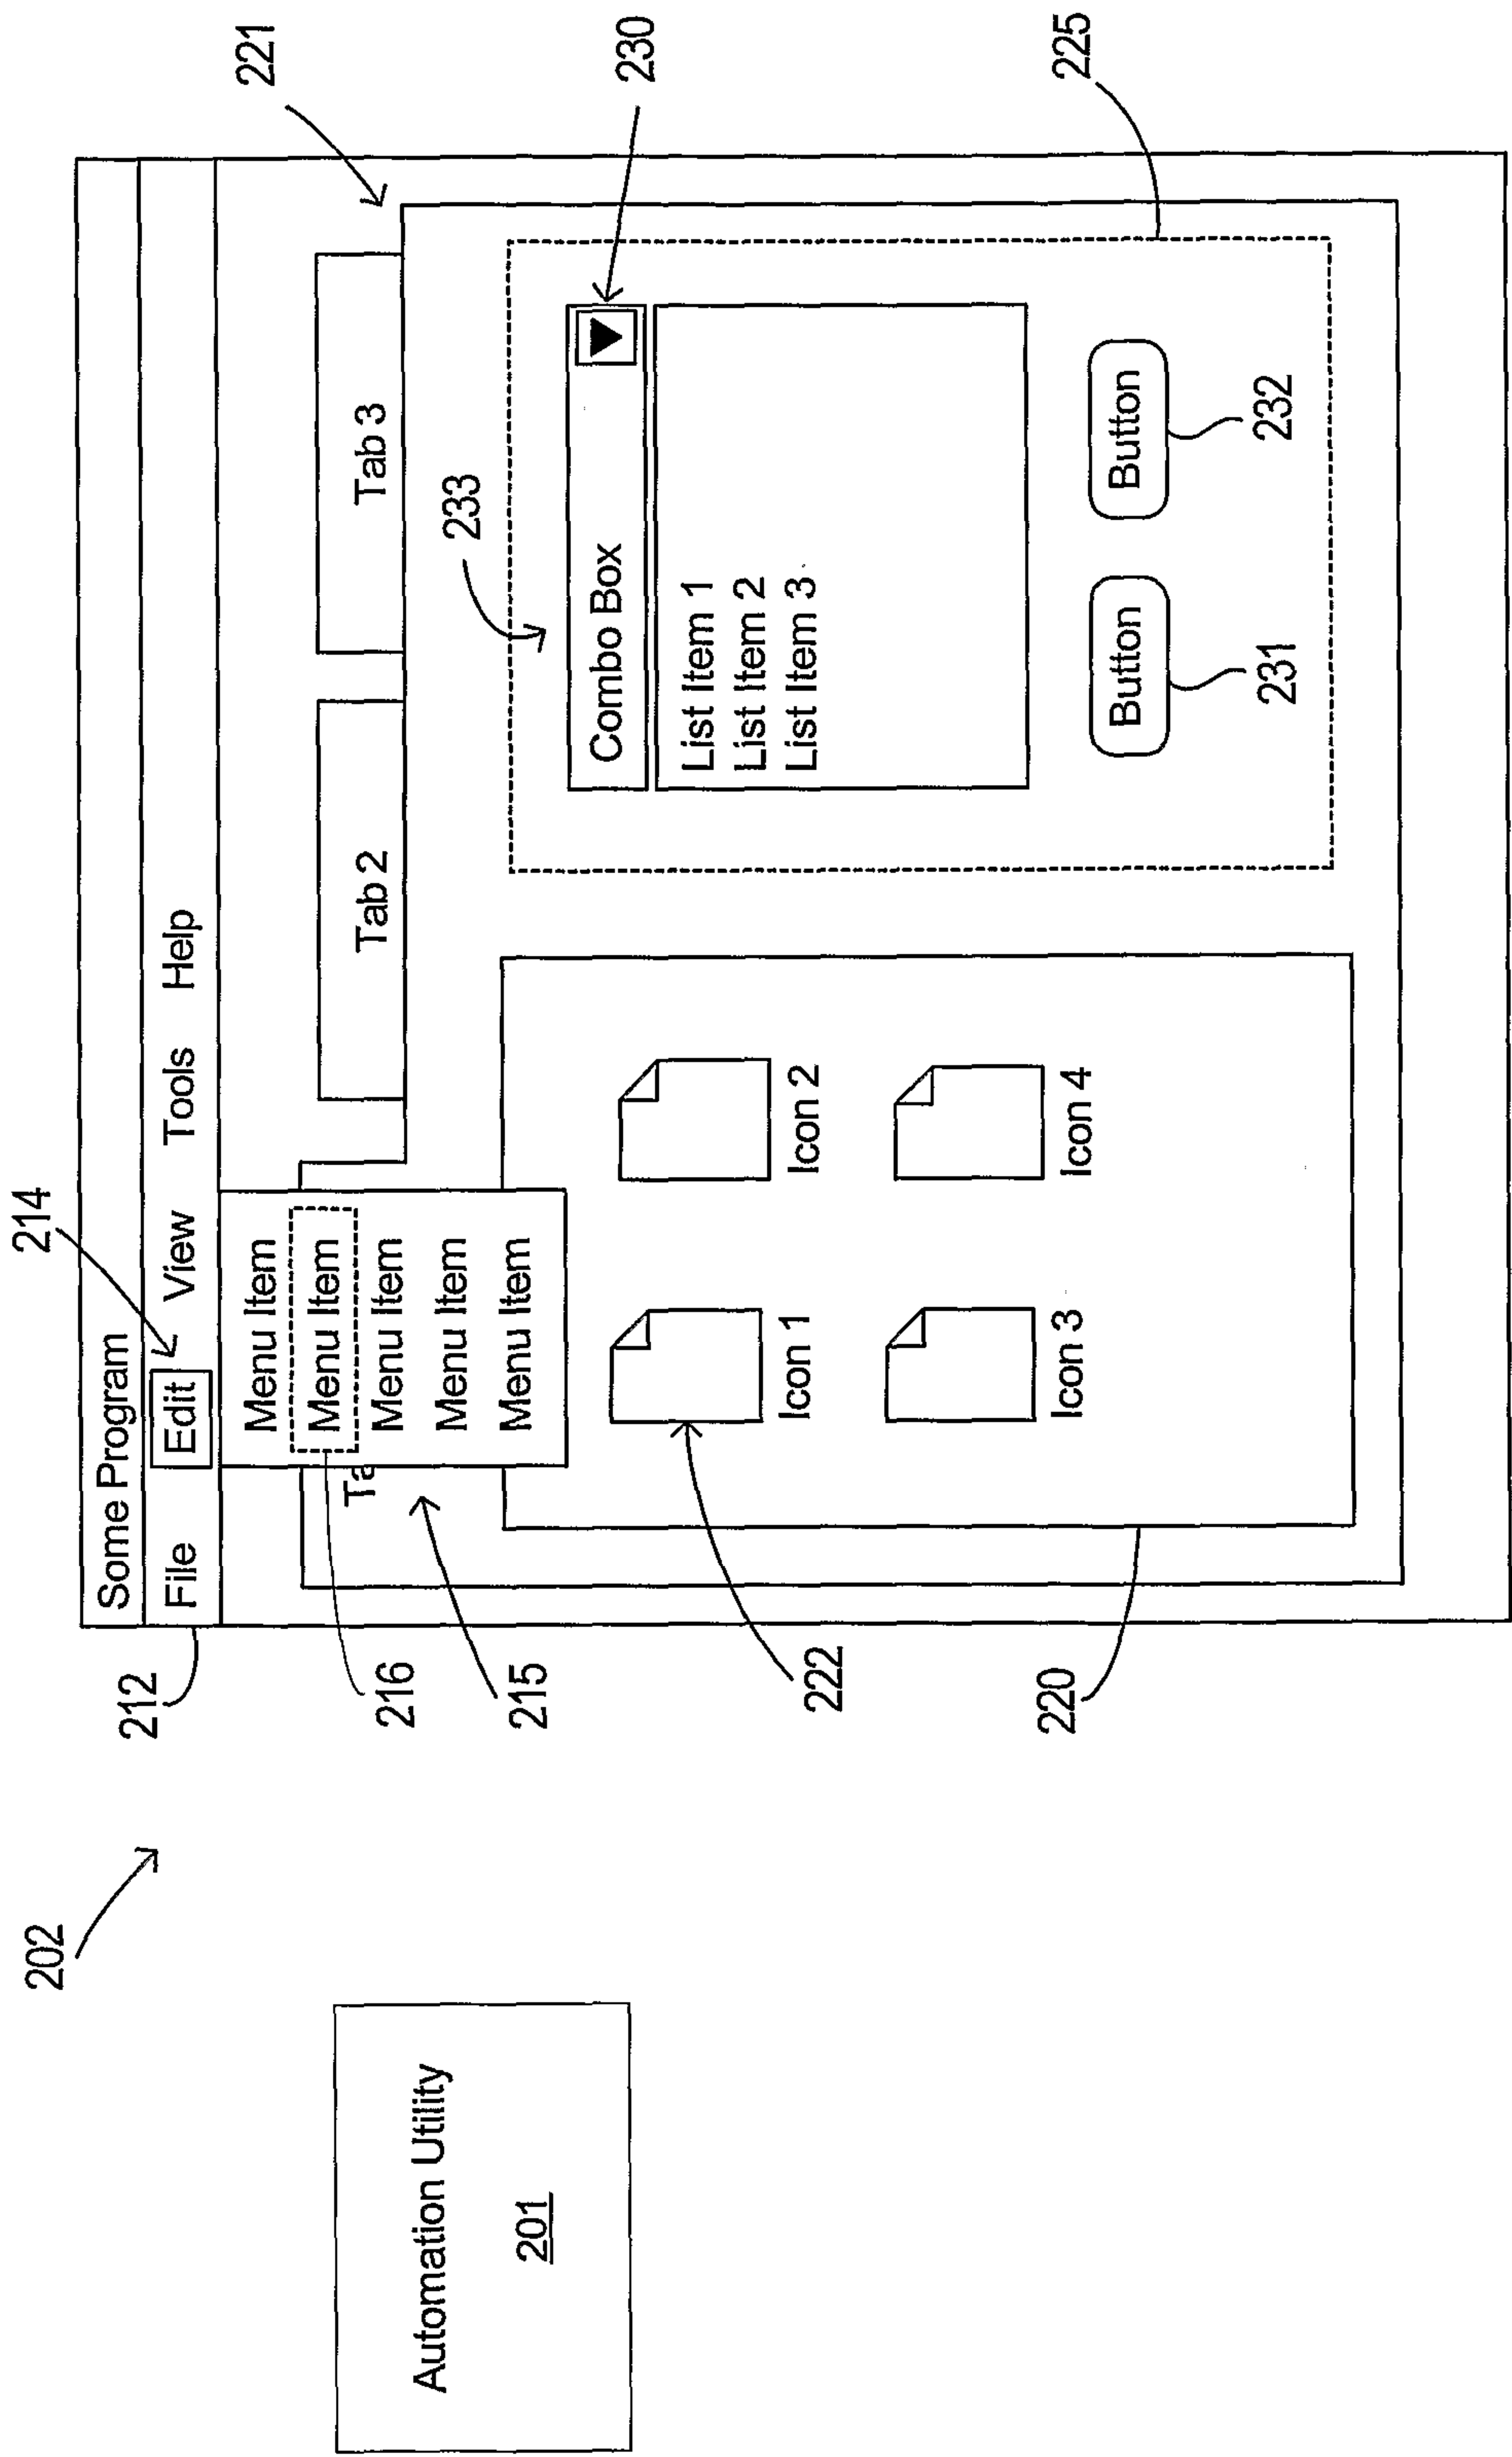
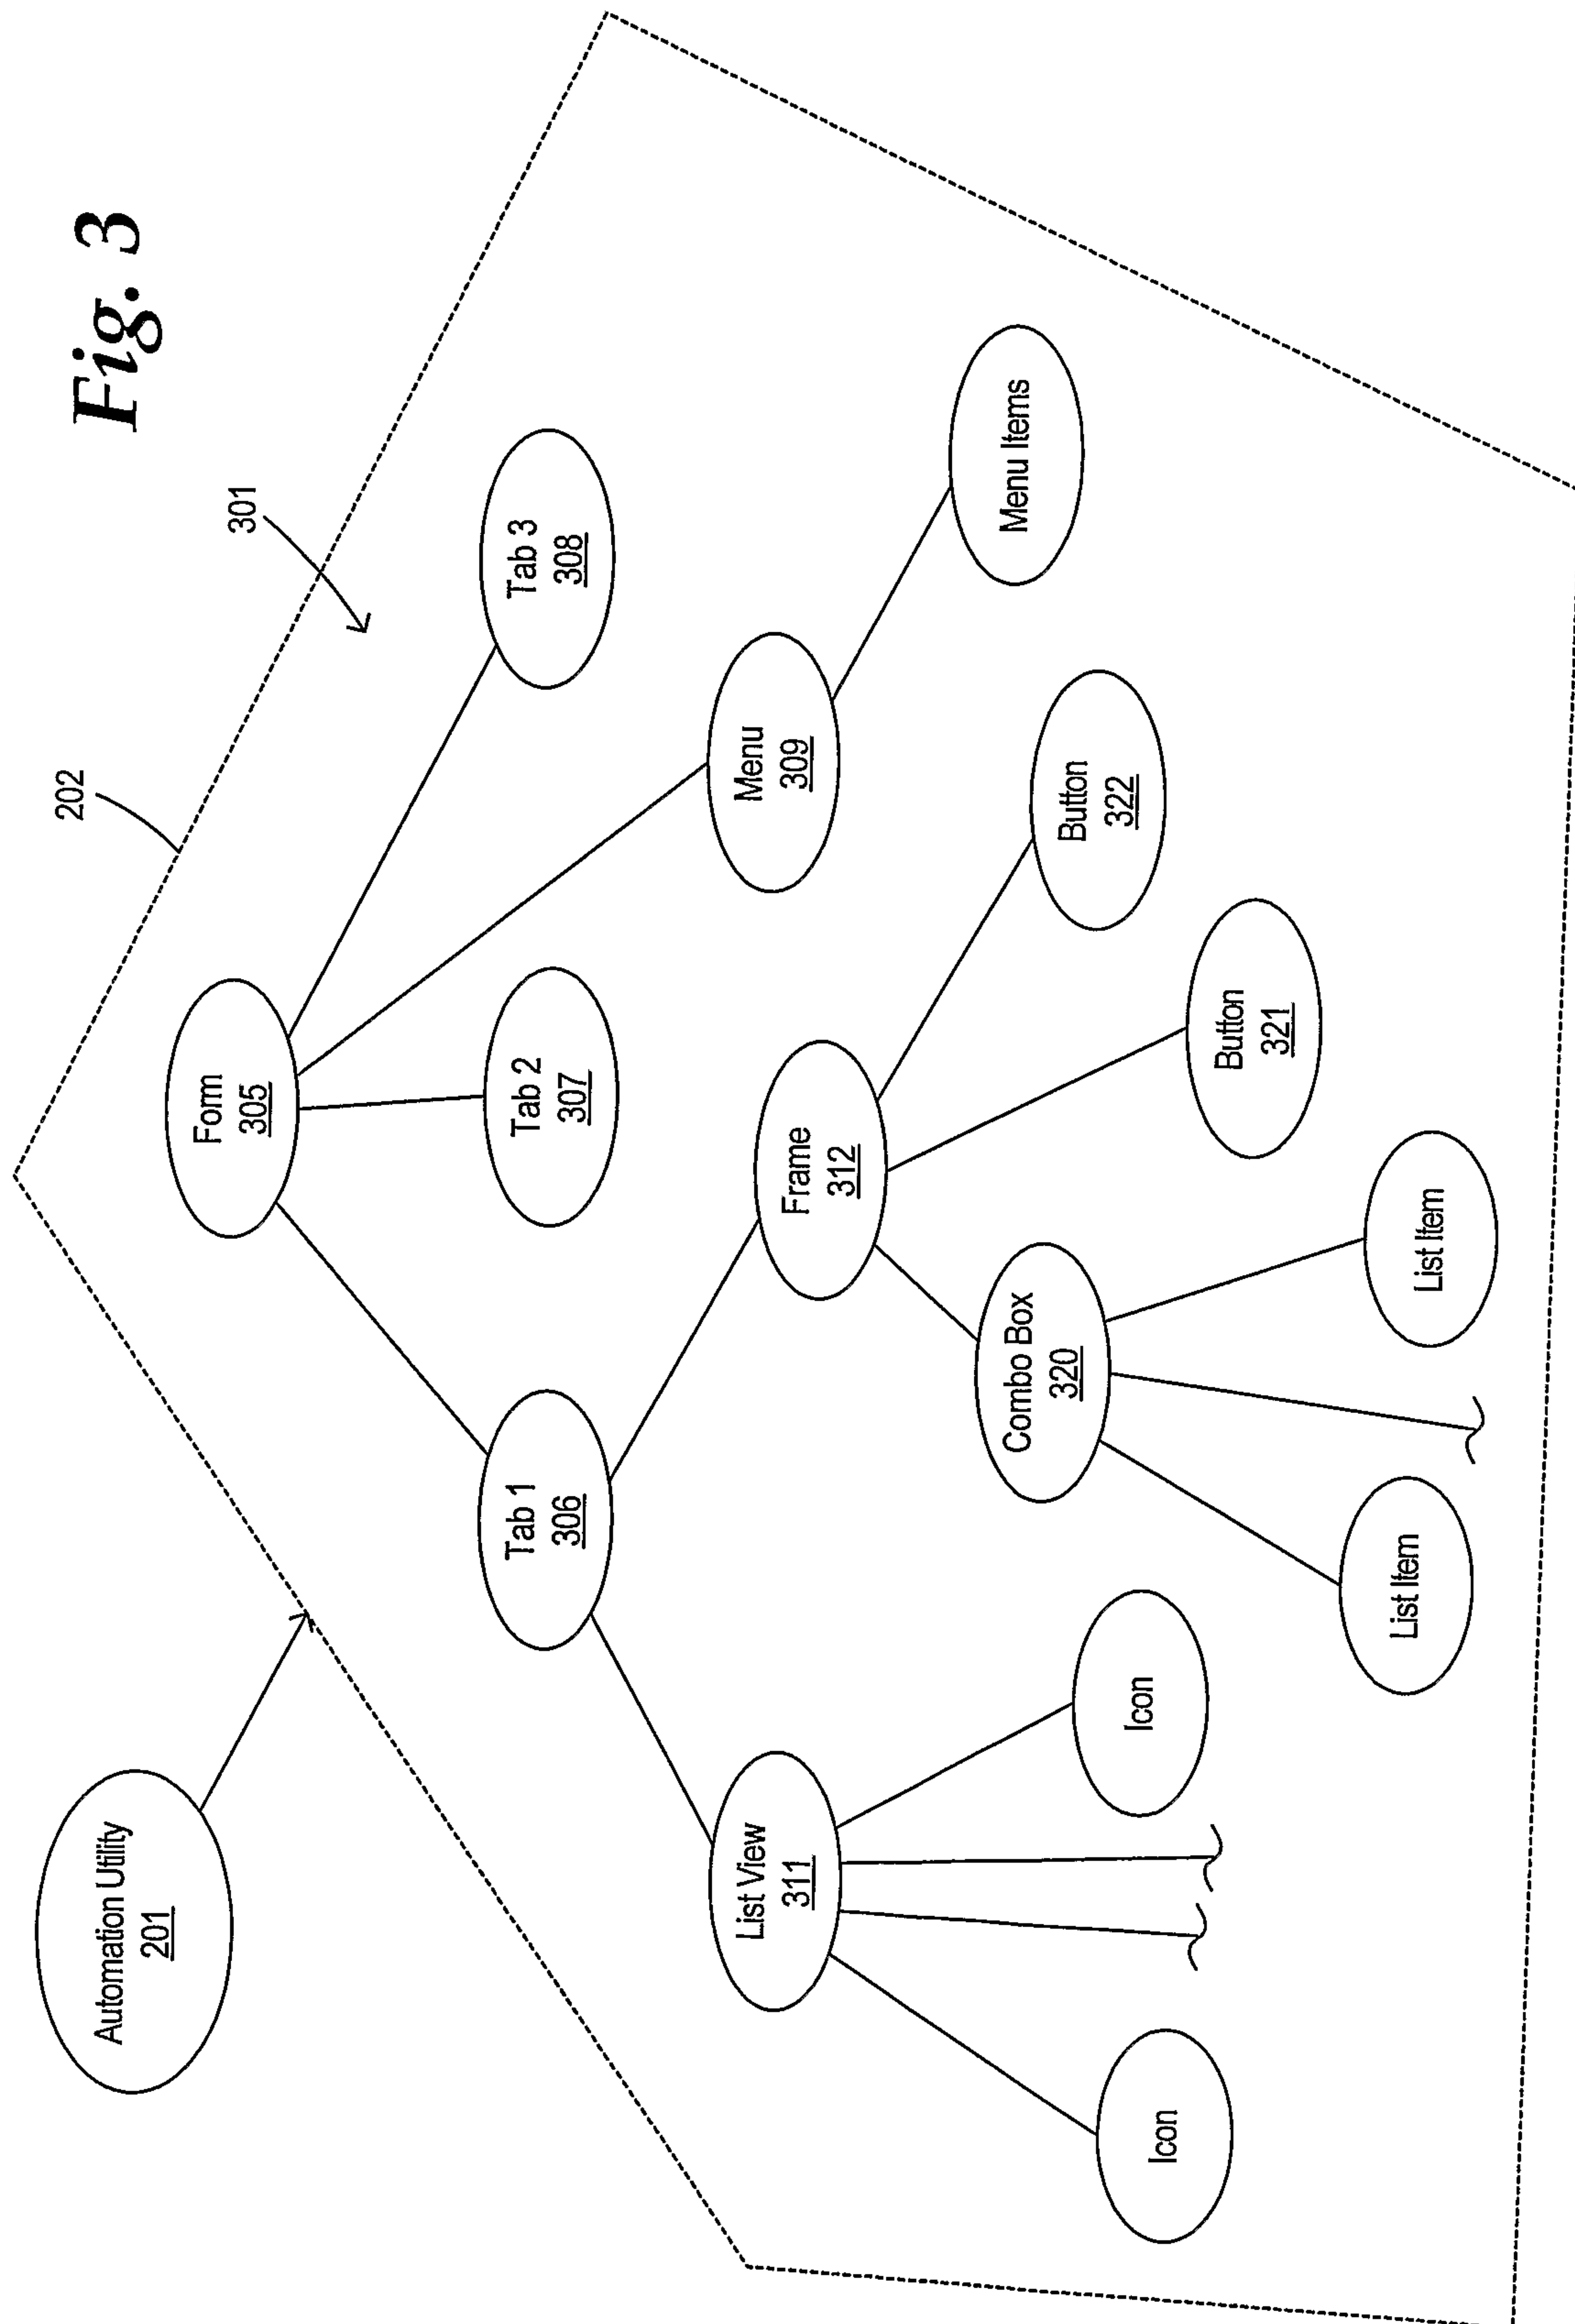


Fig. 2

Fig. 3



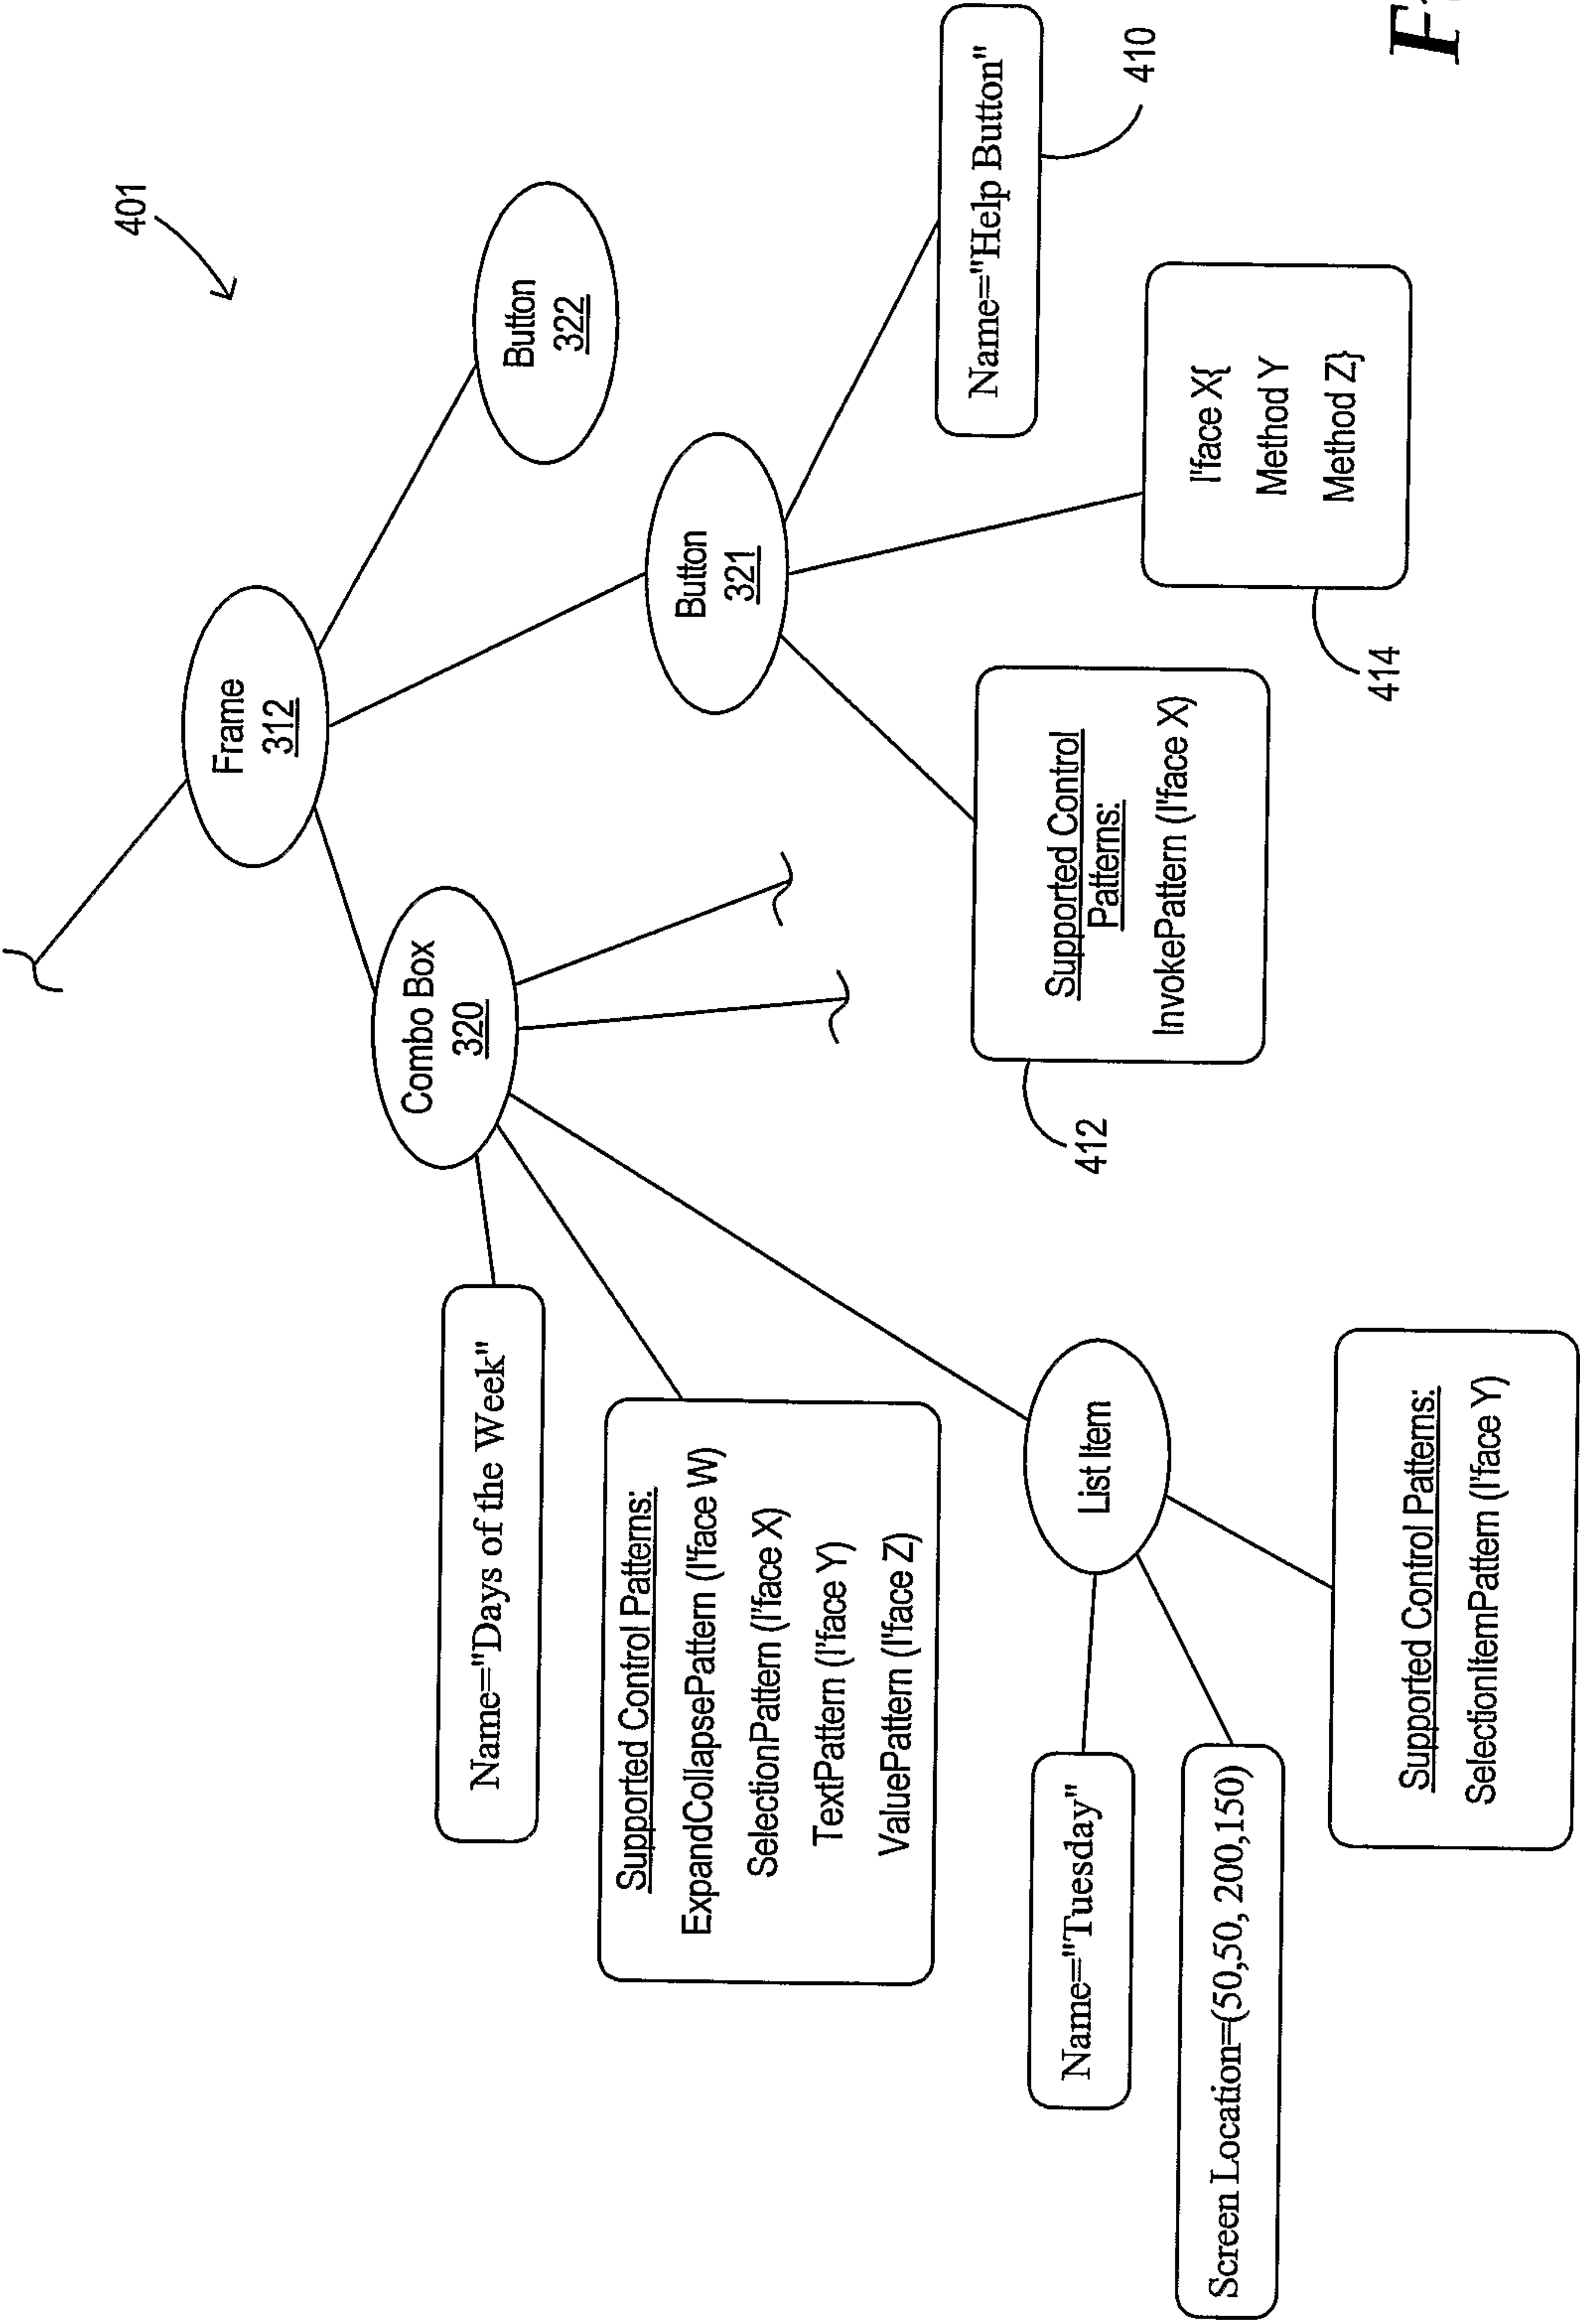
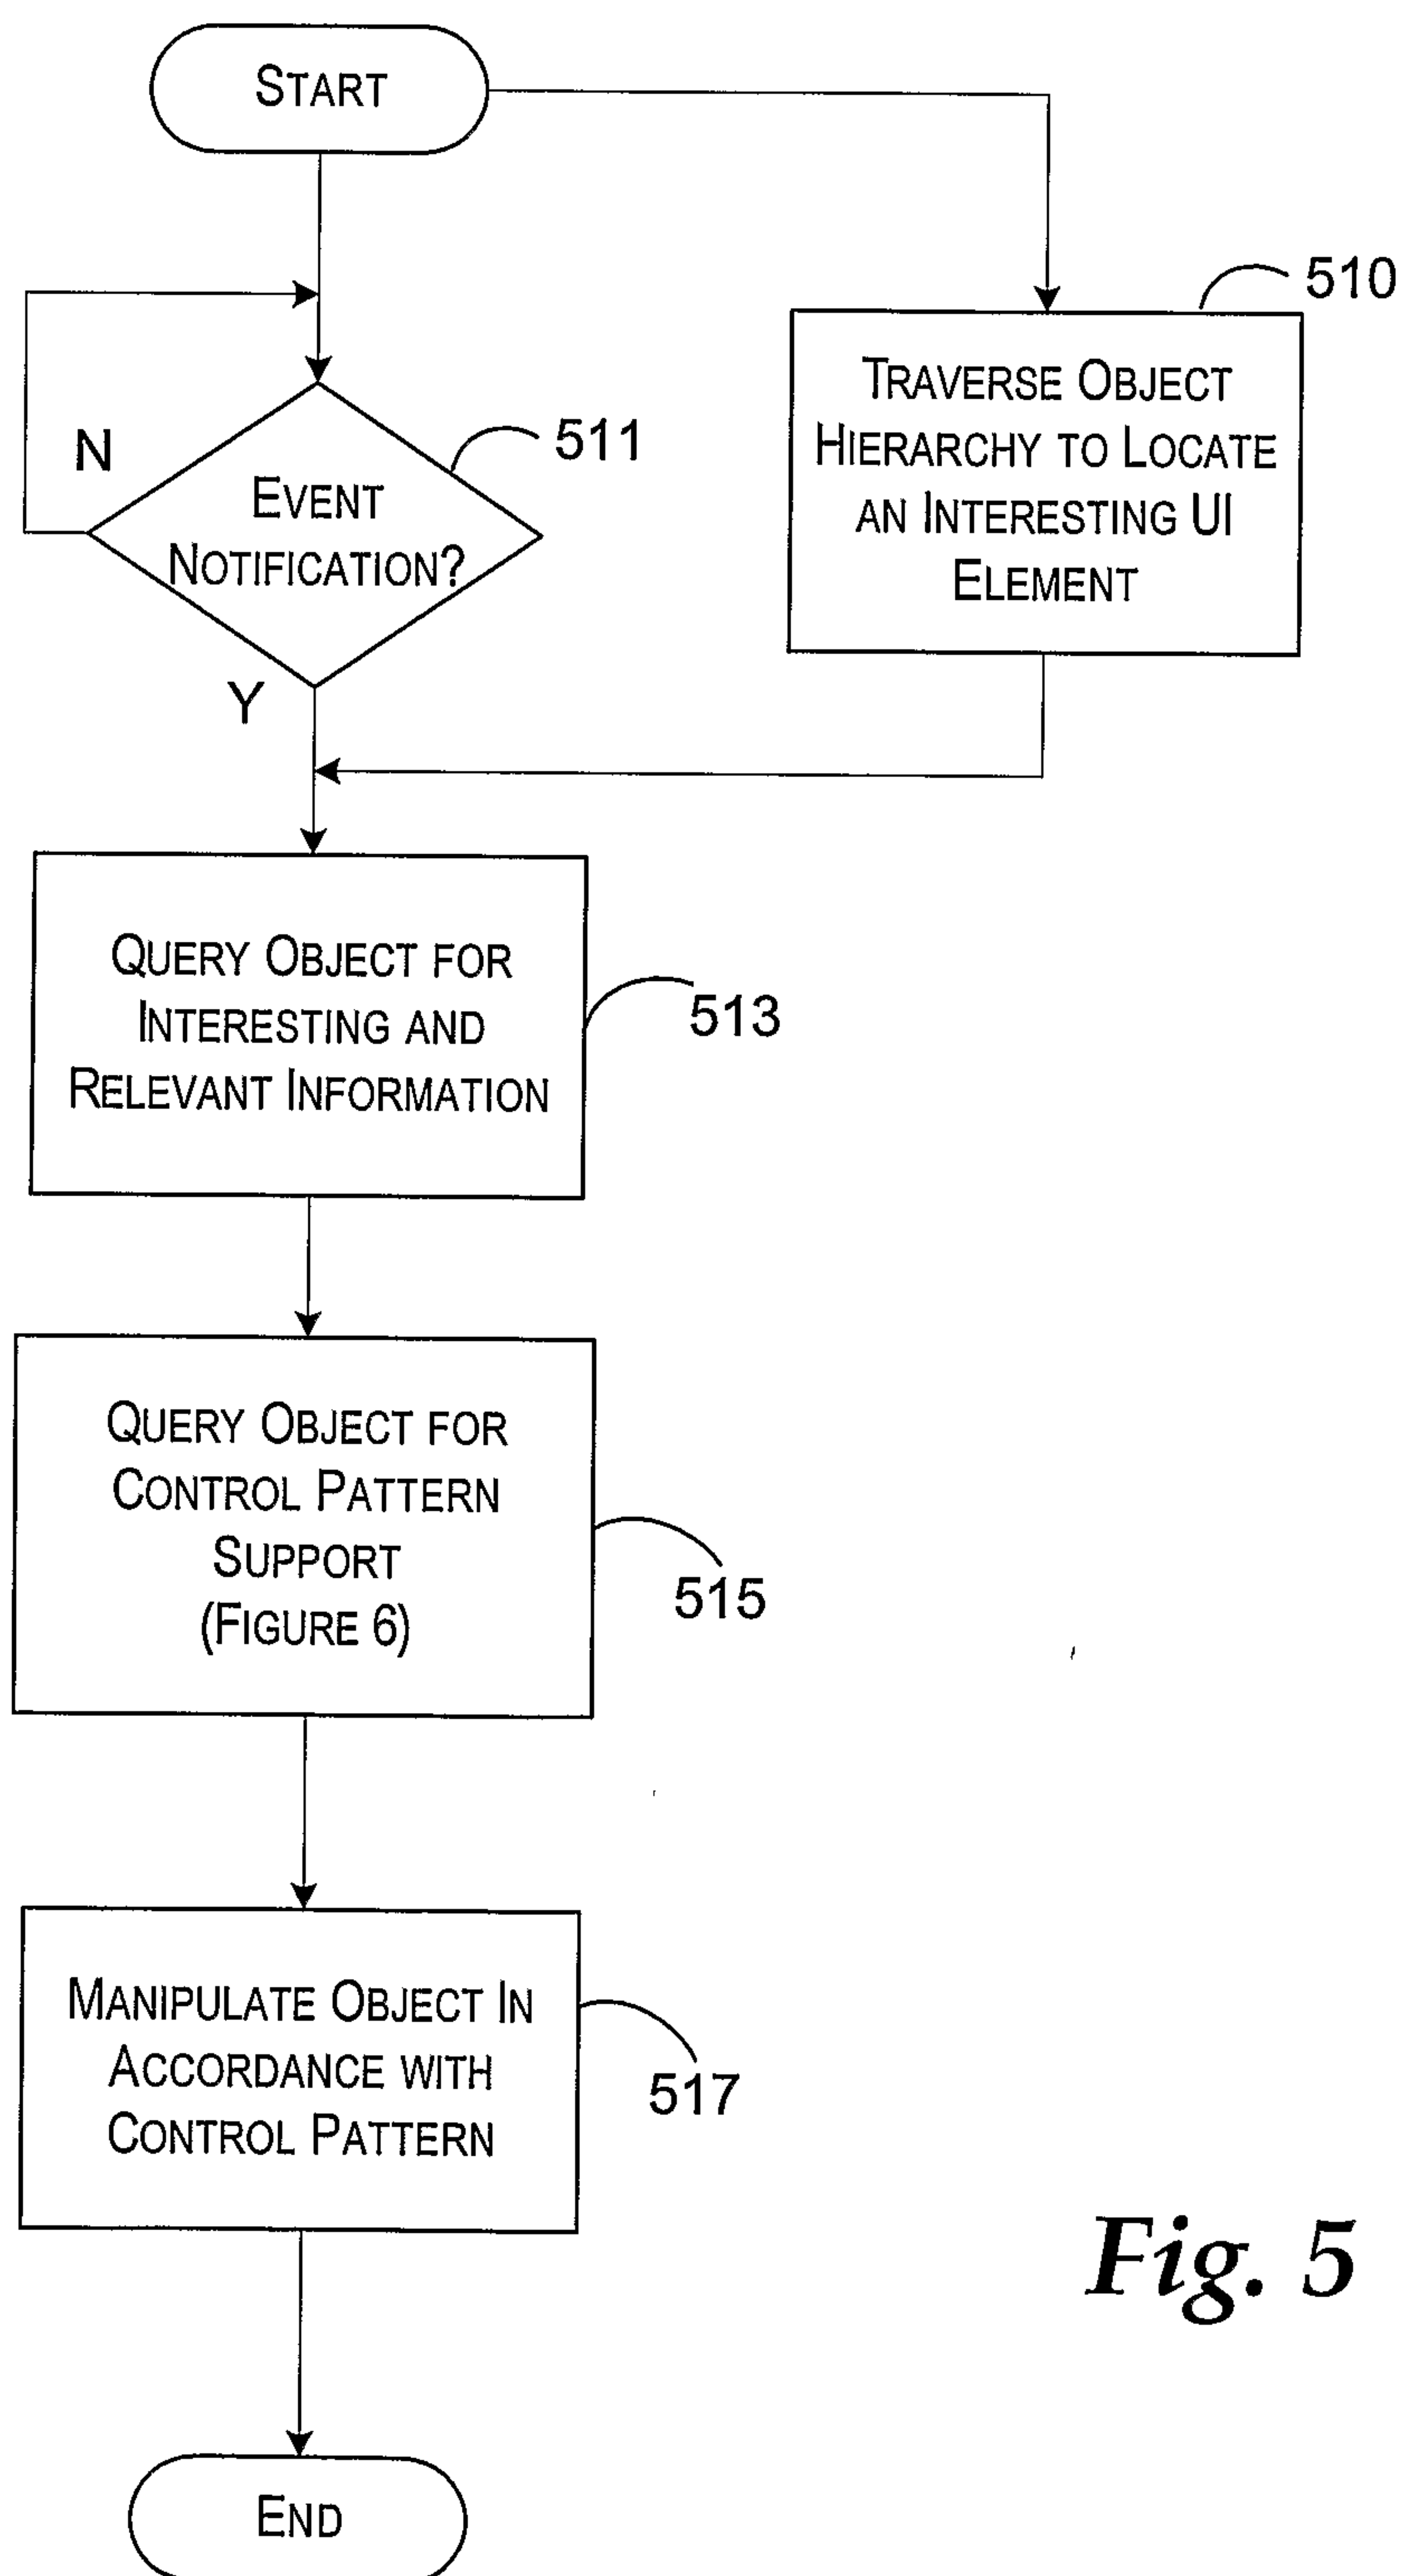
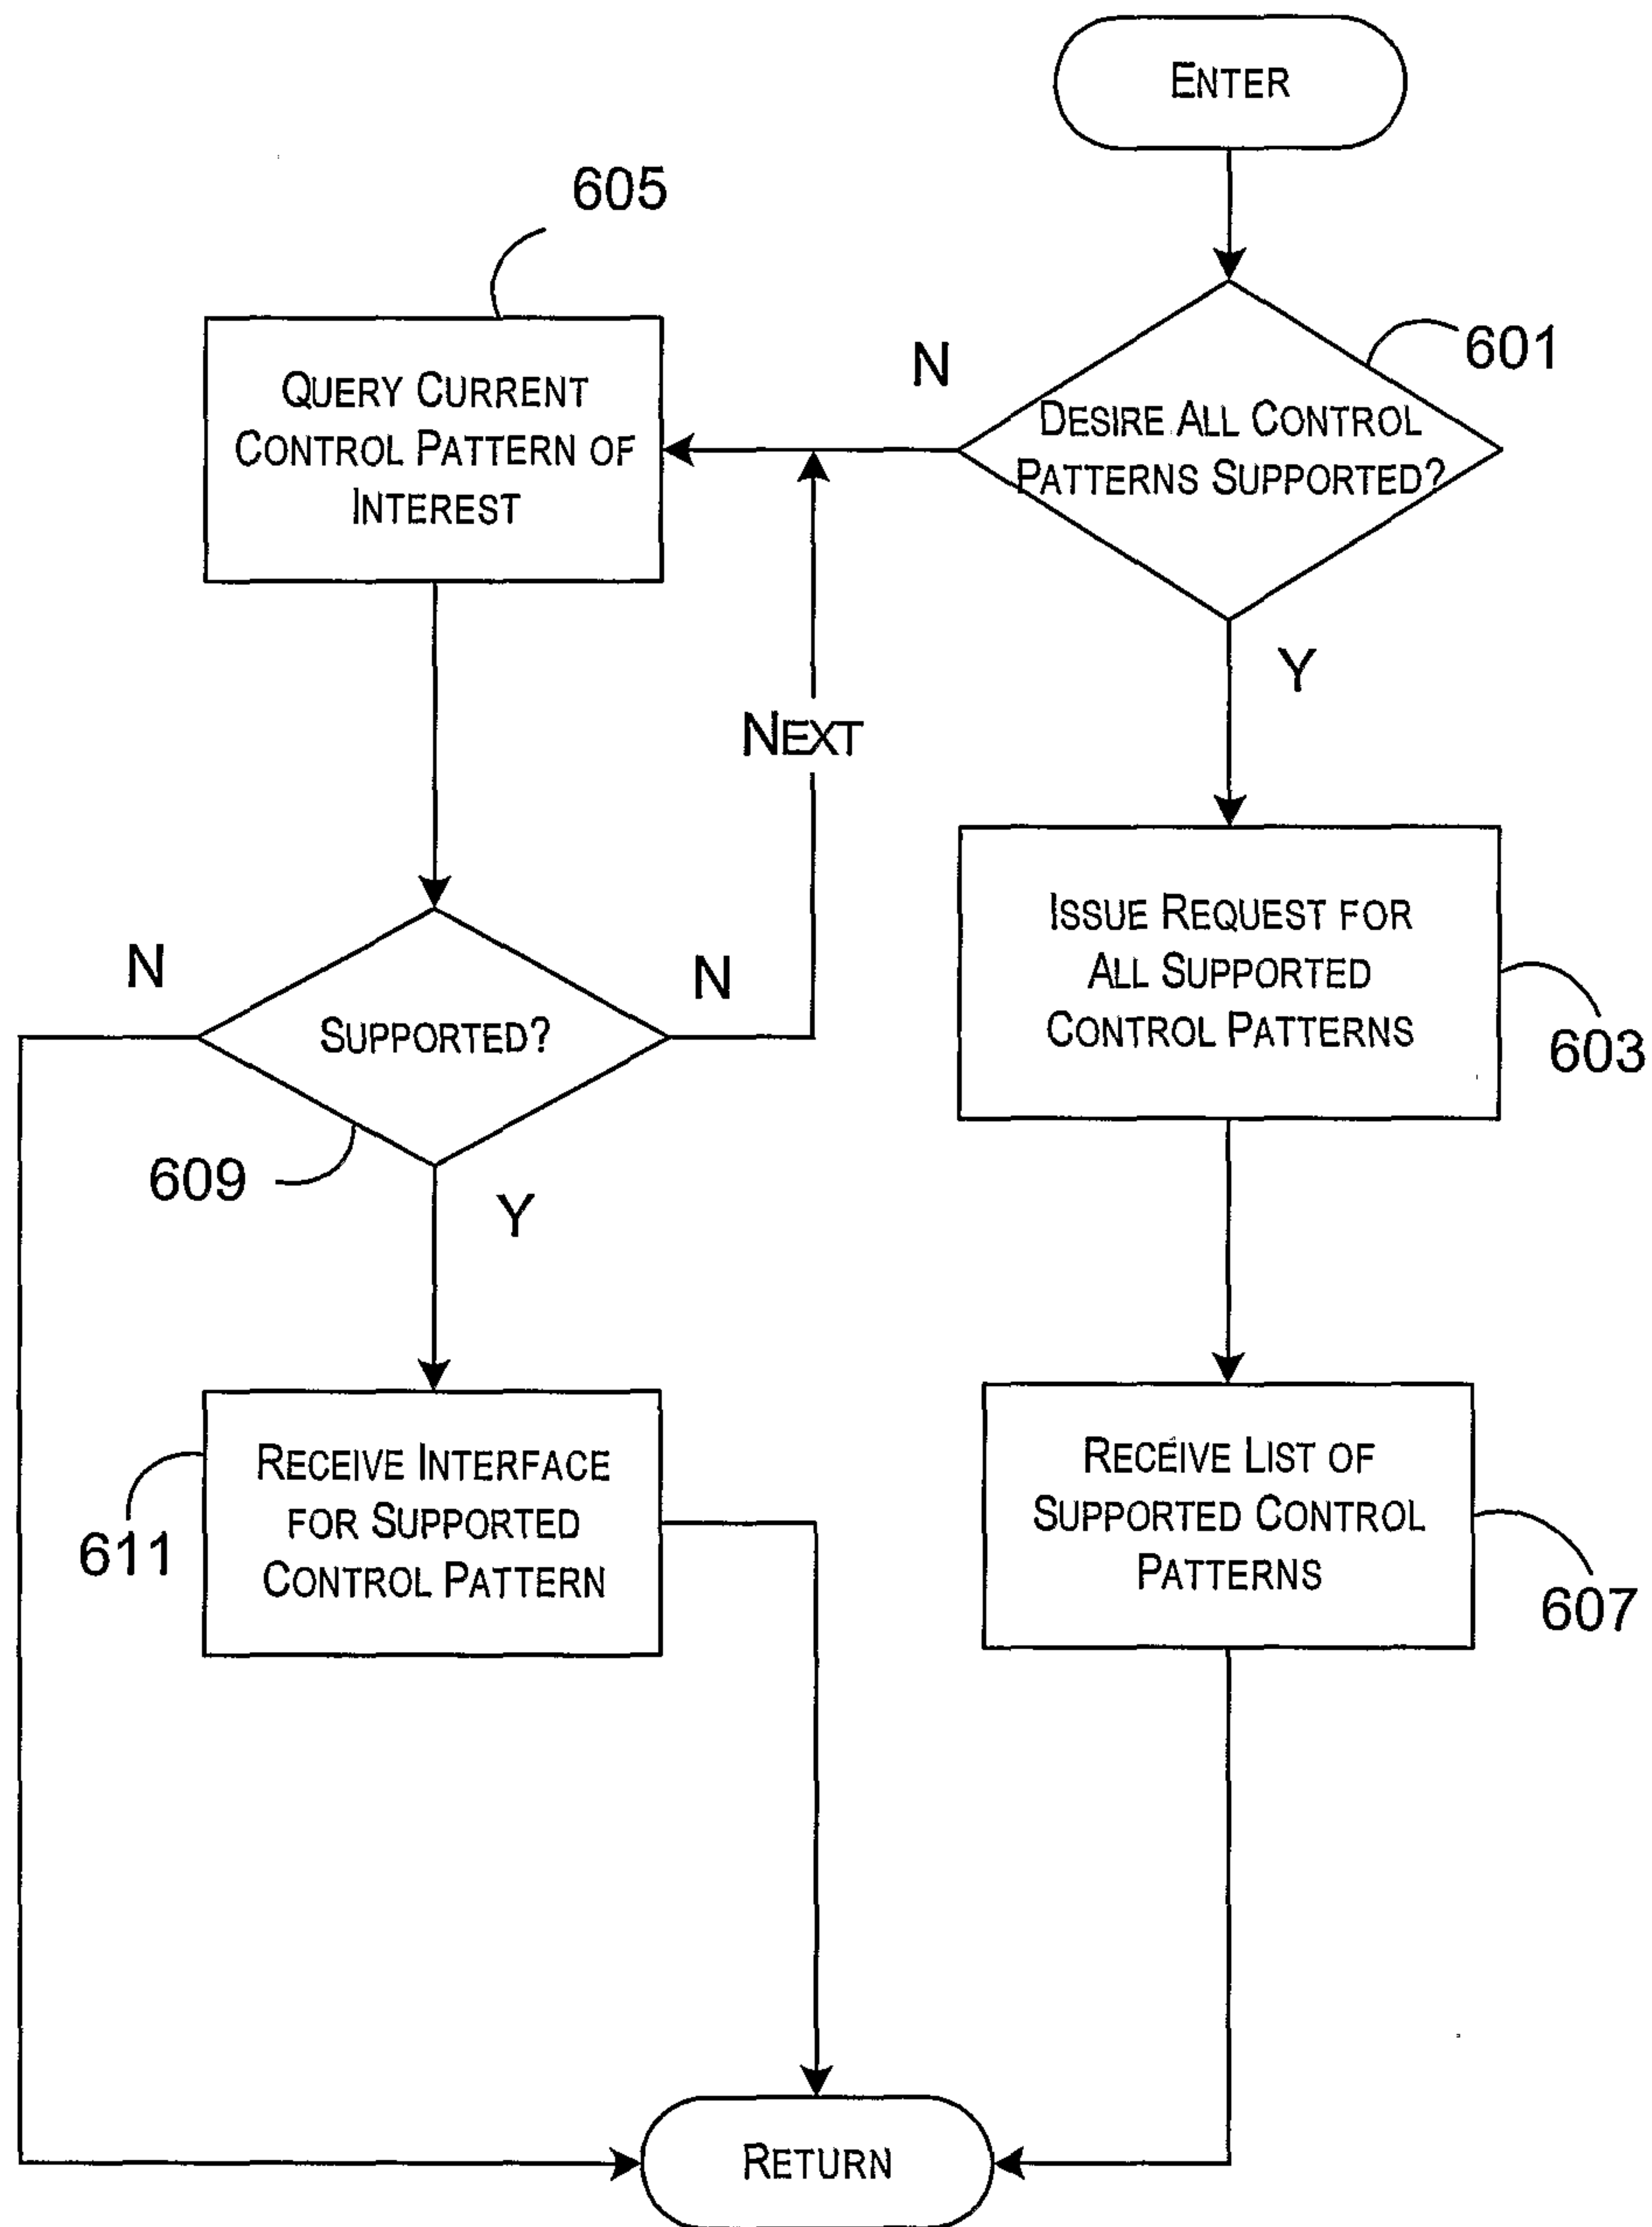


Fig. 4

5/6

*Fig. 5*

6/6

*Fig. 6*

