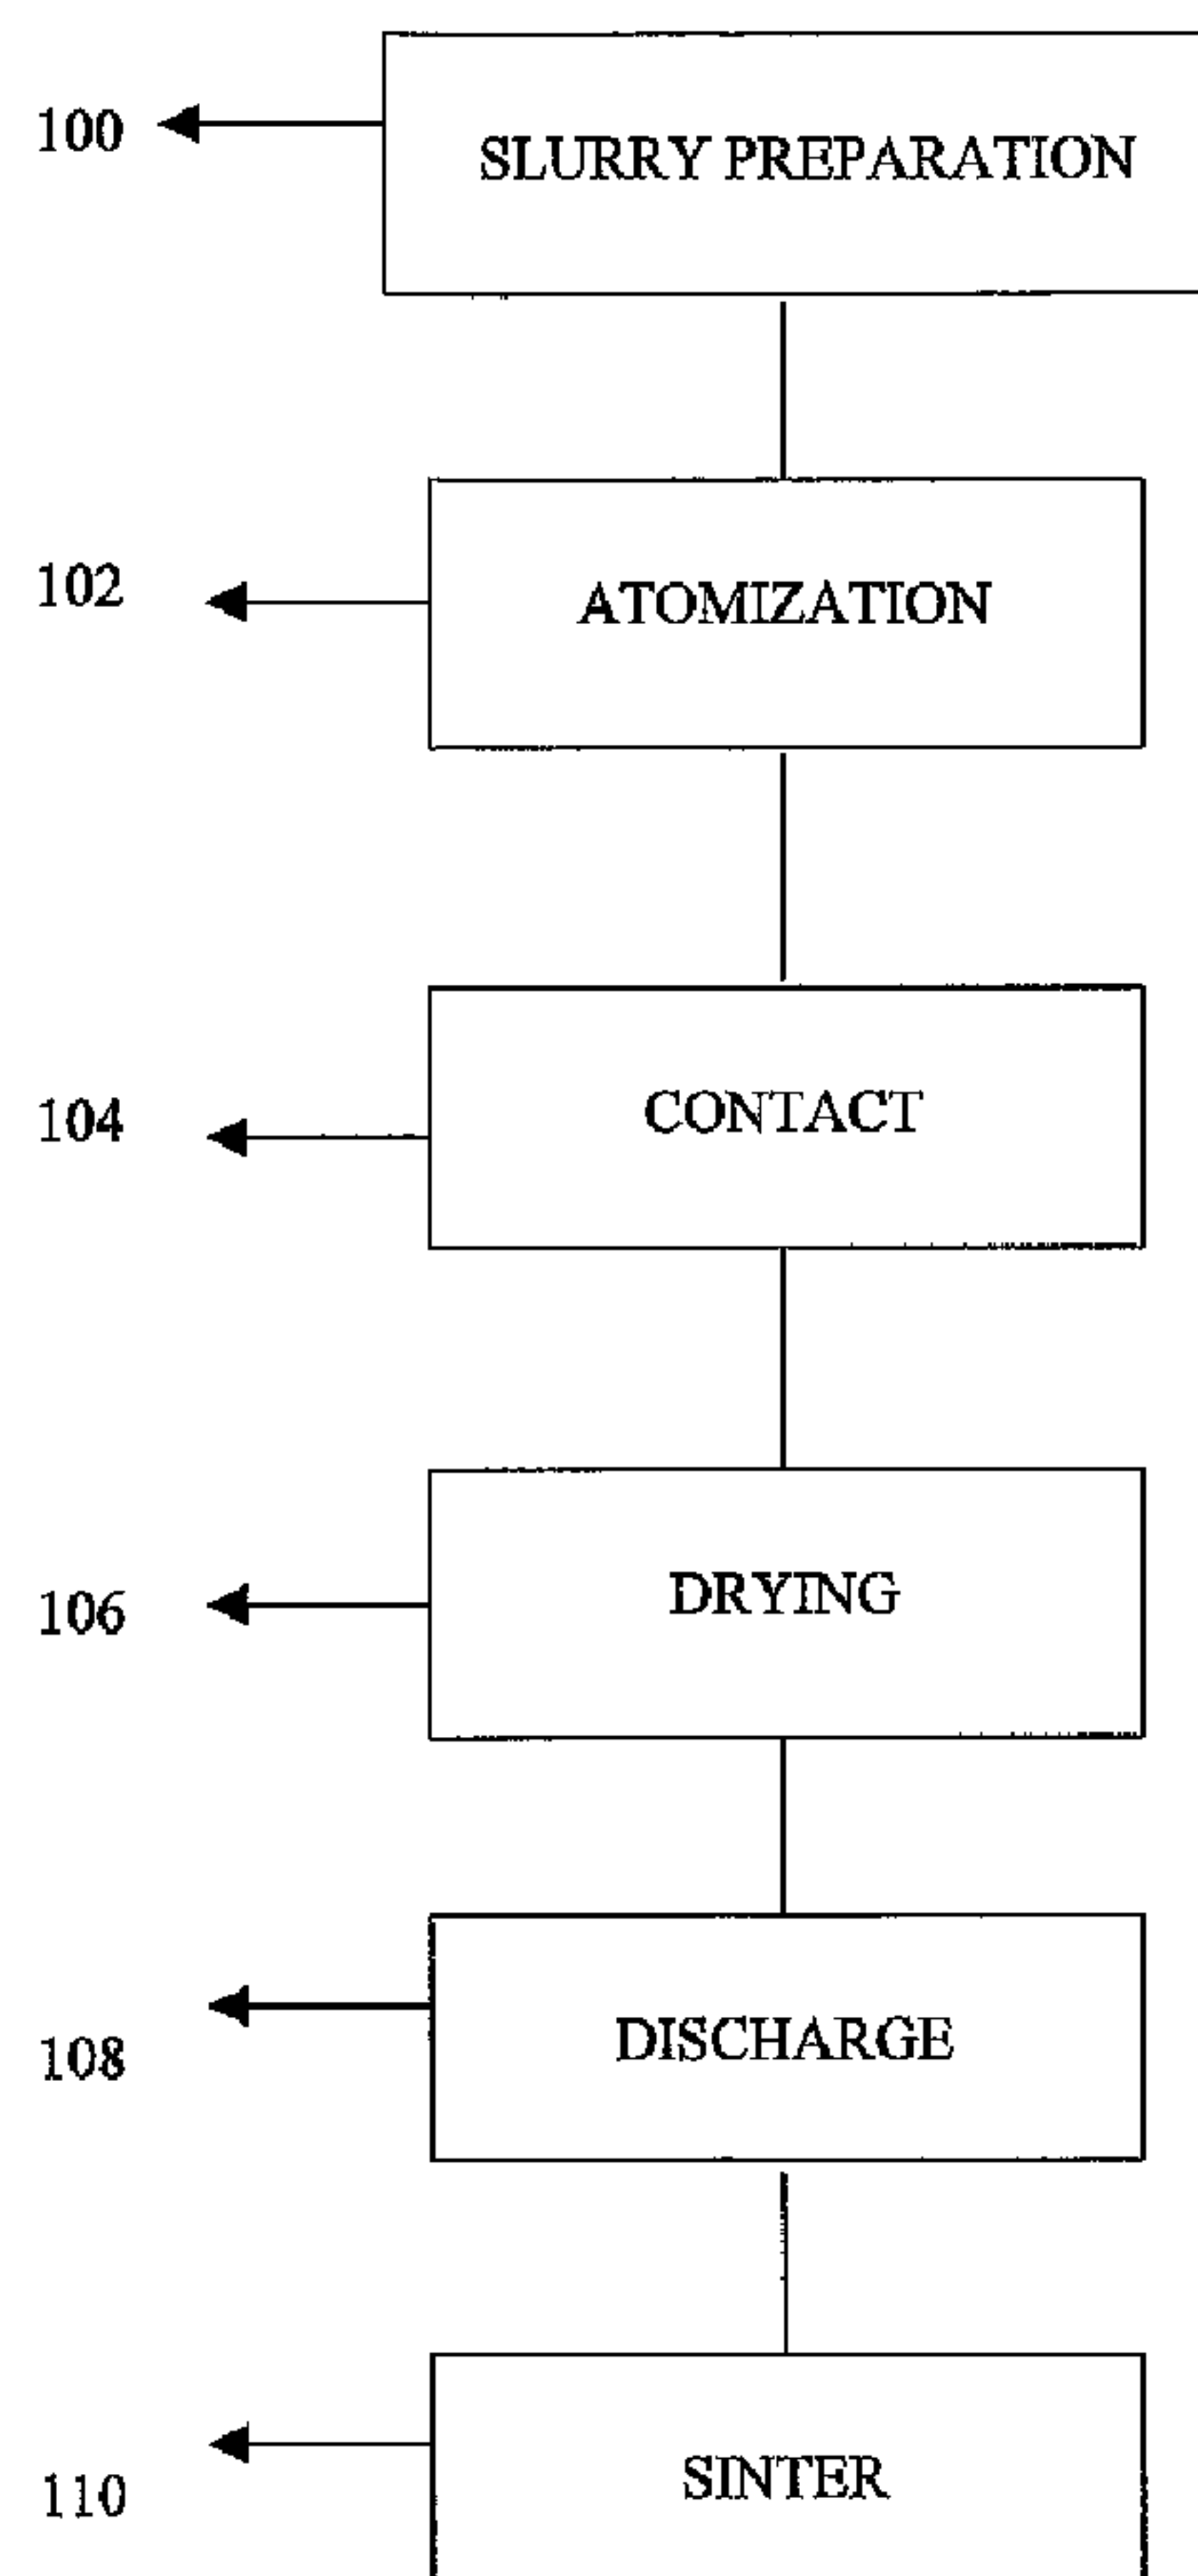




(86) Date de dépôt PCT/PCT Filing Date: 2005/07/08
(87) Date publication PCT/PCT Publication Date: 2006/01/26
(85) Entrée phase nationale/National Entry: 2007/01/04
(86) N° demande PCT/PCT Application No.: US 2005/024339
(87) N° publication PCT/PCT Publication No.: 2006/010036
(30) Priorité/Priority: 2004/07/09 (US60/586,809)

(51) Cl.Int./Int.Cl. **B28B 1/00** (2006.01)
(71) Demandeur/Applicant:
CARBO CERAMICS, INC., US
(72) Inventeurs/Inventors:
CANOVA, STEVE, US;
PALAMARA, THOMAS C., US;
WOOD, JIMMY C., US
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROCEDE DE PRODUCTION DE PARTICULES CERAMIQUES SOLIDES EN PROCEDE DE SECHAGE
PAR ATOMISATION
(54) Title: METHOD FOR PRODUCING SOLID CERAMIC PARTICLES



(57) Abrégé/Abstract:

Methods for producing solid, substantially round, spherical and sintered particles from a slurry of a calcined, uncalcined or partially calcined raw material having an alumina content of greater than about 40 weight percent. The slurry is processed with spray drying



(57) **Abrégé(suite)/Abstract(continued):**

methods into solid, substantially round, spherical and sintered particles having an average particle size greater than about 200 microns, a bulk density of greater than about 1.40 g/cc, and an apparent specific gravity of greater than about 2.60.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 January 2006 (26.01.2006)

PCT

(10) International Publication Number
WO 2006/010036 A3

(51) International Patent Classification:
B28B 1/00 (2006.01)

Eufaula, AL 36027 (US). **WOOD, Jimmy, C.** [US/US];
332 Old Hwy. 165, Eufaula, AL 36027 (US).

(21) International Application Number:
PCT/US2005/024339

(74) Agents: **FERGUSON, Priscilla, L.** et al.; Haynes and
Boone, LLP, 901 Main Street, Suite 3100, Dallas, TX
75202 (US).

(22) International Filing Date: 8 July 2005 (08.07.2005)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/586,809 9 July 2004 (09.07.2004) US

(71) Applicant (*for all designated States except US*): **CARBO
CERAMICS, INC.** [US/US]; 6565 MacArthur Blvd.,
Suite 1050, Irving, TX 75039 (US).

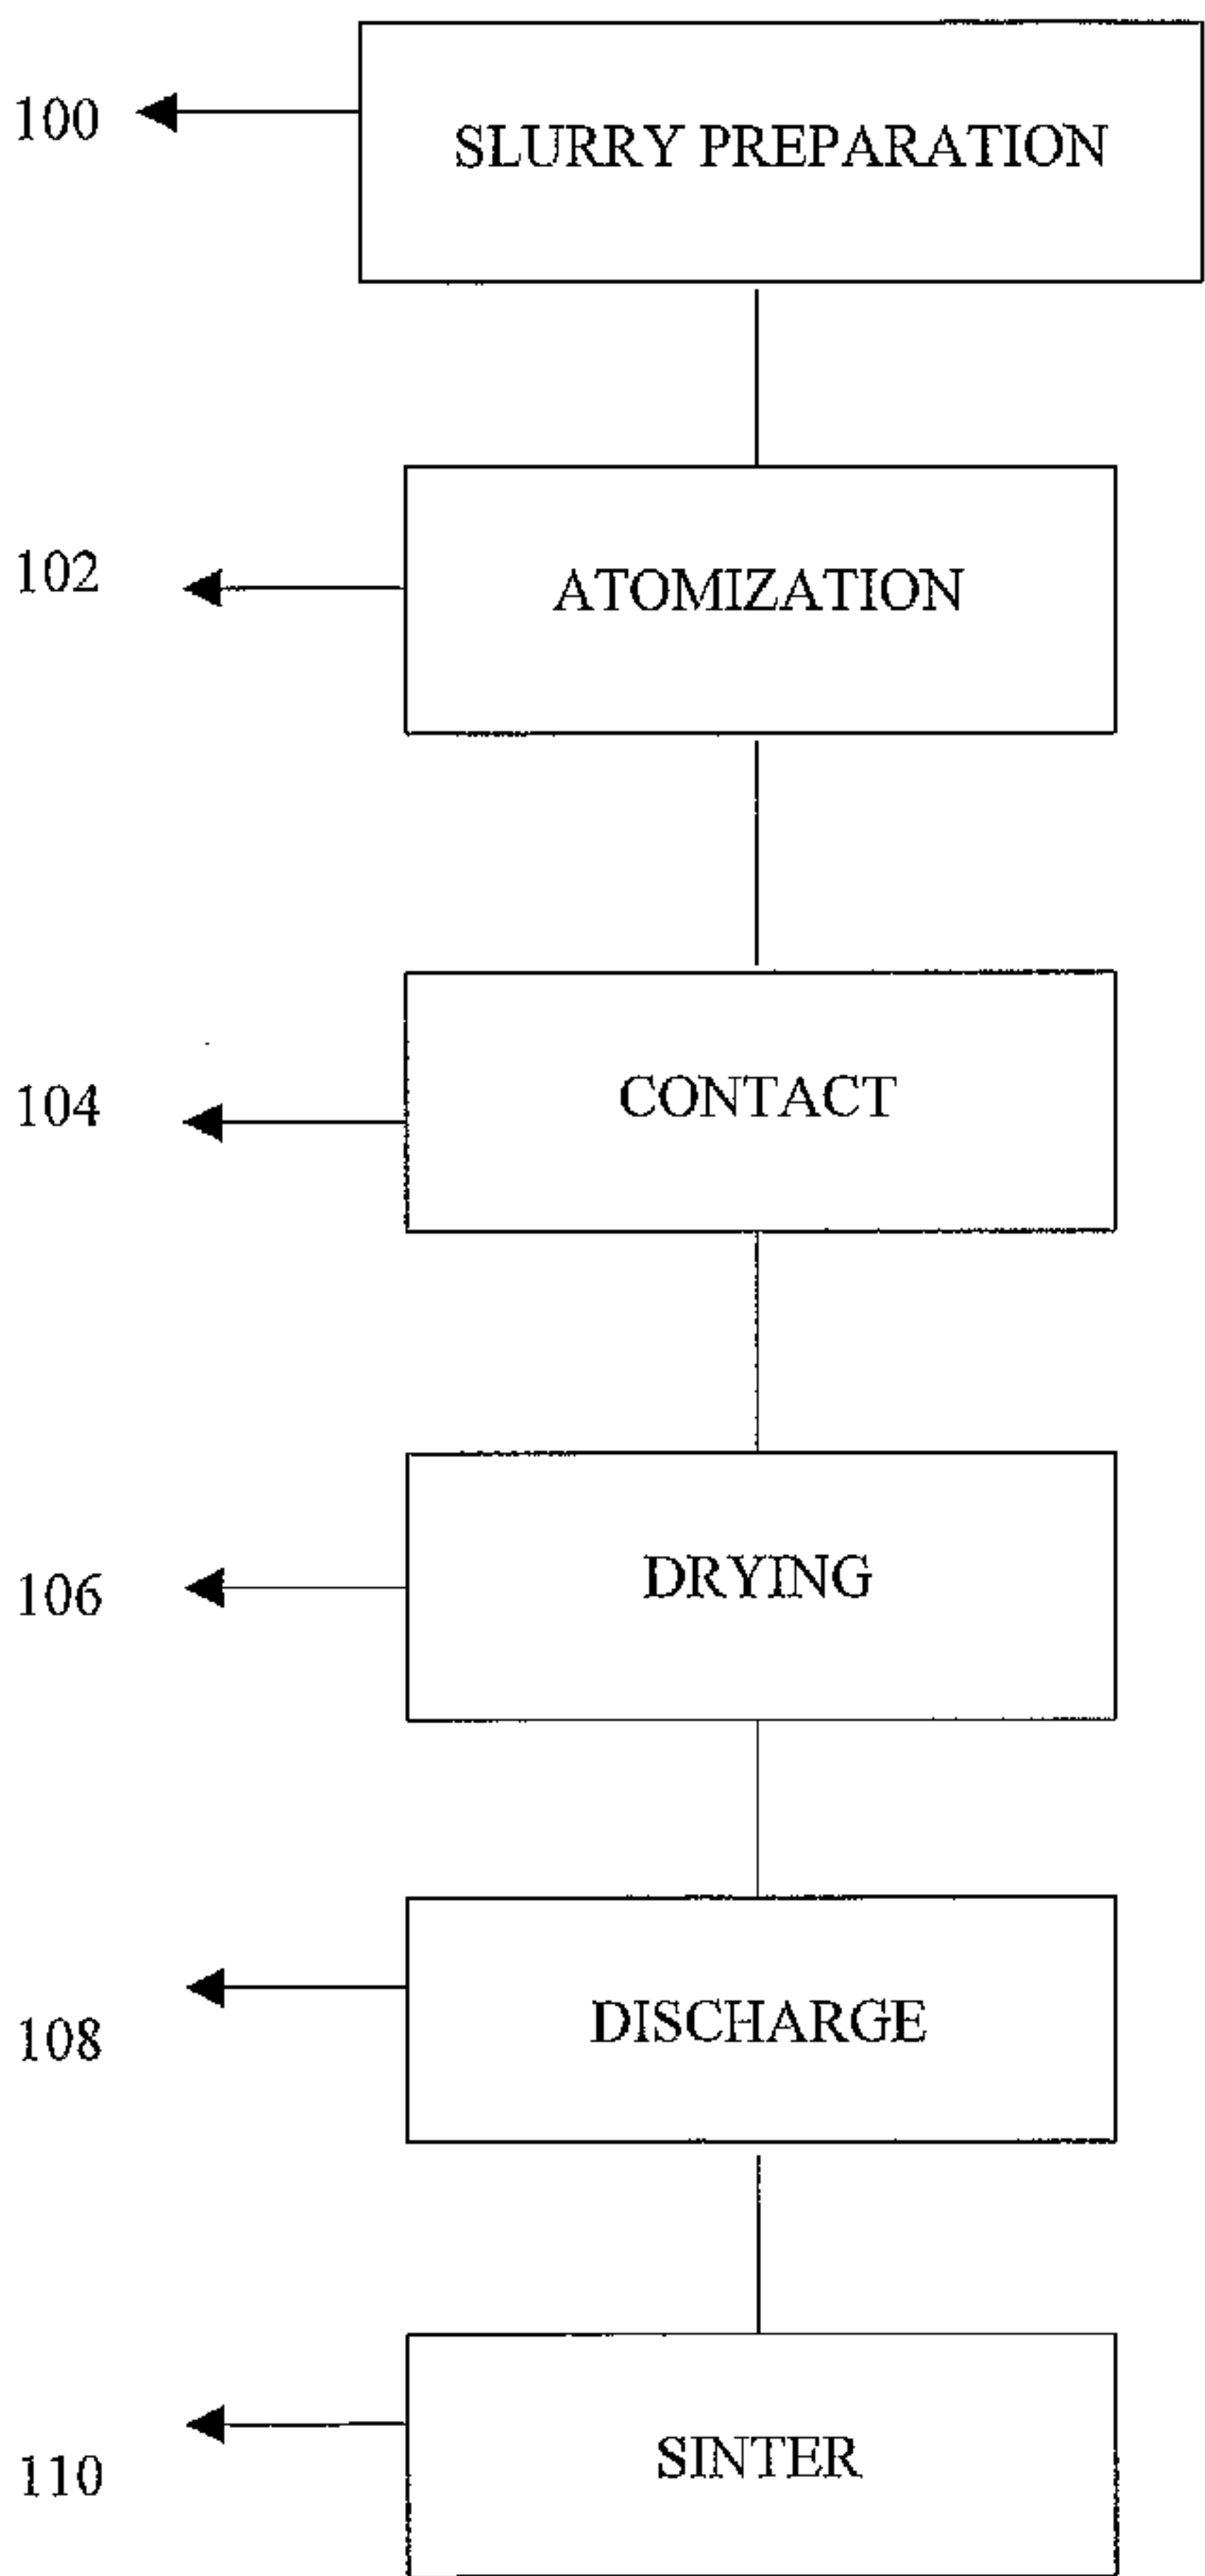
(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **CANOVA, Steve**
[US/US]; 116 Shortleaf Lane, Gray, GA 31032 (US).
PALAMARA, Thomas, C. [US/US]; 303 St. Francis Rd.,

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: METHOD FOR PRODUCING SOLID CERAMIC PARTICLES



(57) Abstract: Methods for producing solid, substantially round, spherical and sintered particles from a slurry of a calcined, uncalcined or partially calcined raw material having an alumina content of greater than about 40 weight percent. The slurry is processed with spray drying methods into solid, substantially round, spherical and sintered particles having an average particle size greater than about 200 microns, a bulk density of greater than about 1.40 g/cc, and an apparent specific gravity of greater than about 2.60.

WO 2006/010036 A3

WO 2006/010036 A3



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

(88) Date of publication of the international search report:

2 November 2006

Published:

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

METHOD FOR PRODUCING SOLID CERAMIC PARTICLES USING A SPRAY DRYING PROCESS

Background of the Invention

Spray drying involves the atomization of a ceramic fluid feedstock into sprays of droplets, which are dried to individual powder particles on contact with hot air. Primarily utilized in the ceramic tile and dinnerware industry, called the whiteware industry, spray drying is found in many industrial applications including electronic ceramics (semiconductors, capacitors) and structural ceramics (wear parts, cutting tools, biomedical parts).

Oil and natural gas are produced from wells having porous and permeable subterranean formations. The porosity of the formation permits the formation to store oil and gas, and the permeability of the formation permits the oil or gas fluid to move through the formation. Permeability of the formation is essential to permit oil and gas to flow to a location where it can be pumped from the well. Sometimes the permeability of the formation holding the gas or oil is insufficient for economic recovery of oil and gas. In other cases, during operation of the well, the permeability of the formation drops to the extent that further recovery becomes uneconomical. In such cases, it is necessary to fracture the formation and prop the fracture in an open condition by means of a proppant material or propping agent. Such fracturing is usually accomplished by hydraulic pressure, and the proppant material or propping agent is a particulate material, such as sand, glass beads or ceramic particles, which are carried into the fracture by means of a fluid.

Described herein are methods for making solid ceramic particles that are substantially round and spherical using a spray drying process. When sintered, the solid ceramic particles are suitable for use as proppant material.

Brief Description of the Drawings

Fig. 1 is a diagram of a method for making sintered solid ceramic particles that are substantially round and spherical using a spray drying process as described herein.

Fig. 2 illustrates a drying chamber providing a combination of co-current and counter-current flow for use in spray drying methods as described herein.

Fig. 3 illustrates a drying chamber providing a co-current flow for use in spray drying methods as described herein.

Fig. 4 illustrates a dimensional scale-up of drying chambers for making solid ceramic particles that are substantially round and spherical using a spray drying process as described herein.

Detailed Description

In particular, methods for making substantially round and spherical, solid, sintered ceramic particles having an average particle size of greater than about 200 microns, a bulk density of greater than about 1.40 g/cc, and an apparent specific gravity of greater than about 2.60 are described. In certain embodiments, the particles have an average particle size of greater than about 300 microns, or greater than about 400 microns. As used herein, the phrase “average particle size” describes a particle size calculated from the sieve distribution of a batch of the particles.

As used herein, the phrase “solid ceramic particle” describes ceramic particles having an interior void that is less than about 10% by volume of the particle. In certain embodiments, the solid ceramic particles have an interior void that is less than about 5% by volume of the particle.

Referring now to Figure 1, a method for making a solid ceramic particle that is substantially round and spherical using a spray drying process includes slurry preparation 100, atomization 102, contact 104, drying 106, discharge 108, and sinter 110.

In slurry preparation 100, a slurry is prepared comprising water and a ceramic starting material having an alumina content of greater than about 40 weight percent. The slurry is prepared by blending, mixing, agitating or similar means known to those of ordinary skill in the art. The ceramic starting material may be an uncalcined ceramic material, partially calcined ceramic material, calcined ceramic material, or combinations thereof. In certain embodiments, the ceramic starting material is a material from which a solid ceramic particle that is substantially round and spherical can be made, and which contains naturally-occurring volatiles, which volatiles may include moisture, organics and chemically bound water (also referred to as “water of hydration”). In certain embodiments, the amount of naturally-occurring volatiles is from about 10 to about 40 wt. % of the ceramic starting material. In other embodiments, the ceramic starting material is an uncalcined clay, partially calcined clay, calcined clay, or mixtures thereof. In still other embodiments, the ceramic starting material is a kaolin clay, bauxitic clay, or bauxite, any of which may be calcined, partially calcined, or uncalcined, and mixtures thereof.

In certain embodiments, the slurry further comprises a binder, such as polyvinyl alcohol, polyvinyl acetate, methylcellulose, dextrin and molasses. Binders are typically organic materials used to increase particle strength. In certain embodiments, water can act as a binder.

In still other embodiments, the slurry further comprises a dispersant, such as a colloid, a polyelectrolyte, tetra sodium pyrophosphate, tetra potassium pyrophosphate, polyphosphate, ammonium citrate, ferric ammonium citrate and sodium hexametaphosphate. Dispersants are included to enhance the total solids content of the slurry by reducing the slurry viscosity. The amount of dispersant, if any, to be used in a slurry is balanced between the ability to atomize the slurry and the ability to make solid, spherical particles.

The relative quantities of ceramic starting material, water, binder (if any) and dispersant (if any) in the slurry depend on the desired properties for the solid ceramic proppant, but are limited to those amounts that will make the slurry suitable for pumping through a pressure nozzle or rotating wheel in atomization process 102, and will allow for the production of green particles that can be sintered to form solid ceramic particles that are substantially round and spherical. In certain embodiments, the slurry has a solids content in the range of from about 50 to about 75% by weight, while in other embodiments, the solids content is from about 50 to about 60% by weight, or from about 60% to about 70% by weight.

In embodiments where the slurry comprises a binder, the amount of binder can be less than about 0.5 percent, by weight of the dry ceramic starting material, or less than about 1.0 percent, by weight of the dry ceramic starting material.

In embodiments where the slurry comprises a dispersant, the amount of dispersant can be less than about 0.3 percent, by weight of the dry ceramic starting material, less than about 0.5 percent, by weight of the dry ceramic starting material, or less than about 1.0 percent, by weight of the dry ceramic starting material.

In atomization process 102, the slurry is fed to atomizing equipment. Suitable atomizing equipment includes but is not limited to a rotary wheel atomizer, a pressure nozzle atomizer and a dual fluid nozzle atomizer. Rotary wheel, pressure nozzle and dual fluid nozzle atomizers are known to those of ordinary skill in the art, and include those in spray dryers commercially available from a variety of sources, such as Niro, Inc. Nozzle

design is known and understood by those of ordinary skill in the art, e.g. K. Masters: "Spray Drying Handbook", John Wiley and Sons, New York (1979).

Whether to use a rotary wheel, pressure nozzle, or dual fluid nozzle atomizer depends upon properties, such as size, distribution, and shape, desired in the final dried solid ceramic particle along with the desired production capacity. Generally, rotary wheel atomizers produce fine particles, while pressure nozzles and dual fluid nozzles operated under pressure can produce comparatively larger particles.

When a rotary wheel atomizer is used, ceramic slurry is fed to the center of the rotating wheel of the atomizer, and moves to the periphery of the wheel by centrifugal force. Atomization takes place at the wheel edge. The size of droplets and the size distribution of droplets in the resulting spray depend upon the amount of energy imparted to the slurry and the frictional effects between the newly formed droplets and the turbulent air flow near the wheel. Sprays of droplets are ejected horizontally from the wheel but quickly follow the airflow patterns created by an air disperser, which directs the hot air down into a drying chamber in a controlled manner. The particle size of ceramics produced in spray dryers with rotary wheel atomizers increases with decrease in atomizer wheel speed. The effect of feed rate is not great within the optimum working range of the given atomizer wheel, and fluctuations in feed rate during operation do not change the size distribution of the ceramic powder produced. Chamber diameters used with rotary wheel atomizers should generally be large enough to prevent the formation of semi wet deposits at the chamber wall at the atomizer level. In contrast, chambers of smaller diameter but larger cylindrical height can be used with pressure nozzle and dual fluid nozzle atomizers.

When a pressure nozzle atomizer is used, slurry is fed to the nozzle under pressure. In the case of a dual fluid nozzle, slurry and drying air are fed through separate nozzles. The feed of air is pressurized, while the feed of slurry can be pressurized or a siphon/gravity feed. In the examples described herein as using a dual fluid nozzle, the slurry feed was pressurized.

The pressure energy is converted into kinetic energy, and the slurry flows from the nozzle orifice as a high-speed film that readily disintegrates into droplets. The droplet size produced from a pressure nozzle atomizer or pressurized dual fluid nozzle varies inversely with pressure and directly with feed rate and feed viscosity. The capacity of a pressure nozzle or pressurized dual fluid nozzle varies with the square root of pressure. In certain

embodiments where high feed rates and/or high-capacity spray drying is desired, multi-nozzle systems are used.

Turning now to contact 104, a spray of droplets of slurry exiting the atomizing equipment meets hot drying air entering a drying chamber. How the droplets and drying air are initially contacted, and how the droplets/particles move throughout the drying chamber can generally be described as either co-current, counter-current, or a combination thereof. In certain embodiments, such as the one illustrated in Fig. 2, a drying chamber providing a combination of co-current and counter-current flow is illustrated in use with a pressure nozzle atomizer.

Fig. 2 is a simplified diagram of a spray drying apparatus comprising a drying chamber 204 and a pressure nozzle 202. Spray dryers typically include additional components, which need not be detailed herein, as spray dryers and their components are known to those of ordinary skill in the art. In Fig. 2, slurry is fed from a feed source 200 through a pressure nozzle 202. Although only one pressure nozzle is illustrated in Fig. 2, multiple nozzles can be used. Various types of equipment suitable for feeding a slurry are known to those of ordinary skill in the art, and can include, for example, a feed pump with or without a filter. The pressure nozzle 202 atomizes the slurry into droplets and sprays the droplets upward into the dryer chamber 204, which is illustrated by arrows A. Hot air is fed into the drying chamber 204 from an air source 206, through an inlet 208 and enters the drying chamber 204 where it contacts the slurry droplets. Thus, the hot air enters from a point above the point at which the slurry is sprayed into the drying chamber, and flows in a generally downward direction in the chamber. Initially, the slurry droplets flow in a generally upward direction in the drying chamber, thereby establishing a counter-current flow. At some point, however, the droplets will exhaust their vertical trajectory, and begin to flow in a generally downward direction in the chamber, thereby establishing a co-current flow. Droplets in a drying chamber such as that illustrated in Fig. 2 have an extended vertical trajectory, which allows a longer airborne time for drying. Although Fig. 2 illustrates a pressure nozzle atomizer in use with a combination co-current and counter-current drying chamber, such drying chambers can also be used with rotary wheel atomizers and dual fluid nozzle atomizers.

In certain embodiments, such as that illustrated in Fig. 3, a co-current drying chamber is used with a pressure nozzle atomizer. Fig. 3 is a simplified diagram of a spray drying apparatus comprising a drying chamber 304 and a pressure nozzle 302. Slurry is

fed from a feed source 300 through a pressure nozzle 302. The pressure nozzle 302 atomizes the slurry into droplets and sprays the droplets in a generally downward direction (illustrated at "A") into the dryer chamber 304. Hot air is fed into the drying chamber 304 from an air source 306, and flows into the drying chamber 304 in a generally downward direction (illustrated at "B"). Thus, the hot air and the slurry droplets flow in a generally downward direction in the chamber, thereby establishing a co-current flow. Although Fig. 3 illustrates a pressure nozzle atomizer in use with a co-current drying chamber, co-current drying chambers can also be used with rotary wheel atomizers and dual fluid nozzle atomizers.

Various types of equipment suitable for feeding hot air into the drying chamber for drying of the droplets are known to those of ordinary skill in the art, and can include, for example, a heater with or without an air filter. In drying 106, green ceramic particles form as moisture is evaporated from the droplets. As the slurry is sprayed into drying chamber 204 and contacts hot drying air, evaporation from the surface of the droplet occurs and a saturated vapor film forms at the surface of the droplet. Dispersants and binders, if present, are soluble. Thus, when a dispersant and/or binder is present, each atomized spray droplet contains both insoluble ceramic material and soluble additives. During the evaporation phase of spray drying, the soluble binding materials coat themselves in a film on the droplet surface.

As drying continues, moisture toward the interior of the droplet evaporates. According to the methods described herein, moisture from the interior of the droplet is evaporated at least in part by diffusion through the solid particles packed in the droplet, toward the droplet surface, and then through the film on the droplet surface. As evaporation of moisture from the droplet interior occurs, the film on the droplet surface grows inward toward the droplet interior.

Droplet surface temperatures are low in spite of the relatively higher inlet air temperature of the drying air. Evaporation takes place initially under constant-rate conditions, but then the rate falls as the droplets approach a final residual moisture content condition. Since the droplets contain undissolved solids, the drying profile features a significant constant-rate period that contributes to the particle sphericity. During drying, the spray droplet size distribution changes as droplets change size during evaporation of moisture. Coalescence of droplets and particles can also occur, and may be due to the

turbulent air flow pattern in the drying chamber and the complex distribution of temperature and humidity levels.

Because the droplets generally do not rotate as they are projected through the drying chamber, one side of the droplet can be exposed to air from the inlet that is hotter than the air to which the other side of the droplet is exposed (referred to herein as the "hot side" and the "cool side", respectively). In such instances, evaporation is faster on the hot side, and the film that forms on the surface of the droplet thickens more rapidly on the hot side than on the cool side. Liquid and solids in the droplet migrate to the hot side. At this point, it would be expected that the cool side would be drawn inward, which would result in a hollow green particle with a dimple, rather than the solid green particles described herein. However, according to the methods described herein, the particles are solid rather than hollow because of one or more of the following factors: solids content in the weight percents described herein, solubles content (dispersant and/or binder) in the weight percents described herein, and air inlet temperatures in the ranges as described herein.

Regarding the solids content, slurries having solids contents greater than about 50 weight percent can be used to produce solid substantially round and spherical particles as described herein. According to certain embodiments, slurries having a solids content of about 60% to about 70% by weight can be used to produce solid substantially round and spherical particles.

Regarding the solubles content, binders increase slurry viscosity, which can lead to the need to reduce the solids content in order to maintain a slurry that can be atomized. Lower solids content, however, can lead to a particle that is not solid. As for dispersants, dispersants allow more rapid movement of solids to the surface of the particle, which can also lead to a particle that is not solid. Thus, the solubles content in a slurry (amounts of additives such as binders and dispersants) should be balanced against the solids content of the slurry. Preferably, the least amount of binder and/or dispersant, as determined by the need to adjust viscosity of the slurry, is used.

Regarding the air inlet temperatures, the temperature of the air entering a drying chamber is controlled according to methods described herein. Thus, in certain embodiments, the air inlet temperature is in a range of from about 100°C to about 200°C, or from about 200°C to about 300°C, or from about 300°C to about 400°C, or from about 400°C to about 500°C. In other embodiments, the air inlet temperature is in a range of from about 150°C to about 200°C or from about 200°C to about 250°C. Preferably,

temperatures in the lower end of such ranges are used in order to slow the rate of drying of the particles, which in turn contributes to the production of green ceramic particles that can be sintered to produce solid ceramic particles that are substantially round and spherical.

Referring again to Fig. 1, discharge 108 includes separation and discharge of green ceramic particles from the dryer chamber. In certain embodiments, a two-point discharge system is used. In a two-point discharge system, primary discharge of the coarsest fraction of the green ceramic particles is achieved from the base of the chamber and discharge of the finer fraction is achieved from the base of a cyclone and baghouse system. In certain other embodiments, a single-point discharge system is used. In a single-point discharge system, recovery of the green ceramic particles is accomplished from the dryer chamber. For example, in the schematic illustrated in Figs. 2 and 3, the green ceramic particles are discharged from the drying chamber into a discharge 210 and 310 at least in part under the influence of gravity.

In addition to the components illustrated in Figs. 2 and 3, suitable drying arrangements can further include fans and ducts, exhaust air cleaning equipment (cyclones, baghouses, scrubbers), and control instrumentation. Such further components and equipment, and their use in a spray drying method as described herein, are known to those of ordinary skill in the art.

After discharge 108, the green ceramic particles are then sintered 110 using conventional sintering equipment to form solid ceramic particles that are substantially round and spherical. Sintering and equipment to perform sintering are known to those of ordinary skill in the art. For example, see U.S. Patent No. 4,427,068 to Fitzgibbon. In certain embodiments, sintering is performed at a temperature in the range of from about 1000°C to about 1600°C for a time in the range of from about 20 to about 45 minutes at peak temperature.

The following examples are illustrative of the methods and particles discussed above.

Example 1

Referring now to Table 1 below, the results of nine test runs that produced substantially round and spherical solid ceramic particles according to the methods disclosed herein are reported. Values reported in Table 1 as “n/a” were not determined.

Nine slurries having the Slurry Properties reported in Table 1 were prepared by and obtained from CARBO Ceramics, Inc., ("CARBO") Eufaula, Alabama. Generally, the slurries were prepared by agitating an uncalcined bauxitic kaolin clay with water and a dispersant in a Denver attrition scrubber to achieve a slurry having the reported solids content. The clay had an alumina content of greater than about 50 weight percent, and was a blend of clay mined in the Eufaula, Alabama area. The dispersant used was an ammonium polyacrylate commercially available as Rhone Poulenc Colloid 102. Polyvinyl alcohol (PVA) having a molecular weight of 100,000 Mn, which was obtained from Air Products and Chemicals Inc under the tradename Airvol was added to the slurries as obtained from CARBO for sample nos. 5 and 6. The solids content reported in Table 1 was determined using a Sartorius moisture balance at 160°C for 30 minutes. The viscosity data reported in Table 1, (which is reported in centipoises ("cps") at a particular RPM), was determined using a Brookfield viscometer with a number 2 spindle, which is commercially available from Brookfield Engineering Laboratories, Middleboro, MA. The Brookfield viscometer was operated according to the procedures provided for its operation.

The slurries were atomized according to the Atomization conditions reported in Table 1. Each slurry was fed to a pressure nozzle atomizer at the temperature and feed rate, and under the atomization pressure, reported in Table 1. The particular atomizer used was provided with a Niro Nozzle Tower pilot plant, which had a drying chamber of 2.55 meters in diameter and 5.95 meters in cylindrical height with an overall spray height of 9 meters. The nozzle design was adjusted for each run as reported in Table 1, where the alpha indicator "AA" describes chamber design of the nozzle and the numeric indicator "#.#" describes the diameter (millimeters) of the nozzle orifice. Such alpha and numeric indicators are known and understood by those of ordinary skill in the art. The Duration reported in Table 1 indicates the time that the slurry was pumped at the indicated rate in order to make droplets of the slurry from the particular nozzle used.

As the atomized droplets of slurry exited the pressure nozzle, they were exposed to the Drying Conditions reported in Table 1. Hot air was fed to the drying chamber of the Niro Nozzle Tower pilot plant at the reported rate, which was measured with a hot wire anemometer. The reported inlet and outlet temperatures of the drying chamber were determined with thermocouples. As moisture evaporated from the droplets due to contact with the hot air feed, green ceramic particles were formed having the Green Properties reported in Table 1. The reported residual volatiles % was determined with a Mettler

moisture analyzer at 200°C for 30 minutes, and indicates moisture that did not evaporate from the particle during drying. The poured density represents that amount of green particles that filled a container of known volume, while the tapped density represents that amount of green particles that filled a container of known volume with tapping of the container as it was filled.

The green particles were sintered in a static kiln to produce substantially round and spherical solid ceramic particles. Sintering was achieved using a heating rate of 12°C/min to a peak temperature of 1510°C with a 30 minute hold at peak temperature. Sintered Properties of the sintered solid ceramic particles such as size, grain fineness number, bulk density, apparent specific gravity and crush strength are reported below. The bulk density, apparent specific gravity and crush strength were determined using API Recommended Practices RP60 for testing proppants.

Table 1									
Sample No.	1	2	3	4	5	6	7	8	9
Slurry Properties:									
Solids (wt %)	59.2	59.6	60.4	59.7	59.6	59.2	61.1	59.8	59.3
Binder (PVA) (wt%)	0	0	0	0	0.1*	0.2*	0	0	0
Dispersant (wt%)	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
Density (g/cc)	1.58	1.58	1.59	1.57	1.59	1.58	1.59	1.60	n/a
Viscosity (cps)									
6 RPM	775	200	1375	625	875	475	425	225	500
12 RPM	638	163	1000	450	650	488	350	200	438
30 RPM	440	115	505	315	395	305	255	140	290
60 RPM	335	98	400	250	285	230	200	118	235
Atomization Conditions									
Temperature of slurry °C	23	22	22	23	23	22	23	22	22
Feed Rate of slurry (kg/hr)	211	254	254	n/a	190	233	n/a	288	220
Atomization Pressure (psig)	420	440	600	460	480	440	600	500	500
Nozzle Type	SC 1.6	SC 1.6	SB 1.4	SB 1.4	SB 1.4	SB 1.4	SB 1.5	SB 1.4	SB 1.4
Duration (min.)	24	35	8	27	34	35	12	11	66
Drying Conditions:									
Drying Air Rate (kg/hr)	2930	3080	3000	3080	3090	3030	2730	2850	2670
Inlet Air Temp. °C	231	276	221	220	210	210	260	209	231
Outlet Air Temp. °C	118	115	116	110	101	102	126	101	105

Table 1									
Sample No.	1	2	3	4	5	6	7	8	9
Green Properties:									
Residual Volatiles, %	5.35	0.98	3.15	2.71	0.61	0.65	10.9	3.0	1.35
Poured Density, g/cc	0.81	0.78	0.81	0.79	0.81	0.79	0.88	0.80	0.80
Tapped Density, g/cc	0.86	0.85	0.86	0.84	0.86	0.85	0.91	0.87	0.85
Particle Size, microns									
90% less than	619	500	585	567	530	502	n/a	578	570
50% less than	413	292	353	349	293	306	n/a	357	351
10% less than	230	171	213	200	175	188	n/a	209	186
Product Weight, kg	49.5	72	12.5	51	74	72	26	24	140.5
% Retained on Sieve U.S. Mesh No. (or pan)									
30	5.0	0.4	5.0	0.9	0.1	0.0	31.9	0.8	0.5
40	34.4	7.9	23.7	20.4	4.4	1.4	31.6	16.8	7.6
50	32.2	31.4	32.0	35.0	26.1	20.9	20.7	36.9	32.6
70	16.0	27.3	22.0	21.8	30.6	32.9	9.3	23.2	35.3
100	8.8	19.7	12.2	14.0	24.4	28.3	4.6	14.4	14.4
140	2.6	8.0	3.5	5.0	9.2	10.4	1.3	5.1	
200	0.6	3.1	1.0	1.7	3.1	3.3	0.3	1.6	8.7
270	0.2	1.5	0.4	0.8	1.5	2.0	0.2	0.8	
pan	0.1	0.7	0.2	0.4	0.6	0.7	0.1	0.3	0.9
Avg. Size, microns (including pan material)	387	277	354	327	256	236	480	319	285
Sintered Properties:									
Sieve, U.S. Mesh									
30	0.6	0.1	0.6	0.1	0.0	0.0	12.5	0.1	0.0
40	8.6	0.8	7.0	1.7	0.2	0.1	26.9	1.7	0.8
50	38.8	14.6	29.1	23.9	10.1	4.4	30.5	25.1	12.9
70	28.5	36.1	31.9	35.2	33.3	30.8	17.0	36.3	34.6
100	16.8	30.0	22.2	25.2	34.0	39.4	9.4	23.9	32.2
140	5.0	11.3	6.4	8.9	14.3	17.0	2.7	8.3	12.8
200	1.3	3.9	1.7	2.8	4.6	5.0	0.7	2.7	4.1
270	0.4	2.3	0.8	1.5	2.6	2.5	0.3	1.3	2.1
pan	0.1	1.0	0.3	0.7	0.9	0.8	0.1	0.6	0.5
Avg. Size, microns (including pan material)	300	224	277	247	209	195	395	251	219
Grain Fineness Number (GFN) (does not include pan material)	51.9	67.1	55.9	61.6	71.1	74.4	42.1	60.5	68.3
Grain Fineness Number (GFN) (includes pan material)	52.2	69.5	56.6	63.3	73.2	76.2	42.4	61.9	69.5
Bulk Density (g/cc)	1.53	1.39	1.50	1.47	1.44	1.39	1.52	1.46	1.46

Table 1									
Sample No.	1	2	3	4	5	6	7	8	9
Apparent Specific Gravity (ASG)	2.76	2.70	2.77	2.72	2.74	2.66	2.74	2.71	2.74
Crush on -50/+140:									
7500 psi % Crush	4.4	9.6	5.2	5.5	6.4	9.5	5.1	6.7	5.2
10,000 psi % Crush	n/a	12.3	5.9	7.5	9.3	12.8	12.3	7.9	6.6

*PVA added after slurries received from preparation site.

Slurries having higher solids loading, (for example, Sample Nos. 3 and 7), produced larger sized particle, by GFN and by average particle size. Sample Nos. 3 and 7 also had a higher viscosity, and produced the 2nd and 3rd coarsest particle size materials by GFN and average particle size. In contrast, slurries having higher total solubles, (for example, Samples Nos. 5 and 6, which included binder), produced the smallest average particle sized material with highest GFN (which also indicates smaller particles were produced). Sample No. 7 produced the largest particles, and it is further noted that of the nine samples, Sample No. 7 also contained the highest residual volatiles, which indicates the free water content of the particles discharged from the drying chamber. The residual volatile content of Sample No. 7 indicates that Sample No. 7 was exposed to a reduced drying rate as compared to those samples discharged from the drying chamber with lower residual volatile contents (for example, Samples Nos. 5 and 6). Thus, a reduced drying rate should contribute to the production of ceramic particles having properties as described herein.

Example 2

Referring now to Table 2 below, the results of five test runs that produced substantially round and spherical solid ceramic particles according to the methods disclosed herein are reported. Values reported in Table 2 as "n/a" were not determined.

Five slurries having the Slurry Properties reported in Table 2 were prepared by agitating an uncalcined bauxitic kaolin clay with water and a dispersant in a high shear Cowles dissolver to achieve a slurry having the reported solids content. The clay had an alumina content of greater than about 50 weight percent, and was obtained from JF Blecher. The dispersant was sodium hexametaphosphate, and was included in each slurry in an amount of about 0.15 weight percent of the dry weight of the clay used to make the slurry. Sodium hexametaphosphate is commercially available from Innophous Chemicals Inc. An additional 120 grams of sodium hexametaphosphate was added to Sample Nos. 4

and 5. Ammonium hydroxide was added to each slurry in an amount sufficient to provide the slurries with a pH of about 9.5. No binder other than water was used in any of the slurries.

The slurry solids content reported in Table 2 was determined using a Ohaus MB45 moisture balance at 190°C until all physical moisture was eliminated.

The viscosity data was determined using a Brookfield RVF viscometer with a number 1 spindle @ 20 rpm, which is commercially available from Brookfield Engineering Laboratories, Middleboro, MA. The Brookfield viscometer was operated according to the procedures provided for its operation.

Each slurry was fed to a dual fluid nozzle at ambient temperature, and under the atomization pressure, reported in Table 2.

The same nozzle design was used for each sample. The nozzle type was an Air Atomizing Nozzle 1/2JBC, commercially available from Spraying Systems, Inc. The nozzle was configured with a round spray, external mix, spray set up no. SU 70, and pressure set up, according to Spraying Systems Catalog 60B Express (2000), which is a text available to those of ordinary skill in the art for operation of Spraying Systems nozzles. With an external mix, the air inlet for a drying chamber is not within a stream of incoming slurry. The particular dual fluid nozzle atomizer used was used in a pilot tower unit, which had a drying chamber of 1.524 meters in diameter, 4.267 meters in cylindrical height, and a drying volume of 8.59 cubic meters. The overall spray height was 5.587 meters. The drying chamber used in this Example 2 was obtained from Drytec North America LLC, Olympia Fields, IL.

As the atomized droplets of slurry exited the pressure nozzle, they were exposed to the Drying Conditions reported in Table 2. Hot air was fed to the drying chamber at the reported rate, which was measured using the pressure drop across the cyclone vessel. The reported inlet and outlet temperatures of the drying chamber were determined with type K thermocouples.

As moisture evaporated from the droplets due to contact with the hot air feed, green ceramic particles were formed having the Green Properties reported in Table 2. The reported residual volatiles % was determined with a CSC moisture analyzer based on complete moisture loss on drying, and indicates moisture that did not evaporate from the particle during drying. The poured density represents that amount of green particles that filled a container of known volume, while the tapped density represents that amount of

green particles that filled a container of known volume with tapping of the container as it was filled.

Green particles having a sieve size of U.S. mesh 40/270 were sintered in a CM Rapid Temperature static lab kiln to produce substantially round and spherical solid ceramic particles. Sintering was achieved using a heating rate of 17°C/min to a peak temperature of 1500°C with a 30 minute hold at peak temperature. Sintered Properties of the sintered solid ceramic particles such as size, grain fineness number, bulk density, apparent specific gravity and crush strength are reported below.

The bulk density was determined according to ANSI B74-4-1992 procedures, and the apparent specific gravity and crush strength were determined using API Recommended Practices RP60 for Testing Proppants.

Table 2					
Sample No.	1	2	3	4	5
Slurry Properties:					
Solids (wt %)	68.8	68.8	68.8	68.8	68.8
Dispersant (wt%)	0.15	0.15	0.15	0.15 + 120 g	0.15 + 120 g
Density (g/cc)	n/a	n/a	n/a	n/a	n/a
Viscosity (cps) at 20 RPM	424	424	424	274	274
Atomization Conditions					
Atomization Pressure (psig)	120	120	120	120	120
Drying Conditions:					
Drying Air Rate	N/A	N/A	N/A	N/A	N/A
Inlet Air Temp. °C	172	156	186	153	175
Outlet Air Temp. °C	129	118	135	118	129
Green Properties:					
Residual Volatiles, %	13.6	12.7	11.2	10.9	8.6
Poured Density, g/cc	1.01	1.02	1.03	.96	.98
Tapped Density, g/cc	1.06	1.06	1.08	1.02	1.05
Particle Size, microns					
90% less than	595.2	666.9	648.2	648.6	510.3
50% less than	243.6	315.8	281.8	299.1	57.5
10% less than	5.3	4.0	3.6	5.0	1.5
% Retained on Sieve U.S. Mesh No. (or pan)					
30	29.2	34.8	35.7	30.0	21.9
40	17.9	18.4	16.4	18.3	17.3
50	16.3	15.8	14.2	16.2	17.8
70	13.5	12.1	11.5	13.0	15.8
100	9.8	8.4	8.8	9.8	12.7

Table 2					
Sample No.	1	2	3	4	5
140	5.3	4.5	4.8	5.6	6.9
200	2.6	2.7	2.7	2.6	3.2
270	2.4	1.7	2.5	1.8	1.9
pan	3.0	1.6	3.4	2.6	2.5
Avg. Size, microns (including pan material)	406	435	426	411	374
Sintered Properties (40/270 material was sintered):					
Sieve, U.S. Mesh					
30	0.1	0.0	0.0	0.0	0.0
40	6.9	7.8	7.5	6.9	6.6
50	29.6	29.9	30.2	29.4	31.3
70	25.0	27.1	26.1	26.9	26.8
100	19.2	18.6	17.8	18.5	16.5
140	10.7	9.4	9.8	10.4	10.6
200	4.8	4.1	4.6	4.8	4.9
270	2.7	2.1	2.7	2.2	2.4
pan	1.1	1.0	1.2	0.9	0.9
Avg. Size, microns (including pan material)	262	269	266	264	266
Grain Fineness Number (GFN) (does not include pan material)	63.4	60.8	62.1	62.2	62.1
Bulk Density (g/cc)	1.51	1.46	1.47	1.48	1.48
Apparent Specific Gravity (ASG)	2.74	2.74	2.76	2.75	2.74
Crush on -50/+140:					
7500 psi % Crush	9.6	10.5	12.1	9.7	11.5

A comparison of Sample No. 2 to Sample No. 3 indicates that when the outlet air temperature (and therefore also the inlet air temperature) of the drying chamber was increased, (118 °C in No. 2 to 135 °C in No. 3), the average green particle size decreased from 435 to 426 microns. A comparison of Sample Nos. 4 and 5 indicates that when the outlet air temperature (and therefore also the inlet air temperature) of the drying chamber was increased, (118 °C in No. 4 to 129 °C in No. 5), the average green pellet size decreased from 411 to 374 microns. Those of ordinary skill in the art understand that a higher outlet air temperature of a drying chamber as described herein indicates a higher inlet air temperature. The reduction of inlet air temperature as between Sample Nos. 2 and 3, and between Sample Nos. 4 and 5 indicate that larger particles can be produced with lower inlet air temperatures.

A comparison of Sample Nos. 2 and 4 indicates that when additional dispersant is present (No. 4 contained 120 g more dispersant than No. 2, and therefore also had a lower viscosity than No. 2), the average green pellet size decreased from 435 to 411 microns. The additional binder and lower viscosity of Sample No. 4 as compared to Sample No. 2 indicates that larger particles can be produced with less binder and higher viscosity (i.e., Sample No. 2.)

In addition, the bulk densities and ASGs reported in Table 2 indicate that at least a portion of the sintered particles were solid.

Further, the values reported in Table 2 show that particles having a size, a bulk density, an apparent specific gravity and a 7500 psi crush strength suitable for use as propping material may be produced from slurries as described herein, and processed with spray dryer technology.

Example 3

Referring now to Table 3 below, the results of seven test runs that produced substantially round and spherical solid ceramic particles according to the methods disclosed herein are reported. Values reported in Table 3 as "n/a" were not determined.

Seven slurries having the Slurry Properties reported in Table 3 were prepared by agitating an uncalcined bauxitic kaolin clay with water and a dispersant in a high shear Cowles dissolver to achieve a slurry having the reported solids content. The clay had an alumina content of about 50 weight percent alumina, and was obtained from JF Blecher. The dispersant used was a sodium polyacrylate commercially available under the tradename C-211 from Kemira Chemicals, and was used in the amount reported in Table 3, which is a percent by weight of the dry clay used to make the slurry. Polyvinyl alcohol (PVA) having a molecular weight of 25,000 Mn was added to Sample Nos. 4 and 5 in an amount of about 0.30 percent by weight of the dry clay used to make the slurry. The PVA can be obtained from DuPont under the tradename Elvanol.

The slurry solids content reported in Table 3 was determined using a Ohaus MB45 moisture balance at 190°C until all physical moisture was eliminated. The viscosity data was determined using a Brookfield RVF viscometer with a number 1 spindle @ 20 rpm, which is commercially available from Brookfield Engineering Laboratories, Middleboro, MA. The Brookfield viscometer was operated according to the procedures provided for its operation.

The slurries were atomized according to the atomization conditions reported in Table 3. Each slurry was fed to a dual fluid nozzle atomizer at ambient temperature, at the feed rate, and under the atomization pressure, reported in Table 3. The duration reported in Table 3 indicates the time that the slurry was pumped at the indicated rate in order to make droplets of the slurry.

The same nozzle design was used for each Sample reported in Table 3. The nozzle type was an Air Atomizing Nozzle 1/4J, commercially available from Spraying Systems, Inc. The nozzle was configured with a flat spray, external mix, spray set up no. SUE 45, and pressure set up, according to Spraying Systems Catalog 60B Express (2000), which is a text available to those of ordinary skill in the art for operation of Spraying Systems nozzles. The nozzle was configured in a Drytec Nozzle Tower pilot unit, which had a drying chamber of 1.000 meters in diameter and 2.000 meters in cylindrical height with an overall spray height of 2.866 meters.

As the atomized droplets of slurry exited the pressure nozzle, they were exposed to the Drying Conditions reported in Table 3. Hot air was fed to the drying chamber at the reported rate, which was measured using the pressure drop across the cyclone vessel. The reported inlet and outlet temperatures of the drying chamber were determined with type K thermocouples.

As moisture evaporated from the droplets due to contact with the hot air feed, green ceramic particles were formed having the Green Properties reported in Table 3. The reported residual volatiles % was determined with a CSC moisture analyzer based on complete moisture loss on drying, and indicates moisture that did not evaporate from the particle during drying. The poured density represents that amount of green particles that filled a container of known volume, while the tapped density represents that amount of green particles that filled a container of known volume with tapping of the container as it was filled.

The green particles were sintered in a static, Blue M Lindberg lab kiln to produce substantially round and spherical solid ceramic particles. Sintering was achieved using a heating rate of 12°C/min to a peak temperature of 1510°C with a 30 minute hold at peak temperature. Sintered Properties of the sintered solid ceramic particles such as size, grain fineness number, bulk density, apparent specific gravity and crush strength are reported below.

The bulk density, apparent specific gravity and crush strength were determined using API Recommended Practices RP60 for testing proppants.

Table 3							
Sample No.	1	2	3	4	5	6	7
Slurry Properties:							
Solids (wt %)	64.6	64.6	64.6	59.9	59.9	68.2	50.0
Dispersant (wt %)	0.075	0.075	0.075	0.075	0.075	0.15	0.15
PVA (wt %)	0	0	0	0.30	0.30	0	0
Density (g/cc)	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Viscosity at 20 RPM (centipoises)	282	282	282	430	430	334	n/a
Atomization Conditions							
Feed Rate of slurry (gal/hr)	3.5	3.5	3.5	3.5	3.5	3.5	3.2
Atomization Pressure (psig)	80	80	70	70	60	60	60
Duration (min.)	11	19	18	18	57	25	43
Drying Conditions:							
Drying Air Rate (kg/hr)	6.08	6.08	6.08	7.25	7.25	4.35	8.35
Inlet Air Temp. °C	274	274	274	274	274	274	274
Outlet Air Temp. °C	104	93	99	104	119	119	119
Green Properties:							
Residual Volatiles, %	3.8	4.6	4.4	1.0	0.6	8.3	0.6
Poured Density, g/cc	1.20	1.20	0.85	0.81	0.79	0.97	0.76
Tapped Density, g/cc	1.25	1.25	0.90	0.86	0.84	1.01	0.80
Particle Size, microns							
90% less than	14.17	47.82	16.92	17.63	16.69	97.81	5.92
50% less than	3.13	3.51	2.82	3.16	3.74	5.21	1.64
10% less than	0.84	0.78	0.78	0.83	0.90	1.00	1.42
Product Wt. (kg)	1.248	2.187	2.061	1.087	3.458	3.958	1.144
% Retained on Sieve U.S. Mesh No. (or pan)							
30	0.4	0.9	2.1	0.0	0.0	5.7	0.1
40	1.3	4.2	4.5	0.2	0.1	15.1	0.1
50	5.2	8.1	9.8	0.9	0.8	21.3	0.2
70	12.4	12.8	13.7	3.0	4.0	25.7	0.3
100	18.4	17.4	17.1	7.4	10.5	18.1	0.7
140	19.4	17.4	17.1	7.4	10.5	18.1	0.7
200	14.9	13.5	13.1	16.0	16.9	3.3	9.6

Table 3							
Sample No.	1	2	3	4	5	6	7
270	14.7	12.5	11.4	19.8	20.4	1.3	32.6
pan	13.3	13.2	10.8	39.8	33.5	0.6	53.4
Avg. Size, microns (including pan material)	144	167	183	80	88	306	51
Sintered Properties (30/270 material was sintered)							
Sieve, U.S. Mesh							
30	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40	0.5	0.2	2.1	0.1	0.1	1.3	0.4
50	1.6	2.2	5.6	0.5	0.6	12.6	0.7
70	6.1	9.2	10.8	2.5	3.8	18.5	1.0
100	17.5	21.5	22.0	13.8	16.3	35.4	2.8
140	26.3	26.9	24.7	25.4	23.8	20.2	7.4
200	18.8	17.8	15.8	22.9	21.2	6.9	12.6
270	18.1	14.3	11.9	21.3	21.0	4.0	24.4
pan	11.1	7.9	7.1	13.5	13.2	1.1	50.7
Avg. Size, microns (including pan material)	121	133	154	104	109	199	62
Grain Fineness Number (GFN) (does not include pan material)	118	109.7	101.5	128.6	125.6	78.7	155.6
Bulk Density (g/cc)	1.47	1.44	1.45	1.28	1.26	1.58	1.22
Apparent Specific Gravity (ASG)	2.77	2.83	2.84	2.81	2.74	2.81	2.81
Crush on -50/+140:							
7500 psi % Crush	10.0	15.9	15.4	47.3	44.1	5.2	n/a

The exemplary slurries described in Table 3 illustrate that slurries having a solids content of greater than about 50 weight percent, greater than about 60 weight percent, and greater than about 65 weight percent can be maintained at viscosities suitable for feeding through atomizing equipment of a spray dryer. The solids content of the slurries contributed to the formation of solid, substantially round and spherical particles as described herein.

The bulk densities and ASGs reported in Table 3 indicate that at least some of the sintered particles were solid. The low inlet air temperatures (which are determined by lower outlet air temperatures) used to process the slurries of this Example 3 contributed to

the production of solid particles. Moreover, binder was not used to make the solid, substantially round and spherical particles described in Table 3.

In addition, the largest average particle sized material was produced from the highest residual volatile sample (Sample No. 6). The residual volatile content of Sample No. 6 indicates that Sample No. 6 was exposed to a reduced drying rate as compared to those samples discharged from the drying chamber with lower residual volatile contents. Thus, a reduced drying rate should contribute to the production of ceramic particles having properties as described herein.

Further still, the values reported in Table 3 show that particles having a size, a bulk density, an apparent specific gravity and a 7500 psi crush strength suitable for use as propping material may be produced using slurries prepared as described herein, and processed with spray dryer technology.

Example 4

Referring now to Table 4 below, the results of seven test runs that produced substantially round and spherical solid ceramic particles according to the methods disclosed herein are reported. Values reported in Table 4 as "n/a" were not determined.

The particles were produced from about a 5 gallon batch of slurry that was prepared by agitating a calcined bauxitic kaolin clay with water and a dispersant in a high shear Cowles dissolver to achieve a slurry having a solids content of about 59.5 weight percent, a viscosity at ambient temperature, 60 RPM, of about 130 centipoises, a pH of about 9.5 (by addition of ammonium hydroxide), and contained about 0.03 wt. percent of a dispersant, based on the weight of the dry clay starting material.

The dispersant was a sodium polyacrylate produced by Kemira Chemicals under the tradename C-211. The clay had an alumina content on a calcined basis of about 47 weight percent, and was obtained as calcined material, (calcined to about 2 wt. % loss on ignition), from CE Minerals, Andersonville GA.

The slurry was not immediately processed through the spray dryer, and therefore the viscosity had to be modified with additional dispersant to bring the viscosity back to a value such that the slurry could be sprayed. As the first run of slurry was processed, an additional 7.1 grams of the C-211 brand dispersant was added. After the first run, an additional 7.2 grams of the C-211 brand dispersant was added, such that the total amount added to the slurry as batched was 14.3 grams. No additional dispersant was added after

the second run, thus, the total amount of additional dispersant remained 14.3 grams, as reported in Table 4.

When sprayed to form particles, the slurries had a solids content and viscosity as reported in Table 4. The slurry solids content reported in Table 4 was determined using an Ohaus MB45 moisture balance at 190°C until all physical moisture was eliminated. The viscosity data was determined using a Brookfield RVF viscometer with a number 1 spindle @ 20 rpm, which is commercially available from Brookfield Engineering Laboratories, Middleboro, MA. The Brookfield viscometer was operated according to the procedures provided for its operation.

The slurries were atomized according to the atomization conditions reported in Table 4. Each slurry was fed to a dual fluid nozzle atomizer at ambient temperature, at feed rates and under atomization pressures as reported in Table 4. The duration reported in Table 4 indicates the time that the slurry was pumped at the indicated rate in order to make droplets of the slurry.

The same nozzle design was used for each Sample reported in Table 4. The nozzle type was an Air Atomizing Nozzle 1/4J, commercially available from Spraying Systems, Inc. The nozzle was configured with a flat spray, external mix, spray set up no. SUE 45, and pressure set up, according to Spraying Systems Catalog 60B Express (2000), which is a text available to those of ordinary skill in the art for operation of Spraying Systems nozzles. The nozzle was configured in a Drytec Nozzle Tower pilot unit, which had a drying chamber of 1.000 meters in diameter and 2.000 meters in cylindrical height with an overall spray height of 2.866 meters.

As the atomized droplets of slurry exited the pressure nozzle, they were exposed to the Drying Conditions reported in Table 4. Hot air was fed to the drying chamber at the reported rate, which was measured using the pressure drop across the cyclone vessel. The reported inlet and outlet temperatures of the drying chamber were determined with type K thermocouples.

As moisture evaporated from the droplets due to contact with the hot air feed, green ceramic particles were formed having the Green Properties reported in Table 4. The reported residual volatiles % was determined with a CSC moisture analyzer based on complete moisture loss on drying, and indicates moisture that did not evaporate from the particle during drying. The poured density represents that amount of green particles that filled a container of known volume, while the tapped density represents that amount of

green particles that filled a container of known volume with tapping of the container as it was filled.

The green particles were sintered in a static, Blue M Lindberg lab kiln to produce substantially round and spherical solid ceramic particles. Sintering was achieved using a heating rate of 12°C/min to a peak temperature of 1510°C with a 30 minute hold at peak temperature. Sintered Properties of the sintered solid ceramic particles such as size, grain fineness number, bulk density, apparent specific gravity and crush strength are reported below.

The bulk density, apparent specific gravity and crush strength were determined using API Recommended Practices RP60 for testing proppants.

Table 4							
Sample No.	1	2	3	4	5	6	7
Slurry Properties:							
Solids (wt %)	56.2	56.2	56.2	56.2	56.2	56.2	56.2
Dispersant (wt % as batched)	0.03	0.03	0.03	0.03	0.03	0.03	0.03
Additional Dispersant (grams, as sprayed)	7.1	14.3	14.3	14.3	14.3	14.3	14.3
Viscosity at 20 RPM (centipoises)	385	385	385	385	385	385	385
Atomization Conditions							
Feed Rate of slurry (gal/hr)	2.0	2.0	2.0	2.0	2.0	3.0	4.0
Atomization Pressure (psig)	80	80	80	60	45	45	45
Duration (min.)	30	30	35	10	30	15	15
Drying Conditions:							
Drying Air Rate	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Inlet Air Temp. °C	227	256	221	219	227	297	313
Outlet Air Temp. °C	118	118	107	107	107	107	107
Green Properties:							
Residual Volatiles, %	3.2	3.7	1.1	3.6	2.9	7.3	11.5
Poured Density, g/cc	N/A	0.62	0.59	0.63	0.64	0.84	1.42
Tapped Density, g/cc	N/A	0.65	0.61	0.66	0.70	0.87	1.45
Particle Size, microns							
90% less than	N/A	7.54	403.93	9.72	54.15	33.55	40.54
50% less than	N/A	2.26	4.32	3.33	41.02	3.64	8.84

Table 4							
Sample No.	1	2	3	4	5	6	7
10% less than	N/A	0.76	0.90	0.89	1.69	0.84	1.42
Product Wt. (kg)	0.227	0.488	0.989	0.417	1.783	1.075	2.155
% Retained on Sieve U.S. Mesh No. (or pan)							
30	N/A	0.1	0.0	0.1	0.0	0.1	0.1
40	N/A	0.1	0.1	0.1	0.2	0.8	1.8
50	N/A	0.7	0.6	0.5	1.9	4.4	7.8
70	N/A	3.9	3.2	2.6	6.2	9.6	12.7
100	N/A	8.4	6.4	5.7	12.2	14.3	16.0
140	N/A	16.2	12.6	12.2	19.6	17.9	17.8
200	N/A	20.6	18.6	21.6	27.0	17.5	16.7
270	N/A	30.5	32.7	32.7	22.6	19.9	17.2
pan	N/A	19.1	24.7	24.6	9.7	15.4	10.0
Avg. Size, microns (including pan material)	N/A	92.8	82.7	82.6	112.6	126.9	150.9
Sintered Properties (30/270 material was sintered)							
Sieve, U.S. Mesh							
30	N/A	0.5	0.2	0.0	0.0	0.1	0.2
40	N/A	1.3	0.1	0.1	0.1	0.2	0.7
50	N/A	2.5	0.3	0.4	1.7	3.4	1.7
70	N/A	3.2	2.0	3.0	5.9	9.4	2.5
100	N/A	5.1	4.8	8.0	10.5	13.4	5.3
140	N/A	8.7	7.9	13.4	16.1	17.8	10.5
200	N/A	11.8	11.4	15.8	17.3	16.9	14.9
270	N/A	17.6	16.6	19.6	18.9	17.1	21.2
pan	N/A	49.2	56.7	39.7	29.6	21.6	43.1
Avg. Size (microns) (includes pan material)	N/A	82.7	62.9	79.0	96.9	117.4	79.0
Grain Fineness Number (GFN) (does not include pan material)	N/A	132.3	142.1	135.9	126.5	116.4	139.7
GFN with pan	N/A	214.9	231.7	201.0	177.8	156.1	208.8
Bulk Density (g/cc)	N/A	1.38	1.21	1.25	1.41	1.42	1.38
Apparent Specific Gravity (ASG)	N/A	2.75	2.62	2.66	2.78	2.78	2.78

The exemplary slurries described in Table 4 illustrate that slurries having a solids content of greater than about 50 weight percent can be achieved at viscosities suitable for

feeding through atomizing equipment of a spray dryer. The solids content of the slurries contributed to the formation of solid, substantially round and spherical particles as described herein.

The bulk densities and ASGs reported in Table 4 indicate that at least some of the sintered particles were solid. The low inlet air temperatures (which are determined by lower outlet air temperatures) used to process the slurries of this Example 4 contributed to the production of solid particles. Moreover, binder was not used to make the solid, substantially round and spherical particles described in Table 4.

In addition, the largest average particle sized material was produced from the highest residual volatile sample (Sample No. 7). The residual volatile content of Sample No. 7 indicates that Sample No. 7 was exposed to a reduced drying rate as compared to those samples discharged from the drying chamber with lower residual volatile contents. Thus, a reduced drying rate should contribute to the production of ceramic particles having properties as described herein.

Example 5

From the methods developed through Examples 1 – 4, it is possible to estimate the dimensions of spray drying equipment, in particular, the drying chamber, that could produce particles larger still than those actually produced in Examples 1 – 4.

Referring now to Fig. 4, an estimate of desirable equipment dimensions is illustrated. The heights of the drying chambers of Examples 2 and 3, and the volume of the green particles produced therein are plotted on Fig. 4 at points 1 and 2, respectively. Point 3 on Fig. 4 corresponds to the height (about 9.8 m) of a production spray drying chamber manufactured by, and available for testing at, American Custom Drying. Assuming a linear relationship established by points 1 and 2, a drying chamber having a 9.8 m height should produce a green pellet volume of about 0.110 mm^3 . Continuing the assumption of a linear relationship, points 4 and 5 plotted on Fig. 4 correspond to a desired green pellet volume of about 0.212 mm^3 and 0.234 , respectively. Given such desired green pellet volume, the estimated height of the drying chamber the estimated height of a drying chamber for making such volumes were estimated and completed the plotting of points 4 and 5.

As illustrated in Fig. 4, the estimated height of a drying chamber for making 30/50 proppant sized pellets (approximately an average green pellet size of 765 microns) would

be 19.8 meters. Utilizing industrial screening machines such as Rotex Inc Model 522, the dried pellets may be screened, providing proppant pellets sized to yield 20/40, 20/30, or 18/40 products.

A drying chamber having a height of 19.8 meters as described herein could have a diameter of about 7.4250 meters and a volume of about 857.33 m³. Those of ordinary skill in the art would recognize that the dimensions of the drying chamber described in this Example 5 can vary, and that other diameters and ratios can be designed.

Selection of dimensions of for the drying chamber, in combination with the methods already discussed herein, namely, maximizing the solids content of the slurry, minimizing the amounts of solubles (e.g., dispersants and/or binders) in the slurry) while still maintaining a sprayable viscosity, lowering the inlet and outlet air temperatures fed to the drying chamber, should produce substantially round and spherical solid ceramic particles, that, when sintered, have an average particle size, bulk density, apparent specific gravity and crush strength suitable for use as proppant material.

According to the present methods, solid spherical ceramic particles are produced by adjusting one or more of (1) solids content (preferably higher solids content in the slurry); (2) solubles content (preferably minimal or no dispersant and/or binder in the slurry); and (3) air inlet temperatures (preferably a low temperature to slow the drying rate of the particles). In addition, controlling the drying air flow rates through the drying chamber (preferably a low rate), can contribute to the production of solid spherical ceramic particles as described herein. Moreover, selection of equipment dimensions, such as the height of the drying chamber of the spray dryer, can enhance the average size of the particles produced according to methods described herein.

The substantially round and spherical solid ceramic particles that are produced according to the methods described herein are suitable for a variety of uses, including but not limited to use as a proppant in oil or gas wells, and as a foundry media. Other embodiments of the current invention will be apparent to those skilled in the art from a consideration of this specification or practice of the invention disclosed herein. However, the foregoing specification is considered merely exemplary of the current invention with the true scope and spirit of the invention being indicated by the following claims.

WHAT IS CLAIMED IS:

1. A method for producing solid sintered ceramic particles that are substantially round and spherical comprising:

preparing a slurry having a solids content of greater than about 50% by weight, and comprising water and a ceramic starting material, which ceramic starting material has an alumina content of greater than about 40 weight percent;

feeding the slurry to an atomizer operably connected to a dryer;

operating the atomizer to atomize the slurry into droplets;

operating the dryer to provide an air inlet temperature in a range of from about 100 °C to about 500 °C;

forming solid substantially round and spherical particles by allowing the droplets to pass through the dryer and exit through a discharge of the dryer;

sintering at least a portion of the particles discharged from the dryer at a temperature of from about 1000°C to about 1600°C for a time at peak temperature of from about 20 to about 45 minutes, wherein sintered, solid, substantially round and spherical particles are formed having an average particle size of greater than about 200 microns, an average bulk density of greater than about 1.40 g/cc, and an average apparent specific gravity of greater than about 2.60.

2. The method of claim 1 wherein the air inlet temperature is in a range selected from the group consisting of from about 100°C to about 200°C, from about 200°C to about 300°C, from about 300°C to about 400°C, and from about 400°C to about 500°C.

3. The method of claim 1 wherein the air inlet temperature is in a range selected from the group consisting of from about 150°C to about 200°C and from about 200°C to about 250°C.

4. The method of claim 1 further comprising:

adding a binder to the slurry before feeding the slurry to the atomizer, wherein the binder is added to the slurry in an amount of less than about 0.5 weight percent, by weight of the ceramic starting material.

5. The method of claim 1 further comprising:
adding a binder to the slurry before feeding the slurry to the atomizer, wherein the binder is added to the slurry in an amount of less than about 1.0 weight percent, by weight of the ceramic starting material.
6. The method of claim 1 further comprising:
adding a dispersant to the slurry before feeding the slurry to the atomizer, wherein the dispersant is added to the slurry in an amount of less than about 0.3% weight percent.
7. The method of claim 1 further comprising:
adding a dispersant to the slurry before feeding the slurry to the atomizer, wherein the dispersant is added to the slurry in an amount of less than about 0.5% weight percent.
8. The method of claim 1 further comprising:
adding a dispersant to the slurry before feeding the slurry to the atomizer, wherein the dispersant is added to the slurry in an amount of less than about 1.0% weight percent.
9. The method of claim 1 wherein the ceramic starting material is selected from the group consisting of calcined material, uncalcined material, partially calcined material, and mixtures thereof.
10. The method of claim 1 wherein the ceramic starting material is selected from the group consisting of kaolin clay, bauxitic kaolin and bauxite.
11. The method of claim 1 wherein the atomizer is selected from the group consisting of rotary wheel atomizers, pressure nozzle atomizers and dual fluid nozzle atomizers.

12. A method for producing solid sintered ceramic particles that are substantially round and spherical comprising:

preparing a slurry having a solids content of greater than about 50% by weight, and comprising water and a ceramic starting material, which ceramic starting material has an alumina content of greater than about 40 weight percent;

feeding the slurry to an atomizer operably connected to a dryer;

feeding drying air into the dryer;

operating the atomizer to atomize the slurry into droplets;

forming solid substantially round and spherical particles by allowing the droplets to pass through the dryer; and

controlling at least one of the solids content of the slurry, the temperature of the drying air entering the dryer, and the feed rate of the drying air entering the dryer so as to produce solid substantially round and spherical particles, that when sintered at a temperature of from about 1000°C to about 1600°C for a time at peak temperature of from about 20 to about 45 minutes, have an average particle size of greater than about 200 microns, an average bulk density of greater than about 1.40 g/cc, and an average apparent specific gravity of greater than about 2.60.

13. The method of claim 12 further comprising:

adding at least one additive selected from the group consisting of dispersants and binders to the slurry; and

controlling the amount of the selected additive so as to produce the sintered, solid substantially round and spherical particles having an average particle size of greater than about 200 microns, an average bulk density of greater than about 1.40 g/cc, and an average apparent specific gravity of greater than about 2.60.

14. The method of claim 13 wherein the selected additive is a dispersant selected from the group consisting of colloids, polyelectrolytes, tetra sodium pyrophosphate, tetra potassium pyrophosphate, polyphosphate, ammonium citrate, ferric ammonium citrate and sodium hexametaphosphate.

15. The method of claim 13 wherein the selected additive is a binder selected from the group consisting of polyvinyl alcohol, polyvinyl acetate, methylcellulose, dextrin and molasses.

16. The method of claim 12 further comprising:

adjusting a dimension of the dryer so as to adjust at least one of the average particle size, bulk density and apparent specific gravity of the solid substantially round and spherical particles.

17. The method of claim 16 wherein the height of the dryer is increased so as to increase the average particle size of the solid substantially round and spherical particles.

18. Particles that:

are solid;

are substantially round and spherical;

have an average size of greater than about 200 microns;

have an average bulk density of greater than about 1.40 g/cc; and

have an average apparent specific gravity of greater than about 2.60, wherein the particles are formed by:

preparing a slurry having a solids content of greater than about 50% by weight, and comprising water and a ceramic starting material having an alumina content of greater than about 40 weight percent;

feeding the slurry to an atomizer operably connected to a dryer;

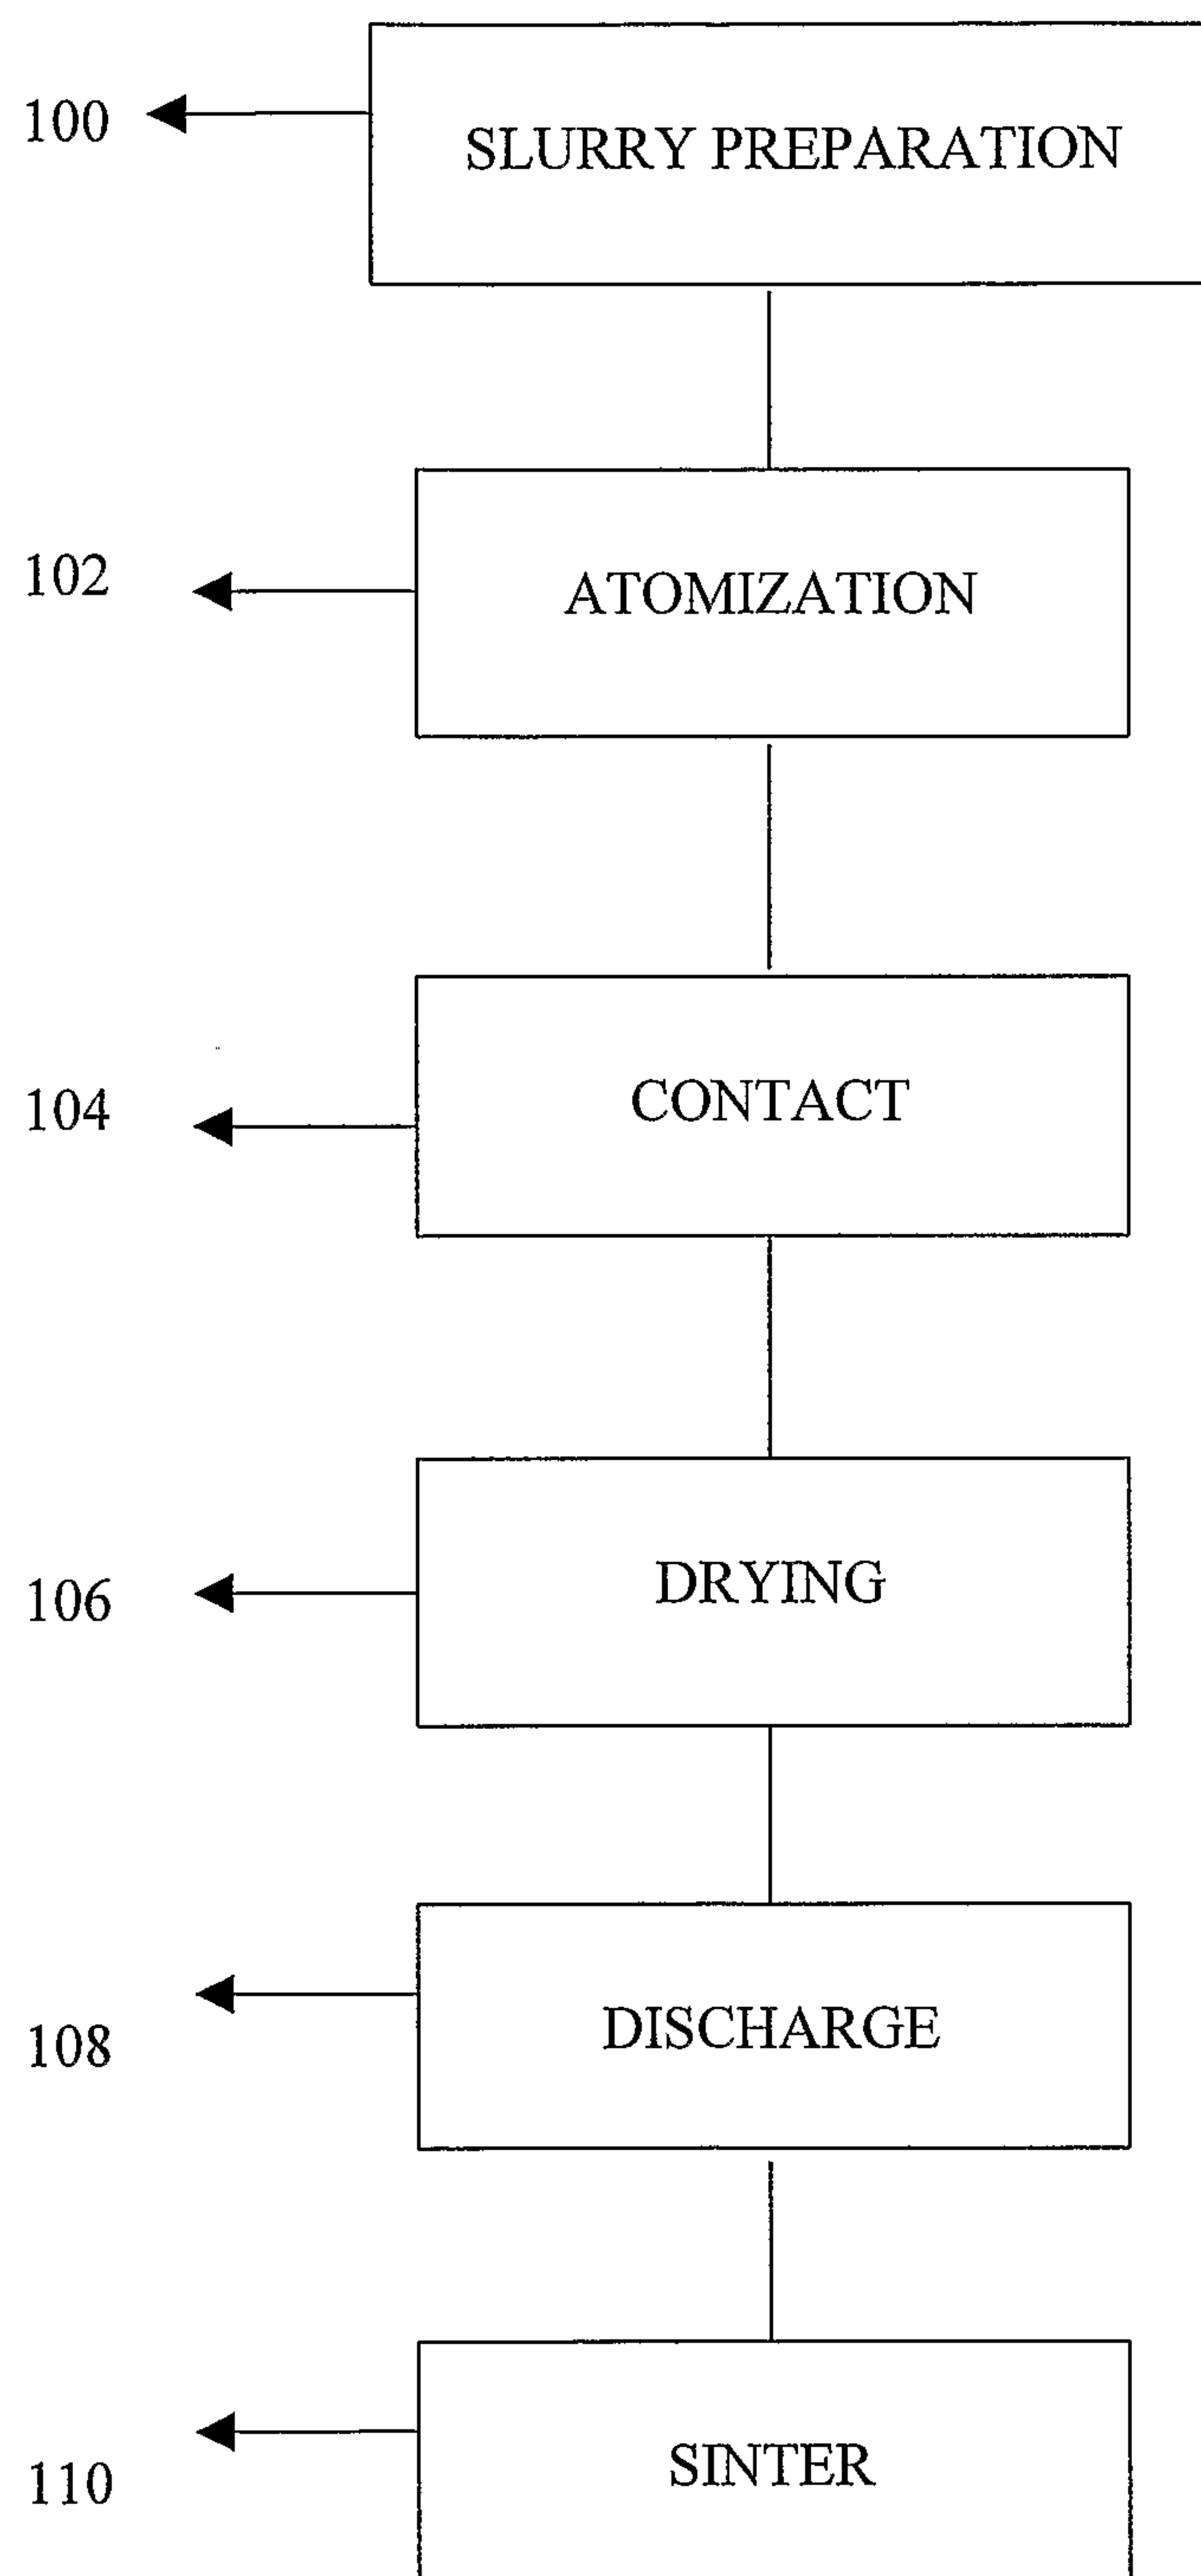
operating the atomizer to atomize the slurry into droplets;

operating the dryer to provide a flow of air into the dryer at an air inlet temperature in a range of from about 100 °C to about 500 °C;

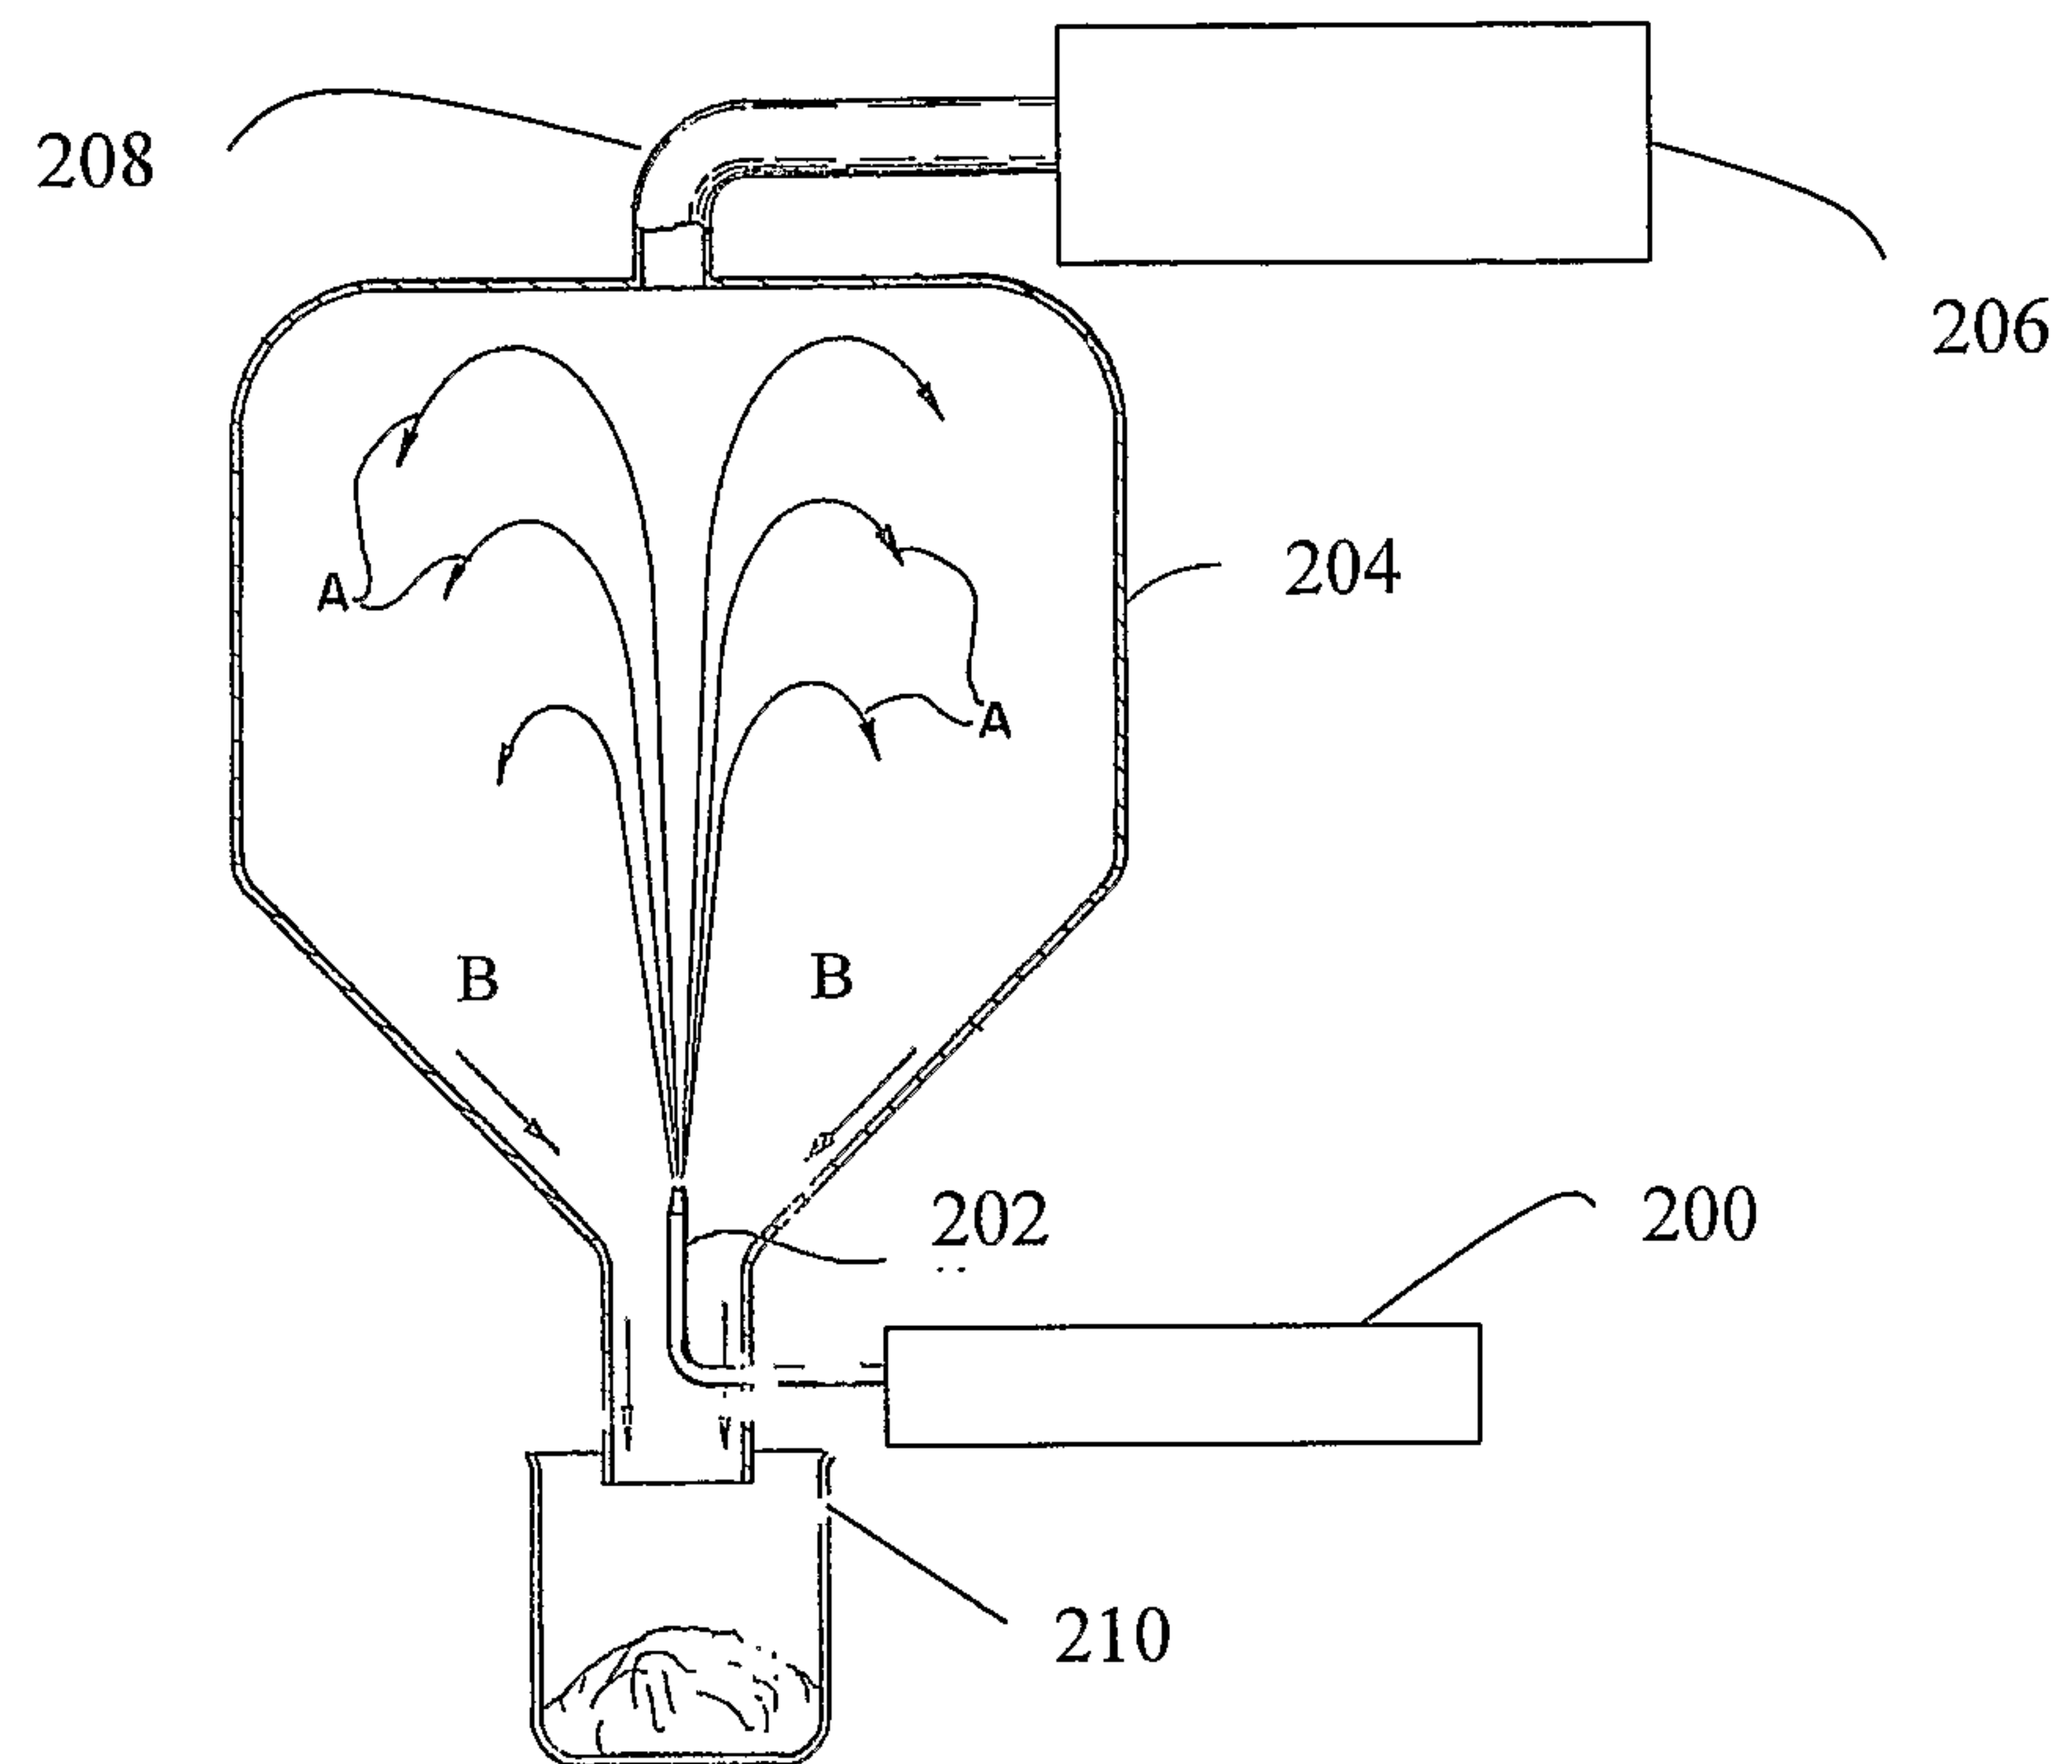
forming solid substantially round and spherical particles by allowing the droplets to pass through the dryer and exit through a discharge of the dryer; and

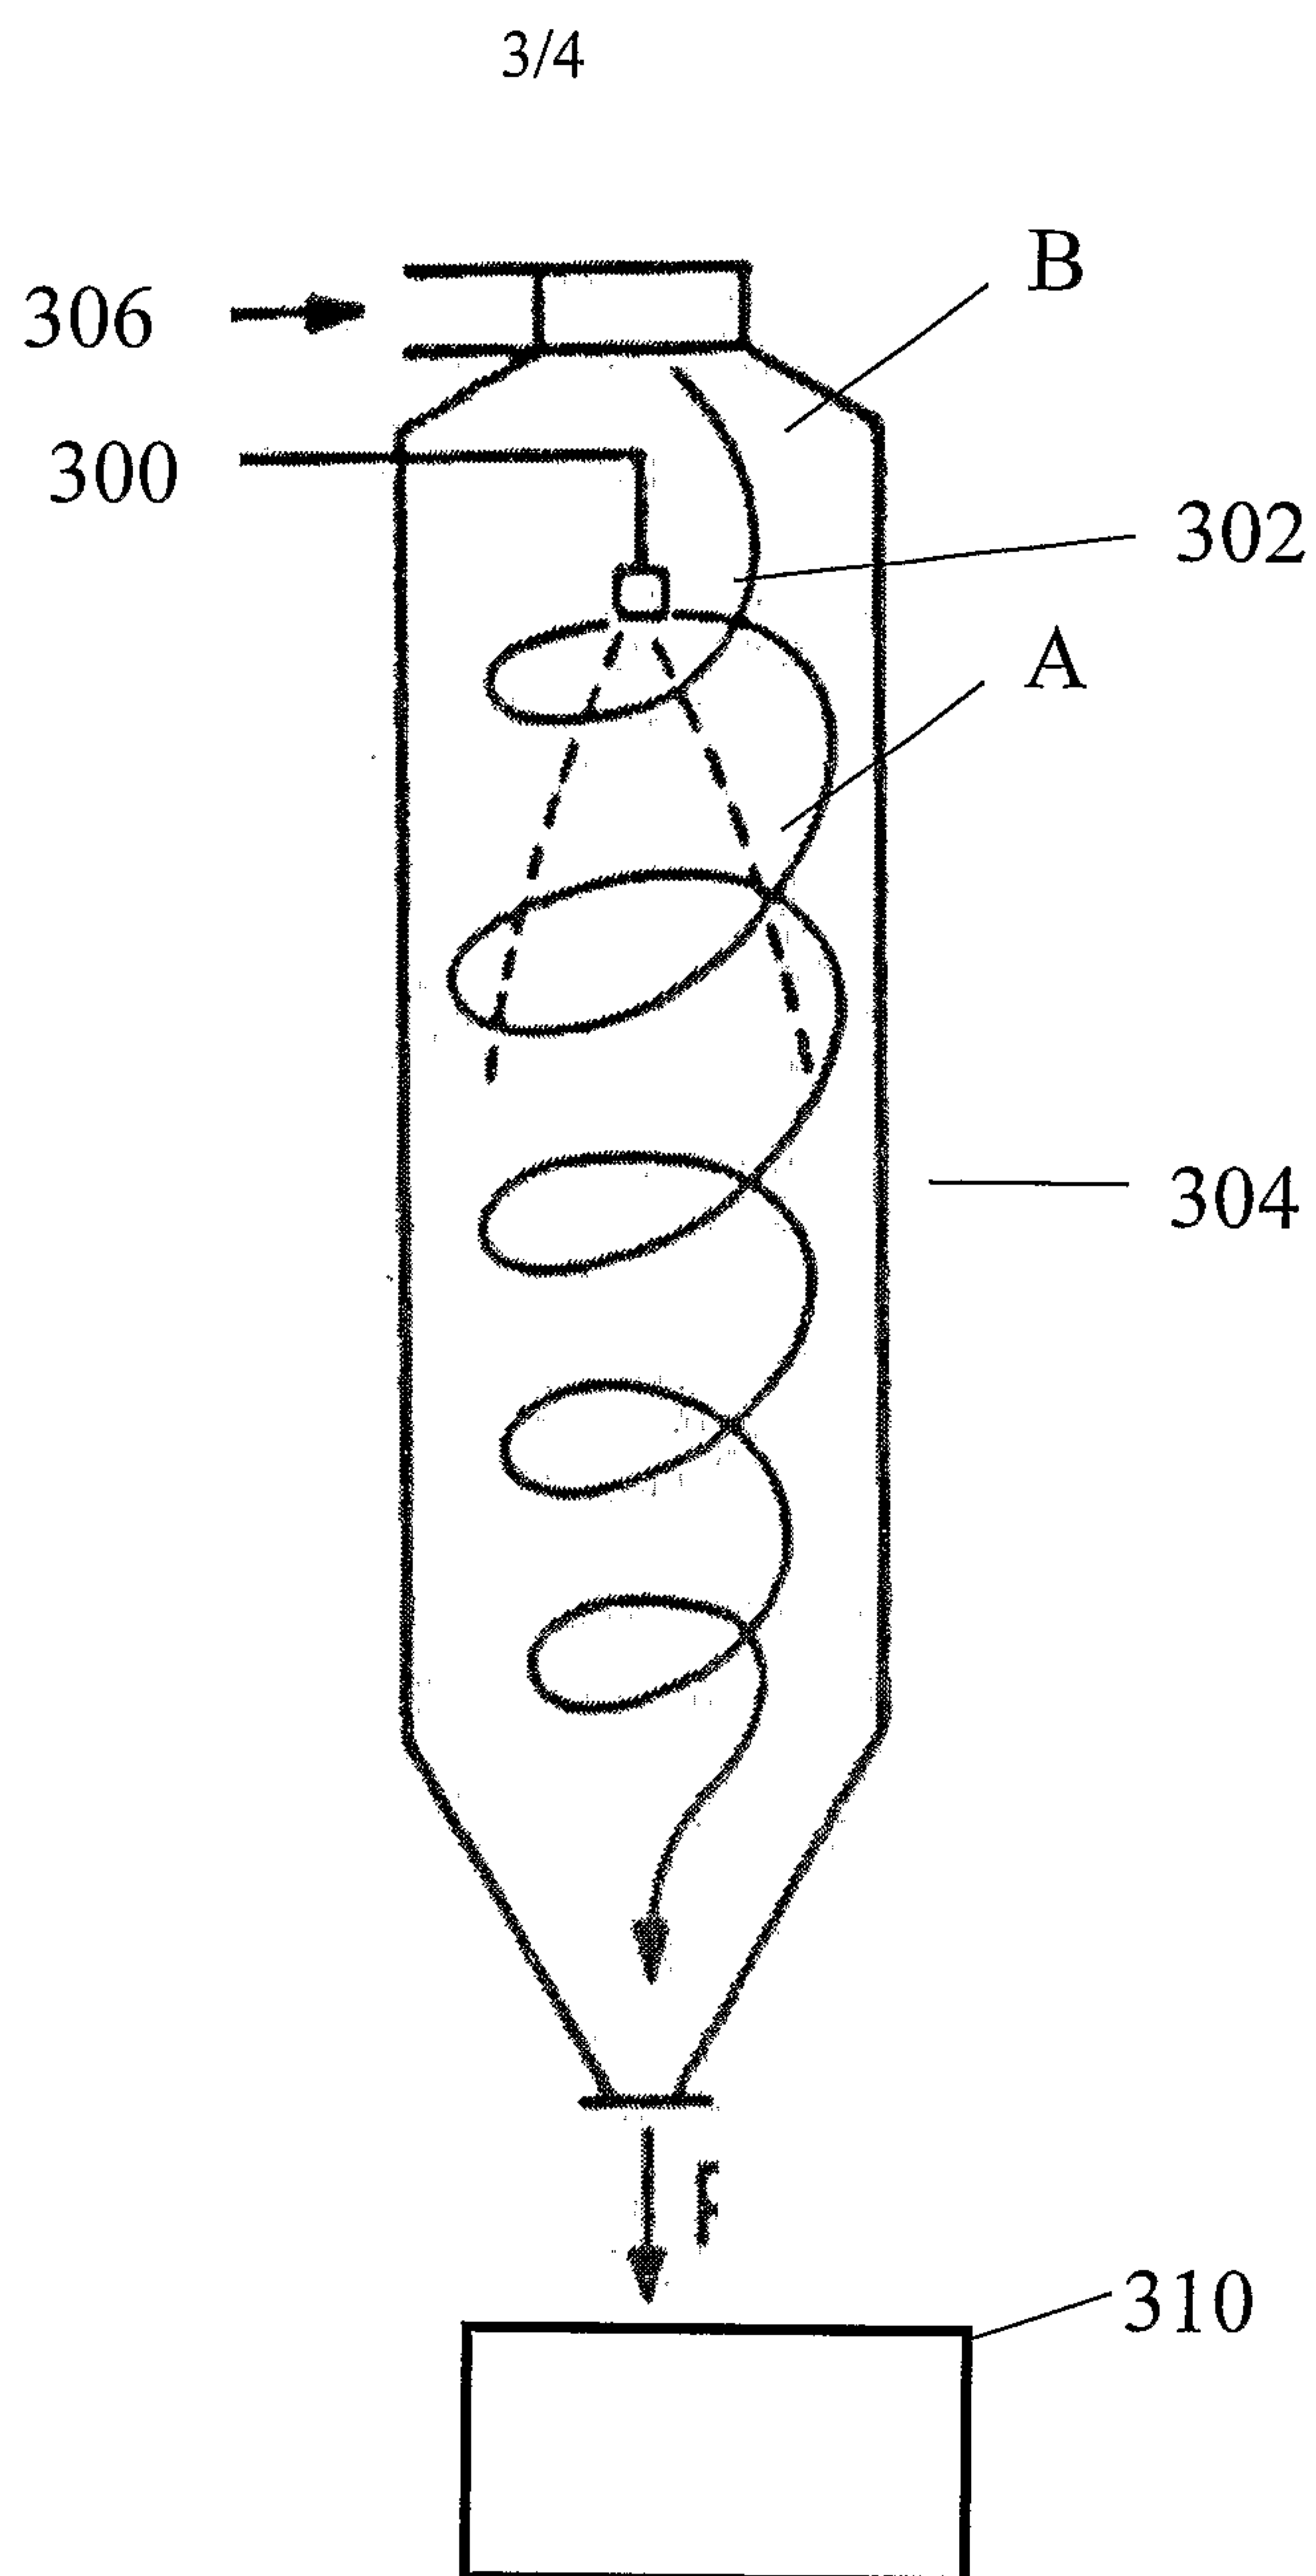
sintering at least a portion of the particles discharged from the dryer at a temperature of from about 1000°C to about 1600°C for a time at peak temperature of from about 20 to about 45 minutes.

1/4

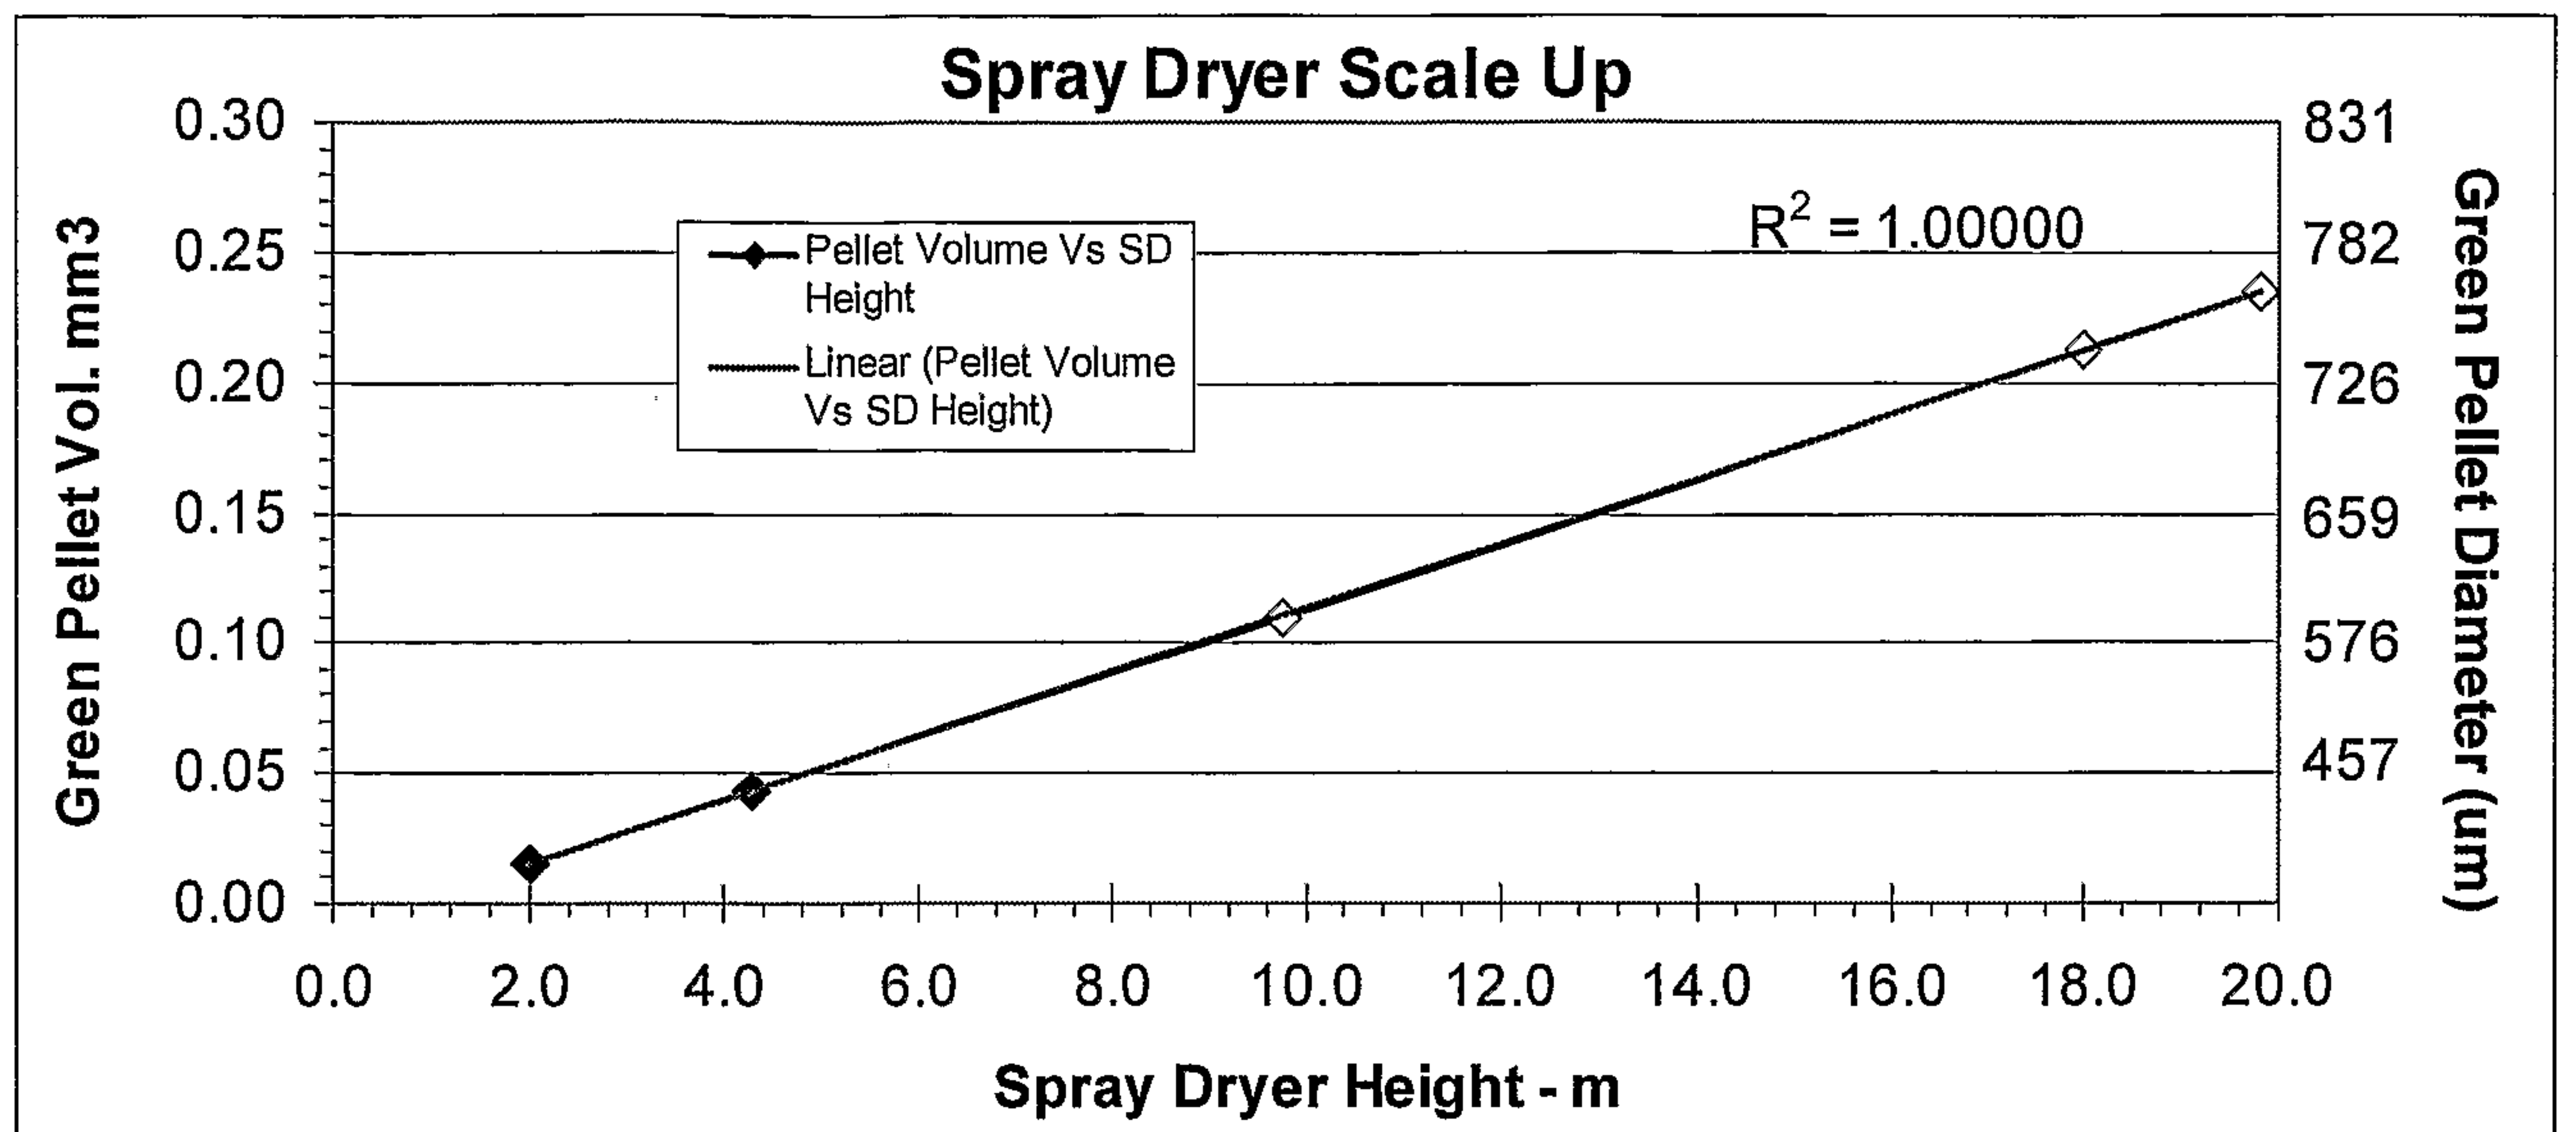
FIG. 1

2/4

FIG. 2

**FIG. 3**

4/4

**FIG. 4**

100

SLURRY PREPARATION

102

ATOMIZATION

104

CONTACT

106

DRYING

108

DISCHARGE

110

SINTER

