



- (51) **International Patent Classification:**
E21B 44/00 (2006.01) *G05B 19/02* (2006.01)
- (21) **International Application Number:**
PCT/US2014/040423
- (22) **International Filing Date:**
31 May 2014 (31.05.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/829,294 31 May 2013 (31.05.2013) US
- (71) **Applicant: KONGSBERG OIL & GAS TECHNOLOGIES INC.** [US/US]; 10777 Westheimer Rd., Suite 1200, Houston, TX 77042 (US).
- (72) **Inventors; and**
- (71) **Applicants : WAAGE, Trond** [NO/NO]; Eventyrveien 16a, N-4629 Kristiansand (NO). **ANDRESEN, Per, Arild** [NO/NO]; Odderheitoppen 1, N-4639 Kristiansand (NO).
- (74) **Agent: RAMAGE, W., Edward**; 211 Commerce Street, Suite 1000, Nashville, TN 37201 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

- (54) **Title: SYSTEM AND METHOD FOR COMBINING CURVES IN OILFIELD DRILLING AND PRODUCTION OPERATIONS**

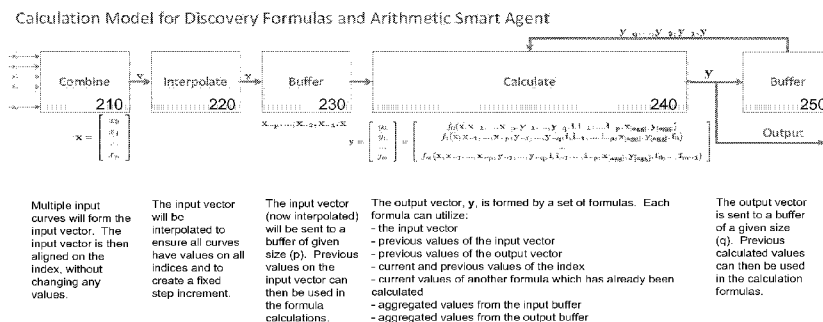


FIG. 4

- (57) **Abstract:** A system and method for processing and combining data from multiple curves or data-sets in oil field operations based upon a common index. The multiple input curves are combined to form an input vector. The input vector is aligned on the common index, without any values in the curve or data- set being changed. The input vector is then processed to ensure that all curves have values for all index values by interpolation. The input vector may be further processed to create a fixed step increment. An output vector is formed by operation of a set of formulas on the interpolated input vector.

SYSTEM AND METHOD FOR COMBINING CURVES IN OILFIELD DRILLING AND PRODUCTION OPERATIONS

This application claims benefit of and priority to U.S. Provisional Application No. 61/829,294, filed May 31, 2013, and is entitled to that filing date for priority. The specification, figures and complete disclosure of U.S. Provisional Application No. 61/829,294 are incorporated herein by specific reference for all purposes.

FIELD OF INVENTION

This invention relates generally to oil and gas well drilling and production, and related operations. More particularly, this invention relates to a computer-implemented system for combining and interpolating curves in oilfield drilling and production operations.

BACKGROUND OF THE INVENTION

It is well-known that the drilling of an oil or gas well, and related operations, is responsible for a significant portion of the costs related to oil and gas exploration and production. In particular, as new wells are being drilled into remote or less-accessible reservoirs, the complexity, time and expense to drill a well have substantially increased.

Accordingly, it is critical that drilling operations be completed safely, accurately, and efficiently. With directional drilling techniques, and the greater depths to which wells are being drilled, many complexities are added to the drilling operation, and the cost and effort required to respond to a problem during drilling are high. This requires a high level of competence from the driller or drilling engineer at the drilling rig (or elsewhere) to safely drill the well as planned.

A "well plan" specifies a number of parameters for drilling a well, and is developed, in part, based on a geological model. A geological model of various sub-surface formations is generated by a geologist from a variety of sources, including seismic studies, data from wells drilled in the area, core samples, and the like. A geological model typically includes depths to the various "tops" that define the formations (the term "top" generally refers to the top of a stratigraphic or biostratigraphic

boundary of significance, a horizon, a fault, a pore pressure transition zone, change in rock type, or the like. Geological models usually include multiple tops, thereby defining the presence, geometry and composition of subsurface features.

5 The well plan specifies drilling parameters as the well bore advances through the various subsurface features. Parameters include, but are not limited to, mud weight, drill bit rotational speed, and weight on bit (WOB). The drilling operators rely on the well plan to anticipate tops and changes in subsurface features, account for drilling uncertainties, and adjust drilling parameters accordingly.

10 In many cases, the initial geological model may be inaccurate. The depth or location of a particular top may be off by a number of feet. Further, since some geological models recite distances based on the distance between two tops, an error in the absolute depth of one top can result in errors in the depths of multiple tops. Thus, a wellbore can advance into a high pressure subsurface formation before anticipated.

15 Such errors thus affect safety as well as cost and efficiency. It is fundamental in the art to use drilling "mud" circulating through the drill string to remove cuttings, lubricate the drill bit (and perhaps power it), and control the subsurface pressures. The drilling mud returns to the surface, where cuttings are removed, and is then recycled.

20 In some cases, the penetration of a high pressure formation can cause a sudden pressure increase (or "kick") in the wellbore. If not detected and controlled, a "blowout" can occur, which may result in failure of the well. Blowout preventers ("BOP") are well known in the art, and are used to protect drilling personnel and the well site from the effects of a blowout. A variety of systems and methods for BOP monitoring and testing are known in the art, including "Blowout Preventer Testing System and Method," U.S. Pat. No. 7,706,890, and "Monitoring the Health of Blowout Preventer," US
25 2012/0197527, both of which are incorporated herein in their entireties by specific reference for all purposes.

30 Conversely, if the mud weight is too heavy, or the wellbore advances into a particularly fragile or fractured formation, a "lost circulation" condition may result where drilling mud is lost into the formation rather than returning to the surface. This leads not only to the increased cost to replace the expensive drilling mud, but can also result in

more serious problems, such as stuck drill pipe, damage to the formation or reservoir, and blowouts.

Similar problems and concerns arise during other well operations, such as running and cementing casing and tubulars in the wellbore, wellbore completions, or subsurface formation characterizations.

Drills strings and drilling operations equipment include a number of sensors and devices to measure, monitor and detect a variety of conditions in the wellbore, including, but not limited to, hole depth, bit depth, mud weight, choke pressure, and the like. This data can be generated in real-time, but can be enormous, and too voluminous for personnel at the drilling site to review and interpret in sufficient detail and time to affect the drilling operation. Some of the monitored data may be transmitted back to an engineer or geologist at a remote site, but the amount of data transmitted may be limited due to bandwidth limitations. Thus, not only is there a delay in processing due to transmission time, the processing and analysis of the data may be inaccurate due to missing or incomplete data. Drilling operations continue, however, even while awaiting the results of analysis (such as an updated geological model).

A real-time drilling monitor (RTDM) workstation is disclosed in "Drilling Rig Advisor Console," U.S. App. No. 13/31,646 which is incorporated herein by specific reference for all purposes. The RTDM receives sensor signals from a plurality of sensors and generates single graphical user interface with dynamically generated parameters based on the sensor signals.

Likewise, an intelligent drilling advisor system is disclosed in "Intelligent Drilling Advisor," U.S. Pat. No. 8,121,971, which is incorporated herein by specific reference for all purposes. The intelligent advisor system comprises an information integration environment that accesses and configures software agents that acquire data from sensors at a drilling site, transmit that data to the information integration environment, and drive the drilling state and the drilling recommendations for drilling operations at the drilling site.

SUMMARY OF INVENTION

In various embodiments, the present invention comprises a computer-implemented system and method for combining and interpolating curves in oilfield drilling and production operations.

In one embodiment, a Discovery Formulas agent provides the user with the ability
5 to create and modify formulas, particularly in the context of oilfield drilling and production operations. A formula comprises static parameters (static values), inputs (mnemonics), and outputs (formulas). Formula symbols are shown and described (with units and values). Mnemonic inputs supports both real-time and historical values and calculations. Outputs from a formula can be visualized and used in various Widgets
10 similar to log data (e.g., Log Widgets, History Table Widgets, and most single-value Widgets). Outputs can utilize static parameters and inputs with the equation, using predefined mathematical functions. In one exemplary embodiment, formula syntax is consistent with Microsoft Excel, and supported Excel functions are provided. In various exemplary embodiments, calculations can be performed client-side, server-side, or some
15 combination thereof.

In one exemplary embodiment, the Discovery Formulas agent may be used to process and combine data from multiple curves or data-sets based upon a common index (i.e., any type of input that includes an index/value pair). In one embodiment, the method comprises the following steps. First, the multiple input curves are combined to form the
20 input vector, x . The input vector is aligned on the common index, without any values in the curve or data-set being changed. The input vector is then processed to ensure that all curves have values for all index values by interpolation. Interpolation for a particular curve determines a data point value for an index value without a corresponding data point between two actual or measured data points. Interpolation methods can vary, and can
25 include, but are not limited to, linear interpolation, nearest point interpolation, or aggregated interpolation. The input vector may be further processed to create a fixed step increment.

The interpolated input vector is then sent to a buffer of a given size (p). Previous values on the input vector can then be used in the various formula calculations. An
30 output vector, y , is formed by operation of a set of formula calculations. Each formula can use the input vector, previous values of the input vector, previous values of the output

vector, current and previous values of the index, current values of another formula which has already been calculated, aggregated values from the input buffer, aggregated values from the output buffer, or combinations thereof. The output vector is sent to a buffer of a given size. Previously calculated values can then be used in (i.e., output to) the calculation formulas.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a Discovery Formula display screen.

10 Figure 2 shows the display screen of Figure 1 with section labels.

Figure 3 shows a formula configuration toolbar.

Figure 4 shows a diagram of an example of the Discovery Formulas process.

Figure 5 shows an example of a combination of three curves.

Figure 6 shows an example of the interpolation process.

15 Figure 7 shows an example of the process of addition of curves after interpolation.

Figure 8 shows an example of a Discovery Formula screen for mechanical specific energy.

Figure 9 shows an example of input curves alongside a calculated mechanical specific energy curve.

20 Figure 10 shows an example of a Discovery Formula screen for density and density standard deviation with filtering and confidence interval.

Figure 11 shows an example of curves for raw density with confidence interval and density standard deviation.

25 Figure 12 shows an example of a Discovery Formula screen for cuttings slip velocities.

Figures 13-14 show examples of curves for cuttings slip velocities.

Figure 15 shows an example of a Discovery Formula screen for D-Exponent with pore pressure.

Figures 16-17 show examples of curves for D-Exponent and pore pressure.

30 Figure 18 shows an example of a Discovery Formula screen for equivalent circulating density with moving average.

Figure 19 shows examples of curves for equivalent circulating density and velocities.

Figure 20 shows an example of a Discovery Formula screen for gas interpretation log and oil phase indicators.

5 Figure 21 shows an example of gas chromatograph curves.

Figure 22 shows an example of a chart for gas interpretation and oil phase.

Figure 23 shows an example of a Discovery Formula screen for actuator inclination moving average.

Figure 24 shows examples of curves for actuator inclination moving average.

10 Figure 25 shows an example of a Discovery Formula screen for simple or basic formation detection with hysteresis.

Figure 26 shows an example of formation detection curves.

Figures 27-29 shows an example of importing D-Exponent information from an Excel spreadsheet into a Discovery Formula calculation and resulting curves.

15

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

Computing Environment Context

The following discussion is directed to various exemplary embodiments of the present invention, particularly as implemented into a situationally-aware distributed
20 hardware and software architecture in communication with one or more operating drilling rigs. However, it is contemplated that this invention may provide substantial benefits when implemented in systems according to other architectures, and that some or all of the benefits of this invention may be applicable in other applications. For example, while the embodiments of the invention may be described herein in connection with wells used
25 for oil and gas exploration and production, the invention also is contemplated for use in connection with other wells, including, but not limited to, geothermal wells, disposal wells, injection wells, and many other types of wells. One skilled in the art will understand that the examples disclosed herein have broad application, and that the discussion of any particular embodiment is meant only to be exemplary of that

embodiment, and not intended to suggest that the scope of the disclosure, including the claims, is limited to that embodiment.

In order to provide a context for the various aspects of the invention, the following discussion provides a brief, general description of a suitable computing environment in which the various aspects of the present invention may be implemented. A computing system environment is one example of a suitable computing environment, but is not intended to suggest any limitation as to the scope of use or functionality of the invention. A computing environment may contain any one or combination of components discussed below, and may contain additional components, or some of the illustrated components may be absent. Various embodiments of the invention are operational with numerous general purpose or special purpose computing systems, environments or configurations. Examples of computing systems, environments, or configurations that may be suitable for use with various embodiments of the invention include, but are not limited to, personal computers, laptop computers, computer servers, computer notebooks, hand-held devices, microprocessor-based systems, multiprocessor systems, TV set-top boxes and devices, programmable consumer electronics, cell phones, personal digital assistants (PDAs), network PCs, minicomputers, mainframe computers, embedded systems, distributed computing environments, and the like.

Embodiments of the invention may be implemented in the form of computer-executable instructions, such as program code or program modules, being executed by a computer or computing device. Program code or modules may include programs, objects, components, data elements and structures, routines, subroutines, functions and the like. These are used to perform or implement particular tasks or functions. Embodiments of the invention also may be implemented in distributed computing environments. In such environments, tasks are performed by remote processing devices linked via a communications network or other data transmission medium, and data and program code or modules may be located in both local and remote computer storage media including memory storage devices.

In one embodiment, a computer system comprises multiple client devices in communication with at least one server device through or over a network. In various embodiments, the network may comprise the Internet, an intranet, Wide Area Network

(WAN), or Local Area Network (LAN). It should be noted that many of the methods of the present invention are operable within a single computing device.

A client device may be any type of processor-based platform that is connected to a network and that interacts with one or more application programs. The client devices
5 each comprise a computer-readable medium in the form of volatile and/or nonvolatile memory such as read only memory (ROM) and random access memory (RAM) in communication with a processor. The processor executes computer-executable program instructions stored in memory. Examples of such processors include, but are not limited to, microprocessors, ASICs, and the like.

10 Client devices may further comprise computer-readable media in communication with the processor, said media storing program code, modules and instructions that, when executed by the processor, cause the processor to execute the program and perform the steps described herein. Computer readable media can be any available media that can be accessed by computer or computing device and includes both volatile and nonvolatile
15 media, and removable and non-removable media. Computer-readable media may further comprise computer storage media and communication media. Computer storage media comprises media for storage of information, such as computer readable instructions, data, data structures, or program code or modules. Examples of computer-readable media include, but are not limited to, any electronic, optical, magnetic, or other storage or
20 transmission device, a floppy disk, hard disk drive, CD-ROM, DVD, magnetic disk, memory chip, ROM, RAM, EEPROM, flash memory or other memory technology, an ASIC, a configured processor, CDRom, DVD or other optical disk storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium from which a computer processor can read instructions or that can store
25 desired information. Communication media comprises media that may transmit or carry instructions to a computer, including, but not limited to, a router, private or public network, wired network, direct wired connection, wireless network, other wireless media (such as acoustic, RF, infrared, or the like) or other transmission device or channel. This may include computer readable instructions, data structures, program modules or other
30 data in a modulated data signal such as a carrier wave or other transport mechanism. Said transmission may be wired, wireless, or both. Combinations of any of the above

should also be included within the scope of computer readable media. The instructions may comprise code from any computer-programming language, including, for example, C, C++, C#, Visual Basic, Java, and the like.

Components of a general purpose client or computing device may further include
5 a system bus that connects various system components, including the memory and processor. A system bus may be any of several types of bus structures, including, but not limited to, a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. Such architectures include, but are not limited to, Industry Standard Architecture (ISA) bus, Micro Channel Architecture (MCA) bus,
10 Enhanced ISA (EISA) bus, Video Electronics Standards Association (VESA) local bus, and Peripheral Component Interconnect (PCI) bus.

Computing and client devices also may include a basic input/output system (BIOS), which contains the basic routines that help to transfer information between elements within a computer, such as during start-up. BIOS typically is stored in ROM.
15 In contrast, RAM typically contains data or program code or modules that are accessible to or presently being operated on by processor, such as, but not limited to, the operating system, application program, and data.

Client devices also may comprise a variety of other internal or external components, such as a monitor or display, a keyboard, a mouse, a trackball, a pointing
20 device, touch pad, microphone, joystick, satellite dish, scanner, a disk drive, a CD-ROM or DVD drive, or other input or output devices. These and other devices are typically connected to the processor through a user input interface coupled to the system bus, but may be connected by other interface and bus structures, such as a parallel port, serial port, game port or a universal serial bus (USB). A monitor or other type of display device is
25 typically connected to the system bus via a video interface. In addition to the monitor, client devices may also include other peripheral output devices such as speakers and printer, which may be connected through an output peripheral interface.

Client devices may operate on any operating system capable of supporting an application of the type disclosed herein. Client devices also may support a browser or
30 browser-enabled application. Examples of client devices include, but are not limited to, personal computers, laptop computers, personal digital assistants, computer notebooks,

hand-held devices, cellular phones, mobile phones, smart phones, pagers, digital tablets, Internet appliances, and other processor-based devices. Users may communicate with each other, and with other systems, networks, and devices, over the network through the respective client devices.

5 By way of further background, the term "software agent" refers to a computer software program or object that is capable of acting in a somewhat autonomous manner to carry out one or more tasks on behalf of another program or object in the system. Software agents can also have one or more other attributes, including mobility among computers in a network, the ability to cooperate and collaborate with other agents in the
10 system, adaptability, and also specificity of function (e.g., interface agents). Some software agents are sufficiently autonomous as to be able to instantiate themselves when appropriate, and also to terminate themselves upon completion of their task.

 The term "expert system" refers to a software system that is designed to emulate a human expert, typically in solving a particular problem or accomplishing a particular
15 task. Conventional expert systems commonly operate by creating a "knowledge base" that formalizes some of the information known by human experts in the applicable field, and by codifying some type of formalism by way the information in the knowledge base applicable to a particular situation can be gathered and actions determined. Some conventional expert systems are also capable of adaptation, or "learning", from one
20 situation to the next. Expert systems are commonly considered to be in the realm of "artificial intelligence."

 The term "knowledge base" refers to a specialized database for the computerized collection, organization, and retrieval of knowledge, for example in connection with an expert system. The term "rules engine" refers to a software component that executes one
25 or more rules in a runtime environment providing among other functions, the ability to: register, define, classify, and manage all the rules, verify consistency of rules definitions, define the relationships among different rules, and relate some of these rules to other software components that are affected or need to enforce one or more of the rules. Conventional approaches to the "reasoning" applied by such a rules engine in performing
30 these functions involve the use of inference rules, by way of which logical consequences can be inferred from a set of asserted facts or axioms. These inference rules are

commonly specified by means of an ontology language, and often a description language. Many reasoners use first-order predicate logic to perform reasoning; inference commonly proceeds by forward chaining and backward chaining.

The present invention may be implemented into an expert computer hardware and software system, implemented and operating on multiple levels, to derive and apply specific tools at a drilling site from a common knowledge base, including, but not limited to, information from multiple drilling sites, production fields, drilling equipment, and drilling environments. At a highest level, a knowledge base is developed from attributes and measurements of prior and current wells, information regarding the subsurface of the production fields into which prior and current wells have been or are being drilled, lithology models for the subsurface at or near the drilling site, and the like. In this highest level, an inference engine drives formulations (in the form of rules, heuristics, calibrations, or a combination thereof) based on the knowledge base and on current data. An interface to human expert drilling administrators is provided for verification of these rules and heuristics. These formulations pertain to drilling states and drilling operations, as well as recommendations for the driller, and also include a trendologist function that manages incoming data based on the quality of that data, such management including the amount of processing and filtering to be applied to such data, as well as the reliability level of the data and of calculations therefrom.

At another level, an information integration environment is provided that identifies the current drilling sites, and drilling equipment and processes at those current drilling sites. Based upon that identification, and upon data received from the drilling sites, servers access and configure software agents that are sent to a host client system at the drilling site; these software agents operate at the host client system to acquire data from sensors at the drilling site, to transmit that data to the information integration environment, and to derive the drilling state and drilling recommendations for the driller at the drilling site. These software agents include one or more rules, heuristics, or calibrations derived by the inference engine, and called by the information integration environment. In addition, the software agents sent from the information integration environment to the host client system operate to display values, trends, and reliability estimates for various drilling parameters, whether measured or calculated.

The information integration environment is also operative to receive input from the driller via the host client system, and to act as a knowledge base server to forward those inputs and other results to the knowledge base and the inference engine, with verification or input from the drilling administrators as appropriate.

5 According to another aspect of the invention, the system develops a knowledge base from attributes and measurements of prior and current wells, and from information regarding the subsurface of the production fields into which prior and current wells have been or are being drilled. According to this aspect of the invention, the system self-organizes and validates historic, real time, and/or near real time depth or time based
10 measurement data, including information pertaining to drilling dynamics, earth properties, drilling processes and driller reactions. This drilling knowledge base suggests solutions to problems based on feedback provided by human experts, learns from experience, represents knowledge, instantiates automated reasoning and argumentation for embodying best drilling practices.

15 According to yet another aspect of the invention, the system includes the capability of virtualizing information from a well being drilled into a collection of metalayers, such metalayers corresponding to a collection of physical information about the layer (material properties, depths at a particular location, and the like) and also information on how to successfully drill through such a layer, such metalayers re-
20 associating as additional knowledge is acquired, to manage real-time feedback values in optimizing the drilling operation, and in optimizing the driller response to dysfunction. Normalization into a continuum, using a system of such metalayers, enables real-time reaction to predicted downhole changes that are identified from sensor readings.

25 According to another aspect of the invention, the system is capable of carrying out these functions by creating and managing a network of software agents that interact with the drilling environment to collect and organize information for the knowledge base, and to deliver that information to the knowledge base. The software agents in this network are persistent, autonomous, goal-directed, sociable, reactive, non-prescriptive, adaptive, heuristic, distributed, mobile and self-organizing agents for directing the driller toward
30 drilling optimization, for collecting data and information, and for creating dynamic transitional triggers for metalayer instantiation. These software entities interact with their

environment through an adaptive rule-base to intelligently collect, deliver, adapt and organize information for the drilling knowledge base. According to this aspect of the invention, the software agents are created, modified and destroyed as needed based on the situation at the drilling rig, within the field, or at any feasible knowledge collection point or time instance within the control scope of any active agent.

According to another aspect of the invention, the software agents in the network of agents are controlled by the system to provide the recommendations to the drillers, using one or more rules, heuristics, and calibrations derived from the knowledge base and current sensor signals from the drilling site, and as such in a situationally aware manner.

In this regard, the software agents interact among multiple software servers and hardware states in order to provide recommendations that assist human drillers in the drilling of a borehole into the earth at a safely maximized drilling rate. The software "experts" dispatch agents, initiate transport of remote memory resources, and provide transport of knowledge base components including rules, heuristics, and calibrations according to which a drilling state or drilling recommendation is identified responsive to sensed drilling conditions in combination with a selected parameter that is indicative of a metalayer of the earth, and in combination with selected minimums and maximums of the drilling equipment sensor parameters. The software experts develop rules, heuristics, and calibrations applicable to the drilling site derived from the knowledge base that are transmitted via an agent to a drilling advisor application, located at the drilling site, that is coupled to receive signals from multiple sensors at the drilling site, and also to one or more servers that configure and service multiple software agents.

According to another aspect of the invention, the system is applied to circulation actors to optimize circulation, hydraulics at the drill bit point of contact with the medium being drilled, rationalization of distributed pressure and temperature measurements and to provide recommendations to avoid or recover from loss of circulation events.

In addition, while this invention is described in connection with a multiple level hardware and software architecture system, in combination with drilling equipment and human operators, it is contemplated that several portions and facets of this invention are separately and independently inventive and beneficial, whether implemented in this overall system environment or if implemented on a stand-alone basis or in other system

architectures and environments. Those skilled in the art having reference to this specification are thus directed to consider this description in such a light.

Workstations and Agents

In one embodiment, a work station comprises one or more computers or computing devices, and may be located at a well site or remotely. The system of the present invention can be implemented on a single computer system, multiple computers, a computer server, a handheld computing device, a tablet computing device, a smart phone, or any other type of computing device. The system may be in communication with and receives input from various sensors. In general, the system collects real-time sensor data sampled during operations at the well site, which may include drilling operations, running casing or tubular goods, completion operations, or the like. The system processes the data, and provides nearly instantaneous numerical and visual feedback through a variety of graphical user interfaces (GUIs). The GUIs are populated with dynamically updated information, static information, and risk assessments, although they also may be populated with other types of information, as described below. The users of the system thus are able to view and understand a substantial amount of information about the status of the particular well site operation in a single view, with the ability to obtain more detailed information in a series of additional views.

In one embodiment, the system is installed at the well site, and thus reduces the need to transmit data to a remote site for processing. The well site can be an offshore drilling platform or land-based drilling rig. This reduces delays due to transmitting information to a remote site for processing, then transmitting the results of that processing back to the well site. It also reduces potential inaccuracies in the analysis due to the reduction in the data being transmitted. The system thus allows personnel at the well site to monitor the well site operation in real time, and respond to changes or uncertainties encountered during the operation. In yet another embodiment, the system is installed at a remote site, in addition to the well site. This permits users at the remote site to monitor the well-site operation in a similar manner to a user at the well-site installation.

There are multiple possible system architectures. In one embodiment, the workstation comprises one or more processors or microprocessors coupled to one or more

input devices (e.g., mouse, keyboard, touchscreen, or the like), one or more output devices (e.g., display, printer, or the like), a network interface, and one or more non-transitory computer-readable storage devices. In some embodiments, the input and output devices may be part of the workstation itself, while in other embodiment such devices may be accessible to the workstation through a network or other connection.

In one exemplary embodiment, the network interface may comprise a wire-based interface (e.g., Ethernet), or a wireless interface (e.g., BlueTooth, wireless broadband, IEEE 802.11x WiFi, or the like), which provides network connectivity to the workstation and system to enable communications across local and/or wide area networks. The storage devices may comprise both non-volatile storage devices (e.g., flash memory, hard disk drive, or the like) and volatile storage devices (e.g., RAM), or combinations thereof. The storage devices store the system software which is executable by the processors or microprocessors to perform some or all of the functions describe below. The storage devices also may be used to store well plans, geological models, configuration files and other data.

In some exemplary embodiments, the system is a web-enabled application, and the system software may be accessed over a network connection such as the Internet. A user can access the software via the user's web browser. In some embodiments, the system performs all of the computations and processing described herein and only display data is transmitted to the remote browser or client for rendering screen displays on the remote computer. In other embodiment, the remote browser or software on the remote system performs some of the functionality described herein.

Sensors may be connected directly to the workstation at the well site, or through one or more intermediate devices, such as switches, networks, or the like. Sensors may comprise both surface sensors and downhole sensors. Surface sensors include, but are not limited to, sensors that detect torque, revolutions per minute (RPM), and weight on bit (WOB). Downhole sensors include, but are not limited to, gamma ray, pressure while drilling (PWD), and resistivity sensors. The surface and downhole sensors are sampled by the system during drilling or well site operations to provide information about a number of parameters. Surface-related parameters include, but are not limited to, the following: block position; block height; trip/running speed; bit depth; hole depth; lag

depth; gas total; lithography percentage; weight on bit; hook load; choke pressure; stand pipe pressure; surface torque; surface rotary; mud motor speed; flow in; flow out; mud weight; rate of penetration; pump rate; cumulative stroke count; active mud system total; active mud system change; all trip tanks; and mud temperature (in and out). Downhole
5 parameters include, but are not limited to, the following: all FEMWD; bit depth; hole depth; PWD annular pressure; PWD internal pressure; PWD EMW; PWD pumps off (min, max and average); drill string vibration; drilling dynamics; pump rate; pump pressure; slurry density; cumulative volume pumped; leak off test (LOT) data; and formation integrity test (FIT) data. Based on the sensed parameters, the system causes
10 the processors or microprocessor to calculate a variety of other parameters, as described below.

In one exemplary embodiment, the system software architecture comprises a database/server, a display or visualization module, one or more smart agents, one or more templates, and one or more "widgets." The database/server aggregates, distributes and
15 manages real-time data being generated on the rig and received through the sensors. The display or visualization module implements a variety of graphical user interface displays, referred to herein as "consoles," for a variety of well site operations. The information shown on a console may comprise raw data and calculated data in real time.

Templates defining a visual layout may be selected or created by a user to display
20 information in some portions of or all of a console. In some embodiments, a template comprises an XML file. A template can be populated with a variety of information, including, but not limited to, raw sensor data, processed sensor data, calculated data values, and other information, graphs, and text. Some information may be static, while other information is dynamically updated in real time during the well site operation. In
25 one embodiment, a template may be built by combining one or more display "widgets" which present data or other information. Smart agents perform calculations based on data generated through or by one or more sensors, and said calculated data can then be displayed by a corresponding display widgets.

In one exemplary embodiment, the system provides the user the option to
30 implement a number of consoles corresponding to particular well site operations. In one embodiment, consoles include, but are not limited to, rig-site fluid management, BOP

management, cementing, and casing running. A variety of smart agents and other programs are used by the consoles. Smart agents and other programs may be designed for use by a particular console, or may be used by multiple consoles. A particular installation of the system may comprise a single console, a sub-set of available consoles, or all available consoles.

In various embodiments, smart agents in the system can be managed with a toolbar or by a drop-down menu, which may be activated by clicking on a smart agent icon, right-click on a mouse button, or the like. Functions include, but are not limited to, adding a new agent, copying an agent configuration, importing or exporting an agent configuration file, deleting an agent, refreshing the status of an agent, or starting or stopping an agent. For certain smart agents, an agent configuration file must be imported to use the smart agent. In one embodiment, configuration files are denominated as *.agent files. Selecting the import option provides the user the option to enter the configuration file name, or browse to a location where the configuration file is stored.

Agents can be configured, and configuration files created or modified, using the agent properties display. The same properties are used for each agent, whether the agent configuration is created or imported. The specific configuration information (including, but not limited to, parameters, tables, inputs, and outputs) varies depending on the smart agent. Parameters represent the overall configuration of the agent, and include basic settings including, but not limited to, start and stop parameters, tracing, whether data is read to a log, and other basic agent information. Tables comprise information appearing in database tables associated with the agent. Inputs and outputs are the input or output mnemonics that are being tracked or reported on by the agent. For several embodiments, in order for data to be tracked or reported on, each output must have an associated output. This includes, but is not limited to, log and curve information.

Users can export an agent configuration file for other users to import and use. The export configuration button in the toolbar can be used for a selected agent, or the agent can be right-clicked on and the export configuration option chosen. The user confirms the action to download the file to a local hard drive or other file storage location. The user may name the file as desired. Once downloaded, the file can be copied, emailed, or otherwise transferred to another user for importation and use.

Copying an agent configuration allows the user to copy an agent configuration file and rename it. This saves the user from having to perform an initial setup of the agent properties or create a new configuration file multiple times, if the user has agent configurations that are similar. In one embodiment, the user right clicks on the desired agent, select the copy option, and identifies the wellbore for which the configuration is to be used. The user can name or rename the new agent configuration.

Discovery Formulas Agent

In one exemplary embodiment, the Discovery Formulas agent, which can be activated using the "MyAgents" tab within the system of the present invention, provides the user with the ability to create and modify formulas, particularly in the context of oilfield drilling and production operations. Figure 1 illustrates an example of a Discovery Formula screen showing a formula for "Mechanical Specific Energy" (MSE) **100**. A formula comprises static parameters (static values), inputs (mnemonics), and outputs (formulas). Formula symbols are shown and described (with units and values). Mnemonic inputs supports both real-time and historical values and calculations. Outputs from a formula can be visualized and used in various Widgets similar to log data (e.g., Log Widgets, History Table Widgets, and most single-value Widgets). Outputs can utilize static parameters and inputs with the equation, using predefined mathematical functions. In one exemplary embodiment, formula syntax is consistent with Microsoft Excel, and supported Excel functions are provided. In various exemplary embodiments, calculations can be performed client-side, server-side, or some combination thereof.

Figure 2 shows the expanded Discovery Formulas screen of Figure 1 with various sections labeled: Toolbar **102**; Configurations **104**; Input/Output Properties **106**; Static Parameters, Inputs and Outputs **108**; Outputs and Associated Equations **110**; Control Buttons **112**; and Graphical Representation of the Output Equation **100**.

The toolbar **102** provides the user various functions for working with formula configurations. As seen in Figure 3, the user can add a new formulas **122**, copy a formula **124**, import a formula **126**, export a formula **128**, refresh **130** and delete **132**. A search function with filter **134** is provided, as is a help function **136**.

The Configuration section **104** includes private (personal) and public formula configurations. The Input/Output Properties section **106** includes text fields for entering

the formula name and description, and buttons for adding and removing parameters and configuring interpolations. The Static Parameters, Inputs and Outputs section **108** defines the static elements for the equation, and includes formula symbols, values, descriptions, and units. The Outputs & Associated Equations section **110** shows the output formulas and includes the option to select particular formulas to use as output. The Graphical Representation section **112** displays a rendered graphic of the completed selected equation in standard mathematical notation format. The control buttons **112** allows the user to perform a test calculation, validate the formula, save the current configuration, and undo all of the changes made since the last saved configuration.

In one exemplary embodiment, the Discovery Formulas agent may be used to process and combine data from multiple curves or data-sets based upon a common index (i.e., any type of input that includes an index/value pair). As seen in Figure 4, the multiple input curves are combined **210** to form the input vector, $\mathbf{x}$. The input vector is aligned on the common index, without any values in the curve or data-set being changed.

The input vector is then processed to ensure that all curves have values for all index values by interpolation **220**. Interpolation for a particular curve determines a data point value for an index value without a corresponding data point between two actual or measured data points. Interpolation methods can vary, and can include, but are not limited to, linear interpolation, nearest point interpolation, or aggregated interpolation.

The input vector may be further processed to create a fixed step increment.

The interpolated input vector is then sent to a buffer **230** of a given size (p). Previous values on the input vector can then be used in the various formula calculations. An output vector, $\mathbf{y}$, is formed by operation of a set of formula calculations **240**. Each formula can use the input vector, previous values of the input vector, previous values of the output vector, current and previous values of the index, current values of another formula which has already been calculated, aggregated values from the input buffer, aggregated values from the output buffer, or combinations thereof. The output vector is sent to a buffer of a given size **250**. Previously calculated values can then be used in (i.e., output to) the calculation formulas.

An example of this process for combining multiple curves (A, B and C) is shown in Figure 5-6. The curves each are based on a common index value ("md"). In Figure 5,

the input vector is initially created by simply combining the three curves (i.e., to a single index value track). At this point, each curve does not have data values for each index value ("md") of the combination. Figure 6 shows the determination of data values for the curves through an interpolation process (linear interpolation, in this case). The values at each index value may then be added.

Figure 7 shows an example of the addition of two curves A and B (obtained from a log reader 400), starting with the initial combination step 310, processing through the interpolation buffer 320 to fill in the gaps in the curve data, and combining of numeric values at each index value through addition 330 after interpolation. The combine curve can then be sent to the log writer 402 (in this example), or used by an agent in a formula as described above. It should be noted that the numeric values of the curves also can be combined through mathematical operations other than addition.

Figures 8 through 29 show examples of various use cases for the above, but the invention can be used for all types of well log and drilling data (real time and historical), as well as any data that comes in the form of a curve. Use case examples include mechanical specific energy (Figures 8-9), density and density standard deviation (Figure 10-11), cuttings slip velocities (Figures 12-14), D-Exponent and pore pressure (Figures 15-17), equivalent circulating density with moving average (Figures 18-19), gas interpretation logs and oil phase indicators (Figures 20-22), actuator inclination and moving average (Figures 23-24), and formation detection with hysteresis (Figures 25-26). Figures 27-29 shows an example of importing D-Exponent information from an Excel spreadsheet into a Discovery Formula calculation and resulting curves.

Thus, it should be understood that the embodiments and examples described herein have been chosen and described in order to best illustrate the principles of the invention and its practical applications to thereby enable one of ordinary skill in the art to best utilize the invention in various embodiments and with various modifications as are suited for particular uses contemplated. Even though specific embodiments of this invention have been described, they are not to be taken as exhaustive. There are several variations that will be apparent to those skilled in the art.

CLAIMS

What is claimed is:

1. A method of processing information from operations at a well site, comprising:

receiving, using a processor or microprocessor, multiple data-sets related to at
5 least one well site operation, wherein said multiple data-sets are based upon a common index;

combining, using a processor or microprocessor, the multiple data-sets to form an input vector;

10 aligning, using a processor or microprocessor, the multiple data-sets on the common index, without modifying any received data values in the data sets;

creating an interpolated input vector by determining, using a processor or microprocessor, interpolated data values for each data-set for common index values where received data values do not exist; and

15 applying, using a processor or microprocessor, one or more formulas to the interpolated index vector to create an output vector.

2. The method of claim 1, wherein said formulas use the input vector, previous values of the input vector, previous values of the output vector, current and previous values of the index, aggregated values from an input or output buffer, or combinations thereof.

20 3. The method of claim 1, wherein the output vector is formed by summing the data values for each common index value.

4. The method of claim 1, further comprising the step of processing the input vector to create a fixed step increment for common index values.

25 5. The method of claim 1, wherein the inserted calculated data values are determined by interpolation.

6. The method of claim 1, wherein the data sets are well log data sets received from one or more log readers.

7. The method of claim 6, wherein the combined well log data sets are sent to a log writer.

30 8. A machine for processing information from operations at a well site, comprising:

a processor or microprocessor coupled to a computer memory, wherein the processor or microprocessor is programmed to process multiple data-sets of information by:

receiving, using a processor or microprocessor, multiple data-sets related to at least one well site operation, wherein said multiple data-sets are based upon a common index;

combining, using a processor or microprocessor, the multiple data-sets to form an input vector;

aligning, using a processor or microprocessor, the multiple data-sets on the common index, without modifying any received data values in the data sets;

creating an interpolated input vector by determining, using a processor or microprocessor, interpolated data values for each data-set for common index values where received data values do not exist; and

applying, using a processor or microprocessor, one or more formulas to the interpolated index vector to create an output vector.

9. The machine of claim 8, wherein said formulas use the input vector, previous values of the input vector, previous values of the output vector, current and previous values of the index, aggregated values from an input or output buffer, or combinations thereof.

10. The machine of claim 8, wherein the output vector is formed by summing the data values for each common index value.

11. The machine of claim 8, further comprising the step of processing the input vector to create a fixed step increment for common index values.

12. The machine of claim 8, wherein the inserted calculated data values are determined by interpolation.

13. The machine of claim 8, wherein the data sets are well log data sets received from one or more log readers.

14. The machine of claim 13, wherein the combined well log data sets are sent to a log writer.

15. A non-transitory computer-readable storage medium with an executable program stored thereon, wherein the program instructs a processor or microprocessor to perform the following steps:

receiving, using a processor or microprocessor, multiple data-sets related to at least one well site operation, wherein said multiple data-sets are based upon a common index;

combining, using a processor or microprocessor, the multiple data-sets to form an input vector;

aligning, using a processor or microprocessor, the multiple data-sets on the common index, without modifying any received data values in the data sets;

creating an interpolated input vector by determining, using a processor or microprocessor, interpolated data values for each data-set for common index values where received data values do not exist; and

applying, using a processor or microprocessor, one or more formulas to the interpolated index vector to create an output vector.

16. The medium of claim 15, wherein said formulas use the input vector, previous values of the input vector, previous values of the output vector, current and previous values of the index, aggregated values from an input or output buffer, or combinations thereof.

17. The medium of claim 15, wherein the output vector is formed by summing the data values for each common index value.

18. The medium of claim 15, further comprising the step of processing the input vector to create a fixed step increment for common index values.

19. The medium of claim 15, wherein the inserted calculated data values are determined by interpolation.

20. The medium of claim 15, wherein the data sets are well log data sets received from one or more log readers, and the output vector is sent to one or more log writers.

FIG. 1

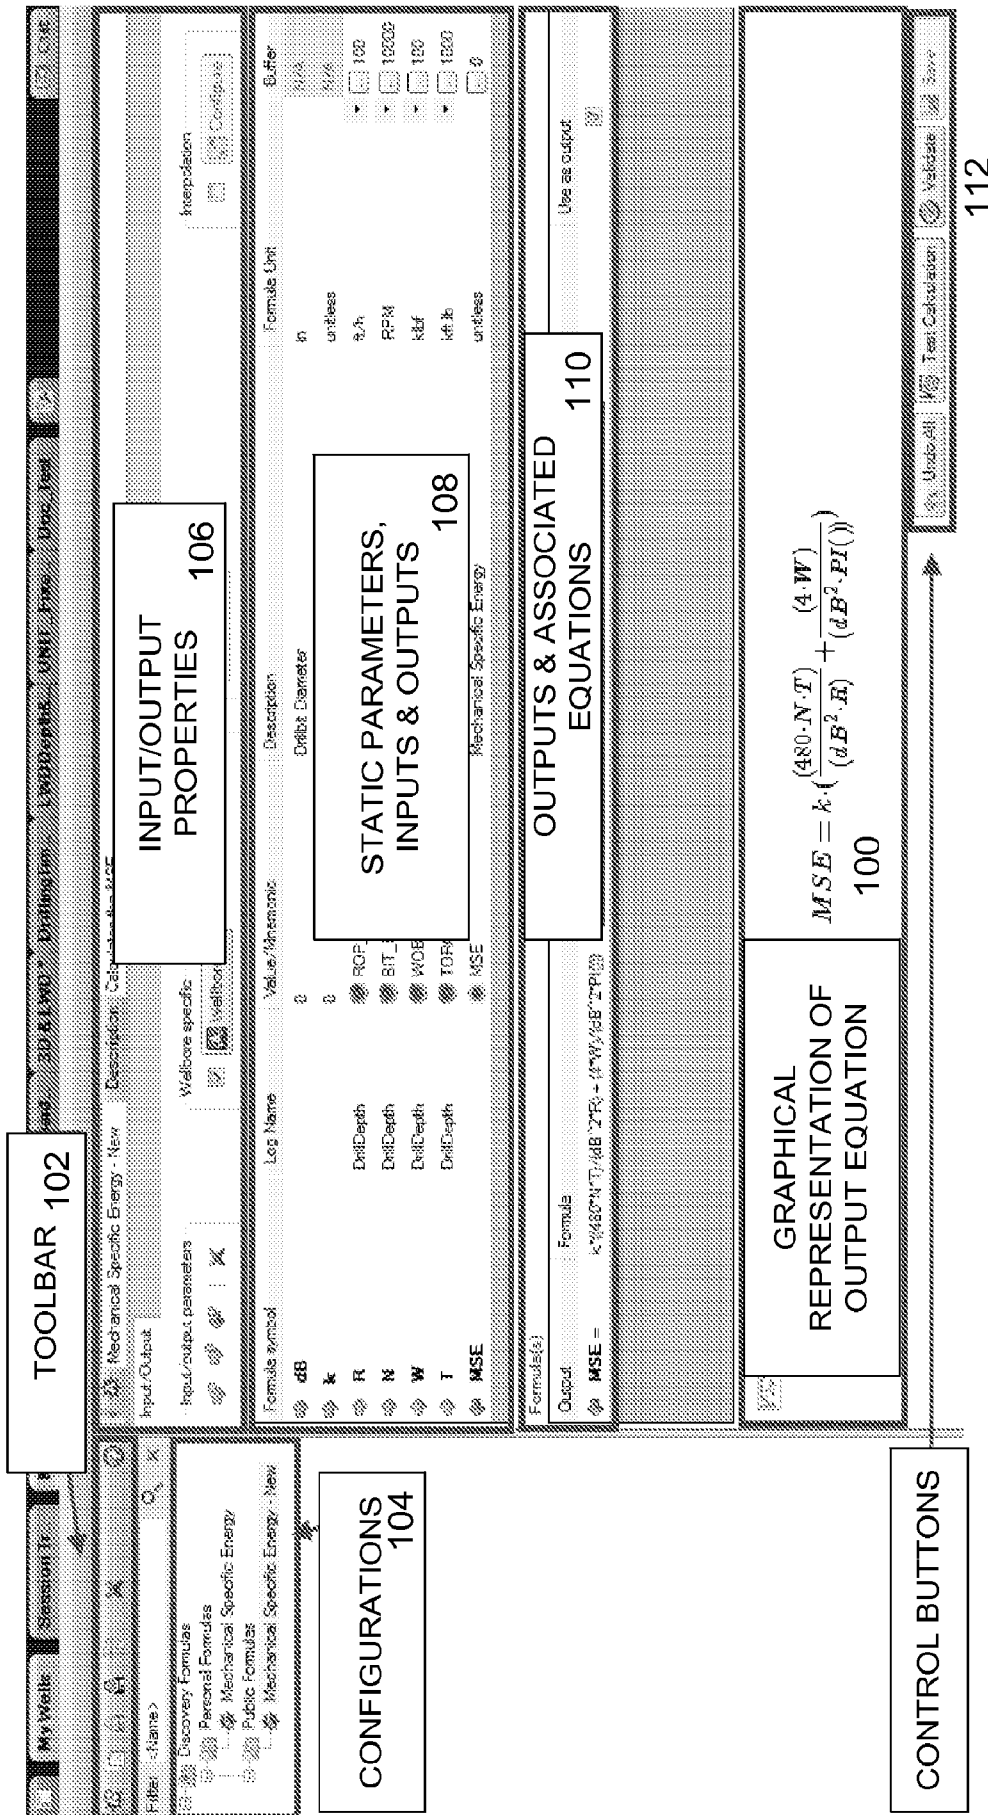


FIG. 2


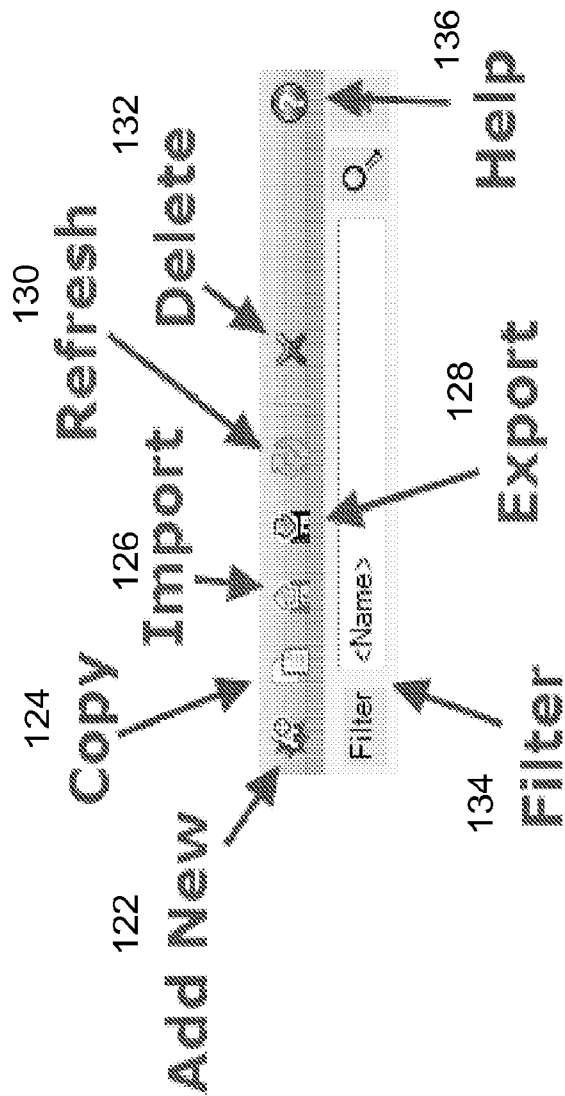


FIG. 3

Calculation Model for Discovery Formulas and Arithmetic Smart Agent

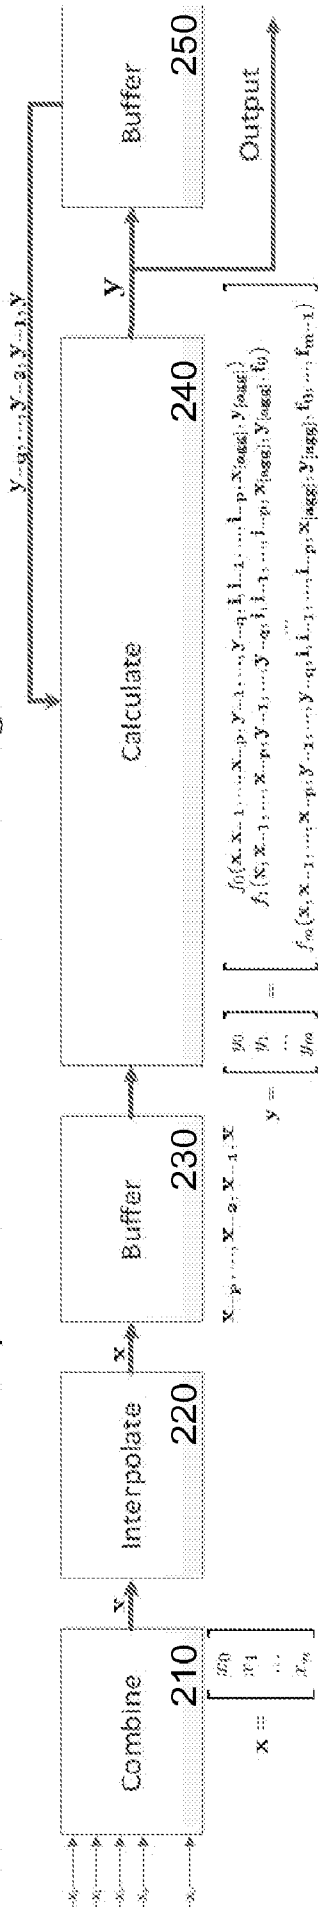

The output vector is sent to a buffer of a given size (q). Previous calculated values can then be used in the calculation formulas.

The output vector, y , is formed by a set of formulas. Each formula can utilize:

- the input vector
- previous values of the input vector
- previous values of the output vector
- current and previous values of the index
- current values of another formula which has already been calculated
- aggregated values from the input buffer
- aggregated values from the output buffer

The input vector (now interpolated) will be sent to a buffer of given size (p). Previous values on the input vector can then be used in the formula calculations.

The input vector will be interpolated to ensure all curves have values on all indices and to create a fixed step increment.

Multiple input curves will form the input vector. The input vector is then aligned on the index, without changing any values.

FIG. 4

Combining curves

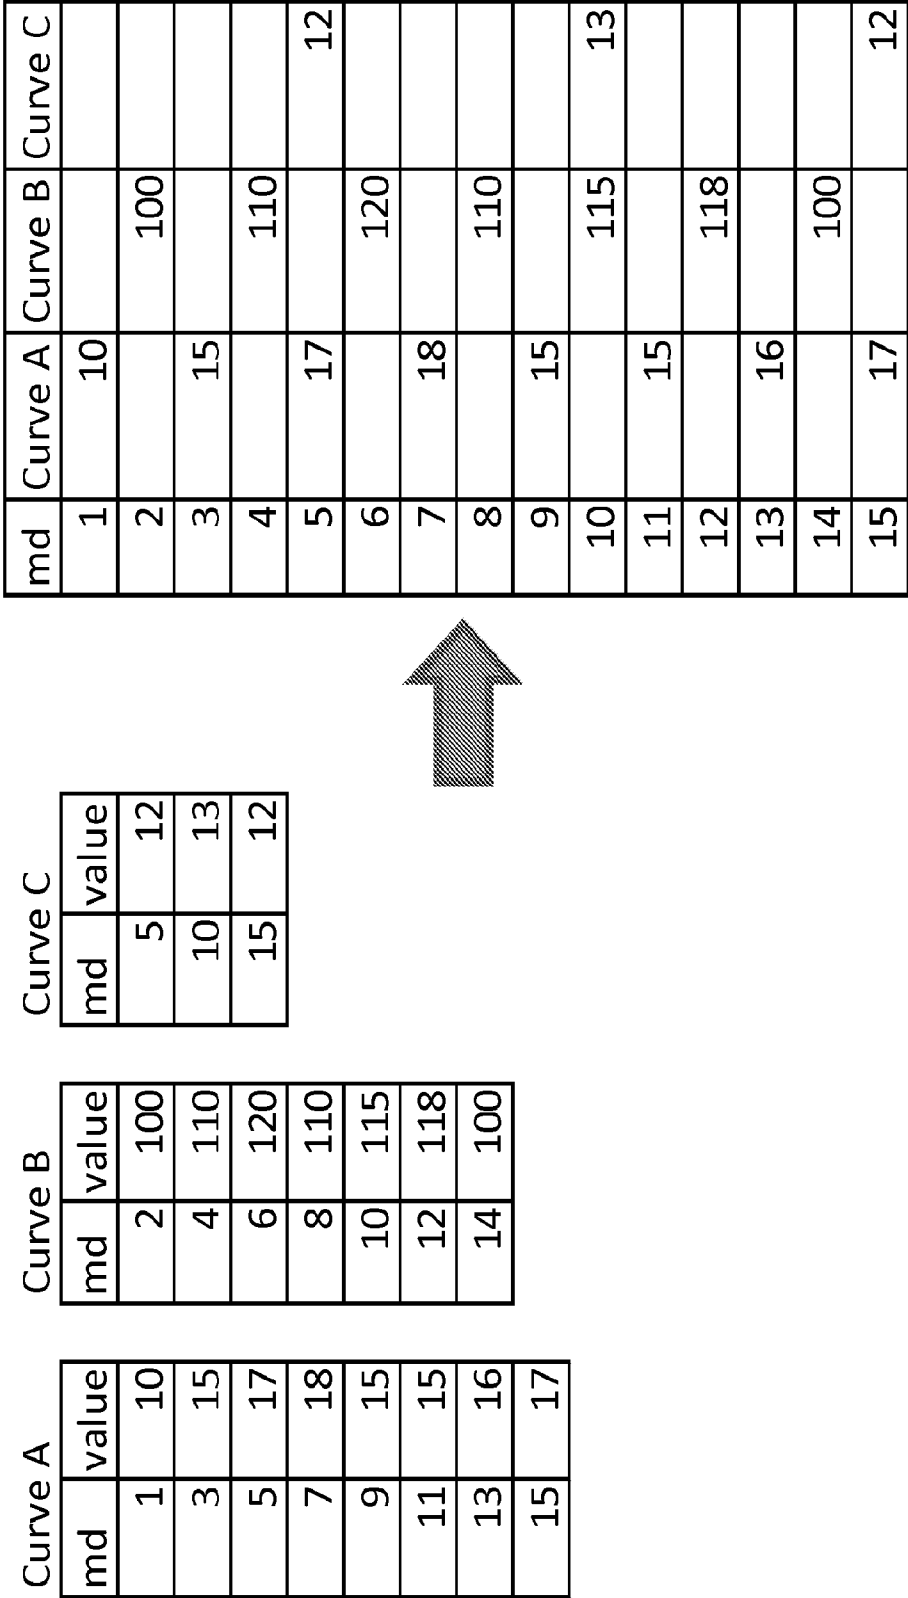


FIG. 5

Interpolation example (linear)

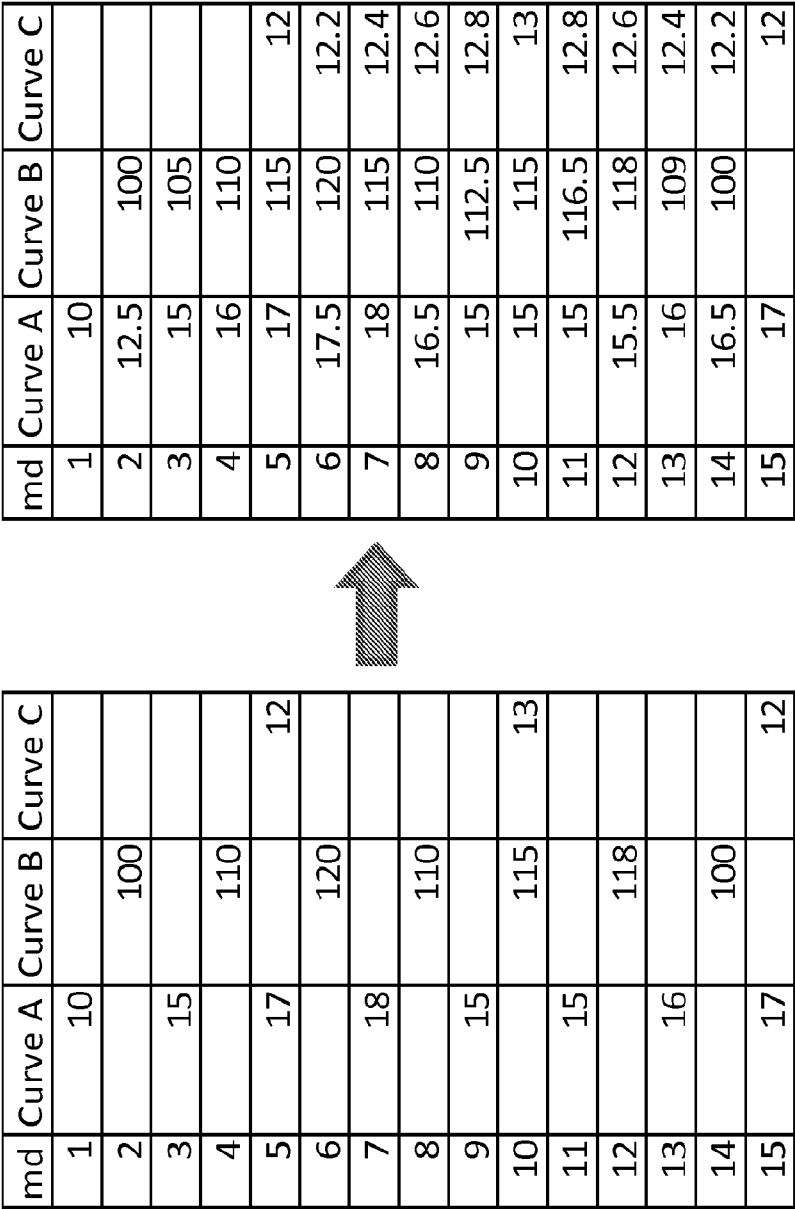


FIG. 6

Simple Agent Example

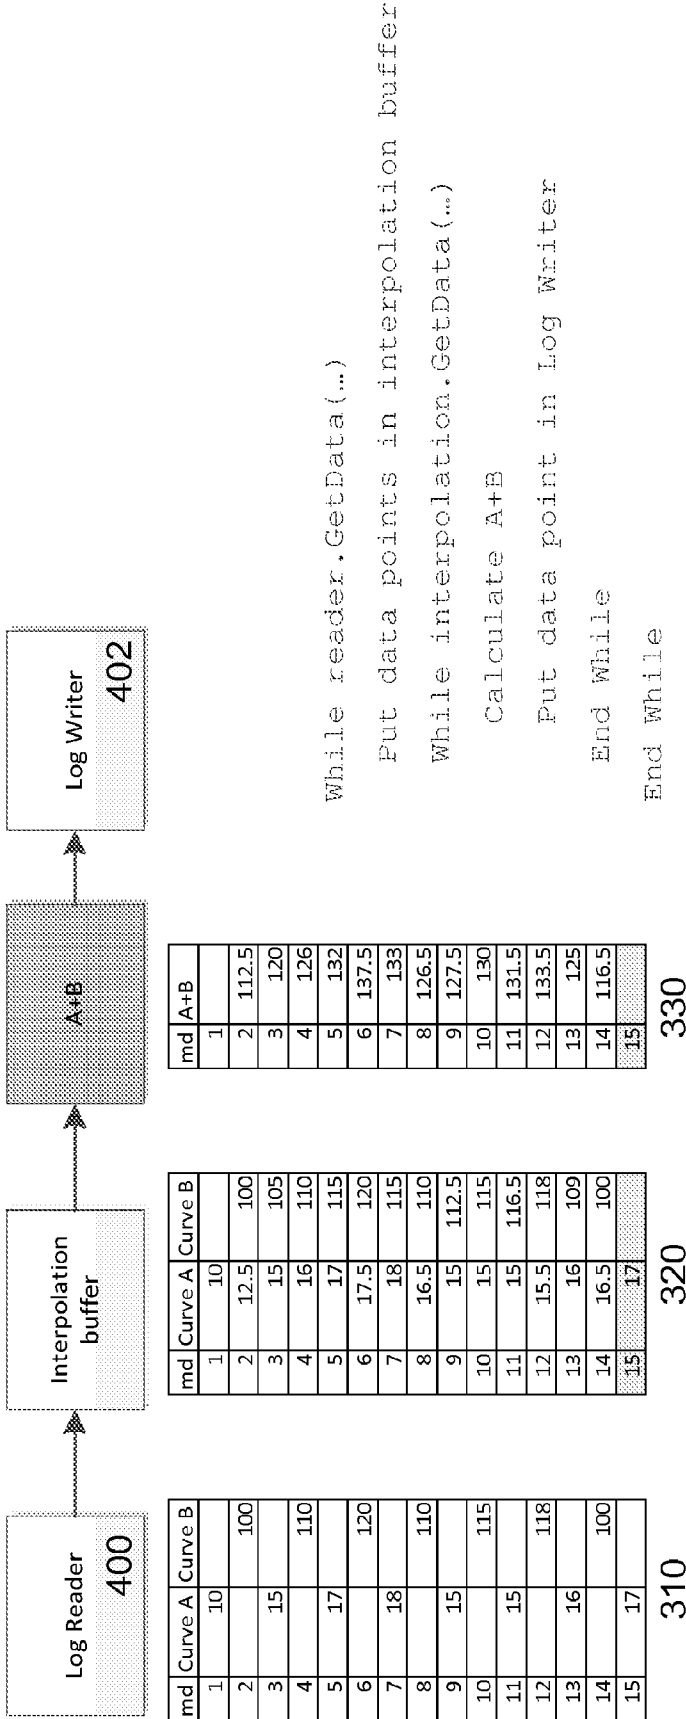


FIG. 7

My Agents

Mechanical Specific Energy

Description

Mechanical Specific Energy

Input/Output

Input/Output parameters

Time/Depth

Interpolation

Configure

Formula symbol	Log Name	Value/Mnemonic	Description	Formula Unit	Buffer
k		0.35	Efficiency factor	unitless	☐ N/A
d		12	Drillbit diameter	in	☐ N/A
b		40	Baseline	psi	☐ N/A
RPM	Drill Input	RPMa	☐ Rotary Speed (surf avg)	rev/min	☐ 0
ROP	Drill Input	ROPa	☐ Rate of Penetration (avg)	ft/h	☐ 0
WOB	Drill Input	WOBa	☐ Weight on Bit (surf avg)	lbf	☐ 0
T	Drill Input	TQA	☐ Rotary Torque (surf avg)	ft.lbf	☐ 0
MSE		MSE	Mechanical Specific Energy	psi	☐ 0
MSEbaseline		MSEbaseline	MSE base line from Drill Off Tests	psi	☐ 0
MSEindicator		MSEindicator	MSE indicator for efficient drilling	unitless	☐ 0

Formula(s)

Output

Formula

Use as output

MSE =

$$\#(ROP>2k*(480T-RPM)/(d^2ROP)-(4*WOB)/(d^2PI))\text{Nan}()$$

MSEbaseline =

$$b$$

MSEindicator =

$$\#(MSE-b>20,2,0)$$

$$MSE = if(ROP>2,k*(\frac{480 \cdot T \cdot RPM}{d^2 \cdot ROP} + \frac{4 \cdot WOB}{d^2 \cdot PI}),Nan())$$

Undo All

Test Calculation

Validate

Save

FIG. 8

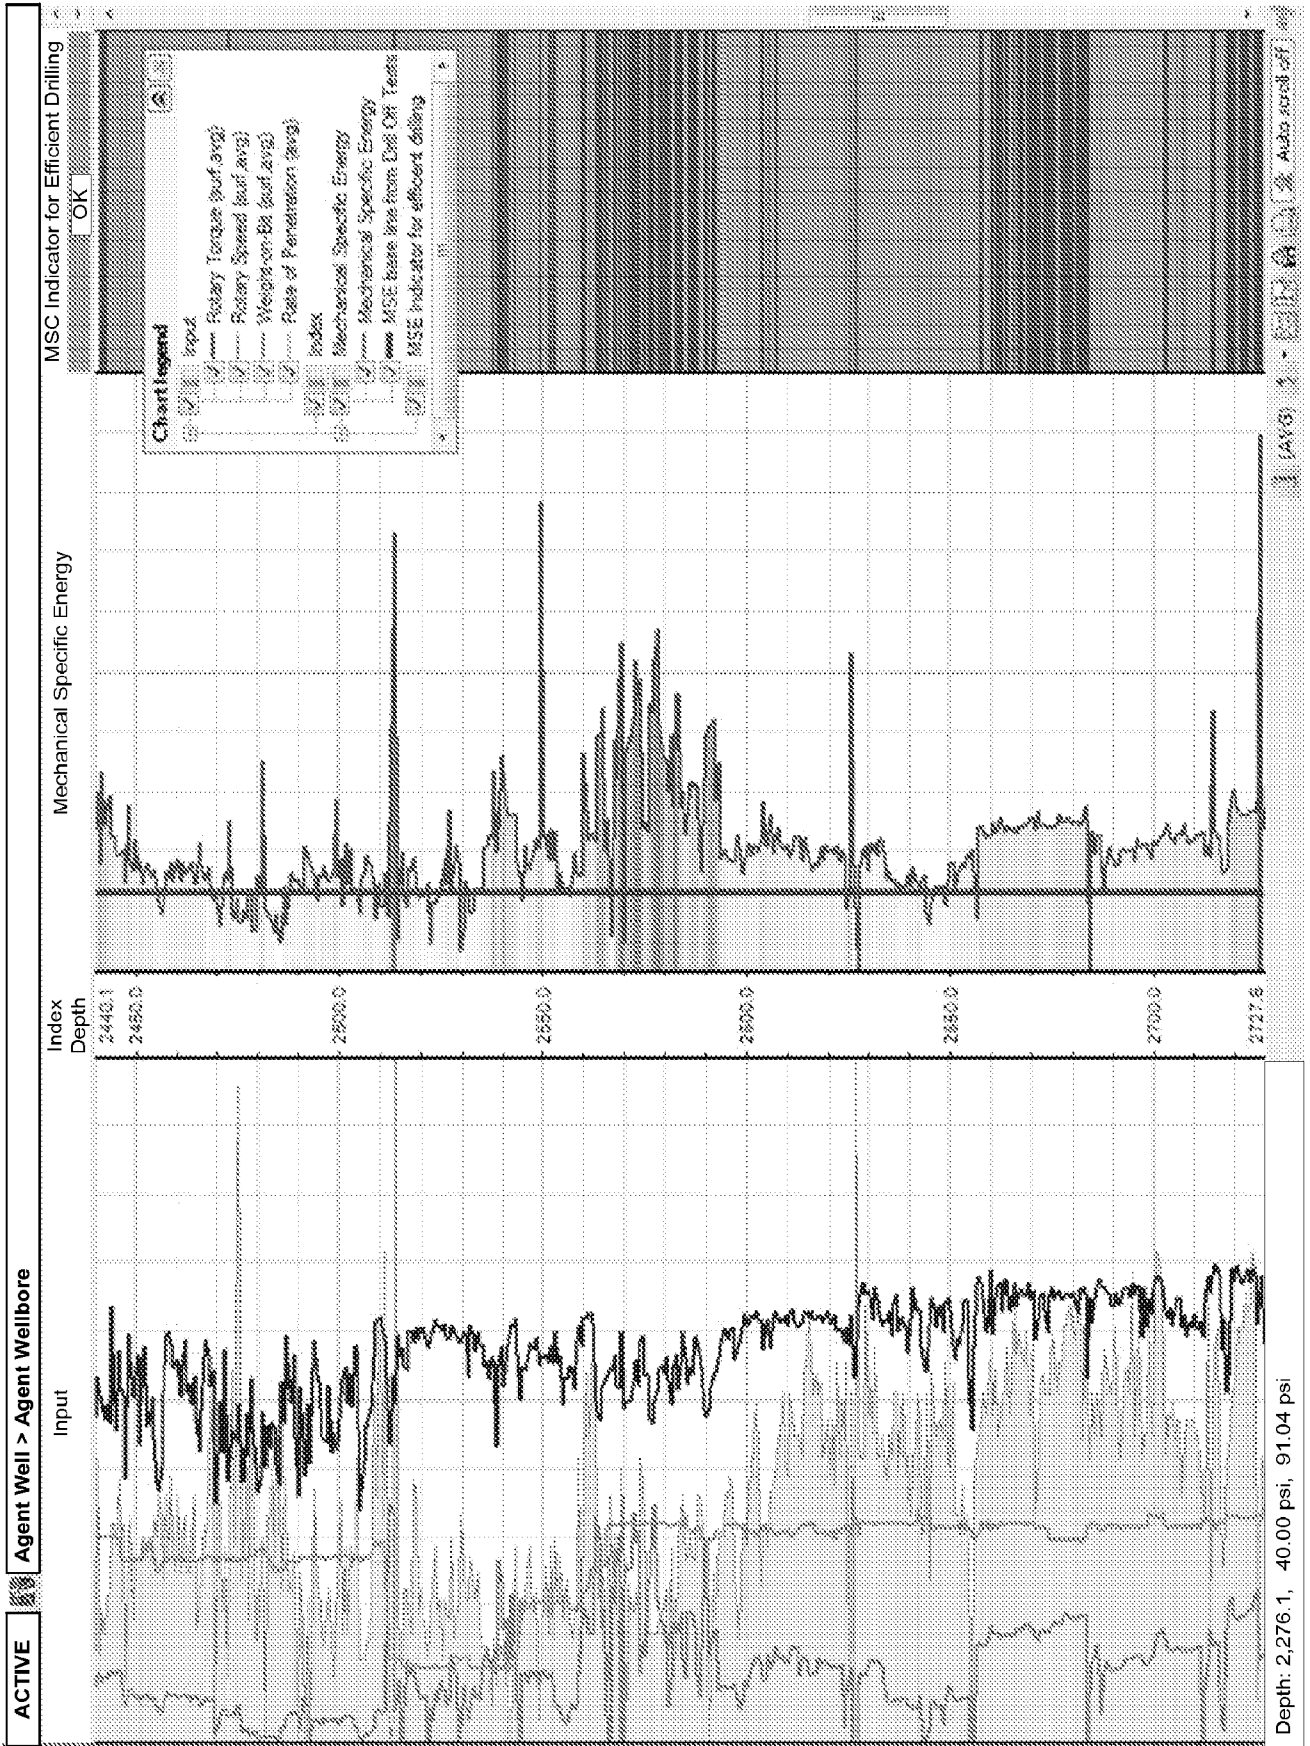


FIG. 9

My Agents

Attach

Filtering and confidence interval

Description

Filtering and confidence interval

Input/Output

Actions

Input/Output parameters

Time/Depth

Interpolation

Configure

Formula symbol	Log Name	Value/Mnemonic	Description	Formula Unit	Buffer
d	CementJobStatus7	DENSITY	☐ Raw density	ppg	10
dta		dta	Density average	ppg	0
dddev		ddev	Density Standard Deviation	ppg	0
dmax		dmax	Upper Confidence Level (95%)	ppg	0
dmin		dmin	Lower Confidence Level (95%)	ppg	0

Formula(s)

Output	Formula
dta =	d_AVG
dddev =	sqrt(power((d_1-da),2)+power((d_2-da),2)+power((d_3-da),2)+power((d_4-da),2)+power((d_5-da),2)+power((d_6-da),2)+power((d_7-da),2)+power((d_8-da),2)+power((d_9-da),2)+power((d_10-da),2))/10)
dmax =	d_AVG+1.96*dddev/sqrt(d_COUNT)
dmin =	d_AVG-1.96*dddev/sqrt(d_COUNT)

$$ddev = \sqrt{\frac{((d_0-da)^2 + (d_1-da)^2 + (d_2-da)^2 + (d_3-da)^2 + (d_4-da)^2 + (d_5-da)^2 + (d_6-da)^2 + (d_7-da)^2 + (d_8-da)^2 + (d_9-da)^2)}{d_COUNT - 1}}$$

Undo All

Validate

Test Calculation

Save

FIG. 10

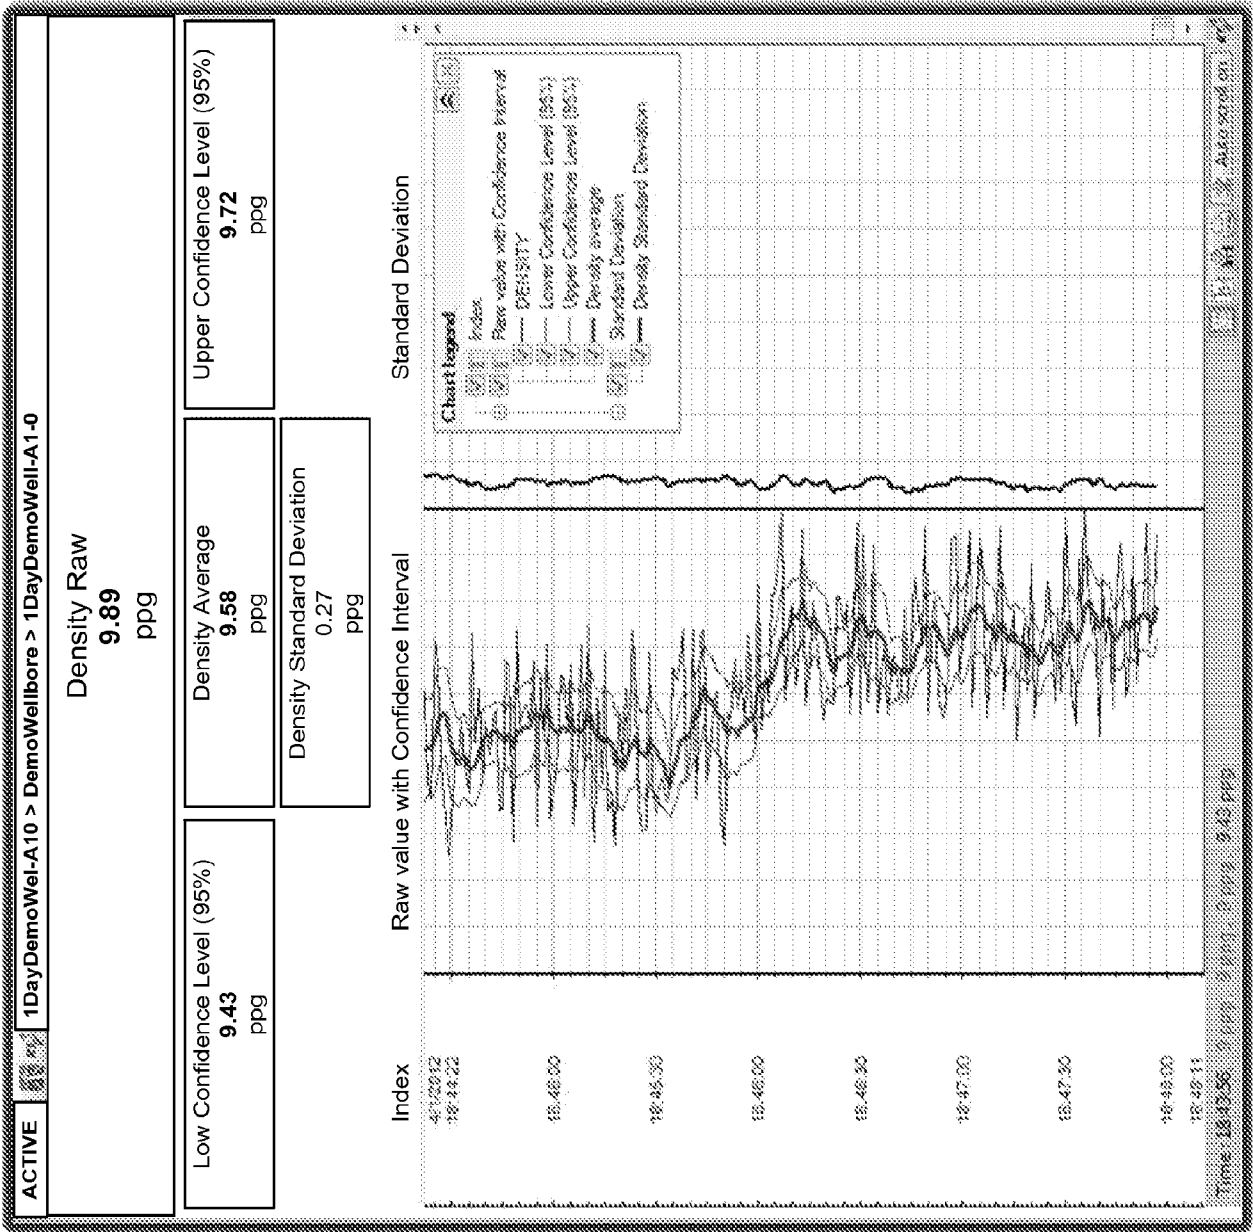


FIG. 11

My Agents		UC- Cuttings Slip Velocities		Description		Cuttings Slip Velocities	
Input/Output		Actions		Input/Output parameters			
Formula symbol	Log Name	Value/Mnemonic	Description	Formula Unit	Buffer		
M	CellDepth	MCA	Mud Density in (avg)	ton/gallUS	0		
DynH		DynH	Dynamic Hole Diameter	in	0		
r200		r200	300 rpm	undefined	0		
r600		r600	600 rpm	undefined	0		
n		n	n factor	undefined	0		
K		K	K value	undefined	0		
VADC		VADC	Velocity Mud Annular Drill Collar	ft/min	0		
VADP		VADP	Velocity Mud Annular Drill Pipe	ft/min	0		
CDC		CDC	Coefficient Drill Collar	ft/min	0		
CDP		CDP	Coefficient Drill Pipe	ft/min	0		
VCDC		VCDC	Velocity Cuttings Drill Collar	ft/min	0		
VCDP		VCDP	Velocity Cuttings Drill Pipe	ft/min	0		
VCHDC		VCHDC	Peak Velocity Cuttings Drill Collar	ft/min	0		
VCHDP		VCHDP	Peak Velocity Cuttings Drill Pipe	ft/min	0		
Formula(s)							
Output	Use as output						
r600 =	4300-ftV						
n =	3.33*log(600/4300)						
K =	4300/power(11n)						
VADC =	24.51*F*(dynH^2-DCD^2)						
VADP =	24.51*F*(dynH^2-DDP^2)						
CDC =	(2.4*VADC*(7n+1)/(60n+DDP^2))^(1/200)*K*(DynH-DDP)/(VADC)						
CDP =	(2.4*VADP*(7n+1)/(60n+DDP^2))^(1/200)*K*(DynH-DDP)/(VADP)						
VCDC =	(175*denC*M)^0.667*(C)^0.333*(V)^0.333						
VCDP =	(175*denC*M)^0.667*(C)^0.333*(V)^0.333						
VCHDC =	VADC*VCDC						
VCHDP =	VADP*VCDP						
$VDC = \frac{(175(\text{denC} - M)^{0.667} \cdot dC)}{((M)^{0.333} \cdot (CDC)^{0.333})}$							

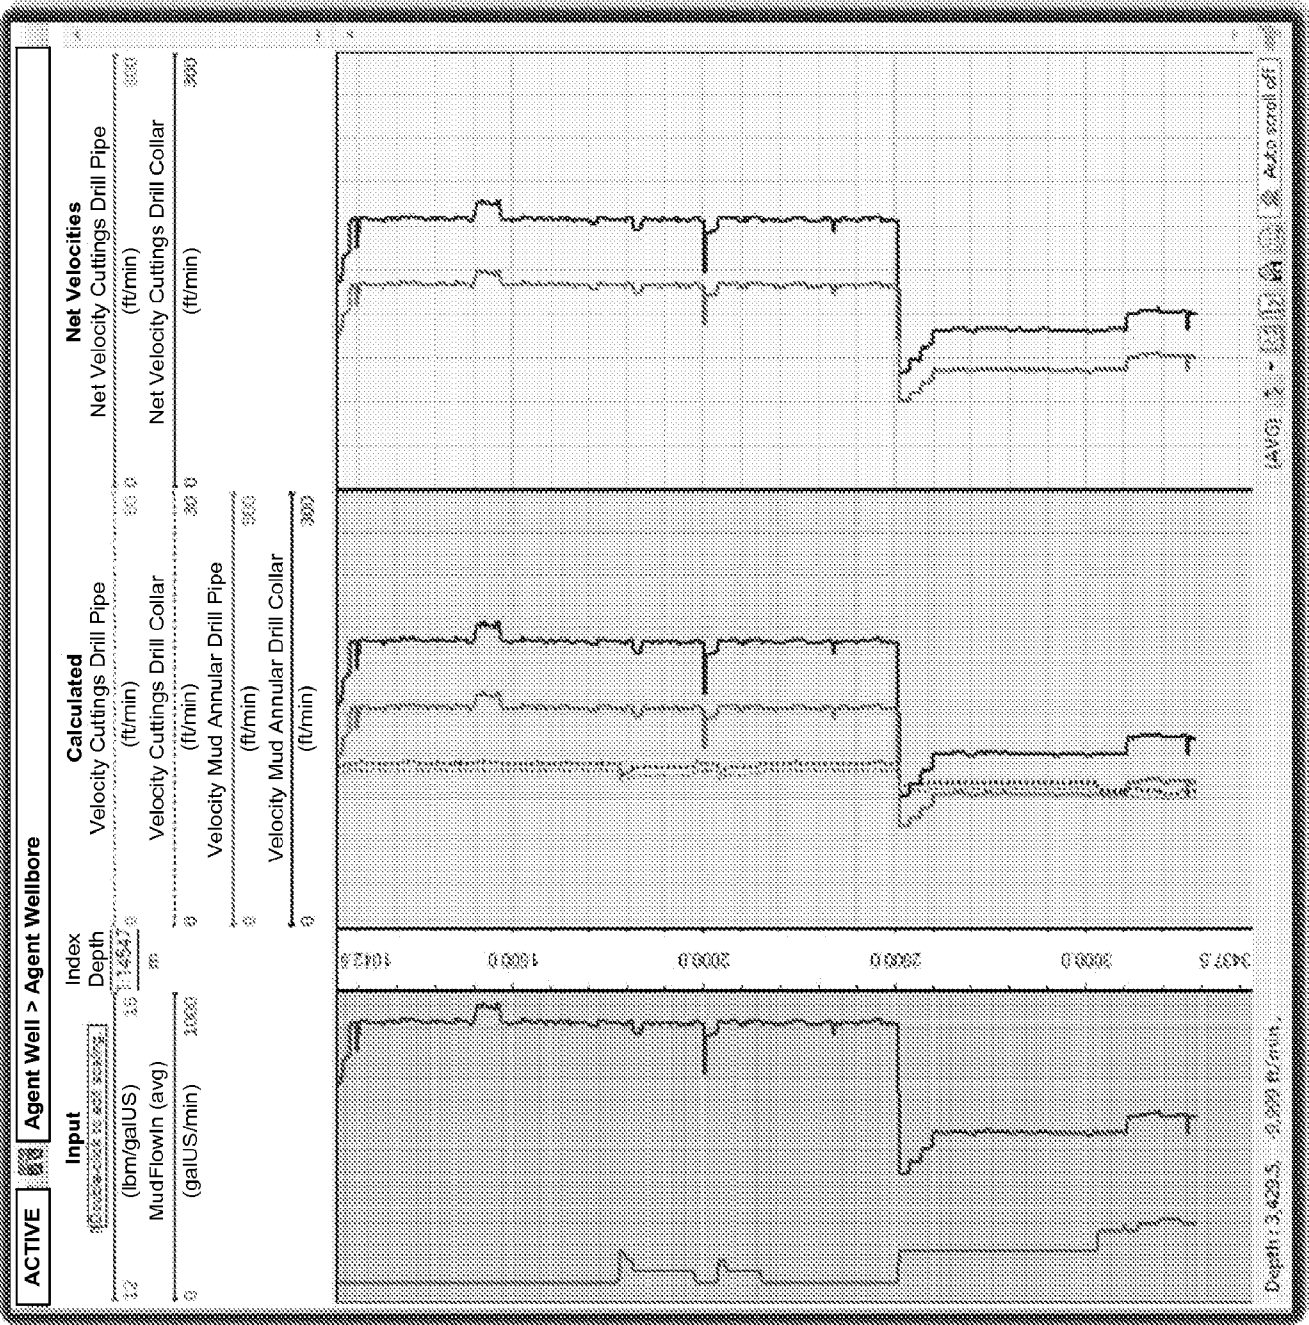


FIG. 13

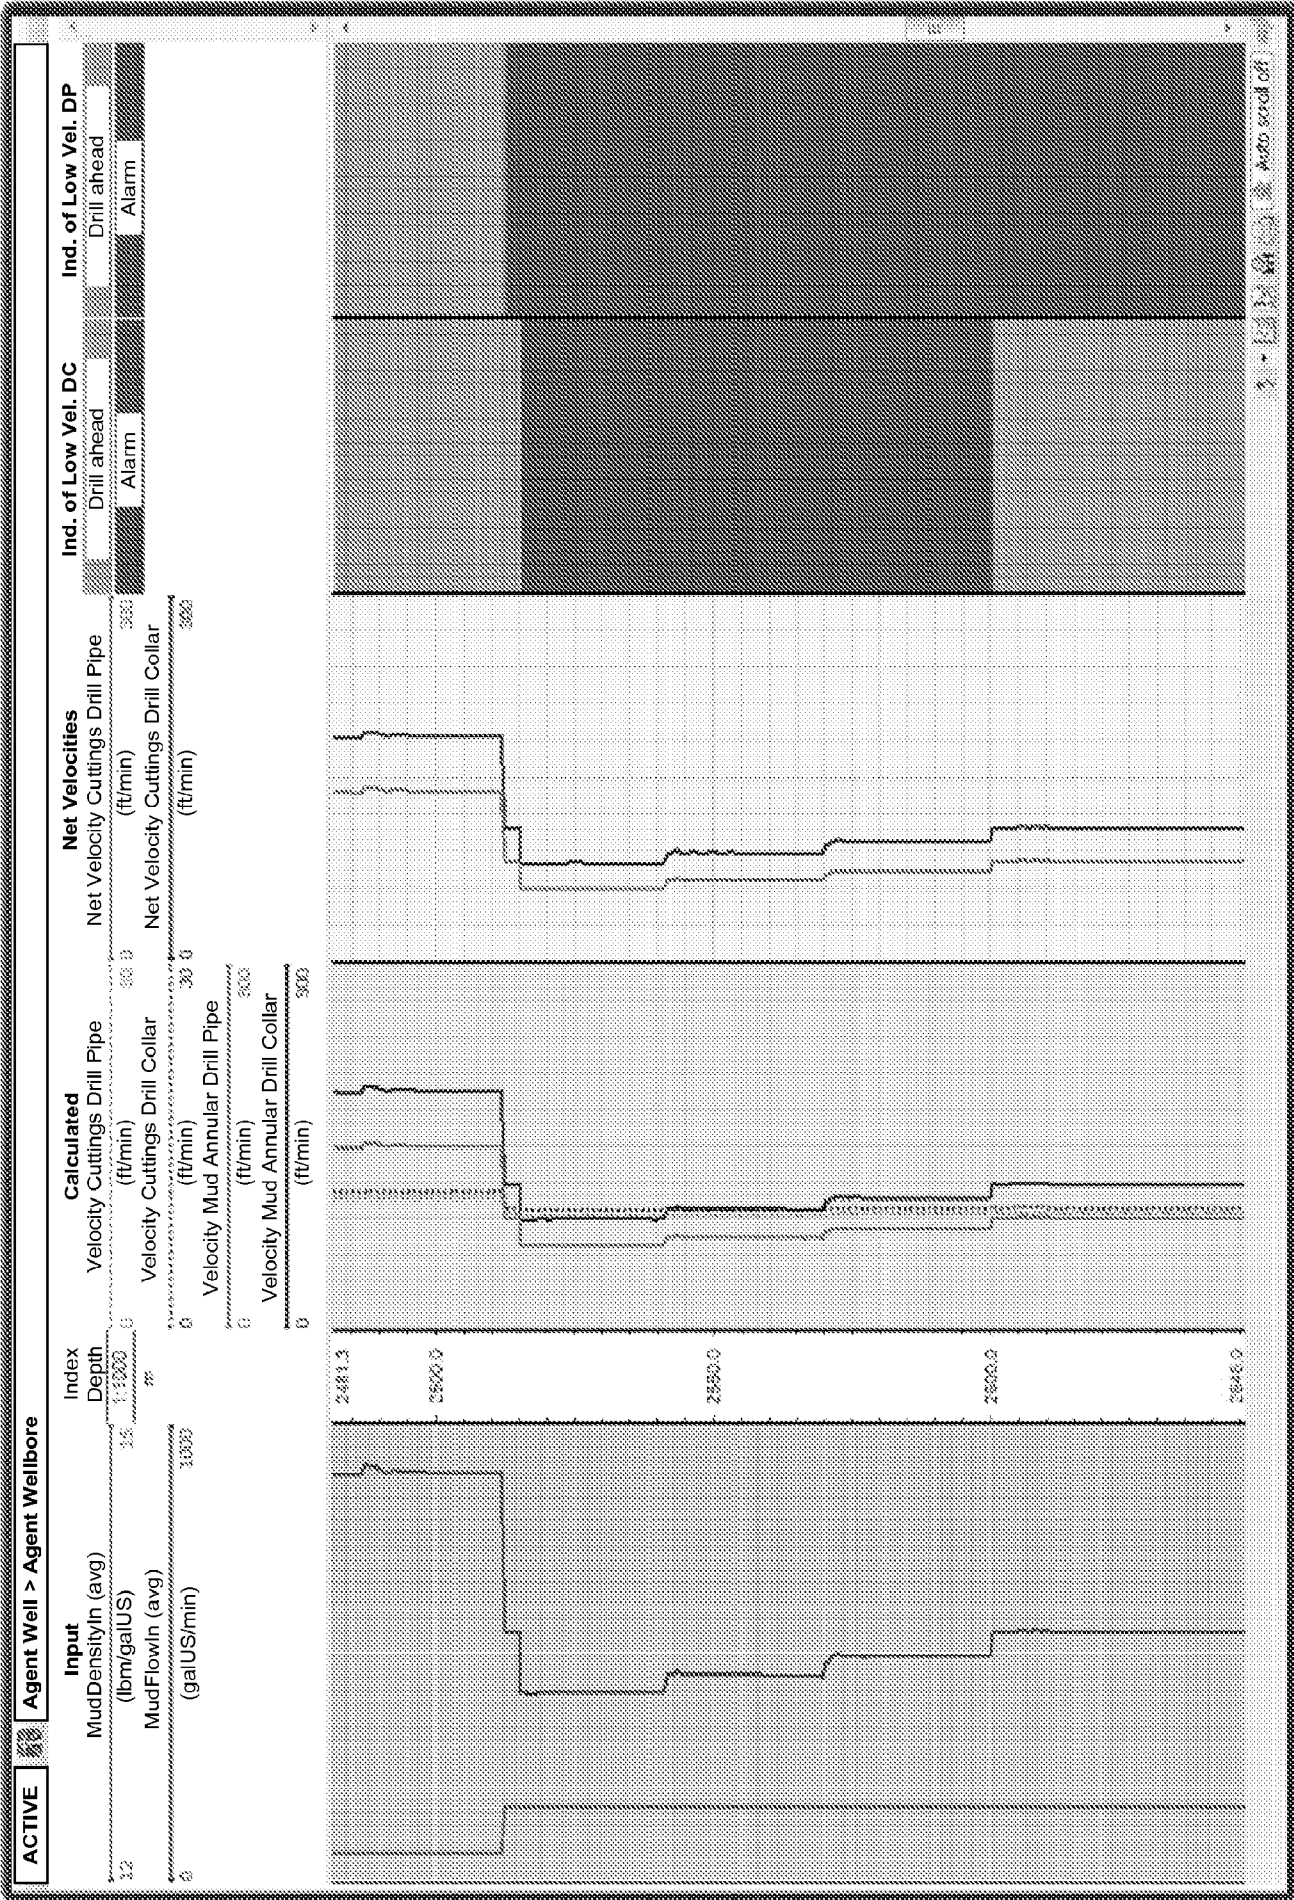


FIG. 14

My Agents		D-Exponent with Pore Pressure		Description	D-Exponent Corrected with Pore Pressure	Attach	
Input/Output		Actions					
Input/Output parameters							
				Time / Depth	Inputs	Interpolation	Configure
Formula symbol Log Name Value/Mnemonic Description Formula Unit Buffer							
					<		


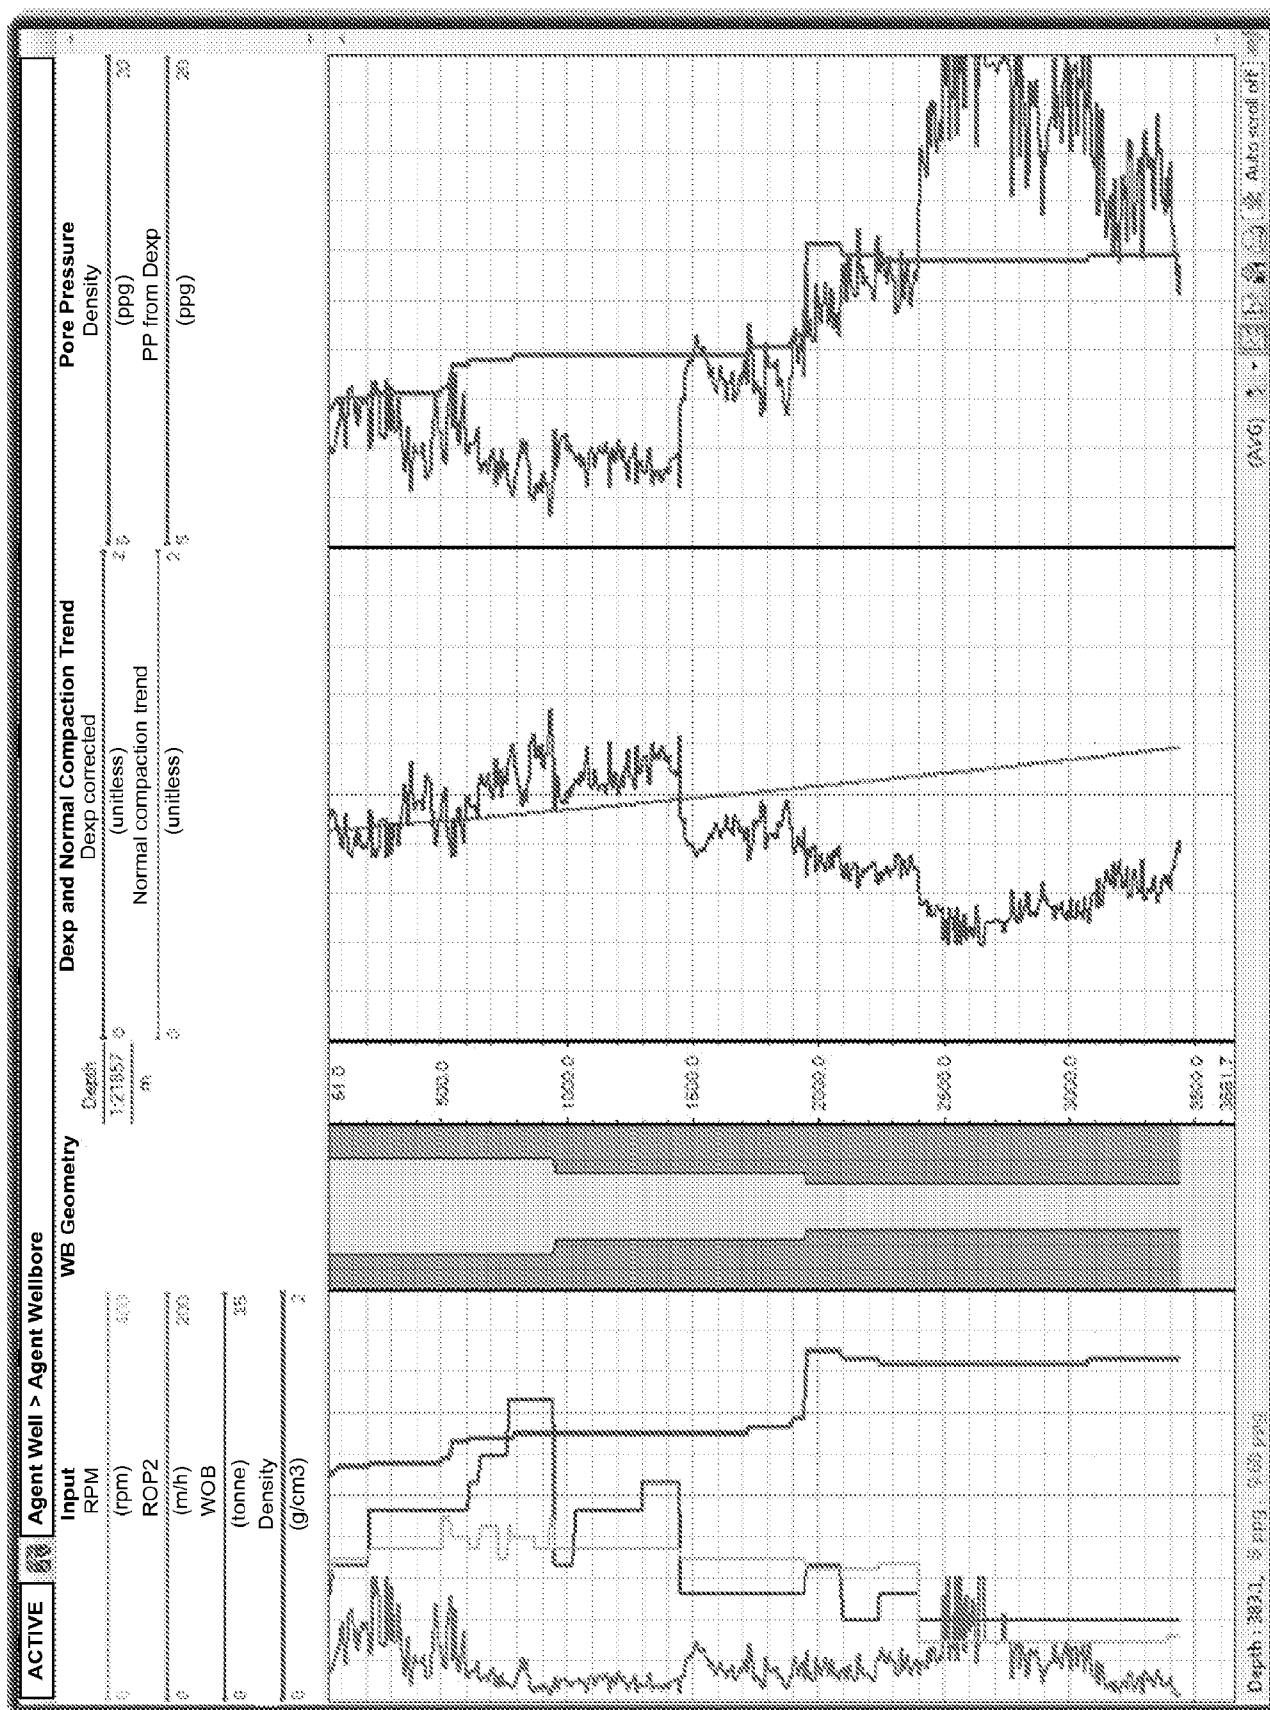


FIG. 16



[illegible]

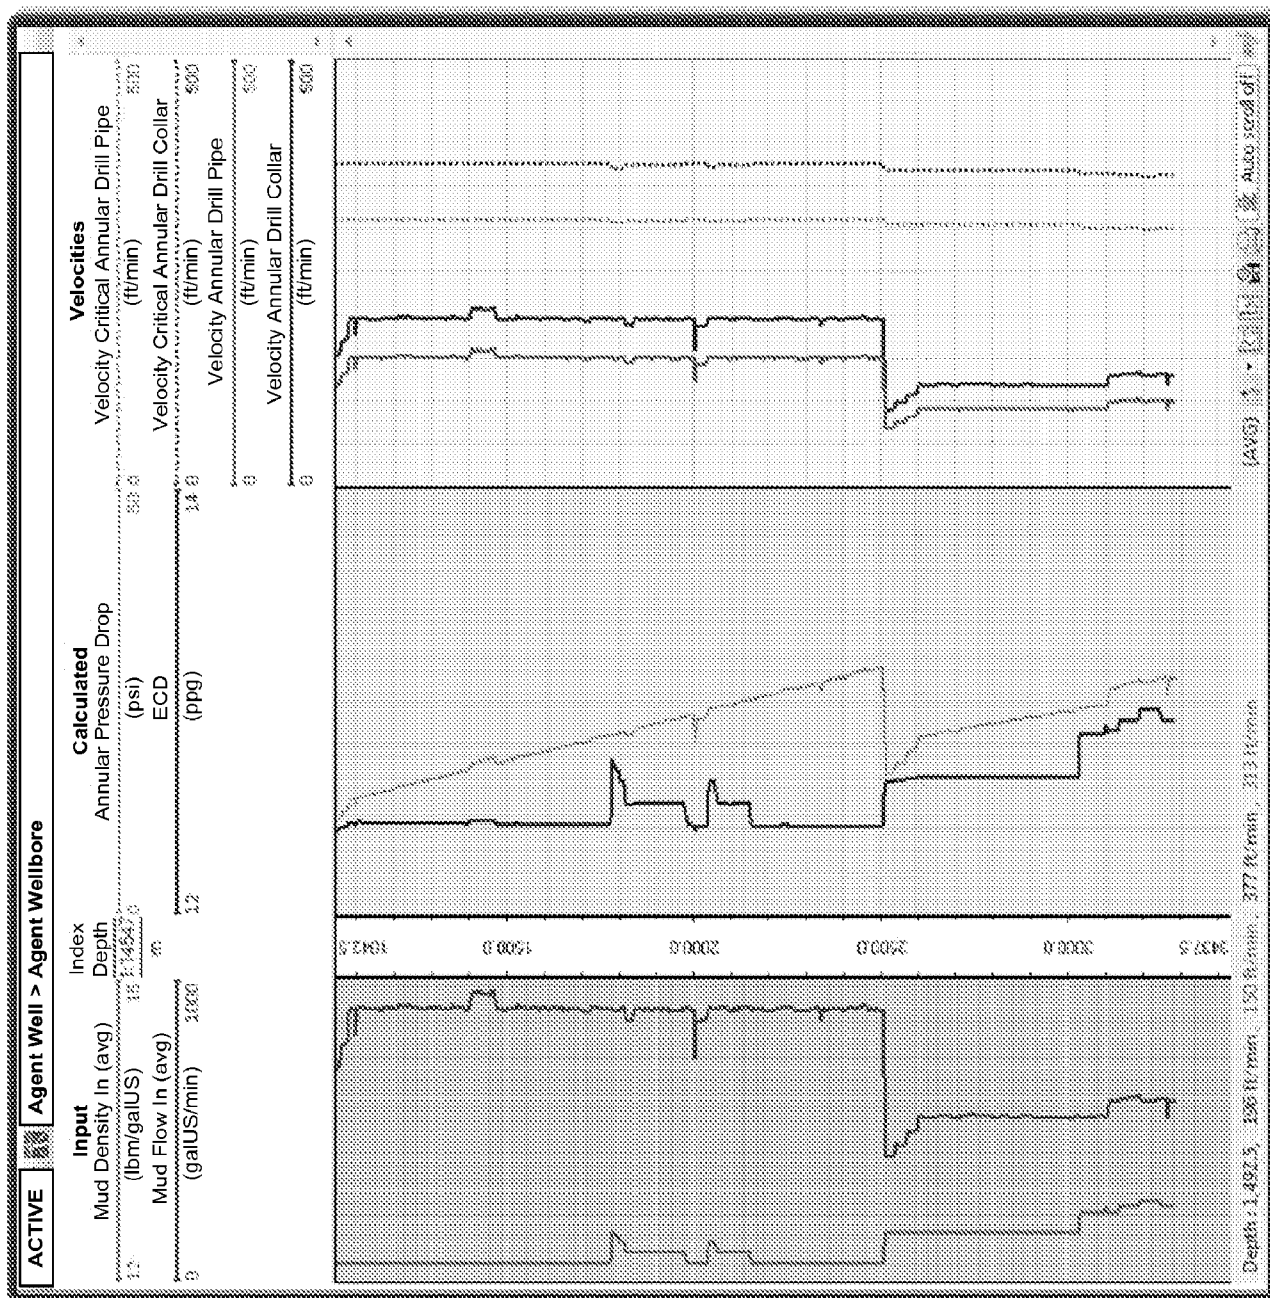


FIG. 19

[illegible]

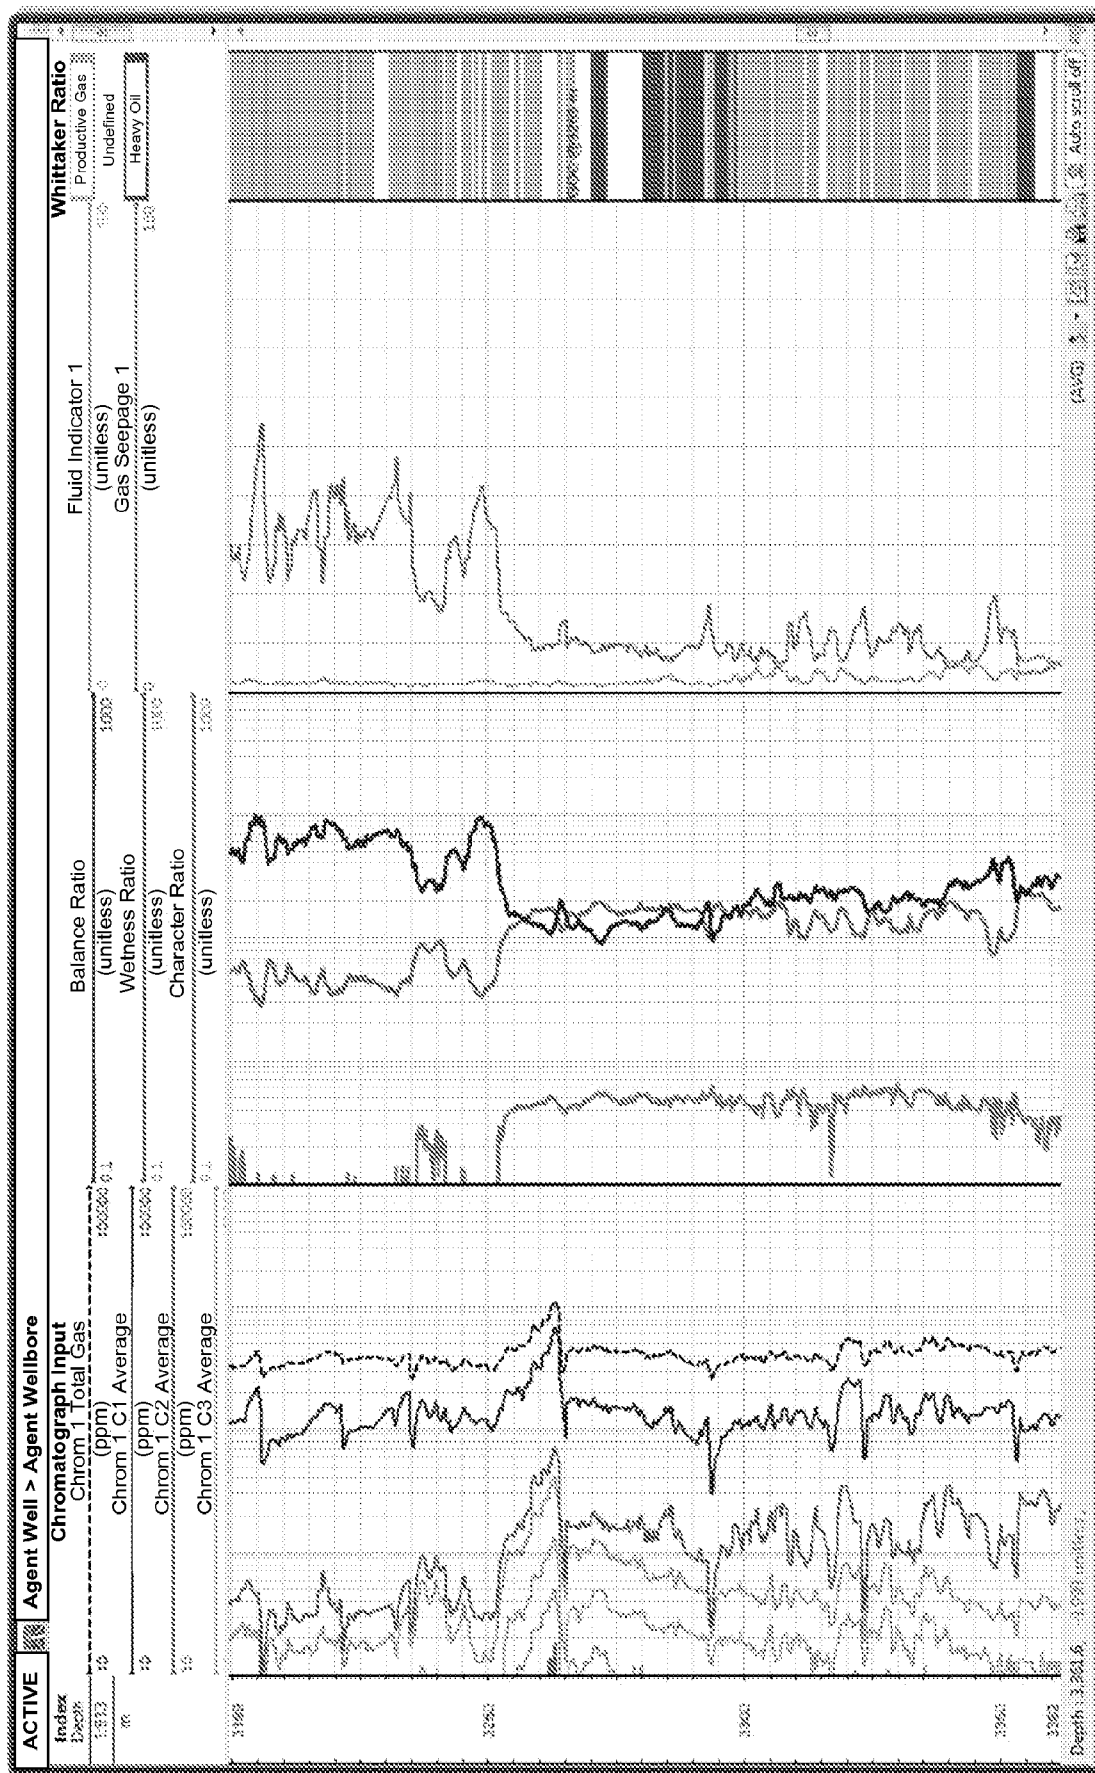


FIG. 21

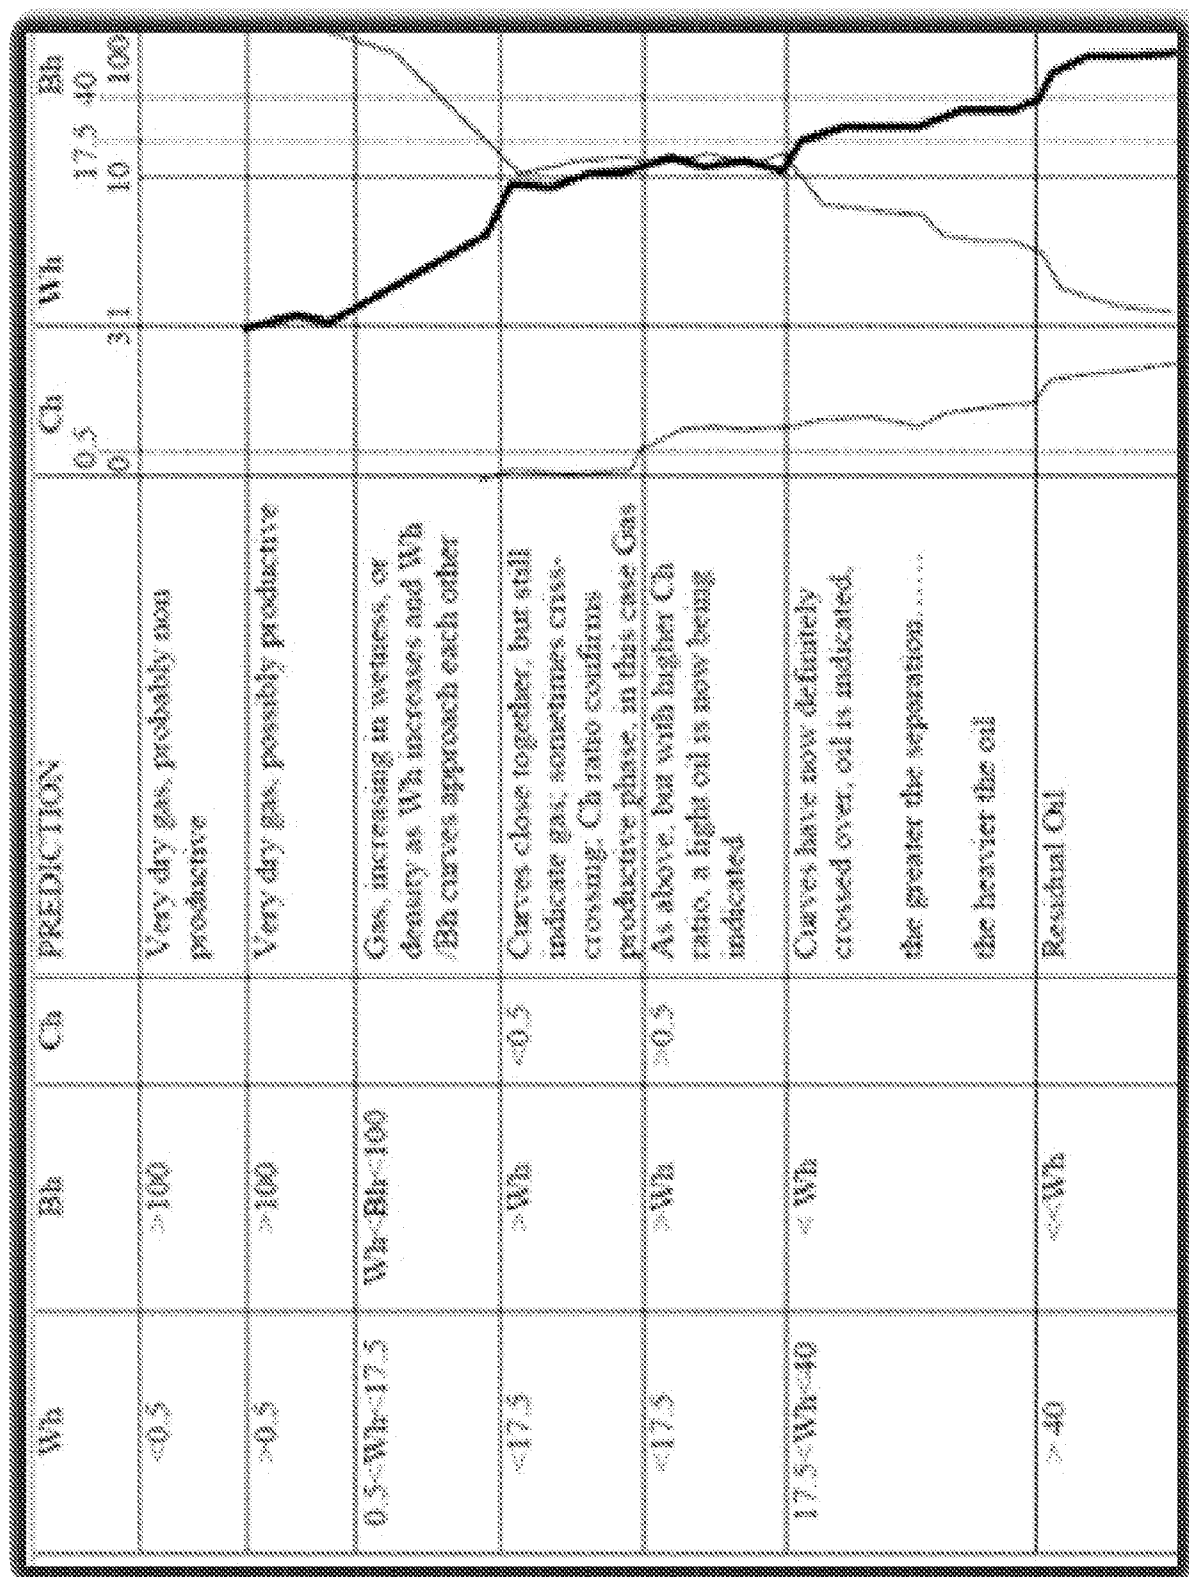


FIG. 22A

Title	Whittaker Ratio	Custom	▼	Log name															
Mnemonic	WRI	Change...																	
Unit	unitless	▼	Unit type																
Pattern set	Fluid Components	▼		Plot background:	☐														
Preview	<table><tr><td>0</td><td>Undefined</td></tr><tr><td>1</td><td>Light Dry Gas</td></tr><tr><td>2</td><td>Productive Gas</td></tr><tr><td>3</td><td>Productive Condensate</td></tr><tr><td>4</td><td>Productive Oil</td></tr><tr><td>5</td><td>Heavy Oil</td></tr><tr><td>6</td><td>Residual Oil</td></tr></table>					0	Undefined	1	Light Dry Gas	2	Productive Gas	3	Productive Condensate	4	Productive Oil	5	Heavy Oil	6	Residual Oil
0	Undefined																		
1	Light Dry Gas																		
2	Productive Gas																		
3	Productive Condensate																		
4	Productive Oil																		
5	Heavy Oil																		
6	Residual Oil																		

FIG. 22B

Wetness Ratio $Wh = 100 * (C2 + C3 + C4 + C5) / (C1 + C2 + C3 + C4 + C5)$
It measures the proportion of heavy Alkanes and indicates the density of the Alkanes mixture contained in the potential bearing zone :

- * If $Wh < 0.5$: light, dry gas with non (very low) productive potential
- * If $0.5 < Wh < 17.5$: potential productive gas
- * If $17.5 < Wh < 40$: potential productive oil (oil gravity increases with Wh)
- * If $Wh > 40$: heavy / residual oil with non (very low) productive potential

Balance Ratio $Bh = (C1 + C2) / (C3 + C4 + C5)$

This ratio measures the proportion of pure heavy Alkanes versus pure light Alkanes (Methane and Ethane) and is combined with the Wetness Ratio to improve the reliability of the interpretation :

- * If $Wh < 0.5$ and $Bh > 100$: light, dry gas with non (very low) productive potential
- * If $0.5 < Wh < 17.5$ and $Wh < Bh < 100$: potential productive gas with gas increasing Wetness (density) as the two curves converge
- * If $0.5 < Wh < 17.5$ and $Wh > Bh$: potential productive condensates with high gravity oil
- * If $17.5 < Wh < 40$ and $Wh > Bh$: potential productive oil (oil gravity decreases – density increases as the curves diverge)
- * If $17.5 < Wh < 40$ and $Wh >> Bh$: heavy / residual oil with non (very low) productive potential
- * If $Wh > 40$: not productive, very low gravity residue, water bearing

Character Ratio $Ch = (C4 + C5) / C3$: not often reliable.

This ratio serves to resolve ambiguities concerning the nature of the Alkane phase :

- * If $Ch < 0.5$: fluid will be a wet gas or condensates (gaseous phase)
- * If $Ch > 0.5$: fluid is in a liquid phase (oil)

FIG. 22C

My Agents

Attach

Moving Average

Description

Moving Average

Input/Output

Actions

Input/Output parameters

Time / Depth

Interpolation

Configure

Formula symbol	Log Name	Value/Mnemonic	Description	Formula Unit	Buffer
A	AutoT4a2	ACTINEX	☐ Actuator Inclination	rad	10
b		b	Actuator Inclination Moving Average	rad	0
d		d	Delta	rad	0

Formula(s)

Output

Formula

Use as Output

b =

d =

$d = A - b$

Undo All

Test Calculation

Validate

Save

FIG. 23

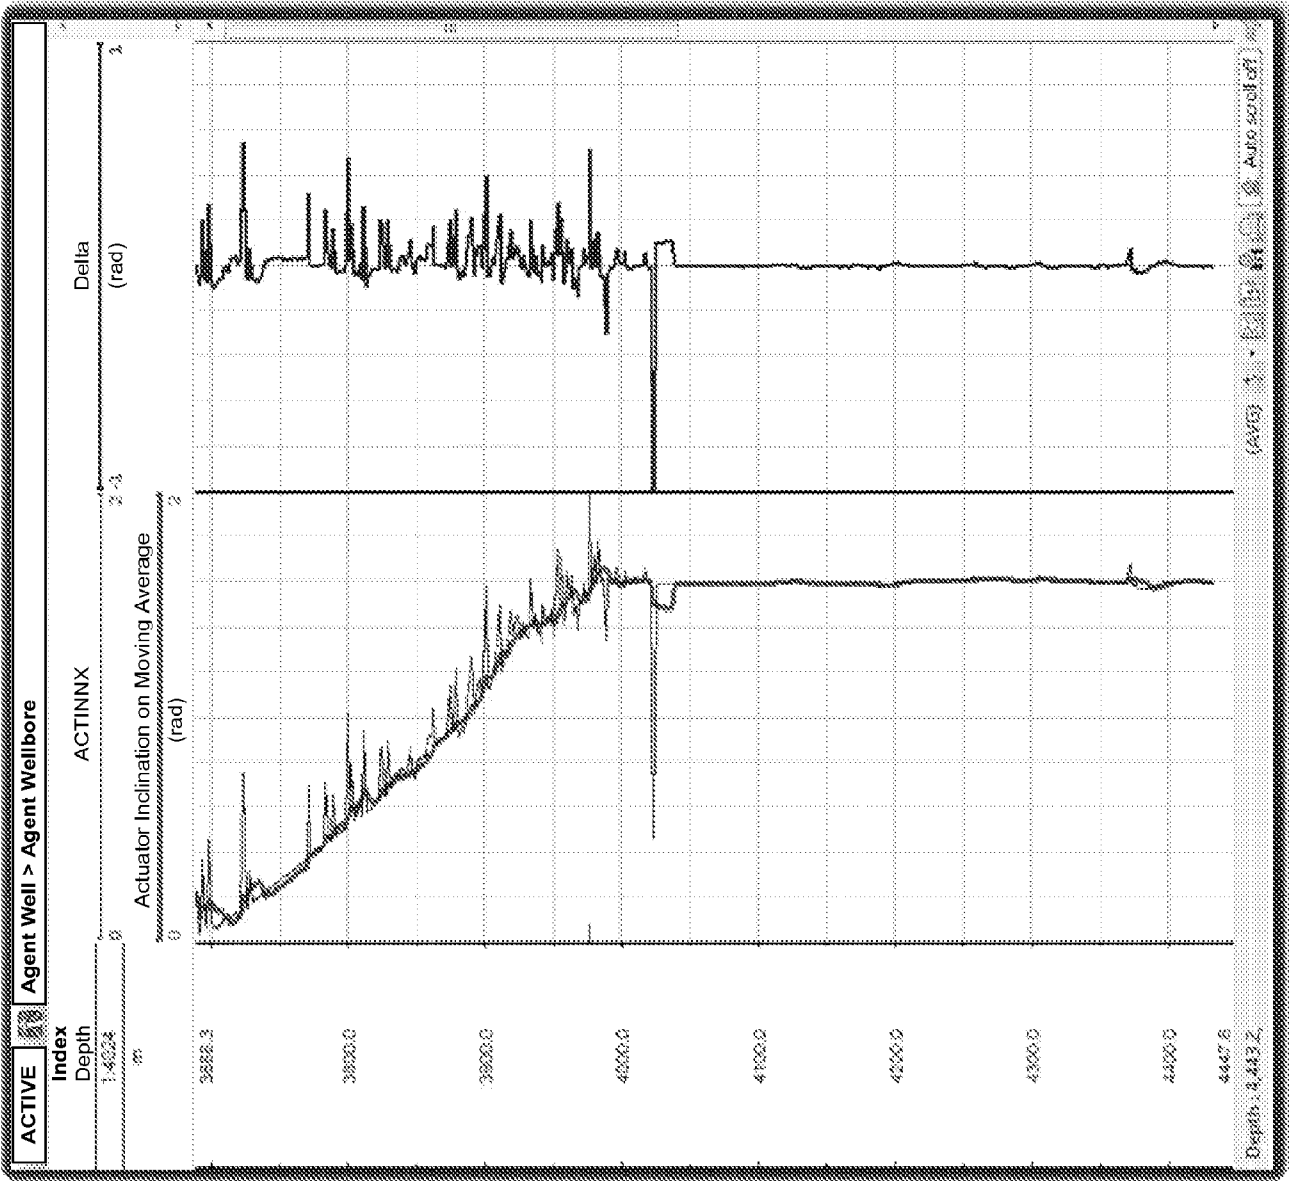


FIG. 24

My Agents

Basic Formation Detection

Description

Basic Formation Detection

Attach

Input/Output

Actions

Input/Output parameters

Time / Depth

Interpretation

Configure

Formula symbol	Log Name	Value/Mnemonic	Description	Formula Unit	Buffer
c1		4	Shale Sand Threshold	unitless	100
c2		0.5	Hydrate Threshold	unitless	100
i	PPFG_PressTime		☐ Shallow Resistivity	Ohm m	☐ 0
Row		Low	Hydrate low	Ohm m	☐ 0
High		High	Hydrate high	Ohm m	☐ 0
f		f	Formation (1-drake, 2-wand)	Ohm m	☐ 2
T		T	Threshold	Ohm m	☐ 0

Formula(s)

Output

Formula

Use as Output

Row = c1*c2

High = c1*c2

f = $\text{if}(1 < f, \text{High}, 1, 2, \text{if}(f > \text{Row}, 2, 1))$

T = c1

$$f = \text{if}(f_1 = 1, \text{if}(i < T_{\text{high}}, 1, 2), \text{if}(i > T_{\text{low}}, 2, 1))$$

Undo All

Test Calculation

Validate

Save

FIG. 25

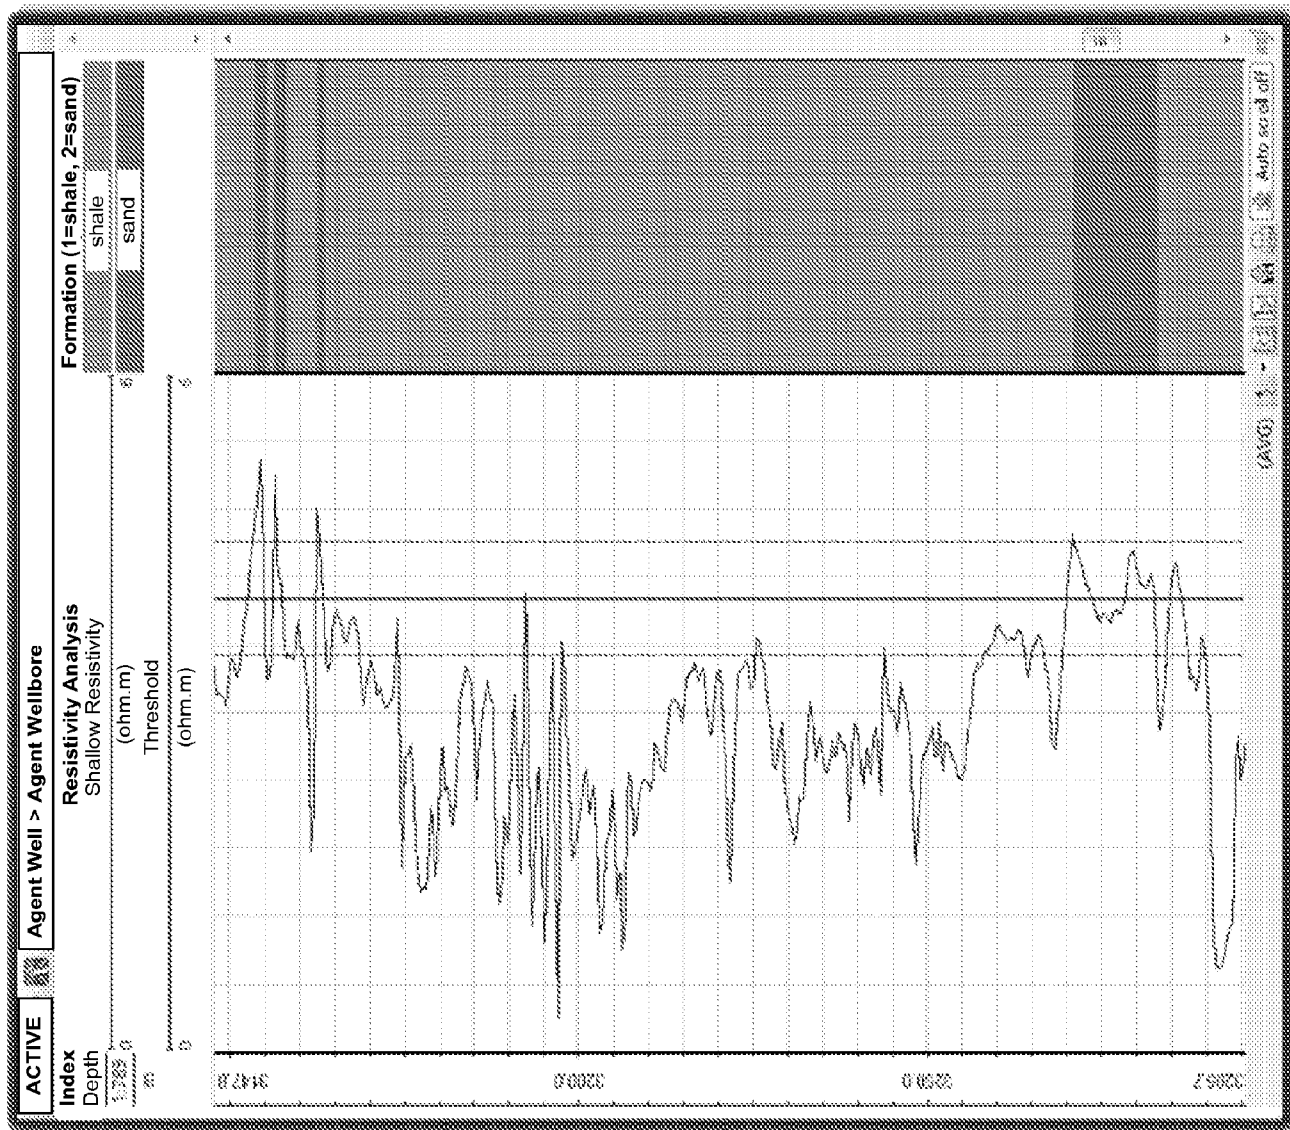


FIG. 26

FIG. 27

My Agents

Attach

D-Exponent from Excel

Description

D-Exponent from Excel

Input/Output

Actions

Input/Output parameters

Time / Depth

Interpolation

Formula symbol	Log Name	Value/Mnemonic	Description	Formula Unit	Buffer
g		3.6	Normal pressure gradient for water	ppg	N/A
sh		1	Shale compactivity constant (empirical)	unitless	N/A
RPM	DEXPOATA	RPM		rpm	
ROP	DEXPOATA	ROP2		ft/hr	
WOB	DEXPOATA	WOB		kbf	
MW	DEXPOATA	Density		ppg	
d	DEXPOATA	6a diameter		in	
deap		deap	Deap	unitless	
deapc		deapc	Deap Corrected	unitless	

Formula(s)

Output

Formula

Use as Output

deap =

$\log(\text{ROP} / (60 \cdot \text{RPM})) / \log((12 \cdot \text{WOB}) / (1000 \cdot d))$

deapc =

$\text{deap}^{(g/MW)^{sh}}$

$$\text{deap} = \frac{\log(\frac{\text{ROP}}{60 \cdot \text{RPM}})}{\log(\frac{12 \cdot \text{WOB}}{1000 \cdot d})}$$

Undo All

Test Calculation

Validate

Save

FIG. 28

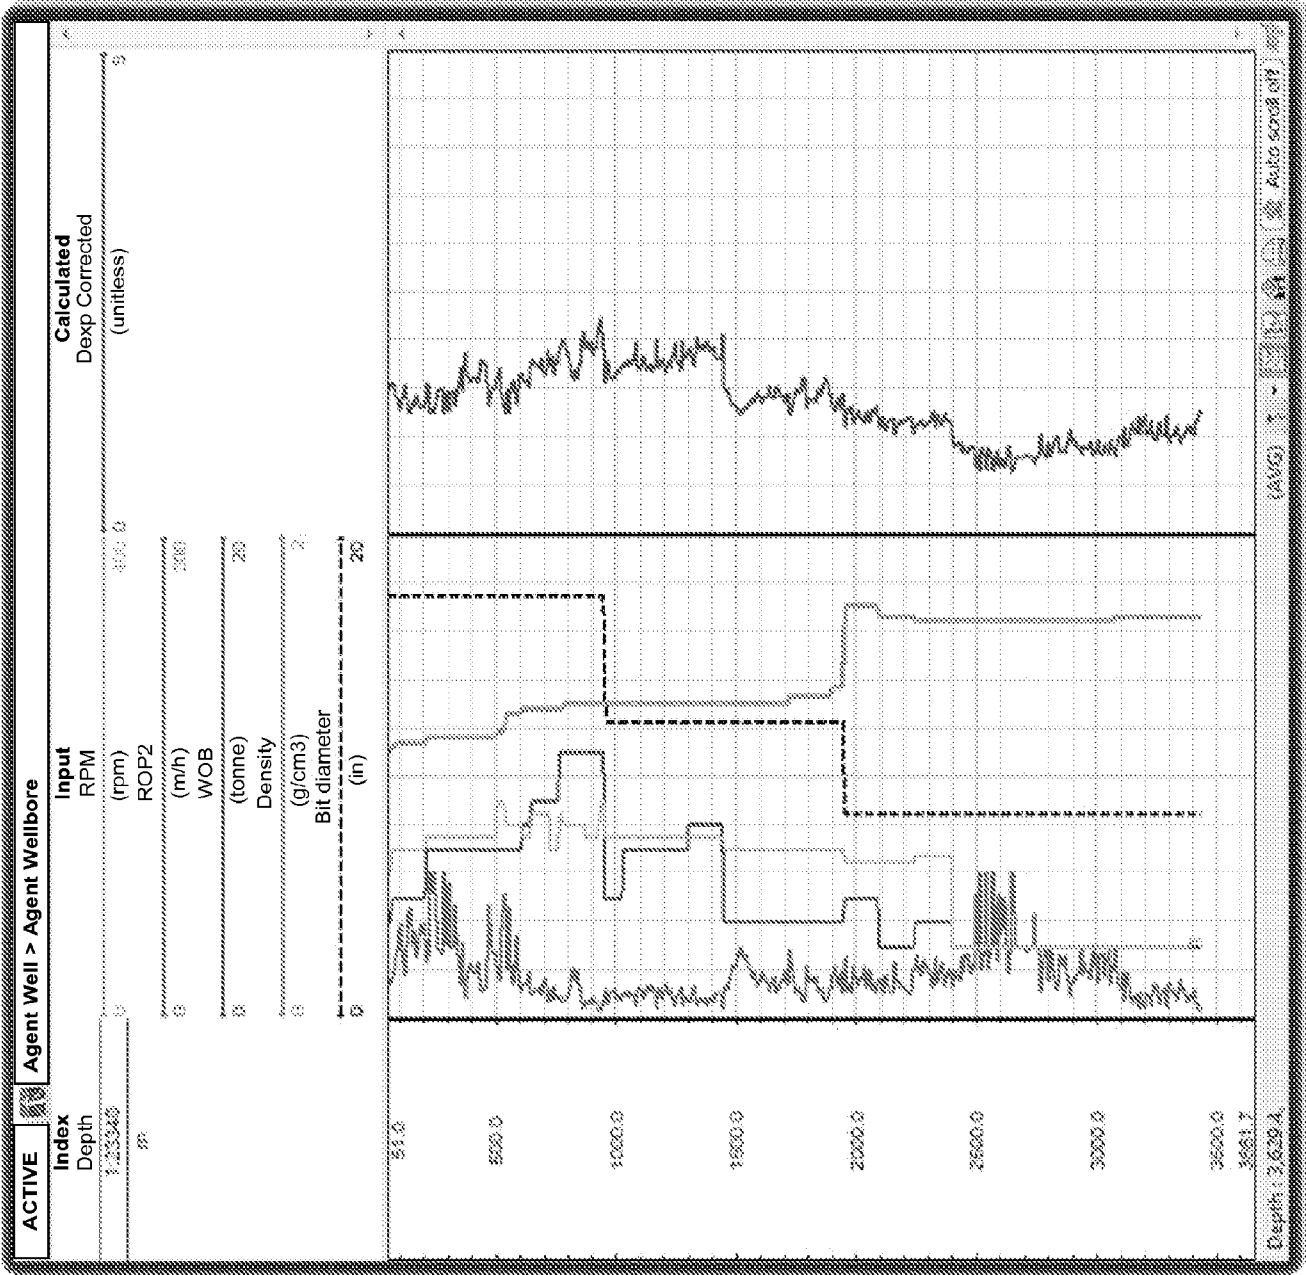


FIG. 29

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/040423**A. CLASSIFICATION OF SUBJECT MATTER****E21B 44/00(2006.01)i, G05B 19/02(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 44/00; G06F 19/00; E21B 47/00; E21B 7/10; G01V 3/00; G05B 19/02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: curve, wellbore, process, data, interpolate, computer and log

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003-0154029 A1 (METRICK, LEE B.) 14 August 2003 See paragraphs [0016], [0036]–[0038] and claims 1, 3, 13.	1–20
A	US 2011-0155461 A1 (HUTNIAK et al.) 30 June 2011 See paragraphs [0006], [0087], [0096].	1–20
A	US 5654503 A (RASMUS, JOHN C.) 05 August 1997 See column 1, line 58 – column 2, line 17 and figures 3(a)–3(f).	1–20
A	US 2012-0274477 A1 (PRAMMER, MANFRED G.) 01 November 2012 See paragraphs [0036]–[0042] and figure 31.	1–20
A	US 2013-0032407 A1 (EDBURY et al.) 07 February 2013 See paragraphs [0002]–[0026] and figures 2–4.	1–20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

29 September 2014 (29.09.2014)

Date of mailing of the international search report

29 September 2014 (29.09.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

JEONG, A Ram

Telephone No. +82-42-481-3388



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/040423

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003-0154029 A1	14/08/2003	CA 2416216 A1 CA 2416216 C GB 0300977 D0 GB 2385962 A US 6654691 B2	08/08/2003 08/03/2011 19/02/2003 03/09/2003 25/11/2003
US 2011-0155461 A1	30/06/2011	US 8381838 B2	26/02/2013
US 5654503 A	05/08/1997	EP 0709546 A2 EP 0709546 A3 EP 0709546 B1	01/05/1996 29/04/1998 08/05/2002
US 2012-0274477 A1	01/11/2012	EP 2350697 A2 US 2009-289808 A1 US 8242928 B2 US 8704677 B2 WO 2009-143409 A2 WO 2009-143409 A3	03/08/2011 26/11/2009 14/08/2012 22/04/2014 26/11/2009 14/01/2010
US 2013-0032407 A1	07/02/2013	AU 2011-240821 A1 CA 2794739 A1 CN 102892970 A CN 102943623 A CN 102943660 A CN 102979500 A CN 102979501 A CN 103015967 A EP 2558673 A2 EP 2559846 A2 EP 2562349 A2 EP 2592222 A2 EP 2592223 A2 EP 2592224 A2 US 2013-032401 A1 US 2013-270005 A1 US 2013-277111 A1 US 2013-277112 A1 US 2014-041941 A1 US 8561720 B2 WO 2011-130159 A2 WO 2011-130159 A3	18/10/2012 20/10/2011 23/01/2013 27/02/2013 27/02/2013 20/03/2013 20/03/2013 03/04/2013 20/02/2013 20/02/2013 27/02/2013 15/05/2013 15/05/2013 15/05/2013 07/02/2013 17/10/2013 24/10/2013 24/10/2013 13/02/2014 22/10/2013 20/10/2011 22/12/2011