



US00D727025S

(12) **United States Design Patent**  
**Dreyer**

(10) **Patent No.:** **US D727,025 S**

(45) **Date of Patent:** **\*\* Apr. 21, 2015**

(54) **SHOE CARRIER**

(71) Applicant: **Michael R. Dreyer**, St. Petersburg, FL (US)

(72) Inventor: **Michael R. Dreyer**, St. Petersburg, FL (US)

(73) Assignee: **Two Sisters Accessories LLC**, St. Petersburg, FL (US)

(\*\*) Term: **14 Years**

(21) Appl. No.: **29/467,837**

(22) Filed: **Sep. 24, 2013**

(51) **LOC (10) Cl.** ..... **03-01**

(52) **U.S. Cl.**

USPC ..... **D3/299; D3/284; D3/290**

(58) **Field of Classification Search**

USPC ..... D3/216, 217, 232, 231, 276, 289, 226, D3/225, 230, 290, 291, 299, 301, 218, 283, D3/274, 243, 304, 307, 308, 309, 316; D7/605, 607, 705, 706, 113, 114, 629, D7/709; 150/100, 103, 104, 105, 106, 107, 150/108, 109, 110, 118, 119; 190/117, 118, 190/119; 62/457.2; 224/600-659; 206/316.1, 316, 2, 3; 383/30, 31, 28, 383/16, 6

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

1,672,322	A	*	6/1928	Keiser et al.	.....	383/119
3,491,913	A	*	1/1970	Giraudet et al.	.....	220/801
4,260,004	A	*	4/1981	Domke	.....	206/316.2
4,542,826	A	*	9/1985	Adams	.....	206/427
4,974,709	A	*	12/1990	Furlow et al.	.....	190/102
D504,230	S	*	4/2005	Thomas	.....	D3/290
7,143,932	B2	*	12/2006	Wang	.....	229/117.35
D564,757	S	*	3/2008	Mason	.....	D3/290
D572,545	S	*	7/2008	Grant et al.	.....	D7/701
D620,249	S	*	7/2010	Yu	.....	D3/232
D624,752	S	*	10/2010	Fried et al.	.....	D3/285
D641,157	S	*	7/2011	Steele	.....	D3/232

D641,549 S \* 7/2011 Caldwell ..... D3/232  
D644,891 S \* 9/2011 Meyer ..... D7/607  
D670,906 S \* 11/2012 Du ..... D3/243

(Continued)

*Primary Examiner* — Jennifer Rivard

*Assistant Examiner* — April Rivas

(74) *Attorney, Agent, or Firm* — Nilay J. Choksi; Smith & Hopen, P.A.

(57) **CLAIM**

The ornamental design for a shoe carrier, as substantially shown and described.


**DESCRIPTION**

FIG. 1 is a front perspective view of a shoe carrier, showing the novel design, in a closed position;  
FIG. 2 is a side elevational view of the shoe carrier shown in FIG. 1 in the closed position;  
FIG. 3 is a side elevational view of the shoe carrier shown in FIG. 1 in the closed position;  
FIG. 4 is a front elevational view of the shoe carrier shown in FIG. 1 in the closed position;  
FIG. 5 is a rear elevational view of the shoe carrier shown in FIG. 1 in the closed position;  
FIG. 6 is a top elevational view of the shoe carrier shown in FIG. 1 in the closed position;  
FIG. 7 is a bottom elevational view of the shoe carrier shown in FIG. 1 in the closed position;  
FIG. 8 is a perspective view of the shoe carrier shown in FIG. 1 in an open position illustrating an intended use of the shoe carrier; and,  
FIG. 9 is a perspective view of the shoe carrier shown in FIG. 1 in an open position.

The horizontally-oriented attachment bar and handles in broken line illustrate portions of the shoe carrier and form no part of the claimed design. The broken lines illustrating shoes represent environment and form no part of the claimed design.

The fabric pattern is fragmentarily shown for convenience of illustration. It is understood that the pattern is uniformly continuous over the surface of the shoe carrier.

**1 Claim, 7 Drawing Sheets**

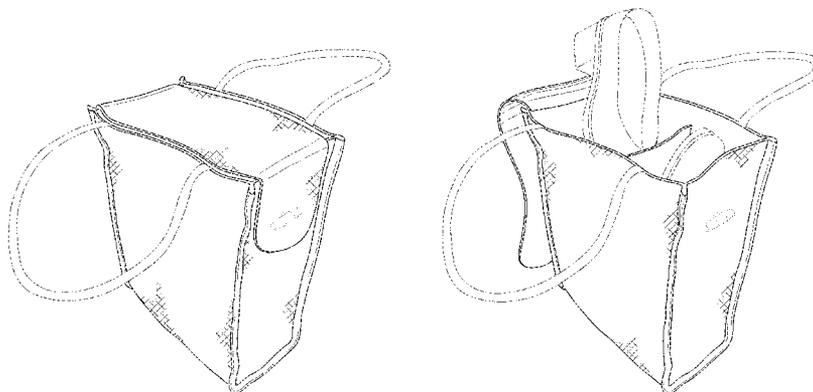

# US D727,025 S

Page 2

---

(56)

## References Cited

### U.S. PATENT DOCUMENTS

2004/0035143 A1*	2/2004	Mogil .....	62/457.2
2010/0084443 A1*	4/2010	Adelman .....	224/153
2002/0185202 A1*	12/2002	Ho .....	150/106

\* cited by examiner

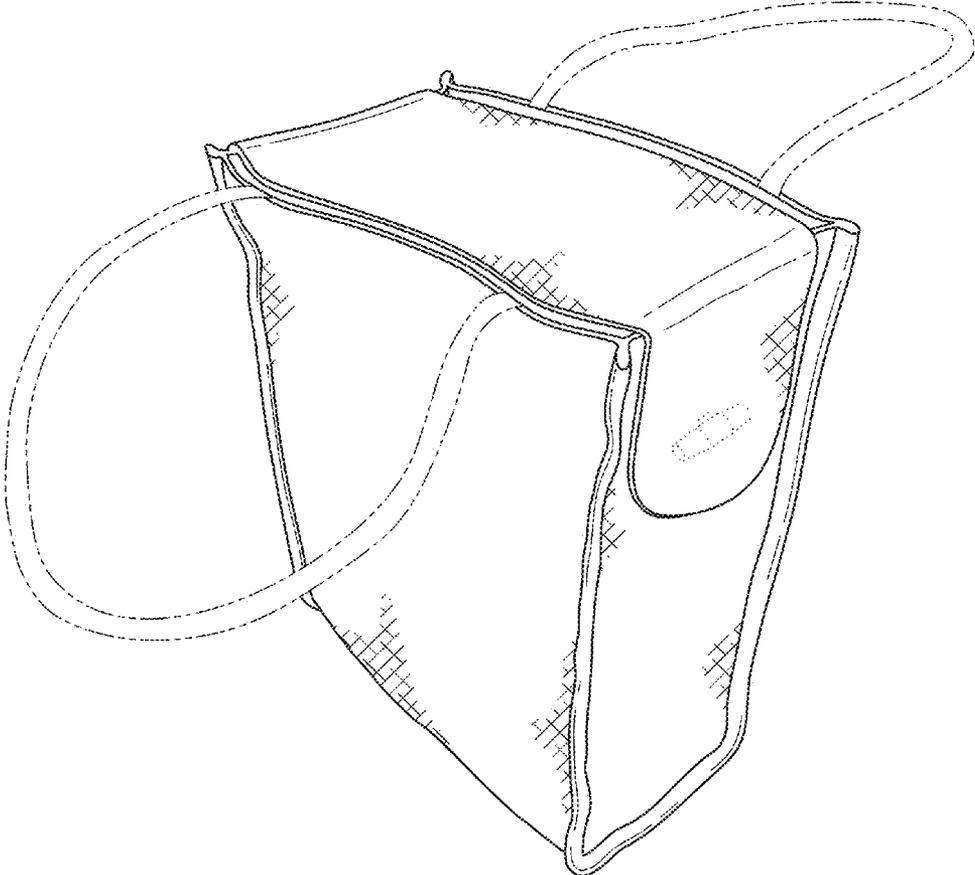


FIG. 1

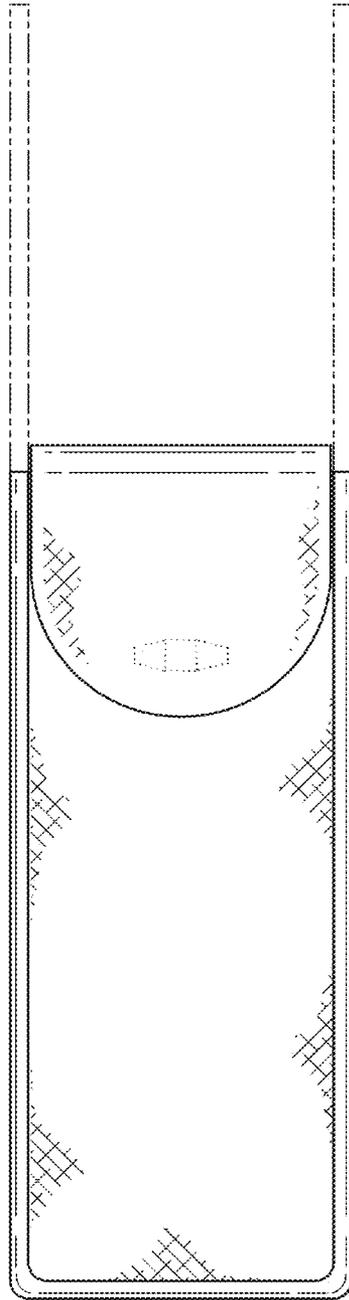


FIG. 2

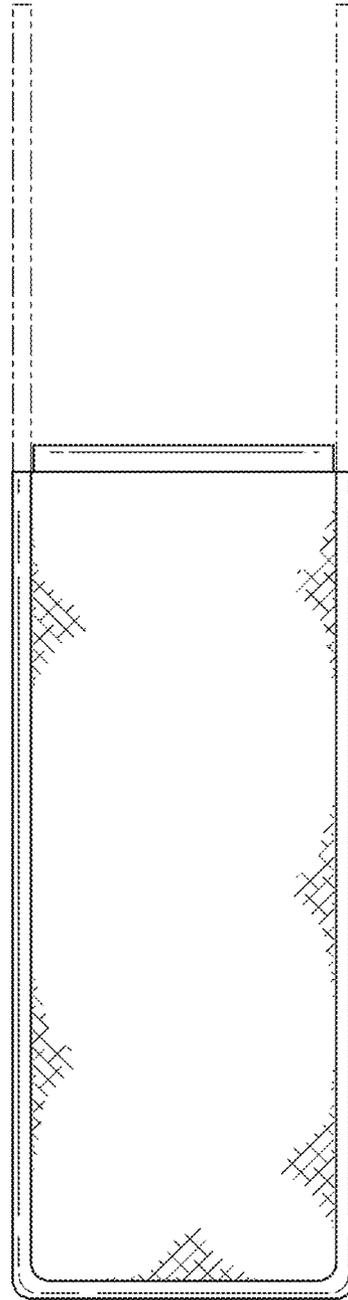


FIG. 3

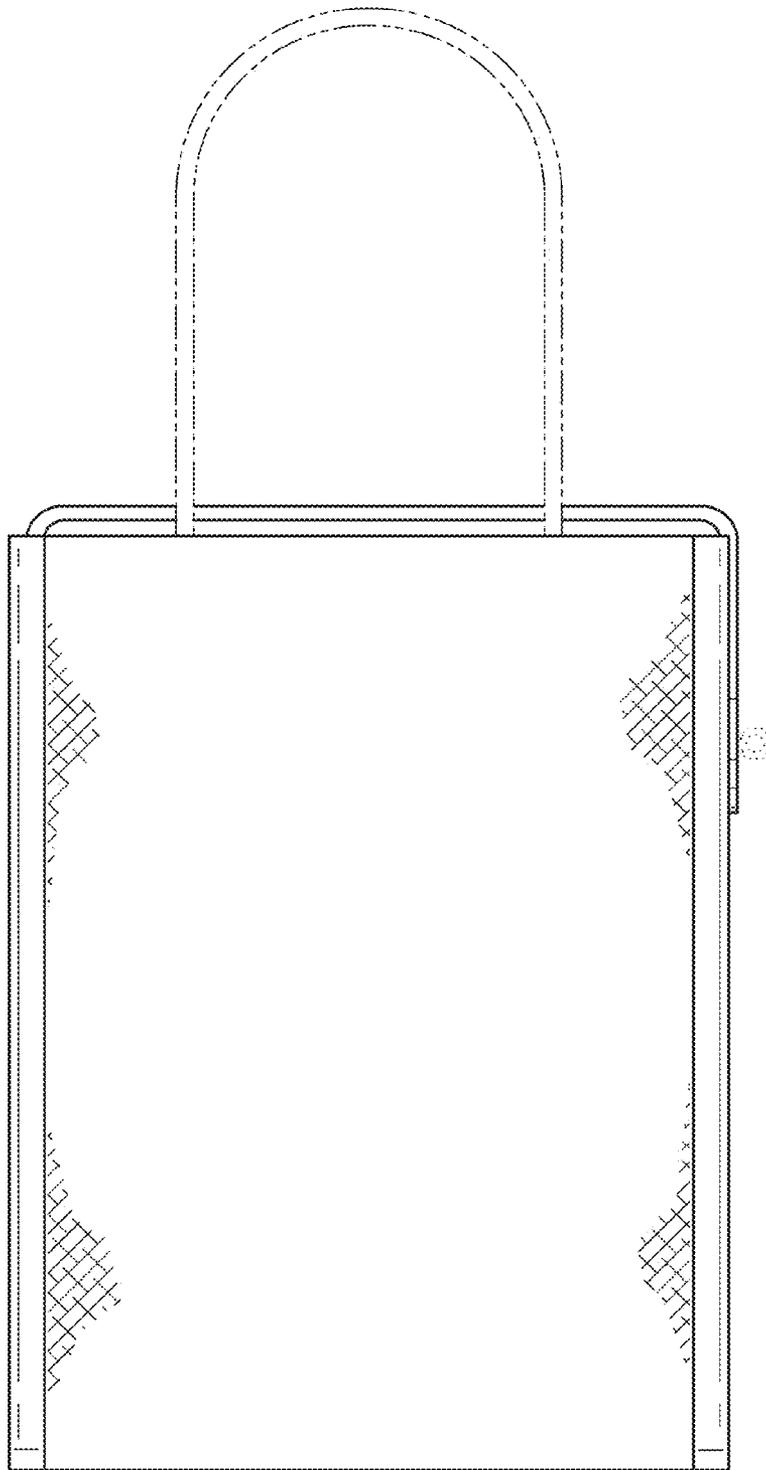


FIG. 4

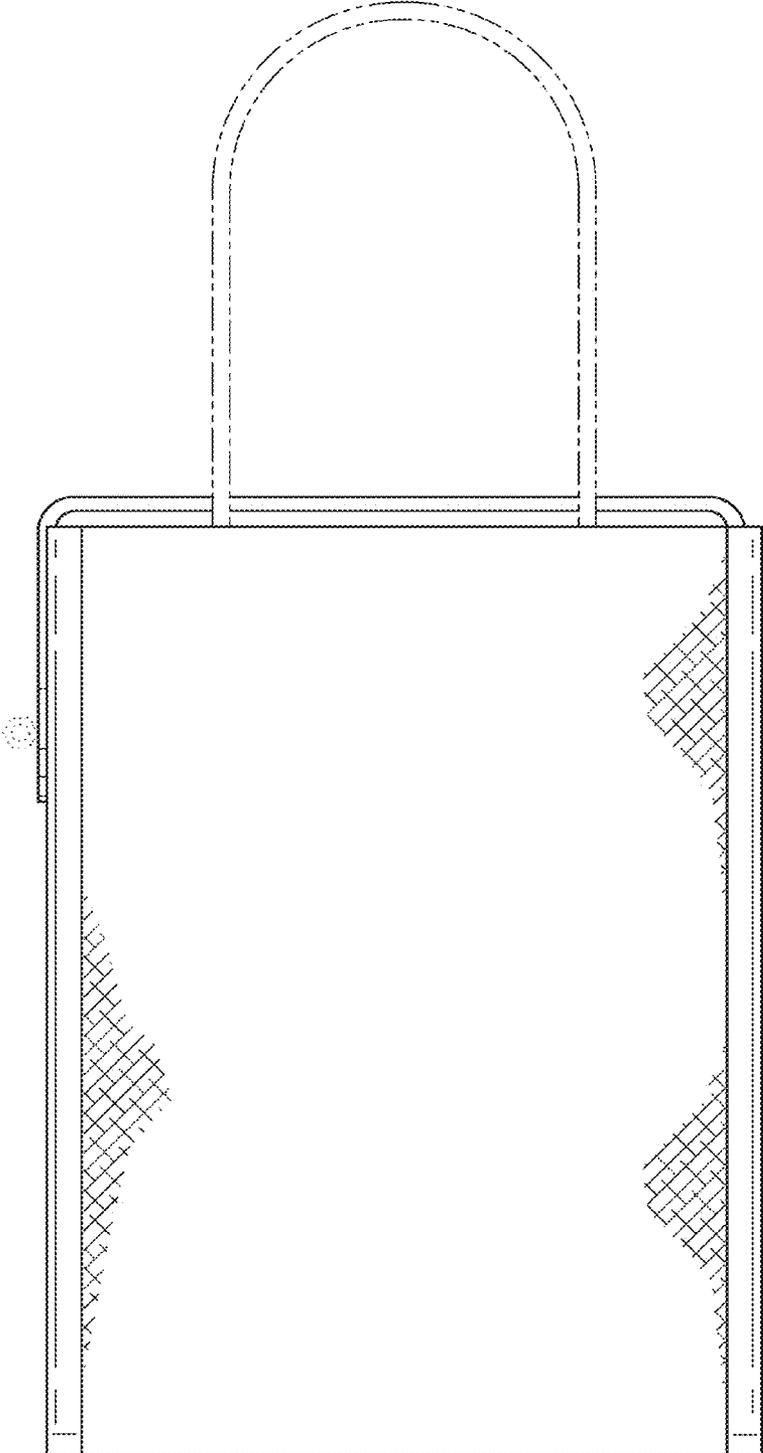


FIG. 5

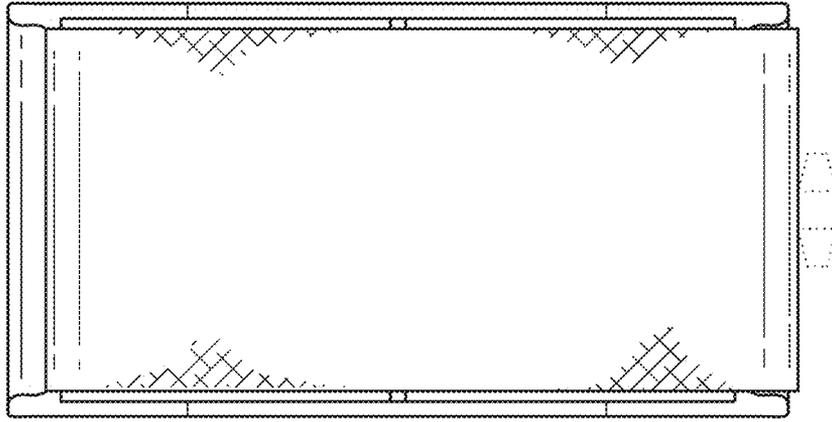


FIG. 6

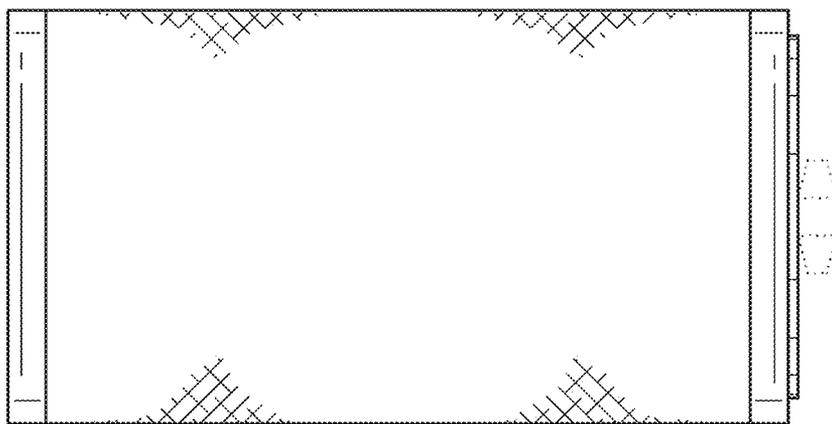


FIG. 7

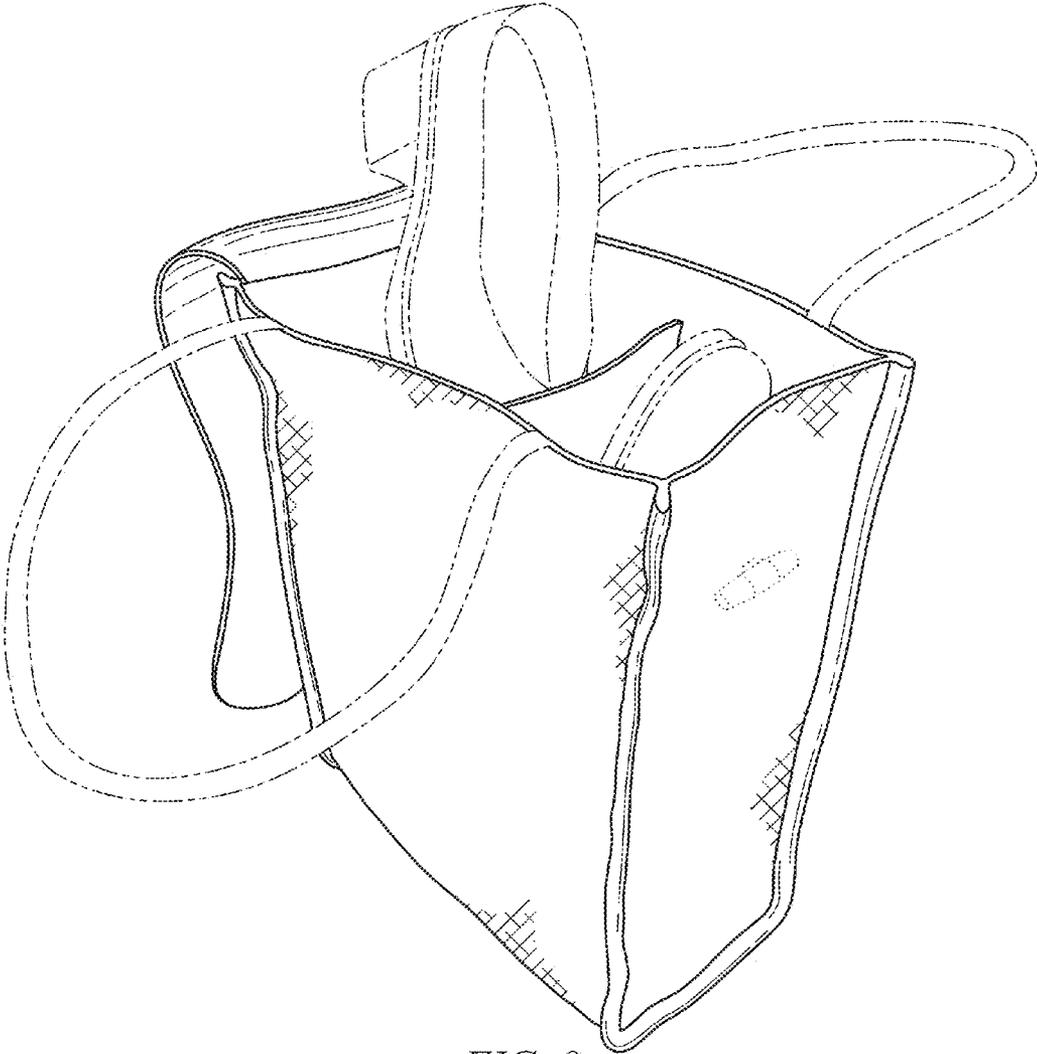


FIG. 8

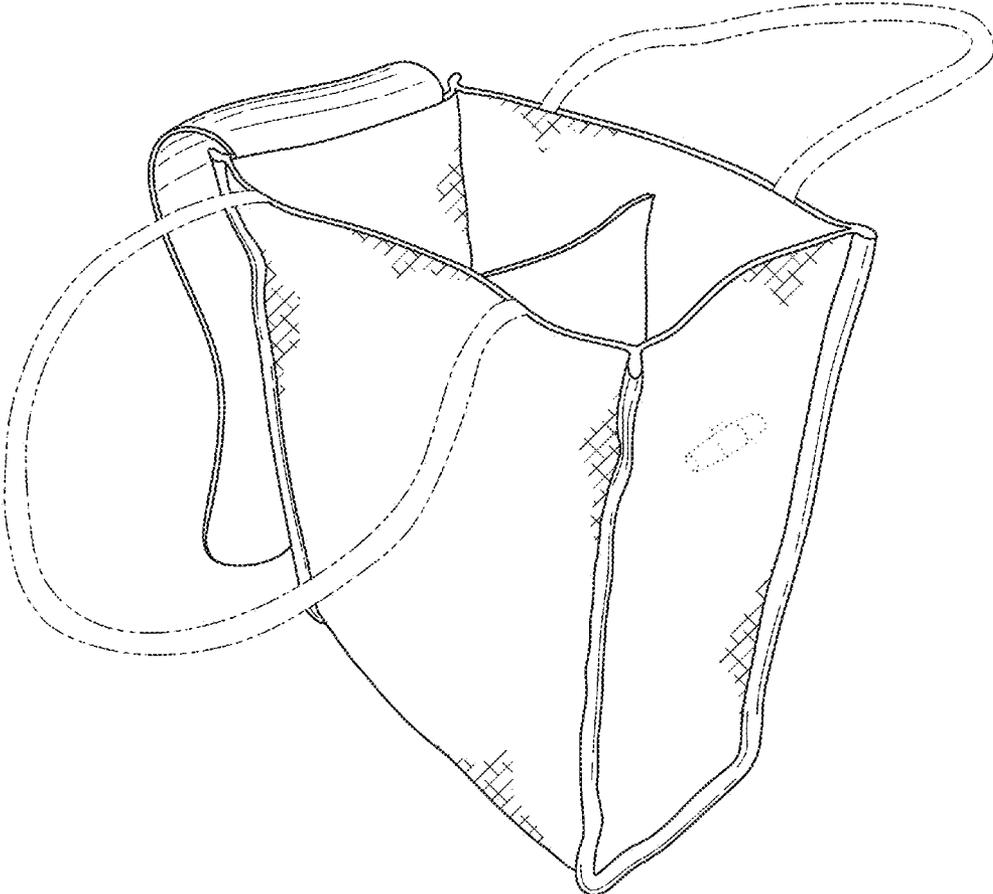


FIG. 9