



(22) Date de dépôt/Filing Date: 1996/04/09

(41) Mise à la disp. pub./Open to Public Insp.: 1996/10/07

(45) Date de délivrance/Issue Date: 2001/12/18

(30) Priorité/Priority: 1995/04/06 (7-081298) JP

(51) Cl.Int.⁶/Int.Cl.⁶ H04N 5/91

(72) Inventeurs/Inventors:

Hagio, Takeshi, JP;
Kurano, Tomoaki, JP;
Taira, Kazuhiko, JP;
Kikuchi, Shinichi, JP;
Mimura, Hideki, JP


(73) Propriétaire/Owner:

KABUSHIKI KAISHA TOSHIBA, JP

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : SUPPORT D'ENREGISTREMENT SUR LEQUEL DES INFORMATIONS D'ATTRIBUTS SONT INTEGREES
AUX DONNEES ENREGISTREES ET SYSTEME DE LECTURE CONNEXE

(54) Title: A RECORDING MEDIUM ON WHICH ATTRIBUTE INFORMATION ON THE PLAYBACK DATA IS
RECORDED TOGETHER WITH THE PLAYBACK DATA AND A SYSTEM FOR APPROPRIATELY REPRODUCING
THE PLAYBACK DATA USING THE ATTRIBUTE INFORMATION

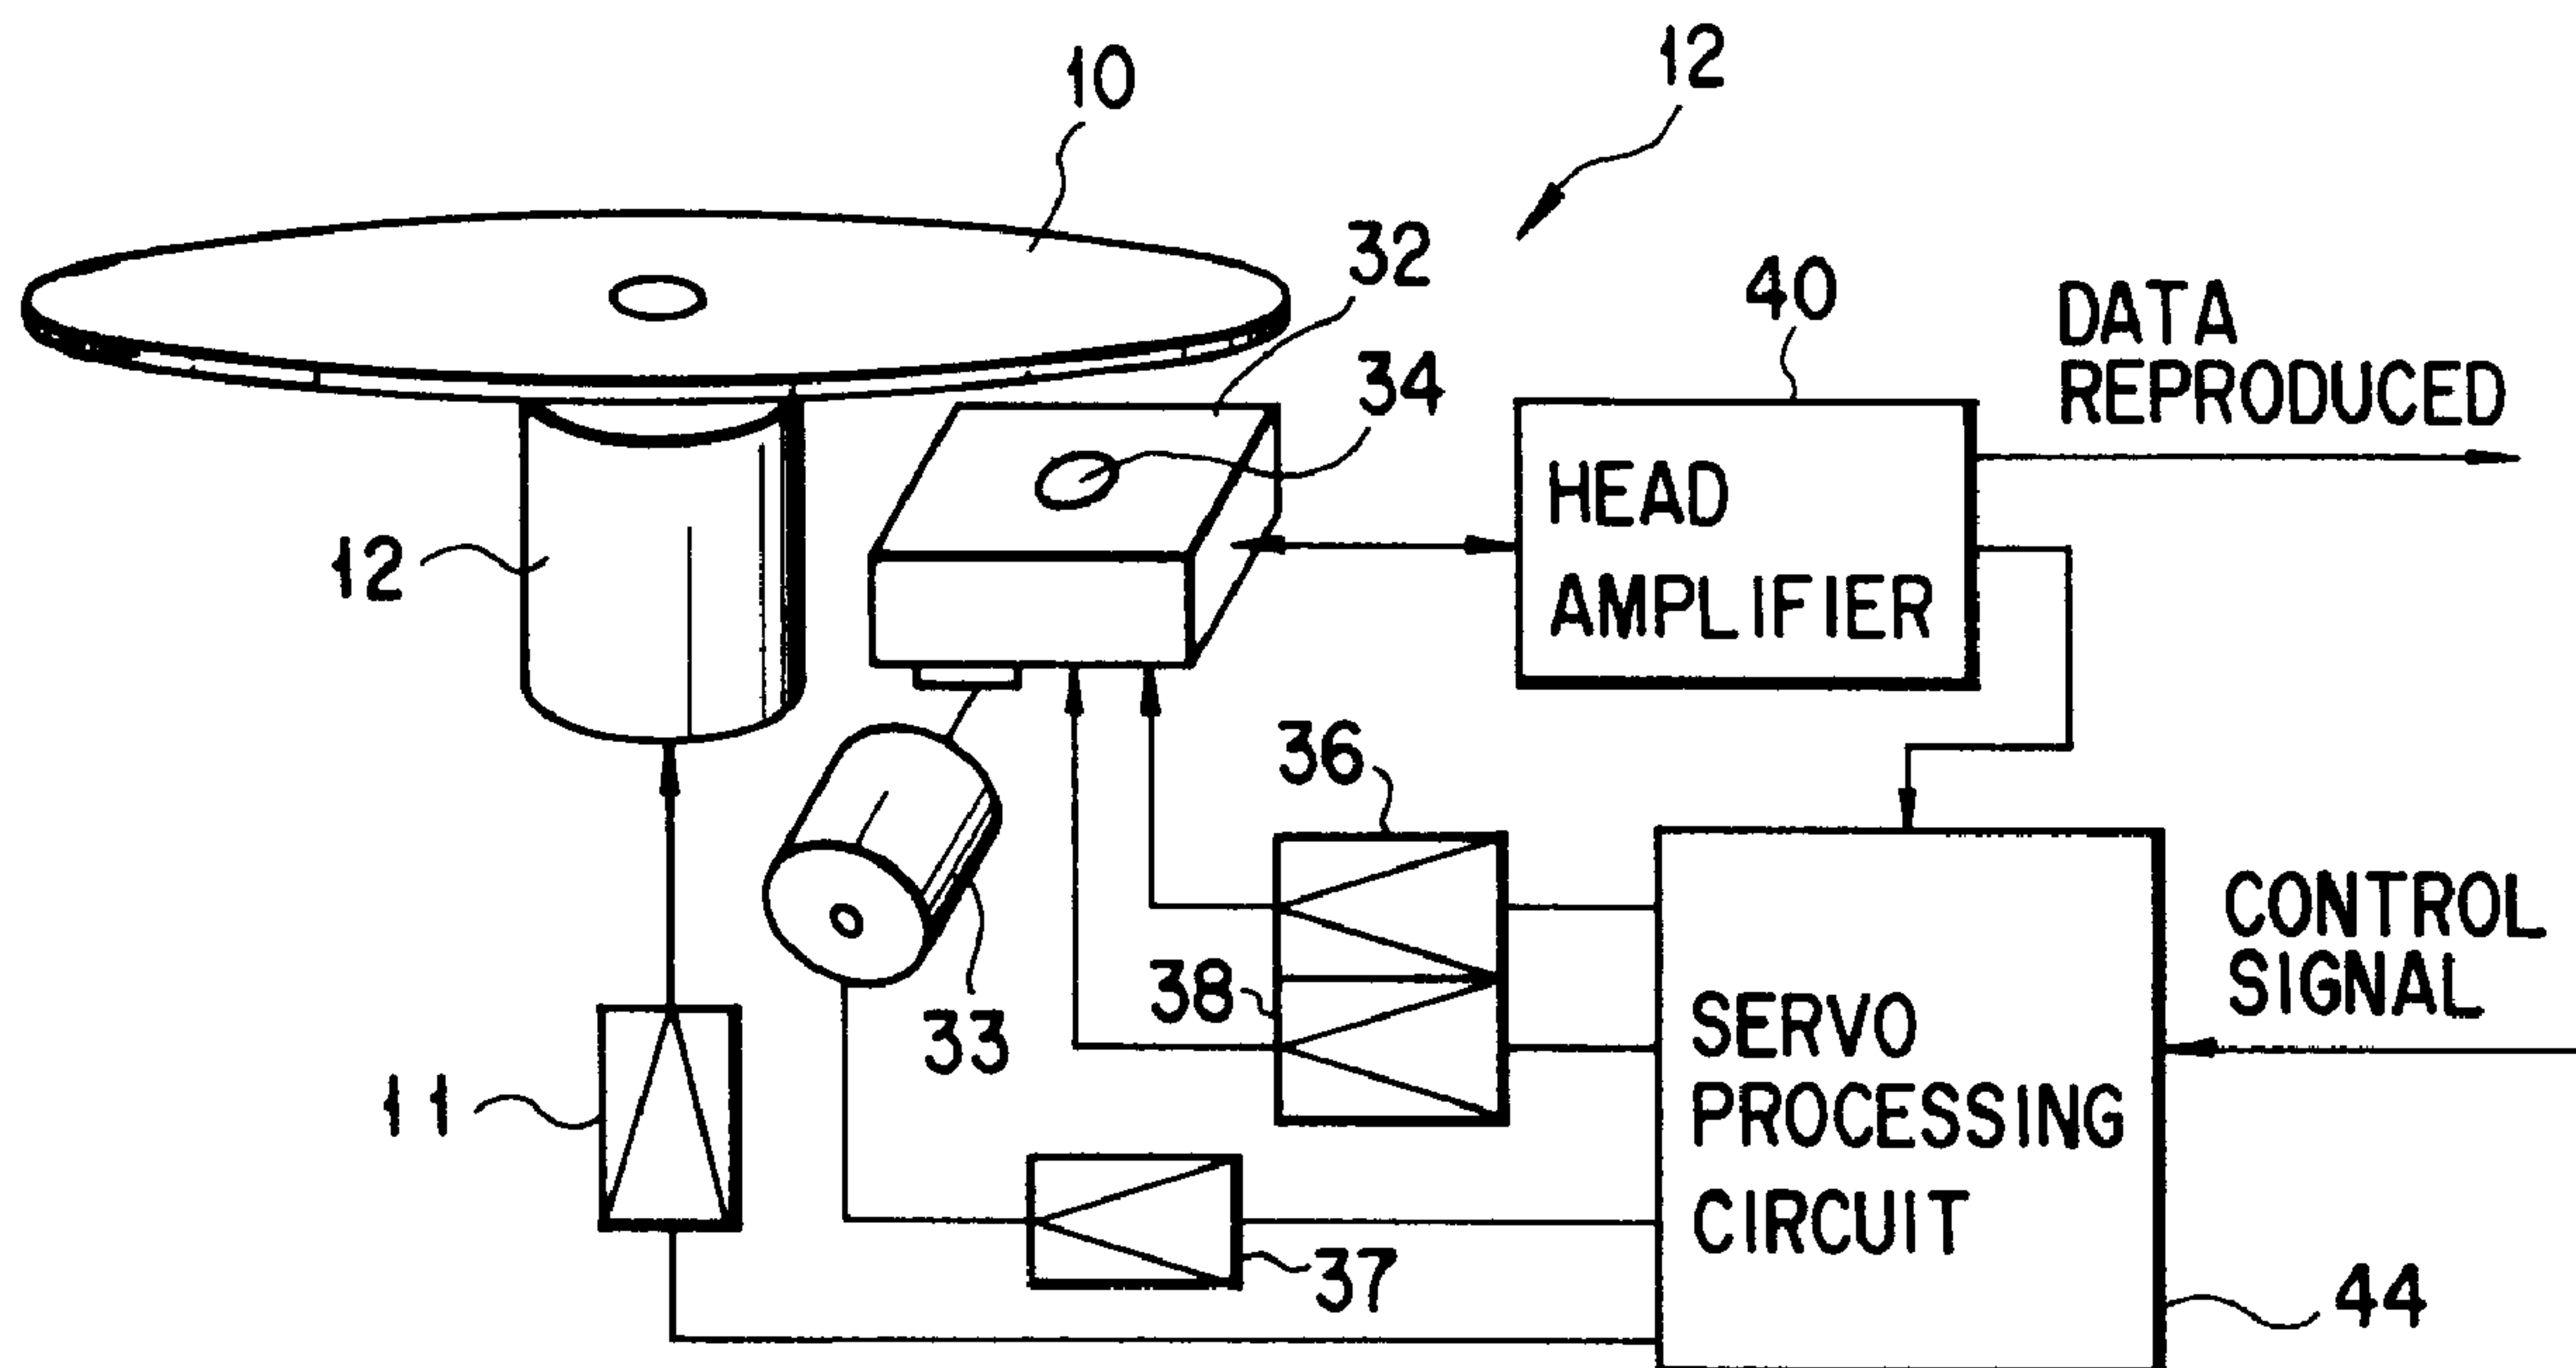

(57) Abrégé/Abstract:

The video data to be reproduced is stored in a file in a video title set (VTS) secured in an information recording area on an optical disk. In the beginning area of the video title set (VTS), video title set information (VTSI) for managing the video title set (VTS) is written. The video title set information (VTSI) is provided with a table (VTS_MAT) for managing the video title set information. In the table (VTSI_MAT), the attributes peculiar to the video data stored in the title set (VTS) and the attributes peculiar to the audio streams and sub-picture streams to be reproduced together with the video data are written. By referring to the management table (VTSI_MAT), the optimum playback conditions for the video data, audio streams, and sub-picture streams to be reproduced are set in a reproducing system.

- 119 -

Abstract of the Disclosure

The video data to be reproduced is stored in a file in a video title set (VTS) secured in an information recording area on an optical disk. In the beginning area of the video title set (VTS), video title set information (VTSI) for managing the video title set (VTS) is written. The video title set information (VTSI) is provided with a table (VTS_MAT) for managing the video title set information. In the table (VTSI_MAT), the attributes peculiar to the video data stored in the title set (VTS) and the attributes peculiar to the audio streams and sub-picture streams to be reproduced together with the video data are written. By referring to the management table (VTSI_MAT), the optimum playback conditions for the video data, audio streams, and sub-picture streams to be reproduced are set in a reproducing system.

This invention relates to a recording medium on which attribute information on the playback data is recorded together with the playback data and a system for appropriately reproducing the playback data using the attribute information, and more particularly to a recording medium on which besides the playback data with specific attributes, even playback data with various attributes can be recorded and further from which appropriate reproduction can be performed according to the attribute data, and a playback system for such a recording medium.

Compact disks (CDs) have been already developed and are now one of the best-known applications of optical disks. Because of the limits of their storage capacity, it is considered difficult to record and reproduce the movie data for a long time. To overcome this shortcoming, an optical disk capable of recording even movie data at high density is being investigated and developed.

Some of such high-density recording optical disks are available. With such optical disks, it is possible to record a plurality of selectable video data items or audio data items on the disk. Furthermore, it is possible to allocate different sounds to a single video by recording a plurality of audio streams on the disk, and moreover, it is possible, for example, to select and display subtitles with different languages by

- 2 -

recording a plurality of sub-picture streams on the disk.

As the number of playback data items to be selected increases, the playback from is diversified. This necessitates setting information on the individual playback
5 data items, data correlation information indicating the correlation between selectable data items to be reproduced in the same time period, or data content information providing the user with information for selection.

In the prior art, however, because the volume of data
10 stored on the disk is small, the setting information, correlation information, and content information are sometimes fixed. Another problem is that although these pieces of information are stored in a particular area on the entire disk, the number of choices is so small that
15 part of the information is practically absent.

The present invention provides an optical disk, a reproduction apparatus and method, and a recording apparatus and method by which it is possible to record or reproduce reproducible video, audio and sub-picture data
20 arranged in one or more title sets with the optimum playback settings for the respective title set and with short waiting times.

According to the present invention, there is provided an optical disk comprising:

25 a data recording area between a lead-in area and a lead-out area, said data recording area being divided into a plurality of sectors and comprising a video management area (VMG) and at least one title area (VTS #n), which areas are respectively aligned with the boundaries between
30 sectors;

wherein said title set area (VTS #n) comprises a reproduction object area (VTSTT_VOBS) on which video audio and sub-picture packs for receiving video, audio and sub-picture data, respectively, are consecutively recorded, the
35 video, audio and sub-picture data constituting at least one title set, and a title set information area (VTSI) on which title set information for controlling the reproduction of

- 3 -

the video, audio and sub-picture data is recorded, the title set information (VTSI) including video attribute information (VTS_V_ATR), audio attribute information (VTS_AST_ATR) and sub-picture attribute information (VTS_SPST_ATR) for proper reproduction of the video, audio and sub-picture data contained in the title set;

a title search pointer table (TT_SRP) and a title set attribution table (VTS_ATRT) are recorded on said video management area (VMG), a video title set number and a start address of each of the title set or title sets are recorded on the title search pointer table (TT_SRP), and

a reproduction control information for the title set or title sets is recorded on the title set attribution table (VTS_ATRT), the reproduction control information including a title set attribution table information (VTS_ATRTI), title set attribution or attributions (VTS_ATR #n) for the title set or title sets, and a search pointer table (VTS_ATR_SRP #n) on which search pointer or pointers each for searching the title set attribution (VTS_ATR #n), the title set attribution table information (VTS_ATRTI) including number of the title sets, each of the title set attribution describing video attribution information (VTS_V_ATR) of the video data, audio attribution information (VTS_AST_ATR) of the audio data and sub-picture attribution information (VTS_SPST_ATR) of the sub-picture data in the title set, search pointer or pointers being described in the search pointer table (VTS_ATR_SRP #n) in an order corresponding the arrangement order of the title sets.

Furthermore, according to the present invention, there is provided a reproduction apparatus for reproducing data from an optical disk, said optical disk comprising:

a data recording area between a lead-in area and a lead-out area, said data recording area being divided into a plurality of sectors and comprising a video management area (VMG) and at least one title area (VTS #n), which areas are respectively aligned with the boundaries between

- 4 -

sectors;

wherein said title set area (VTS #n) comprises a reproduction object area (VTSTT_VOBS) on which video audio and sub-picture packs for receiving video, audio and sub-picture data, respectively, are consecutively recorded, the video, audio and sub-picture data constituting at least one title set, and a title set information area (VTSI) on which title set information for controlling the reproduction of the video, audio and sub-picture data is recorded, the title set information (VTSI) including video attribute information (VTS_V_ATR), audio attribute information (VTS_AST_ATR) and sub-picture attribute information (VTS_SPST_ATR) for proper reproduction of the video, audio and sub-picture data contained in the title set; and

a title set attribution table (VTS_ATRT) is recorded on said video management area (VMG), a reproduction control information for the title set or title sets is recorded on the title set attribution table (VTS_ATRT), the reproduction control information including title set attribution or attributions (VTS_ATR #n) for the title set or title sets, each of the title set attribution describing video attribution information (VTS_V_ATR) of the video data, audio attribution information (VTS_AST_ATR) of the audio data and sub-picture data in the title set;

said reproduction apparatus comprising:

video, audio and sub-picture decoders for decoding the video, audio and sub-picture packs;

searching means for searching said optical disk;

obtaining means for obtaining the video, audio and sub-picture attribution information (VTS_V_ATR, VTS_AST_ATR, VTS_SPST_ATR) from the title set attribution table (VTS_ATRT) of said video management area (VMG) or title set information area (VTSI) of said title set area (VTS #n), before the reproduction of the data; and

setting means for setting the video, audio and sub-picture decoders so as to reproduce, properly, the video, audio and sub-picture data of the title set in accordance

- 5 -

with the obtained video, audio and sub-picture attribution information (VTS_V_ATR, VTS_AST_ATR, VTS_SPST_ATR).

Still furthermore, according to the invention, there is provided a reproduction method of reproducing data from
5 an optical disk, said optical disk comprising:

a data recording area between a lead-in area and a lead-out area, said data recording area being divided into a plurality of sectors and comprising a video management area (VMG) and at least one title area (VTS #n), which areas
10 are respectively aligned with the boundaries between sectors;

wherein said title set area (VTS #n) comprises a reproduction object area (VTSTT_VOBS) on which video audio and sub-picture packs for receiving video, audio and sub-
15 picture data, respectively, are consecutively recorded, the video, audio and sub-picture data constituting at least one title set, and a title set information area (VTSI) on which title set information for controlling the reproduction of the video, audio and sub-picture data is recorded, the
20 title set information (VTSI) including video attribute information (VTS_V_ATR), audio attribute information (VTS_AST_ATR) and sub-picture attribute information (VTS_SPST_ATR) for proper reproduction of the video, audio and sub-picture data contained in the title set; and

25 a title set attribution table (VTS_ATRT) is recorded on said video management area (VMG), a reproduction control information for the title set or title sets is recorded on the title set attribution table (VTS_ATRT), the reproduction control information including title set
30 attribution or attributions (VTS_ATR #n) for the title set or title sets, each of the title set attribution describing video attribution information (VTS_V_ATR) of the video data, audio attribution information (VTS_AST_ATR) of the audio data and sub-picture attribution information
35 (VTS_SPST_ATR) of the sub-picture data in the title set;

said reproduction method of comprising:

searching step of searching said optical disk;

- 6 -

obtaining step of obtaining the video, audio and sub-picture attribution information (VTS_V_ATR, VTS_AST_ATR, VTS_SPST_ATR) from the title set attribution table (VTS_ATRT) of said video management area (VMG) or title set information area (VTSI) of said title set area (VTS #n),
5 before the reproduction of the data; and

decoding step of decoding the video, audio and sub-picture data of the title set in accordance with the obtained video, audio and sub-picture attribution
10 information (VTS_V_ATR, VTS_AST_ATR, VTS_SPST_ATR).

Still furthermore, according to the invention, there is provided an apparatus for recording data on an optical disk, comprising:

pack generating means for encoding video, audio and
15 sub-picture data and storing the encoded video, audio and sub-picture data into video, audio and sub-picture packs;

title set generating means for generating at least one title set information for controlling a reproduction of the video, audio and sub-picture data, which includes video,
20 audio and sub-picture attribution information for reproducing, properly, video, audio and sub-picture data, and arranging the video, audio and sub-picture packs as a reproduction object so as to follow the video, audio and sub-picture attribution information;

25 reproduction control information generating means for generating reproduction control information of the title set which includes attribution information table in which video, audio and sub-picture attribution information for respective title sets are described; and

30 recording means for defining video management area and title set area between a lead in area and a lead out area between the optical disk such that said areas are respectively aligned with the boundaries between sectors, and recording said reproduction control information on the
35 video management area and said title set or title sets on the title set area.

Still furthermore, according to the invention, there

- 7 -

is provided a method of recording data on an optical disk, comprising:

step of encoding video, audio and sub-picture data and storing the encoded video, audio and sub-picture data into
5 video, audio and sub-picture packs;

step of generating at least one title set information for controlling a reproduction of the video, audio and sub-picture data, which includes video, audio and sub-picture attribution information for reproducing, properly, video,
10 audio and sub-picture data, and arranging the video, audio and sub-picture packs as a reproduction object so as to follow the video, audio and sub-picture attribution information;

step of generating reproduction control information of
15 the title set which includes attribution information table in which video, audio and sub-picture attribution information for respective title sets are described; and

step of defining video management area and title set area between a lead in area and a lead out area between the
20 optical disk such that said areas are respectively aligned with the boundaries between sectors, and recording said reproduction control information sectors, and recording said reproduction control information on the video management area and said title set or title sets on the
25 title set area.

This invention can be more fully understood from

the following detailed description when taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a schematic block diagram of an optical disk apparatus according to an embodiment of the present invention;

FIG. 2 is a detailed block diagram of the mechanism section of the disk drive unit of FIG. 1;

FIG. 3 is a schematic perspective view of the structure of an optical disk loaded in the disk drive unit of FIG. 1;

FIG. 4 shows the structure of a logic format of the optical disk of FIG. 3;

FIG. 5 shows the structure of the video manager of FIG. 4;

FIG. 6 shows an example of the structure of the video object set (VOBS) of FIG. 5;

FIG. 7 shows the parameters in the volume manager information management table (VMGI_MAT) in the video manger (VMGI) of FIG. 5 and the description thereof;

FIG. 8 is a bit table describing the video attributes of VMGM of FIG. 7;

FIG. 9 is an explanatory diagram of the relationship between the display aspect ratio related to the description of the video attributes and the display mode;

FIGS. 10A and 10B are plan views to help explain that the representation of the letter box of FIG. 9

changes with the frame rate;

FIG. 11 is a bit table describing the audio stream attributes of VMGM of FIG. 7;

5 FIG. 12 is a bit table describing the sub-picture stream attributes of VMGM of FIG. 7;

FIG. 13 shows the structure of the title search pointer table (TT_SRPT) in the video manger (VMGI) of FIG. 5;

10 FIG. 14 shows the parameters for title search pointer table information (TSPTI) in the title search pointer table (TT_SRPT) of FIG. 13 and the description thereof;

15 FIG. 15 shows the parameters for the title search pointers (TT_SRP) corresponding to the entry numbers of the title search pointer table (TT_SRPT) of FIG. 13 and the description thereof;

FIG. 16 is an explanatory diagram to help explain the structure of a program chain stored in a file;

20 FIG. 17 shows the structure of the video title set attribute table (VTS_ATRT) in the video manager (VMGI) of FIG. 5;

25 FIG. 18 shows the parameters for video title set attribute table information (VTS_ATRTI) in the video title set attribute table (VTS_ATRT) of FIG. 17 and the description thereof;

FIG. 19 shows the parameters for video title set attribute search pointers (VTS_ATR_SRP) in the video

title set attribute table (VTS_ATRT) of FIG. 17 and the description thereof;

FIG. 20 shows the parameters for video title set attributes (VTS_ATR) in the video title set attribute table (VTS_ATRT) of FIG. 17 and the description thereof;

FIG. 21 shows the structure of the video title set of FIG. 4;

FIG. 22 shows the parameters in the video title set information management table (VTSI_MAT) for the video title set information (VTSI) of FIG. 21 and the description thereof;

FIG. 23 is a bit map table of the audio stream attributes (VTS_AST_ATR) described in the table (VTSI_MAT) of FIG. 21;

FIG. 24 shows the structure of the video title set program chain information table (VTS_PGCIT) of FIG. 21;

FIG. 25 shows the parameters for pieces of information (VTS_PGCIT_I) in the video title set program chain information table (VTS_PGCIT) of FIG. 21 and the description thereof;

FIG. 26 shows the parameters for search pointers (VTS_PGCIT_SRP) of the video title set program chain information table (VTS_PGCIT) of FIG. 24 and the description thereof;

FIG. 27 shows the structure of the program chain information (VTS_PGCI) for the video title set

corresponding to a program chain in the video title set
program chain information table (VTS_PGCIT) of FIG. 24;

FIG. 28 shows the parameters for pieces of general
information (PGC_GI) on a program chain in the program
chain information (VTS_PGCI) of FIG. 27;

FIG. 29 shows the structure of a program chain map
(PGC_PGMAP) in the program chain information (VTS_PGCI)
of FIG. 27;

FIG. 30 shows the parameters for the entry cell
numbers (ECELLN) of the programs written in the program
chain map (PGC_PGMAP) of FIG. 19 and the description
thereof;

FIG. 31 shows the structure of a cell playback
information table (C_PBIT) in the program chain
information (VTS_PGCI) of FIG. 27;

FIG. 32 shows the parameters in the cell playback
information (C_PBI) of FIG. 31 and the description
thereof;

FIG. 33 shows the structure of cell position
information (C_POSI) in the program chain information
(VTS_PGCI) of FIG. 27;

FIG. 34 shows the parameters for the cell position
information (C_POSI) of FIG. 33 and the description
thereof;

FIG. 35 shows the structure of the navigation pack
of FIG. 6;

FIG. 36 shows the structure of the video, audio,

or sub-picture pack of FIG. 6;

FIG. 37 shows the parameters for presentation control information (PCI) in the navigation pack of FIG. 35 and the description thereof;

5 FIG. 38 shows the parameters for general information (PCI_GI) in the presentation control information (PCI) of FIG. 37 and the description thereof;

10 FIG. 39 shows the parameters for disk search information (DSI) in the navigation pack of FIG. 35 and the description thereof;

FIG. 40 shows the parameters for DSI general information (DSI_GI) in the disk search information (DSI) of FIG. 39 and the description thereof;

15 FIG. 41 shows the parameters for synchronous playback information (SYNCI) on the video object (VOB) OF FIG. 37 and the description thereof;

FIG. 42 is a block diagram of the video decoder section of FIG. 1;

20 FIG. 43 is a block diagram of the audio decoder section of FIG. 1;

FIG. 44 is a block diagram of the sub-picture decoder section of FIG. 1;

25 FIG. 45 is a block diagram of the video playback processing section of FIG. 1;

FIG. 46 is a block diagram of the audio playback processing section of FIG. 1;

FIG. 47 is a block diagram of the audio mixing section of FIG. 1;

FIG. 48 is a flowchart to help explain the acquisition of video data attributes and the process of setting the reproducing system;

FIG. 49 is a flowchart to help explain the acquisition of audio data attributes and the process of setting the reproducing system;

FIG. 50 is a flowchart to help explain the acquisition of sub-picture data attributes and the process of setting the reproducing system;

FIG. 51 is a block diagram of an encoder system that creates video files by encoding the video data;

FIG. 52 is a flowchart for the encoding process of FIG. 51;

FIG. 53 is a flowchart for combining the main video data, audio data, and sub-picture data that have been encoded in the flow of FIG. 52 and creating a video data file;

FIG. 54 is a block diagram of a disk formatter system used to record a formatted video file on an optical disk;

FIG. 55 is a flowchart for creating logic data to be recorded on the disk in the disk formatter of FIG. 54;

FIG. 56 is a flowchart for creating from logic data physical data to be recorded on the disk; and

FIG. 57 is a schematic diagram of a system that transfers the video title set of FIG. 4 via a communication system.

Hereinafter, referring to the accompanying
5 drawings, an optical disk and an optical disk reproducing apparatus according to an embodiment of the present invention will be explained.

FIG. 1 is a block diagram of an optical disk reproducing apparatus that reproduces the data from an
10 optical disk associated with an embodiment of the present invention. FIG. 2 is a block diagram of the disk drive section that drives the optical disk shown in FIG. 1. FIGS. 3 and 4 show the structure of the optical disk shown in FIGS. 1 and 2.

15 As shown in FIG. 1, the optical disk reproducing apparatus comprises a key/display section 4, a monitor section 6, and a speaker section 8. When the user operates the key/display section 4, this causes the recorded data to be reproduced from an optical disk 10.
20 The recorded data contains video data, sub-picture data, and audio data, which are converted into video signals and audio signals. The monitor section 6 displays images according to the audio signals and the speaker section 8 generates sound according to the
25 audio signals.

The optical disk 10 has been available with various structures. For instance, one type of the

optical disk 10 is a read-only disk on which data is recorded at a high density as shown in FIG. 3. The optical disk 10, as shown in FIG. 3, is made up of a pair of composite layers 18 and an adhesive layer 20 sandwiched between the composite disk layers 18. Each of the composite disk layers 18 is composed of a transparent substrate 14 and a recording layer or a light-reflecting layer 16. The disk layer 18 is arranged so that the light-reflecting layer 16 may be in contact with the surface of the adhesive layer 20. A center hole 22 is made in the optical disk 10. On the periphery of the center hole 22 on both sides, clamping areas 24 are provided which are used to clamp the optical disk 10 during its rotation. When the disk 10 is loaded in the optical disk apparatus, the spindle of a spindle motor 12 shown in FIG. 2 is inserted into the center hole 22. As long as the disk is being rotated, it continues clamped to the clamping areas 24.

As shown in FIG. 3, the optical disk 10 has an information area 25 around the clamping area 24 on each side, on which areas the information can be recorded. In each information area 25, its outer circumference area is determined to be a lead-out area 26 in which no information is normally recorded, its inner circumference area adjoining the clamping area 24 is determined to be a lead-in area 27 in which no information is normally recorded, and the area between

the lead-out area 26 and the lead-in area 27 is determined to be a data recording area 28.

At the recording layer 16 in the information area 25, a continuous spiral track is normally formed as an area in which data is to be recorded. The continuous track is divided into a plurality of physical sectors, which are assigned serial numbers. On the basis of the sectors, data is recorded. The data recording area 28 in the information recording area 25 is an actual data recording area, in which playback data, video data, sub-picture data, and audio data are recorded in the form of pits (that is, in the form of changes in the physical state) as explained later. With the read-only optical disk 10, a train of pits is previously formed on the transparent substrate 14 by a stamper, a reflecting layer is formed by evaporation on the surface of the transparent substrate 14 on which the pit train has been formed, and the reflecting layer serves as the recording layer 16. On the read-only optical disk 10, no groove is normally provided as a track and the pit train on the surface of the transparent substrate 14 serves as a track.

The optical disk apparatus 12, as shown in FIG. 1, further comprises a disk drive section 30, a system CPU section 50, a system ROM/RAM section 52, a system processor section 54, a data RAM section 56, a video decoder 58, an audio decoder section 60, a sub-picture

decoder section 62, and a D/A and data reproducing section 64.

As shown in FIG. 2, the disk drive section 30 contains a motor driving circuit 11, a spindle motor 12, an optical head 32 (i.e., an optical pickup), a feed motor 33, a focus circuit 36, a feed motor driving circuit 37, a tracking circuit 38, a head amplifier 40, and a servo processing circuit 44. The optical disk 10 is placed on the spindle motor 12 driven by the motor driving circuit 11 and is rotated by the spindle motor 12. The optical head 32 that projects a laser beam on the optical disk 10 is located under the optical disk 10. The optical head 32 is placed on a guide mechanism (not shown). The feed motor driving circuit 37 is provided to supply a driving signal to the feed motor 33. The motor 33 is driven by the driving signal and moves in and out the optical head 32 radially over the optical disk 10. The optical head 32 is provided with an object lens 34 positioned so as to face the optical disk 10. The object lens 34 is moved according to the driving signal supplied from the focus circuit 36 so as to move along its optical axis.

To reproduce the data from the aforementioned optical disk, the optical head 32 projects a laser beam on the optical disk 10 via the object lens 34. The object lens 34 is traversed minutely over the optical disk 10 according to the driving signal supplied from

the tracking circuit 38. Furthermore, the object lens 34 is moved minutely along its optical axis according to the driving signal supplied from the focusing circuit 36 so that its focal point may be positioned on the recording layer 16 of the optical disk 10. This causes the laser beam to form the smallest beam spot on the spiral track (i.e., the pit train), enabling the beam spot to trace the track. The laser beam is reflected from the recording layer 16 and returned to the optical head 32. The optical head 32 converts the beam reflected from the optical disk 10 into an electric signal, which is supplied from the optical head 32 to the servo processing circuit 44 via the head amplifier 40. From the electric signal, the servo processing circuit 44 produces a focus signal, a tracking signal, and a motor control signal and supplies these signals to the focus circuit 36, tracking circuit 38, and motor driving circuit 11, respectively.

Therefore, the object lens 34 is moved along its optical axis and across the radius of the optical disk 10, its focal point is positioned on the recording layer 16 of the optical disk 10, and the laser beam forms the smallest beam spot on the spiral track. Furthermore, the spindle motor 12 is rotated by the motor driving circuit 11 at a specific rotating speed. This allows the beam to trace the pit train at

a constant linear speed.

The system CPU section 50 of FIG. 1 supplies to the servo processing circuit 44 a control signal serving as an access signal. In response to the control signal, the servo processing circuit 44
5 supplies a head-moving signal to the feed motor driving circuit 37, which supplies a driving signal to the feed motor 33. Then, the feed motor 33 is driven, causing the optical head 32 to traverse over the optical disk
10 10. Then, the optical head 32 accesses a specific sector formed at the recording layer 16 of the optical disk 10. The playback data is reproduced from the specific sector by the optical head 32, which then supplies it to the head amplifier 40. The head
15 amplifier 40 amplifies the reproduced data, which is outputted at the disk drive section 30.

The reproduced data is stored in the data RAM section 56 by the system processor section 54 under the supervision of the system CPU section 50 controlled by
20 the programs stored in the system ROM/RAM section 52. The stored reproduced data is processed at the system processor section 54, which sorts the data into video data, audio data, and sub-picture data, which are supplied to the video decoder section 58, audio decoder
25 section 60, and sub-picture decoder section 62, respectively, and are decoded at the respective decoders. The D/A and data-reproducing section 64

converts the decoded video data, audio data, and sub-picture data into an analog video signal, an analog audio signal, and an analog sub-picture signal and supplies the resulting video signal to the monitor 6 and the resulting audio signal to the speaker 8. Then, on the basis of the video signal and sup-picture signal, image are displayed on the monitor section 6 and according to the audio signal, sound is simultaneously reproduced at the speaker section 8.

The detailed operation of the optical disk apparatus of FIG. 1 will be described later with reference to the logic format of the optical disk explained below.

The data recording area 28 between the lead-in area 27 and the lead-out area 26 on the optical disk of FIG. 1 has a volume and file structure as shown in FIG. 4. The structure has been determined in conformity to specific logic format standards, such as micro UDF or ISO 9660. The data recording area 28 is physically divided into a plurality of sectors as described earlier. These physical sectors are assigned serial numbers. In the following explanation, a logical address means a logical sector number (LSN) as determined in micro UDF or ISO 9660. Like a physical sector, a logical sector contains 2048 bytes. The numbers (LSN) of logical sectors are assigned consecutively in ascending order as the physical sector

number increments.

As shown in FIG. 4, the volume and file structure is a hierarchic structure and contains a volume and file structure area 70, a video manager (VMG) 71, at least one video title set (VTS) 72, and other recorded areas 73. These areas are partitioned at the boundaries between logical sectors. As with a conventional CD, a logical sector is defined as a set of 2048 bytes. Similarly, a logical block is defined as a set of 2048 bytes. Therefore, a single logical sector is defined as a single logical block.

The file structure area 70 corresponds to a management area determined in micro UDF or ISO 9660. According to the description in the management area, the video manager 71 is stored in the system ROM/RAM section 52. As explained with reference to FIG. 5, the information used to manage video title sets is written in the video manager, which is composed of a plurality of files 74, starting with file #0. In each video title set (VTS) 72, compressed video data, compressed audio data, compressed sub-picture data, and the playback information about these data items are stored as explained later. Each video title set is composed of a plurality of files 74. The number of video title sets is limited to 99 maximum. Furthermore, the number of files 74 (from File #j to File #j+9) constituting each video title set is determined to be 10 maximum.

These files are also partitioned at the boundaries between logical sectors.

In the other recorded areas, the information capable of using the aforementioned video title sets 72 is recorded. The other recorded areas are not necessarily provided.

As shown in FIG. 5, the video manager 71 contains at least three items each corresponding to individual files 74. Specifically, the video manager 71 is made up of video manager information (VMGI) 75, a video object set (VMGM_VOBS) 76 for video manager menu, and backup (VMGI_BUP) 77 of video manager information. Here, the volume manager information (VMGI) 75 and the backup (VMGI_BUP) 77 of video manager information are determined to be indispensable items, and the video object set (VMGM_VOBS) 76 for video manager menu is determined to be an optional item. In the video object set (VMGM-VOBS) 76 for VMGM, the video data, audio data, and sup-picture data for a menu of the volumes of the optical disk managed by the video manager 71 are stored.

According to the video object set (VMGM_VOBS) for VMGM, the volume name of the optical disk, the sound accompanying the volume name representation, and the description of the sub-picture are displayed and at the same time, selectable items are provided in the form of sub-pictures as in video reproduction explained later.

For example, the video object set (VMGM_VOBS) 76 for VMGM indicates that the optical disk contains the video data representing the matches a boxer played until he won a world championship. Specifically, a fighting
5 pose of boxer X, together with a volume name, such as the glorious history of boxer X, is reproduced in the form of video data and at the same time, his theme song is reproduced in sound, and his chronological table is provided in a sup-picture. Furthermore, the user is
10 asked which language choice to select, English or Japanese, for the narration of the matches. At the same time, the user is asked whether subtitles in another language should be provided in a sub-picture or which language choice should be selected for the
15 subtitles. Thus, for example, the VMGM video object set (VMGM_VOBS) 76 makes preparations for the user to watch a video of a match of boxer X in English narration with a sub-picture using Japanese subtitles.

Here, the structure of a video object set (VOBS)
20 82 will be described with reference to FIG. 6. FIG. 6 shows an example of a video object set (VOBS) 82. The video object set (VOBS) 82 comes in three types 76, 95, 96 for two menus and a title. Specifically, in the video object set (VOBS) 82, a video title set (VTS) 72
25 contains a video object set (VTSM_VOBS) 95 for a menu of video title sets and a video object set (VTSTT_VOBS) for the titles of at least one video title set as

explained later. Each video object 82 set has the same structure except that their uses differ.

As shown in FIG. 6, a video object set (VOBS) 82 is defined as a set of one or more video objects (VOB).
5 The video objects 83 in a video object set (VOBS) 82 are used for the same application. A video object set (VOBS) 82 for menus is usually made up of a single video object (VOB) 83 and stores the data used to display a plurality of menu screens. In contrast, a
10 video object set (VTSTT_VOBS) 82 for title sets is usually composed of a plurality of video objects (VOB) 83.

When the aforesaid video of a boxing match is taken as example, a video object (VOB) 83 corresponds
15 to the video data of each match played by boxer X. Specifying a particular video object (VOB) enables, for example, boxer X's eleventh match for a world championship to be reproduced on a video. The video object set (VTSM_VOBS) 95 for a menu of the video title
20 sets 72 contains the menu data for the matches played by boxer X. According to the presentation of the menu, a particular match, for example, boxer X's eleventh match for a world championship, can be specified. In the case of a usual single story movie, one video
25 object 83 (VOB) corresponds to one video object set (VOBS) 82. One video stream is completed with one video object set (VOBS) 82. In the case of

a collection of animated cartoons or an omnibus movie,
a plurality of video streams each corresponding to
individual stories are provided in a single video
object set (VOBS) 82. Each video stream is stored in
5 the corresponding video object. Accordingly, the audio
stream and sub-picture stream related to the video
stream are also completed with each video object
(VOB) 83.

An identification number (IDN#j) is assigned to a
10 video object (VOB) 83. By the identification number,
the video object (VOB) 83 can be identified. A single
video object (VOB) 83 is made up of one or more cells
84. Although a usual video stream is made up of a
plurality of cells, a menu video stream, or a video
15 object (VOB) 83 may be composed of one cell. A cell is
likewise assigned an identification number (C_IDN#j).
By the identification number (C_IDN#j), the cell 84 is
identified.

As shown in FIG. 6, each cell 84 is composed of
20 one or more video object units (VOBU) 85, normally a
plurality of video object units (VOBU) 85. Here, a
video object unit (VOBU) 85 is defined as a pack train
having a single navigation pack (NAV pack) 86 at its
head. Specifically, a video object unit (VOBU) 85 is
25 defined as a set of all the packs recorded, starting at
a navigation pack (NAV pack) to immediately in front of
the next navigation pack. The playback time of the

video object unit (VOBU) corresponds to the playback time of the video data made up of one or more GOPs (Group of Pictures) contained in the video object (VOBU). The maximum playback time is determined to be 5 0.4 or more second and less than one second. In the MPEG standard, a single GOP is determined to be normally 0.5 second long and be compressed screen data for reproducing about 15 screens during that duration.

When a video object unit includes video data as 10 shown in FIG. 6, more than one GOP composed of video packs (V packs) 88, a sup-picture pack (SP pack) 90, and an audio pack (A pack) 91 all determined in the MPEG standard, are arranged to produce a video data stream. Regardless of the number of GOPs, a video 15 object unit (VOBU) 85 is determined on the basis of the playback time of a GOP. The video object always has a navigation pack (NV pack) 86 at its head. Even when the playback data consists only of audio and/or sub-picture data, it will be constructed using the video 20 object unit as a unit. Specifically, even if a video object unit is constructed only of audio packs, the audio packs to be reproduced within the playback time of the video object unit to which the audio data belongs will be stored in the video object unit, as 25 with the video object of video data.

The video manager 71 will be explained with reference to FIG. 5. The video management information

75 placed at the head of the video manager 71 contains
information on the video manager itself, the
information used to search for titles, the information
used to reproduce the video manager menu, and the
5 information used to manage the video title sets (VTS)
72 such as the attribute information on video titles.
The volume management information contains at least
three tables 78, 79, 80 in the order shown in FIG. 5.
Each of these tables 78, 79, 80 is aligned with the
10 boundaries between logical sectors. A first table, a
video manger information management table (VMGI_MAT)
78, is a mandatory table, in which the size of the
video manager 71, the start address of each piece of
the information in the video manger 71, and the start
15 address of and the attribute information about the
video object set (VMGM_VOBS) 76 for a video manager
menu are written. As explained later, the attribute
information includes the video attribute information,
the audio attribute information, and the sub-picture
20 attribute information. According to these pieces of
attribute information, the modes of the decoders 58,
60, 62 are changed, thereby enabling the video object
set (VMGM_VOBS) 76 to be reproduced in a suitable mode.

Written in a second table of the video manager 71,
25 a title search pointer table (TT_SRPT) 79, are the
start addresses of the video titles stored on the
optical disk that are selectable according to a title

number entered from the key/display section 4 on the apparatus.

5 In a third table of the video manager 71, a video title set attribution table (VTS_ATRT) 80, the attribute information determined in the video title set (VTS) 72 in the volumes of the optical disk is written. Specifically, in this table, the following items are written as attribute information: the number of video title sets (VTS) 72, video title set (VTS) 72 numbers, 10 video attributes, such as a video data compression scheme, audio stream attributes, such as an audio coding mode, and sub-picture attributes, such as the type of sup-picture display.

The details of the contents of the volume 15 management information management table (VMGI_MAT) 78, title search pointer table (TT_SRPT) 78, and video title set attribute table (VTS_ATRT) 80 will be described with reference to FIGS. 7 to 20.

As shown in FIG. 7, written in the volume 20 management information management table (VMGI_MAT) 78 are an identifier (VMG_ID) for the video manager 71, the size of video management information in the number of logical blocks (a single logical block contains 2048 bytes, as explained earlier), the version number (VERN) 25 related to the standard for the optical disk, commonly known as a digital versatile disk (digital multipurpose disk, hereinafter, referred to as a DVD), and the

category (VMG_CAT) of the video manger 71.

5 In the category (VMG_CAT) of the video manager 71,
a flag indicating whether or not the DVD video
directory inhibits copying is written. Further written
in the table (VMGI_MAT) 78 are a volume set identifier
(VLMS_ID), the number of video title sets (VTS_Ns), the
10 identifier for a provider supplying the data to be
recorded on the disk (PVR_ID), the start address
(VMGM_VOBS_SA) of the video object set (VMGM_VOBS) 76
for a video manager menu, the end address (VMGI_MAT_EA)
of a volume manager information management table
(VMGI_MAT) 78, and the start address (TT_SRPT_SA) of a
title search pointer table (TT_SRPT). If the video
object set (VMGM_VOBS) 95 for the VMG menu is absent,
15 "00000000h" will be written in its start address
(VMGM_VOBS_SA). The end address (VMGI_MAT_EA) of
VMG_MAT 78 is represented by the relative bite number
from the first logical block of VMGI_MAT 78 and the
start address (TT_SRPT_SA) of TT_SRPT 79 are
20 represented by the relative number of logical blocks
from the first logical block of VMGI 75.

Furthermore, in the table 78, the start address
(VTS_ATRT_SA) of the attribute table (VTS_ATRT) of
video title sets 72 (VTS) is represented by the number
25 of bytes, relative to the first byte in the VMGI
manager table (VMGI_MAT) 71, and the video attribute
(VMGM_V_AST) of the video manager menu (VMGM) video

object set 76 is written as well. Further written in the table 78 are the number (VMGM_AST_Ns) of audio streams in the video manager menu (VMGM), the attributes (VMGM_AST_ATR) of audio streams in the video manager menu (VMGM), the number (VMGM_SPST_Ns) of sub-picture streams in the video manager menu (VMGM), and the attributes (VMGM_SPST_ATR) of sub-picture streams in the video manager menu (VMGM).

In the video attribute (VMGM_V_ATR), as shown in FIG. 8, bit number b8 to bit number b15 are allocated to the compression mode, frame rate, display aspect ratio, and display mode, which are the video attribute of the video object set 76 for the video manager menu (VMGM) and bit number b0 to bit number b7 are left empty for reservation for later use. When "00" is written in bit numbers b15, b14, this means the menu video data has been compressed in the video compression mode on the basis of the MPEG-1 standard; and when "01" is written in bit numbers b15, b14, this means the menu video data has been compressed in the video compression mode on the basis of the MPEG-2 standard. The other numbers are for reservation for later use. When "00" is written in bit numbers b13, b12, this means that the menu video data has a frame rate of 29.27/S at which 29.27 frames are reproduced every second. Specifically, when "00" is written in bit numbers b13, b12, this means that the menu video data is TV-system

video data according to the NTSC scheme and has a frame rate at which a single frame is drawn at a horizontal frequency of 60 Hz using 525 scanning lines. When "01" is written in bit numbers b13, b12, this means that the menu video data has a frame rate of 25/S at which 25 frames are reproduced every second. Specifically, this means that the menu video data is TV-system video data according to the PAL scheme and has a frame rate at which a single frame is drawn at a frequency of 50 Hz using 625 scanning lines. The other numerals in bit numbers b13, b12 are for reservation for later use.

Furthermore, when "00" is written in bit numbers b11, b10, this means that the menu video data has a display aspect ratio (ratio of height to width) of 3/4; and when "11" is written in bit numbers b11, b10, this means that the menu video data has a display aspect ratio (ratio of height to width) of 9/16. The other numbers are for reservation for later use.

Furthermore, when the display aspect ratio is 3/4, that is, when "00" is written in bit numbers b11, b10, "11" is written in bit numbers b9, b8. When the display aspect ratio is 9/16, that is, when "11" is written in bit numbers b11, b10, whether the displaying of the menu video data in pan scan and/or letter box is permitted is written. Specifically, when "00" is written in bit numbers b9, b8, this means that the displaying in either of pan scan and letter box is

permitted; when "01" is written in bit numbers b9, b8, this means that the displaying in pan scan is permitted, but the displaying in letter box is inhibited; and when "10" is written in bit numbers b9, b8, this means that the displaying in pan scan is inhibited, but the displaying in letter box is permitted. When "11" is written in bit numbers b9, b8, this means that the displaying is not particularly specified.

FIG. 9 shows the relationship between the video data recorded on the optical disk and the reproduced screen images on the TV monitor. As for the video data, because the display aspect ratio is written in bit numbers b11, b10 and the display mode is written in bit numbers b9, b8 as the aforementioned attribute information, this gives the displays as shown in FIG. 9. The video data whose original display aspect ratio ("00" in bit numbers b11, b10) is $3/4$ is compressed as it is and recorded. Specifically, as shown in FIG. 9, in the case of the image data with a circle drawn in the center around which four small circles are placed, even if the display mode is any of normal ("00" in bit numbers b9, b8), pan scan ("01" in bit numbers b9, b8), and letter box ("10" in bit numbers b9, b8), it will be displayed on a TV monitor having a TV aspect ratio of $3/4$ without changing the display mode as an image with a circle drawn in the

center around which four small circles are placed.
Even with a TV monitor 6 having a TV aspect ratio of
9/16, the image data is will be displayed without
changing the display mode as an image with a circle
5 drawn in the center around which four small circles are
placed, just leaving the areas on both sides of the
screen of the TV monitor where no image is displayed.

In contrast, the image data whose aspect ratio
("11" in bit numbers b11, b10) is 9/16 is compressed
10 and recorded in a representation with more height than
width transformed so that it may have an aspect ration
of 3/4. Specifically, the image having a display
aspect ratio of 9/16 with a circle drawn in the center
around which four small circles are placed, outside
15 which another four small circles are placed-- one large
circle and eight small circles --is compressed and
recorded as the data transformed into a representation
where all circles have more height than width.

Accordingly, when the display mode is normal ("00" in
20 bit numbers b9, b8), the original image will be
displayed without changing the display mode on a TV
monitor 6 having a TV aspect ration of 3/4 as an image
having an oval with more height than width drawn in the
center around which four small ovals with more height
25 than width are placed, outside which another four small
ovals with more height than width are placed-- one
large ovals and eight small ovals. In contrast, when

the display mode is pan scan ("01" in bit numbers b9, b8), the original image will be displayed on the TV monitor 6 having a TV aspect ration of 3/4 as an image with a circle, not an oval, drawn in the center around which four small circles are placed, and the edge of the screen being so trimmed that the four outermost small circles are cut away. Furthermore, when the display mode is letter box ("10" in bit numbers b9, b8), because the aspect ratio remains unchanged, the original image will be displayed on the TV monitor 6 having a TV aspect ratio of 3/4 as an image of full screen, that is, a single large circle, not an oval, and eight small circles except that no images appear at the top and bottom of the screen. Naturally, because a TV monitor 6 having a TV aspect ratio of 9/16 agrees with the display aspect ratio ("11" in bit numbers b11, b10) of the image data, the image data is displayed as an image with a complete circle drawn in the center around which four small complete circles are placed, outside which another four small complete circles are placed-- one large circle and eight small circles.

As described above, when the image data whose display aspect ratio ("11" in bit numbers b11, b10) is displayed on the TV monitor 6 having a TV aspect ratio of 3/4, no image appears on the top and bottom of the screen. At a frame rate ("01" in bit numbers b13, b12) at which a single frame is drawn at a horizontal

frequency of 60 Hz using 525 scanning lines, 72
horizontal scanning lines, the top and bottom ones put
together, draw in black ($Y = 16$, $U = V = 128$) as shown
in FIG. 10A and therefore the top and bottom portions
5 appear black. At a frame rate ("00" in bit numbers
b13, b12) at which a single frame is drawn at a
horizontal frequency of 50 Hz using 625 scanning lines,
60 horizontal scanning lines, the top and bottom ones
put together, draw in black ($Y = 16$, $U = V = 128$) as
10 shown in FIG. 10A and therefore the top and bottom
portions appear black.

Explanation of the contents of the table shown in
FIG. 7 will be resumed. In the audio stream attribute
(VMGM_AST_ATR) of the video manager menu (VMGM), bit
15 number b63 to bit number b48 are allocated to the audio
coding mode, audio type, audio application type,
quantization, sampling frequency, and the number of
audio channels and bit number b47 to bit number b0 are
left empty for reservation for later use as shown in
20 FIG. 11. If the VMCG video object set 76 is absent, or
if an audio stream is absent in the video object set,
"0" will be written in each bit, starting at bit number
b63 down to bit number b0. The audio coding mode is
written in bit number b63 to bit number b61. When
25 "000" is written for the audio coding mode, this means
that the audio data has been coded according to Dolby
AC-3 (a trademark of Dolby Laboratories Licensing

Corporation). When "010" is written for the audio coding mode, this means that the audio data is compressed without any expanded bit stream under MPEG-1 or MPEG-2. When "011" is written for the audio coding mode, this means that the audio data is compressed with an expanded bit stream under MPEG-2. When "100" is written for the audio coding mode, this means that the audio data is coded by linear PCM. For the audio data, the other numbers are for reservation for later use.

At a frame rate ("00" is written in bit numbers b13, b12 in VMGM_V_ATR) at which a single frame is drawn at a horizontal frequency of 60 Hz using 525 scanning lines, in the video data attribute, Dolby AC-3 ("000" in bit numbers b63, b62, b61) or linear PCM ("100" in bit numbers b63, b62, b61) is to be set. At a frame rate ("01" is written in bit numbers b13, b12 in VMGM_V_ATR) at which a single frame is drawn at a horizontal frequency of 50 Hz using 625 scanning lines, in the video data attribute, MPEG-1 or MPEG-2 ("010" or "011" in bit numbers b63, b62, b61) or linear PCM ("100" in bit numbers b63, b62, b61) is to be set.

The audio type is written in bit numbers b59 and b58. When the audio type is not specified, "00" will be written in these bit numbers. The other numbers are for reservation. The ID of an audio application field is written in bit numbers b57 and b56. When the ID is not specified, "00" will be written in these bit

numbers. The other numbers are for reservation. The quantization of audio data is written in bit numbers b55 and b54. When bit numbers b55, b54 contain "00", this means the audio data quantized in 16 bits; when
5 bit numbers b55, b54 contain "01", this means the audio data quantized in 20 bits; when bit numbers b55, b54 contain "10", this means the audio data quantized in 24 bits; and when bit numbers b55, b54 contain "11", this means that the quantization is not specified.
10 Here, when the audio coding mode is set to linear PCM ("100" in bit numbers b63, b62, b61), no specification of quantization ("11" in bit numbers b55, b54) is written. The audio data sampling frequency F_s is written in bit numbers b53 and b52. When the sampling
15 frequency F_s is 48 kHz, "00" is written in these bit numbers; when the sampling frequency F_s is 96 kHz, "01" is written in these bit numbers; and the other numbers are for reservation.

The number of audio channels is written in bit
20 numbers b50 to b48. When bit numbers b50 to b48 contain "000", this means a single channel (monaural); when bit numbers b50 to b48 contain "001", this means two channels (stereo); when bit numbers b50 to b48 contain "010", this means three channels; when bit
25 numbers b50 to b48 contain "011", this means four channels; when bit numbers b50 to b48 contain "100", this means five channels; when bit numbers b50 to b48

contain "101", this means six channels; when bit numbers b50 to b48 contain "110", this means seven channels; and when bit numbers b50 to b48 contain "111", this means eight channels.

5 In the sub-picture stream attribute
(VMGM_SPST_ATR) of the video manager menu (VMGM) in the
table of FIG. 7, bit number b47 to bit number b40 are
allocated to the sub-picture mode, sub-picture display
type, and sub-picture type as shown in FIG. 12. When
10 "000" is written in bit numbers b47, b46, b45 as the
description of sub-picture coding mode, this means that
the sup-picture data has been run-length compressed
according to the 2 bits/pixel type standard; when "001"
is written in bit numbers b47, b46, b45 as the
15 description of sub-picture coding mode, this means that
the sup-picture data has been run-length compressed
according to other standards; and the other numbers are
for reservation.

 The sub-picture display type (VMGM_SPST_ATR) is
20 written in bit numbers b44, b43, b42. If the aspect
ratio is 3/4 ("00" in bit numbers b11 and b10) which is
described in the VMGM_V_ATR and "000" is written in bit
numbers b44, b43, b42 which is described in
VMGM_SPST_ATR, this means that this attrition
25 information (VMGM_SPST_ATR) is not utilized. If the
aspect ration is 9/16 ("11" in bit numbers b11 and b10)
which is described in the VMGM_V_ATR and "001" is

written in bit numbers b44, b43, b42 which is described
in VMGM_SPST_ATR, this means that this sub-picture
stream is permitted to be displayed at only a wide type
representation. If the aspect ratio is 9/16 ("11" in
5 bit numbers b11 and b10) which is described in the
VMGM_V_ATR and "010" is written in bit numbers b44,
b43, b42 which is described in VMGM_SPST_ATR, this
means that this sub-picture stream is permitted to be
displayed properly at only a letter box type
10 representation. If the aspect ratio is 9/16 ("11" in
bit numbers b11 and b10) which is described in the
VMGM_V_ATR and "011" is written in bit numbers b44,
b43, b42 which is described in VMGM_SPST_ATR, this
means that this sub-picture stream is permitted to be
15 displayed properly at both of the wide type and letter
box type representations. If the aspect ratio is 9/16
("11" in bit numbers b11 and b10) which is described in
the VMGM_V_ATR and "100" is written in bit numbers b44,
b43, b42 which is described in VMGM_SPST_ATR, this
20 means that this sub-picture stream is permitted to be
displayed properly at only a pan scan type
representations. If the aspect ratio is 9/16 ("11" in
bit numbers b11 and b10) which is described in the
VMGM_V_ATR and "110" is written in bit numbers b44,
25 b43, b42 which is described in VMGM_SPST_ATR, this
means that this sub-picture stream is permitted to be
displayed properly at both of the pan scan type and

letter box type representations. If the aspect ratio is 9/16 ("11" in bit numbers b11 and b10) which is described in the VMGM_V_ATR and "111" is written in bit numbers b44, b43, b42 which is described in VMGM_SPST_ATR, this means that this sub-picture stream is permitted to be displayed properly at one of the pan scan type, wide type and letter box type representations. Furthermore, the sub-picture type is written in bit numbers b41, b40. When bit numbers b41, b40 contains "00", this means that the display type is not specified. The other numbers are for reservation.

Explanation of the structure shown in FIG. 5 will be resumed. In the title search pointer table (TT_SRPT) 79 of FIG. 5, as shown in FIG. 13, the title search pointer table information (TSPTI) is first written and then as many title search pointers (TT_SRP) for input numbers 1 to n ($n \leq 99$) as are needed are written consecutively. When only the playback data for a single title, for example, only the video data for a single title, is stored in a volume of the optical disk, only a single title search pointer (TT_SRP) 93 is written in the table (TT_SRPT) 79.

The title search pointer table information (TSPTI) 92 contains the number of entry program chains (EN_PGC_Ns) and the end address (TT_SRPT_EA) of the title search pointer (TT-SRP) 93 as shown in FIG. 14. The address (TT_SRPT_EA) is represented by the number

of bytes, relative to the first byte in the title
search pointer table (TT_SRPT) 79. Furthermore, as
shown in FIG. 15, each title search pointer (TT_SRP)
contains the video title set number (VTSN), the program
chain number (PGCN), and the start address (VTS_SA) of
5 the video title set 72.

The contents of the title search pointer (TT_SRP)
93 specifies a video title set to be reproduced and a
program chain (PGC) as well as a location in which the
10 video title set 72 is to be stored. The start address
(VTS_SA) of the video title set 72 is represented by
the number of logical blocks in connection with the
title set specified by the video title set number
(VTSN).

15 Here, a program chain 87 is defined as a set of
programs 89 that reproduce the story of a title. In
the case of a program chain for a menu, still picture
programs or moving picture programs are reproduced one
after another to complete a menu for a single title.
20 In the case of a program chain for a title set, a
program chain corresponds to a chapter in a story
consisting of programs and the movie of a single
title is completed by reproducing program chains
consecutively. As shown in FIG. 16, each program 89
25 is defined as a set of aforementioned cells 84 arranged
in the order in which they are to be reproduced.

As shown in FIG. 5, the video title set attribute

table (VTS_ATRT) 80 describing the attribute information
on the video title set (VTS) 72 contains video title
set attribute table information (VTS_ATRTI) 66, n video
title set attribute search pointers (VTS_ATR_SRP) 67,
5 and n video title set attributes (VTS_ATR) 68, which
are arranged in that order. The video title set
attribute table information (VTS_ATRTI) 66 contains
information on the table 80. In the video title set
attribute search pointers (VTS_ATR_SRP) 67, description
10 is made in the order corresponding to the title sets #1
to #n and similarly description is made of the pointers
for searching for the video title set attributes
(VTS_ATR) 68 written in the order corresponding to the
title sets #1 to #n. In each of the video title set
15 attributes (VTS_ATR) 68, the attribute of the
corresponding title set (VTS) is written.

More specifically, the video title set attribute
information (VTS_ATRTI) 66 contains a parameter
(VTS_Ns) for the number of video titles and a parameter
20 (VTS_ATRT_EA) for the end address of the video title
set attribute table (VTS_ART) 80 as shown in FIG. 18.
As shown in FIG. 19, in each video title set attribute
search pointer (VTS_ATR_SRP) 67, a parameter
(VTS_ATR_SA) for the start address of the corresponding
25 video title set attribute (VTS_ATR) 68 is written. As
shown in FIG. 20, the video title set attribute
(VTS_ATR) 68 contains a parameter (VTS_ATR_EA) for the

end address of the video title set attribute (VTS_ATR)
68, a parameter (VTS_CAT) for the category of the
corresponding video title set, and a parameter
(VTS_ATRI) for attribute information on the corre-
5 sponding video title set. Because the attribute
information on the video title set contains the same
contents of the attribute information on the video
title set written in the video title set information
management table (VTS_MAT), which will be explained
10 later with reference to FIGS. 21 and 22, explanation of
it will be omitted.

Now, the structure of the logic format of the
video title set (VTS) 72 shown in FIG. 4 will be
explained with reference to FIG. 21. In each video
15 title set (VTS) 72, four items 94, 95, 96, 97 are
written in the order shown in FIG. 21. Each video
title set (VTS) 72 is made up of one or more video
titles having common attributes. The video title set
information (VTSI) contains the management information
20 on the video titles 72, including information on
playback of the video object set 96, information on
playback of the title set menu (VTSM), and attribute
information on the video object sets 72.

Each video title set (VTS) 72 includes the backup
25 97 of the video title set information (VTSI) 94.
Between the video title set information (VTSI) 94 and
the backup (VTSI_BUP) of the information, a video

object set (VTSM_VOBS) 95 for video title set menus and
a video object set (VTSTT_VOBS) 96 for video title set
titles are arranged. Both of the video object sets
(VTSM_VOBS and VTSTT_VOBS) have the structure shown in
5 FIG. 6, as explained earlier.

The video title set information (VTSI) 94, the
backup (VTSI_BUP) 97 of the information, and the video
object set (VTSTT_VOBS) 96 for video title set titles
are items indispensable to the video title sets 72.
10 The video object set (VTSM_VOBS) 95 for video title set
menus is an option provided as the need arises.

The video title set information (VTSI) 94 consists
of seven tables 98, 99, 100, 101, 111, 112, 113 as
shown in FIG. 21. These seven tables 98, 99, 100, 101,
15 111, 112, 113 are forced to align with the boundaries
between logical sectors. The video title set
information management table (VTSM_MAT) 98, a first
table, is a mandatory table, in which the size of the
video title set (VTS) 72, the start address of each
20 piece of information in the video title set (VTS) 72,
and the attributes of the video object sets (VOBS) 82
in the video title set (VTS) 72 are written.

The video title set part-of-title search pointer
table (VTS_PTT_srpt), a second table, is mandatory
25 table, in which part of the selectable video titles,
that is, program chain (PGC) or programs (PG) contained
in the selectable video title set 72, are written

according to the number that the user has entered from the key/display section 4. Entering the desired one of the entry numbers listed in the pamphlet coming with the optical disk 10 from the key/display section 4, the user can watch the video, starting with the section in the story corresponding to the entered number.

The video title set program chain information table (VTS_PGCIT) 100, a third table, is a mandatory table, in which the VTS program chain information (VTS_PGCI), or information on VTS program chains, is written.

The video title set menu PGCI unit table (VTSM_PGCI_UT) 111, a fourth table, is a mandatory item, when the video object set (VTSM_VOBS) 95 for video title set menus is provided. In the table, information on program chains for reproducing the video title set menu (VTSM) provided for each language is written. By referring to the video title set menu PGCI unit table (VTSM_PGCI_UT) 111, a program chain for the specified language in the video object set (VTSM_VOBS) 95 can be acquired and reproduced as a menu.

The video title set time search map table (VTS_MAPT) 101, a fifth table, is an optional table provided as the need arises, in which information on the recording location of the video data in each program chain (PGC) in the title set 72 to which the map table (VTS_MAPT) belongs is written for a specific

period of time of display.

5 The video title set cell address table (VTS_C_ADT) 112, a sixth table, is a mandatory item, in which the address of each cell 84 constituting all the video objects 83 or the address of each cell piece constituting cells are written in the order in which the identification numbers of the video objects are arranged. Here, a cell piece is a piece constituting a cell. Cells undergo an interleaving process in cell
10 pieces and are arranged in a video object 83.

15 The video object title set video object unit address map (VTS_VOBU_ADMAP) 113, a seventh table, is a mandatory item, in which the start addresses of all the video object units 85 in the video title set are written in the order of arrangement.

Next, the video title information manager table (VTSI_MAT) 98 and video title set program chain information table (VTS_PGCIT) 100 shown in FIG. 21 will be described with reference to FIGS. 22 to 34.

20 FIG. 22 shows the contents of the video title information manager table (VTSI_MAT) 98, in which the video title set identifier (VTS_ID), the size (VTS_SZ) of the video title set 72, the version number (VERN) of the DVD video specification, the category (VTS_CAT) of
25 the video title set 72, and the end address (VTSI_MAT_EA) of the video title information manager table (VTSI_MAT) 98 are written in that order.

Furthermore, in the table (VTSM_VOBS) 98, the start address (VTSM_VOBS_SA) of the video object set (VTSM_VOBS) 95 for the VTS menu (VTSM) and the start address (VTSTT_VOB_SA) of the video object for the title in the video title set (VTS) are written. If the video object set (VTSM_VOBS) 95 for the VTS menu (VTSM) is absent, "00000000h" will be written in the start address (VTSM_VOBS_SA). The end address (VTSM_MAT_EA) of VTSM_MAT is expressed by the number of logical bytes, relative to the first byte in the video title set information management table (VTSM_MAT) 94. The start address (VTSTM_VOB_SA) of VTSM_VOBS and the start address (VTSTT_VOB_SA) of VTSTT_VOB are expressed by the number of logical blocks (RLBN) relative to the first logical block in the video title set (VTS) 72.

Furthermore, in the table (VTSM_MAT) 98, the start address (VTS_PTT_SRPT_SA) of the video title set information part-of-title search pointer table (VTS_PTT_SRPT) 99 is represented by the number of blocks, relative to the first logical blocks in the video title set information (VTSI) 94. Furthermore, in the table (VTSM_MAT) 98, the start address (VTS_PGCIT_SA) of the video title set program chain information table (VTS_PGCIT) 100 and the start address (VTS_PGCI_UT_SA) of the PGCI unit table (VTS_PGCI_UT) 111 of video title set menus represented by the number of blocks, relative to the first logical blocks in the

video title set information (VTSI) 94, and the start address (VTS_MAPT_SA) of the time search map table (VTS_MAPT) 101 in the video title set (VTS) is represented by sectors, relative to the first logical sector in the video title set (VTS) 72. Similarly, the VTS address table (VTS_C_ADT) 112 and the address map (VTS_VOBU_ADMAP) 113 for VTS_VOBU are written in logical sectors, relative to the first logical sector in the video title set (VTS) 72.

Written in the table (VTSI_MAT) 98 are the video attribute (VTSM_V_ATR) of the video object set (VTSM_VOBS) 95 for the video title set menu (VTSM) in the video title set (VTS) 72, the number of audio streams (VTSM_AST_Ns), the attributes (VTSM_AST_ATR) of the audio streams, the number of sub-picture streams (VTSM_SPST_Ns), and the attributes (VTSM_SPST_ATR) of the sub-picture streams. Similarly, further written in the table (VTSI_MAT) 98 are the video attribute (VTS_V_ATR) of the video object set (VTSTT_VOBS) 96 for the video title set (VTSTT) for the video title set (VTS) in the video title set (VTS) 72, the number of audio streams (VTS_AST_Ns), the attributes (VTS_AST_ATR) of the audio streams, the number of sub-picture streams (VTS_SPST_Ns), and the attributes (VTS_SPST_ATR) of the sub-picture streams.

Additionally, the attribute (VTS_MU_AST_ATR) of the multi-channel audio stream in the video title set (VTS)

is written in the table (VTST_MAT) 98.

The video attribute, audio stream attribute, and sub-picture stream attribute written in FIG. 22 will be described in detail. In the video attribute (VTSM_V_ATTR) of the video object set (VTSM_VOBS) 95 for VTSM and the video attribute (VTS_V_ATTR) of the video object set (VTST_VOBS) 96 for the video title set title (VTSTT), the same attribute information as the video attribute (VMGM_V_ATTR) of the video object (VMGN_VOBS) for the video manager menu already explained with reference to FIGS. 8, 9, 10A, and 10B is written. Specifically, in each of the video attributes (VTSM_V_ATTR) and (VTS_V_ATTR), as shown in FIG. 8, bit number b8 to bit number b15 are allocated to the compression mode, frame rate, display aspect ratio, and display mode, which are the video attributes of the video object set 76 for the video manager menu (VMGM), and bit number b0 to bit number b7 are left empty for reservation for later use. When "00" is written in bit numbers b15, b14, this means the menu video data has been compressed in the video compression mode on the basis of the MPEG-1 standard; and when "01" is written in bit numbers b15, b14, this means the menu video data has been compressed in the video compression mode on the basis of the MPEG-2 standard. The other numbers are for reservation for later use. When "00" is written in bit numbers b13, b12, this means that

the menu video data has a frame rate of 29.27/S at which 29.27 frames are reproduced every second.

Specifically, when "00" is written in bit numbers b13, b12, this means that the menu video data is TV-system video data according to the NTSC scheme and has a frame rate at which a single frame is drawn at a horizontal frequency of 60 Hz using 525 scanning lines. When "01" is written in bit numbers b13, b12, this means that the menu video data has a frame rate of 25/S at which 25 frames are reproduced every second. Specifically, this means that the menu video data is TV-system video data according to the PAL scheme and has a frame rate at which a single frame is drawn at a frequency of 50 Hz using 625 scanning lines. The other numerals in bit numbers b13, b15 are for reservation for later use.

Furthermore, when "00" is written in bit numbers b11, b10, this means that the menu video data has a display aspect ratio (ratio of height to width) of 3/4; and when "11" is written in bit numbers b11, b10, this means that the menu video data has a display aspect ratio (ratio of height to width) of 9/16. The other numbers are for reservation for later use.

Furthermore, when the display aspect ratio is 3/4, that is, when "00" is written in bit numbers b11, b10, "11" is written in bit numbers b9, b8. When the display aspect ratio is 9/16, that is, when "11" is written in bit numbers b11, b10, whether the displaying

of the menu video data in pan scan and/or letter box is permitted is written. Specifically, when "00" is written in bit numbers b9, b8, this means that the displaying in either of pan scan and letter box is permitted; when "01" is written in bit numbers b9, b8, this means that the displaying in pan scan is permitted, but the displaying in letter box is inhibited; and when "10" is written in bit numbers b9, b8, this means that the displaying in pan scan is inhibited, but the displaying in letter box is permitted. When "11" is written in bit numbers b9, b8, this means that the displaying is not particularly specified. The relationship between the video data recorded on the aforesaid optical disk and the reproduced screen image on the TV monitor 6 is the same as that explained with reference to FIGS. 9, 10A, and 10B, and its explanation will be omitted.

Furthermore, in the audio stream attribute (VTSM_AST_ATR) of the video object set (VTSM_VOBS) 95 for VTSM and the audio stream attribute (VTS_AST_ATR) of the video object set (VTST_VOBS) 96 for the video title set title (VTSTT), almost the same attribute information as the audio stream attribute (VMGM_AST_ATR) of the video object (VMGM_VOBS) for the video manager menu already explained with reference to FIG. 11 is written. Specifically, in the attribute (VTSM_AST_ATR) of the audio stream in the VTS menu

video object set (VTSM_VOBS) 95, as shown in FIG. 23, bit number b63 to bit number b48 are allocated to the audio coding mode, audio type, audio application ID sampling frequency, and the number of audio channels and bit number b47 to bit number b0 are left empty
5 for reservation for later use. In the attribute (VTS_AST_ATR) for the audio stream for the video title set title (VTST), as shown in FIG. 23, bit number b63 to bit number b48 are allocated to the audio coding
10 mode, expansion of multi-channel, audio type, audio application ID, quantization, sampling frequency, reservation, and the number of audio channels and bit number b47 to bit number b40; bit number b39 to bit number b32 are allocated to specific codes; bit number
15 b31 to bit number b24 are for reservation for specific codes; bit number b23 to bit number b8 are left empty for reservation for later use; and bit number b8 to b0 are allocated to application information. Here, if the VTS menu video object set (VTSM_VOBS) 95 is absent, or
20 if an audio stream is absent in the video object set, "0" will be written in each bit, starting at bit number b63 down to bit number b0.

In both of the attributes (VTSM_AST_ATR, VTS_AST_ATR) of the audio streams for VTSM and VTST,
25 bit numbers b63, b62, b61 are allocated to the audio coding mode. When "000" is written for the audio coding mode, this means that the audio data has been

coded according to Dolby AC-3 (a trademark of Dolby Laboratories Licensing Corporation). When "010" is written for the audio coding mode, this means that the audio data is compressed without any expanded bit stream under MPEG-1 or MPEG-2. When "011" is written for the audio coding mode, this means that the audio data is compressed with an expanded bit stream under MPEG-2. When "100" is written for the audio coding mode, this means that the audio data is coded by linear PCM. For the audio data, the other numbers are for reservation for later use. At a frame rate ("00" is written in bit numbers b13, b12 in VTSM_V_ATR and VTS_V_ATR) at which a single frame is drawn at a horizontal frequency of 60 Hz using 525 scanning lines, in the video data attribute, Dolby AC-3 ("000" in bit numbers b63, b62, b61) or linear PCM ("100" in bit numbers b63, b62, b61) is to be set. At a frame rate ("01" is written in bit numbers b13, b12 in VTSM_V_ATR and VTS_V_ATR) at which a single frame is drawn at a horizontal frequency of 50 Hz using 625 scanning lines, in the video data attribute, MPEG-1 or MPEG-2 ("010" or "011" in bit numbers b63, b62, b61) or linear PCM ("100" in bit numbers b63, b62, b61) is to be set. In the audio coding mode of the VTST audio stream attribute (VTS_AST_ATR), expansion of multi-channel is written in bit number b60. When bit number b60 contains "0", this means that the multi-channel audio

stream attribute (VTS_MU_AST_ATR) of VTS related to
audio streams is invalid. When bit number b60 contains
"1", this means linking to the multi-channel audio
stream attribute (VTS_MU_AST_ATR) of VTS related to
audio streams.

5 The audio type is written in bit numbers b59 and
b58. When the audio type is not specified, "00" will
be written in these bit numbers. When a language, or
speech, is specified, "01" will be written in these bit
10 numbers. The other numbers are for reservation. The
ID of an audio application field is written in bit
numbers b57 and b56. When the ID is not specified,
"00" will be written in these bit numbers; when karaoke
is specified, "01" is written in these bit numbers;
15 when surround is specified, "10" is written in these
bit numbers; and the other numbers are for reservation.
The quantization of audio data is written in bit
numbers b55 and b54. When bit numbers b55, b54 contain
"00", this means the audio data quantized in 16 bits;
20 when bit numbers b55, b54 contain "01", this means the
audio data quantized in 20 bits; when bit numbers b55,
b54 contain "10", this means the audio data quantized
in 24 bits; and when bit numbers b55, b54 contain "11",
this means that the quantization is not specified.
25 Here, when the audio coding mode is set to linear PCM
("100" in bit numbers b63, b62, b61), no specification
of quantization ("11" in bit numbers b55, b54) is

written. The audio data sampling frequency F_s is written in bit numbers b53 and b52. When the sampling frequency F_s is 48 kHz, "00" is written in these bit numbers; when the sampling frequency F_s is 96 kHz, "01" is written in these bit numbers; and the other numbers are for reservation.

The number of audio channels is written in bit numbers b50 to b48. When bit numbers b50 to b48 contain "000", this means a single channel (monaural); when bit numbers b50 to b48 contain "001", this means two channels (stereo); when bit numbers b50 to b48 contain "010", this means three channels; when bit numbers b50 to b48 contain "011", this means four channels; when bit numbers b50 to b48 contain "100", this means five channels; when bit numbers b50 to b48 contain "101", this means six channels; when bit numbers b50 to b48 contain "110", this means seven channels; and when bit numbers b50 to b48 contain "111", this means eight channels. Here, three or more channels are determined to be multi-channel. Specific codes are to be written in b47 to b40 and b39 to b32. When the type of audio stream is language, or speech, the code for the language determined in ISO-639 is written in these bit locations in the form of a language symbol. When the type of audio stream is not language or speech, the locations are for reservation.

The number (VTS_AST_Ns) of VTS audio streams is set in the range of 0 to 8. Thus, eight VTS audio stream attributes (VTS_AST_ATR) are prepared in accordance with the number of streams that can be set. Specifically, areas for the VTS audio stream attributes (VTS_AST_Ns) of VTS audio stream #0 to VTS audio stream #7 are provided. When the number of VTS audio streams is less than 8 and some attributes have no corresponding audio streams, the VTS audio stream attributes (VTS_AST_Ns) corresponding to the absent audio streams shown in FIG. 22 have "0" in all bits.

Furthermore, in the sub-picture stream attribute (VTSM_SPST_ATR) of the video object set (VTSM_VOBS) 95 for VTSM and the sub-picture stream attribute (VTS_SPST_ATR) of the video object set (VTSTT_VOBS) 96 for the video title set title (VTSTT), the same attribute information as the sub-picture stream attribute (VMGM_SPST_ATR) of the video manager menu video object (VMGM_VOBS) already explained referring to FIG. 11 is written. Specifically, in the sub-picture stream attribute (VTSM_SPST_ATR) of the video object set (VTSM_VOBS) 95 for VTSM, bit number b47 to bit number b40 are allocated to the sub-picture coding mode, sub-picture display type, and sub-picture type as shown in FIG. 12 and bit number b39 to bit number b0 are for reservation. In the sub-picture stream attribute (VTS_SPST_ATR) of the video object set

(VTS_VOBS) 96 for VTSTT, as shown in FIG. 12, bit number b47 to bit number b40 are allocated to the sub-picture coding mode, sub-picture display type, and sub-picture type; bit number b39 to bit number b32 and bit number 31 to bit number b24 are allocated to specific codes; bit number b23 to bit number b16 are for reservation for specific codes; bit number b15 to bit number b8 are allocated to expansion of specific codes; and bit number b7 to bit number b0 are for reservation.

When "000" is written in bit numbers b47, b46, b45 as the description of sub-picture coding mode, this means that the sup-picture data has been run-length compressed according to the 2 bits/pixel type standard; when "001" is written in bit numbers b47, b46, b45 as the description of sub-picture coding mode, this means that the sup-picture data has been run-length compressed according to other standards; and the other numbers are for reservation. A symbol for a Row coding scheme meaning uncompressed sub-picture data may be written for reservation.

The sub-picture display type (VTSM_SPST_ATR, VTS_SPST_ATR) is written in bit numbers b44, b43, b42. If the aspect ratio is 3/4 ("00" in bit numbers b11 and b10) which is described in the VTSM_V_ATR or VTS_V_ATR and "000" is written in bit numbers b44, b43, b42 which is described in VTSM_SPST_ATR, VTS_SPST_ATR, this means that this attrition information (VTSM_SPST_ATR,

VTSM_SPST_ATR) is not utilized. If the aspect ratio is 9/16 ("11" in bit numbers b11 and b10) which is described in the VTSM_V_ATR or VTS_V_ATR and "001" is written in bit numbers b44, b43, b42 which is described in VTSM_SPST_ATR, VTS_SPST_ATR, this means that this sub-picture stream is permitted to be displayed at only a wide type representation. If the aspect ratio is 9/16 ("11" in bit numbers b11 and b10) which is described in the VTSM_V_ATR or VTS_V_ATR and "010" is written in bit numbers b44, b43, b42 which is described in VTSM_SPST_ATR, VTS_SPST_ATR, this means that this sub-picture stream is permitted to be displayed properly at only a letter box type representation. If the aspect ratio is 9/16 ("11" in bit numbers b11 and b10) which is describe din the VTSM_V_ATR or VTSM_V_ATR and "011" is written in bit numbers b44, b43, b42 which is described in VTSM_SPST_ATR, VTS_SPST_ATR, this means that this sub-picture stream in permitted to be displayed properly at both of the wide type and letter box type representations. If the aspect ratio is 9/16 ("11" in bit numbers b11 and b10) which is described in the VTSM_V_ATR or VTS_V_ATR and "100" is written in bit numbers b44, b43, b42 which is described in VTSM_SPST_ATR, VTS_SPST_ATR, this means that this sub-picture stream is permitted to be displayed properly at only a pan scan type representations. If the aspect ratio is 9/16 ("11" in

bit numbers b11 and b10) which is described in the
VTSM_V_ATR or VTS_V_ATR and "110" is written in bit
numbers b44, b43, b42 which is described in
VTSM_SPST_ATR, VTS_SPST_ATR, this means that this sub-
5 picture stream is permitted to be displayed properly at
both of the pan scan type and letter box type
representations. If the aspect ratio is 9/16 ("11" in
bit numbers b11 and b10) which is described in the
VTSM_V_ATR or VTS_V_ATR and "111" is written in bit
10 numbers b44, b43, b42 which is described in
VTSM_SPST_ATR, VTS_SPST_ATR, this means that this sub-
picture stream is permitted to be displayed properly at
one of the pan scan type, wide type and letter box type
representations. Furthermore, the sub-picture type is
15 written in bit numbers b41, b40. When bit numbers b41,
b40 contain "00", this means that the display type is
not specified; when bit numbers b41, b40 contain "01",
this means language, or subtitles; and the other
numbers in bit numbers b41, b40 are for reservation.
20 An example of reservation is a pattern.

Specific codes are to be written in b39 to b32 and
b31 to b24. When the type of sub-picture stream is
language, or subtitles, the code for the language
determined in ISO-639 is written in these bit locations
25 in the form of a language symbol. When the type of
sub-picture stream is not language, the locations are
for reservation. In addition, in expansion of specific

codes in bit number b15 to bit number b8, the type of characters for subtitles is written. When bit number b15 to bit number b8 contain "00h", this means that the sub-picture stream has no normal characters or no normal category; when bit number b15 to bit number b8 contain "01h", this means large characters; and the other numbers are for system reservation or are determined by the video supplier.

The number (VTSM_SPST_Ns) of sub-pictures for the VTS menu is basically one, but can be set in the range of 0 to 3. In this case, the attributes (VTSM_SPST_ATR) of the sub-picture for the VTS menu are written in ascending order, starting at sub-picture stream number #0 to stream number #31, each having the description as shown in FIG. 12. When the number of sub-picture streams (VTS_SPST_Ns) is less than 32 and some attributes have no corresponding audio streams, the VTS sub-picture attributes (VTS_AST_Ns) corresponding to the absent VTS sub-picture streams have "0" in all bits.

In the attribute (VTS_MU_AST_ATR) of the multi-channel audio stream of the video title set (VTS), the attributes of multi-channel audio stream #0 to multi-channel audio stream #7 are written. In each multi-channel audio stream attribute (VTS_MU_AST_ATR), the contents (e.g., karaoke or surround) of the audio channel, an audio mixing scheme, etc. are written.

The VTS program chain information table (VTS_PGCIT) 100 of FIG. 21 has a structure as shown in FIG. 24. In the information table (VTS_PGCIT) 100, information on the VTS program chains (VTS_PGC) is written, the first item of which is information (VTS_PGCIT_I) 102 on the information table (VTS_PGCIT) 100 of VTS program chains (VTS_PGC). In the information table (VTS_PGCIT) 100, the information (VTS_PGCIT_I) 102 is followed by as many VTS_PGCI search pointers (VTS_PGCIT_SRP) used to search for VTS program chains (VTS_PGC) as the number (from #1 to #n) of VTS program chains in the information table (VTS_PGCIT) 100. At the end of the table, there are provided as many pieces of information (VTS_PGCI) 104 on the respective VTS program chains (VTS_PGC) as the number (from #1 to #n) of VTS program chains (VTS_PGC).

The information (VTS_PGCIT_I) 102 in the VTS program chain information table (VTS_PGCIT), as shown in FIG. 25, contains the number (VTS_PGC_Ns) of VTS program chains (VTS_PGC) and the end address (VTS_PGCIT_EA) of the table information (VTS_PGCIT_I) expressed by the number of bytes, relative to the first byte of the information table (VTS_PGCIT) 100.

Furthermore, as shown in FIG. 26, the VTS_PGCIT search pointer (VTS_PGCIT_SRP) 103 contains the attributes (VTS_PGC_CAT) 72 of the program chains (VTS_PGC) in the video title set (VTS) and the start

address (VTS_PGCIT_SA) of the VTS_PGC information
(VTS_PGCIT) expressed by the number of bytes, relative
to the first byte of the VTS_PGC information table
(VTS_PGCIT) 100. Here, the VTS_PGC attribute
5 (VTS_PGC_CAT) contains, for example, an attribute
indicating whether an entry program chain (Entry PGC)
is the first one to be reproduced. Usually, an entry
program chain (PGC) is written before program chains
(PGC) that are not entry program chains (PGC).

10 The PGC information (VTS_PGCIT) 104 in the video
title set contains four items as shown in FIG. 27. In
the PGC information (VTS_PGCIT) 104, program chain
general information (PGC_GI) 105, a mandatory item, is
first arranged, followed by at least three items that
15 are made mandatory only when there is an video object.
Specifically, contained as the three items in the PGC
information (VTS_PGCIT) 104 are a program chain program
map (PGC_PGMAP) 106, a cell playback information table
(C_PBIT) 107, and a cell position information table
20 (C_POSIT) 108.

As shown in FIG. 28, the program chain general
information (PGC_GI) 105 contains the category
(PGCI_CAT) of program chains, the contents (PGC_CNT)
of program chains (PGC), and the playback time
25 (PGC_PB_TIME) of program chains (PGC). Written in the
category (PGCI_CAT) of PGC are whether the PGC can be
copied or not and whether the programs in the PGC are

played back continuously or at random. The contents
(PGC_CNT) of PGC contain the description of the program
chain structure, that is, the number of programs, the
number of cells, etc. The playback time (PGC_PB_TIME)
5 of PGC contains the total playback time of the programs
in the PGC. The playback time is the time required to
continuously play back the programs in the PGC,
regardless of the playback procedure.

Furthermore, the program chain general information
10 (PGC_GI) 105 contains PGC sub-picture stream control
(PGC_SPST_CTL), PGC audio stream control (PGC_AST_CTL),
and PGC sub-picture pallet (PGC_SP_PLT). The PGC sub-
picture stream control (PGC_SPST_CTL) contains the
number of sub-pictures usable in the PGC. The PGC
15 audio stream control (PGC_AST_CTL) likewise contains
the number of audio streams usable in the PGC. The PGC
sub-picture pallet (PGC_SP_PLT) contains a set of a
specific number of color pallets used in all of the
sub-picture streams in the PGC.

20 Furthermore, the PGC general information (PGC_GI)
contains the start address (PGC_PGMAP_SA_SA) of the PGC
program map (PGC_PGMAP_SA), the start address
(C_PBIT_SA) of the cell playback information table
(C_PBIT) 107 and the start address (C_POSIT_SA) of the
25 cell position information table (C_POSIT) 108. Both of
the start addresses (C_PBIT_SA and C_POSIT_SA) are
represented by the number of bytes, relative to the

first byte in the VTS_PGC information (VTS_PGCI).

The program chain program map (PGC_PGMAP) 106 is a map showing the arrangement of the programs in the PGC of FIG. 29. In the map (PGC_PGMAP) 106, the entry cell numbers (ECELLN), the start cell numbers of the individual programs, are written in ascending order as shown in FIGS. 29 and 30. In addition, program numbers are allocated, starting at 1, in the order in which the entry cell numbers are written. Consequently, the first entry number in the map (PGC_PGMAP) 106 must be #1.

The cell playback information table (C_PBIT) 107 defines the order in which the cells in the PGC are played back. In the cell playback information table (C_PBIT) 107, pieces of the cell playback information (C_PBIT) are written consecutively as shown in FIG. 31. Basically, cells are played back in the order of cell number. The cell playback information (C_PBIT) contains a cell category (C_CAT) as playback information (P_PBI) as shown in FIG. 32. Written in the cell category (C_CAT) are a cell block mode indicating whether the cell is one in the block and if it is, whether the cell is the first one, a cell block type indicating whether the cell is not part of the block or is one in an angle block, and an STC discontinuity flag indicating whether the system time clock (STC) must be set again. Here, a cell block is defined as a set of

cells with a specific angle. The change of the angle is realized by changing the cell block. Taking baseball as example, the changing from an angle block of shooting scenes from the infield to an angle block of shooting scenes from the outfield corresponds to the
5 change of the angle.

Further written in the cell category (C_CAT) are a cell playback mode indicating whether the contents of the cell is played back continuously or made still at
10 one video object unit (VOBU) to another in the cell, and cell navigation control indicating whether the picture is made still after the playback of the cell or indicating the rest time.

As shown in FIG. 32, the playback information (P_PBI) of the cell playback information table (C_PBIT)
15 107 contains the cell playback time (C_PBTM) representing the total playback time of the PGC. When the PGC has an angle cell block, the playback time of the angle cell number 1 represents the playback time of the angle block, Further written in the cell playback
20 information table (C_PBIT) 107 are the start address (C_FVOBU_SA) of the first video object unit (VOBU) 85 in the cell expressed by the number of logical sectors, relative to the first logical sector in the video
25 object unit (VOBU) 85 in which the cell is recorded and the start address (C_LVOBU_SA) of the end video object unit (VOBU) 85 in the cell expressed by the number of

logical sectors, relative to the first logical sector in the video object unit (VOBU) in which the cell is recorded.

5 The cell position information table (C_POSI) 108 specifies the identification numbers (VOB_ID) of the video objects (VOB) in the cell used in the PGC and the cell identification number (C_ID). In the cell position information table (C_POSI), pieces of cell position information (C_POSI) corresponding to the cell numbers written in the cell playback information table (C_PBIT) 107 as shown in FIG. 33 are written in the same order as in the cell playback information table (C_PBIT). The cell position information (C_POSI) contains the identification numbers (C_VOB_IDN) of the video object units (VOBS) in the cell and the cell identification number (C_IDN) as shown in FIG. 34.

20 As explained with reference to FIG. 6, a cell 84 is a set of video object units (VOBU) 85. A video object unit (VOBU) 85 is defined as a pack train starting with a navigation (NV) pack 86. Therefore, the start address (C_FVOBU_SA) of the first video object unit (VOBU) 85 in a cell 84 is the start address of the NV pack 86. As shown in FIG. 35, the NV pack consists of a pack header 110, a system header 111, and two packets of navigation data-- a presentation control information (PCI) packet 116 and a data search information (DSI) packet 117. As many bytes as shown

in FIG. 35 are allocated to the respective sections so that one pack may contain 2048 bytes corresponding to one logical sector. The NV pack is placed immediately in front of the video pack containing the first data item in the group of pictures (GOP). Even when the object unit 85 contains no video pack, an NV pack is placed at the head of the object unit containing audio packs or/and sub-picture packs. As with an object unit containing object units, even with an object unit containing no video pack, the playback time of the object unit is determined on the basis of the unit in which video is reproduced.

Here, GOP is determined in the MPEG standard and is defined as a data train constituting a plurality of screens as explained earlier. Specifically, GOP corresponds to compressed data. Expanding the compressed data enables the reproduction of a plurality of frames of image data to reproduce moving pictures. The pack header 110 and system header 111 are defined in the MPEG 2 system layer. The pack header 110 contains a pack start code, a system clock reference (SCR), and a multiplex rate. The system header 111 contains a bit rate and a stream ID. The packet header 112, 114 of each of the PCI packet 116 and DSI packet 117 contains a packet start code, a packet length, and a stream ID as determined in the MPEG2 system layer.

As shown in FIG. 36, another video, audio, or

sub-picture pack 88, 90, 91 consists of a pack header
120, packet header 121, and a packet 122 containing the
corresponding data as determined in the MPEG2 system
layer. Its pack length is determined to be 2048 bytes.
5 Each of these packs is aligned with the boundaries
between logical blocks.

The PCI data (PCI) 113 in the PCI packet 116 is
navigation data used to make a presentation, or to
change the contents of the display, in synchronization
10 with the playback of the video data in the VOB unit
(VOBU) 85. Specifically, as shown in FIG. 37, the PCI
data (PCI) 113 contains PCI general information
(PCI_GI) as information on the entire PCI and angle
information (NSMLS_ANGLI) as each piece of jump
15 destination angle information in angle change. The PCI
general information (PCI_GI) contains the address
(NV_PCK_LBN) of the NV pack (NV_PCK) 86 in which the
PCI 113 is recorded as shown in FIG. 38, the address
being expressed in the number of blocks, relative to
20 the logical sector of VOB 85 in which the PCI 113 is
recorded. The PCI general information (PCI_GI)
contains the category (VOBU_CAT) of VOB 85, the start
playback time (VOBU_S_PTM) of VOB, and the end
playback time (VOBU_EPTM) of VOB. Here, the start PTS
25 (VOBU_SPTS) of VOB 85 indicates the playback start
time (start presentation time) of the video data in the
VOB 85 containing the PCI 113. The playback start

time is the first playback start time in the VOB 85. Normally, the first picture corresponds to I picture (intra-picture) data in the MPEG standard. The end PTS (VOBU_EPTS) in the VOB 85 indicates the playback end
5 time (end presentation time) of the VOB 85 containing the PCI 113.

DSI data (DSI) 115 in the DSI packet 117 shown in FIG. 35 is navigation data used to search for the VOB unit (VOBU) 85. The DSI data (DSI) 115 contains DSI
10 general information (DSI_GI), seamless information (SML_PBI), angle information (SML_AGLI), address information (NV_PCK_ADI) on a navigation pack, and synchronizing playback information (SYNCI).

The DSI information (DSI_GI) contains information
15 about the entire DSI 115. Specifically, as shown in FIG. 40, the DSI general information (DSI_GI) contains the system clock reference (NV_PCK_SCR) for the NV pack 86. The system clock reference (NV_PCK_SCR) is stored in the system time clock (STC) built in each section of
20 FIG. 1. On the basis of the STC, video, audio, and sub-picture packs are decoded at the video, audio, and sub-picture decoders 58, 60, and 62 and the monitor 6 and the speaker 8 reproduce images and sound, respectively. The DSI general information (DSI_GI)
25 contains the start address (NV_PCK_LBN) of the NV pack (NV_PCK) 86 containing the DSI 115 expressed by the number of logical sectors (RLSN), relative to the first

logical sector in the VOB set (VOBS) 82 containing the DSI 115, and the address (VOBU_EA) of the last pack in the VOB unit (VOBU) 85 containing the DSI 115 expressed by the number of logical sectors (RLSN), relative to the first logical sector in the VOB unit (VOBU).

Furthermore, the DSI general information (DSI_GI) contains the end address (VOBU_IP_EA) of the V pack (V_PCK) 88 containing the last address of the first I picture in the VOB unit (VOBU) expressed by the number of logical sectors (RLSN), relative to the first logical sector in the VOB unit (VOBU) containing the DSI 115, and the identification number (VOBU_IP_IDN) of the VOB 83 containing the DSI 115 and the identification number (VOBU_C_IDN) of the cell in which the DSI 115 is recorded.

The navigation pack address information of DSI contains the addresses of a specified number of navigation packs. Video fast-forward etc. are effected, referring to the addresses. The synchronizing information (SYNCI) includes address information on the sub-pictures and audio data reproduced in synchronization with the playback start time of the video data in the VOB unit (VOBU) containing DSI 115. Specifically, as shown in FIG. 41, the start address (A_SYNCA) of the target audio pack (A_PCK) 91 is expressed by the number of logical sectors (RLSN), relative to the NV pack (NV_PCK) 86 in

which DSI 115 is recorded. When there are more than one audio stream (8 audio streams maximum), as many pieces of synchronizing information (SYNCI) as there are audio streams are written. Furthermore, the
5 synchronizing information (SYNCI) includes the address (SP_SYNCA) of the NV pack (NV_PCK) 86 of the VOB unit (VOBU) 85 containing the target audio pack (SP_PCK) 91, the address being expressed by the number of logical sectors (RLSN), relative to the NV pack (NV_PCK) 86 in
10 which DSI 115 is recorded. When there are more than one sub-picture stream (32 sub-picture streams maximum), as many pieces of synchronizing information (SYNCI) as there are sub-picture streams are written.

Explained next will be the circuit configuration
15 that enables the video decoder section 58, audio decoder section 60, sub-picture section 62, and D/A and reproducing section 64 to be set properly according to the above-described video data attributes (VMG_V_ATR, VTSM_V_ATR, VTS_V_ATR), audio data attributes
20 (VMGM_AST_ATR, VTSM_AST_ATR, VTS_AST_ATR), and sub-picture data attributes (VMG_SPST_ATR, VTSM_SPST_ATR, VTS_SPST_ATR).

The video decoder section 58 comprises a register 58A, a selector 58B, an MPEG1 decoder 58C, and an MPEG2
25 decoder 58D as shown in FIG. 42. In the circuit of FIG. 42, the control signal corresponding to the video data attributes (VMGM_V_ATR, VTSM_V_ATR, VTS_V_ATR)

supplied from the system CPU section 50 via the system processor section 54 is held in the register 58A, which supplies the output to the selector 58B. According to the output from the register 58A, the selector 58B selectively outputs the video data supplied from the system processor section 54 to either the MPEG1 decoder 58C or the MPEG2 decoder 58D. When the MPEG1 decoder 58C has been selected, the video data from the selector 58B is supplied to the MPEG1 decoder 58C, and the video data is decoded by the MPEG1 coding scheme. When the MPEG2 decoder 58D has been selected, the video data from the selector 58B is supplied to the MPEG2 decoder 58D, and the video data is decoded at the MPEG2 decoder 58D by the MPEG2 coding scheme. The decoder output from either the MPEG1 decoder 58C or the MPEG2 decoder 58D is supplied to a video reproducing section 201, which will be explained later, in the D/A and reproducing section 64 as the decoder output of the video decoder section 58.

The audio decoder section 60 comprises a register 60A, a selector 60B, an MPEG1 decoder 60C, an AC3 decoder 60D, and a PCM decoder 60E as shown in FIG. 43. In the circuit of FIG. 43, the control signal corresponding to the audio data attributes (VMGM_AST_ATR, VTSM_AST_ATR, VTS_AST_ATR) supplied from the system CPU section 50 via the system processor section 54 is held in the register 60A, which supplies

the output to the selector 60B. According to the output from the register 68A, the selector 60B selectively outputs the audio data supplied from the system processor section 54 to either the MPEG1 decoder 60C, the AC3 decoder 60D, or the PCM decoder 60E. When the MPEG1 decoder 60C has been selected, the audio data from the selector 60B is decoded at the MPEG1 decoder 60C by the MPEG1 coding scheme. When the AC3 decoder 60D has been selected, the audio data from the selector 60B is decoded at the AC3 decoder 60D by the AC3 coding scheme. When the PCM decoder 60E has been selected, the digital audio data from the selector 60B is decoded at the PCM decoder 60E into analog audio data. The decoder output from either the MPEG1 decoder 60C, AC3 decoder 60D or PCM decoder 60E is supplied to an audio reproducing section 202, which will be explained later, in the D/A and reproducing section 64 as the decoder output of the audio decoder section 60.

The sub-picture decoder section 62 comprises a register 62A, a selector 62B, a bit map decoder 62C, and a run-length decoder 62D as shown in FIG. 44. In the circuit of FIG. 44, the control signal corresponding to the sub-picture data attributes (VMGM_SPST_ATR, VTSM_SPST_ATR, VTS_SPST_ATR) supplied from the system CPU section 50 via the system processor section 54 is held in the register 62A, which supplies the output to the selector 62B. According to the output from the

register 62A, the selector 62B selectively outputs the sub-picture data supplied from the system processor section 54 to either the bit map decoder 62C or the run-length decoder 62D. When the bit map decoder 62C
5 has been selected, the sub-picture data from the selector 62B is decoded at the bit map decoder 62C by the bit map coding scheme. When the run-length decoder 62D has been selected, the sub-picture data from the selector 62B is decoded at the run-length decoder
10 62D, by the run-length coding scheme.

The D/A and reproducing section 64 comprises a video reproducing section 201, an audio reproducing section 202, an audio mixing section 203, and a sub-picture reproducing section 207 as shown in FIG. 1.
15 The video reproducing section 201 comprises a frame rate processing section 204, an aspect processing section 205, and a pan scan processing section 206 as shown in FIG. 45.

The frame rate processing section 204 comprises a
20 register 204A, a selector 204B, an NTSC section 204C, and a PAL section 204D. In the circuit of FIG. 45, the control signal corresponding to the video data attributes (VMGM_V_ATR, VTSM_V_ATR, VTS_V_ATR) supplied from the system CPU section 50 via the system processor
25 section 54 is held in the register 204A, which supplies the output to the selector 204B. According to the output from the register 204A, the selector 204B

selectively outputs the video data supplied from the video decoder section 58 to either the NTSC section 204C or the PAL section 204D. When the NTSC section 204C has been selected, the video data from the selector 204B is converted by the NTSC section 204C into the NTSC format. Specifically, the video data having a frame rate at which a single frame is drawn at a horizontal frequency of 60 Hz using 525 scanning lines is supplied from the NTSC section 204C. When the PAL section 204D has been selected, the video data from the selector 204B is converted by the PAL section 204D into the PAL format. Specifically, the video data having a frame rate at which a single frame is drawn at a horizontal frequency of 50 Hz using 625 scanning lines is supplied from the PAC section 204D. The output from either the NTSC section 204C or the PAL section 204D, or the output from the frame rate processing section 204, is supplied to the aspect processing section 205.

The aspect processing section 205 comprises a register 205A, a selector 205B, a $3/4$ aspect processing section 205C, and a $9/16$ aspect processing section 205D. The control signal corresponding to the video data attributes (VMGM_V_ATR, VTSM_V_ATR, VTS_V_ATR) supplied from the system CPU section 50 via the system processor section 54 is held in the register 205A, which supplies the output to the selector 205B.

According to the output from the register 204A, the selector 205B selectively outputs the video data supplied from the frame rate processing section 204 to either the 3/4 aspect processing section 205C or the
5 9/16 aspect processing section 205D. When the 3/4 aspect processing section 205C has been selected, the video data from the frame rate processing section 204 is converted by the 3/4 aspect processing section 205C into video data having an aspect ratio of 3/4. When
10 the 9/16 aspect processing section 205D has been selected, the video data from the frame rate processing section 204 is converted by the 9/16 aspect processing section 205D into video data having an aspect ratio of 9/16. The output from either the 3/4 aspect
15 processing section 205C or the 9/16 aspect processing section 205D, or the output from the aspect processing section 205, is supplied to the pan scan processing section 206.

The pan scan processing section 206 comprises a
20 register 206A, a selector 206B, a pan-scan/letter-box through section 206C, and a pan-scan/letter-box processing section 206D. The control signal corresponding to the video data attributes (VMGM_V_ATR, VTSM_V_ATR, VTS_V_ATR) supplied from the system CPU
25 section 50 via the system processor section 54 is held in the register 206A, which supplies the output to the selector 206B. To display the video data having

an aspect ratio of 9/16 on the display monitor 8 of the TV system having an aspect ratio of 3/4 according to the video data attributes (VMGM_V_ATR, VTSM_V_ATR, VTS_V_ATR), the system CPU 50 judges whether pan scan or letter box is permitted, decides the display mode, and outputs the decision to the selector 206B. According to the output of the register 206A, the selector 206B selectively outputs the video data supplied from the aspect processing section 205 to either the pan-scan/letter-box through section 206C or the pan-scan/letter-box processing section 206D. When the pan-scan/letter-box through section 206C has been selected, the video data from the aspect processing section 205 is subjected to neither pan scan nor letter box processing and the normal video data is outputted. When the pan-scan/letter-box processing section 206D has been selected, the video data from the aspect processing section 205 undergoes either pan scan or letter box processing at the pan-scan/letter-box processing section 206D. The output from either the pan-scan/letter-box through section 206C or the pan-scan/letter-box processing section 206D, or the output of the pan-scan/letter-box processing section 206, is supplied to the monitor section 6 via a video signal combining circuit (not shown) that combines the sub-picture signal with the video signal. Accordingly, as explained with reference to FIG. 9, the video data

whose display mode is one of normal, pan scan, and letter box is supplied from the processing section 206.

The audio reproducing section 202 comprises a register 202A, a selector 202B, a stereo output section 202C, a monaural output section 202D, and a surround output section 202E as shown in FIG. 46. In the circuit of FIG. 46, the control signal corresponding to the audio data attributes (VMGM_AST_ATR, VTSM_AST_ATR, VTS_AST_ATR) supplied from the system CPU section 50 via the system processor section 54 is held in the register 202A, which supplies the output to the selector 202B. According to the output from the register 202A, the selector 202B selectively outputs the audio data supplied from the audio decoder section 60 to either the stereo output section 202C, the monaural output section 202D, or the surround output section 202E. When the stereo output section 202C has been selected, the audio data from the selector 202B is converted into stereo data. When the monaural output section 202D has been selected, the audio data from the selector 202B is converted into monaural data. When the surround output section 202D has been selected, the audio data from the selector 202B is converted into surround data. The output from either the stereo output section 202C, the monaural output section 202D, or the surround output section 202E, or the output of the audio reproducing section 202, is directly supplied

to the speaker 8. In case that the audio data is the multi-channel audio data, the output from the surround output section 202, the output is supplied to the speaker 8 through an audio mixing section 203.

5 The audio mixing section 203 comprises a register 203A, a register 203B, a selector 203C, a first stream processing section 203D, a second stream processing section 203E, and a mixing section 203F as shown in FIG. 47. In the circuit of FIG. 47, the control signal
10 corresponding to the audio data attributes (VMGM_AST_ATR, VTSM_AST_ATR, VTS_AST_ATR) supplied from the system CPU section 50 via the system processor section 54 is held in the registers 202A and 203B. The output of register 103A is supplied to the selector
15 203C and the output of the register 203B is supplied to the mixing section 203F. According to the output from the register 203A, the selector 203C selectively outputs the audio data supplied from the audio reproducing section 202 to either the first stream
20 processing section 203D or the second stream processing section 203E. When the first stream processing section 203D has been selected, the audio data from the selector 203C is converted by the first stream processing section 203D into the first stream data.
25 When the second stream processing section 203E has been selected, the audio data from the selector 203C is converted by the second stream processing section into

the second stream data. The output from either the first stream processing section 203D or the second stream processing section 203E is supplied to the mixing section 203F. According to the output of the register 203A, the mixing section 203F performs mixing.
5 The mixed data is supplied to the speaker 8 as the output of the audio mixing section 203.

Hereinafter, the operation of reproducing the movie data from the optical disk 10 with the logic format shown in FIGS. 4 to 14 will be explained with
10 reference to FIG. 1. In FIG. 1, the solid-line arrows indicate data buses and the broken-line arrows represent control buses.

With the optical disk apparatus of FIG. 1, when the power supply is turned on and an optical disk 10 is
15 loaded, the system CPU section 50 reads the initial operation program from the system ROM/RAM 52 and operates the disk drive section 30. Then, the disk drive section 30 starts to read the data from the lead-in area 27 and then from the volume and file structure
20 area 70 next to the lead-in area 27 determining a volume structure and a file structure in accordance with ISO-9660. Specifically, to read the data from the volume and file structure area 70 located in a specific
25 position on the optical disk 10 set in the disk drive section 30, the system CPU section 50 gives a read instruction to the disk drive section 30 to read the

contents of the volume and file structure area 70, and stores the data temporarily in the data RAM section 56 via the system processor section 54. The system CPU section 50 extracts information about the recording position and recording size of each file and management information necessary for other managing actions via the path table and directory record stored in the data RAM section 56, and transfers and stores these pieces of information in specific locations in the system ROM/RAM section 52.

Then, the system CPU section 50 acquires a video manager 71 composed of files, starting with file number 0, with reference to the information about the recording position and recording capacity of each file in the system ROM/RAM section 52. Specifically, referring to the recording position and recording capacity of each file acquired from the system ROM/RAM section 52, the system CPU section 50 gives a read instruction to the disk drive section 30, acquires the positions and sizes of a plurality of files constituting the video manager 71 existing on the root directory, reads the video manager 71, and stores it in the data RAM section 56 via the system processor section 54.

A video manager information management table (VMGI_MAT) 78, the first table in the video manager 71, is searched for. By the search, the start address

(VMGM_VOBS_SA) of the video object set (VMGM_VOBS) 76 for the video manager menu (VMGM) is obtained and the video object set (VMGM_VOBS) 76 is reproduced. Because the playback of the video object set (VMGM_VOBS) 76 for
5 menus is the same as that of the video object set (VTSM_VOBS) for titles in the video title set (VTS), its playback procedure will be omitted. When a language is set in the video object set (VMGM_VOBS) 76, or when there is no video manager menu (VMGM), the
10 video manager information management table (VMGI_MAT) is searched for and the start address (TT_SRPT_SA) of the title set search pointer table (TT_SRPT) 79 is retrieved. Here, in reproducing the video manager menu, the system CPU section 50 acquires the number of
15 video streams, audio streams, and sub-picture streams for volume menus and attribute information on each of those written in the information management table (VMGI_MAT) of the video manager (VMGI) 75, and on the basis of these pieces of attribute information, sets
20 the parameter for playback of the video manager menu in each of the video decoder section 58, audio decoder section 60, and sub-picture section 62.

By the retrieval, the title set search pointer table (TT_SRPT) 79 is transferred to a particular
25 location in the system ROM/RAM section 52 and stored there. Next, the system CPU section 50 acquires the end address of the title search pointer table (TT_SRPT)

79 from the title search pointer table information
(TSPTI) 92 and also obtains the video title set number
(VTSN) corresponding to the input number, the program
chain number (PGCN), and the start address (VTS_SA) of
5 the video title set from the title search pointer
(TT_SRP) 93 according to the input number from the
key/display section 4. When there is only one title
set, one title search pointer (TT_SRP) 93 is searched
for, regardless of whether the input number has been
10 entered from the key/display section 4, and the start
address (VTS_SA) of the title set is acquired. From
the start address (VTS_SA) of the title set, the system
CPU section 50 acquires the target title set.

Next, from the start address (VTS_SA) of the
15 video title set 72 of FIG. 15, the video title set
information (VTSI) 94 about the title set is obtained
as shown in FIG. 22. The end address (VTI_MAT_EA) of
the video title set information management table
(VTSI_MAT) 98 of FIG. 22 is acquired from the
20 management table (VTSI_MAT) 98 of the video title set
information (VTSI) 94. At the same time, each section
of the reproducing apparatus shown in FIG. 1 is set on
the basis of the number of audio streams and the number
of sub-picture data streams (VTS_AST_Ns, VTS_SPST_Ns)
25 and the video, audio, and sub-picture data attribute
information (VTS_V_ATR, VTS_A_ATR, VTS_SPST_ATR). A
detailed explanation of the setting of each section of

the reproducing apparatus according to the attribute information will be given later.

When a menu (VTSM) for a video title set (VTS) has a simple structure, the start address (VTSM_VOB_SA) of a video object set (VTSM_VOB) 95 for a video title set menu is acquired from the video title set information management table (VTSI_MAT) 98 of FIG. 23. On the basis of the video object set (VTSM_VOB) 95, the video title set menu is displayed. When an video object set (VTT_VOBS) 96 for titles (VTST) in the title set (VTS) is simply reproduced without selecting a program chain (PGC) with reference to the menu, the video object set 96 is reproduced on the basis of the start address (VTSTT_VOB_SA) shown in FIG. 23.

When a program chain (PGC) is specified from the key/display section 4, the desired program chain is searched for in the following procedure. The act of searching for a program chain is not limited to a program chain for titles in the video title set. The same procedure applies to the operation of searching for a program chain for a relatively complex menu made up of program chains. The start address of the program chain information table (VTS_PGCIT) 100 in the video title set (VTS) of FIG. 22 written in the management table (VTSI_MAT) 98 of the video title set information (VTSI) is acquired, and information (VTS_PGCIT_I) 102 in the VTS program chain information table of FIG. 24

is read. From the information (VTS_PGCIT_I) 102, the number of program chains (VTS_PGC_Ns) and the end address (VTS_PGCIT_EA) of the table 100 shown in FIG. 25 are obtained.

5 When the number of a program chain is specified from the key/display section 4, the category of the program chain and the start address of the VTS_PGC information 104 corresponding to the search pointer (VTS_PGCIT_SRP) 103 shown in FIG. 26 are acquired from
10 the VTS_PGCIT search pointer (VTS_PGCIT_SRP) 103 corresponding to the number shown in FIG. 24. On the basis of the start address (VTS_PGCIT_SA), the program chain general information (PGC_GI) of FIG. 27 is read out. According to the general information (PGC_GI),
15 the category and playback time of the program chain (PGC_CAT, PGC_PB_TIME) are obtained and further the start addresses (C_PBIT_SA, C_POSIT_SA) of the cell playback information table (C_PBIT) and cell position information table (C_POSIT) 108 contained in the
20 general information (PGC_GI) are acquired. From the start address (C_PBIT_SA), the video object identifier (C_VOB_IDN) and cell identification number (C_IDN) of FIG. 34 are acquired as the cell position information (C_POSI) of FIG. 33.

25 Furthermore, from the start address (C_POSIT_SA), the cell playback information (C_PBI) of FIG. 31 is obtained. The start address (C_FVOBU_SA) of the first

VOBU 85 and the start address (C_LVOBU_SA) of the last
VOBU in the cell of FIG. 32 contained in the playback
information (C_PBI) are acquired. Then, the target
cell is searched for. In the playback of cells,
5 referring to the program map of FIG. 29 in the PGC
program map (PGC_PGMAP) 106 of FIG. 27, playback cells
84 are determined one after another. The data cells 84
of program chains thus determined are read one after
another from the video object 144 and inputted to the
10 data RAM section 56 via the system processor section
54. The data cells 84, on the basis of the playback
time information, are supplied to the video decoder
section 58, audio decoder section 60, and sub-picture
decoder section 62, which decode them. The decoded
15 signals are subjected to signal conversion at the D/A
and data-reproducing section 64 and an image is
reproduced at the monitor section 6 and at the same
time, sound is reproduced at the speaker sections 8, 9.

Explained next will be the acquisition of the
20 video data attribute information (VTS_V_ATR) and the
setting of the video decoder and video reproducing
section 201 according to the video data attribute
information (VTS_V_ATR) in the optical disk reproducing
apparatus, with reference to the flowchart shown in
25 FIG. 48. When the setting process is started, the
system CPU section 50, as shown in step 10, controls
the disk drive section 30 to read the video title set

information management table (VTSI_MAT) 98 from the optical disk 10 and temporarily stores it in the data RAM section 56. As shown in step S11, the system CPU section 50 acquires the video data attribute (VTS_V_ATR) recorded in the video title set information management table (VTSI_MAT) 98 stored in the data RAM section 56. The system CPU section 50, as shown in step S12, judges which of MPEG1 and MPEG2 standards the video compression mode written in the video data attribute (VTS_V_ATR) acquired at step S12 complies with and on the basis of the judgment result, supplies a control signal to the register 58A of the video decoder section 58. This causes the selector 58B to be switched according to the control signal supplied from the register 58A. When the video compression mode 131 conforms to the MPEG1 standard, the system processor section 54 supplies the video data to the MPEG1 decoder 58C via the selector 58B. When the video compression mode 131 conforms to the MPEG2 standard, the system processor section 54 supplies the video data to the MPEG2 decoder 58D via the selector 58B. The system CPU section 50, as shown in step S13, judges whether the display aspect ratio written in the acquired video data attribute 123 is 3/4 or 9/16 and on the basis of the judgment result, supplies a control signal to the register 205A in the aspect processing section 205 of the video reproducing section 201 in the D/A and

reproducing section 64. This causes the selector 205B to be switched according to the control signal supplied to the register 205A. When the display aspect ratio is $3/4$, the video data from the frame rate processing section 204 is supplied to the $3/4$ aspect processing section 205C via the selector 205B. When the display aspect ratio is $9/16$, the video data from the frame rate processing section 204 is supplied to the $9/16$ aspect processing section 205D via the selector 205B.

Furthermore, the system CPU section 50, as shown in step S14, judges whether the frame rate written in the acquired video data attribute is of the NTSC or PAL system and on the basis of the judgment result, supplies a control signal to the register 204A in the frame rate processing section 204 of the video reproducing section 201 in the D/A and reproducing section 64. This causes the selector 204B to be switched according to the control signal supplied to the register 204A. When the frame rate is of the NTSC system, the video data from the video decoder section 58 is supplied to the NTSC section 204C via the selector 204B. When the frame rate is of the PAL system, the video data from the video decoder section 58 is supplied to the PAL section 204D via the selector 204B. In addition, the system CPU section 50, as shown in step S15, judges whether the pan scan 134 written in the acquired video data attribute 123 is present or

absent and on the basis of the judgment result,
supplies a control signal to the register 206A in the
pan scan processing section 206 of the video
reproducing section 201 in the D/A and reproducing
section 64. This causes the selector 206B to be
5 switched according to the control signal supplied to
the register 206A. When the pan scan or letter box is
present, the video data from the aspect processing 205
is supplied to the pan scan/letter box processing
10 section 206D via the selector 206B. When neither pan
scan nor letter box is present, the video data from the
aspect processing section 205 is supplied to the pan
scan through section 206C via the selector 206B.

The above series of processes has set the video
15 decoder section 58 and video reproducing section 201
optimally for the video data in the title set to be
reproduced. In the flow in FIG. 48, when the video
decoder section 58 and video reproducing section
201 are set according to the video data attribute
20 information (VMGM_V_ATR), the video management
information management table (VMGI_MAT) 78 is read out
instead of the video title set information management
table (VTSI_MAT) 98 and the video data attribute
information (VMG_V_ATR) is acquired. Additionally, in
25 the flow of FIG. 48, when the video decoder section 58
and video reproducing section 201 are set according to
the video data attribute information (VTSM_V_ATR), the

video data attribute information (VTSM_V_ATR), like the video data attribute information (VTS_V_ATR), is acquired from the video title set information management table (VTSI_MAT) 98.

5 Explained next will be the acquisition of the audio data attribute information (VTS_AST_ATR) and the setting of the video decoder and video reproducing section 201 according to the attribute information (VTS_AST_AT) in the optical disk reproducing apparatus,
10 with reference to the flowchart shown in FIG. 49. When the setting process is started, the system CPU section 50, as shown in step 20, controls the disk drive section 30 to read the video title set information management table (VTSI_MAT) 98 from the optical disk 10
15 and temporarily stores it in the data RAM section 56. As shown in step S21, the system CPU section 50 acquires the number of audio streams recorded in the video title set information management table (VTSI_MAT) 98 stored in the data RAM section 56. As shown in step
20 32, when the user specifies a selectable audio stream number from the key/display section 4, the system CPU section 50, as shown in step 22, acquires the audio attribute (VTS_AST_AT) corresponding to the user-specified stream number from the audio data attribute group (VTS_AST_AT) in the video title set information
25 management table (VTSI_MAT) 98 stored in the data RAM section 56. The system CPU section 50, as shown in

step 23, judges which of MPEG1 and linear PCM standards
the audio compression mode written in the acquired
audio data attribute (VTS_AST_ATR) complies with and
on the basis of the judgment result, supplies a control
5 signal to the register 68A of the audio decoder
section 60.

This causes the selector 60B to be switched
according to the control signal supplied to the
register 60A. When the audio coding mode conforms to
10 the MPEG1 standard, the system processor section 54
supplies the audio data to the MPEG1 decoder 60C via
the selector 60B. When the audio coding mode conforms
to the AC3 standard, the system processor section 54
supplies the audio data to the AC3 decoder 60D via the
15 selector 60B. When the video coding mode conforms to
the digital PCM standard, the system processor section
54 supplies the audio data to the PCM decoder 60E via
the selector 60B.

Furthermore, the system CPU section 50, as shown
20 in step S24, judges whether the audio mode 152 written
in the acquired audio data attribute (VTS_AST_ATR) is
stereo, monaural, or surround and on the basis of the
judgment result, supplies a control signal to the
register 202A in the audio reproducing section 202.
25 This causes the selector 202B to be switched according
to the control signal supplied to the register 202A.
When the audio mode 152 is stereo, the audio data from

the audio decoder section 60 is supplied to the stereo output section 202C via the selector 202B. When the audio mode 152 is monaural, the audio data from the audio decoder section 60 is supplied to the monaural output section 202D via the selector 202B. When the audio mode 152 is surround, the audio data from the audio decoder section 60 is supplied to the surround output section 202E via the selector 202B.

Next, the system CPU section 50, as shown in step S25, judges whether the mixing mode written in the acquired audio data attribute 125 is mixing impossible, master stream enabling mixing, or slave stream enabling mixing and on the basis of the judgment result, supplies a control signal to the registers 203A and 203B in the audio mixing section 203. This causes the selector 203C to be switched according to the control signal supplied to the register 203A. When the mixing mode is master stream enabling mixing as shown in step 25, the stream is determined to be the first stream as shown in step 26 and supplied to the first stream processing section 203D. When the mixing mode is slave stream enabling mixing as shown in step 27, the stream is determined to be the second stream as shown in step 28 and supplied to the second stream processing section 203E. When the mixing mode is independent stream disabling mixing, the stream is determined to be the first stream and supplied to the first stream

processing section 203D. Additionally, the processing
of the mixing processing section 203F is switched
according to the control signal supplied to the
register 203B. When the mixing mode is mixing
5 possible, mixing is performed on the first stream in
the first stream processing section 203D and on the
second stream in the second stream processing section
203E. The resulting signal is outputted to the speaker
section 8. When the mixing mode is mixing impossible,
10 only the first stream in the first stream processing
section 203D is outputted to the speaker section 8.

Furthermore, the system CPU section 50, as shown
in step 30, judges whether or not the audio type 153
written in the acquired audio data attribute 125 is
15 language. If the judgment result shows language, the
CPU section will acquire a language code from language
code 156, determine the name of the corresponding
language from a language code table previously stored
in the system ROM/RAM section 52, and indicate it on
20 the monitor section 6 as shown in step 31.

In contrast, when the user has specified a
language code, the CPU section can pinpoint the audio
stream having the desired language code from the number
of audio streams 124 and audio data attribute 125.

25 Additionally, when during playback of data, the
change of the audio stream number is commanded because
of the user's event, for example, (S32), the

acquisition and setting of audio data attributes are effected according to the processes in S22 to S31.

The above series of processes has set the audio decoder section 60, audio reproducing section 202, and audio mixing section 203 optimally for the video data in the title set to be reproduced. In the flow in FIG. 49, when the video decoder section 58 and video reproducing section 201 are set according to the audio data attribute (VMGM_AST_ATR), the video management information management table (VMGI_MAT) 78 is read out instead of the video title set information management table (VTSI_MAT) 98 and the audio data attribute (VMG_AST_ATR) is acquired. Additionally, in the flow of FIG. 48, when the audio decoder section 60 and audio reproducing section 202 are set according to the audio data attribute (VTSM_AST_ATR), the audio data attribute (VTSM_AST_ATR), like the audio data attribute (VTS_AST_ATR), is acquired from the video title set information management table (VTSI_MAT) 98.

Explained next will be the acquisition of the sub-picture attribute information (VTS_SPST_ATR) and the setting of the sub-picture decoder 62 and video reproducing section 201 according to the attribute information (VTS_SPST_ATR) in the optical disk reproducing apparatus, with reference to the flowchart shown in FIG. 48. As shown in step 40, the system CPU section 50 controls the disk drive section 30 to read

the video title set information management table
(VTSI_MAT) 98 from the optical disk 10 and temporarily
stores it in the data RAM section 56. As shown in step
S41, the system CPU section 50 acquires the number of
5 sub-picture streams (VTS_SPST_Ns) recorded in the
video title set information management table (VTSI_MAT)
stored in the data RAM section 56. As shown in step
46, when the user specifies a selectable audio stream
number from the key/display section 4, the system CPU
10 section 50, as shown in step 42, acquires the audio
attribute (VTS_AST_ATR) corresponding to the user-
specified channel number from the sub-picture data
attribute (VTS_AST_ATR) recorded in the video title set
information management table (VTSI_MAT) stored in the
15 data RAM section 56. The system CPU section 50, as
shown in step 43, judges whether sub-picture
compression mode written in the acquired sub-picture
attribute (VTS_AST_ATR) is Raw (corresponding to a bit
map), run length, or others and on the basis of the
20 judgment result, supplies a control signal to the
register 62A of the sub-picture decoder section 62.
This causes the selector 62B to be switched according
to the control signal supplied to the register 62A.
When the sub-picture compression mode corresponds to
25 a bit map, the system processor section 54 supplies the
sub-picture data to the bit map decoder 62C via the
selector 62B. When the sub-picture compression mode

corresponds to run length, the system processor section 54 supplies the sub-picture data to the run length decoder 62D via the selector 62B.

Furthermore, the system CPU section 50, as shown
5 in step 44, judges whether or not sub-picture type 172 written in the acquired sub-picture attribute 127 is language. If the judgment result shows language, the CPU section, as shown in step 45, will acquire
10 a language code from the language code, determine the name of the corresponding language from a language code table previously stored in the system ROM/RAM section 52, and indicate it on the monitor section 6.

In contrast, when the user has specified a language code, the CPU section can pinpoint the sub-
15 picture stream having the desired language code from the number of sub-picture streams and sub-picture data attribute 127. Additionally, as shown in step 46, when during playback of data, the change of the sub-picture stream number is commanded because of the user's event,
20 for example, the acquisition and setting of sub-picture data attributes are effected according to the processes in S42 to S45.

The above series of processes has set the sub-picture decoder section 62 and sub-picture reproducing
25 section 207 optimally for the video data in the title set to be reproduced. In the flow in FIG. 49, when the sub-picture decoder section 62 and sub-picture

reproducing section 207 are set according to the sub-picture attribute (VMGM_SPST_ATR), the video management information management table (VMGI_MAT) 78 is read out instead of the video title set information management table (VTSI_MAT) 98 and the sub-picture attribute (VMG_SPST_ATR) is acquired. Additionally, in the flow of FIG. 48, when the audio decoder section 60 and audio reproducing section 202 are set according to the sub-picture attribute (VTSM_SPST_ATR), the sub-picture attribute (VTSM_SPST_ATR), like the sub-picture attribute (VTS_SPST_ATR), is acquired from the video title set information management table (VTSI_MAT) 98.

Referring to FIGS. 51 to 53, explained next will be a method of recording data on the optical disk 10 on and from which the video data is recorded and reproduced in the logic formats shown in FIGS. 4 to 41 and a recording system to which the recording method is applied.

FIG. 51 shows an encoder system that creates a video file 88 of a title set 84 whose video data is encoded. In the system of FIG. 51, for example, a videotape recorder (VTR) 201, an audiotape recorder (ATR) 202, and a sub-picture source 203 are used as sources of the main video data, audio data, and sup-picture data. Under the control of a system controller (Sys con) 205, they create the main video data, audio data, and sup-picture data, which are

supplied to a video encoder (VENC) 206, an audio encoder (AENC) 207, and a sub-picture encoder (SPENC) 208, respectively. Under the control of the system controller (Sys con) 205, these encoders 206, 207, and 208 perform A/D conversion of the main video data, audio data, and sub-picture data and encode them by the respective compression schemes. The encoded main video data, audio data, and sub-picture data (Comp Video, Comp Audio, Comp Sub-pict) are stored in memories 210, 211, and 212. The main video data, audio data, and sub-picture data (Comp Video, Comp Audio, Comp Sub-pict) are outputted to a file formatter (FFMT) 214 under the control of the system controller (Sys con) 205, which converts them so that they may have a file structure of video data for the system as explained earlier. Then, under the control of the system controller (Sys con) 205, the setting conditions for each data item and the management information including attributes are stored in a memory 216 in the form of files.

Explained next will be a standard flow of an encoding process in the system controller (Sys con) 205 that creates a file from video data.

According to the flow of FIG. 52, the main video data and audio data are encoded and the encoded main video data and audio data (Comp Video, Comp Audio) are supplied. Specifically, when the encoding process is

started, as shown in step S70 of FIG. 52, the parameters necessary for encoding the main video data and audio data are set. Part of the set parameters are stored in the system controller (Sys con) 205 and at the same time, are used at the file formatter (FFMT) 214. As shown in step S271, the main video data is pre-encoded using the parameters and the optimum distribution of the amount of codes is calculated. Then, on the basis of the code amount distribution obtained in the pre-encoding, the main video data is encoded as shown in step S272. At the same time, the audio data is also encoded at step S272. As shown in step in S273, if necessary, the main video data is partially encoded again and the reencoded portion of the main video data is replaced with the old one. Through the series of steps, the main video data and audio data are encoded. Furthermore, as shown in steps S274 and S275, the sub-picture data is encoded and the encoded sub-picture data (Comp Sub-pict) is supplied. Namely, the parameters necessary for encoding the sub-picture data is set. As shown in step S274, part of the parameters are stored in the system controller (Sys con) 205 and used in the file formatter (FFMT) 214. On the basis of the parameters, the sub-picture data is encoded. By the process, the sup-picture data is encoded.

According to the flow of FIG. 53, the encoded main

video data, audio data, and sup-picture data (Com Video, Com Audio, Comp Sub-pict) are combined and converted so as to form a video data title set structure as explained in FIGS. 4 and 21. Specifically, as shown in step S276, a cell is set as the smallest unit of the video data and cell playback information on the cell (C_PBI) is created. Then, as shown in step S277, the structure of the cells constituting a program chain and the main video, sub-picture, and audio attributes (the information obtained in encoding the respective data items are used part of these attributes) are set. Then, as shown in FIG. 21, a video title set information management table information (VTSI_MAT) including information on program chains and a video title set program chain table (VTS_PGCIT) 100 are created. At this time, as the need arises, a video title set direct access pointer table (VTS_DAPT) is also created. The encoded main video data, audio data, and sup-picture data (Com Video, Comp Audio, Comp Sub-pict) are subdivided into specific packs. An NV pack is placed at the head of each VOB so that playback can be effected in the order of time code of each data item. With the NV packs arranged this way, each data cell is positioned so that a video object (VOB) may be composed of a plurality of cells as shown in FIG. 6. A set of such video objects is formatted into the title set structure.

In the flow of FIG. 53, the program chain information (PGI) is obtained in the process of step S277 by using the database in the system controller (Sys con) 205 or entering data again as the need arises.

5

FIG. 54 shows a disk formatter system that records on an optical disk the title set formatted as described above. In the disk formatter system of FIG. 54, the memories 220, 222 in which the created title set is stored supply these file data items to a volume
10 formatter (VFMT) 226. In the volume formatter (VFMT) 226 extracts the management information from the title sets 84, 86, produces a video manager 71, and create the logic data to be recorded on the disk 10 in the arrangement of FIG. 4. A disk formatter (DFMT) 228
15 adds error correction data to the logic data created at the volume formatter (VFMT) 226, thereby reconvert the logic data into physical data to be recorded on the disk. A modulator 230 converts the physical data
20 created at the disk formatter (DFMT) 228 into the recording data to be recorded actually on the disk. Then, a recorder 232 records the modulated recording data on the disk 10.

A standard flow for creating the aforementioned
25 disk will be described with reference to FIGS. 55 and 56. FIG. 55 shows the flow of creating the logic data to be recorded on the disk 10. Specifically, as shown

in step S280, parameter data items, including the number of video data files, their arrangement, and the size of each video data file, are set first. Next, as shown in step S281, a video manager 71 is created from the set parameters and the video title set information 281 in each video set 72. Thereafter, as shown in step S282, the video manager 71 and video title set 72 are arranged in that order according to the corresponding logical block number, thereby creating the logic data to be recorded on the disk 10.

Thereafter, the flow of creating the physical data to be recorded on the disk as shown in FIG. 56 is executed. Specifically, as shown in step S283, the logic data is divided into units of a specific number of bytes, thereby forming error correction data. Next, as shown in step S284, the logic data divided into units of a specific number of bytes are combined with the created error correction data to form physical sectors. Thereafter, as shown in step S285, physical data is created by combining physical sectors. In this way, the modulating process based on certain rules is performed on the physical data created in the flow of FIG. 56, thereby forming the recording data. Thereafter, the recording data is recorded on the disk 10.

The above-described data structure can be applied not only to a case where the data is recorded on

recording mediums, such as optical disks, and then the disks are distributed to the users, but also to a communication system as shown in FIG. 57. Specifically, according to the procedure shown in FIGS. 51 to 54, an optical disk 10 in which a video manager 71 and video title set 72 as shown in FIG. 4 are stored may be loaded into a reproducing apparatus 300, from whose system CPU section 50 the encoded data is taken out digitally and transmitted by a modulator/transmitter 310 to the users or the cable subscribers by radio or via a cable. Furthermore, the encoding system 320 shown in FIGS. 51 and 54 may create the data encoded on the provider side, such as a broadcasting station and the encoded data may be transmitted by the modulator/transmitter 310 to the users or the cable subscribers by radio or via a cable. In such a communication system, the information in the video manager 71 is modulated at the modulator/transmitter 310 and then supplied to or is directly supplied to the users free of charge. When a user is interested in the title, the modulator/transmitter 310 transmits the title set 72 at the user's or subscriber's request by radio or via a cable. Under the control of the video manager 71, the video title set information 94 is first transferred and then the title video object 95 in the video title set reproduced according to the title set information 94 is transferred. At this time, if

necessary, the video title set menu video object 95 is also transmitted. The transferred data is received by a receiver/demodulator 400 on the user side and is processed as encoded data at the system CPU section 50 of the reproducing apparatus on the user or subscriber side of FIG. 1 in the same manner as in the above-described reproducing process, whereby the video data is reproduced.

In transferring the video title set 72, the attribute information (VMGM_V_ATR, VMGM_AST_ATR, VMGM_SPST_ATR), (VTSM_V_ATR, VTSM_AST_ATR, VTSM_SPST_ATR), and (VTS_V_ATR, VTS_AST_ATR, VTS_SPST_ATR) are transferred for each title set as management information on video data, so that the video data etc. can be reproduced under suitable playback conditions in the reproducing system on the user side or subscriber side.

While in the above explanation, the video object unit is a data train containing video data, audio data, and sub-picture data, the video object unit may be composed of audio packs only or sub-picture packs only, because the video object unit has only to contain any one of video data, audio data, and sub-picture data.

As described above, attribute information on the video data, audio data, and sub-picture data is written for each video title set. By referring to these pieces of attribute information, the data in the video title

sets can be reproduced optimally. Furthermore, by preparing a plurality of title sets in which the video, audio, and sub-picture data items that differ in attribute information are stored and storing these on an optical disk, the video, audio, and sub-picture data items can be reproduced in a mode suitable for the reproducing system, even if the reproducing system is based on a different standard.

With the present invention, when there are a plurality of audio streams or sub-picture streams for the video data, because as many attributes as there are streams or channels are recorded in the order of number, the data attribute of the audio stream or sub-picture stream corresponding to the specified number can be acquired easily and the reproducing system can be set in the best playback condition in accordance with the specified audio stream or sub-picture stream. Because information as to whether or not the change to a display mode suitable for the playback screen is permitted with respect to the original image is written as attribute information, the video etc. can be reproduced with the maker's intention being always reflected in it.

- 106 -

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. An optical disk comprising:

5 a data recording area between a lead-in area and a lead-out area, said data recording area being divided into a plurality of sectors and comprising a video management area (VMG) and at least one title area (VTS #n), which areas are respectively aligned with the boundaries between sectors;

10 wherein said title set area (VTS #n) comprises a reproduction object area (VTSTT_VOBS) on which video audio and sub-picture packs for receiving video, audio and sub-picture data, respectively, are consecutively recorded, the video, audio and sub-picture data constituting at least one
15 title set, and a title set information area (VTSI) on which title set information for controlling the reproduction of the video, audio and sub-picture data is recorded, the title set information (VTSI) including video attribute information (VTS_V_ATR), audio attribute information
20 (VTS_AST_ATR) and sub-picture attribute information (VTS_SPST_ATR) for proper reproduction of the video, audio and sub-picture data contained in the title set;

a title search pointer table (TT_SRP) and a title set attribution table (VTS_ATRT) are recorded on said video
25 management area (VMG), a video title set number and a start address of each of the title set or title sets are recorded on the title search pointer table (TT_SRP), and

a reproduction control information for the title set or title sets is recorded on the title set attribution
30 table (VTS_ATRT), the reproduction control information including a title set attribution table information (VTS_ATRTI), title set attribution or attributions (VTS_ATR #n) for the title set or title sets, and a search pointer table (VTS_ATR_SRP #n) on which search pointer or pointers
35 each for searching the title set attribution (VTS_ATR #n), the title set attribution table information (VTS_ATRTI) including number of the title sets, each of the title set

- 107 -

attribution describing video attribution information (VTS_V_ATR) of the video data, audio attribution information (VTS_AST_ATR) of the audio data and sub-picture attribution information (VTS_SPST_ATR) of the sub-picture data in the title set, search pointer or pointers being described in the search pointer table (VTS_ATR_SRP #n) in an order corresponding the arrangement order of the title sets.

2. An optical disk according to claim 1, wherein said video attribute information includes information on the compression mode of video data, said audio attribution information includes on the audio coding mode of audio data and said sub-picture attribute information includes information on the sub-picture coding mode of sub-picture data.

3. An optical disk according to claim 1, wherein said video attribute information includes information on the frame rate of video data and information on the display aspect ratio of video data.

4. An optical disk according to claim 1, wherein said audio attribute information includes information on the number of quantization bits of audio data and information on the sampling frequency of audio data.

5. An optical disk according to claim 1, wherein said audio attribute information includes information on the number of audio channels of audio data.

6. An optical disk according to claim 1, wherein said audio attribute information includes information on the application type of audio data whether the audio data includes language or not.

7. An optical disk according to claim 1, wherein said sub-picture attribute information includes information on the application type of sub-picture data whether the sub-picture relates to language or not.

8. An optical disk according to claim 1, wherein said video management area includes video management menu area on which video management menu data for displaying a

- 108 -

menu for selecting the video title set, said video management menu data being composed of video and sub-picture packs for receiving video and sub-picture menu data, and video and sub-picture attribution information for proper reproduction of the video, and sub-picture menu data is recorded on the video management area.

9. An optical disk according to claim 1, wherein said title set area includes title set menu area on which title set menu data for displaying a menu relating to the reproduction of the video title set, said title set menu data being composed of video and sub-picture packs for receiving video and sub-picture menu data, and video and sub-picture attribution information for proper reproduction of the video, and sub-picture menu data is recorded on the title set information area.

10. A reproduction apparatus for reproducing data from an optical disk, said optical disk comprising:

a data recording area between a lead-in area and a lead-out area, said data recording area being divided into a plurality of sectors and comprising a video management area (VMG) and at least one title area (VTS #n), which areas are respectively aligned with the boundaries between sectors;

wherein said title set area (VTS #n) comprises a reproduction object area (VTSTT_VOBS) on which video audio and sub-picture packs for receiving video, audio and sub-picture data, respectively, are consecutively recorded, the video, audio and sub-picture data constituting at least one title set, and a title set information area (VTSI) on which title set information for controlling the reproduction of the video, audio and sub-picture data is recorded, the title set information (VTSI) including video attribute information (VTS_V_ATR), audio attribute information (VTS_AST_ATR) and sub-picture attribute information (VTS_SPST_ATR) for proper reproduction of the video, audio and sub-picture data contained in the title set; and

a title set attribution table (VTS_ATRT) is recorded

- 109 -

on said video management area (VMG), a reproduction control information for the title set or title sets is recorded on the title set attribution table (VTS_ATRT), the reproduction control information including title set attribution or attributions (VTS_ATR #n) for the title set or title sets, each of the title set attribution describing video attribution information (VTS_V_ATR) of the video data, audio attribution information (VTS_AST_ATR) of the audio data and sub-picture data in the title set;

10 said reproduction apparatus comprising:
 video, audio and sub-picture decoders for decoding the video, audio and sub-picture packs;
 searching means for searching said optical disk;
 obtaining means for obtaining the video, audio and sub-picture attribution information (VTS_V_ATR, VTS_AST_ATR, VTS_SPST_ATR) from the title set attribution table (VTS_ATRT) of said video management area (VMG) or title set information area (VTSI) of said title set area (VTS #n), before the reproduction of the data; and
15 setting means for setting the video, audio and sub-picture decoders so as to reproduce, properly, the video, audio and sub-picture data of the title set in accordance with the obtained video, audio and sub-picture attribution information (VTS_V_ATR, VTS_AST_ATR, VTS_SPST_ATR).

20 11. A reproduction apparatus according to claim 10, wherein said video attribute information includes information on the compression mode of video data, said audio attribution information includes on the audio coding mode of audio data and said sub-picture attribute information includes information on the sub-picture coding mode of sub-picture data.

25 12. A reproduction apparatus according to claim 10, wherein said video attribute information includes information on the frame rate of video data and information on the display aspect ratio of video data,

30 said reproduction apparatus further comprising image processing means for processing the decoded video data in

- 110 -

accordance with the frame rate and the display aspect ratio of video data.

13. A reproduction apparatus according to claim 10, wherein said audio attribute information includes
5 information on the number of quantization bits of audio data and information on the sampling frequency of audio data,

wherein said audio decoder decodes audio data in accordance with the number of quantization bits and the
10 sampling frequency.

14. A reproduction apparatus according to claim 10, wherein said audio attribute information includes information on the number of audio channels of audio data, said reproduction apparatus further comprising audio
15 processing section for processing audio data in accordance with the number of audio channels the decoding step.

15. A reproduction apparatus according to claim 10, wherein said audio attribute information includes information on the application type of audio data whether
20 the audio data includes language or not.

16. A reproduction apparatus according to claim 10, wherein said sub-picture attribute information includes information on the application type of sub-picture data whether the sub-picture relates to language or not.

25 17. A reproduction apparatus according to claim 10, wherein said video management area includes video management menu area on which video management menu data for displaying a menu for selecting the video title set, said video management menu data being composed of video and
30 sub-picture packs for receiving video and sub-picture menu data, and video and sub-picture menu attribution information for proper reproduction of the video, and sub-picture menu data is recorded on the video management area,
wherein said obtaining means obtains the video and
35 sub-picture menu attribution information from said video management area, and

said setting means sets the video and sub-picture

- 111 -

decoders properly decode the video, and sub-picture menu data in accordance with the video and sub-picture menu attribution information.

18. A reproduction apparatus according to claim 10,
5 wherein said title set area includes title set menu area on which title set menu data for displaying a menu relating to the reproduction of the video title set, said title set menu data being composed of video and sub-picture packs for receiving video and sub-picture menu data, and video and
10 sub-picture menu attribution information for proper reproduction of the video, and sub-picture menu data is recorded on the title set information area,

wherein said obtaining means obtains the video and sub-picture menu attribution information from said title
15 set information area, and

said setting means sets the video and sub-picture decoders properly decodes the video, and sub-picture menu data in accordance with the video and sub-picture menu attribution information.

20 19. A reproduction method of reproducing data from an optical disk, said optical disk comprising:

a data recording area between a lead-in area and a lead-out area, said data recording area being divided into a plurality of sectors and comprising a video management
25 are (VMG) and at least one title area (VTS #n), which areas are respectively aligned with the boundaries between sectors;

wherein said title set area (VTS #n) comprises a reproduction object area (VTSTT_VOBS) on which video audio
30 and sub-picture packs for receiving video, audio and sub-picture data, respectively, are consecutively recorded, the video, audio and sub-picture data constituting at least one title set, and a title set information area (VTSI) on which title set information for controlling the reproduction of
35 the video, audio and sub-picture data is recorded, the title set information (VTSI) including video attribute information (VTS_V_ATR), audio attribute information

- 112 -

(VTS_AST_ATR) and sub-picture attribute information (VTS_SPST_ATR) for proper reproduction of the video, audio and sub-picture data contained in the title set; and

5 a title set attribution table (VTS_ATRT) is recorded on said video management area (VMG), a reproduction control information for the title set or title sets is recorded on the title set attribution table (VTS_ATRT), the reproduction control information including title set attribution or attributions (VTS_ATR #n) for the title set
10 or title sets, each of the title set attribution describing video attribution information (VTS_V_ATR) of the video data, audio attribution information (VTS_AST_ATR) of the audio data and sub-picture attribution information (VTS_SPST_ATR) of the sub-picture data in the title set;

15 said reproduction method of comprising:

searching step of searching said optical disk;

obtaining step of obtaining the video, audio and sub-picture attribution information (VTS_V_ATR, VTS_AST_ATR, VTS_SPST_ATR) from the title set attribution table
20 (VTS_ATRT) of said video management area (VMG) or title set information area (VTSI) of said title set area (VTS #n), before the reproduction of the data; and

decoding step of decoding the video, audio and sub-picture data of the title set in accordance with the
25 obtained video, audio and sub-picture attribution information (VTS_V_ATR, VTS_AST_ATR, VTS_SPST_ATR).

20. A reproduction method according to claim 19, wherein said video attribute information includes information on the compression mode of video data, said
30 audio attribution information includes on the audio coding mode of audio data and said sub-picture attribute information includes information on the sub-picture coding mode of sub-picture data.

21. A reproduction method according to claim 19,
35 wherein said video attribute information includes information on the frame rate of video data and information on the display aspect ratio of video data,

- 113 -

said method further comprising image processing step of processing the decoded video data in accordance with the frame rate of video data and the display aspect ratio.

22. A reproduction method according to claim 19,
5 wherein said audio attribute information includes information on the number of quantization bits of audio data and information on the sampling frequency of audio data,

wherein audio data is decoded in accordance with the
10 number of quantization bits of audio data and the sampling frequency of audio data in the decoding step.

23. A reproduction method according to claim 19,
wherein said audio attribute information includes information on the number of audio channels of audio data,
15 wherein audio data is processed in accordance with the number of audio channels the decoding step.

24. A reproduction method according to claim 19,
wherein said audio attribute information includes information on the application type of audio data whether
20 the audio data includes language or not.

25. A reproduction method according to claim 19,
wherein said sub-picture attribute information includes information on the application type of sub-picture data whether the sub-picture relates to language or not.

26. A reproduction method according to claim 19,
25 wherein said video management area includes video management menu area on which video management menu data for displaying a menu for selecting the video title set, said video management menu data being composed of video and
30 sub-picture menu data, and video and sub-picture attribution information for proper reproduction of the video, and sub-picture menu data is recorded on the video management area,

wherein the video and sub-picture menu attribution
35 information is obtained in said obtaining step from said video management area, and

said the video, and sub-picture menu data is properly

- 114 -

decoded in said decoding step in accordance with the video and sub-picture menu attribution information.

27. A reproduction method according to claim 19, wherein said title set area includes title set menu area on which title set menu data for displaying a menu relating to the reproduction of the video title set, said title set menu data being composed of video and sub-picture packs for receiving video and sub-picture menu data, and video and sub-picture attribution information for proper reproduction of the video, and sub-picture menu data is recorded on the title set information area,

wherein the video and sub-picture menu attribution information is obtained in said obtaining step from said title set information area, and

15 said the video, and sub-picture menu data is properly decoded in said decoding step in accordance with the video and sub-picture menu attribution information.

28. An apparatus for recording data on an optical disk, comprising:

20 pack generating means for encoding video, audio and sub-picture data and storing the encoded video, audio and sub-picture data into video, audio and sub-picture packs;

title set generating means for generating at least one title set information for controlling a reproduction of the video, audio and sub-picture data, which includes video, audio and sub-picture attribution information for reproducing, properly, video, audio and sub-picture data, and arranging the video, audio and sub-picture packs as a reproduction object so as to follow the video, audio and sub-picture attribution information;

30 reproduction control information generating means for generating reproduction control information of the title set which includes attribution information table in which video, audio and sub-picture attribution information for respective title sets are described; and

recording means for defining video management area and title set area between a lead in area and a lead out area

- 115 -

between the optical disk such that said areas are respectively aligned with the boundaries between sectors, and recording said reproduction control information on the video management area and said title set or title sets on
5 the title set area.

29. An apparatus according to claim 28, wherein said video attribute information includes information on the compression mode of video data, said audio attribution information includes on the audio coding mode of audio data
10 and said sub-picture attribute information includes information on the sub-picture coding mode of sub-picture data.

30. An apparatus according to claim 28, wherein said video attribute information includes information on the
15 frame rate of video data and information on the display aspect ratio of video data.

31. An apparatus according to claim 28, wherein said audio attribute information includes information on the number of quantization bits of audio data and information
20 on the sampling frequency of audio data.

32. An apparatus according to claim 28, wherein said audio attribute information includes information on the number of audio channels of audio data.

33. An apparatus according to claim 28, wherein said
25 audio attribute information includes information on the application type of audio data whether the audio data includes language or not.

34. An apparatus according to claim 28, wherein said sub-picture attribute information includes information on
30 the application type of sub-picture data whether the sub-picture relates to language or not.

35. An apparatus according to claim 28, wherein said video management area includes video management menu area on which video management menu data for displaying a menu
35 for selecting the video title set, said video management menu data being composed of video and sub-picture packs for receiving video and sub-picture menu data, and video and

- 116 -

sub-picture attribution information for proper reproduction of the video, and sub-picture menu data is recorded on the video management area.

36. An apparatus according to claim 28, wherein said
5 title set area includes title set menu area on which title set menu data for displaying a menu relating to the reproduction of the video title set, said title set menu data being composed of video and sub-picture packs for receiving video and sub-picture menu data, and video and
10 sub-picture attribution information for proper reproduction of the video, and sub-picture menu data is recorded on the title set information area.

37. A method of recording data on an optical disk, comprising:

15 step of encoding video, audio and sub-picture data and storing the encoded video, audio and sub-picture data into video, audio and sub-picture packs;

step of generating at least one title set information for controlling a reproduction of the video, audio and sub-
20 picture data, which includes video, audio and sub-picture attribution information for reproducing, properly, video, audio and sub-picture data, and arranging the video, audio and sub-picture packs as a reproduction object so as to follow the video, audio and sub-picture attribution
25 information;

step of generating reproduction control information of the title set which includes attribution information table in which video, audio and sub-picture attribution information for respective title sets are described; and

30 step of defining video management area and title set area between a lead in area and a lead out area between the optical disk such that said areas are respectively aligned with the boundaries between sectors, and recording said reproduction control information sectors, and recording
35 said reproduction control information on the video management area and said title set or title sets on the title set area.

- 117 -

38. A recording method according to claim 37, wherein said video attribute information includes information on the compression mode of video data, said audio attribution information includes on the audio coding
5 mode of audio data and said sub-picture attribute information includes information on the sub-picture coding mode of sub-picture data.

39. A recording method according to claim 37, wherein said video attribute information includes information on
10 the frame rate of video data and information on the display aspect ratio of video data.

40. A recording method according to claim 37, wherein said audio attribute information includes information on the number of quantization bits of audio data and
15 information on the sampling frequency of audio data.

41. A recording method according to claim 37, wherein said audio attribute information includes information on the number of audio channels of audio data.

42. A recording method according to claim 37, wherein
20 said audio attribute information includes information on the application type of audio data whether the audio data includes language or not.

43. A recording method according to claim 37, wherein said sub-picture attribute information includes information
25 on the application type of sub-picture data whether the sub-picture relates to language or not.

44. A recording method according to claim 37, wherein said video management area includes video management menu area on which video management menu data for displaying a
30 menu for selecting the video title set, said video management menu data being composed of video and sub-picture packs for receiving video and sub-picture menu data, and video and sub-picture attribution information for proper reproduction of the video and sub-picture menu data
35 is recorded on the video management area.

45. A recording method according to claim 37, wherein said title set area includes title set menu area on which

- 118 -

title set menu data for displaying a menu relating to the reproduction of the video title set, said title set menu data being composed of video and sub-picture packs for receiving video and sub-picture menu data, and video and
5 sub-picture attribution information for proper reproduction of the video, and sub-picture menu data is recorded on the title set information area.

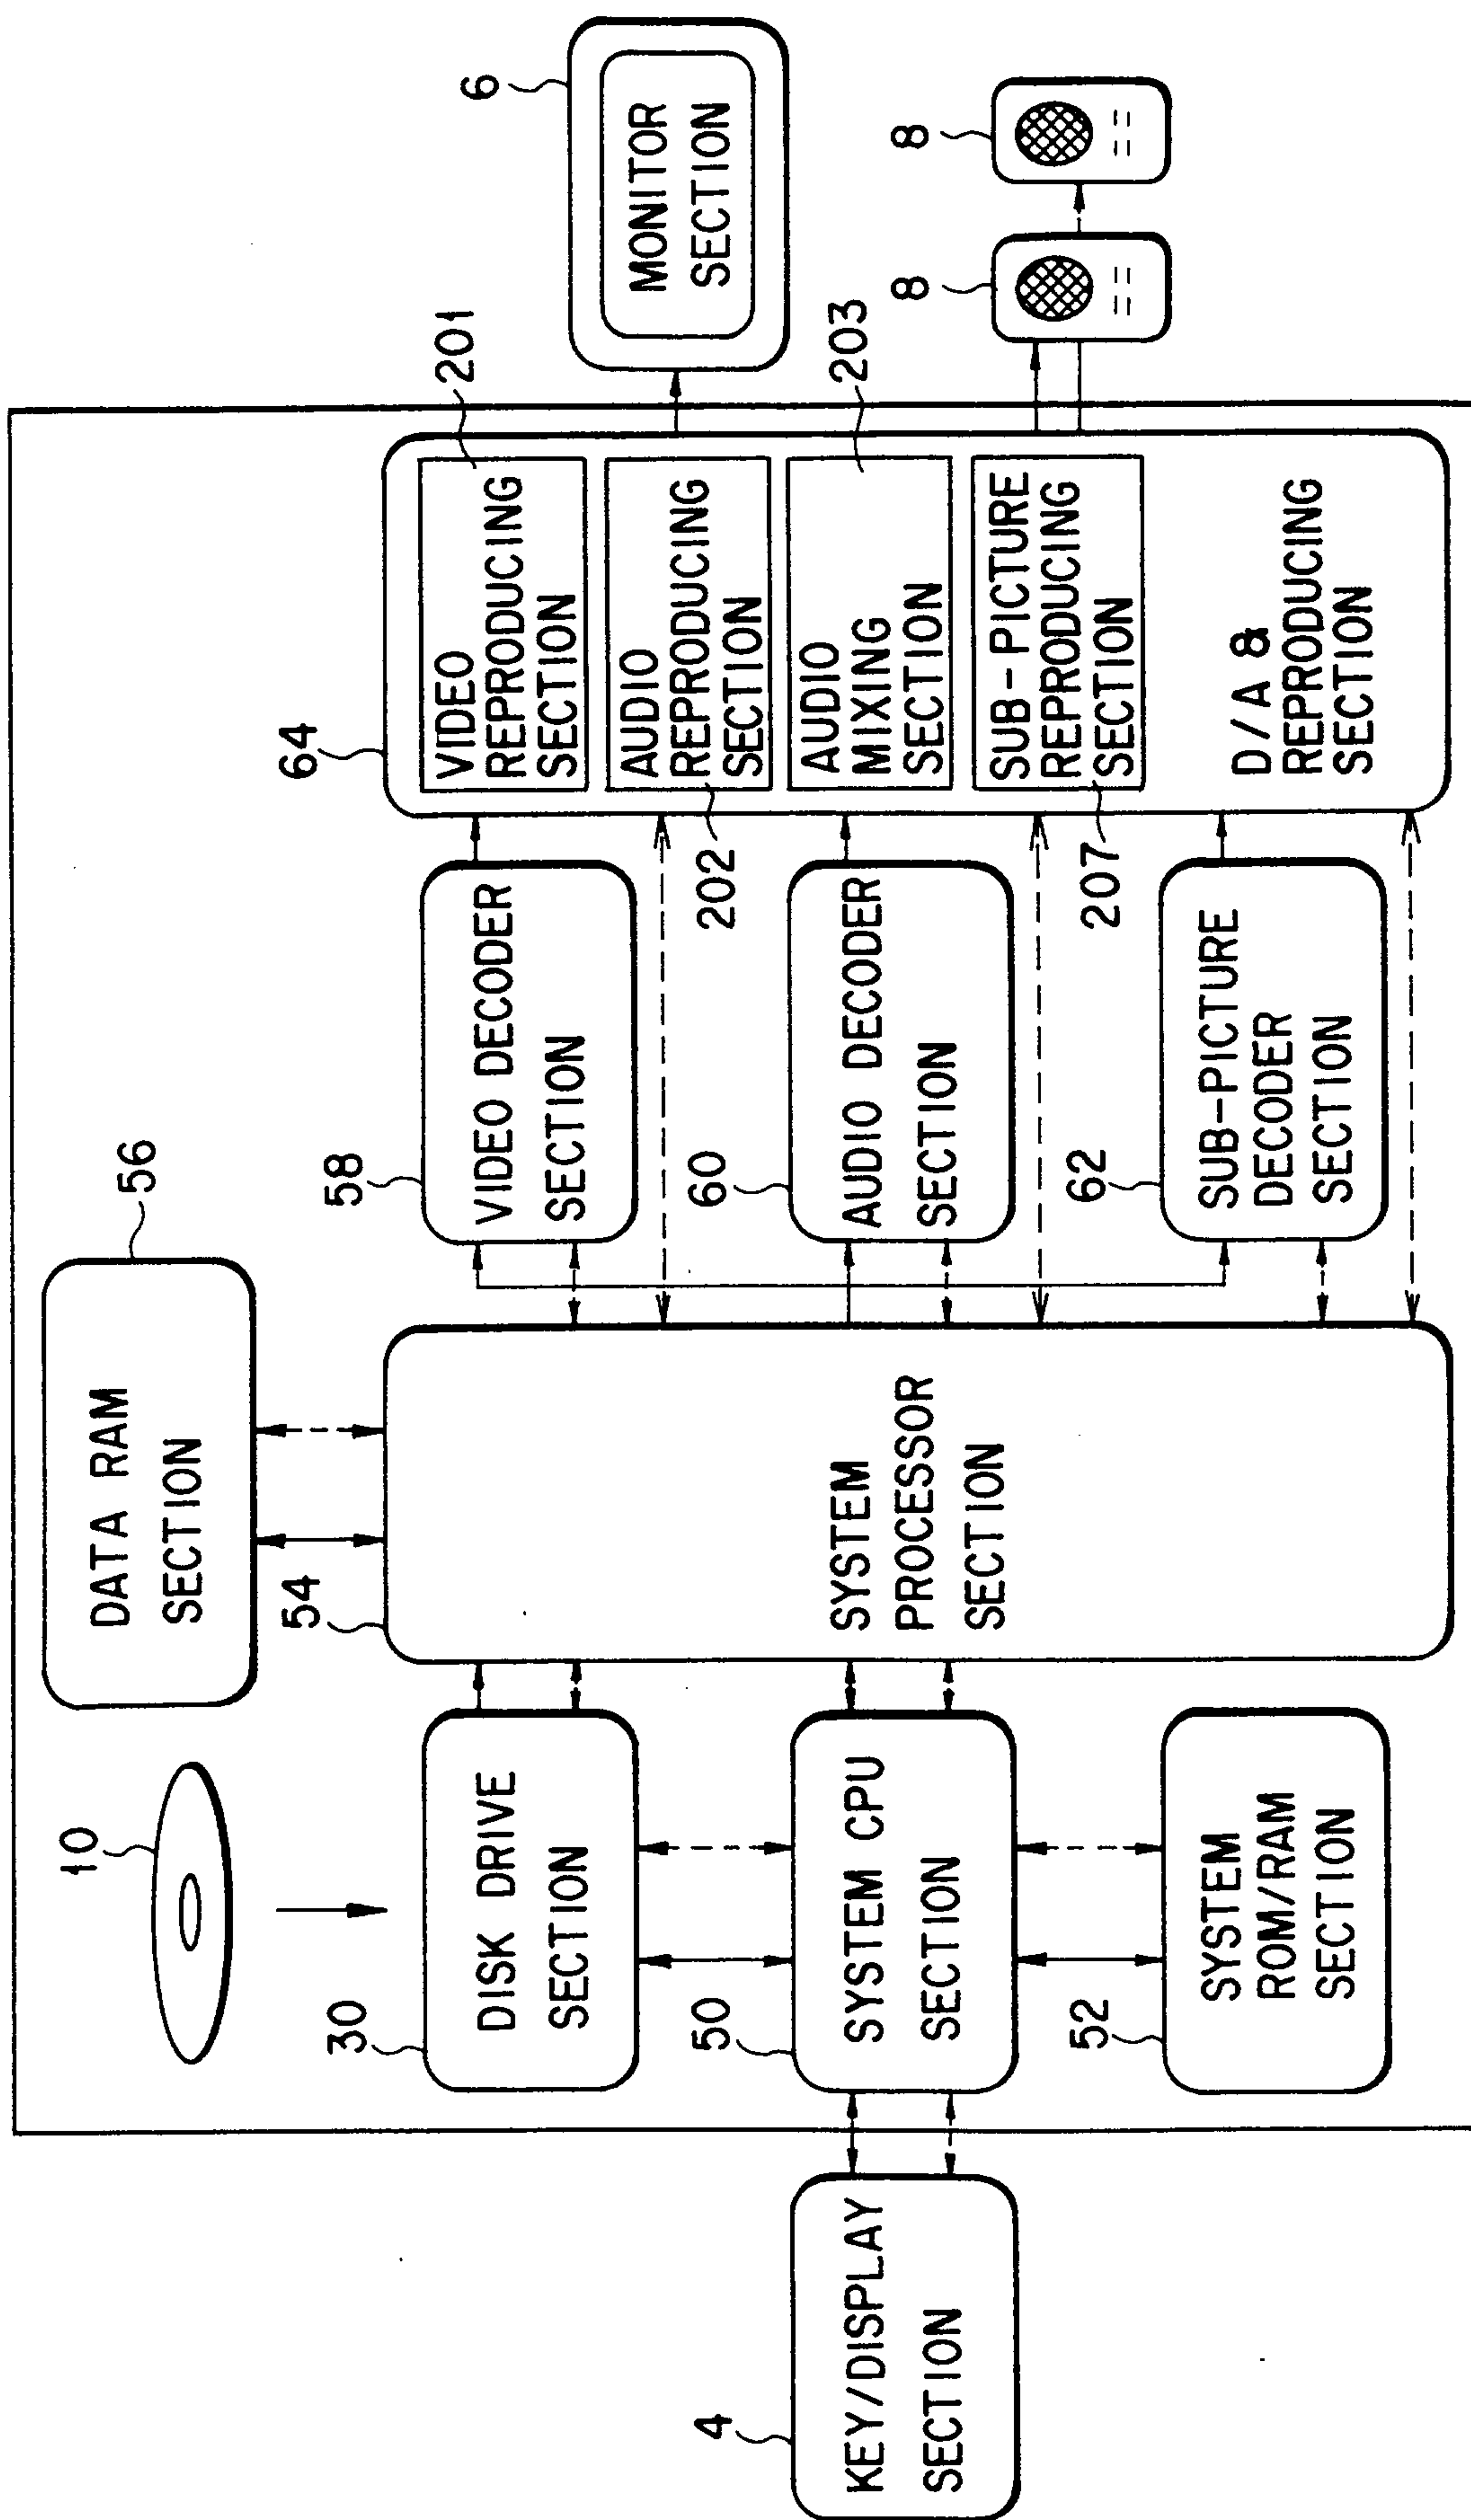


FIG. 1

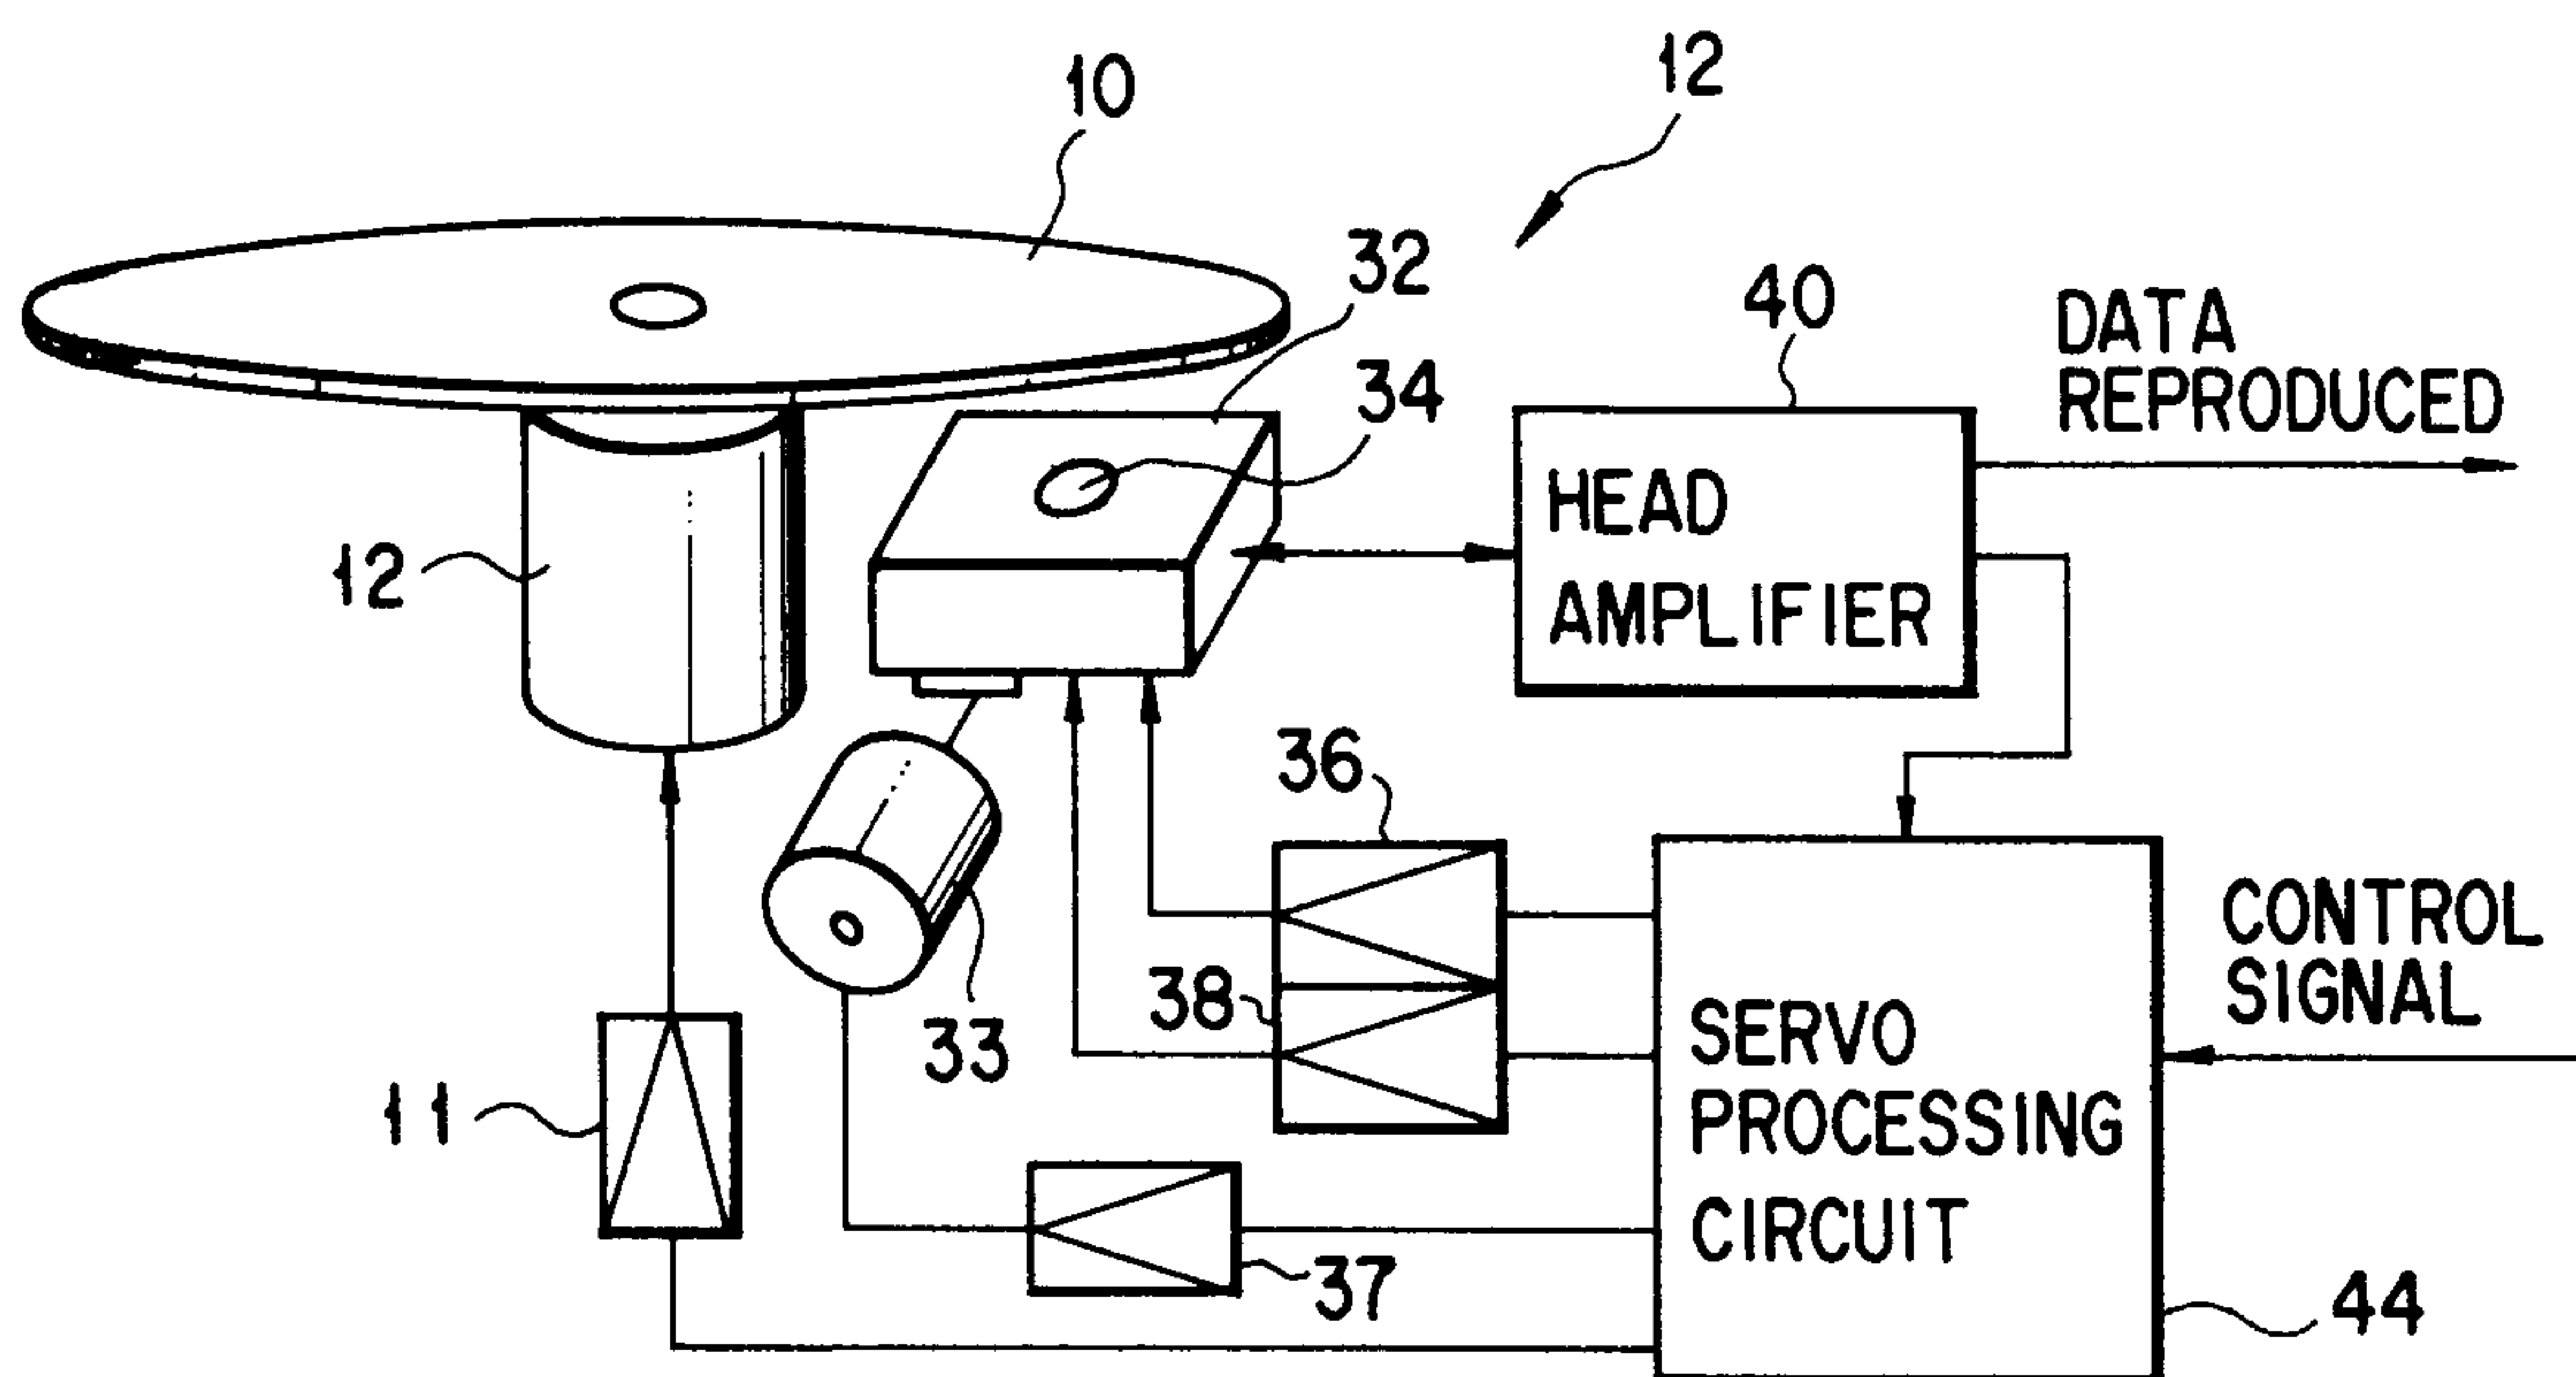


FIG. 2


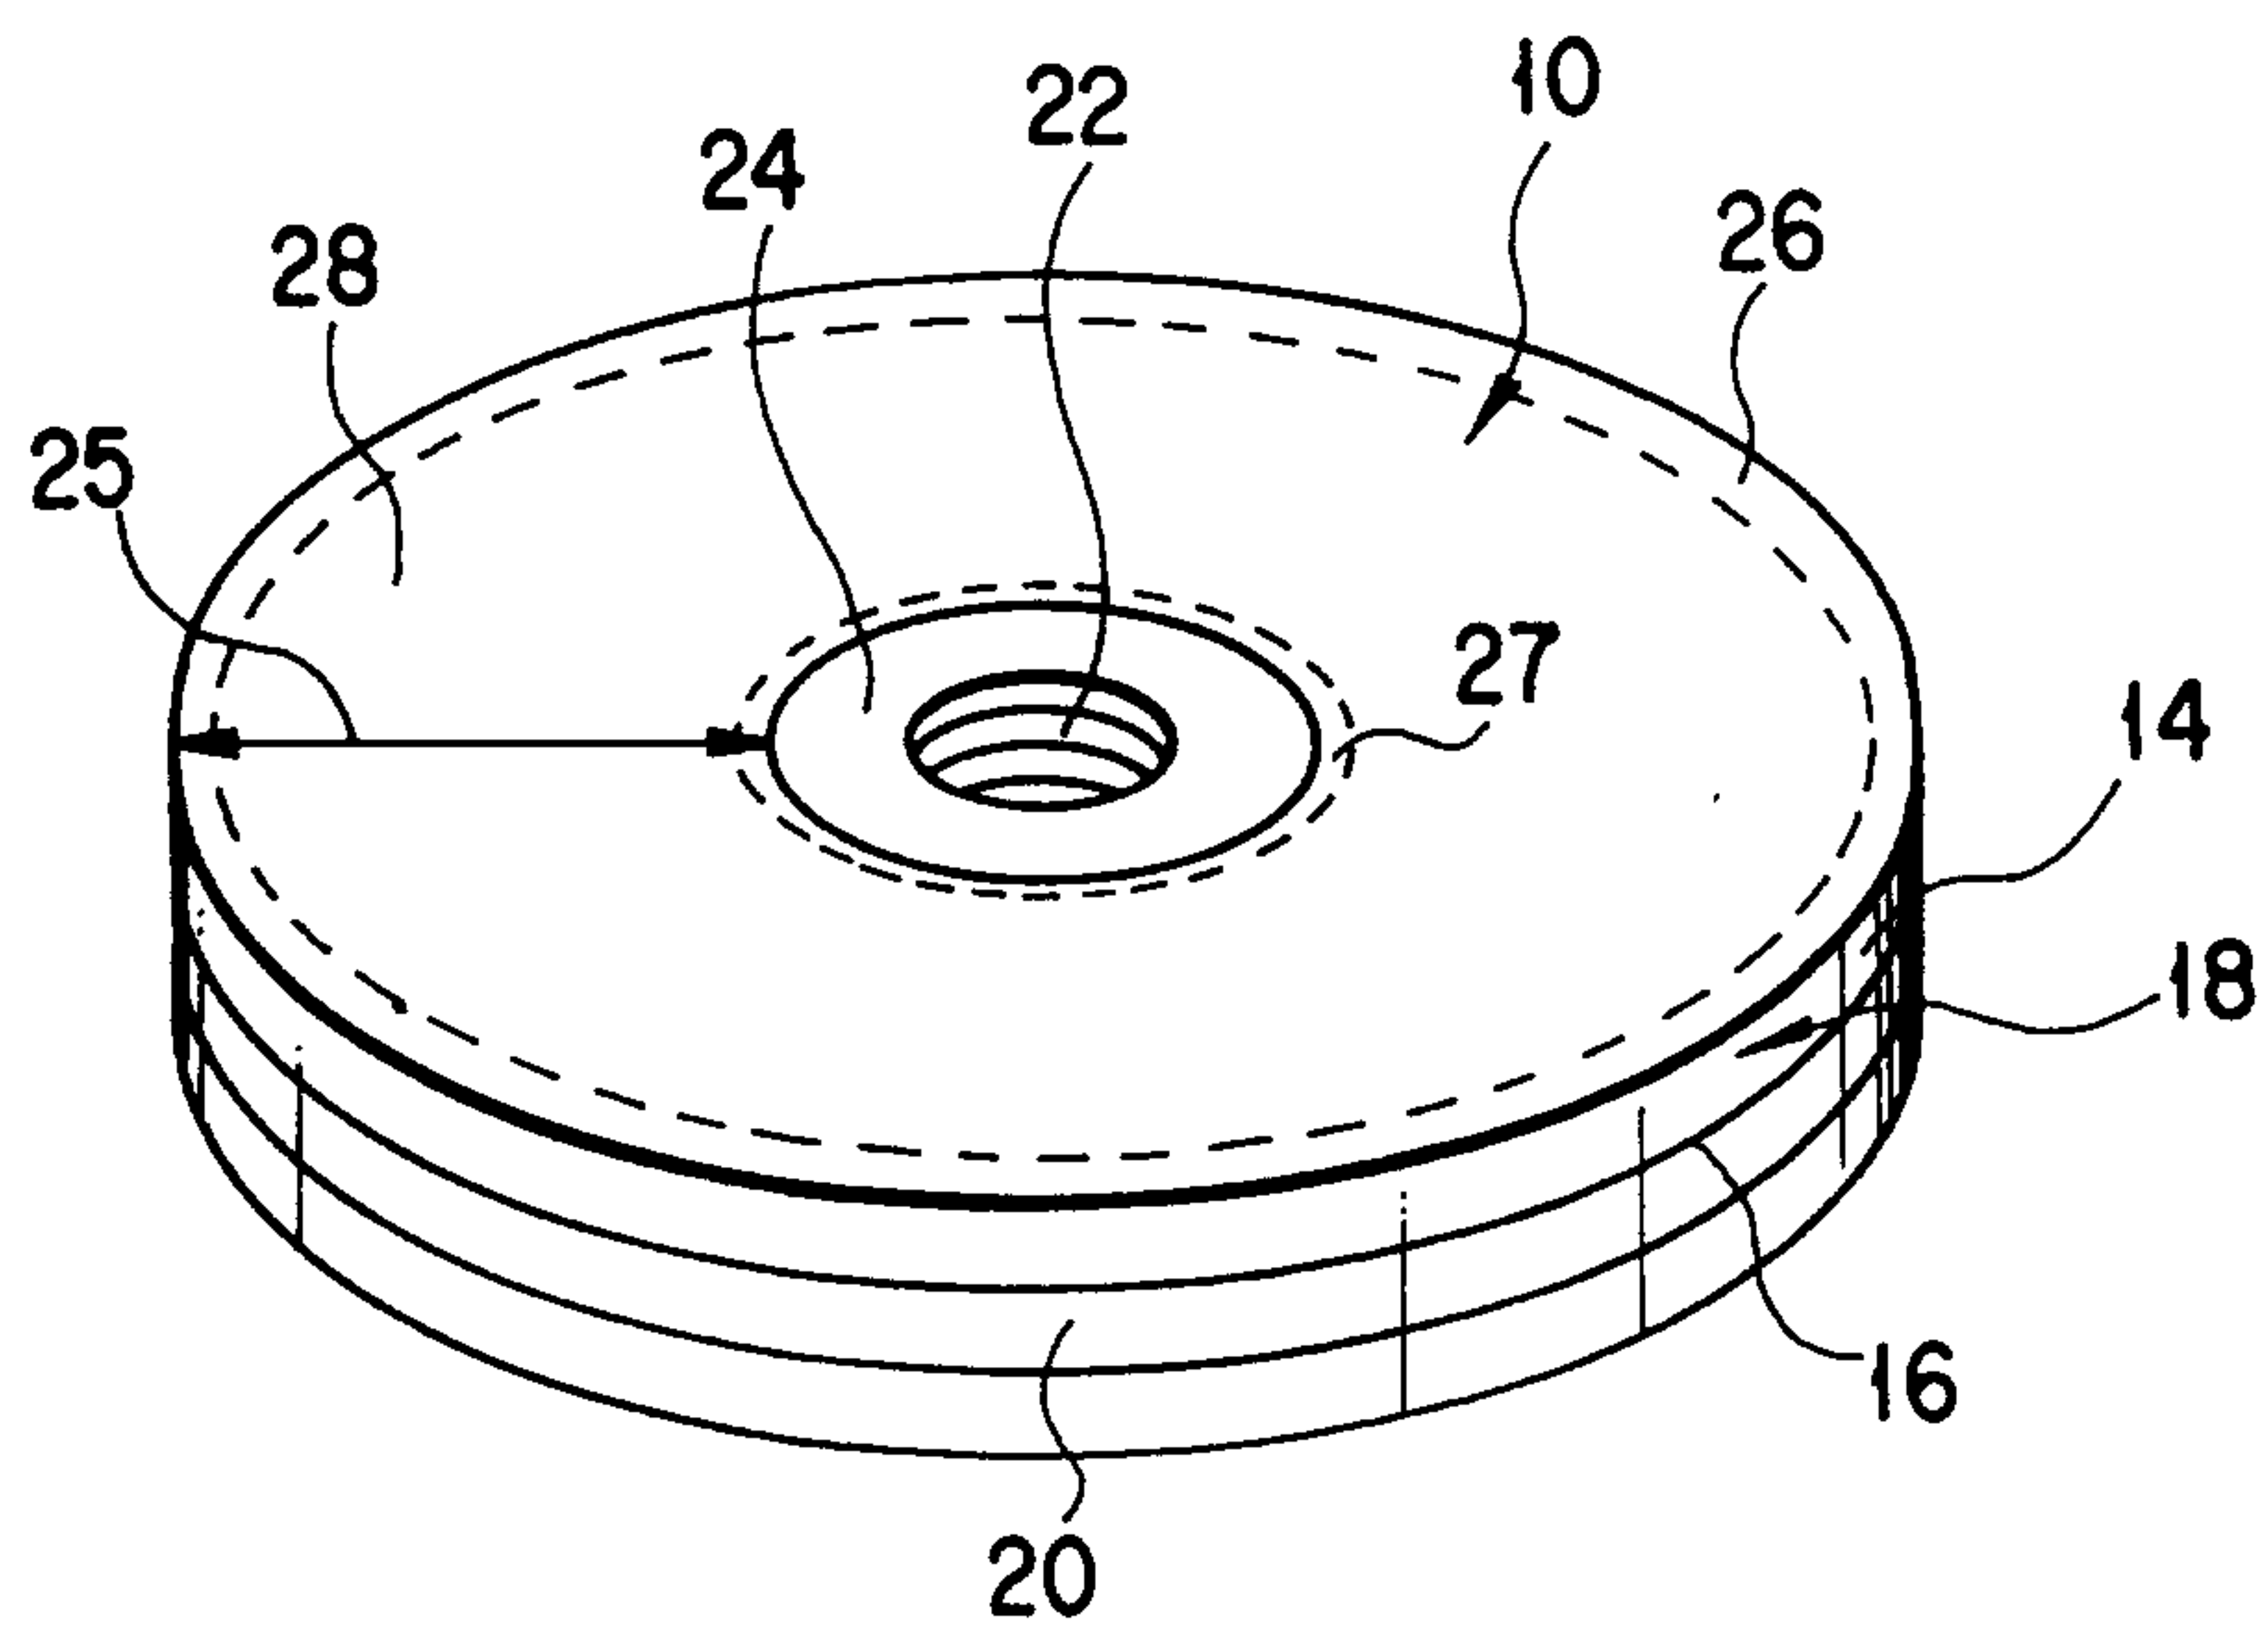


FIG. 3

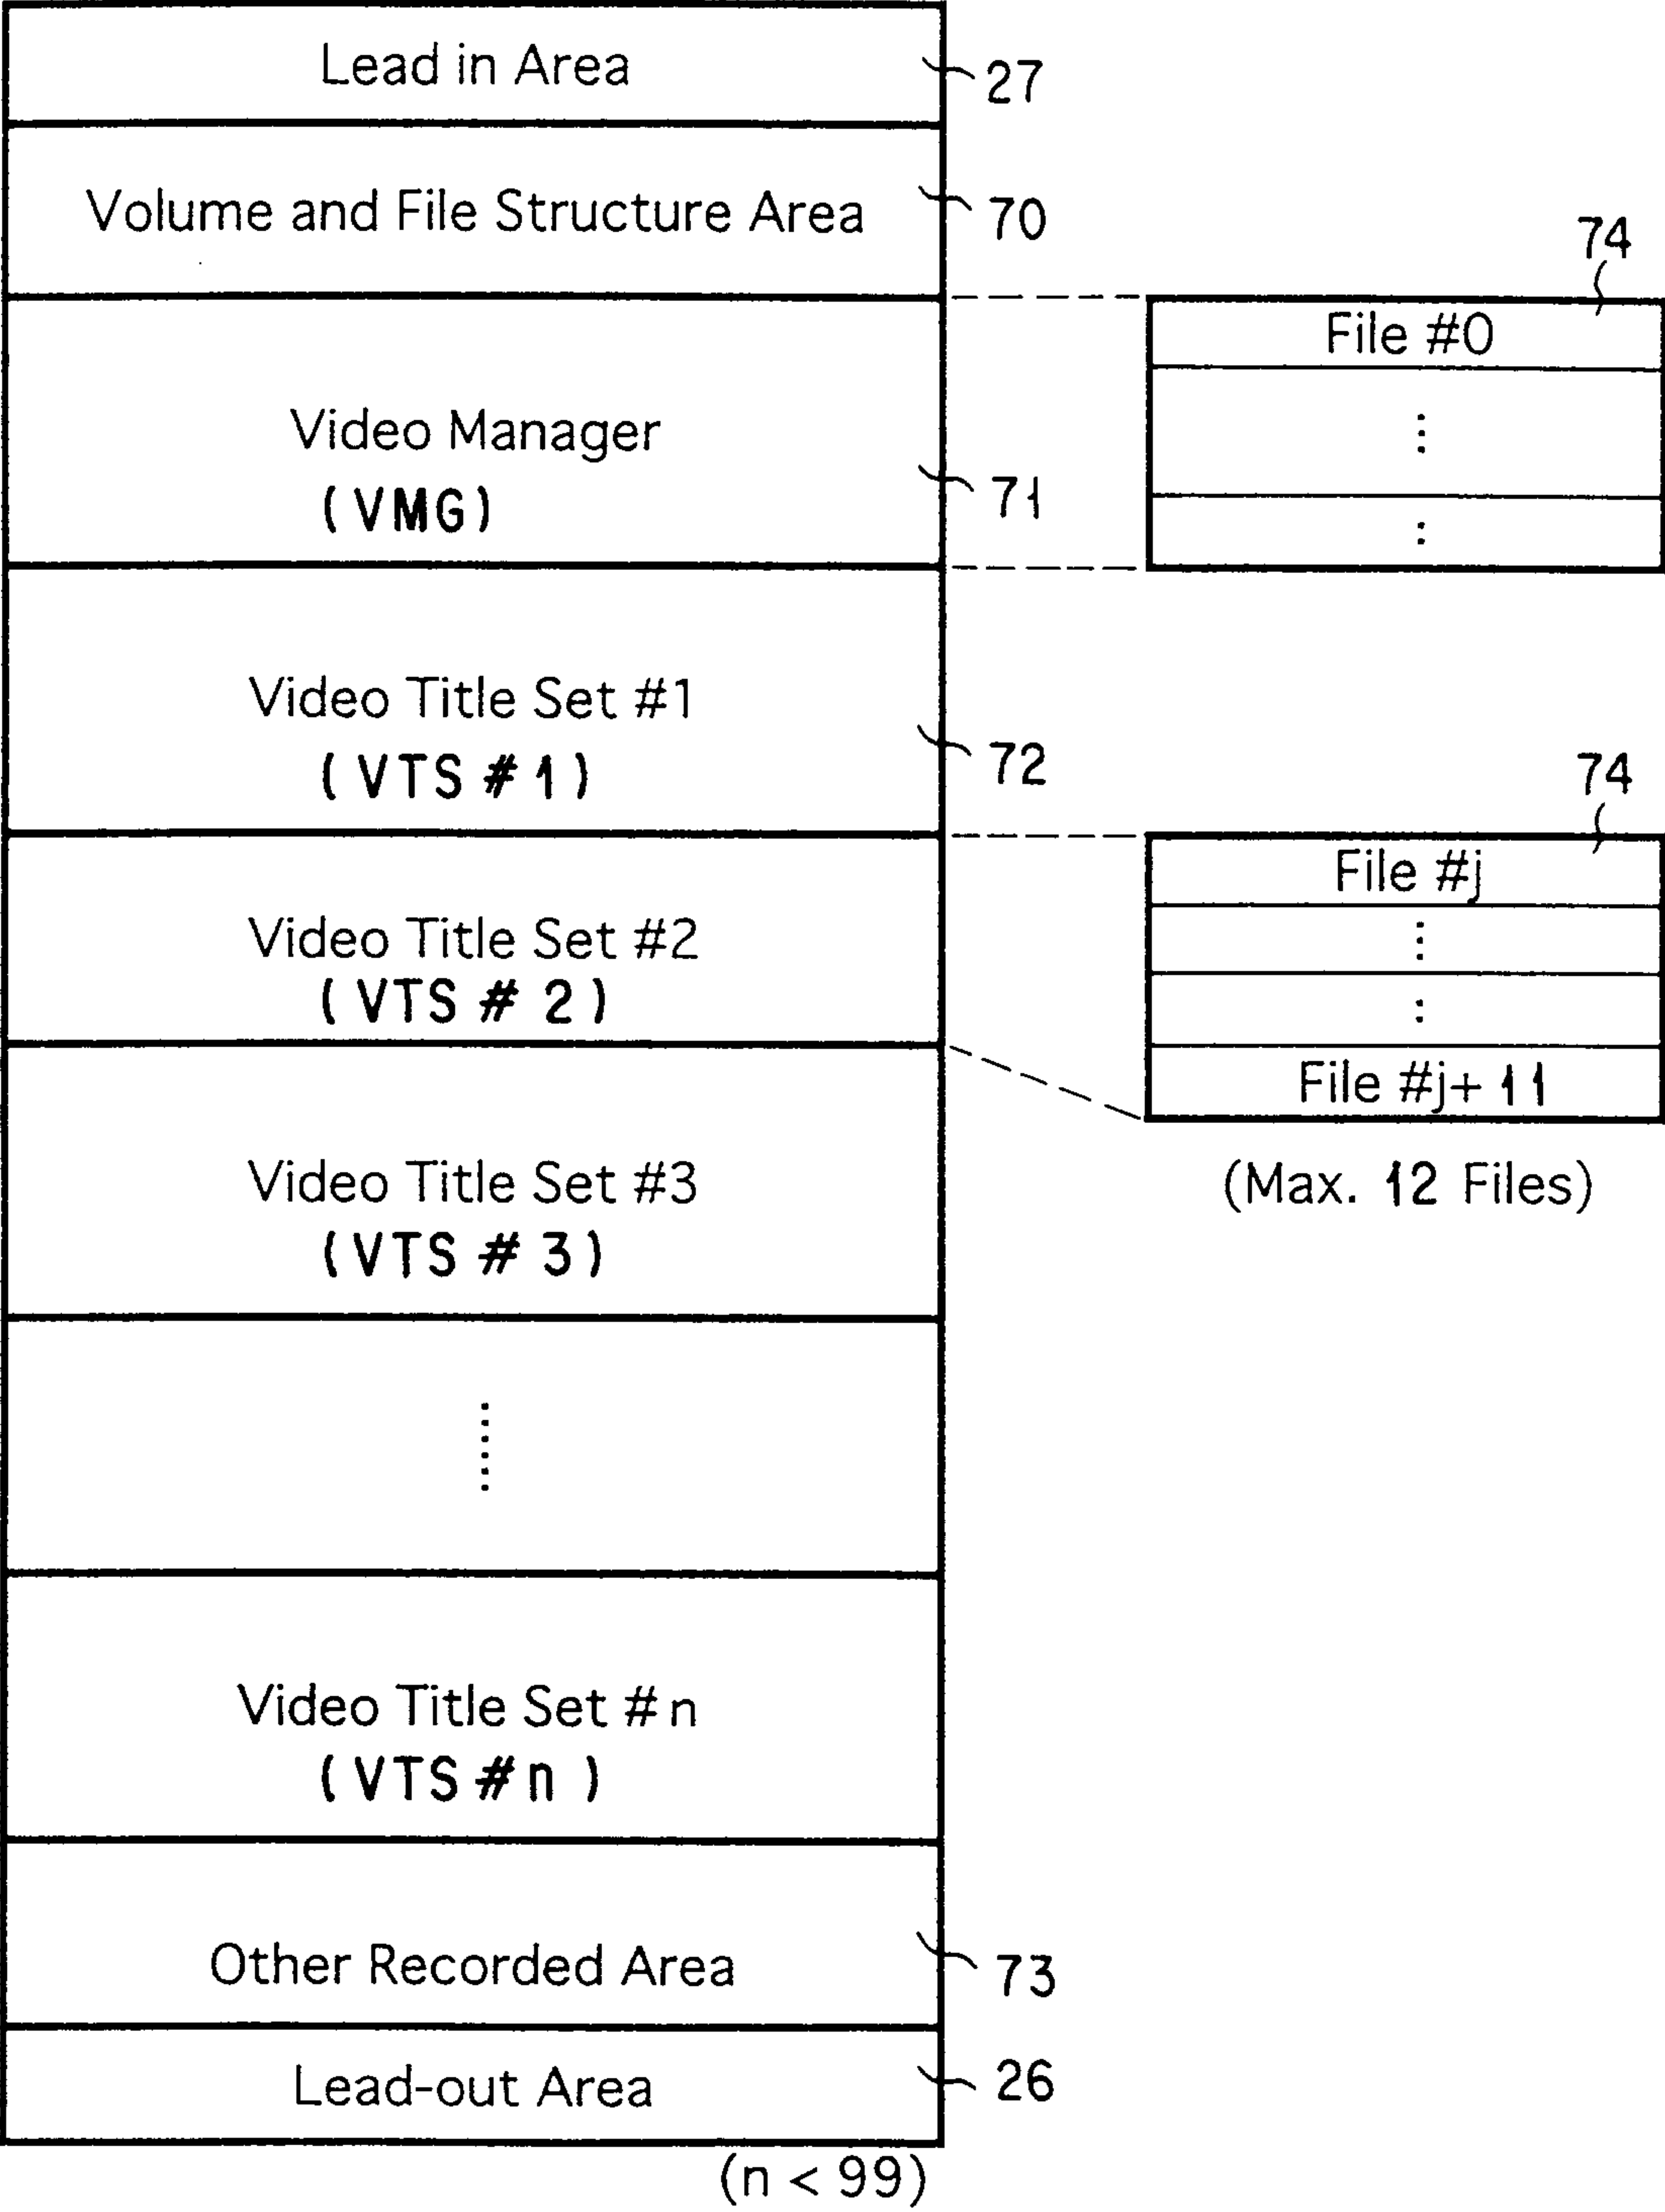

F I G. 4

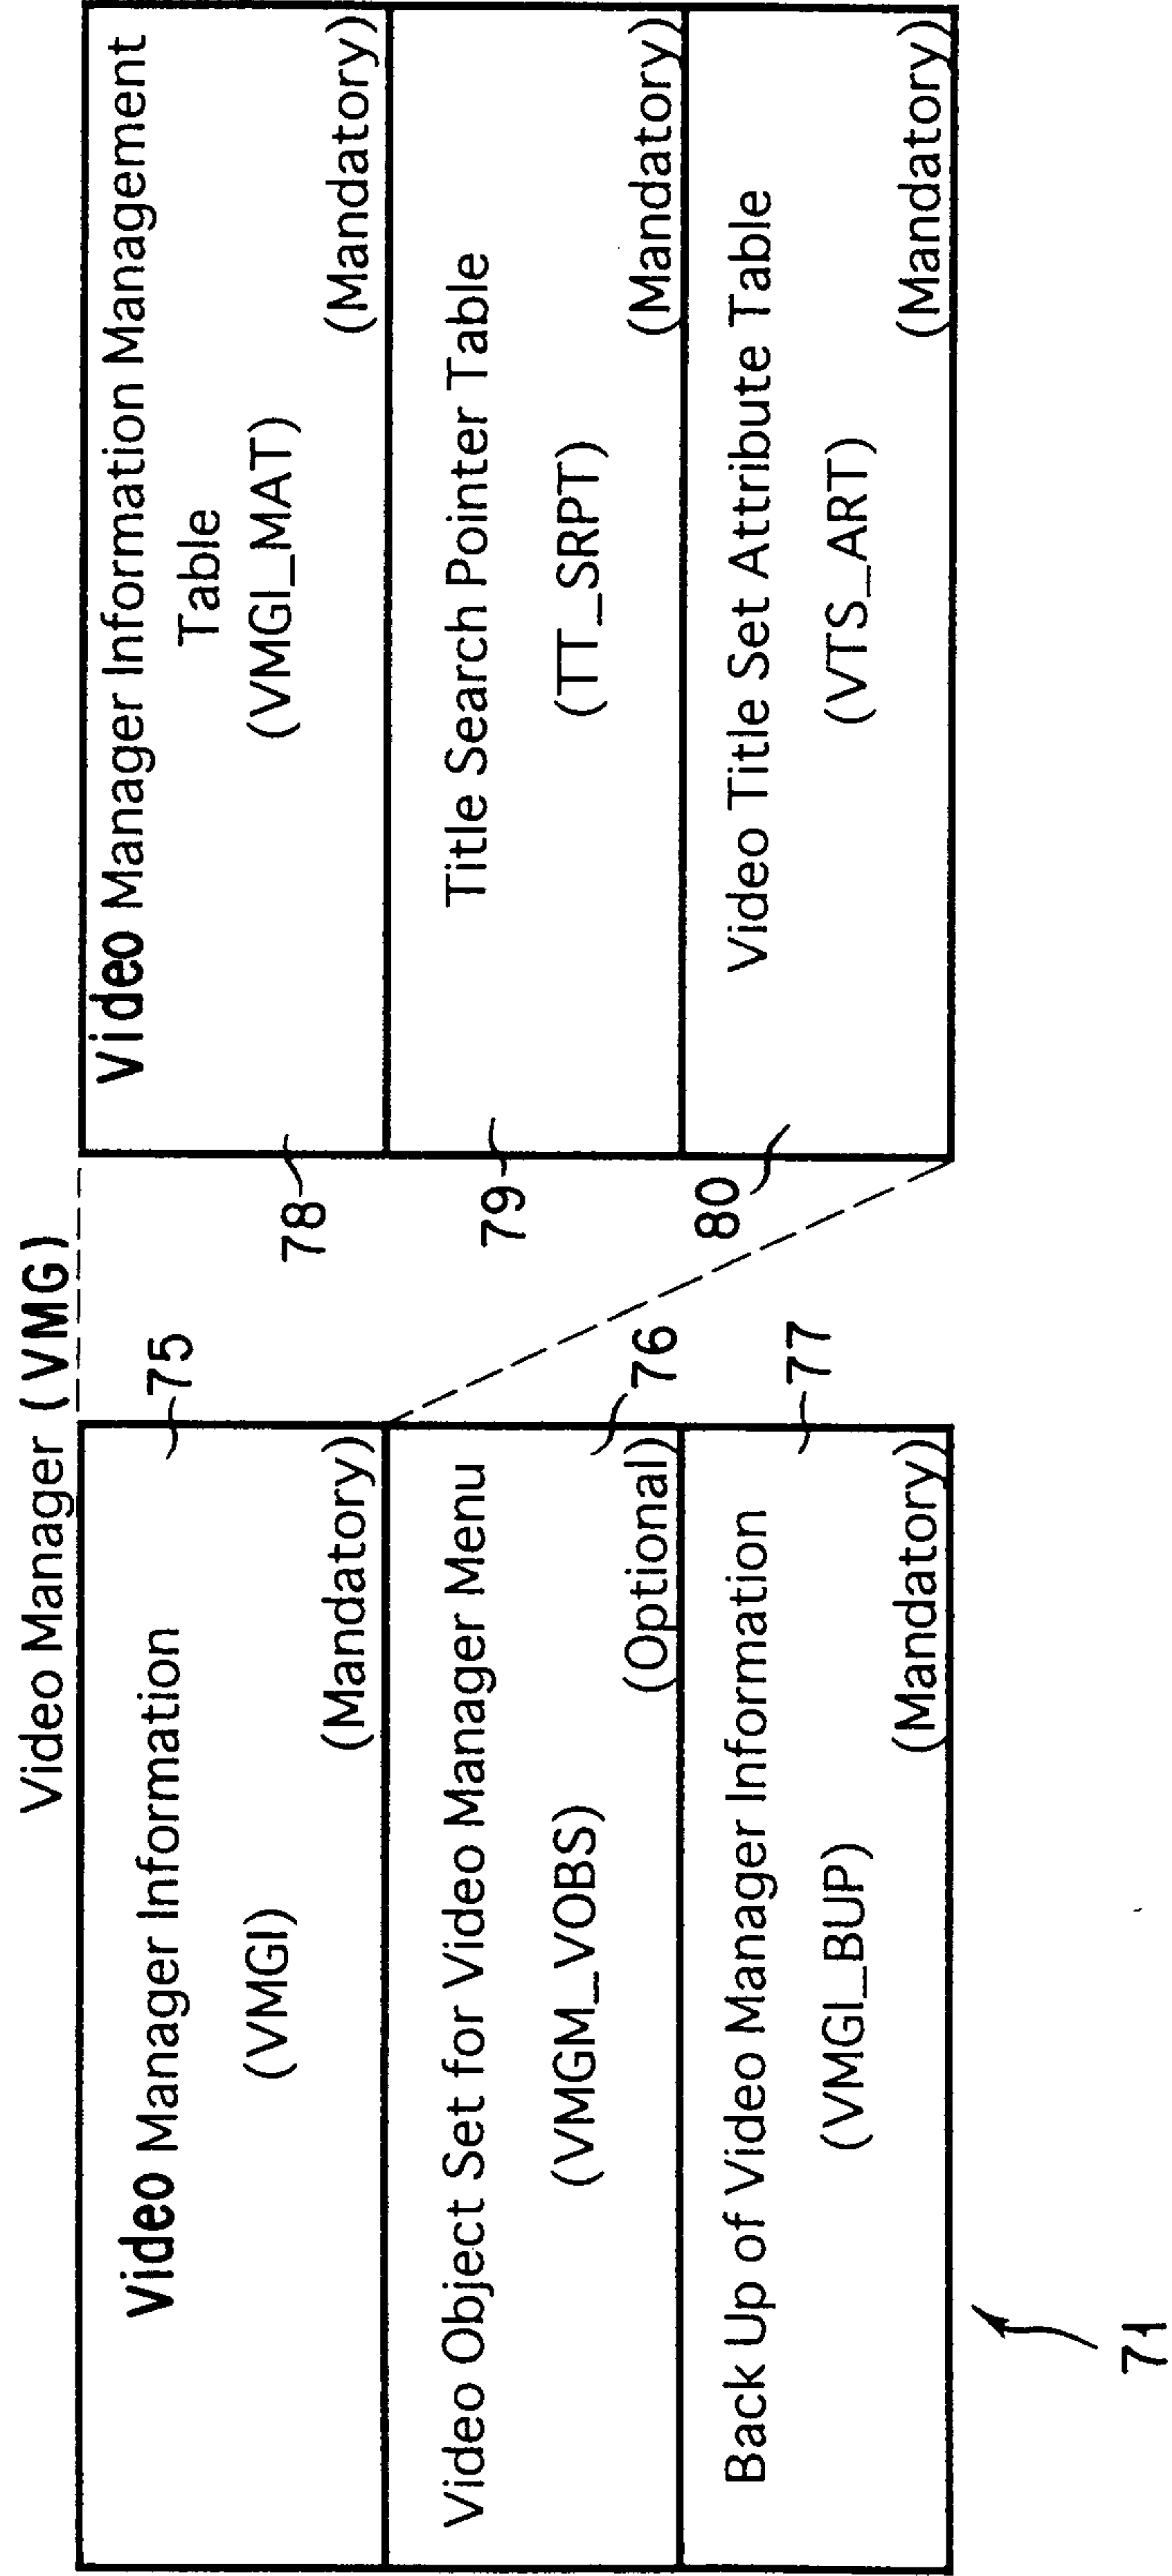


FIG. 5

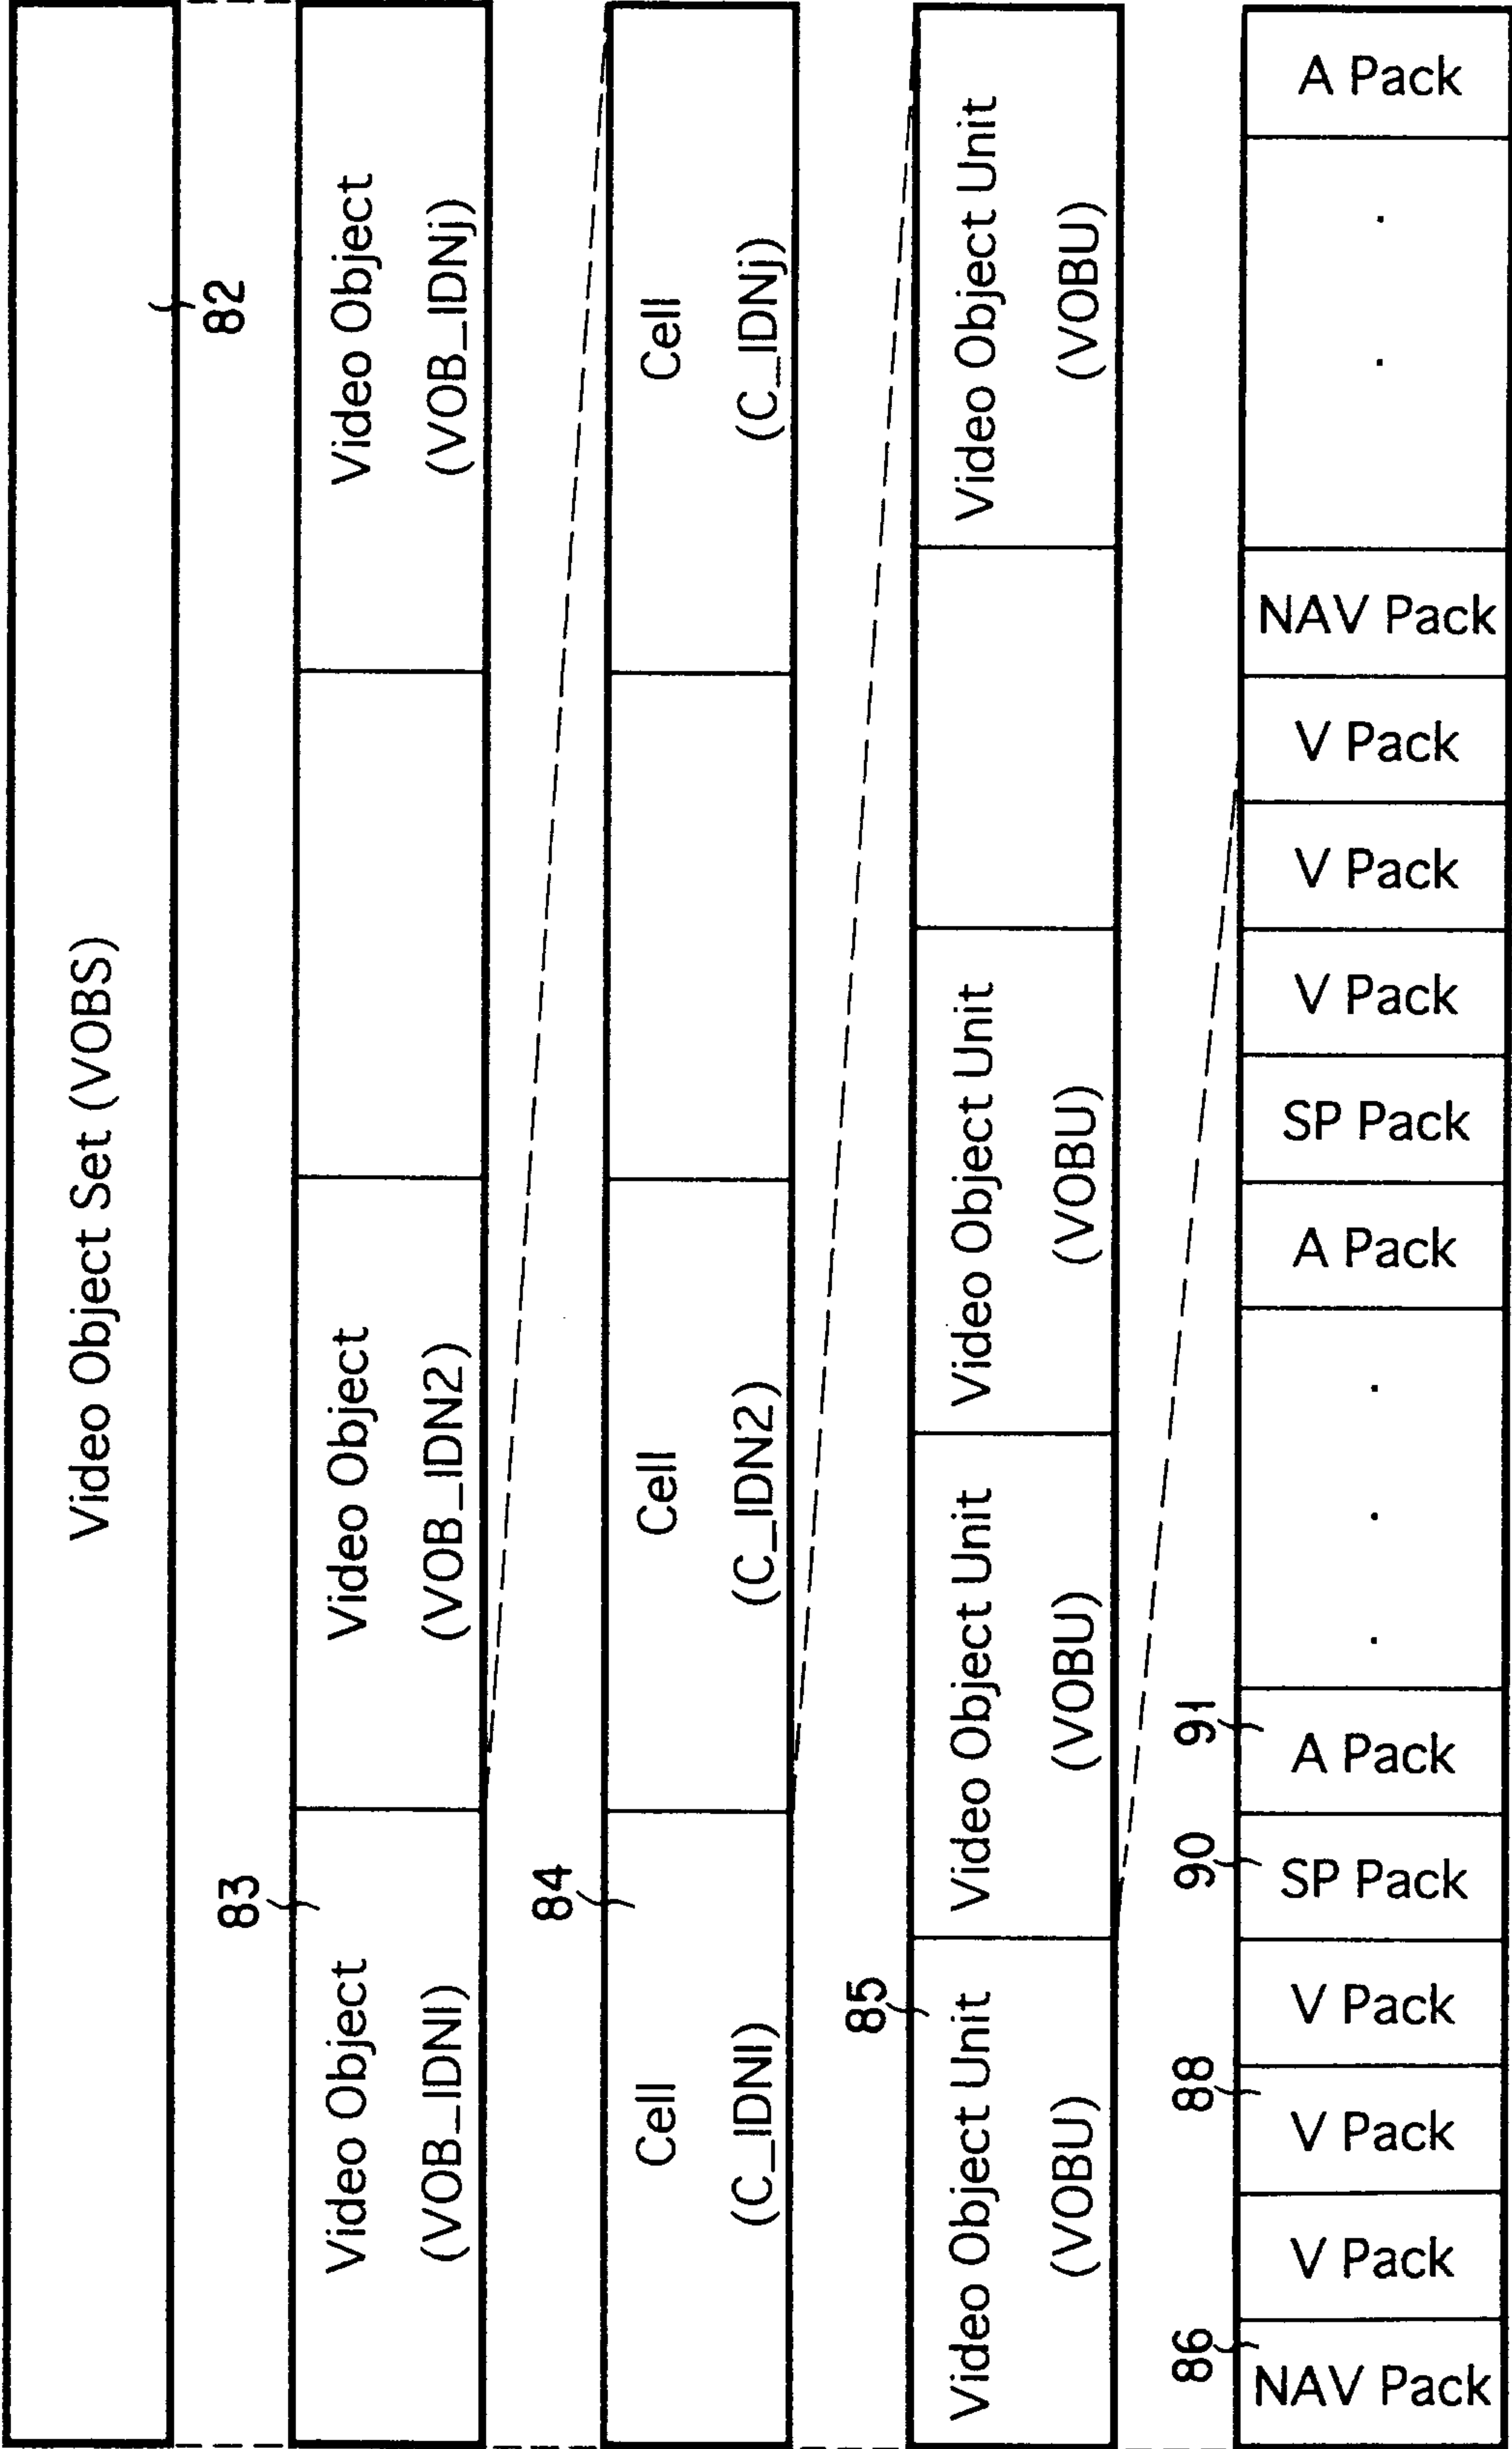


FIG. 6

VMGLMAT (Description order)

Content	
VMG_ID	Video Manager Identifier
VMGI_SZ	Size of Video Manager Information
VERN	Version Number of DVD Video Specification
VMG_CAT	Video Manager Category
VLMS_ID	Volume Set Identifier
VTS_Ns	Number of Video Title Set
PVR_ID	Provider Unique ID
VMGI_MAT_EA	End Address of VMGI_MAT
VMGM_VOBS_SA	Video Manager Menu Video Object Set Start Address
TT_SRPT_SA	Start Address of TT_SRPT
VTS_ATRT_SA	Start Address of VTS_ATRT
VMGM_V_ATR	Video Attribute of VMGM
VMGM_AST_Ns	Number of Audio Stream of VMGM
VMGM_AST_ATR	Audio Stream Attribute of VMGM
VMGM_SPST_Ns	Number of Sub-picture Stream of VMGM
VMGM_SPST_ATR	Sub-picture Stream Attribute of VMGM

FIG. 7

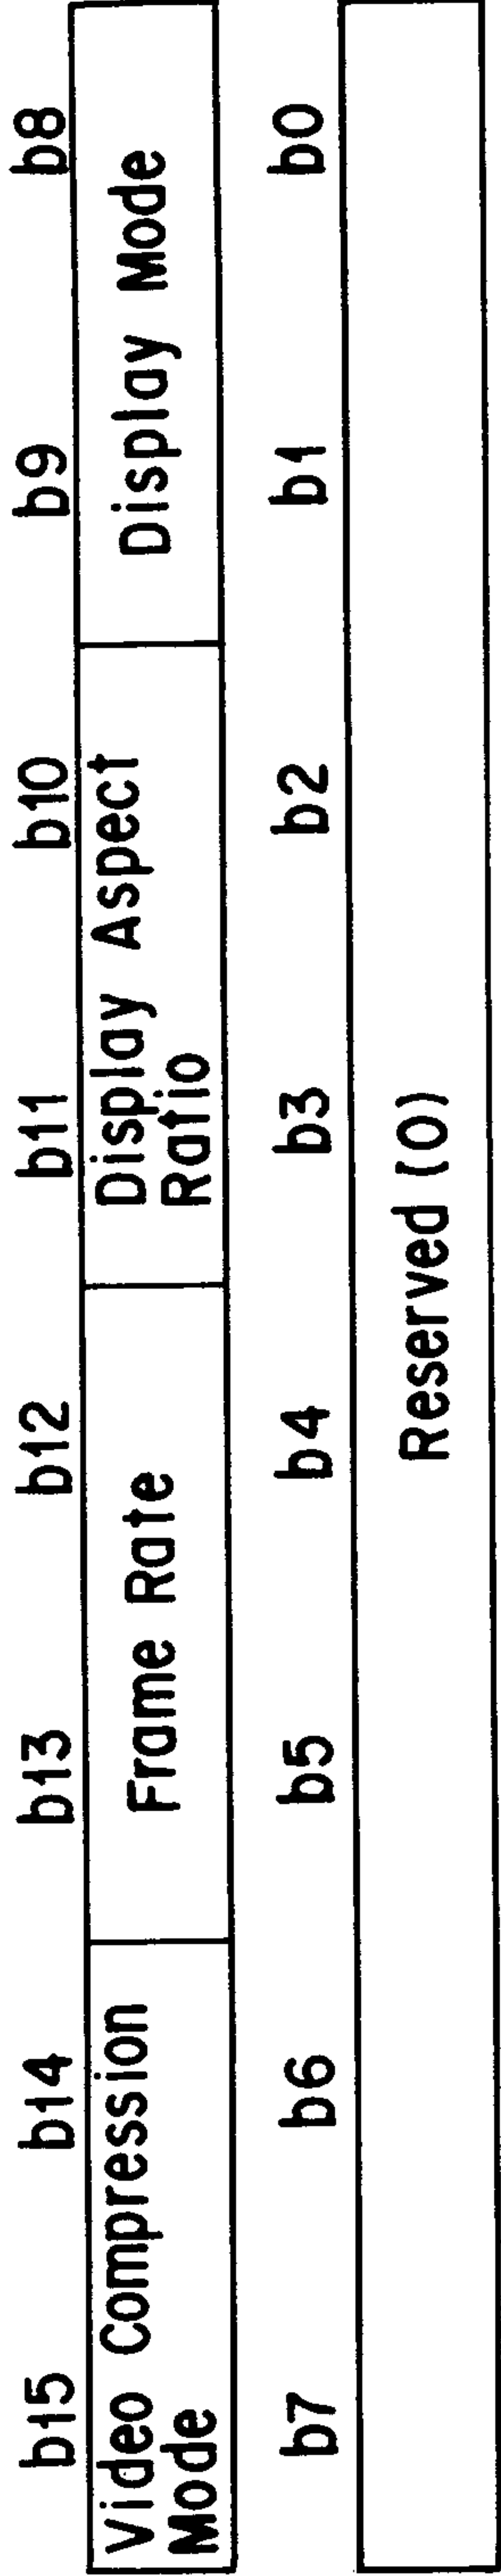


FIG. 8

2173701

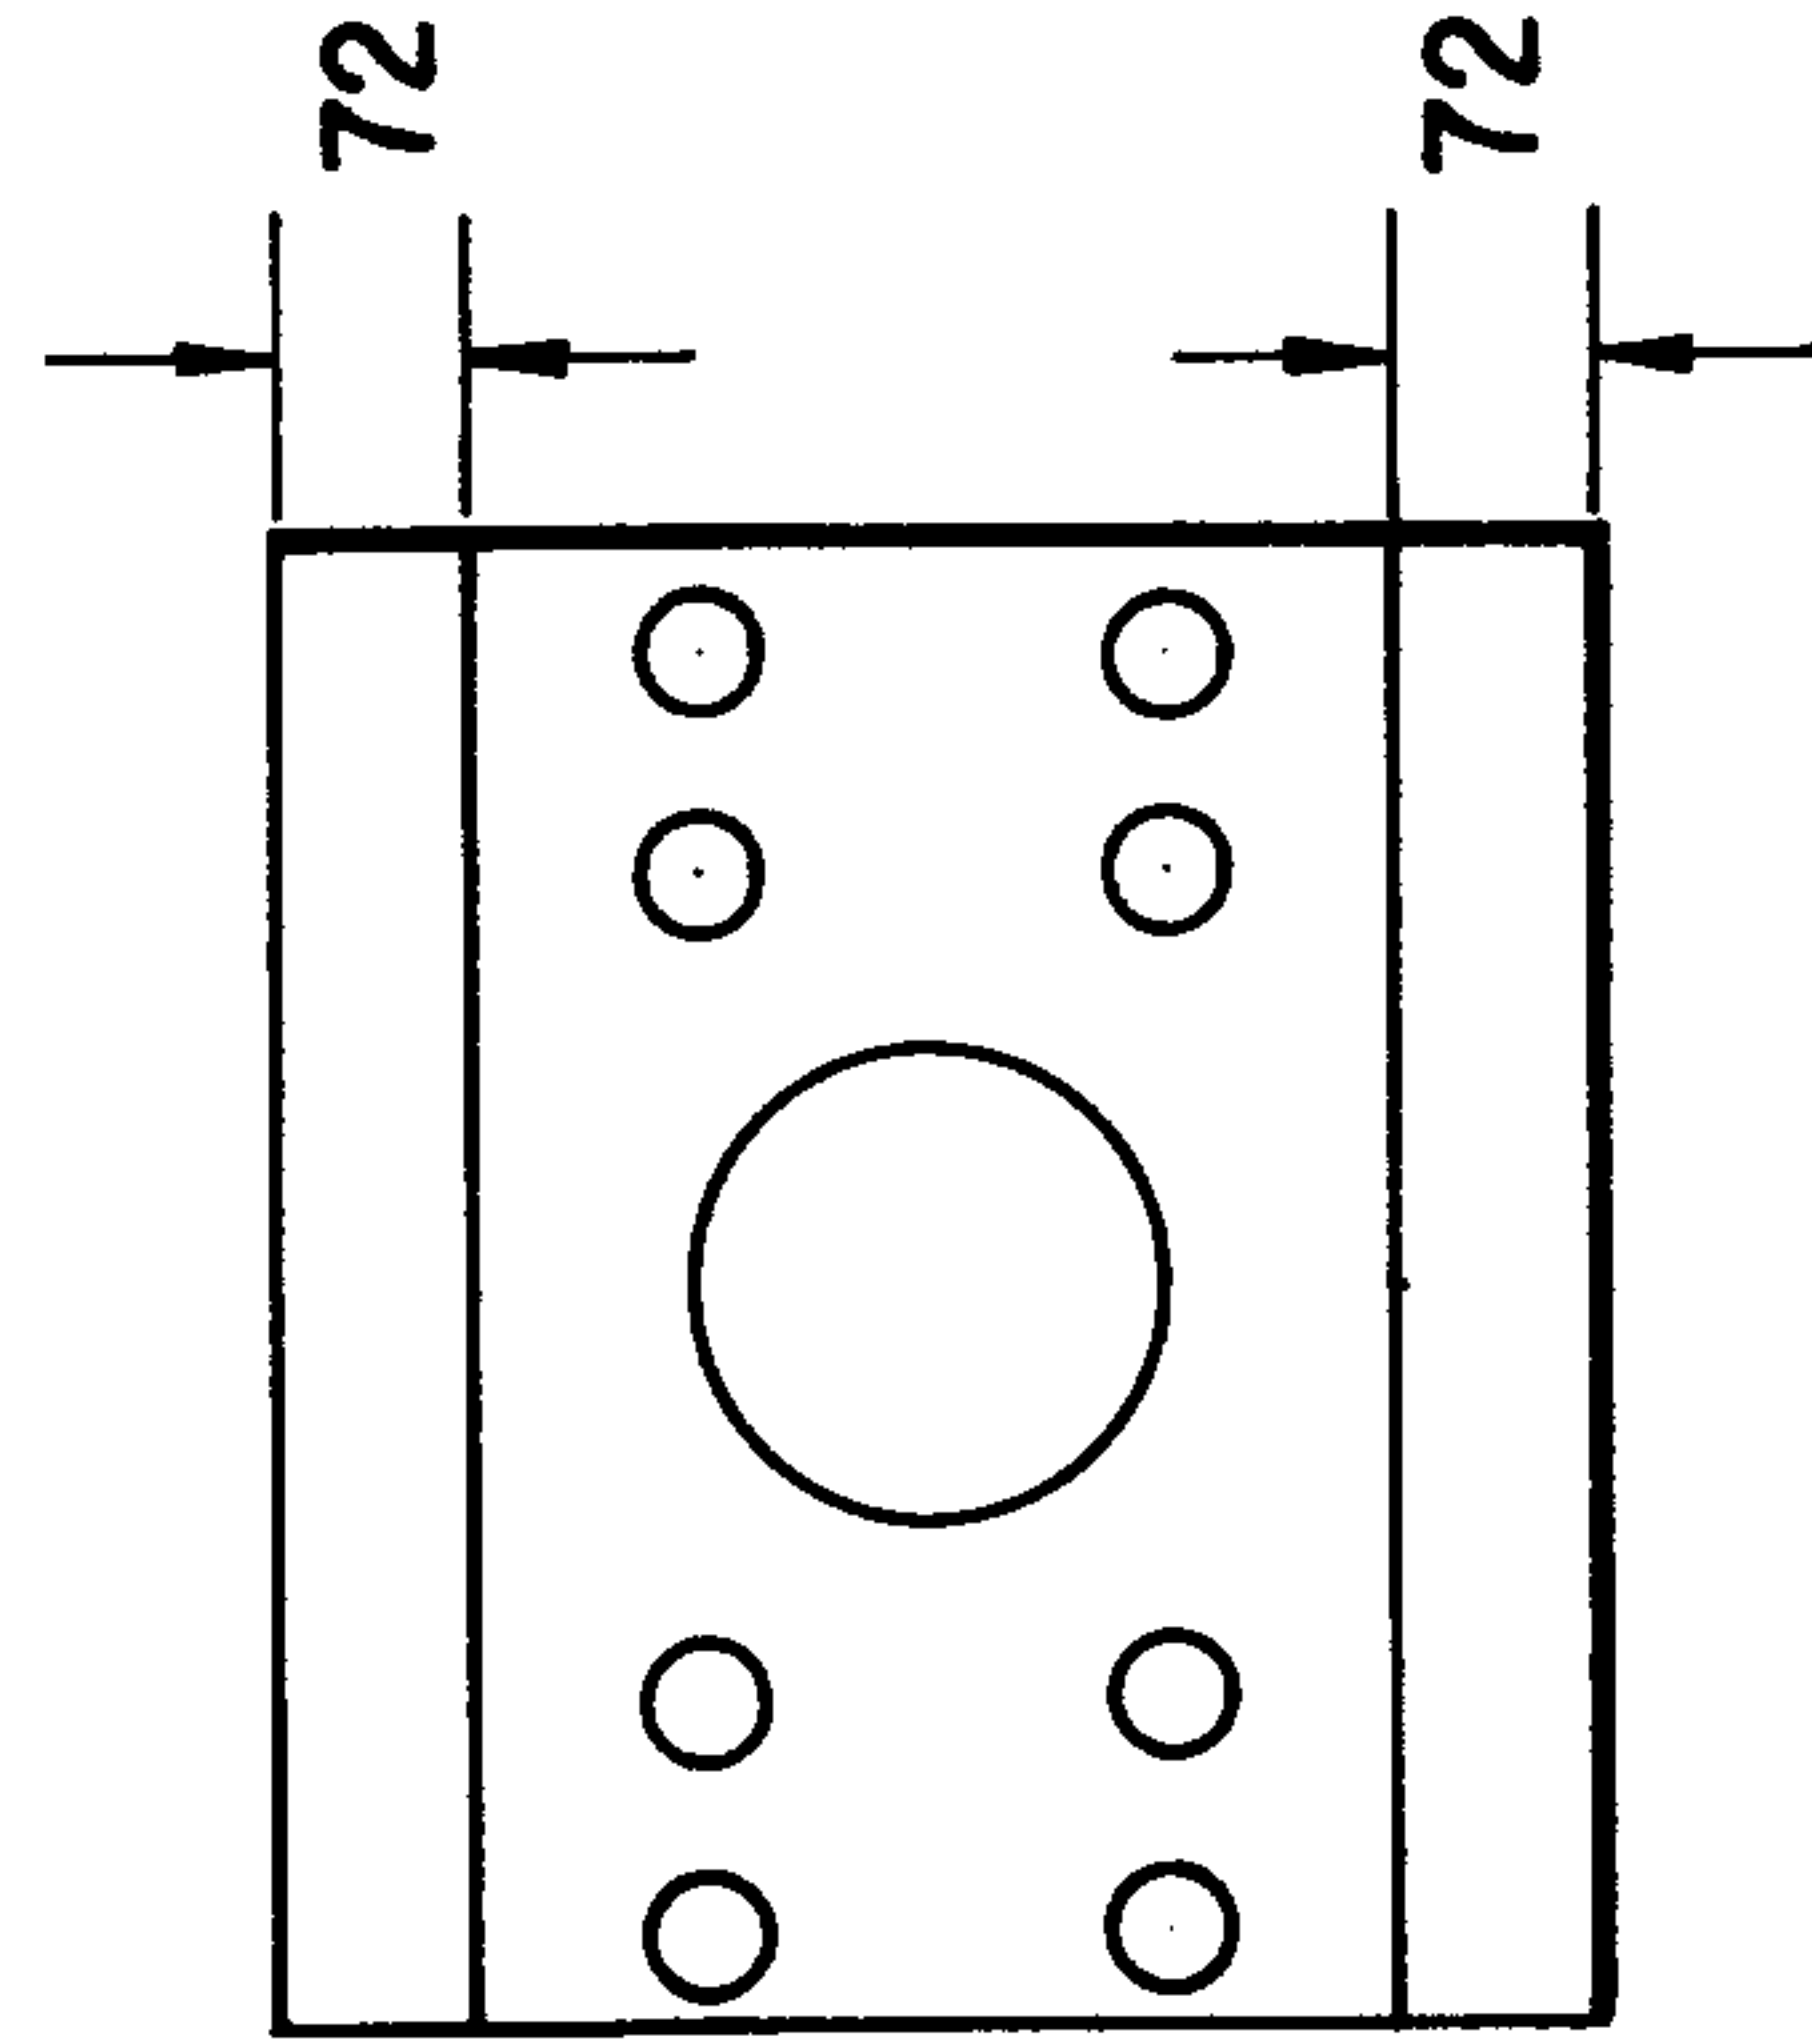


FIG. 10A

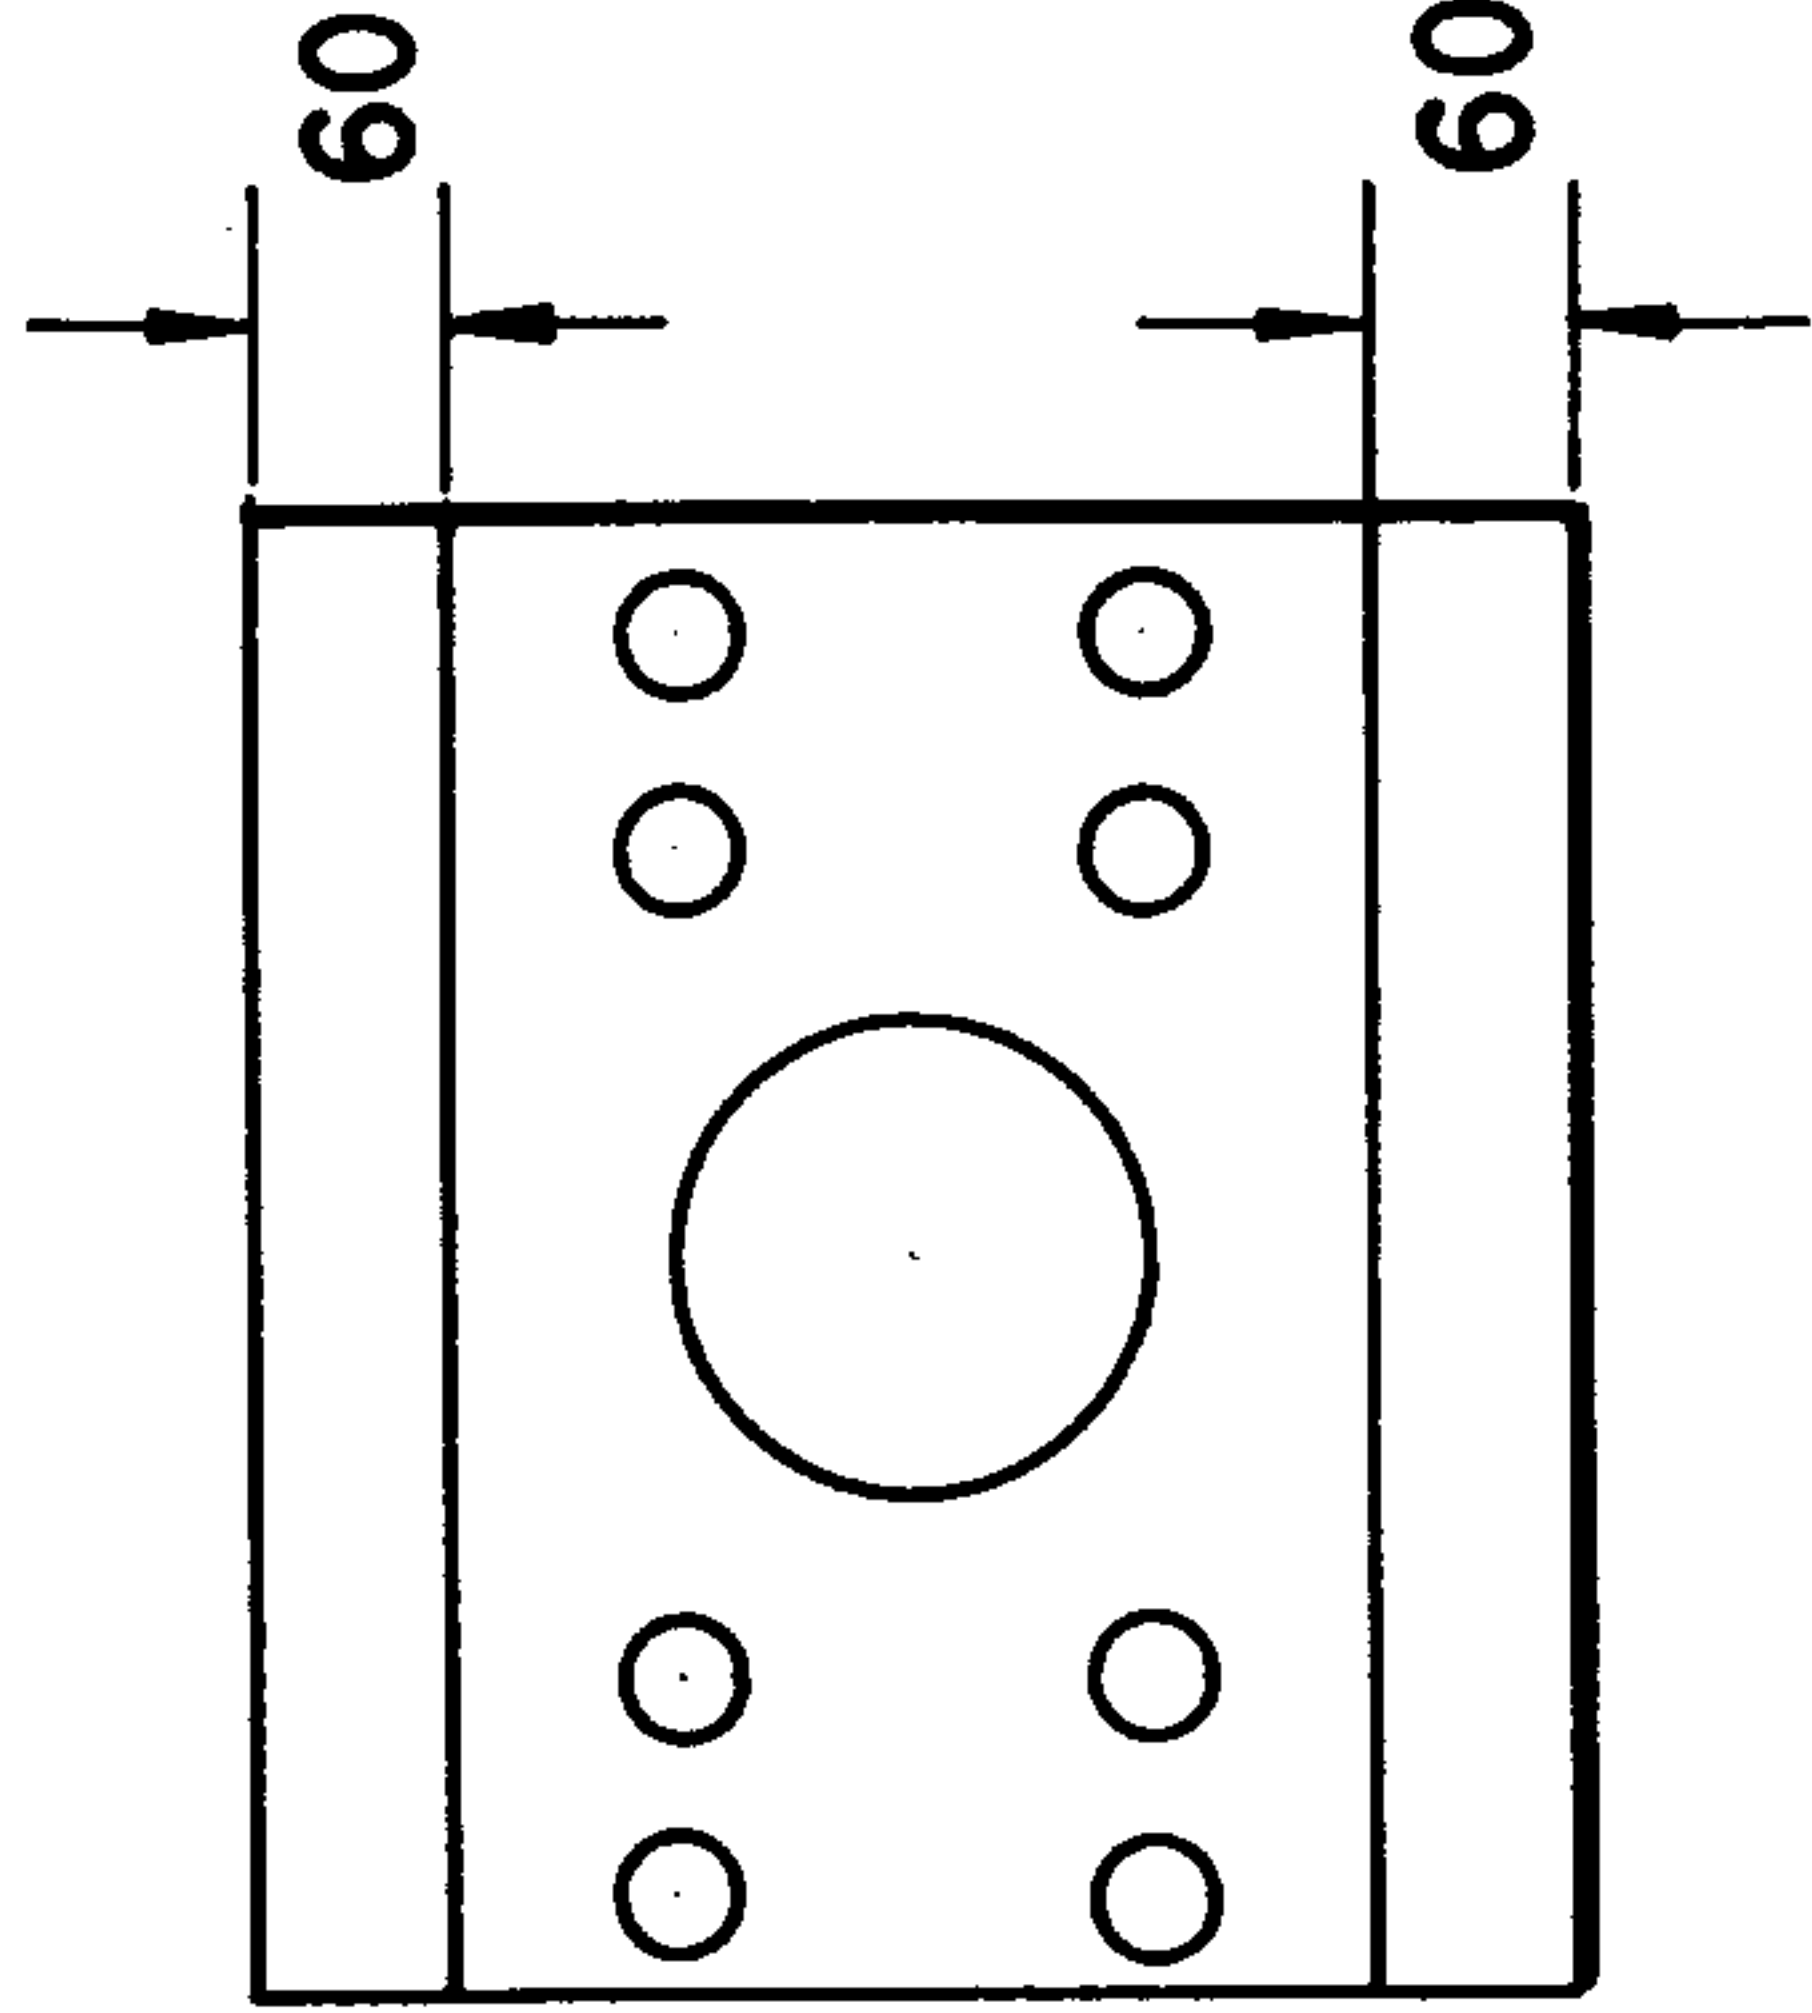


FIG. 10B

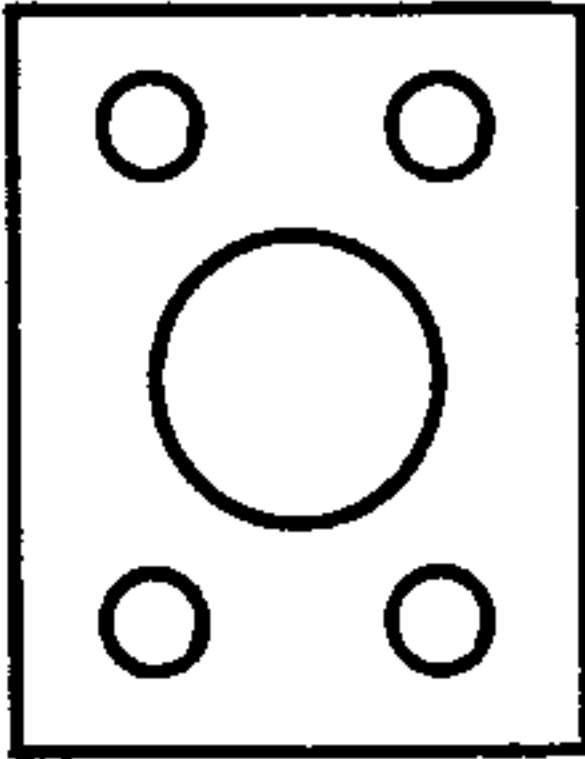
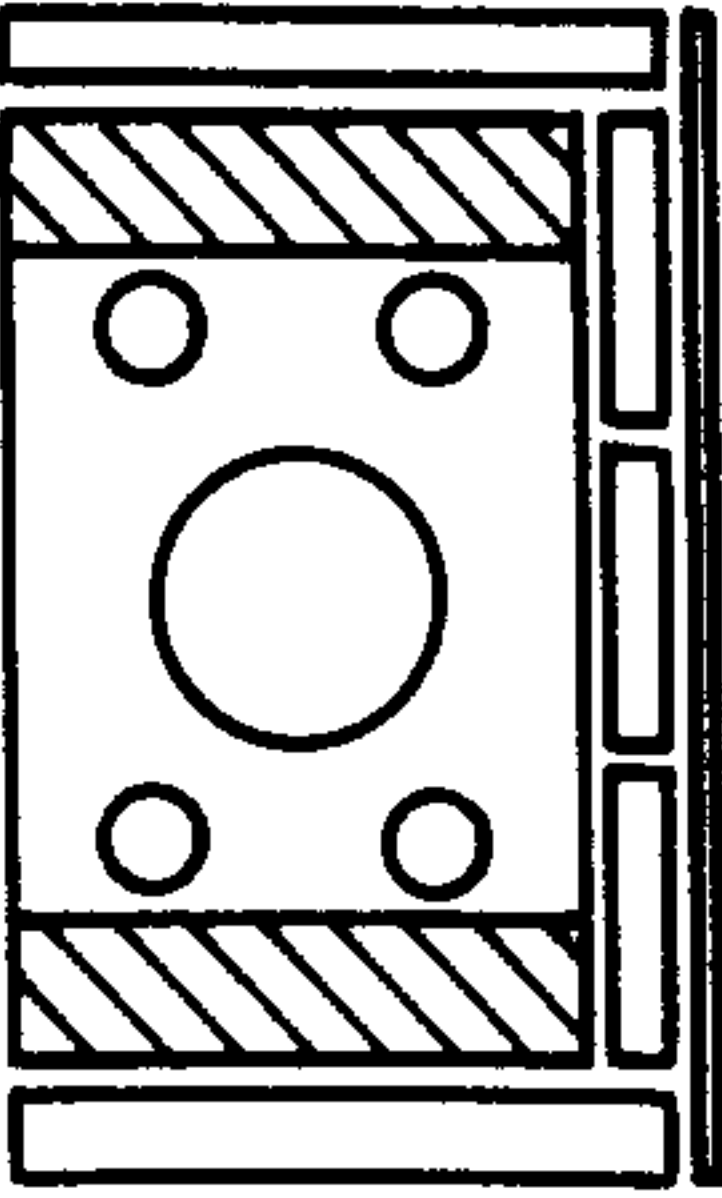
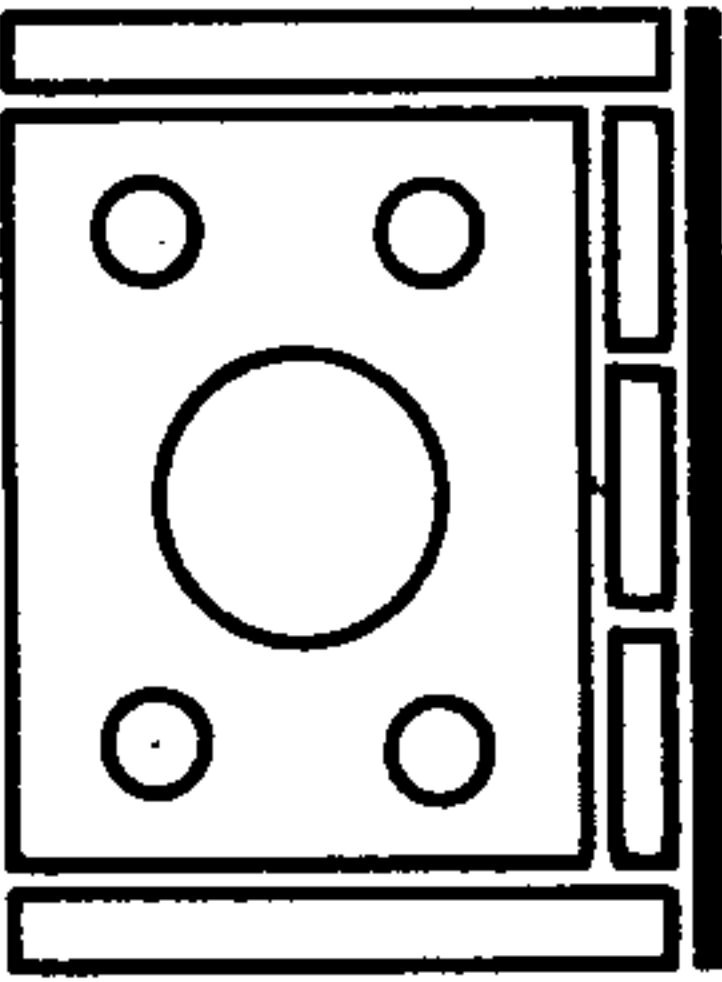
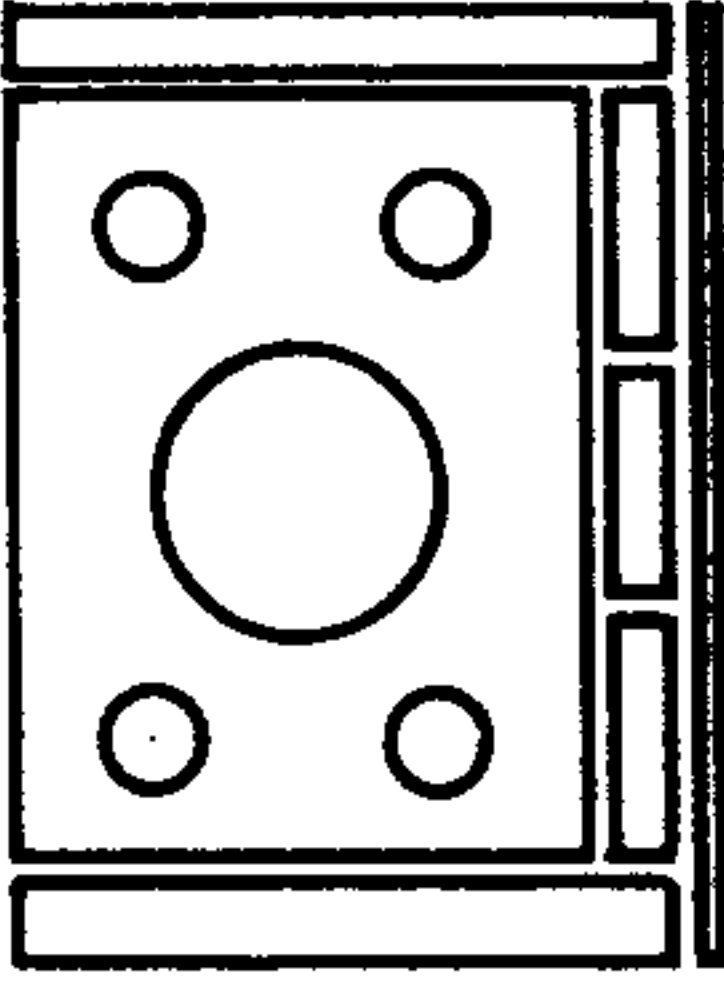
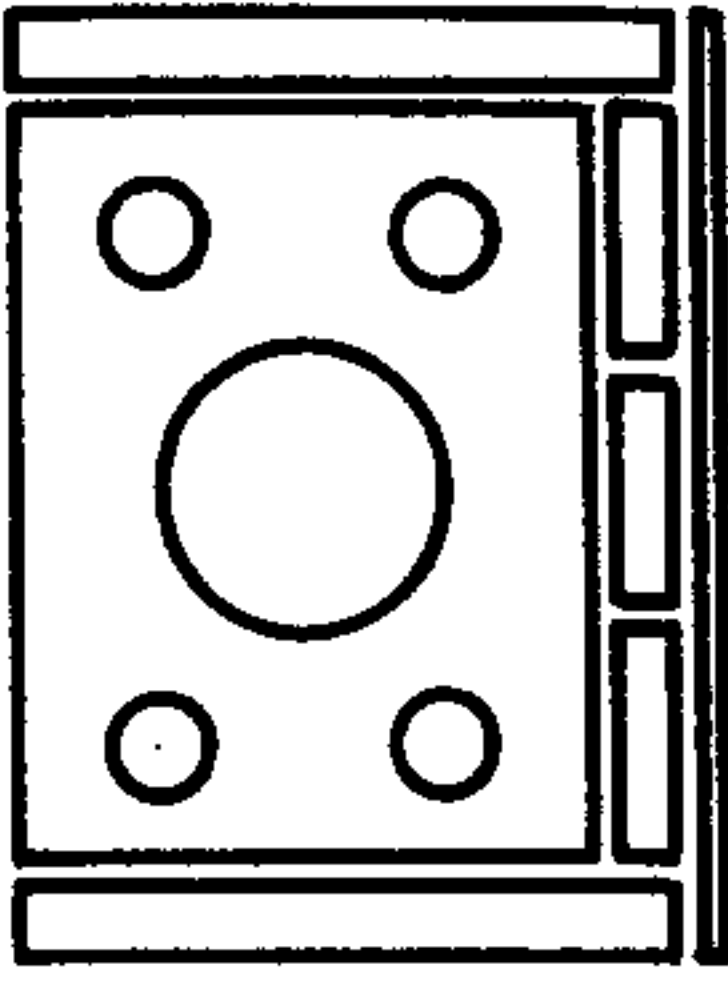
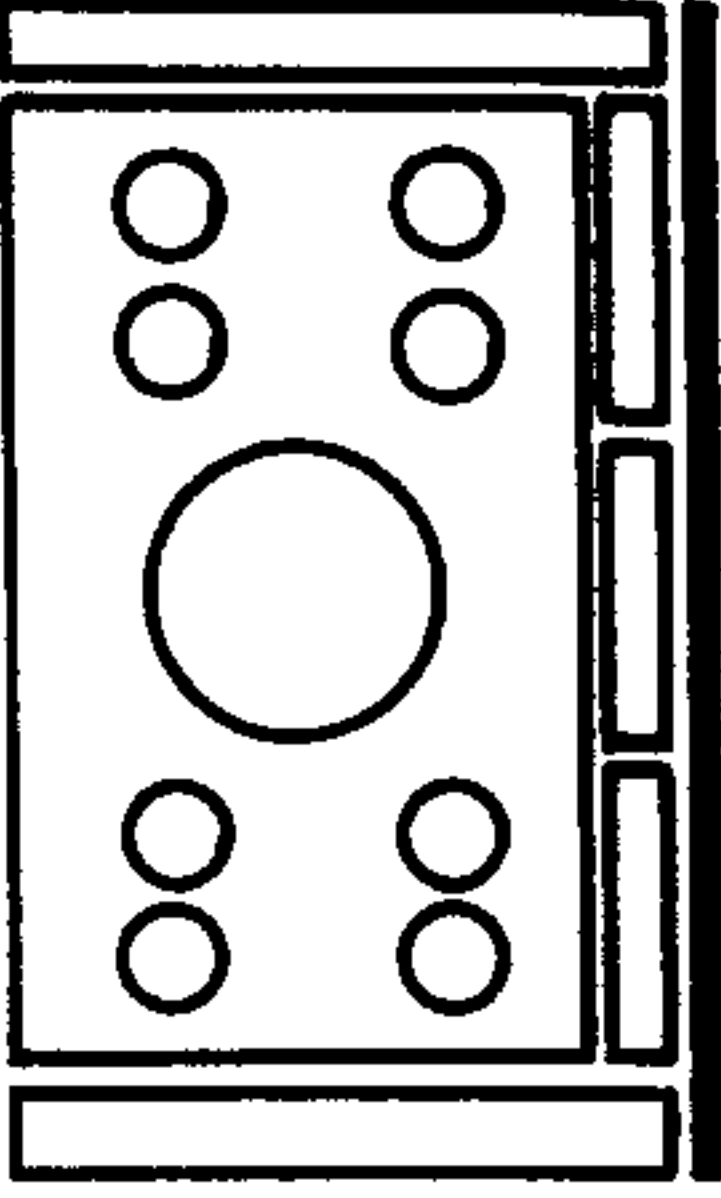
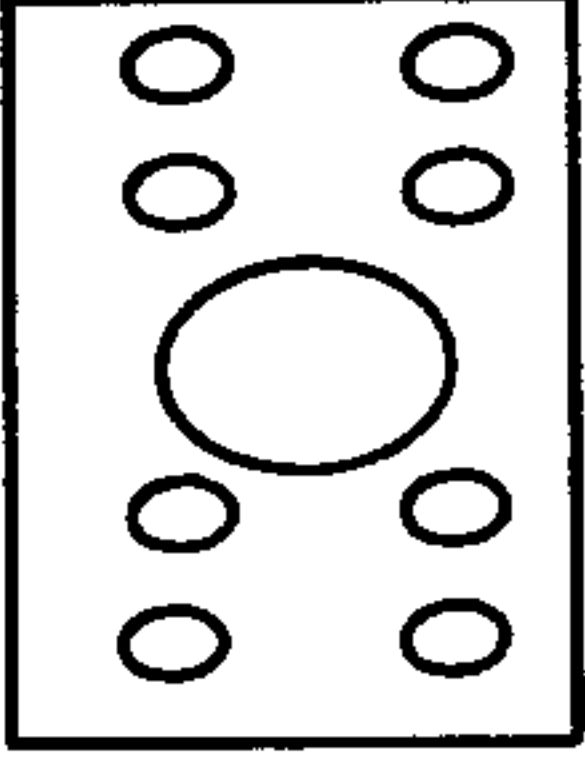
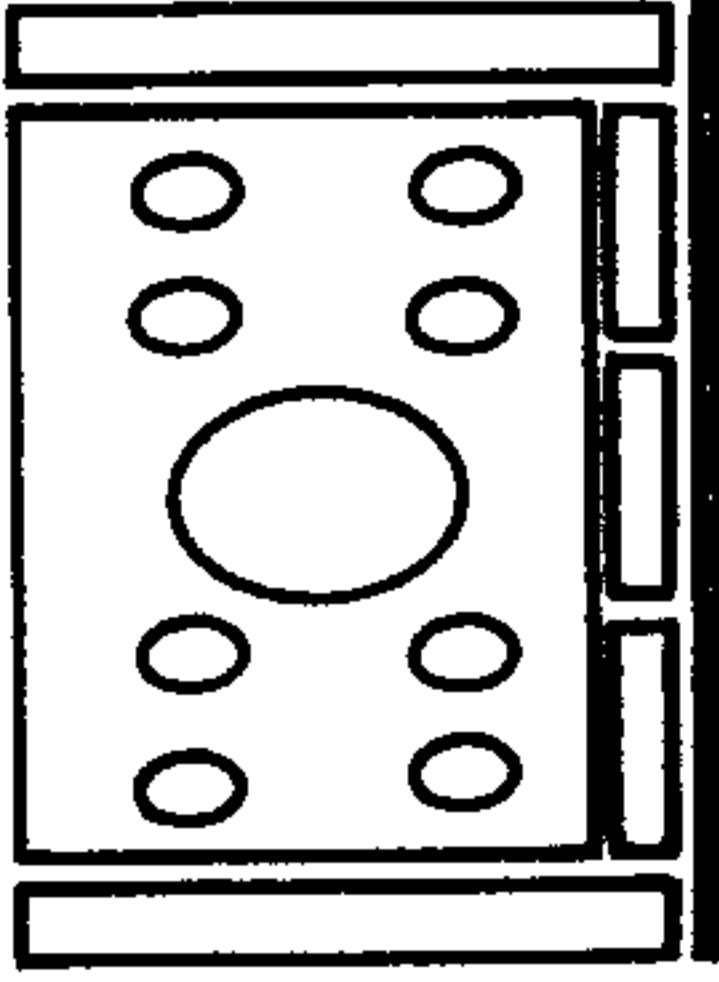
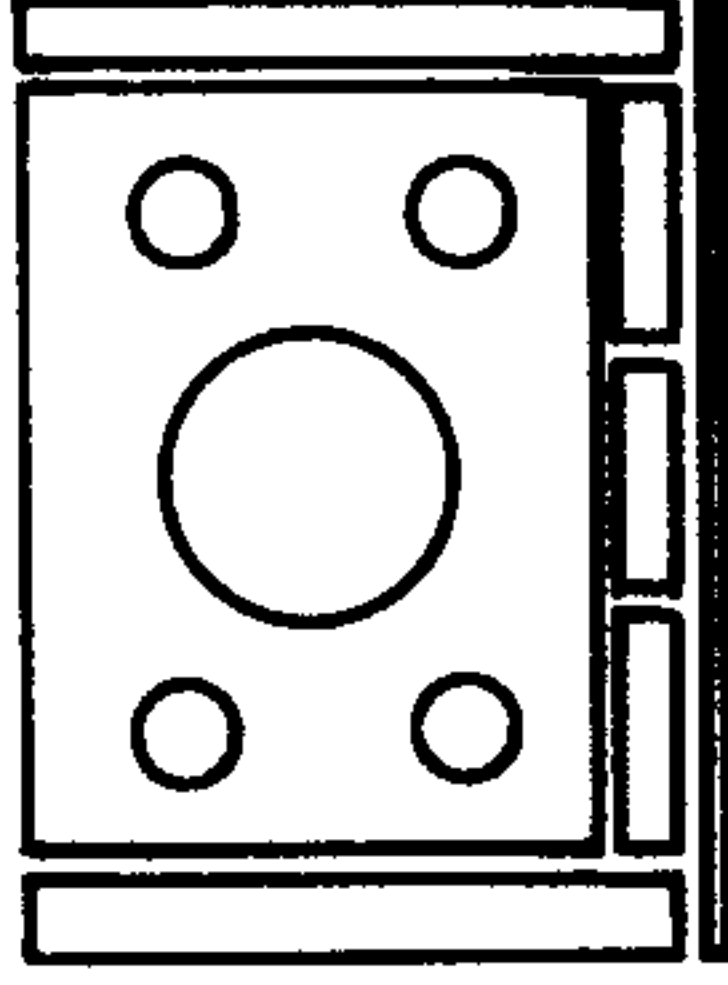
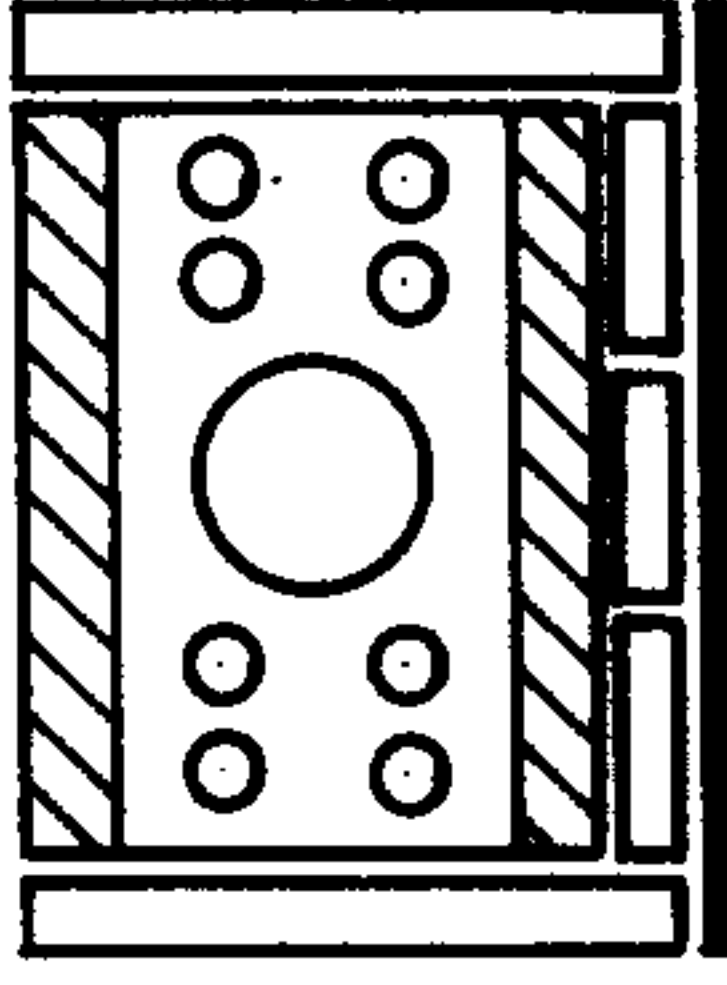
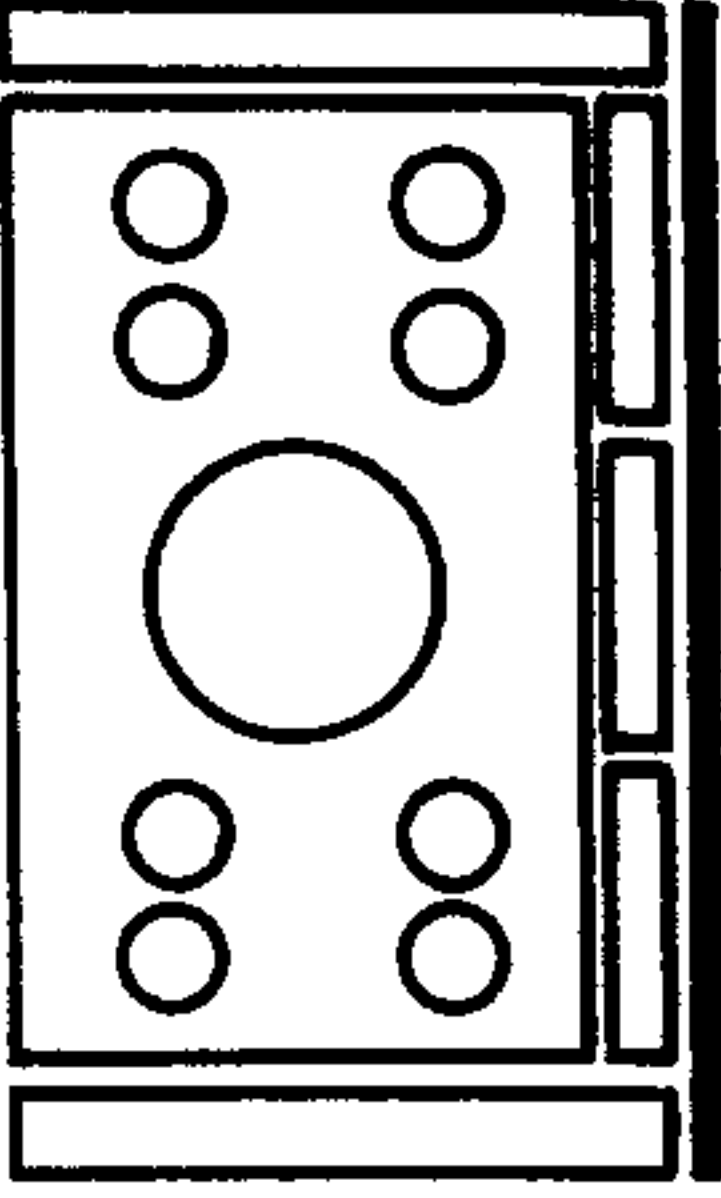
Disc Recorded Data		Playback Screen Image on TV Monitor			
Display Aspect Ratio	Description Picture Data	TV Aspect Ratio		Display Mode	
		3 / 4		9 / 16	
00 (3/4)		00 : Normal	01 : Pan - scan	10 : Letterbox	
					
11 (9/16)					

FIG. 9

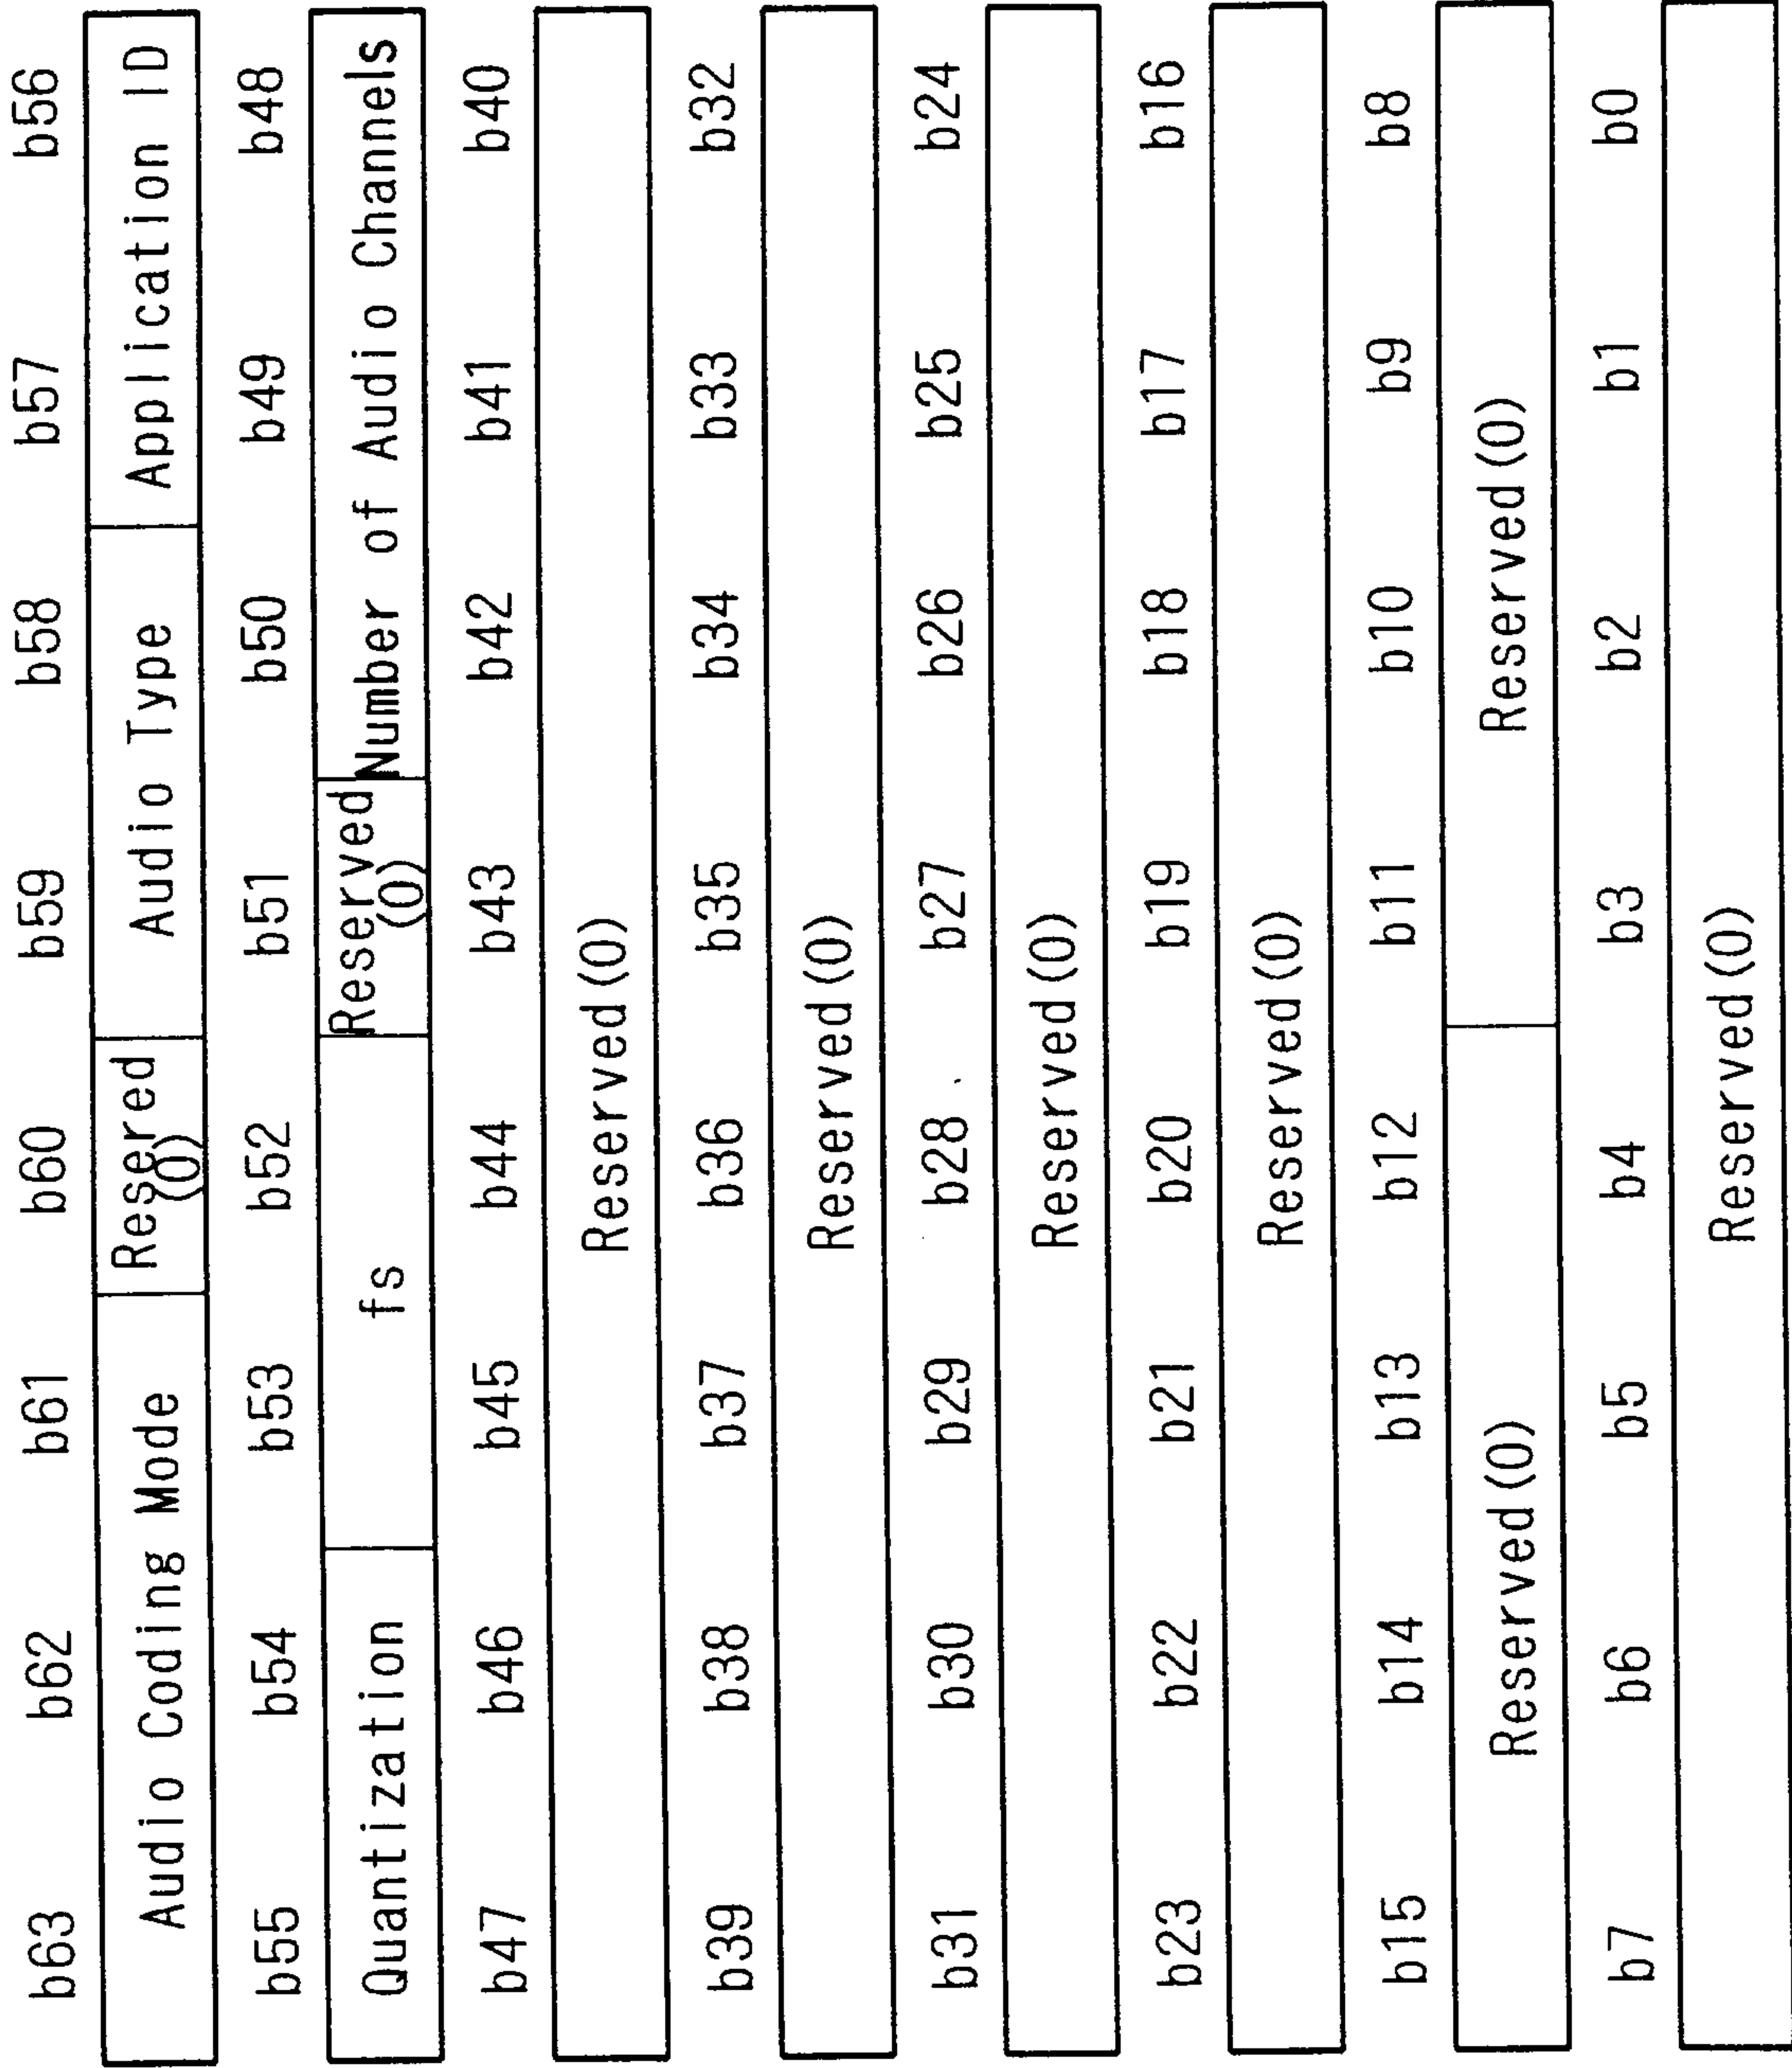


FIG. 11

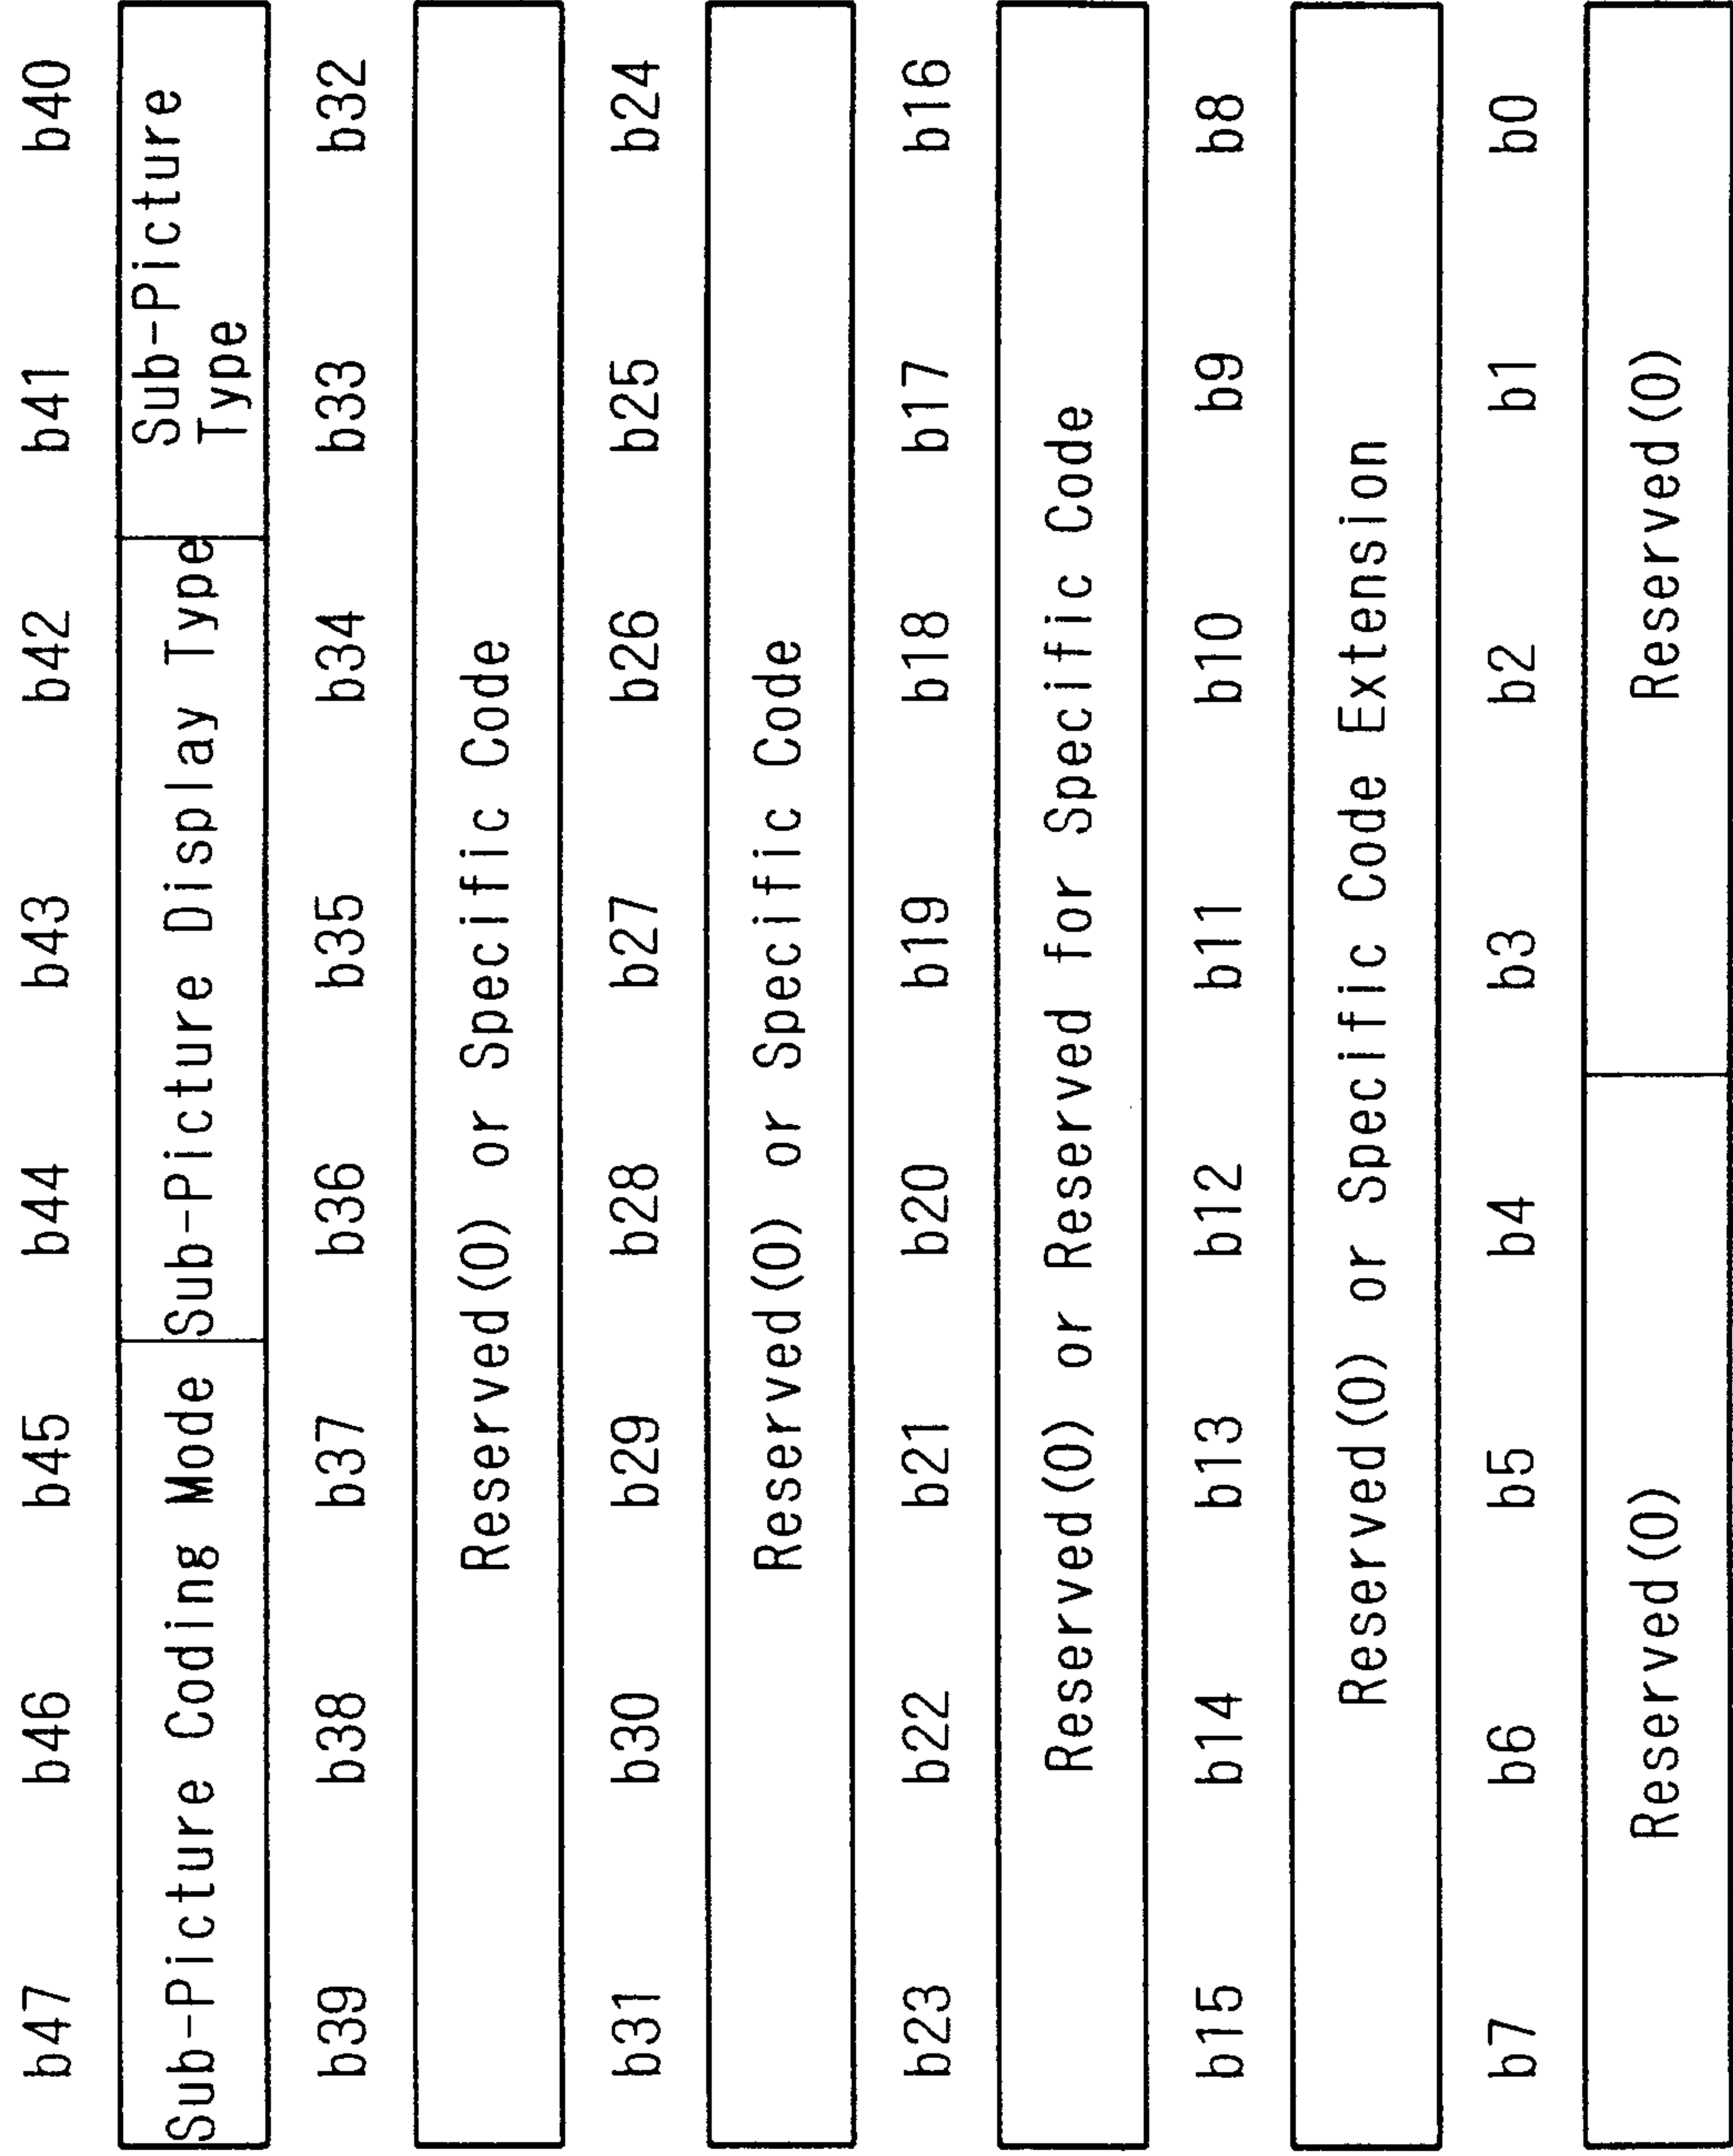


FIG. 12

TT_SRPT

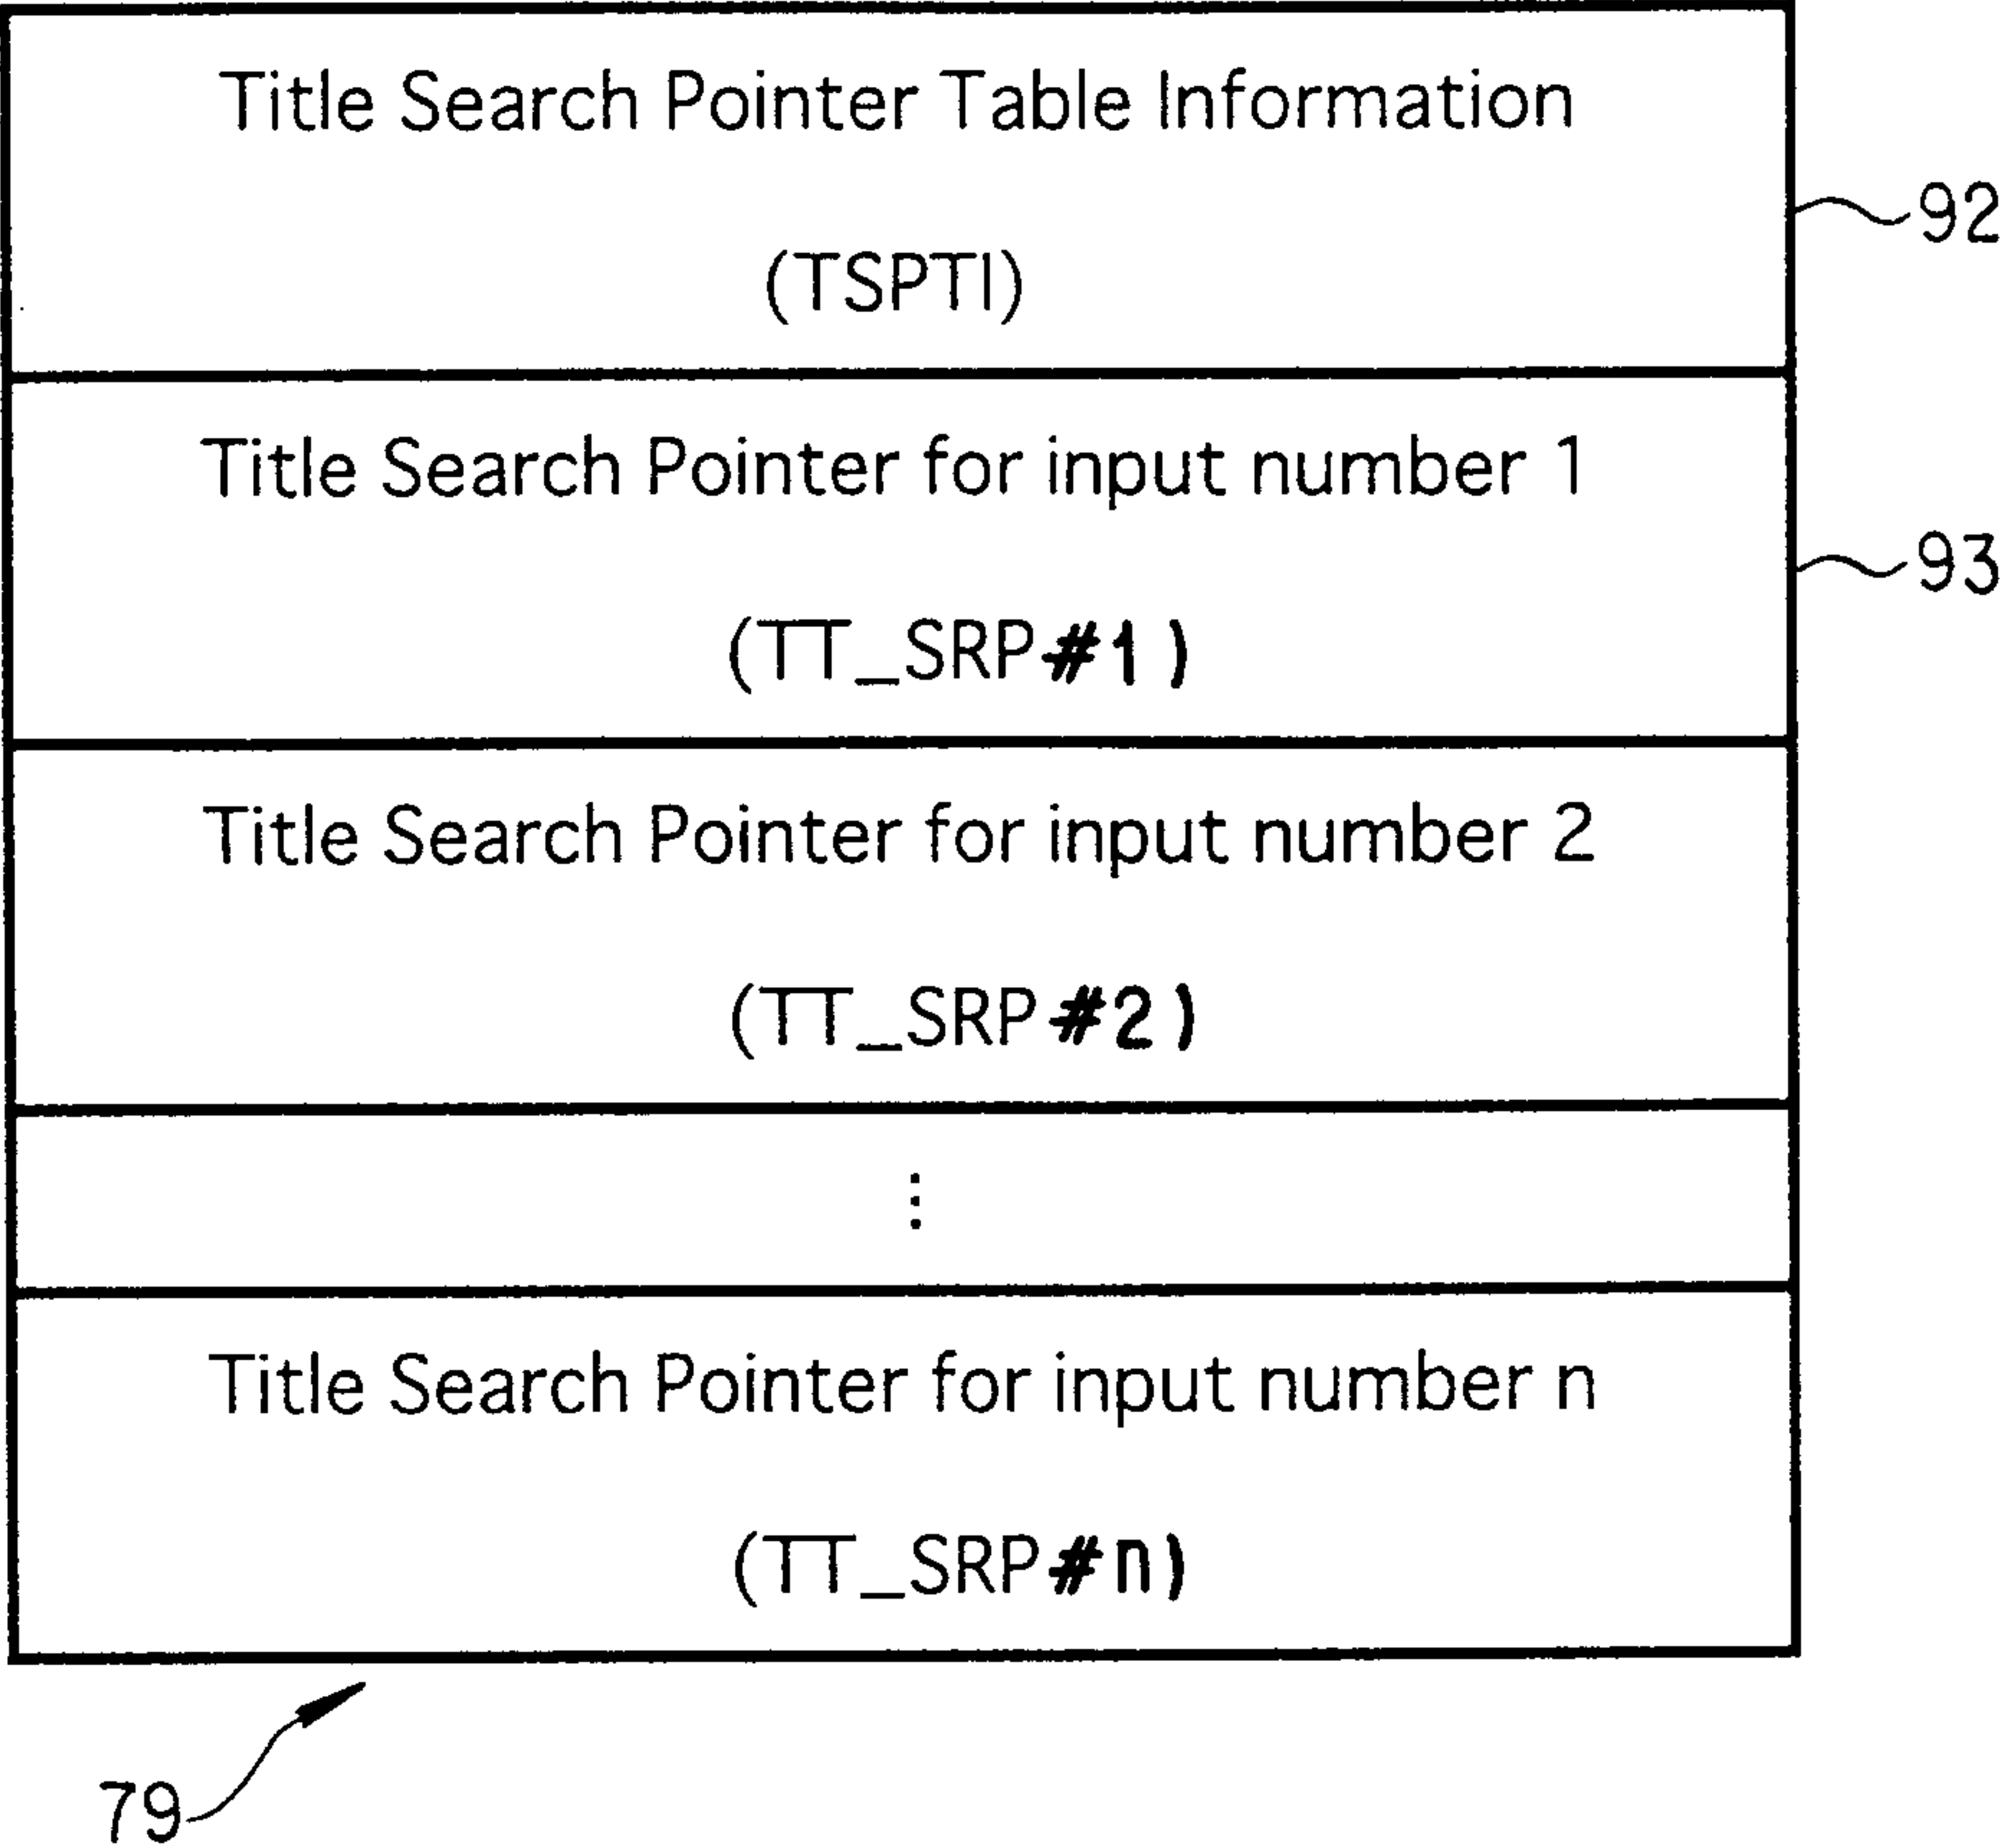


FIG. 13

TT_SRPTI	(Description order)
	Content
EN_PGC_Ns	Number of Entry PGC
TT_SRPT_EA	End Address of TT_SRPT

FIG. 14

TT_SRP	(Description order)
	Content
VTSN	Video Title Set Number
PGCN	Program Chain Number
VTSA	Start Address of Video Title Set

FIG. 15

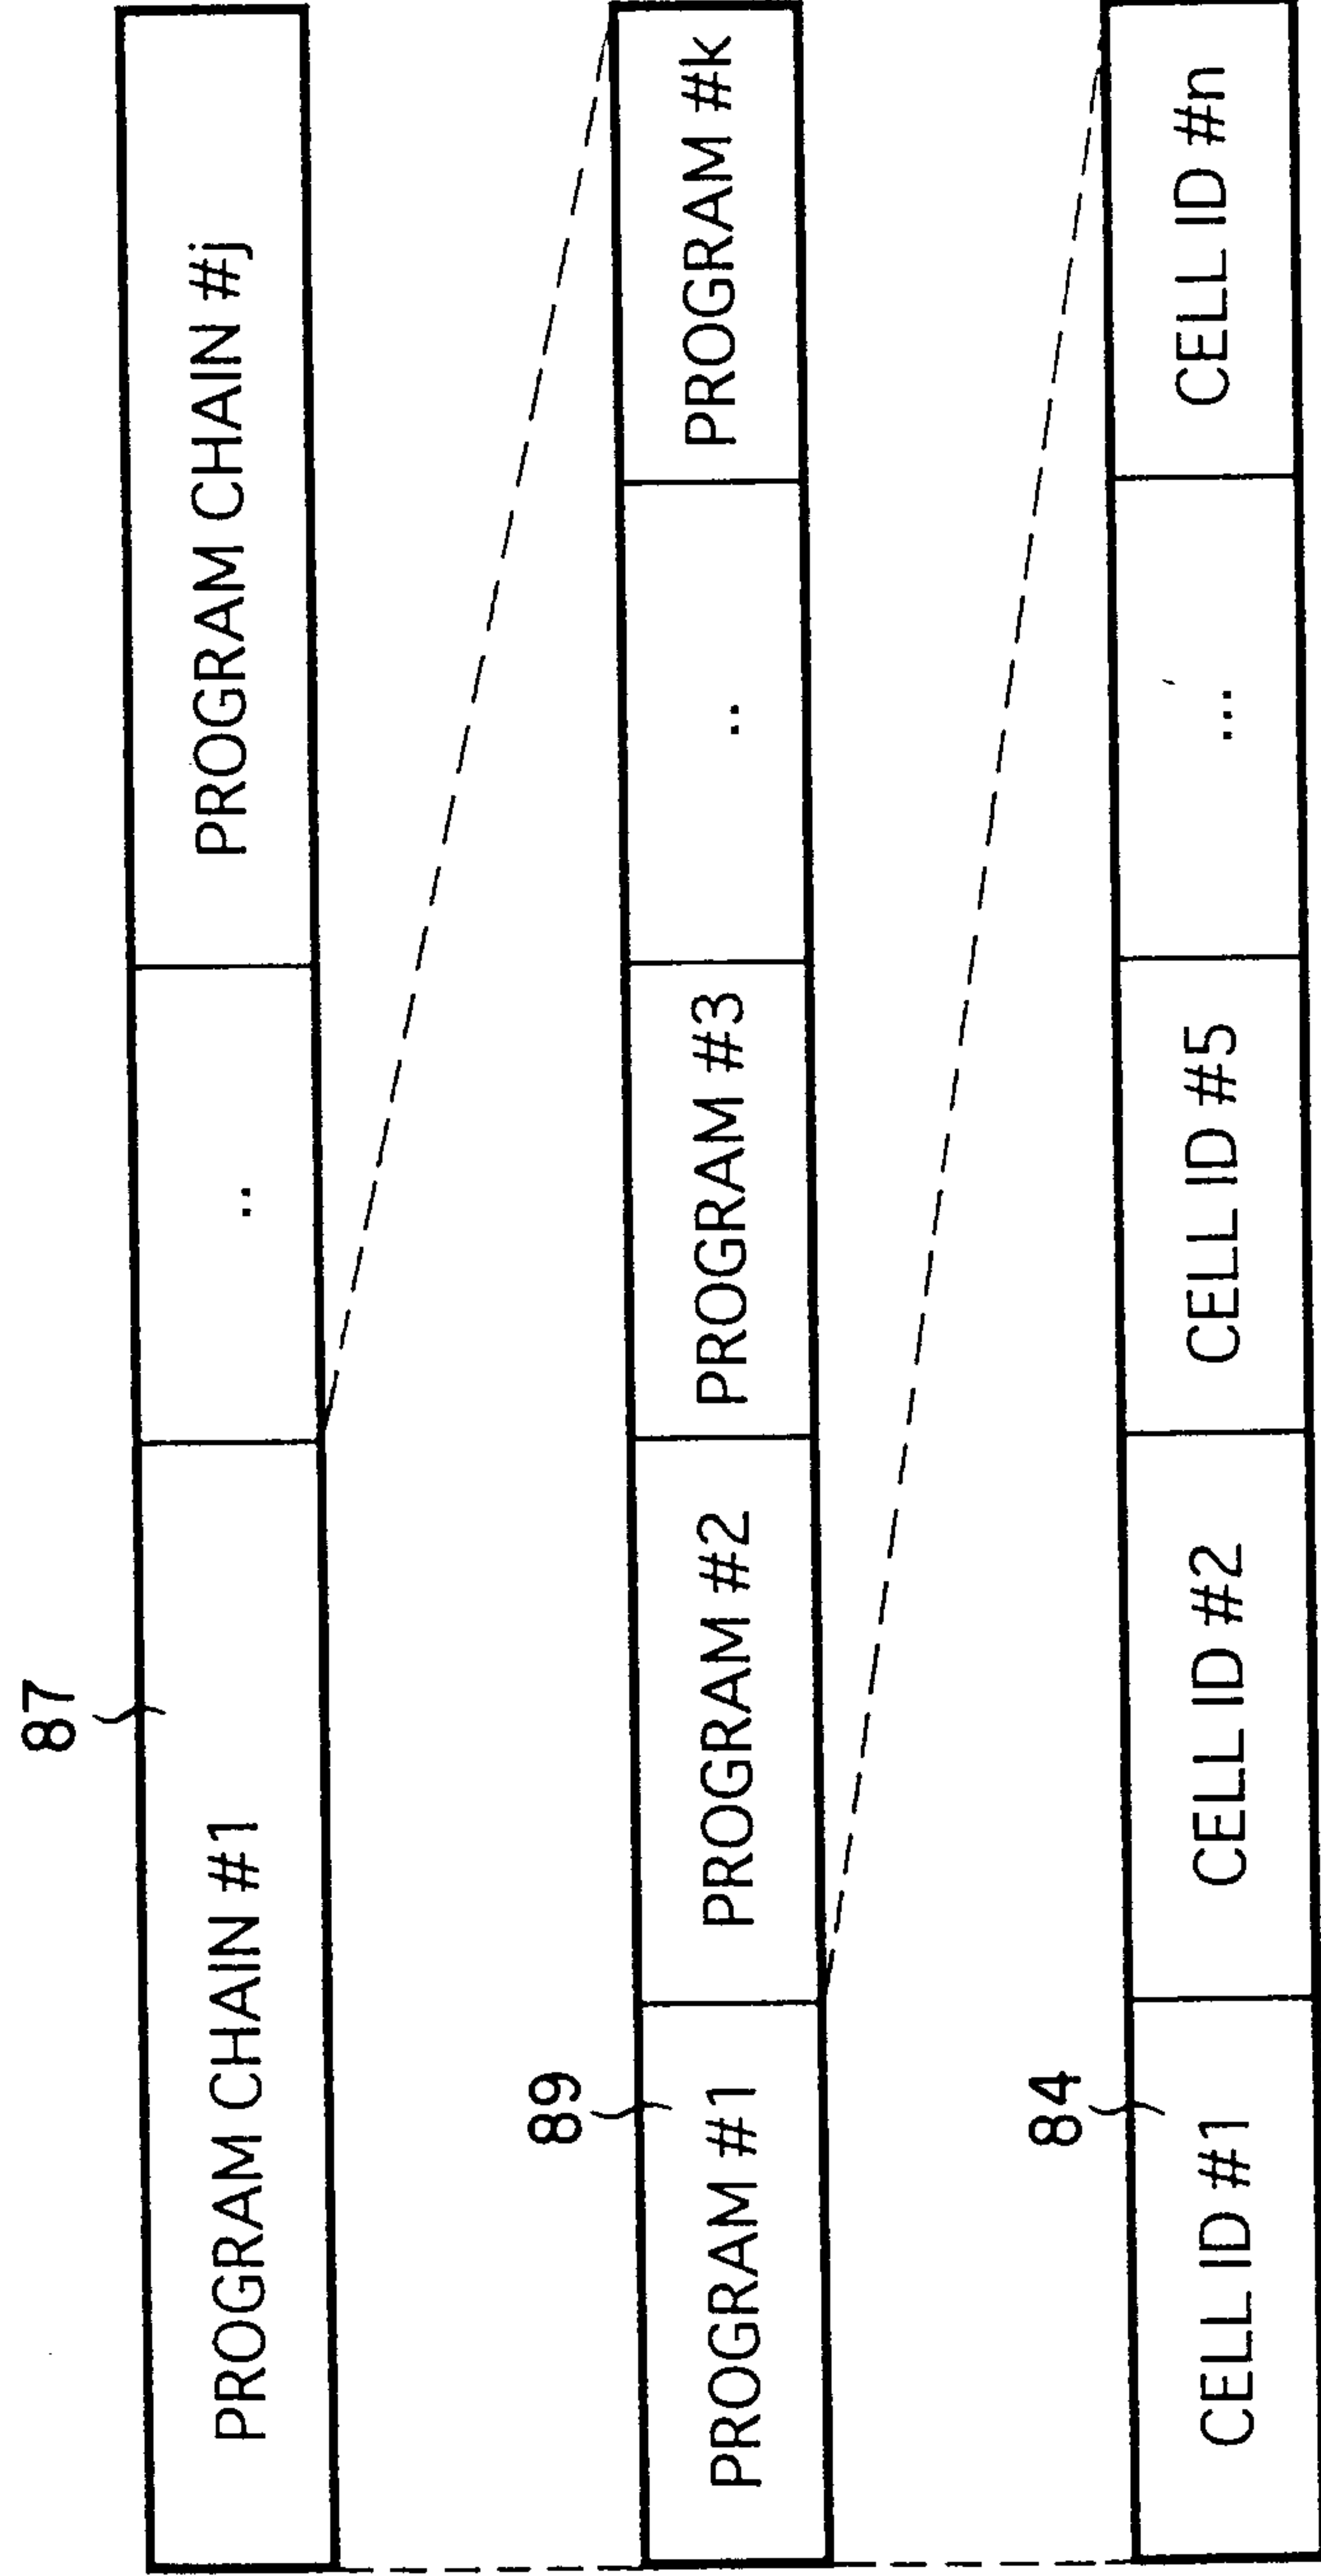


FIG. 16

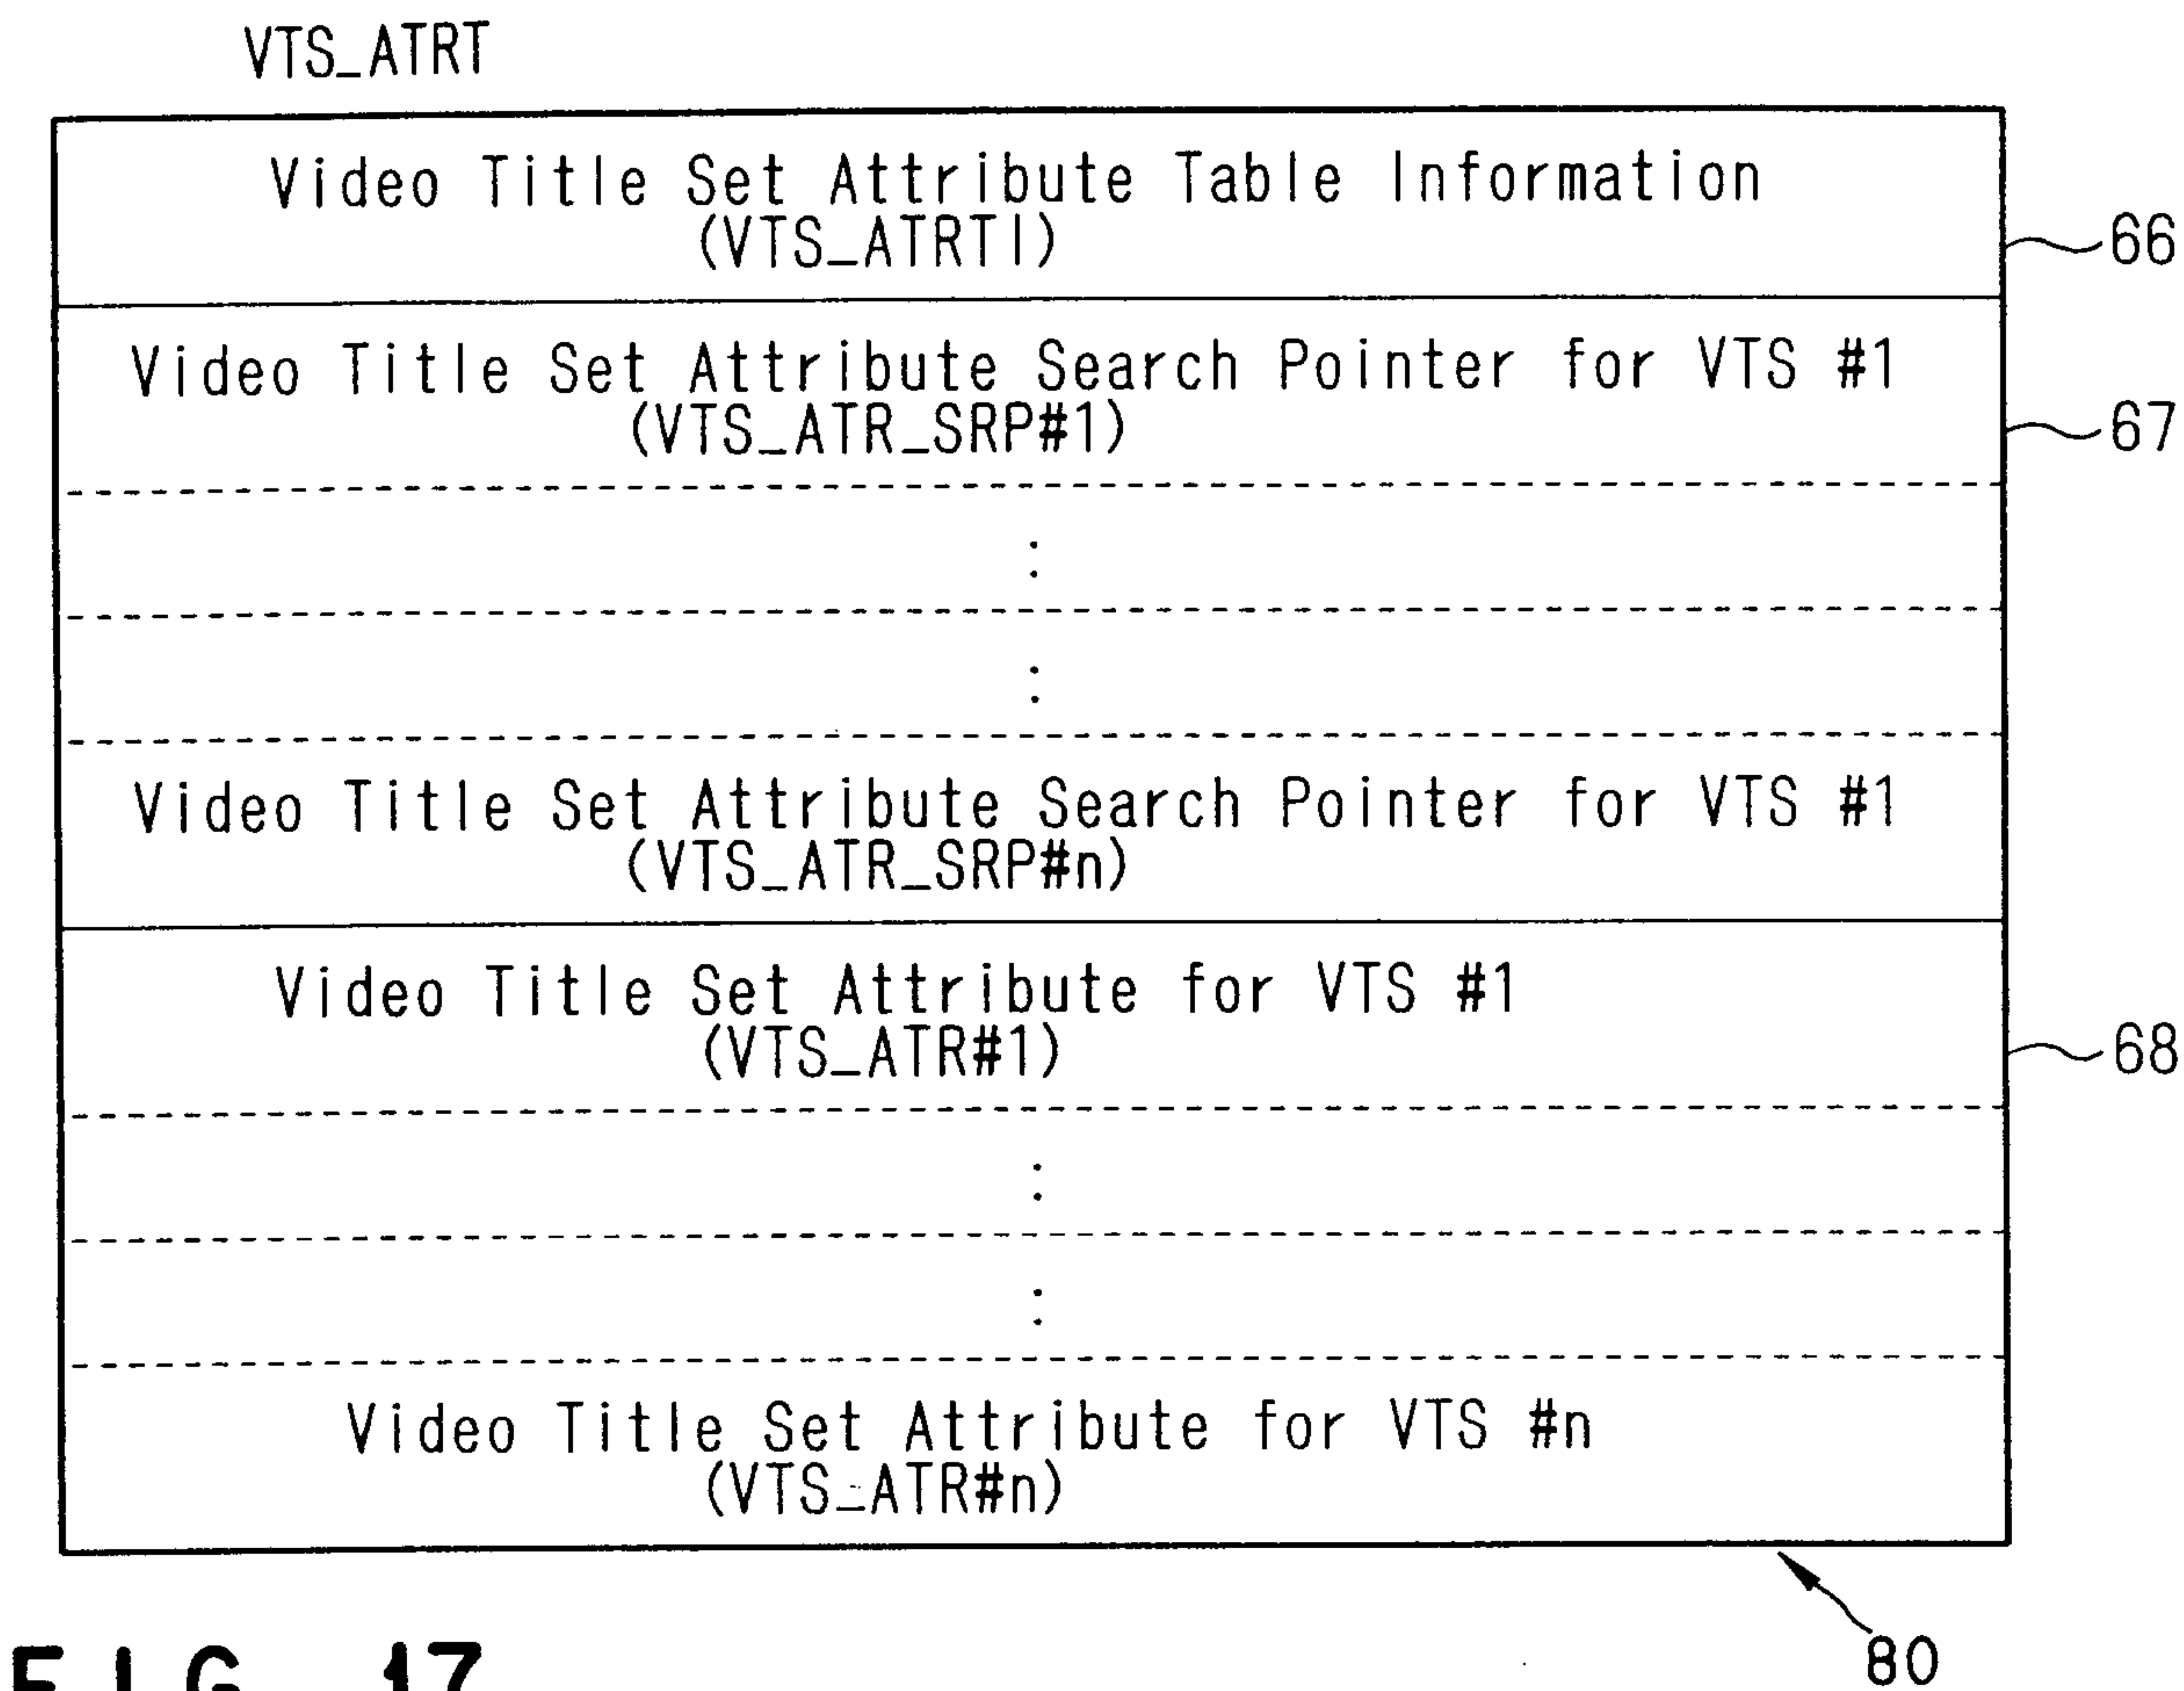


FIG. 17

FIG. 18

VTs_ATRTI	
	Contents
VTs_Ns	Number of VTs
VTs_ATRT_EA	End Address of VTs_ATRT

FIG. 19

VTs_ATR_SRP	
	Contents
(1) VTs_ATR_SA	Start Address of VTs_ATR

FIG. 20

VTs_ATR	
	Contents
VTs_ATR_EA	End Address of VTs_ATR
VTs_CAT	Video Title Set Category
VTs_ATRI	Video Title Set Attribute Information

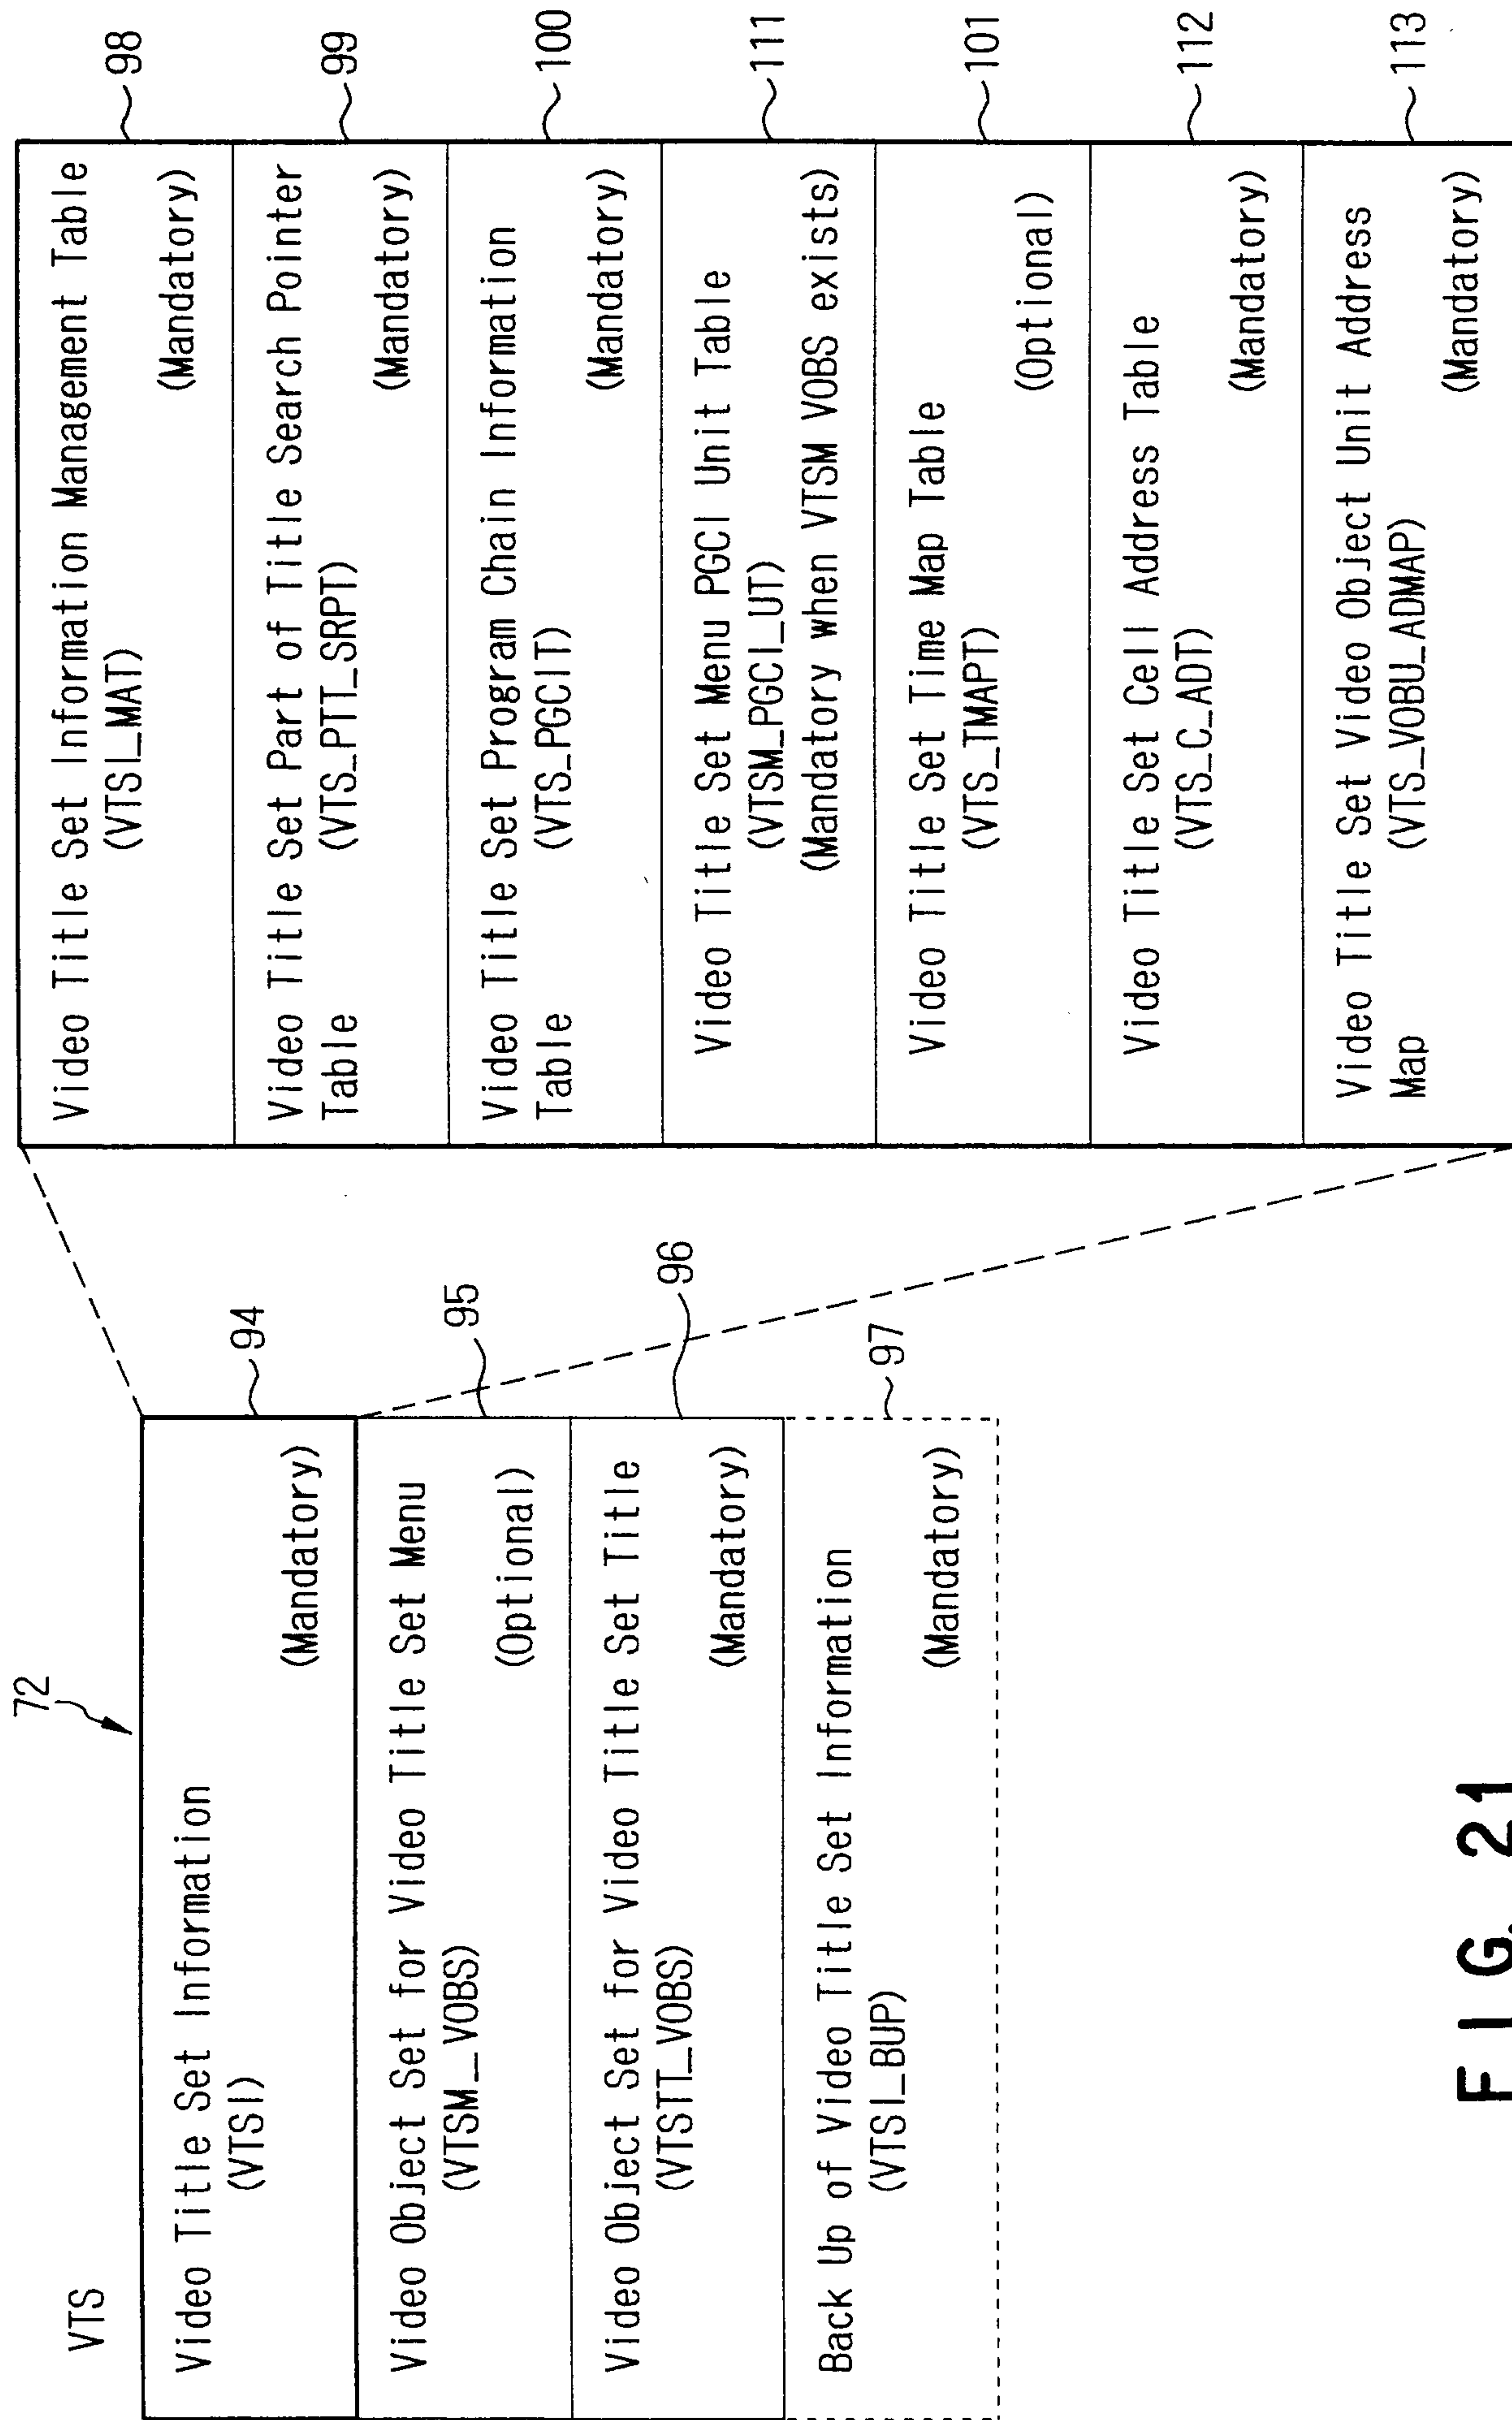


FIG. 21

VTSI_MAT	Contents
VTI_ID	VTI Identifier
VTI_SZ	Size of the VTI
VERN	Version Number of DVD Video Specification
VTI_CAT	VTI Category
VTI_MAT_EA	End Address of VTI_MAT
VTSM_VOBS_SA	Start Address of VTSM_VOBS
VTSTT_VOBS_SA	Start Address of VTSTT_VOB
VTI_PTT_SRPT_SA	Start Address of VTI_PTT_SRPT
VTI_PGCIT_SA	Start Address of VTI_PGCIT
VTSM_PGCIT_UT_SA	Start Address of VTSM_PGCIT_UT
VTI_TMPT_SA	Start Address of VTI_TMPT
VTI_C_ADI_SA	Start Address of Cell Address Table
VTI_VOBU_ADMAP_SA	Start Address of VOB Address Map
VTSM_V_ATR	Video Attribute of VTSM
VTSM_AST_Ns	Number of Audio Streams of VTSM
VTSM_AST_ATR	Audio Stream Attribute of VTSM
VTSM_SPST_Ns	Number of Sub-Picture Streams of VTSM
VTSM_SPST_ATR	Sub-Picture Stream Attribute of VTSM
VTI_V_ATR	Video Attribute of VTI
VTI_AST_Ns	Number of Audio Stream of VTI
VTI_AST_ATR	Audio Stream Attribute of VTI
VTI_SPST_Ns	Number of Sub-Picture Streams of VTI
VTI_SPST_ATR	Sub-Picture Stream Attribute of VTI
VTI_MU_AST_ATR	Multichannel Audio Stream Attribute of VTI

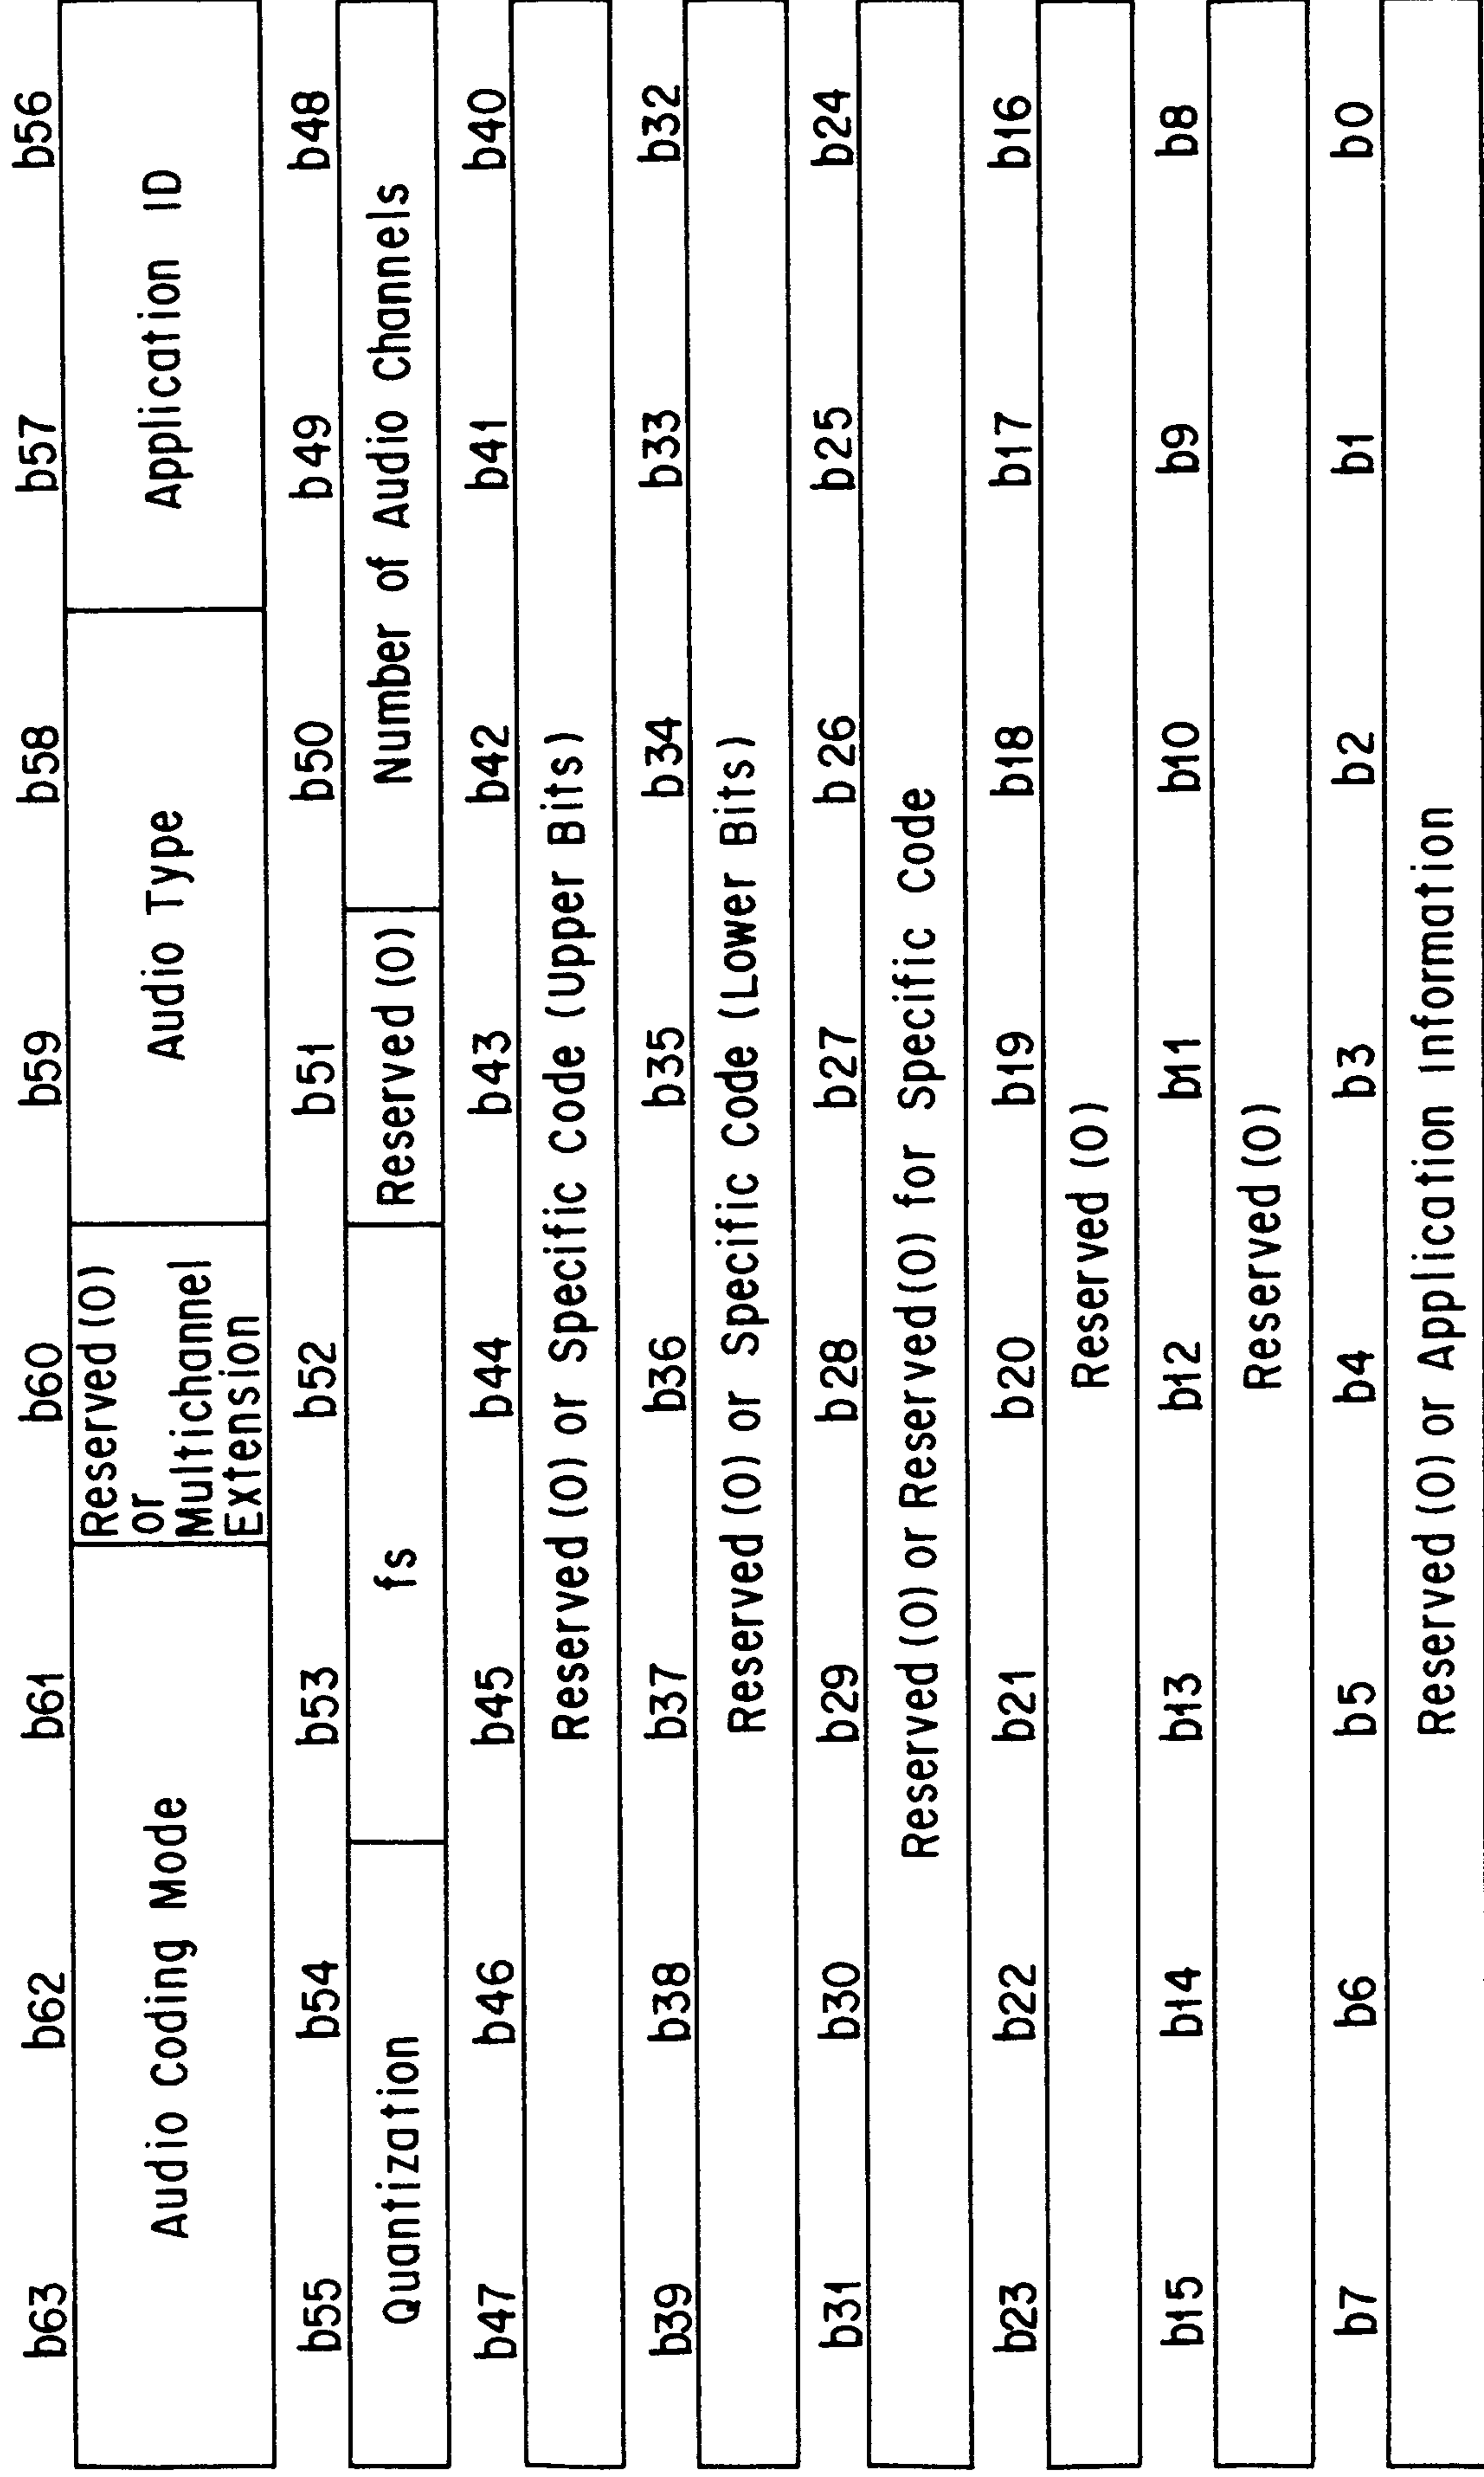


FIG. 23

VTS_PGCIT

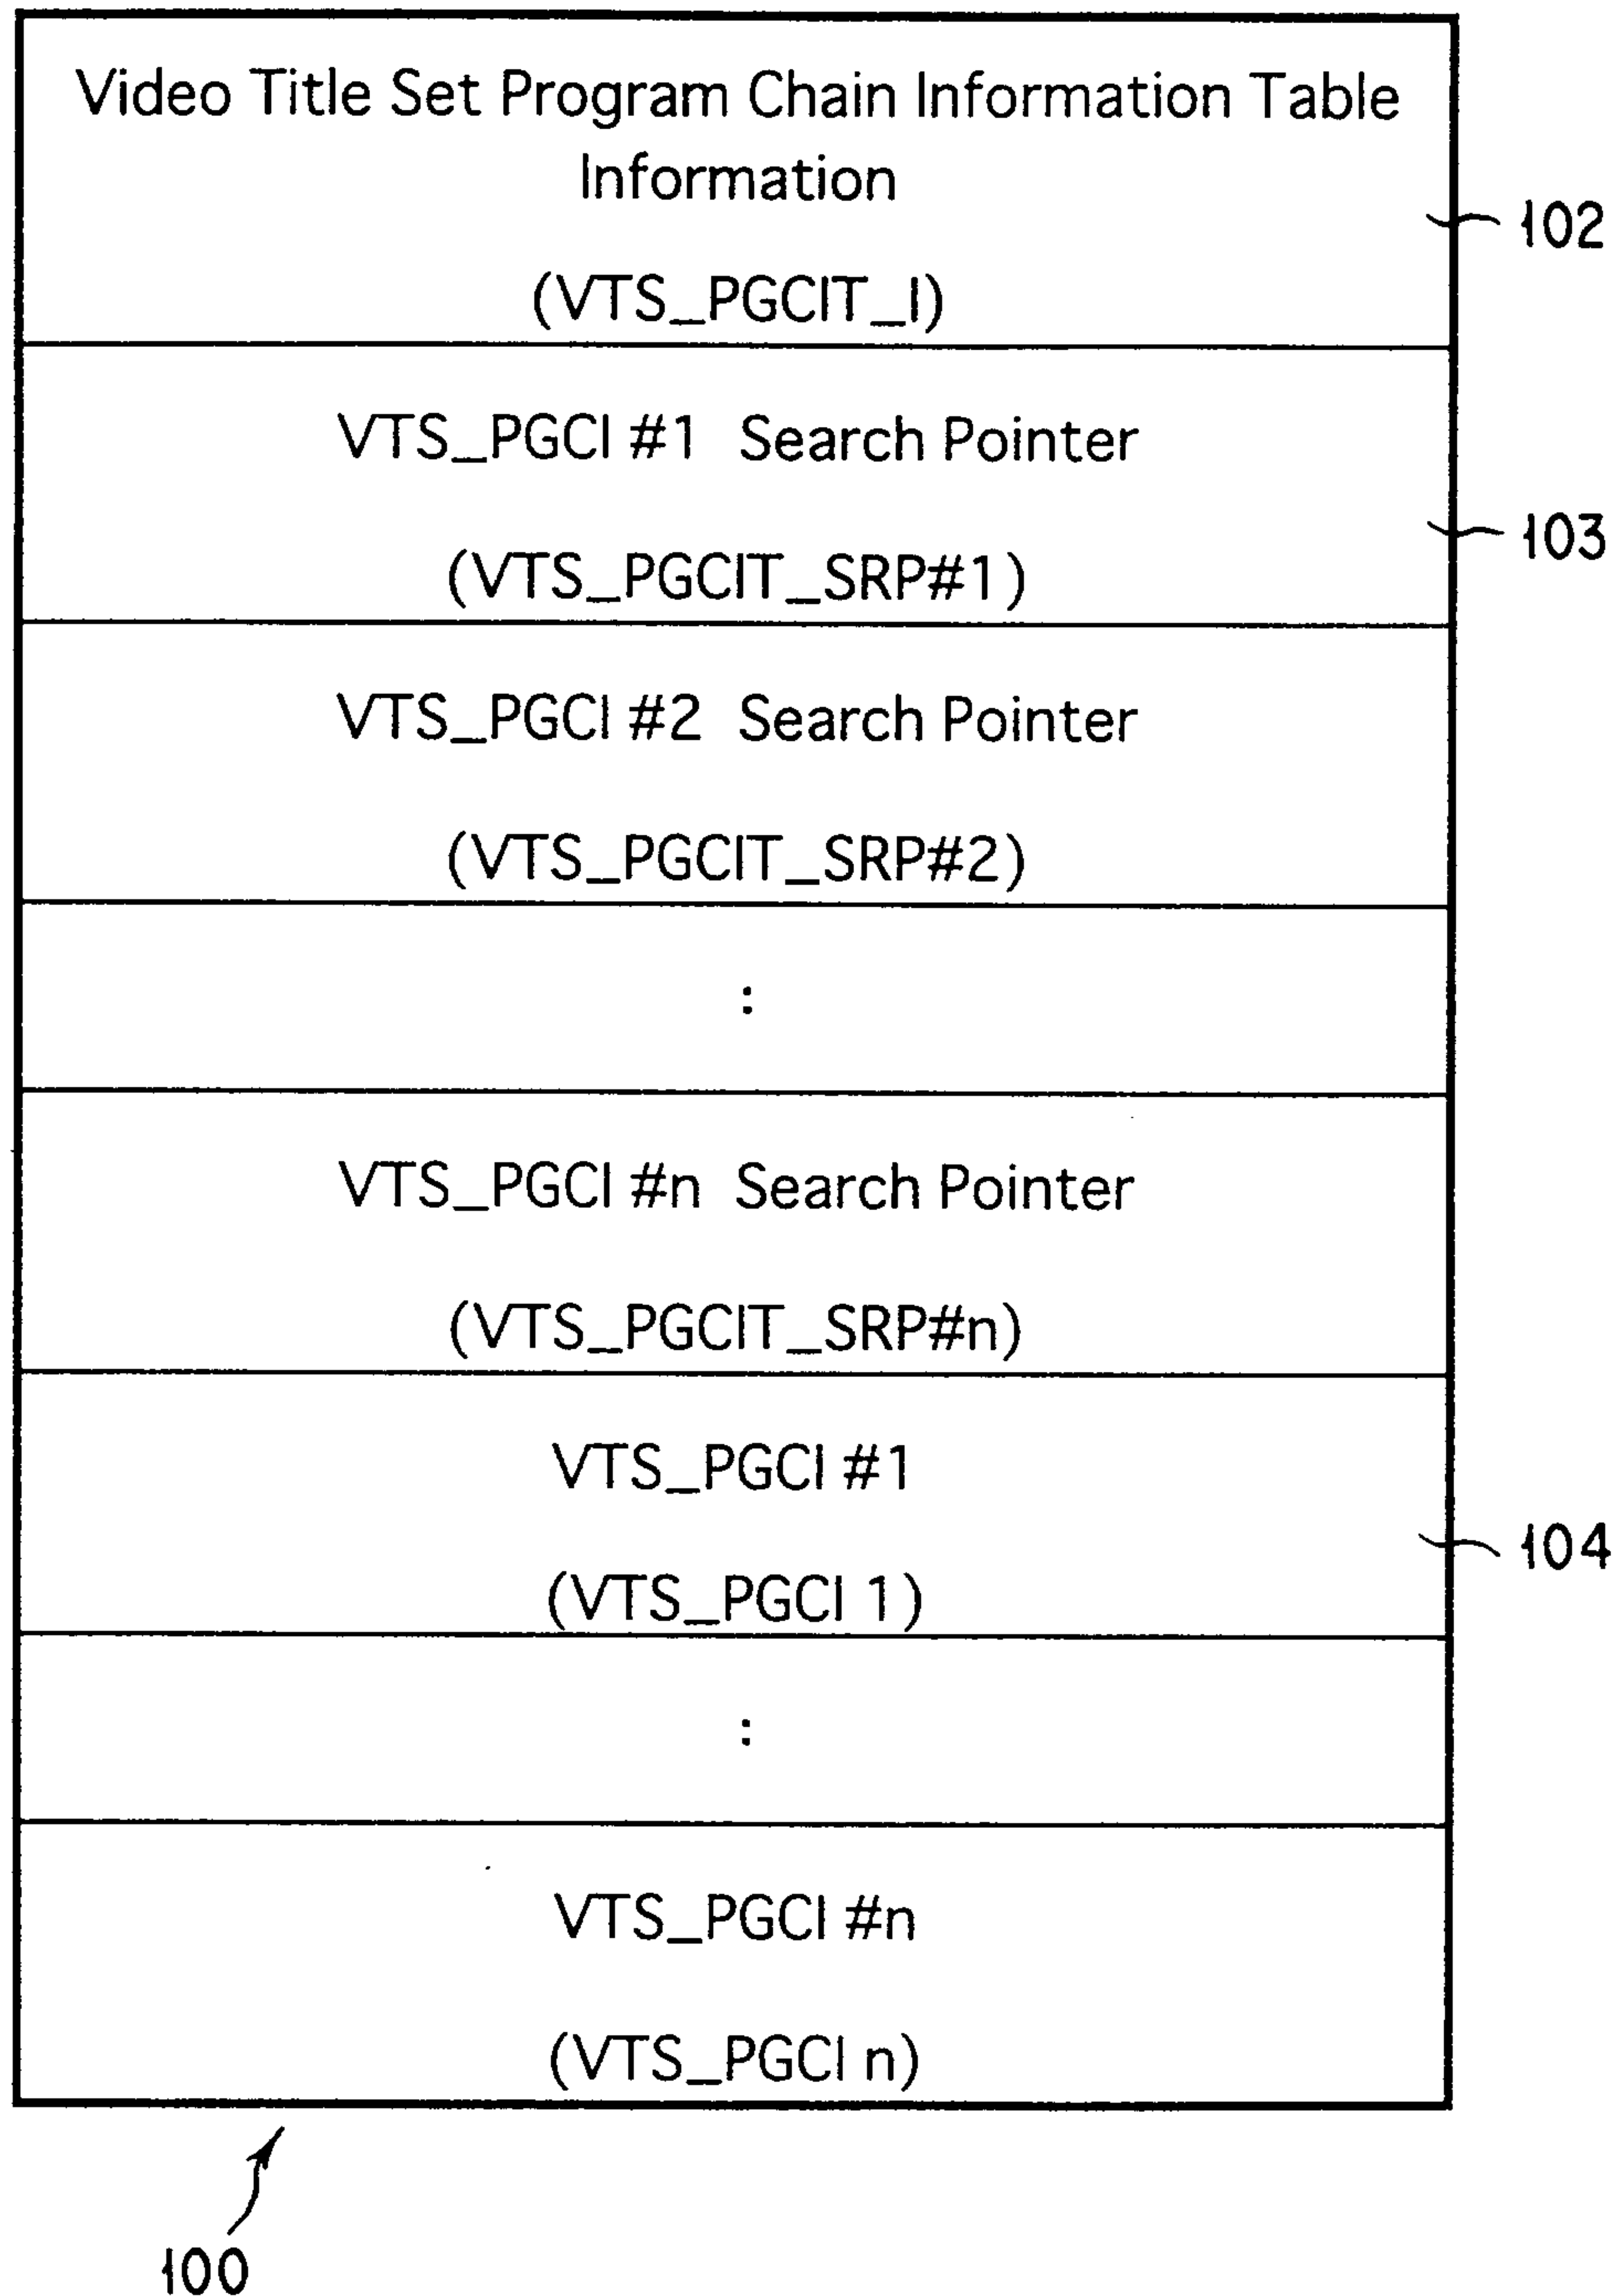


FIG. 24

VTSPGCIT_I

	(Description order)
	Content
VTSPGC_Ns	Number of VTSPGCs
VTSPGCIT_EA	End Address of VTSPGCCIT

FIG. 25

VTSPGCIT_SRP

	(Description order)
	Content
VTSPGC_CAT	Video Title Set PGC category
VTSPGCI_SA	Start Address of VTSPGC Information

FIG. 26

VTSPGCI

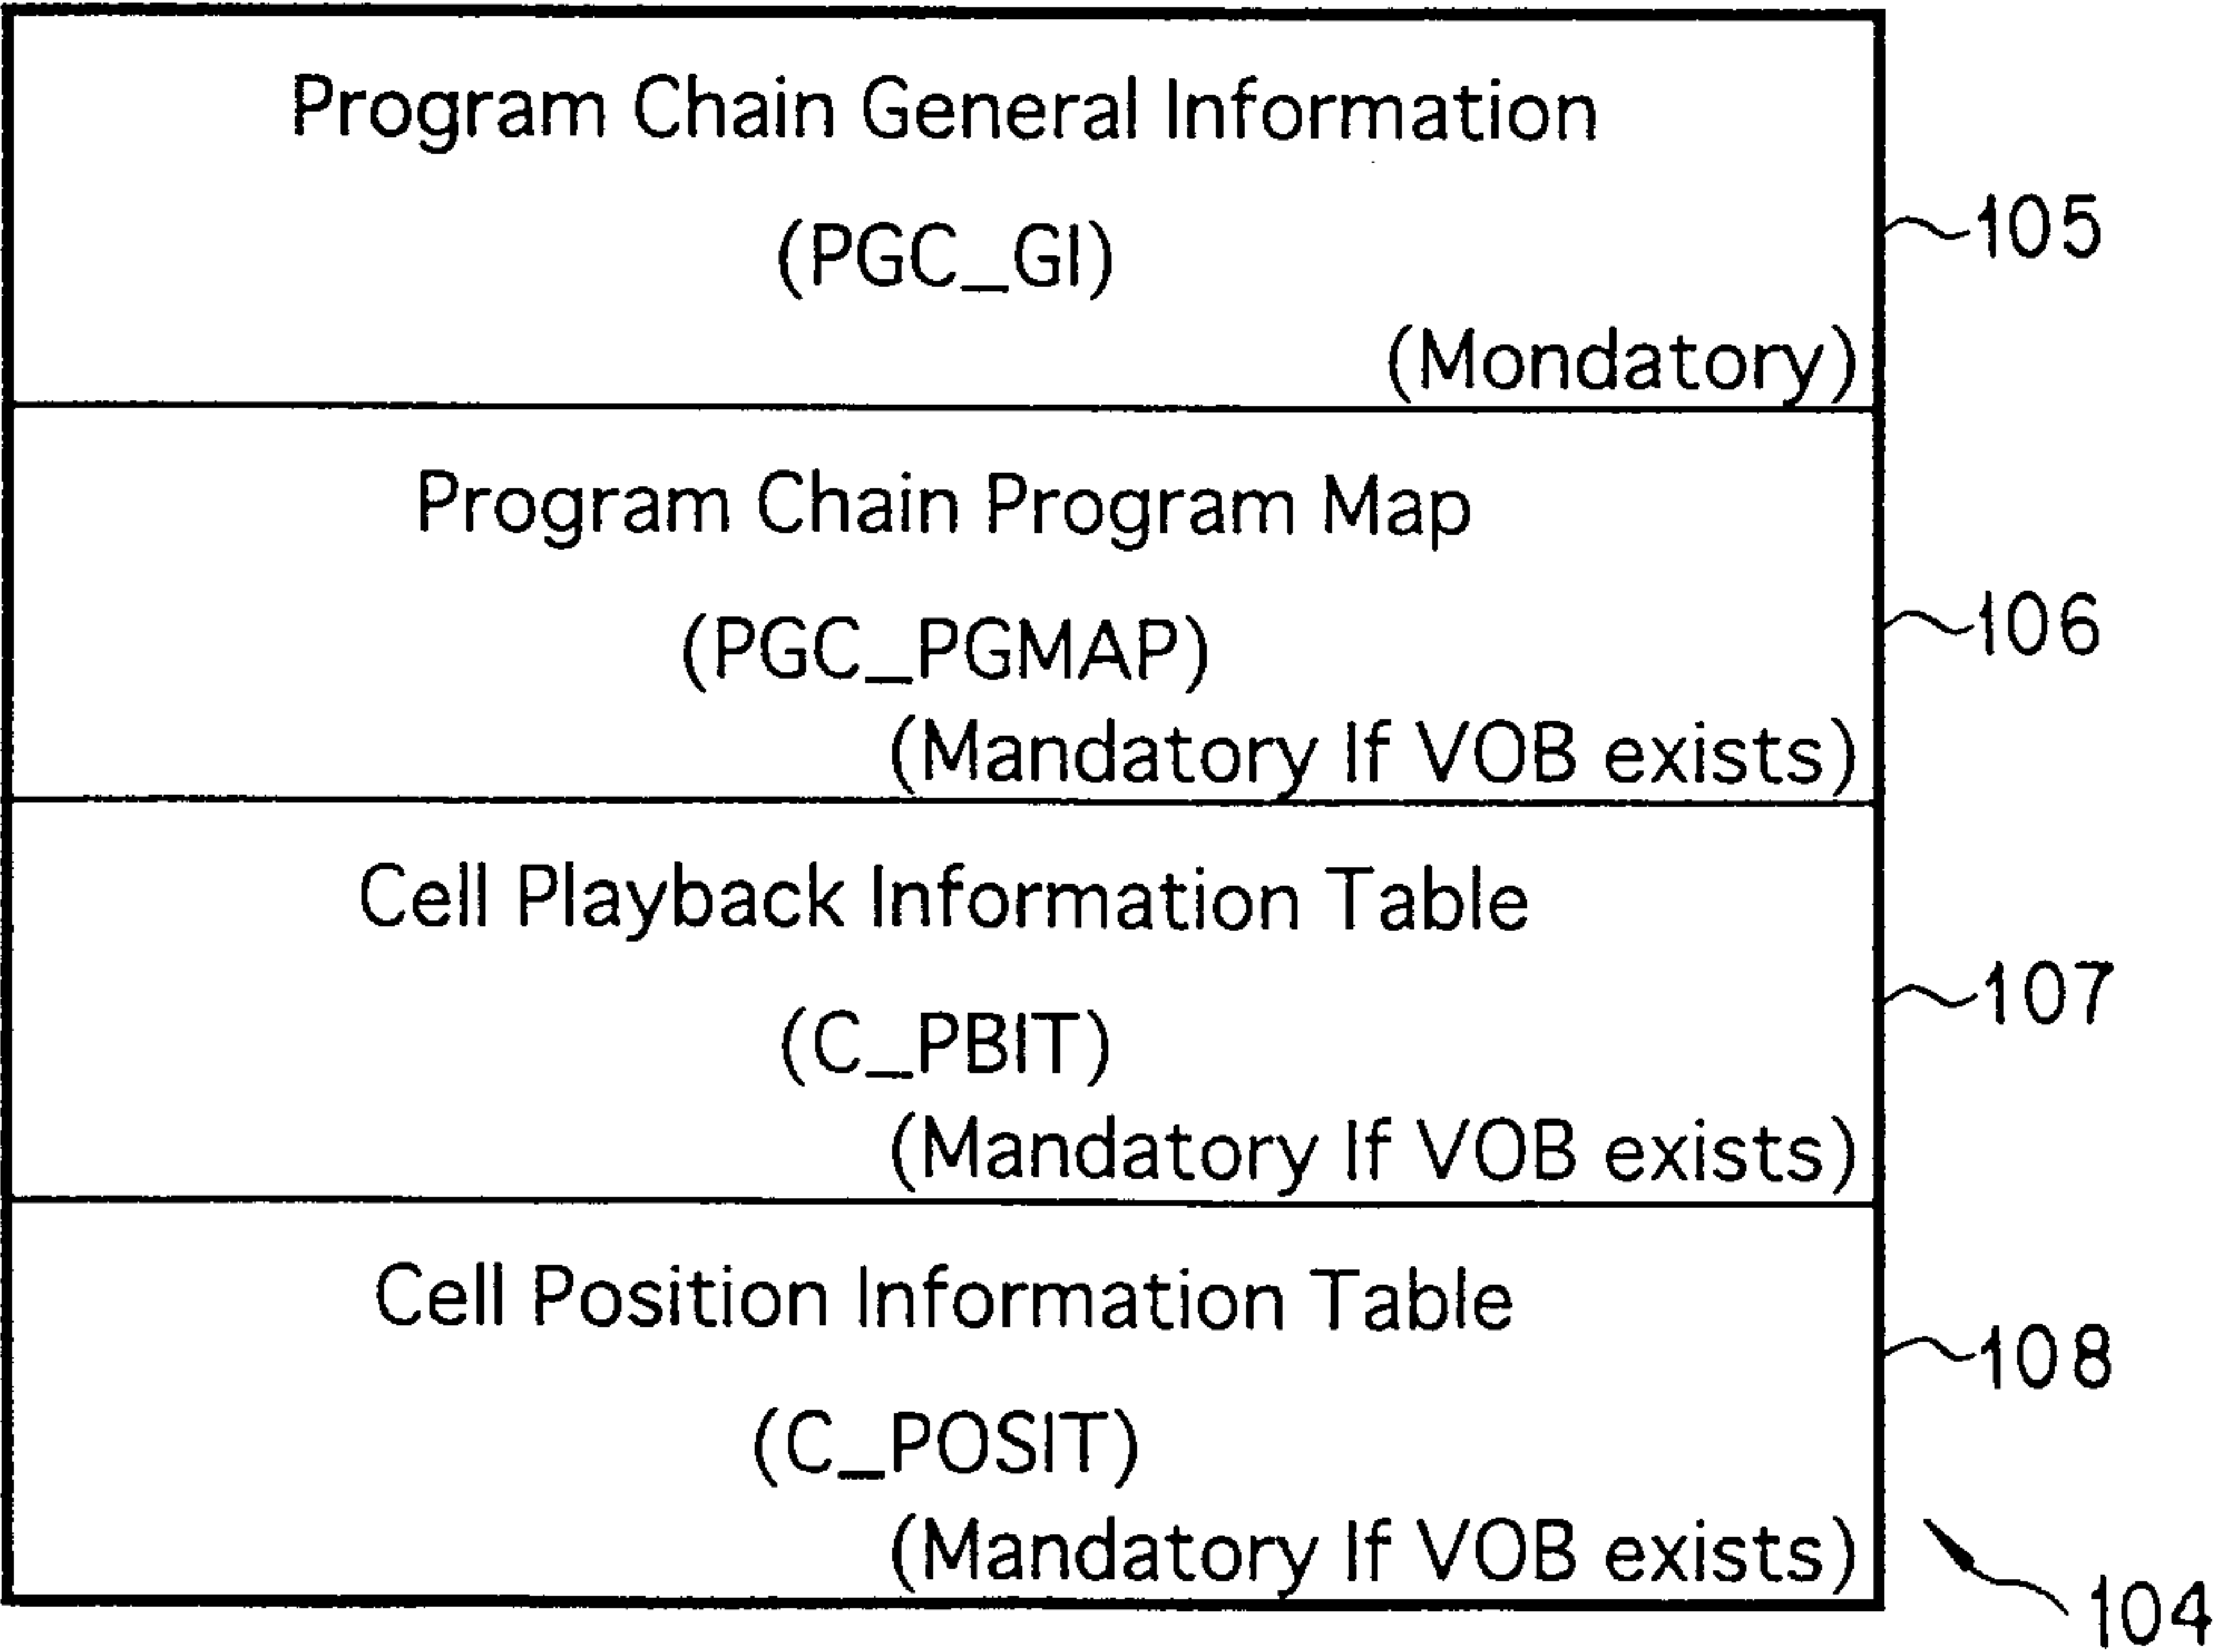


FIG. 27

PGC _GI	(Description order)
	Content
PGCI_CAT	PGC Category
PGC_CNT	PGC Content
PGC_PB_TIME	PGC Playback Time
PGC_SPST_CTL	PGC-Sub-picutre Stream Control
PGC_AST_CTL	PGC Audio Stream Control
PGC_SP_PLT	PGC Sub-picture Palette
PGC_PGMAP_SA	Start Address of PGC_PGMAP
C_PBIT_SA	Start Address of C_PBIT
C_POSIT_SA	Start Address of C_POSIT

FIG. 28

PGC_PGMAP
Entry Cell Number for Program #1
Entry Cell Number for Program #2
:
:
Entry Cell Number for Program #n

FIG. 29

Entry cell number	
	Content
ECELLN	Entry Cell Number

FIG. 30

C_PBIT

Cell Playback Information #1 (C_PBI1)
Cell Playback Information #2 (C_PBI2)
:
Cell Playback Information #n (C_PBI _n)

F I G. 31

C_PBI

	Content
C_CAT	Cell Category
C_PBTM	Cell Playback Time
C_FVOBU_SA	Start Address of the First VOB in the Cell
C_LVOBU_SA	Start Address of the Last VOB in the Cell

F I G. 32

C_POSI

Cell Position Information #1 (C_POSIT1)
:
Cell Position Information #n (C_POSIT _n)

F I G. 33

C_POSI

	Content
C_VOB_IDN	VOB ID Number of Cell
C_IDN	Cell ID Number of the Cell

F I G. 34

FIG. 35

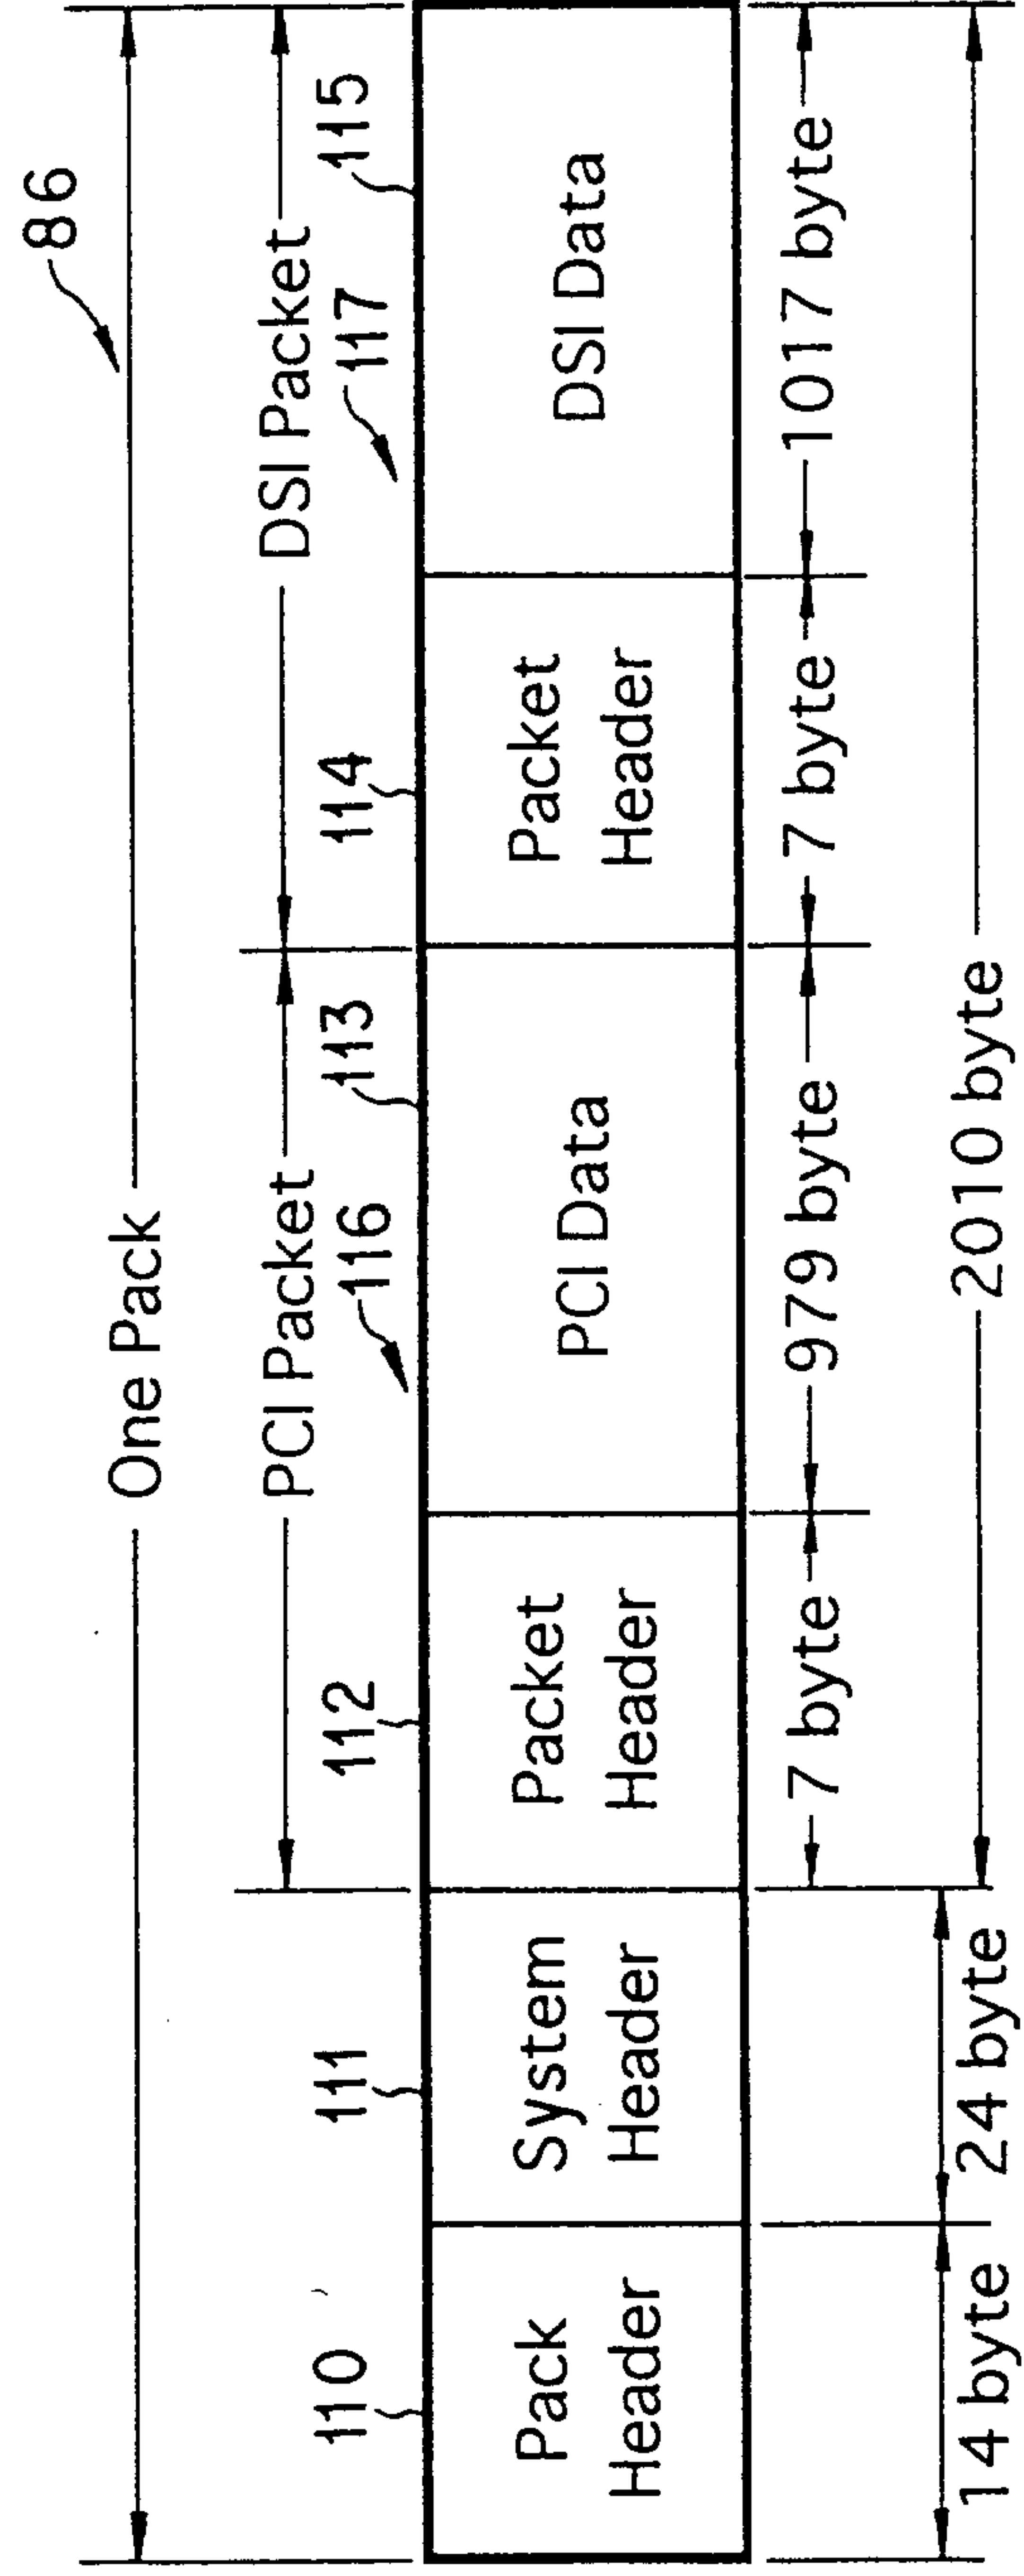


FIG. 36

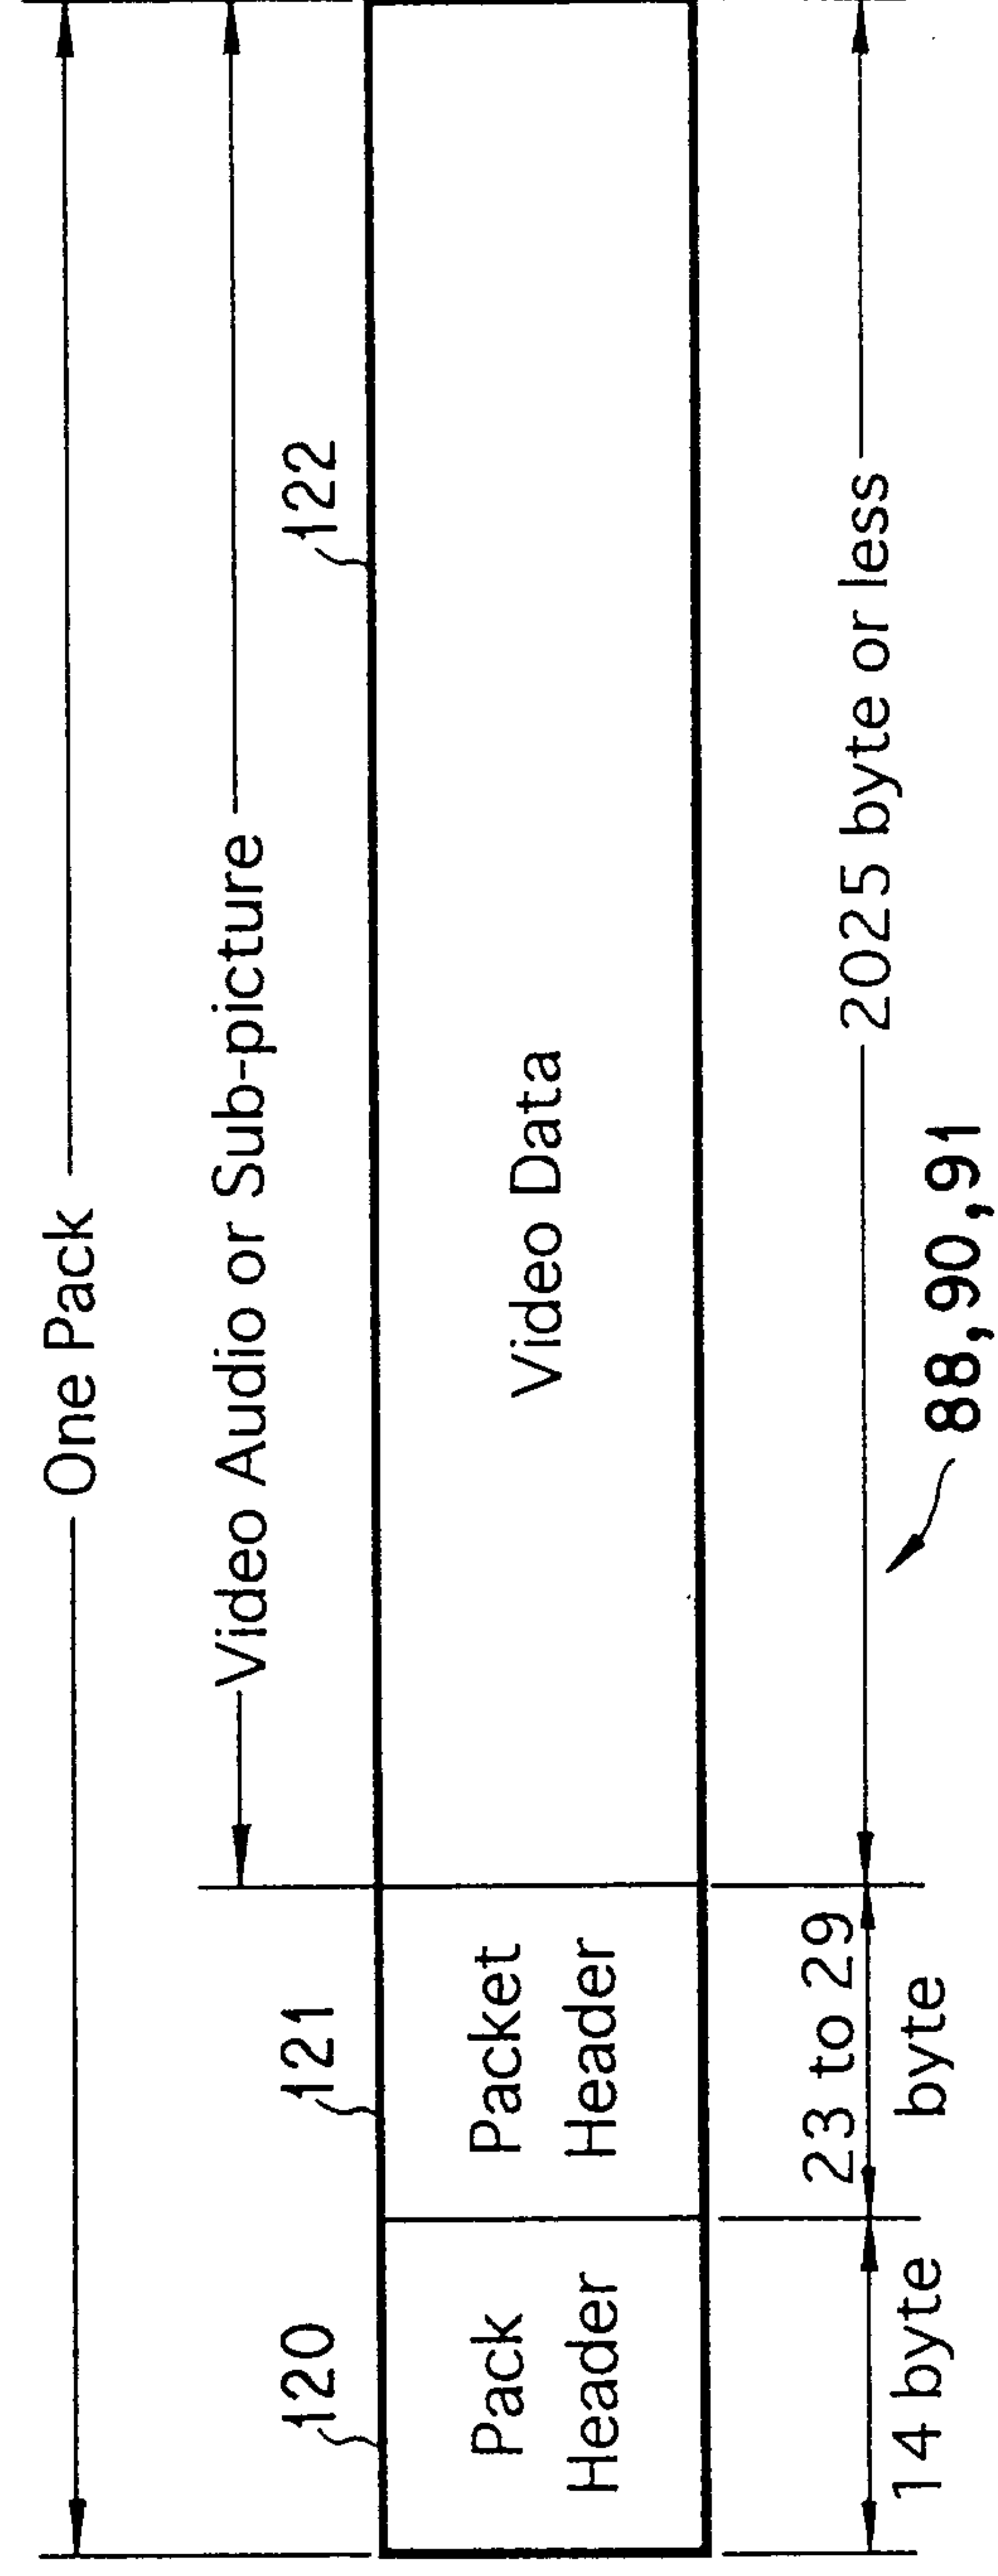


FIG. 37

PCI	
	Content
PCI_GI	PCI General Information
NSMLS_ANGLI	Angle Information

FIG. 38

PCI GI	
	Content
NV_PCK_LBN	LBN of NV Pack
VOBU_CAT	Category of VOB
VOBU_S_PTM	Start PTM of VOB
VOBU_E_PTM	End PTM of VOB

FIG. 39

DSI	
	Content
DSI_GI	DSI General Information
SML_PBI	Seamless Playback Information
SML_AGLI	Angle Information
NV_PCK_ADI	Navigation Pack Address Information
SYNCL	Synchronous Playback Information

FIG. 40

DSI_GI	
	Content
NV_PCK_SCR	SCR of NV Pack
NV_PCK_LBN	LBN of NV Pack
VOBU_EA	VOBU End Address
VOBU_IP_EA	First I-picture End Address
VOBU_VOB_IDN	VOB ID Number
VOBU_C_IDN	Cell ID Number

FIG. 41

SYNCL	
	Content
A_SYNCA 0 to 7	Target Audio Pack Address
SP_SYNCA 0 to 31	VOBU Start Address of Target SP pack

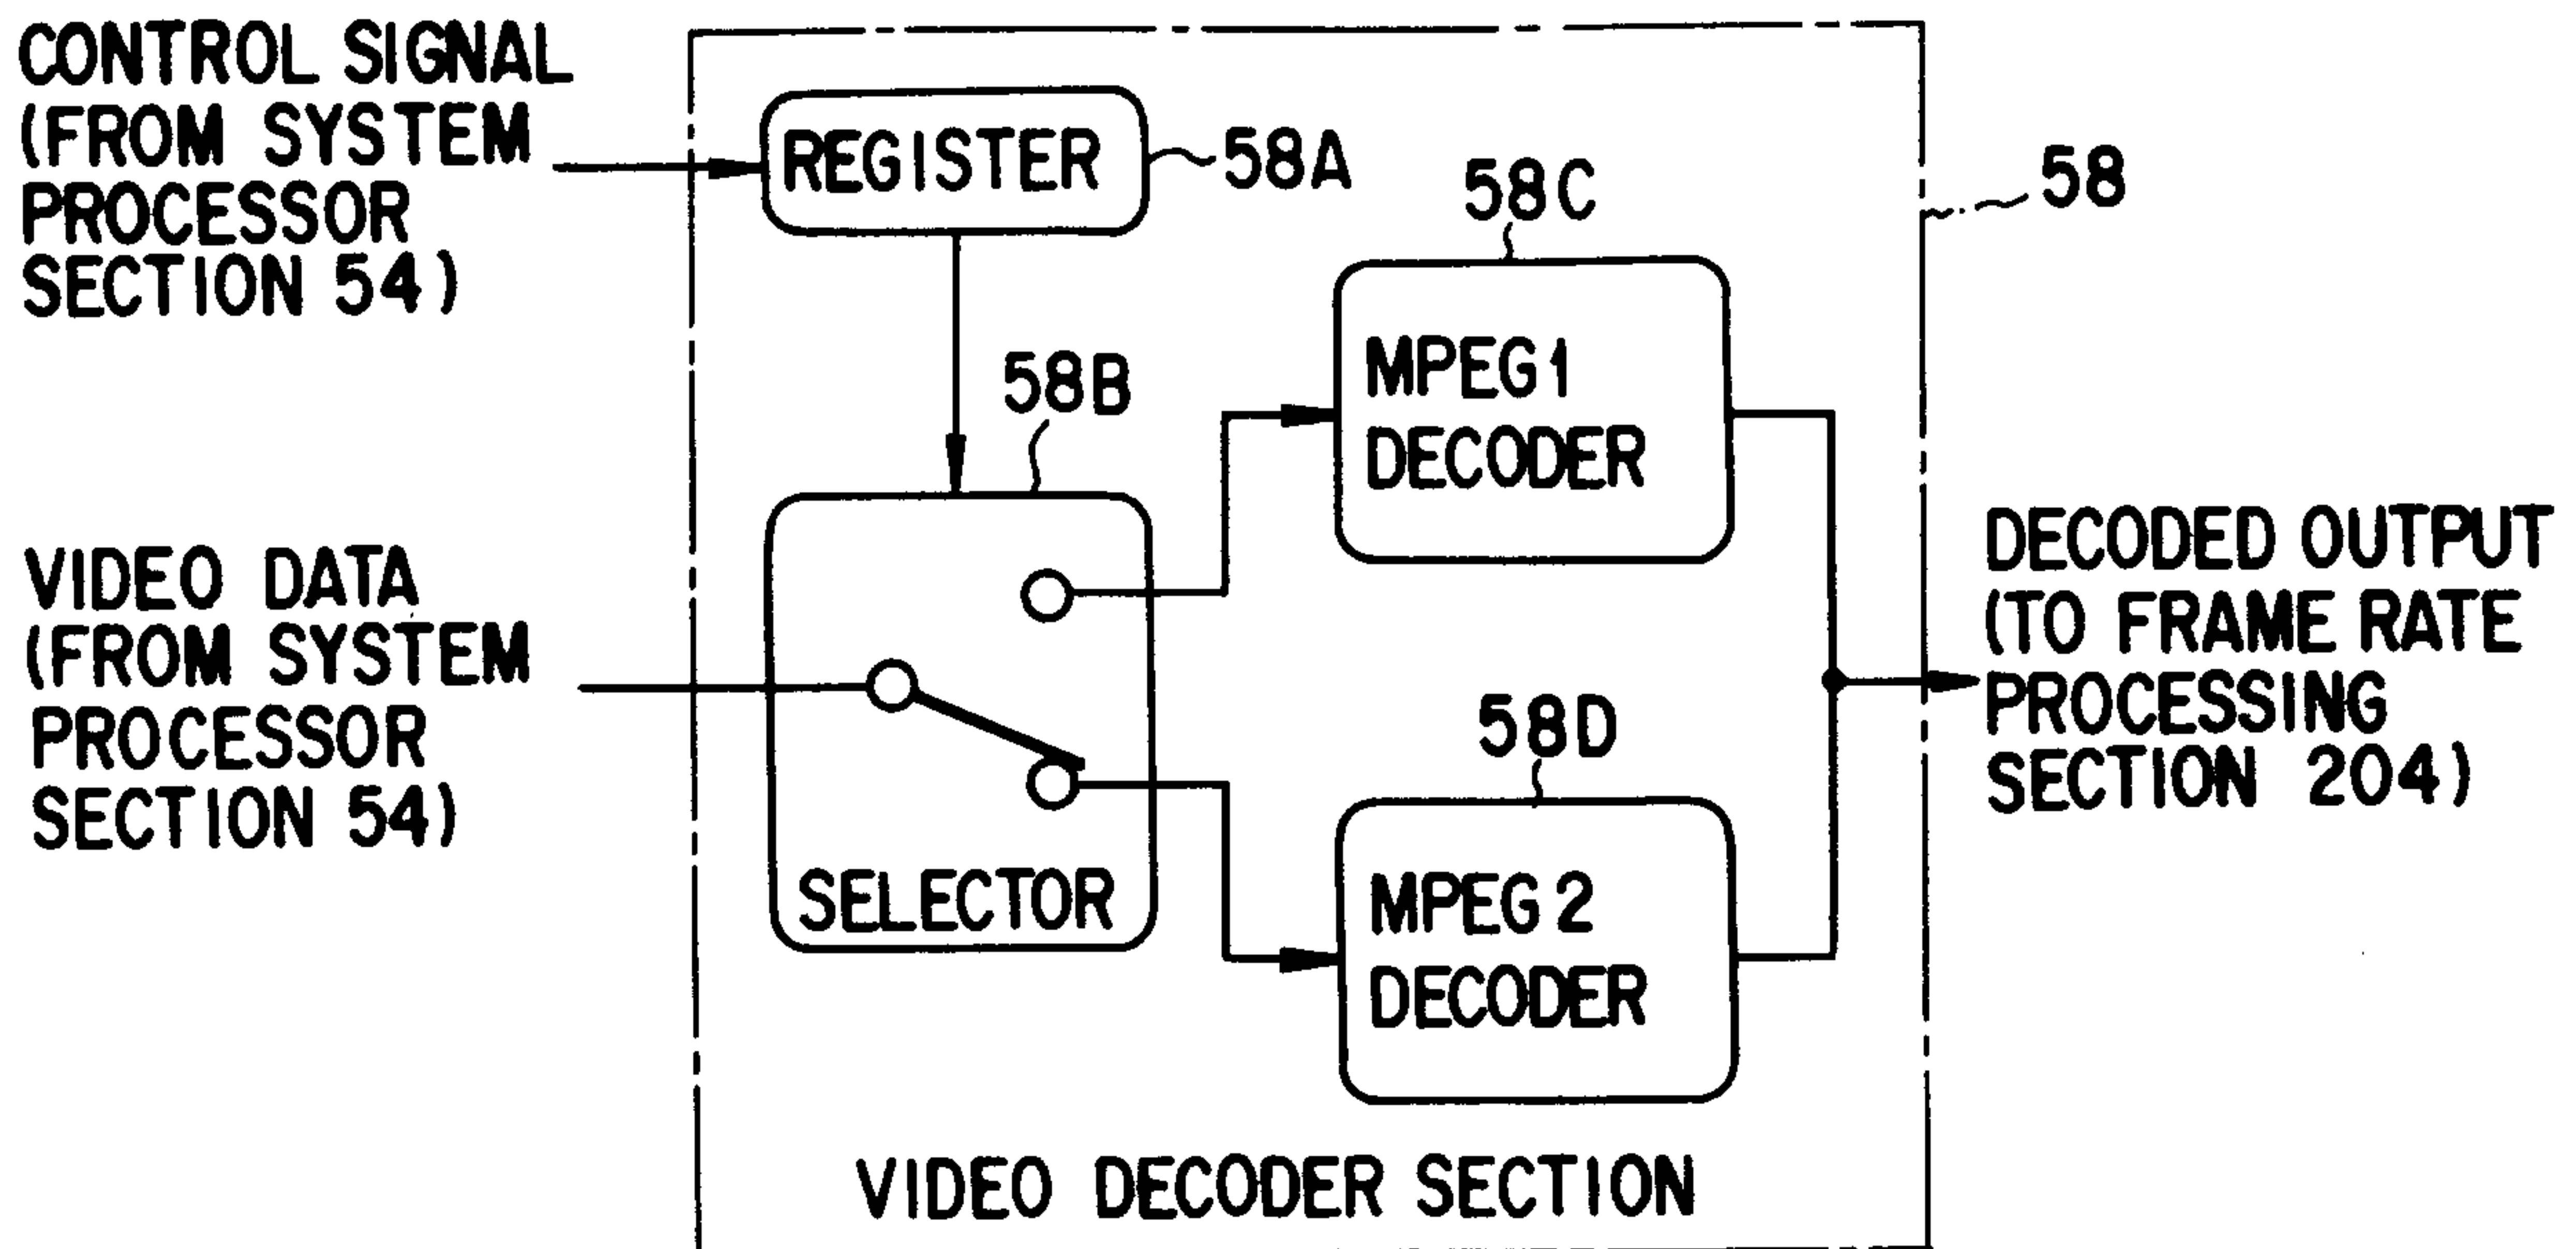


FIG. 42

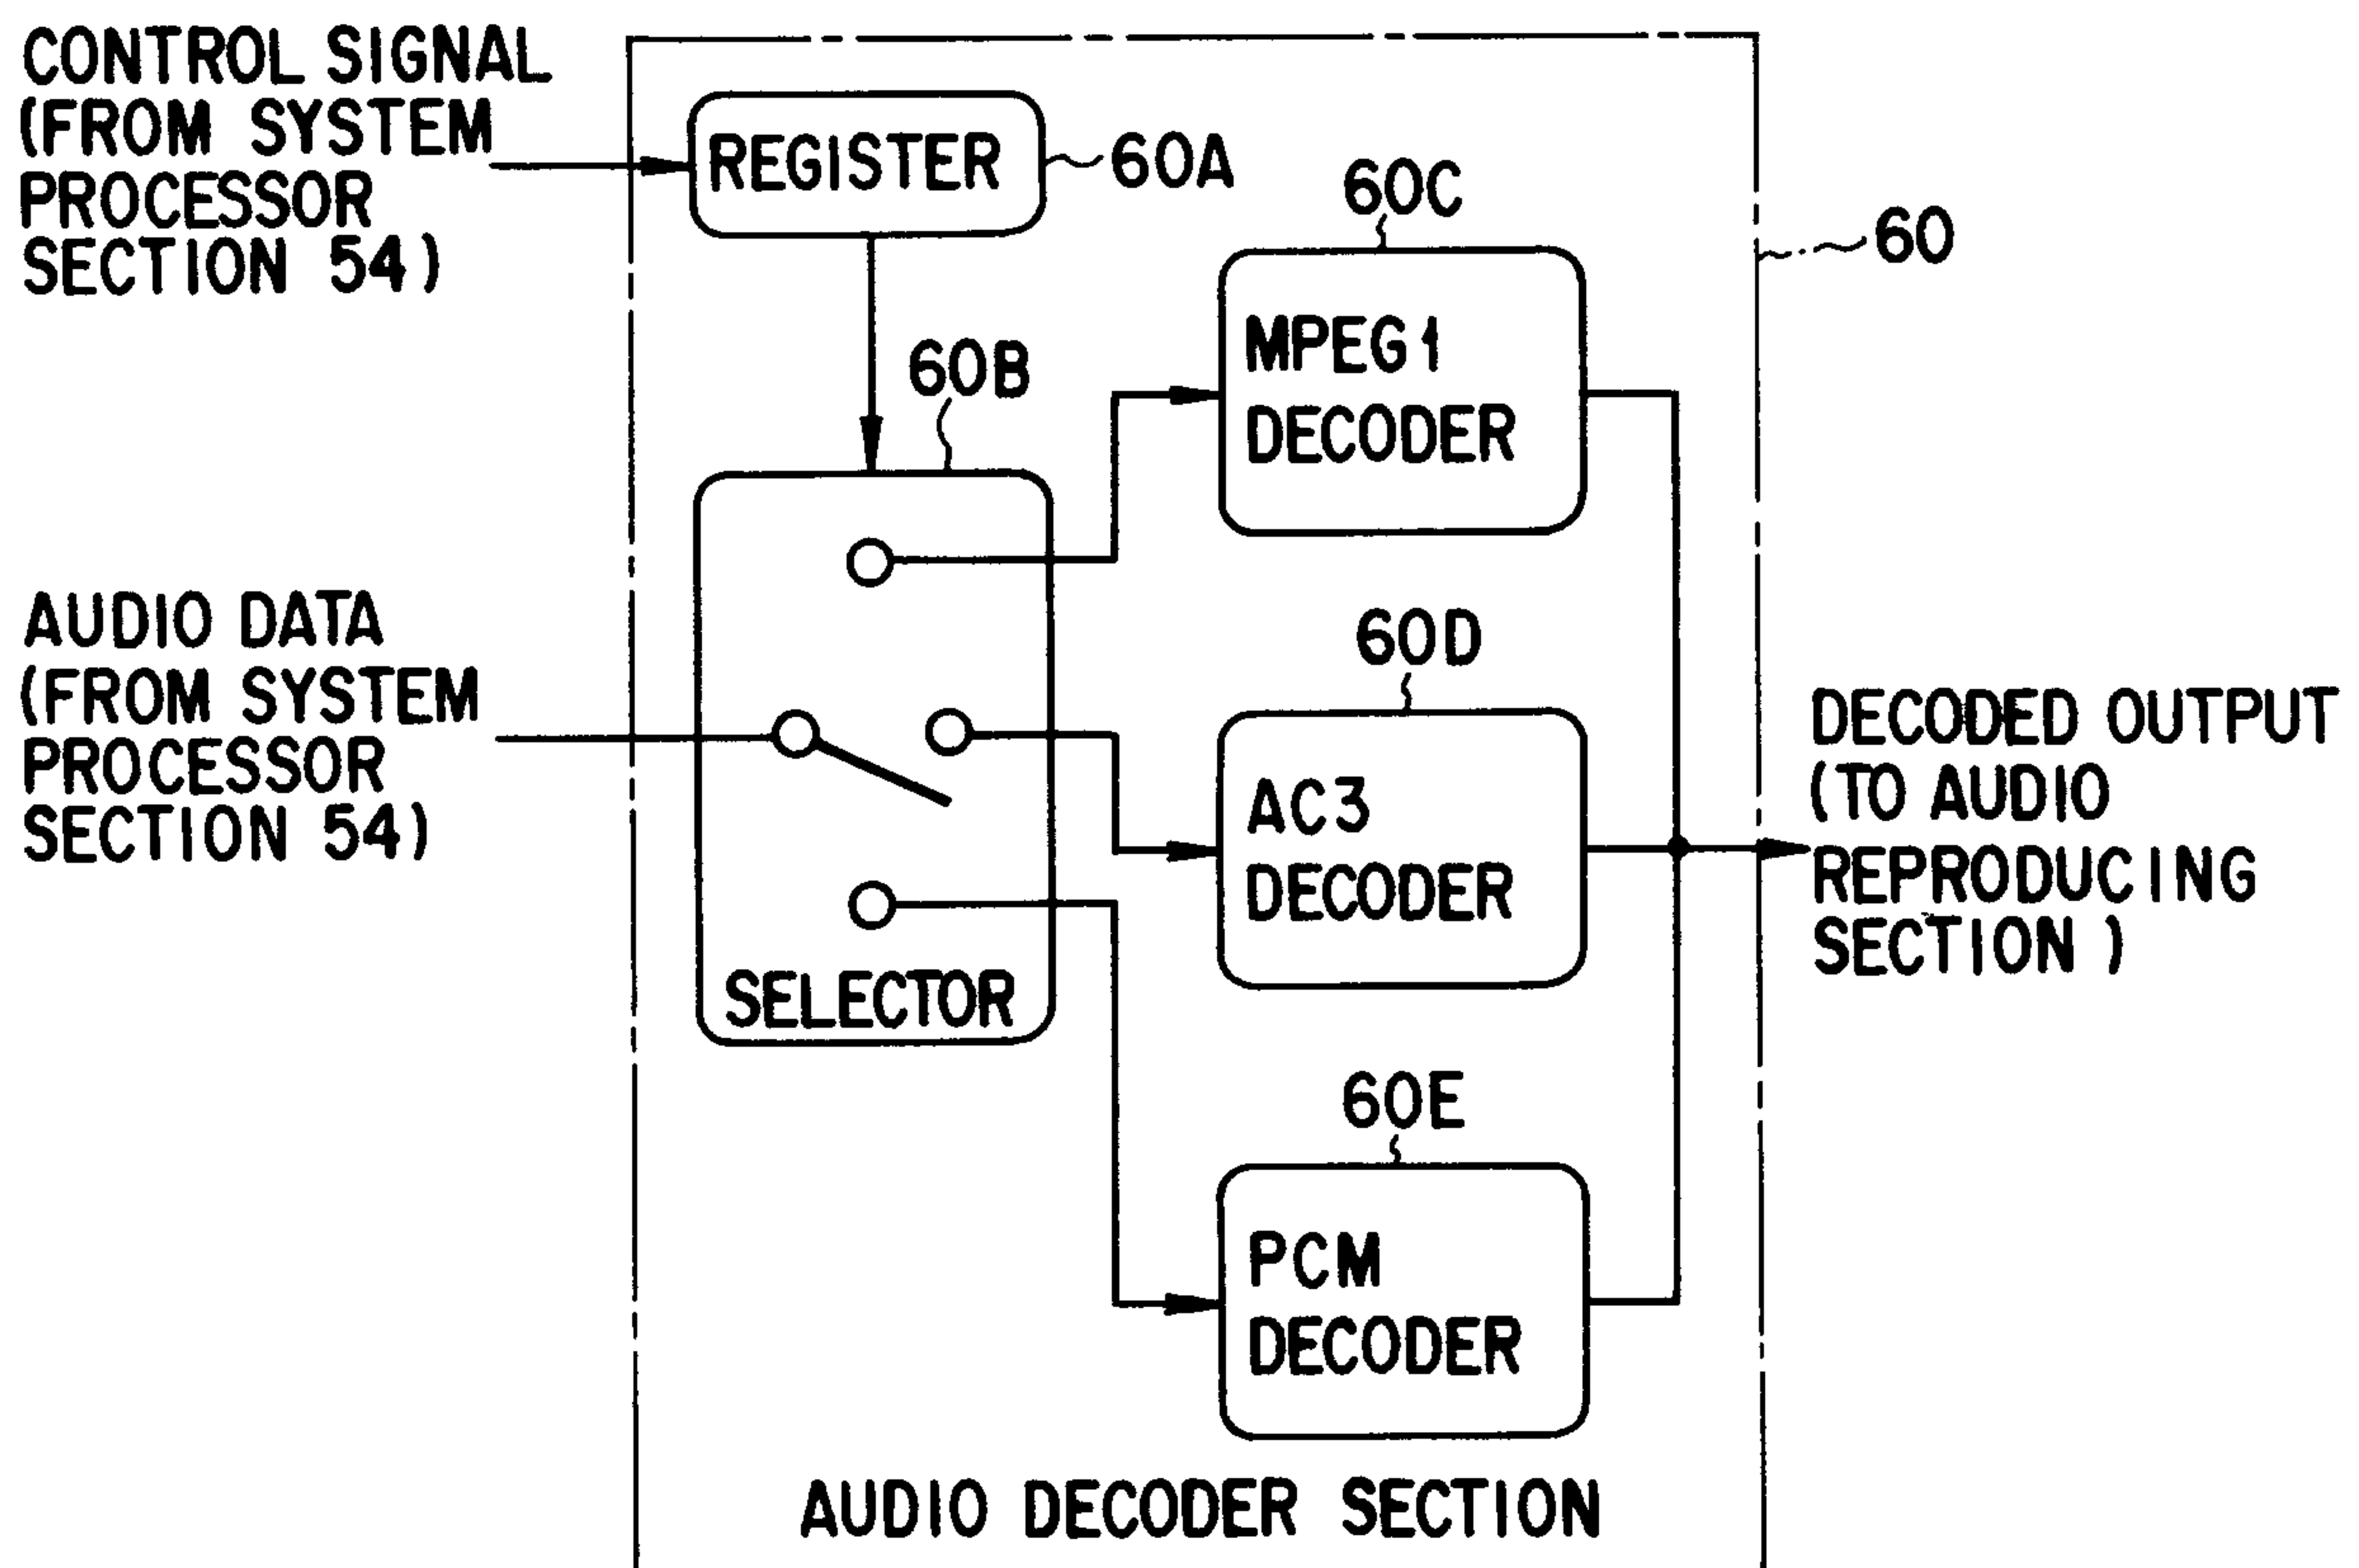


FIG. 43

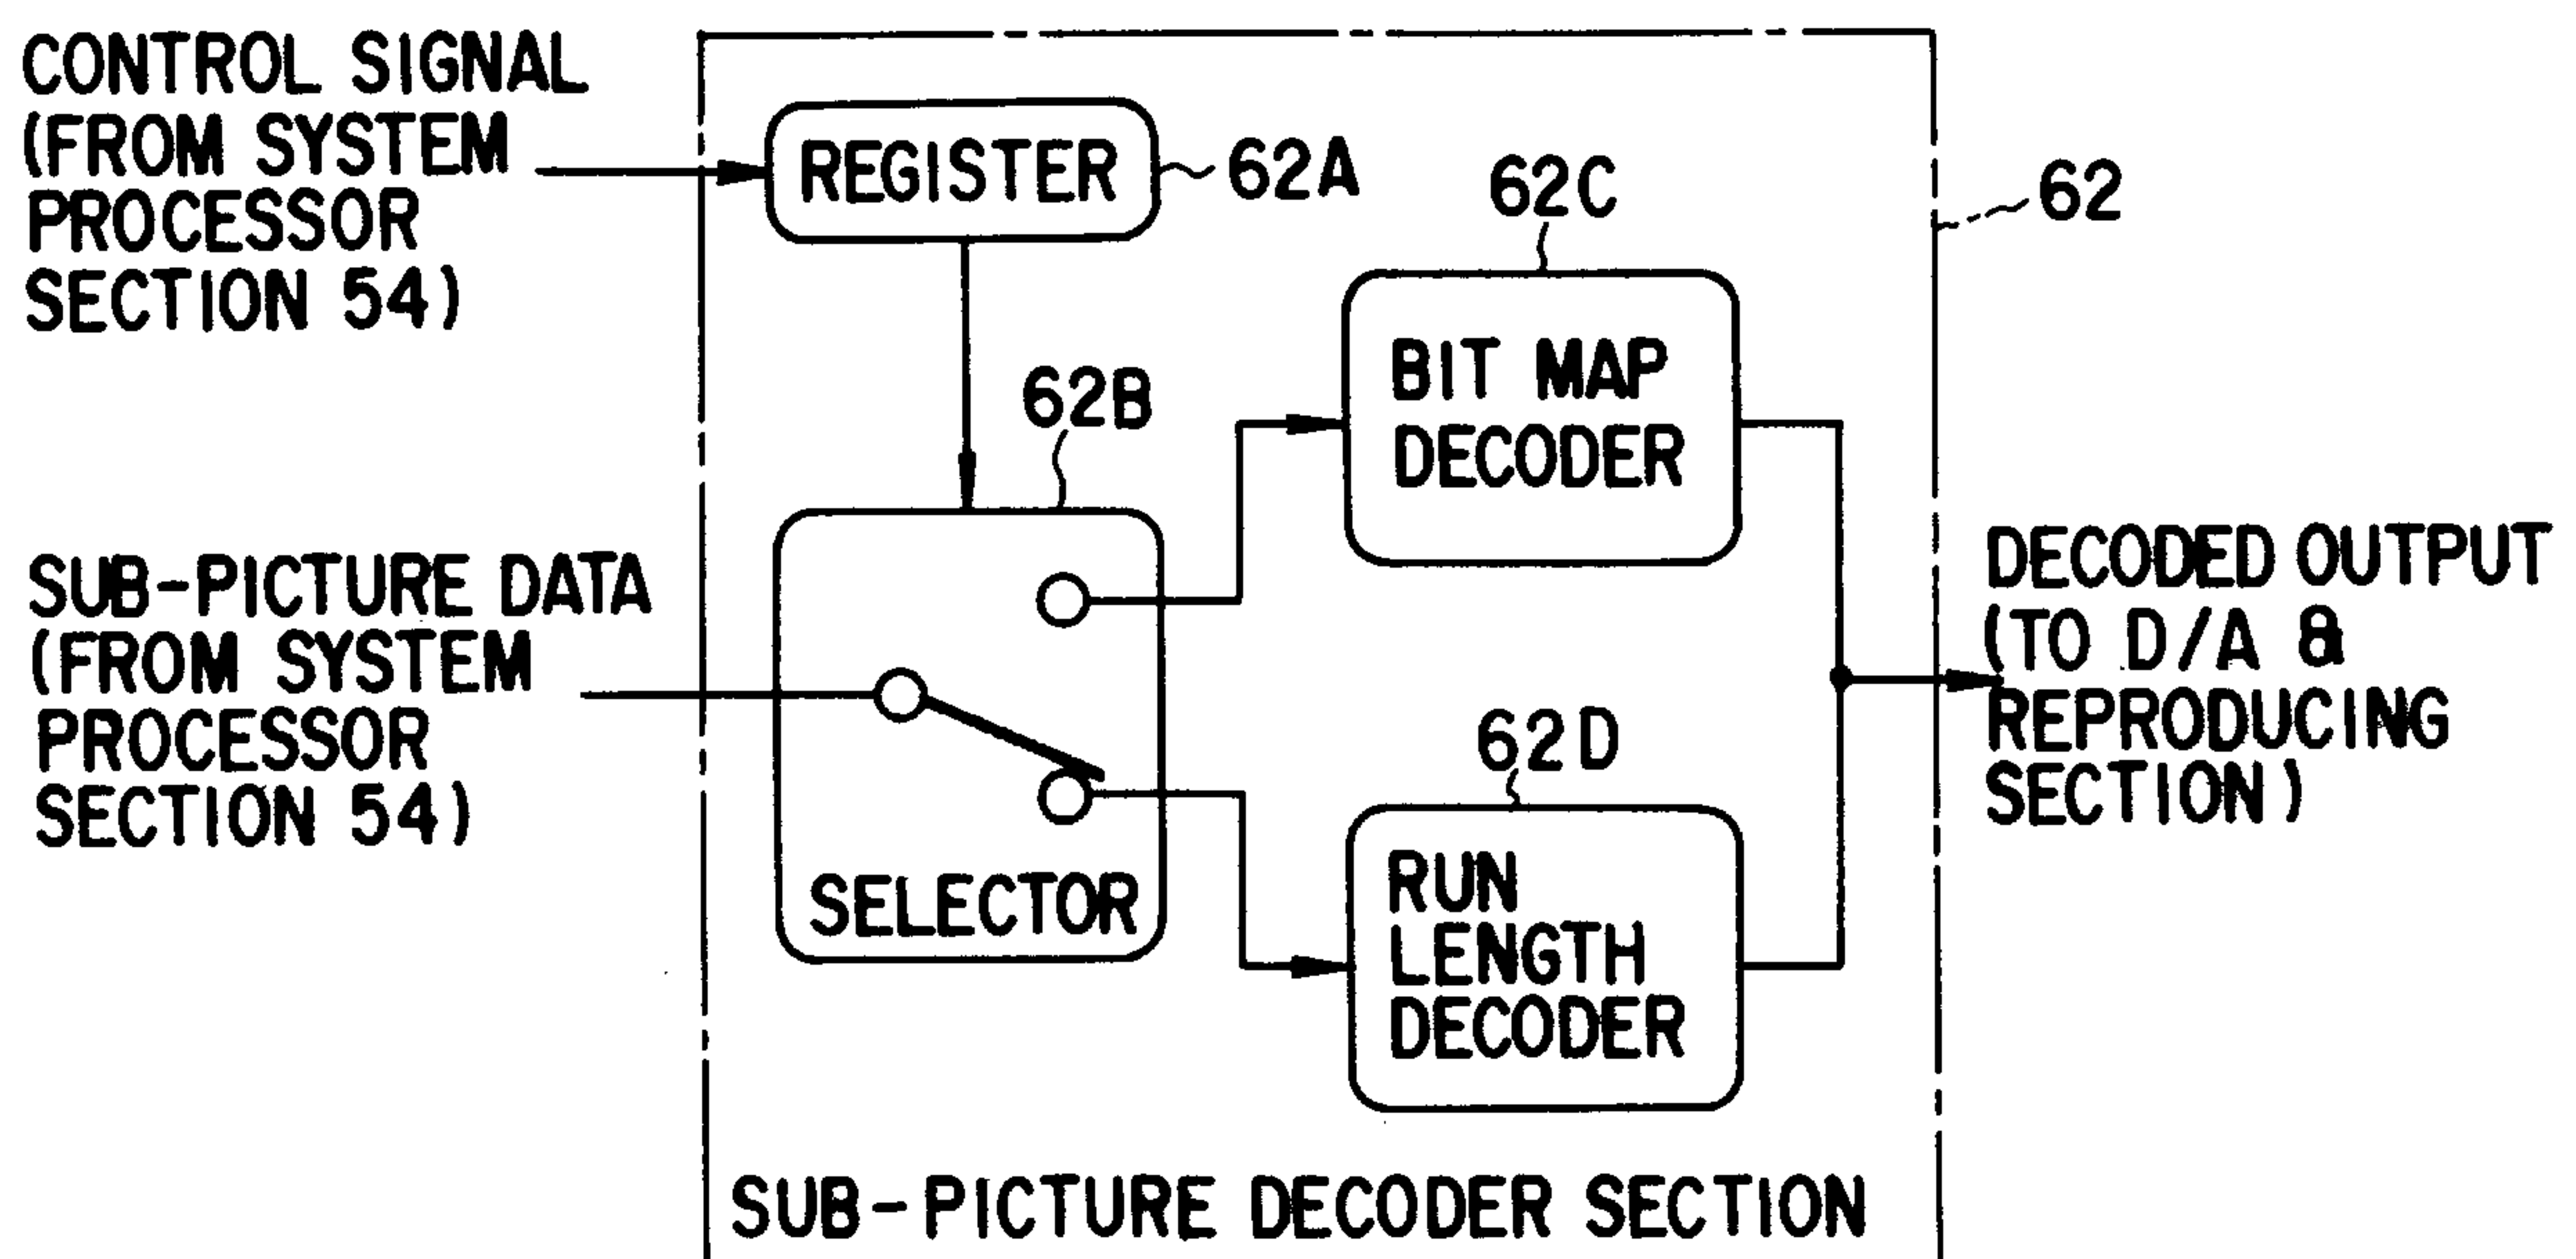


FIG. 44

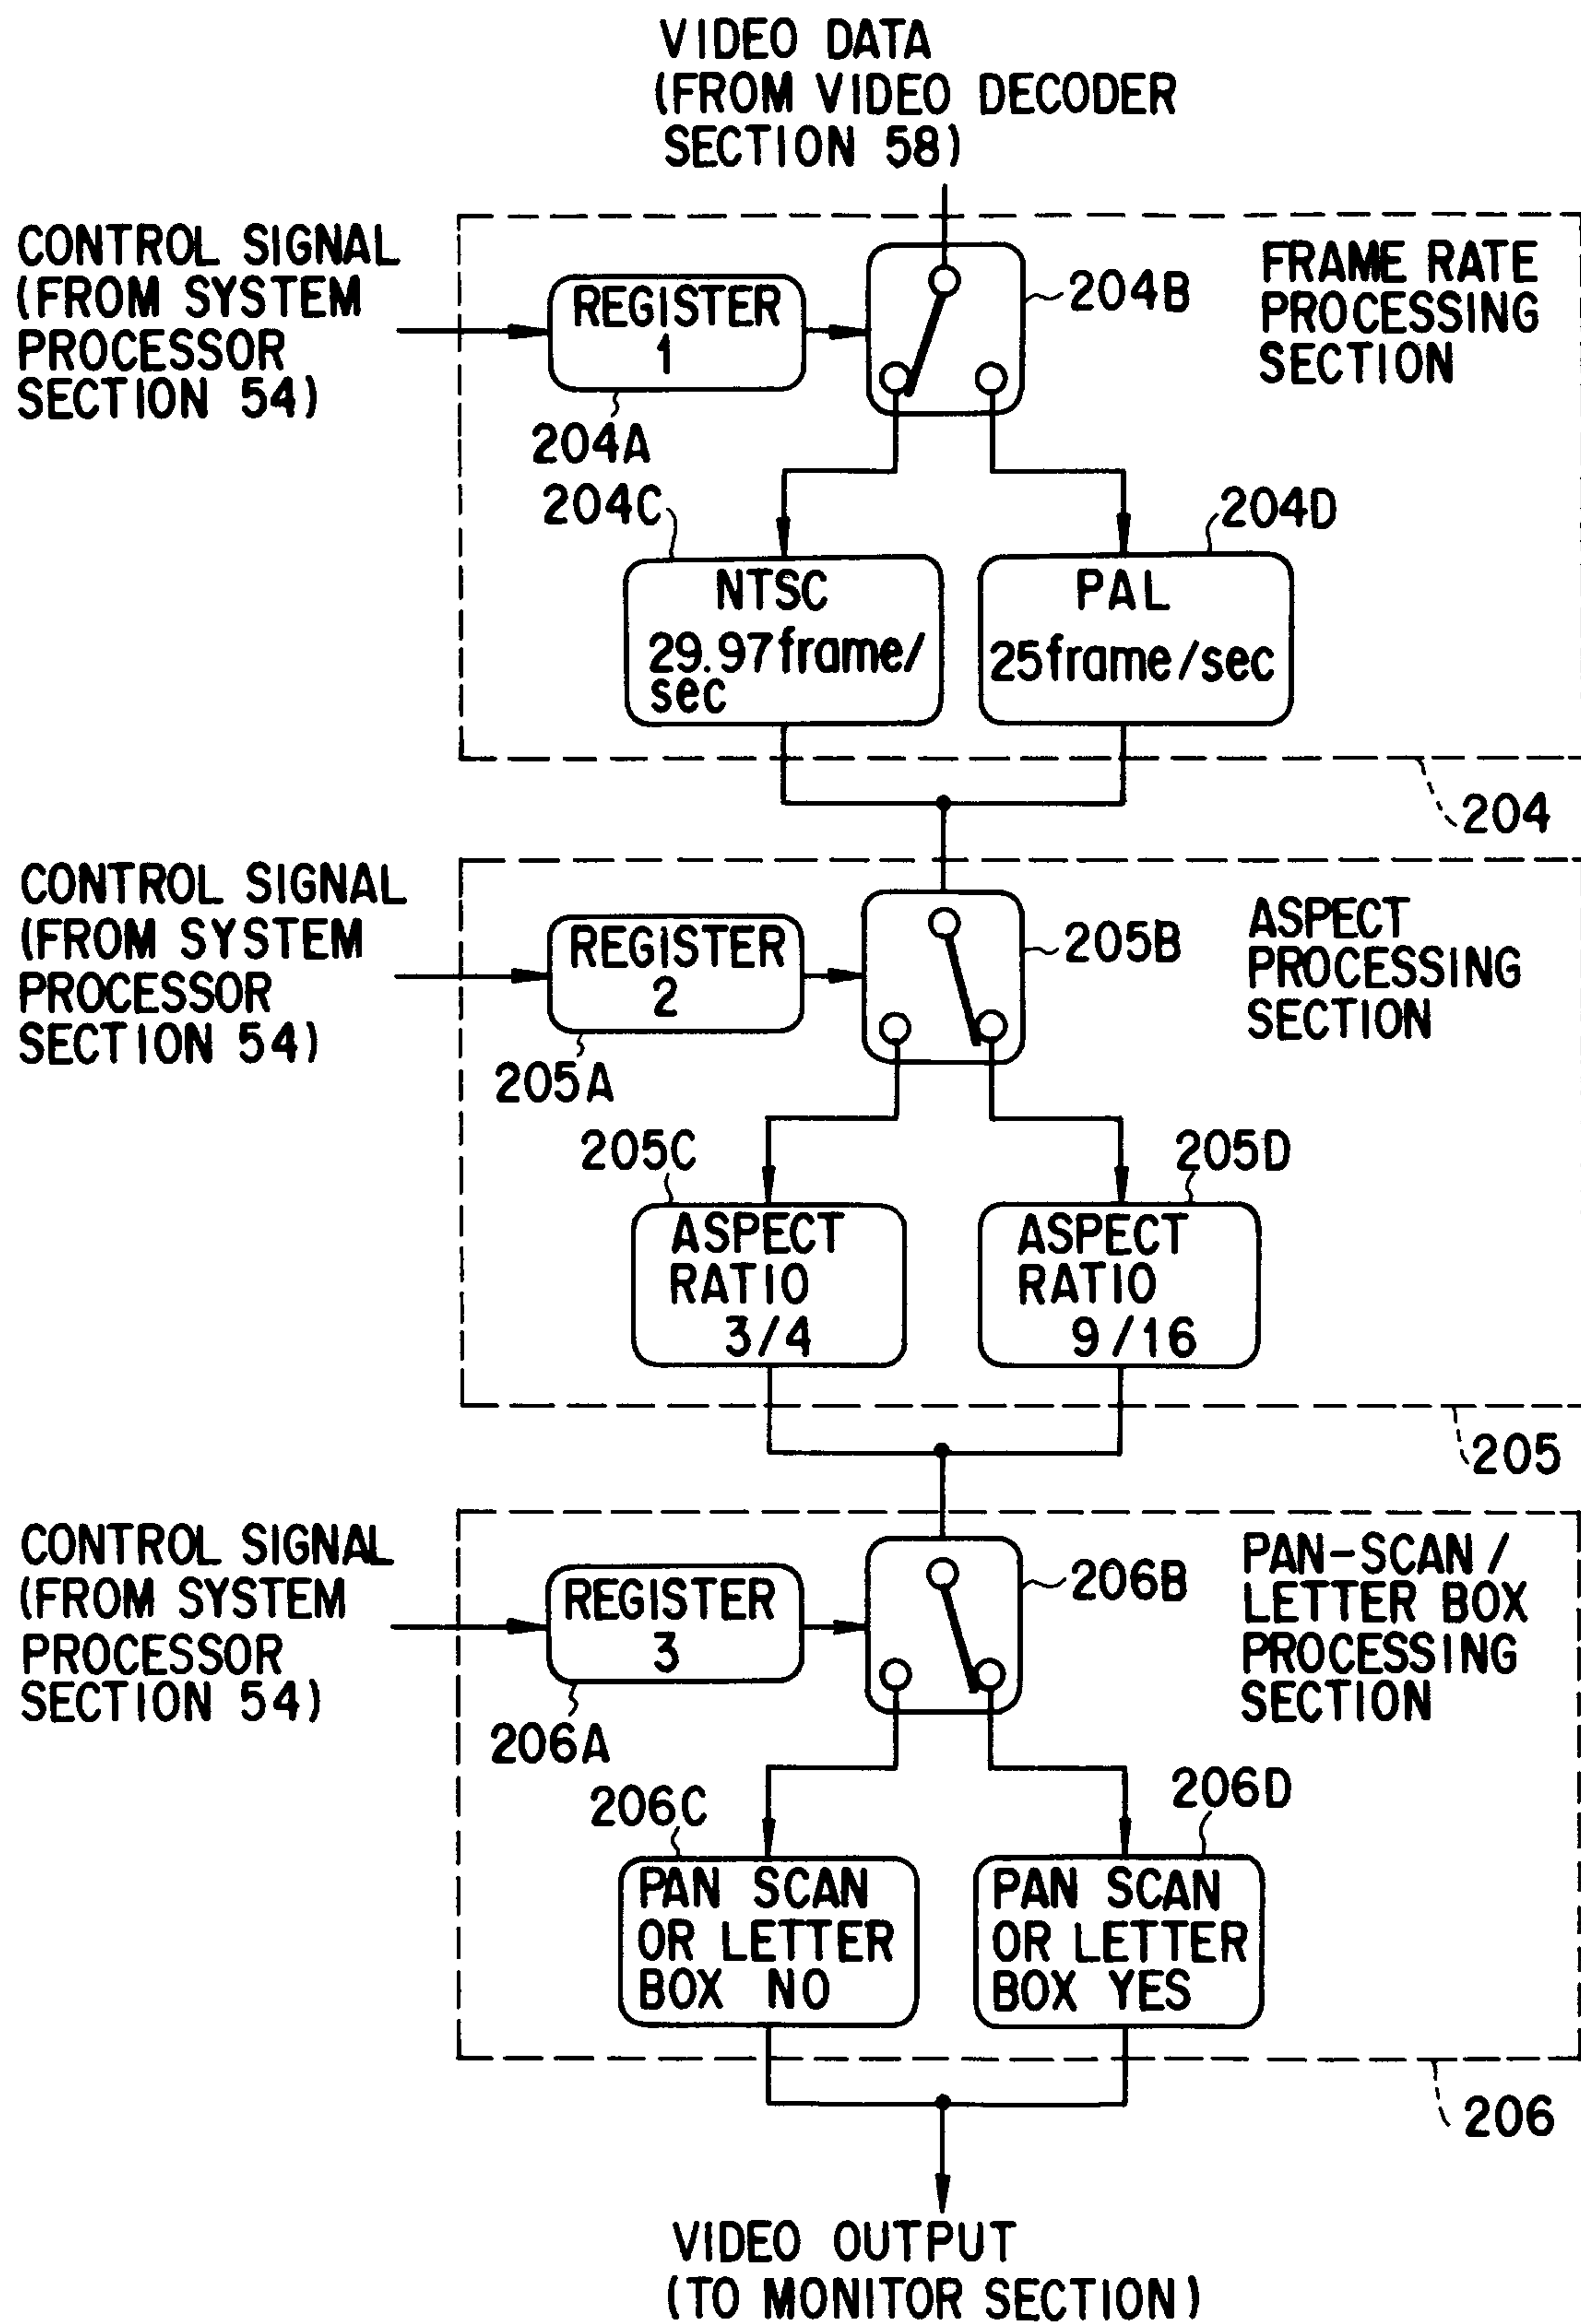


FIG. 45

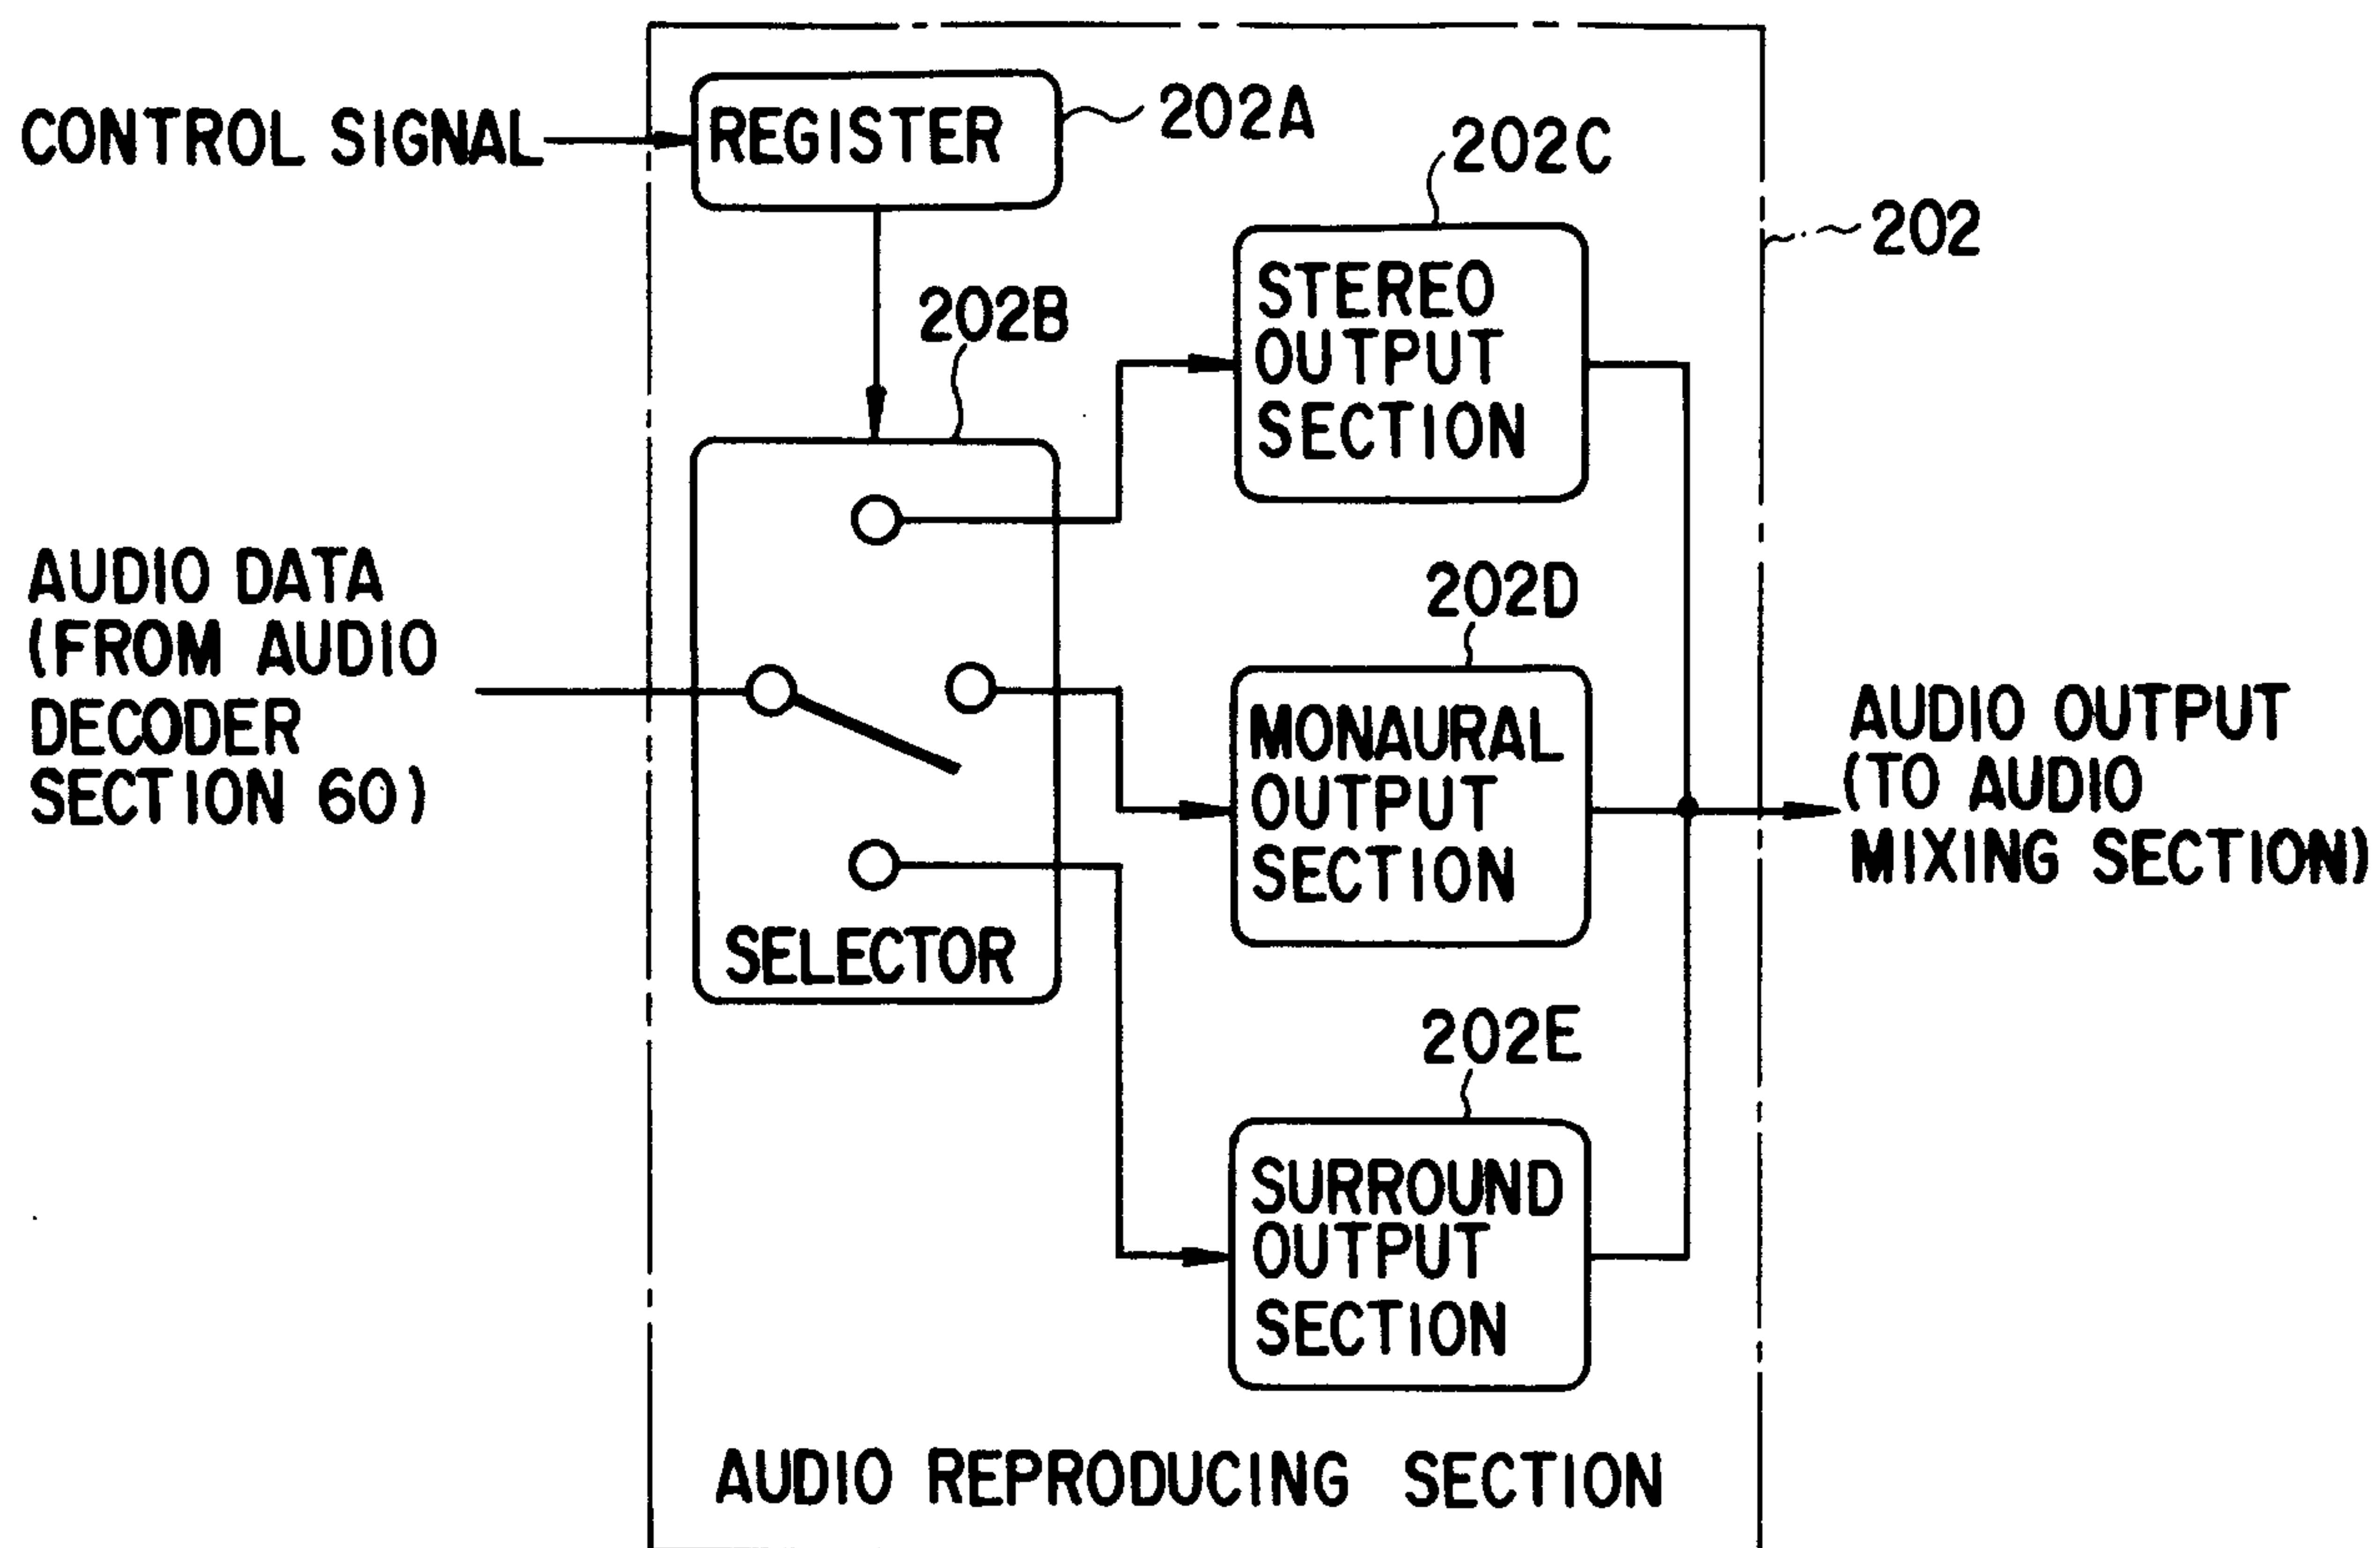


FIG. 46

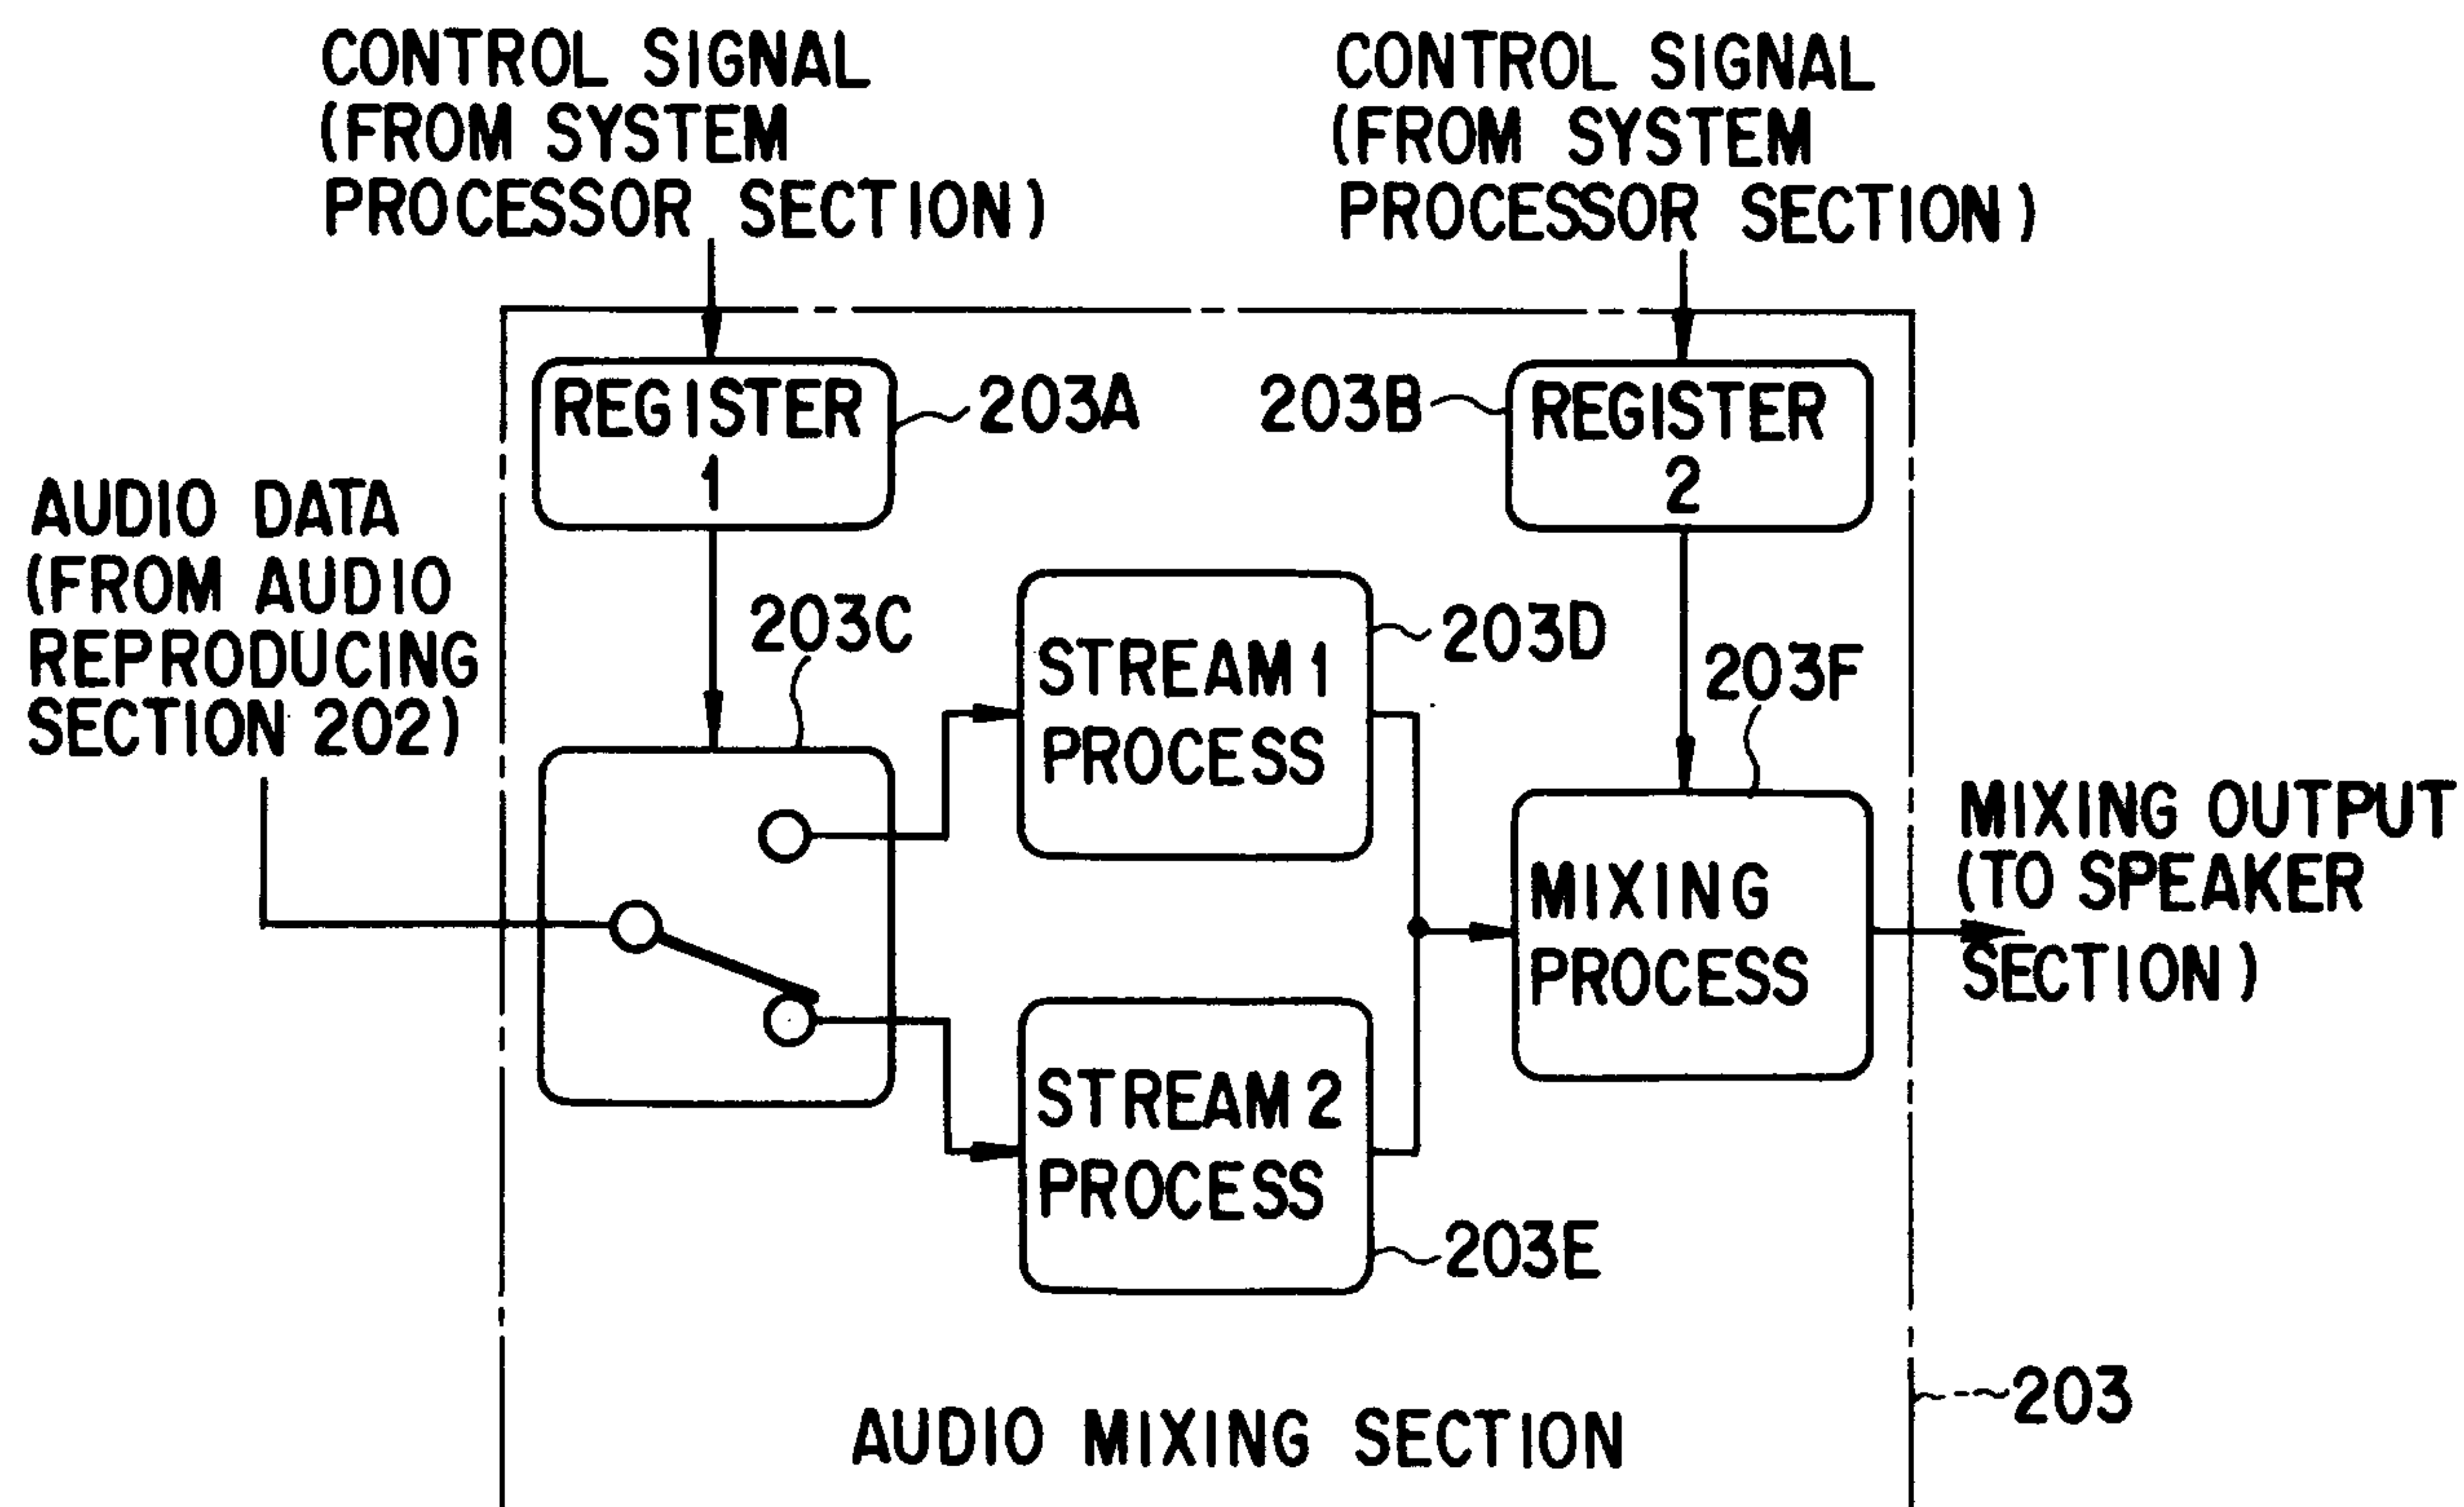


FIG. 47

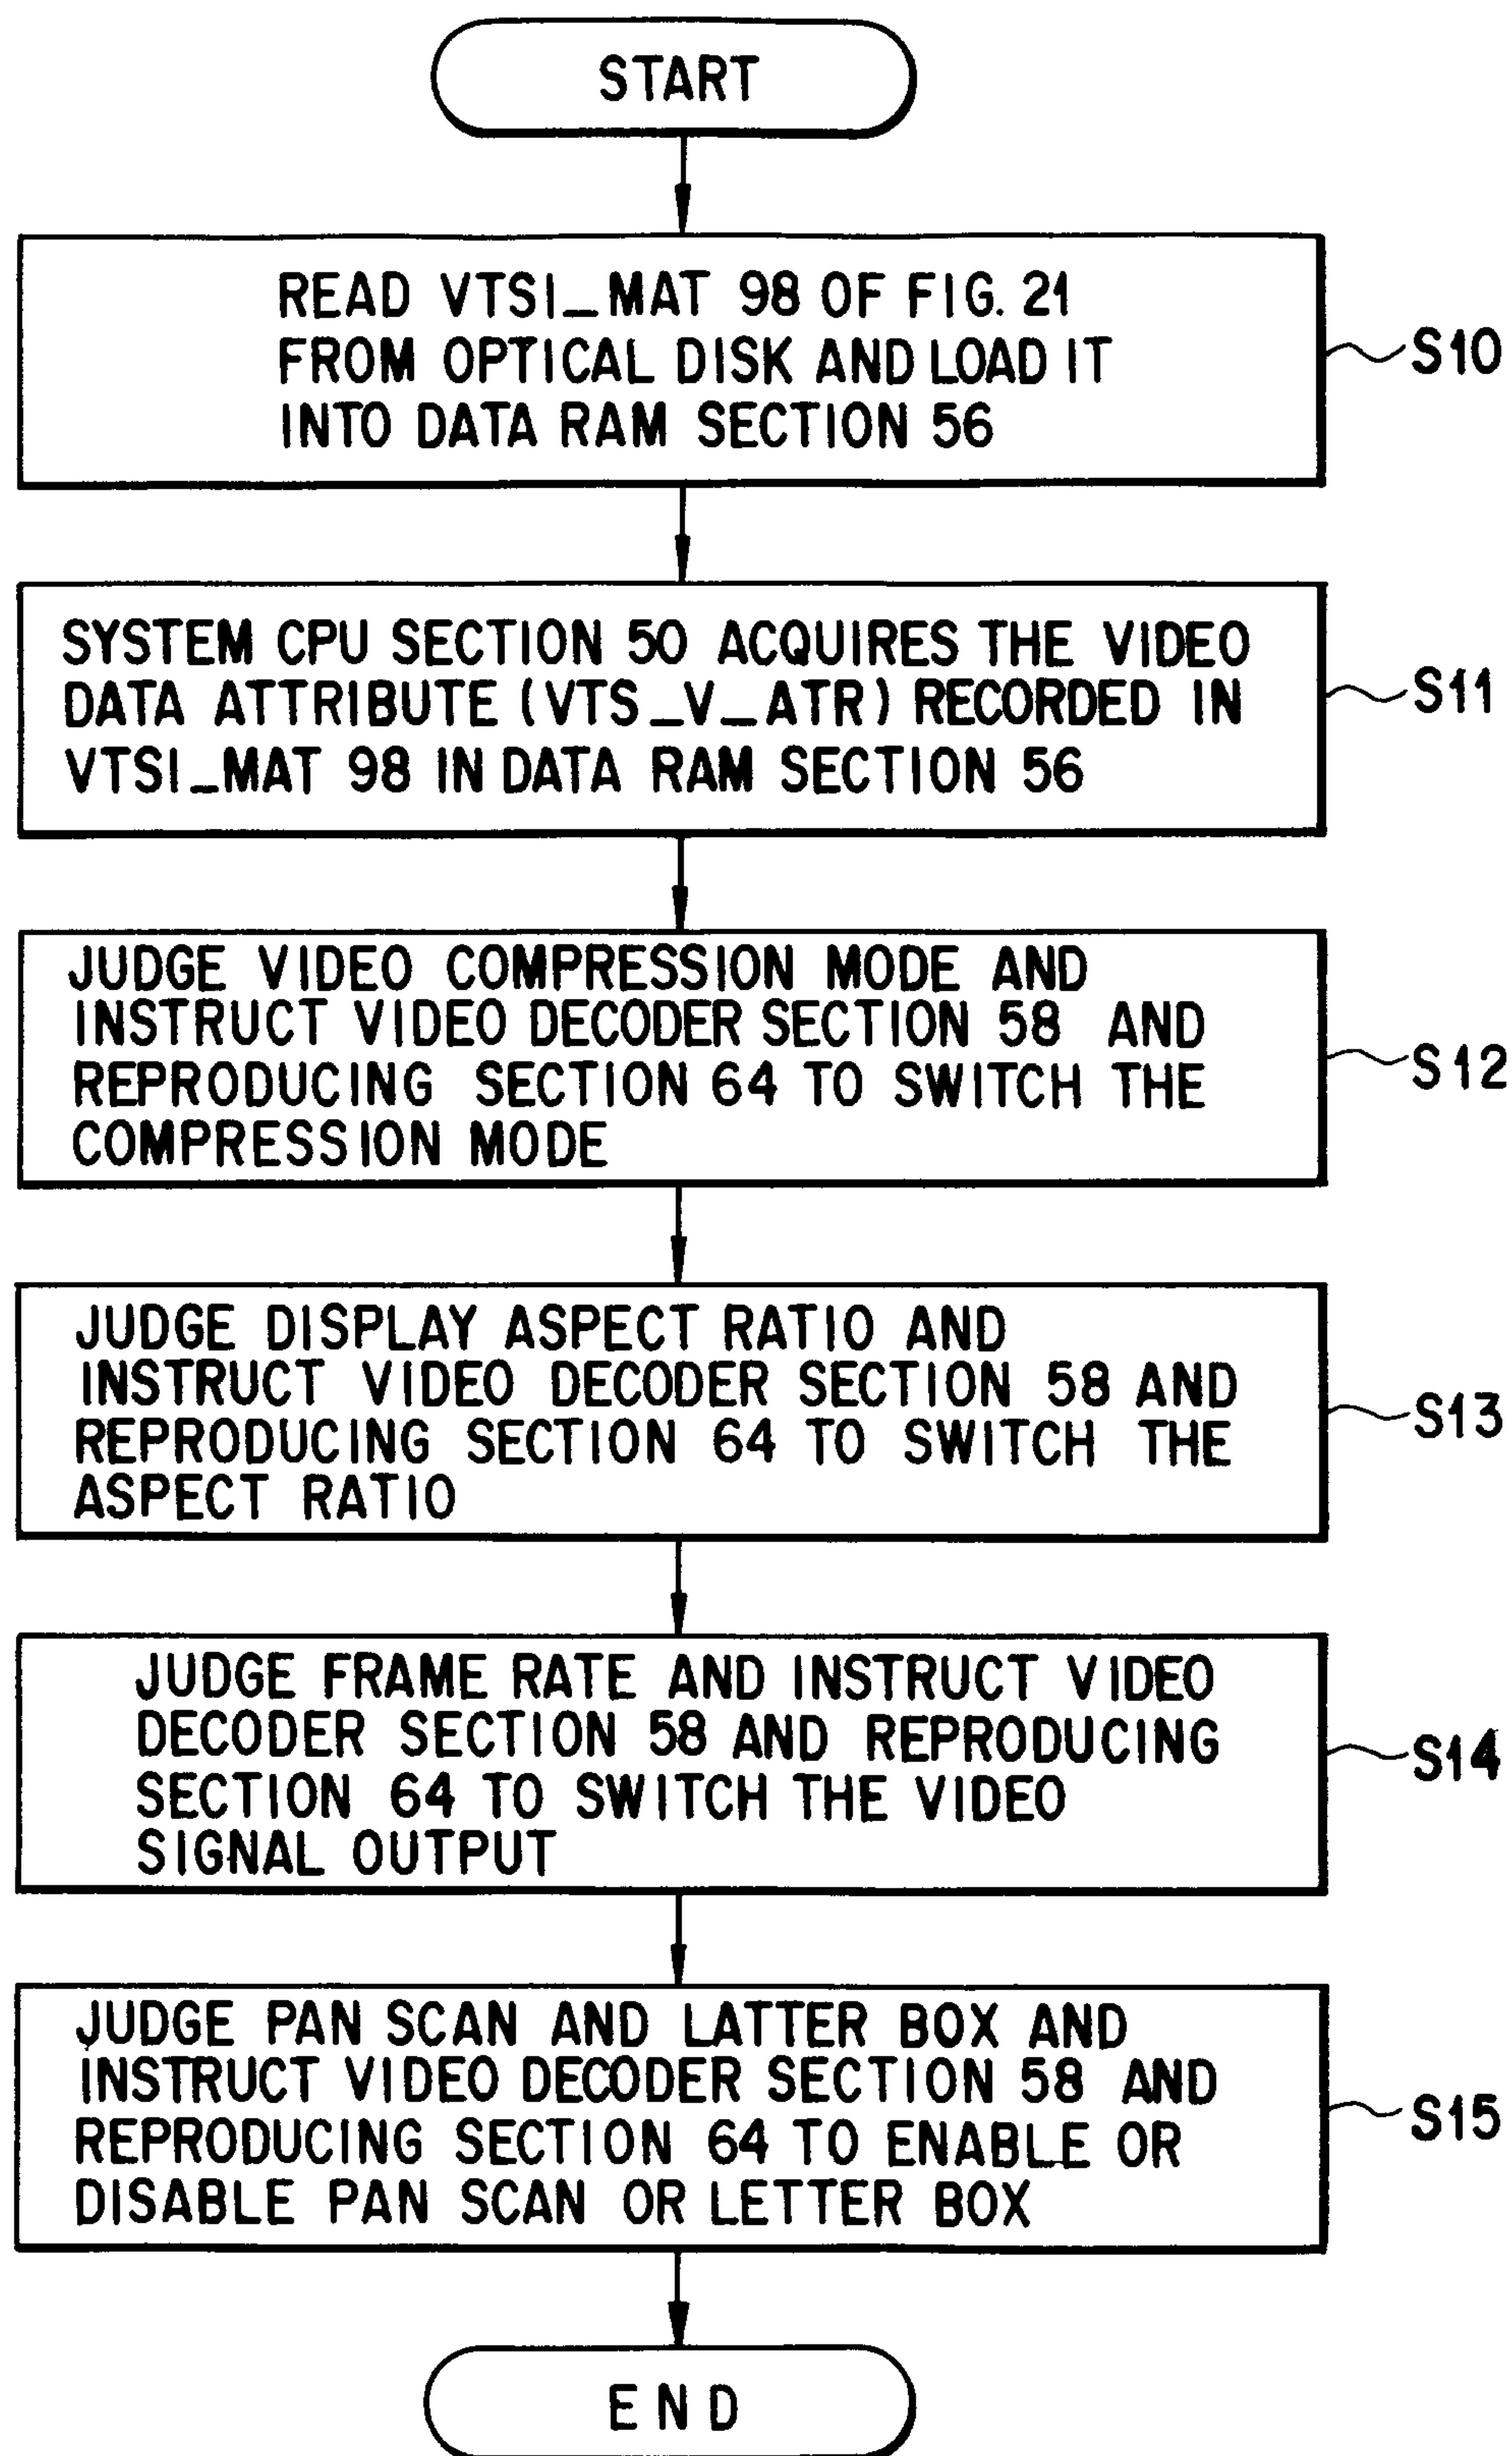


FIG. 48

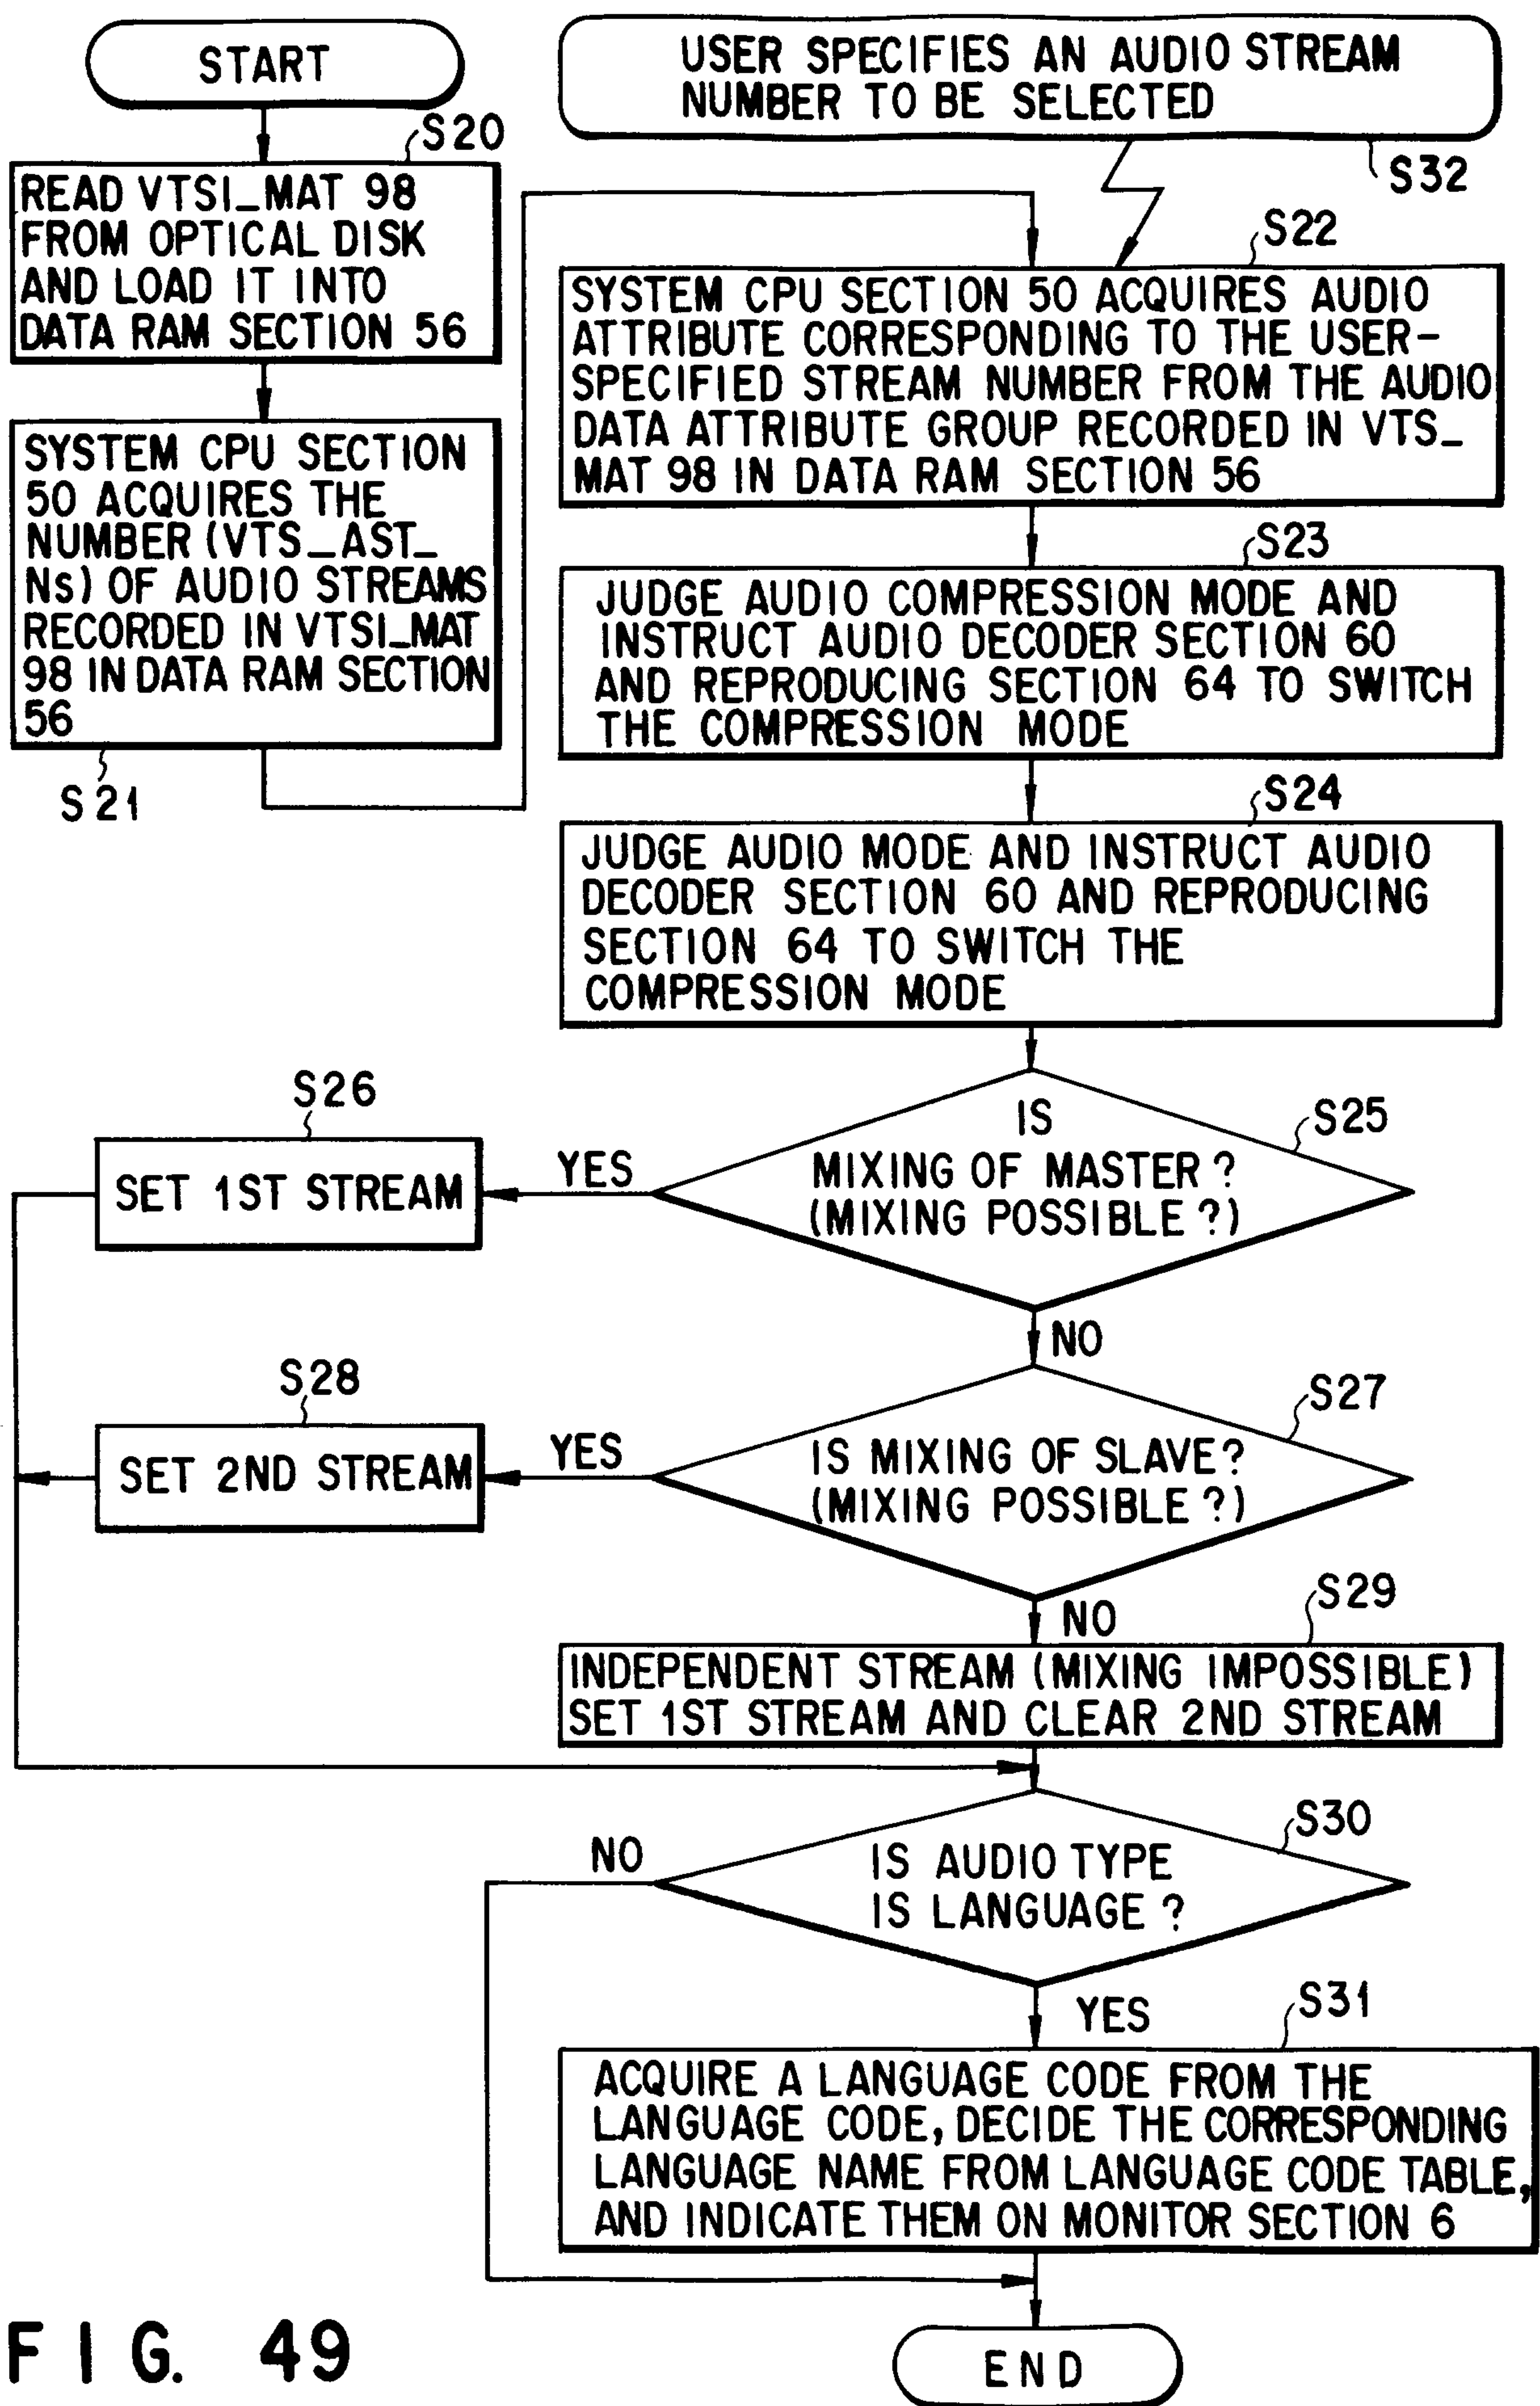


FIG. 49

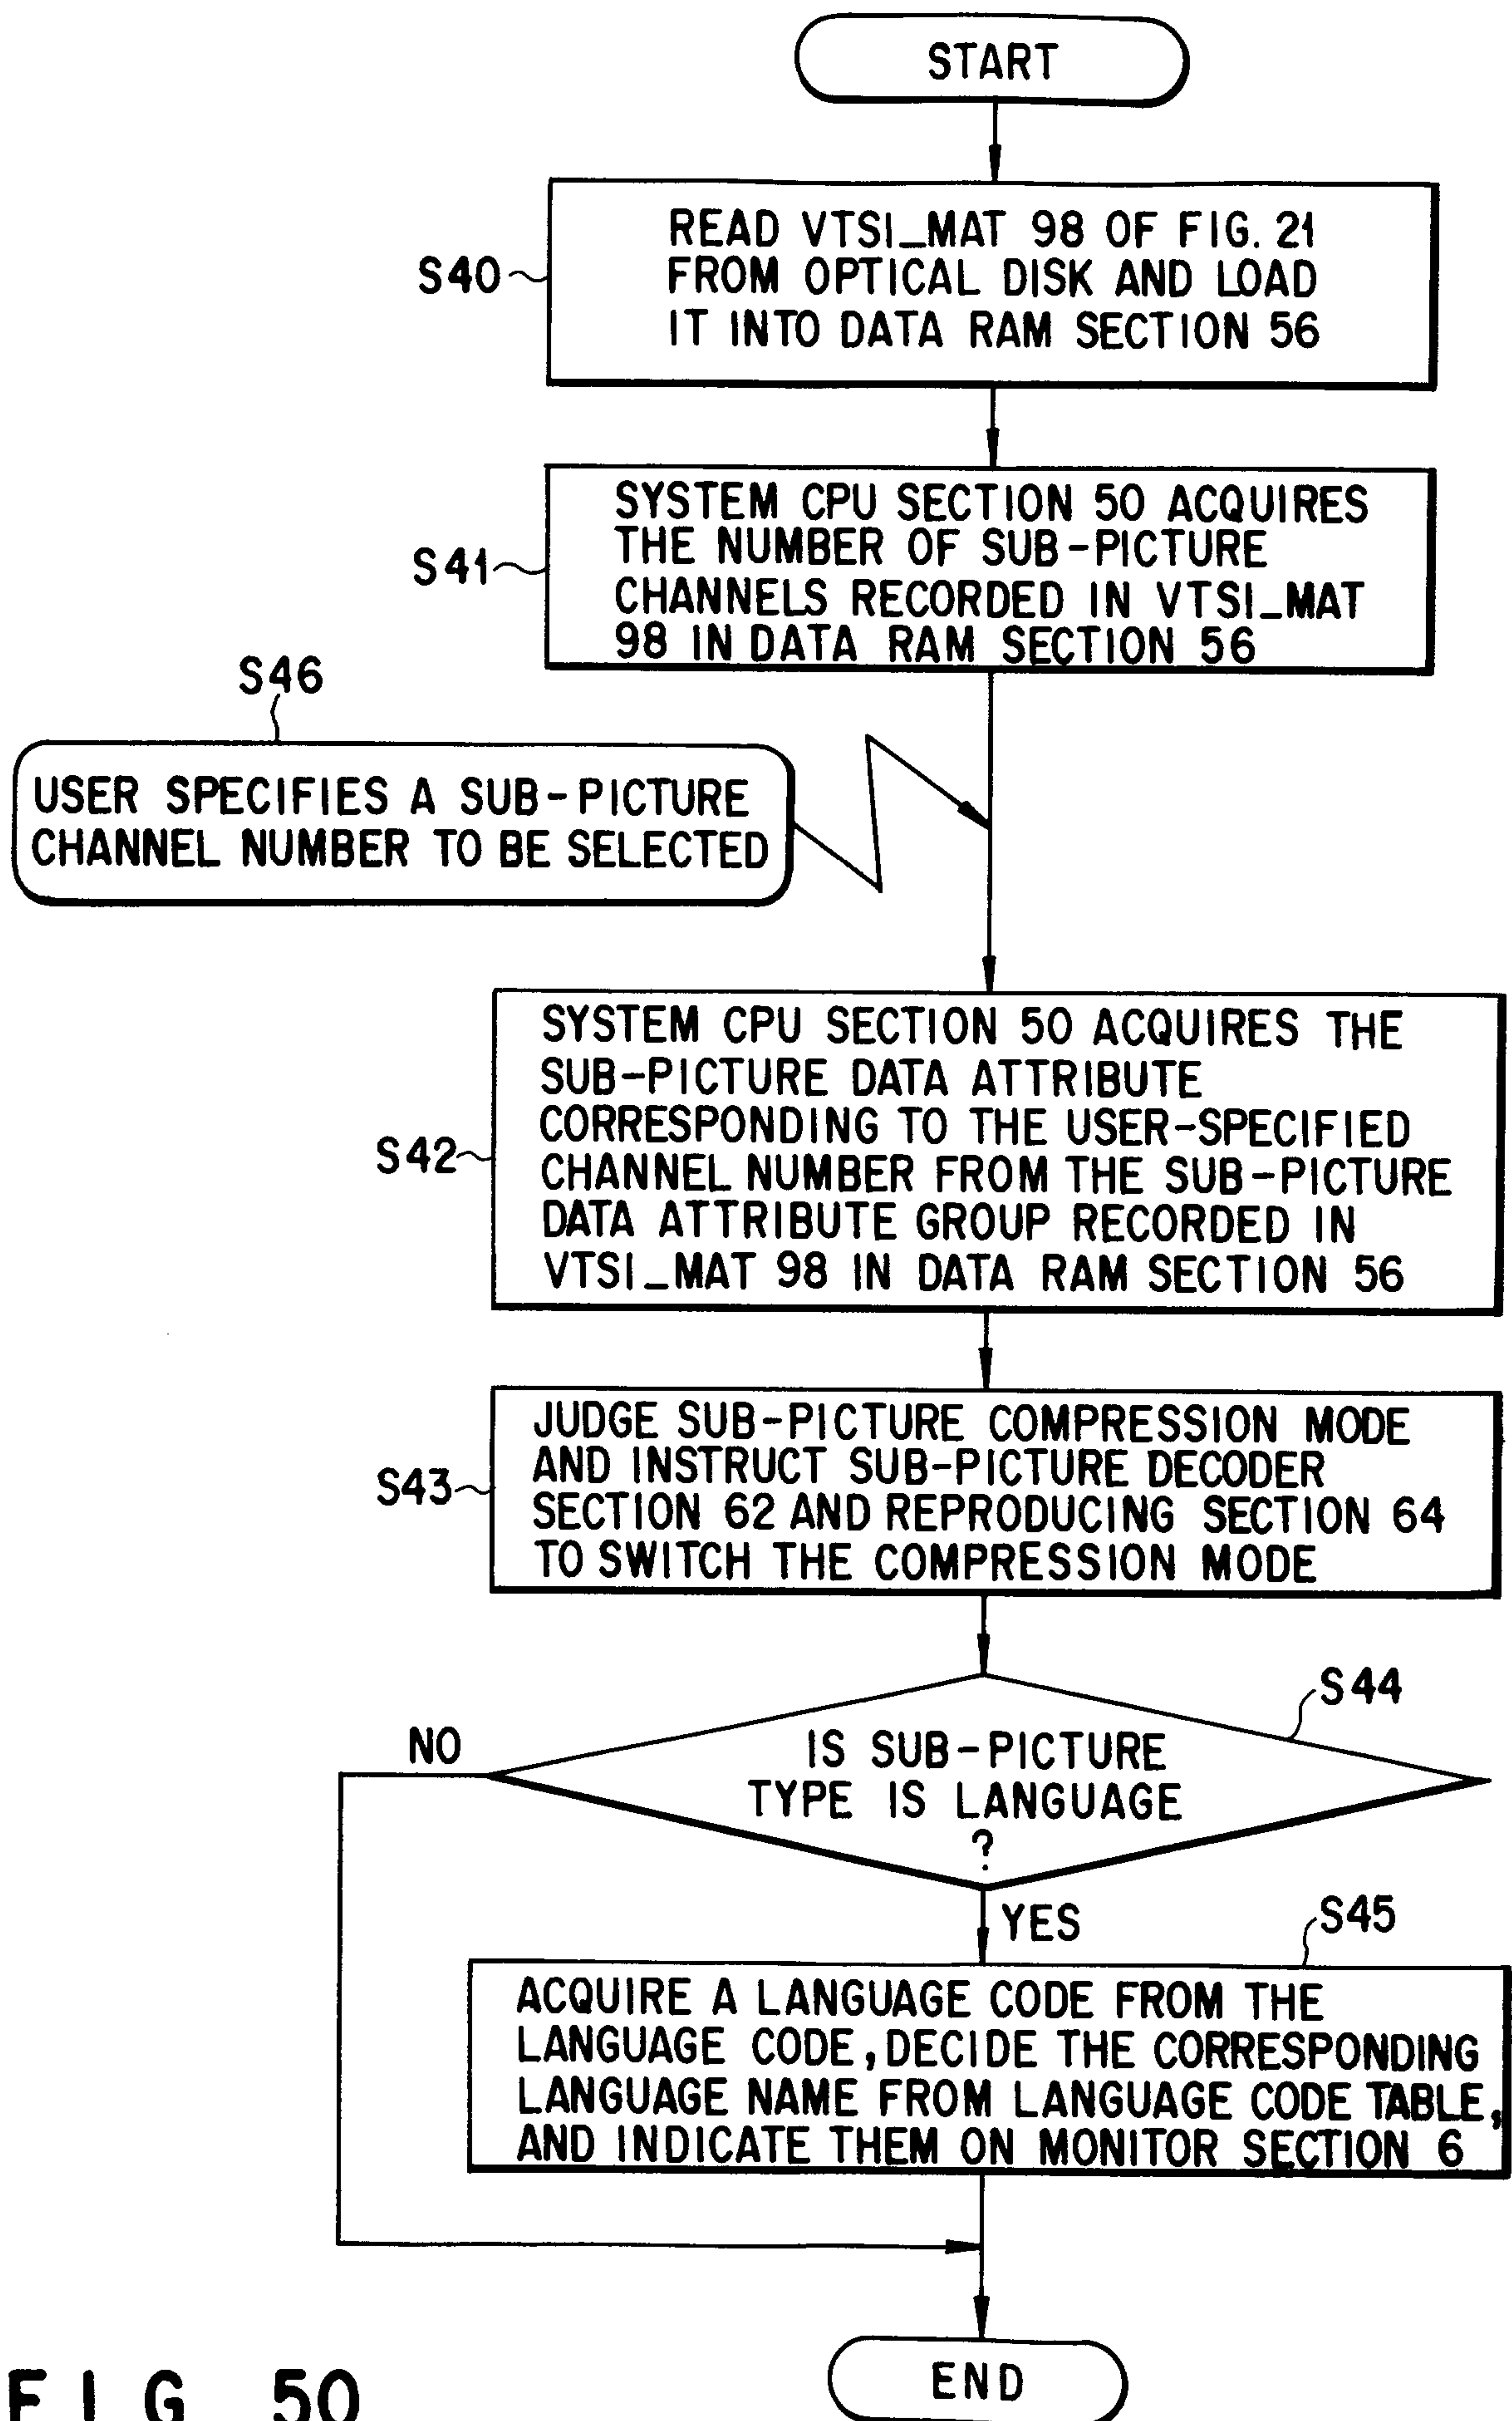


FIG. 50

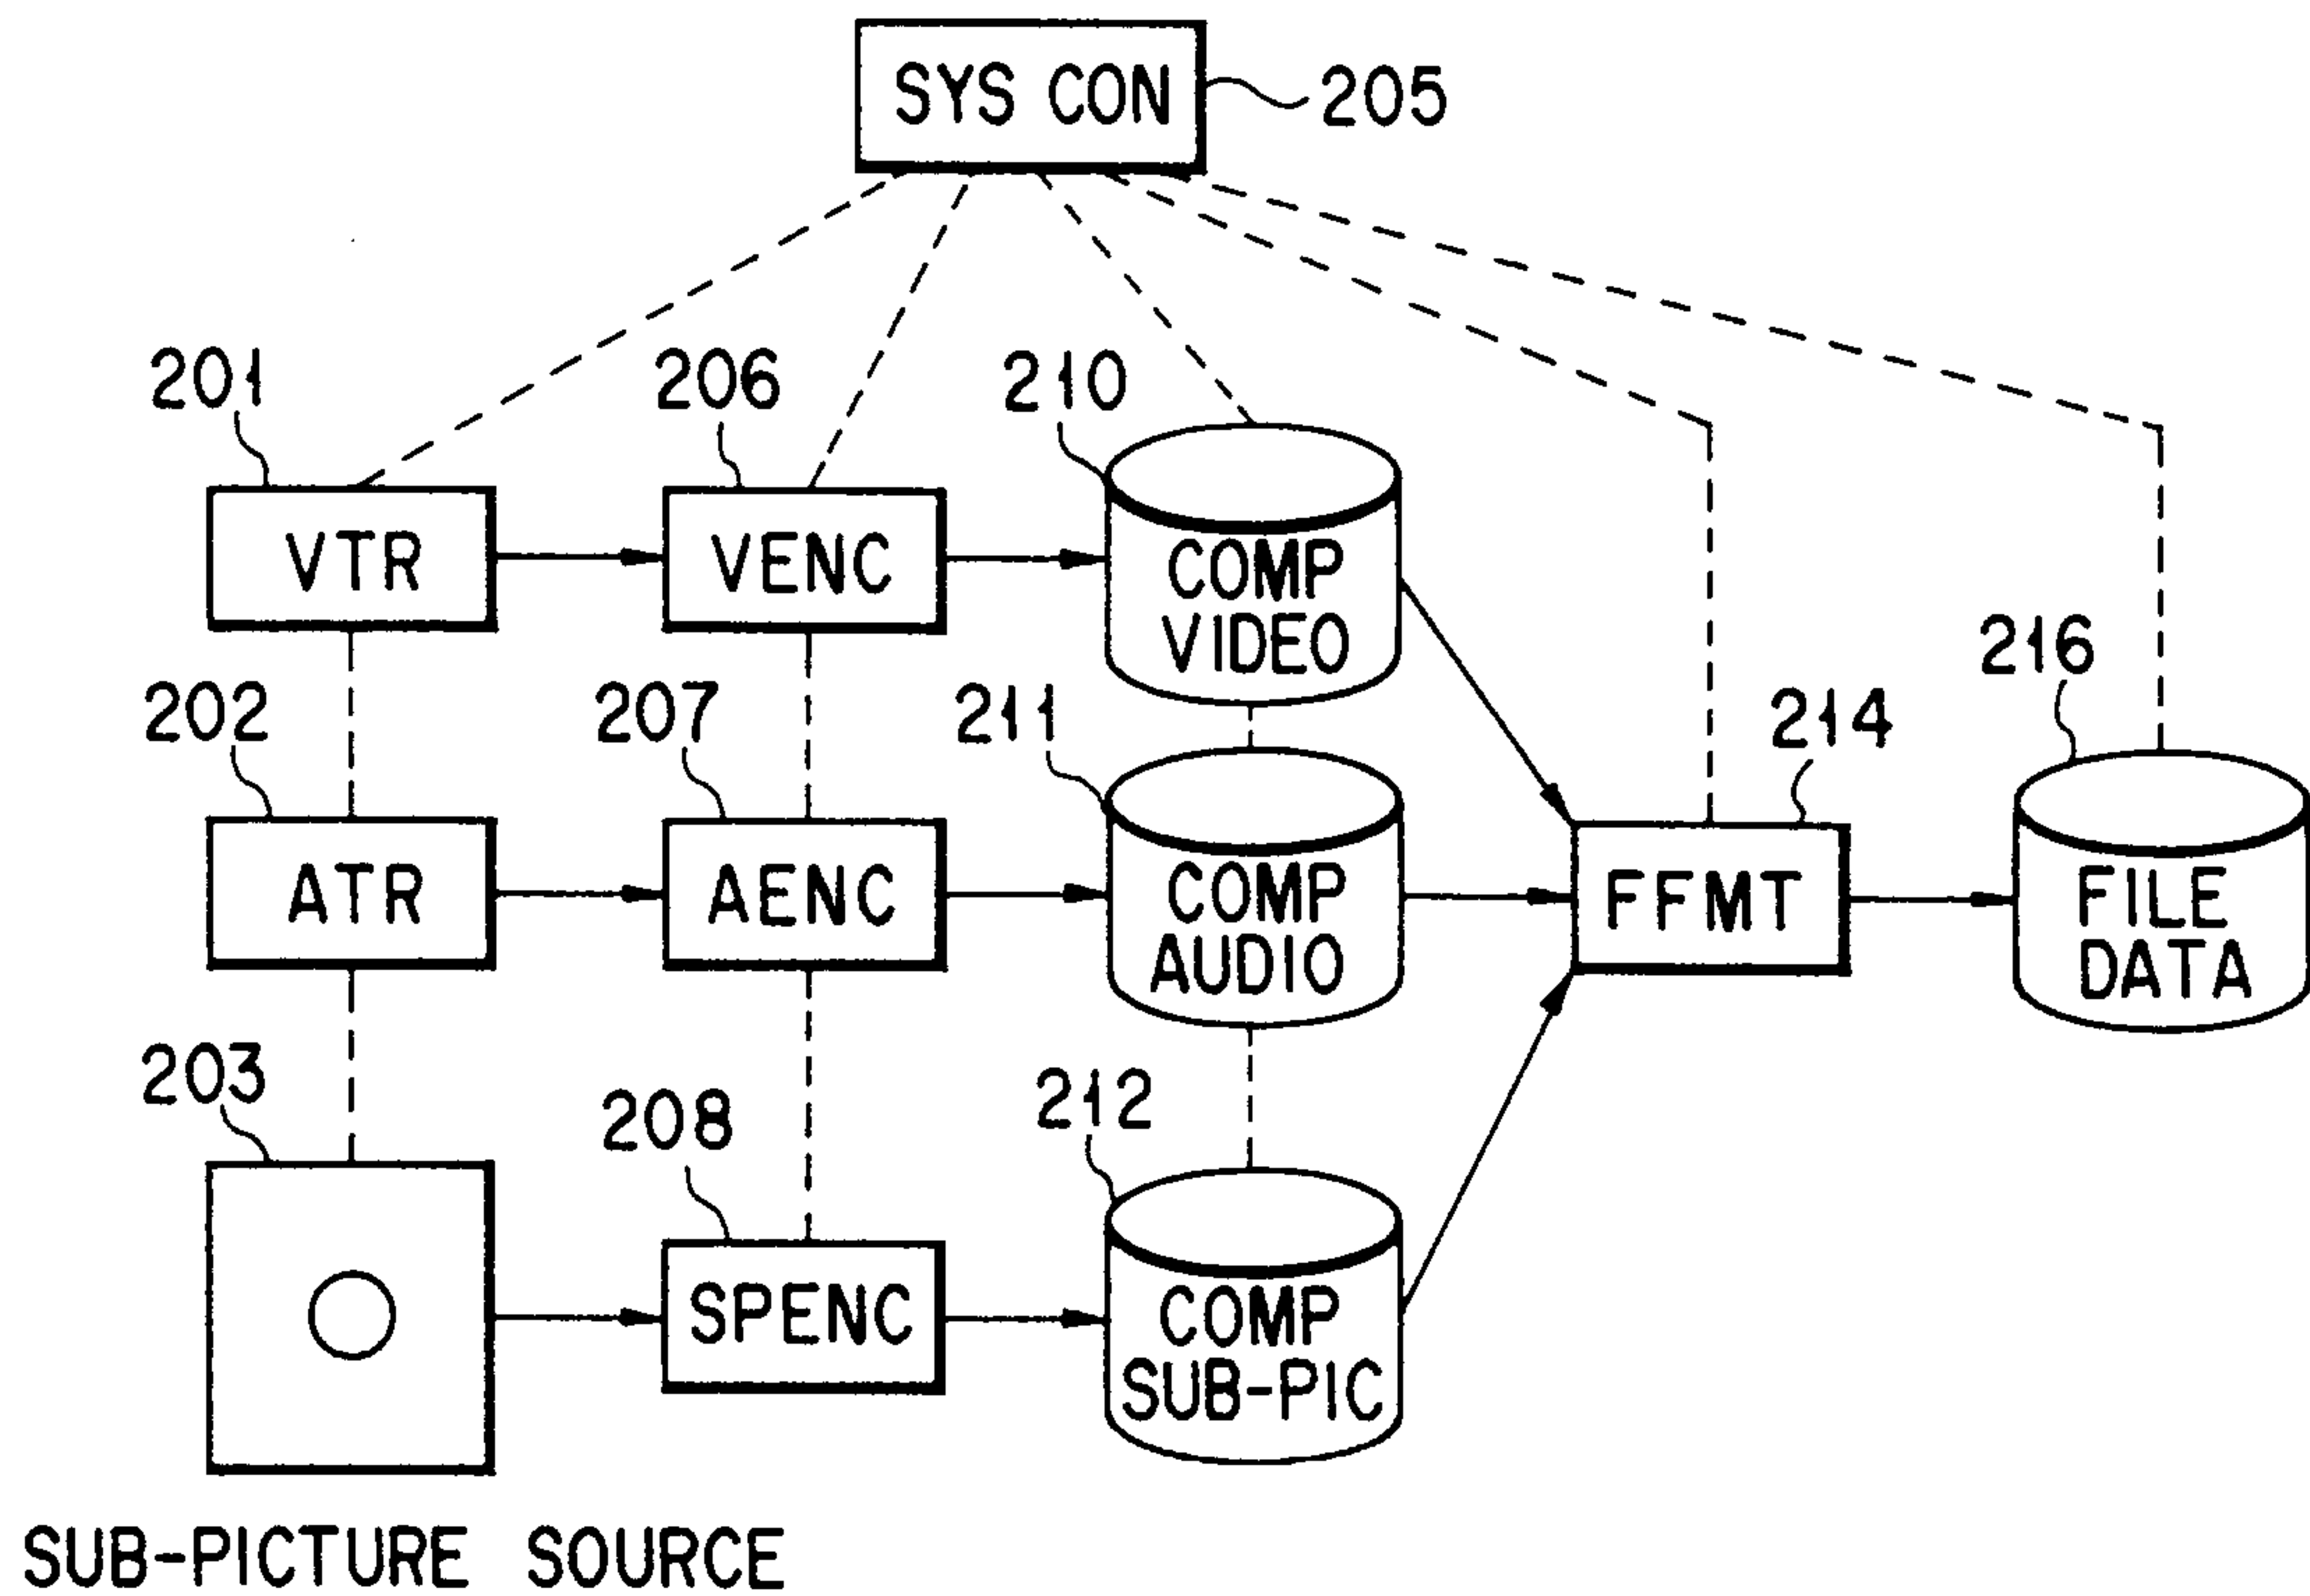


FIG. 51

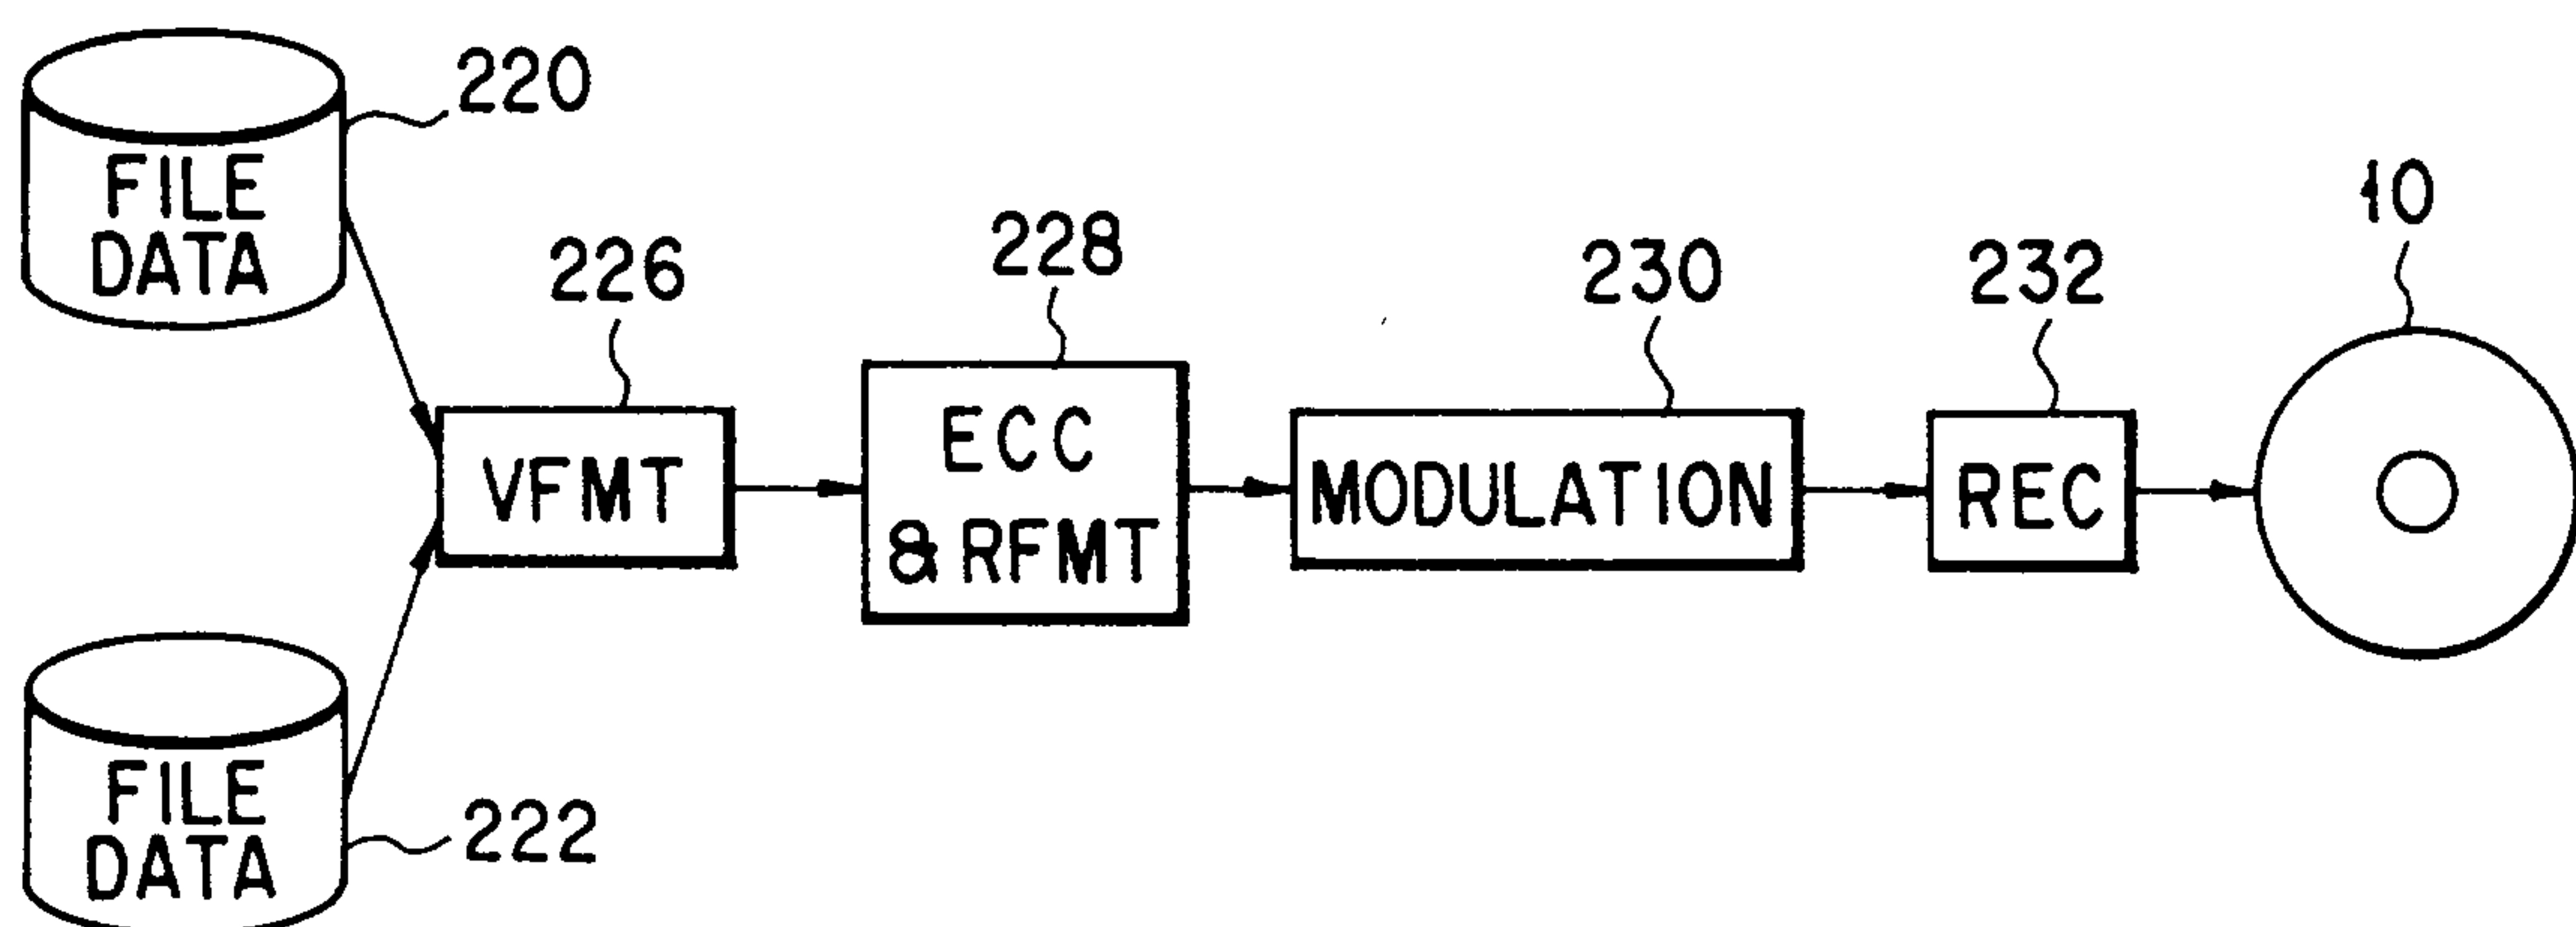


FIG. 54

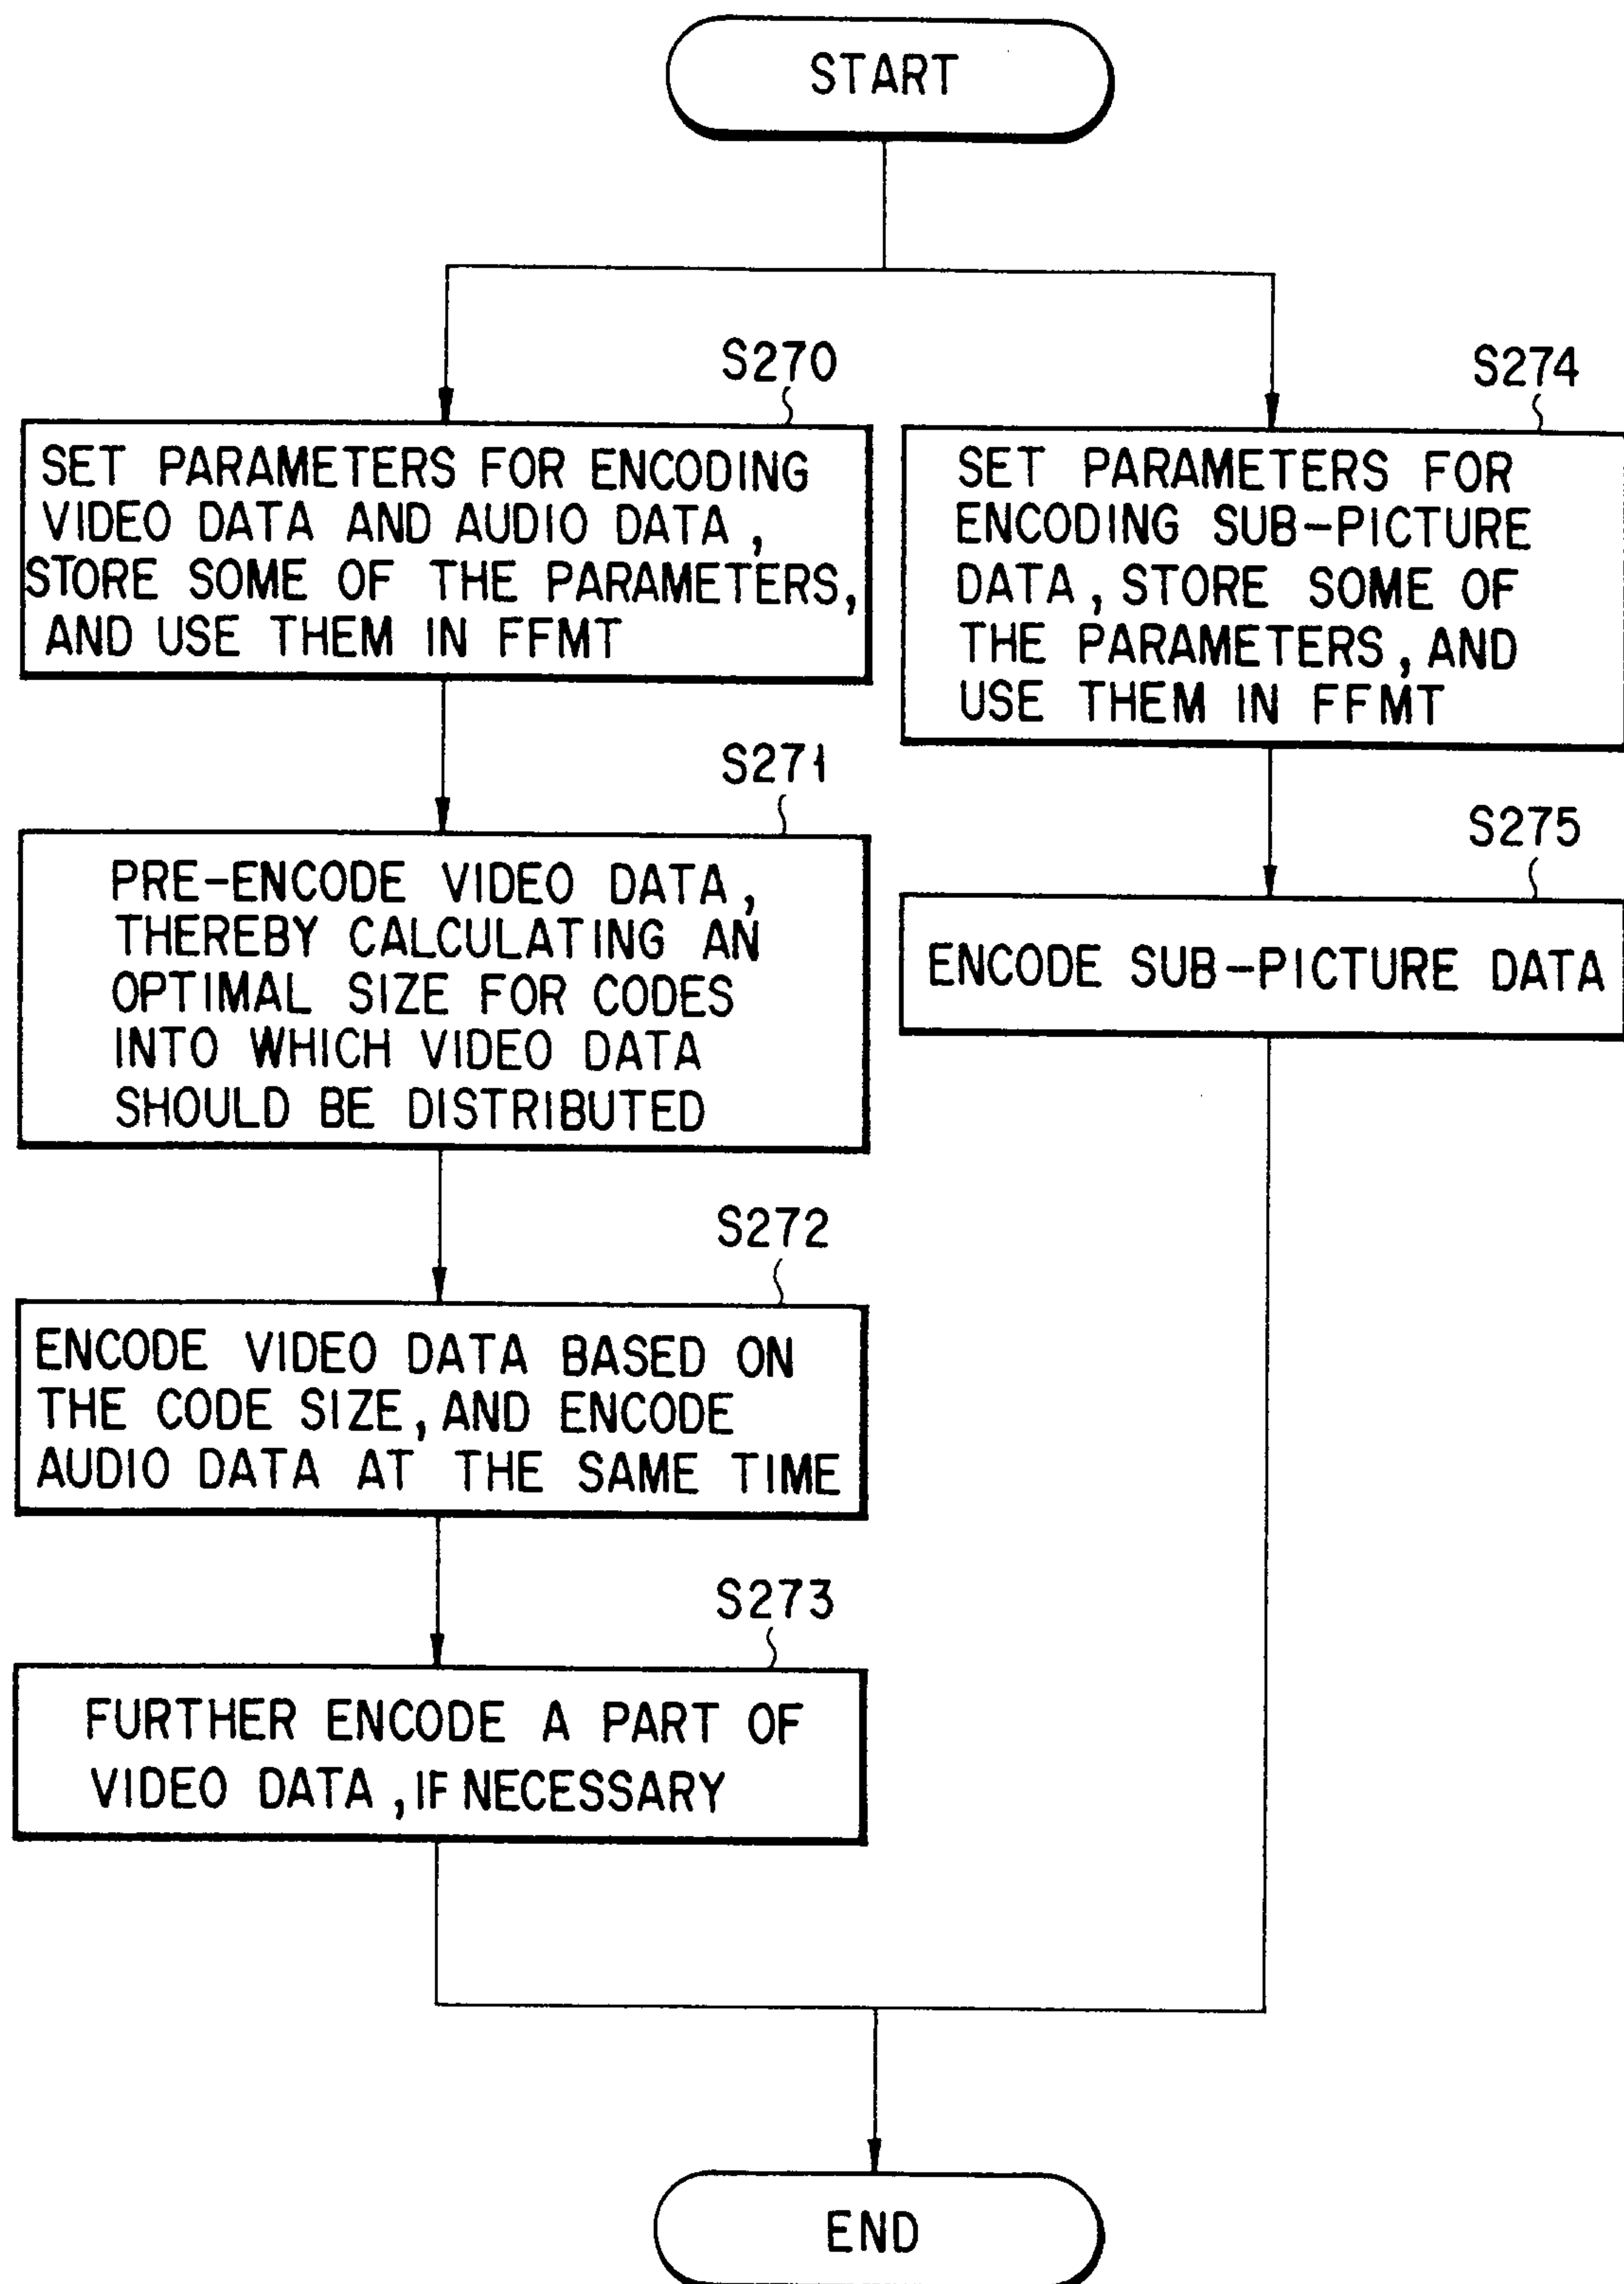


FIG. 52

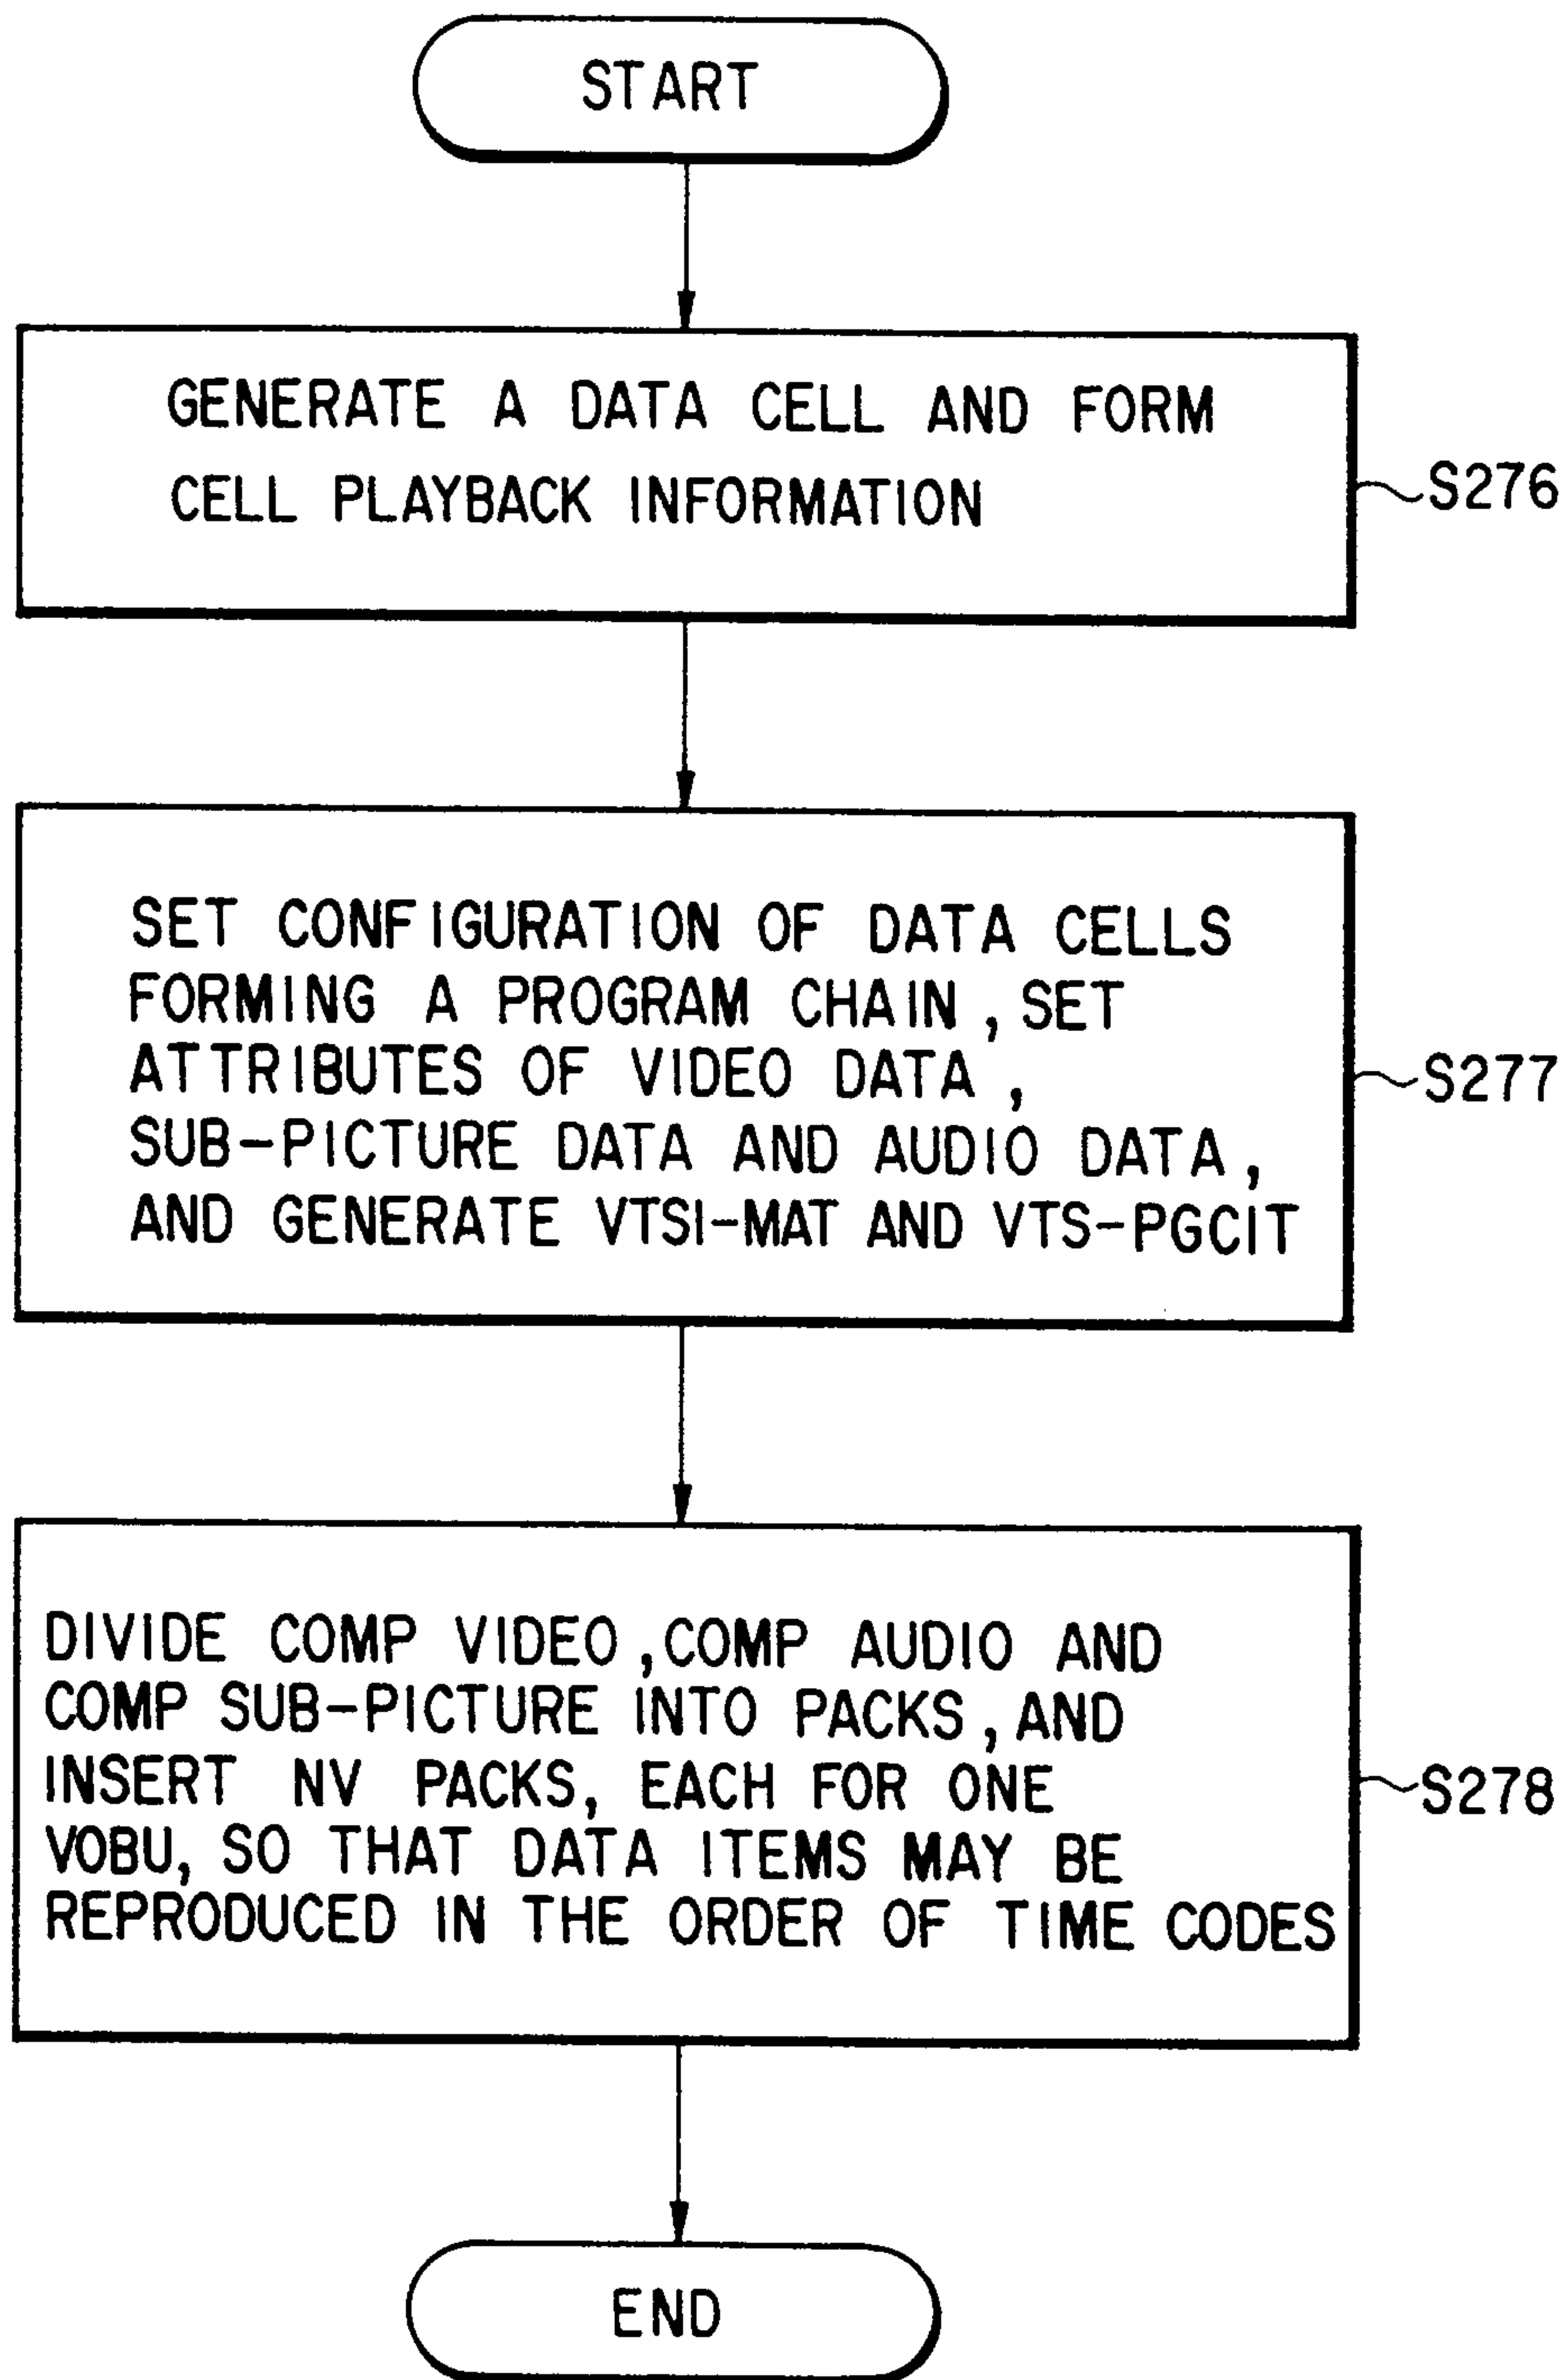
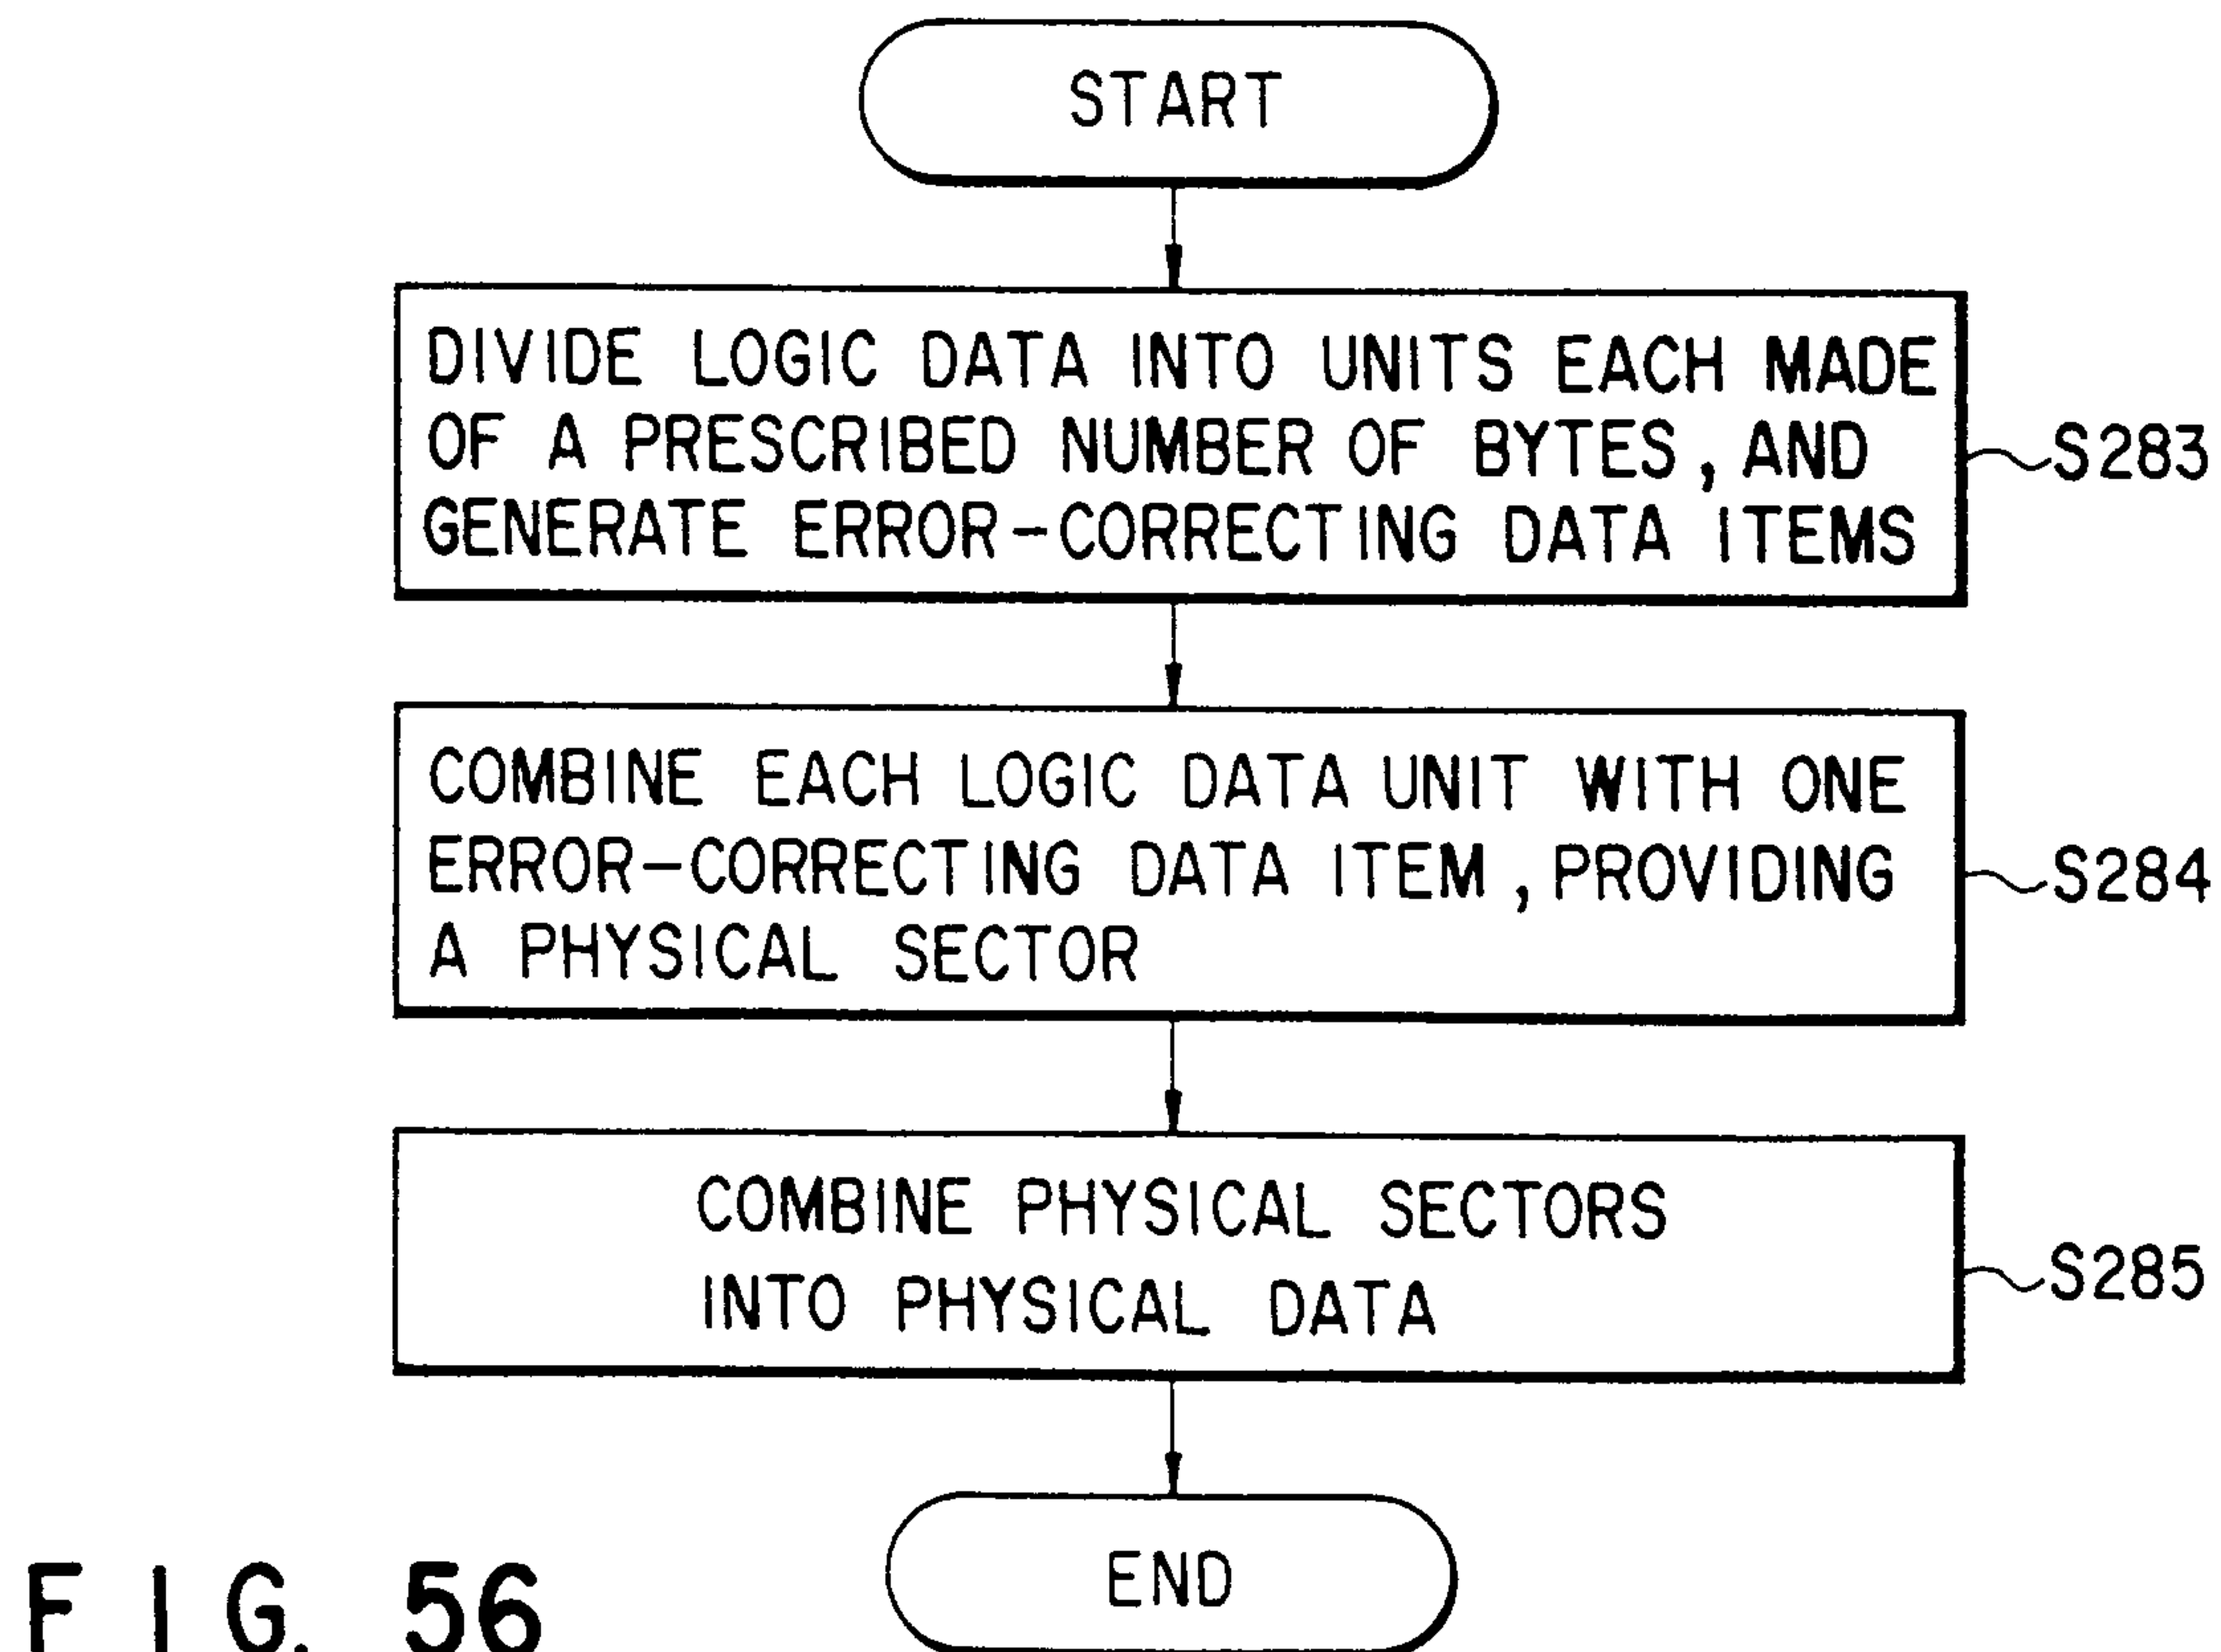
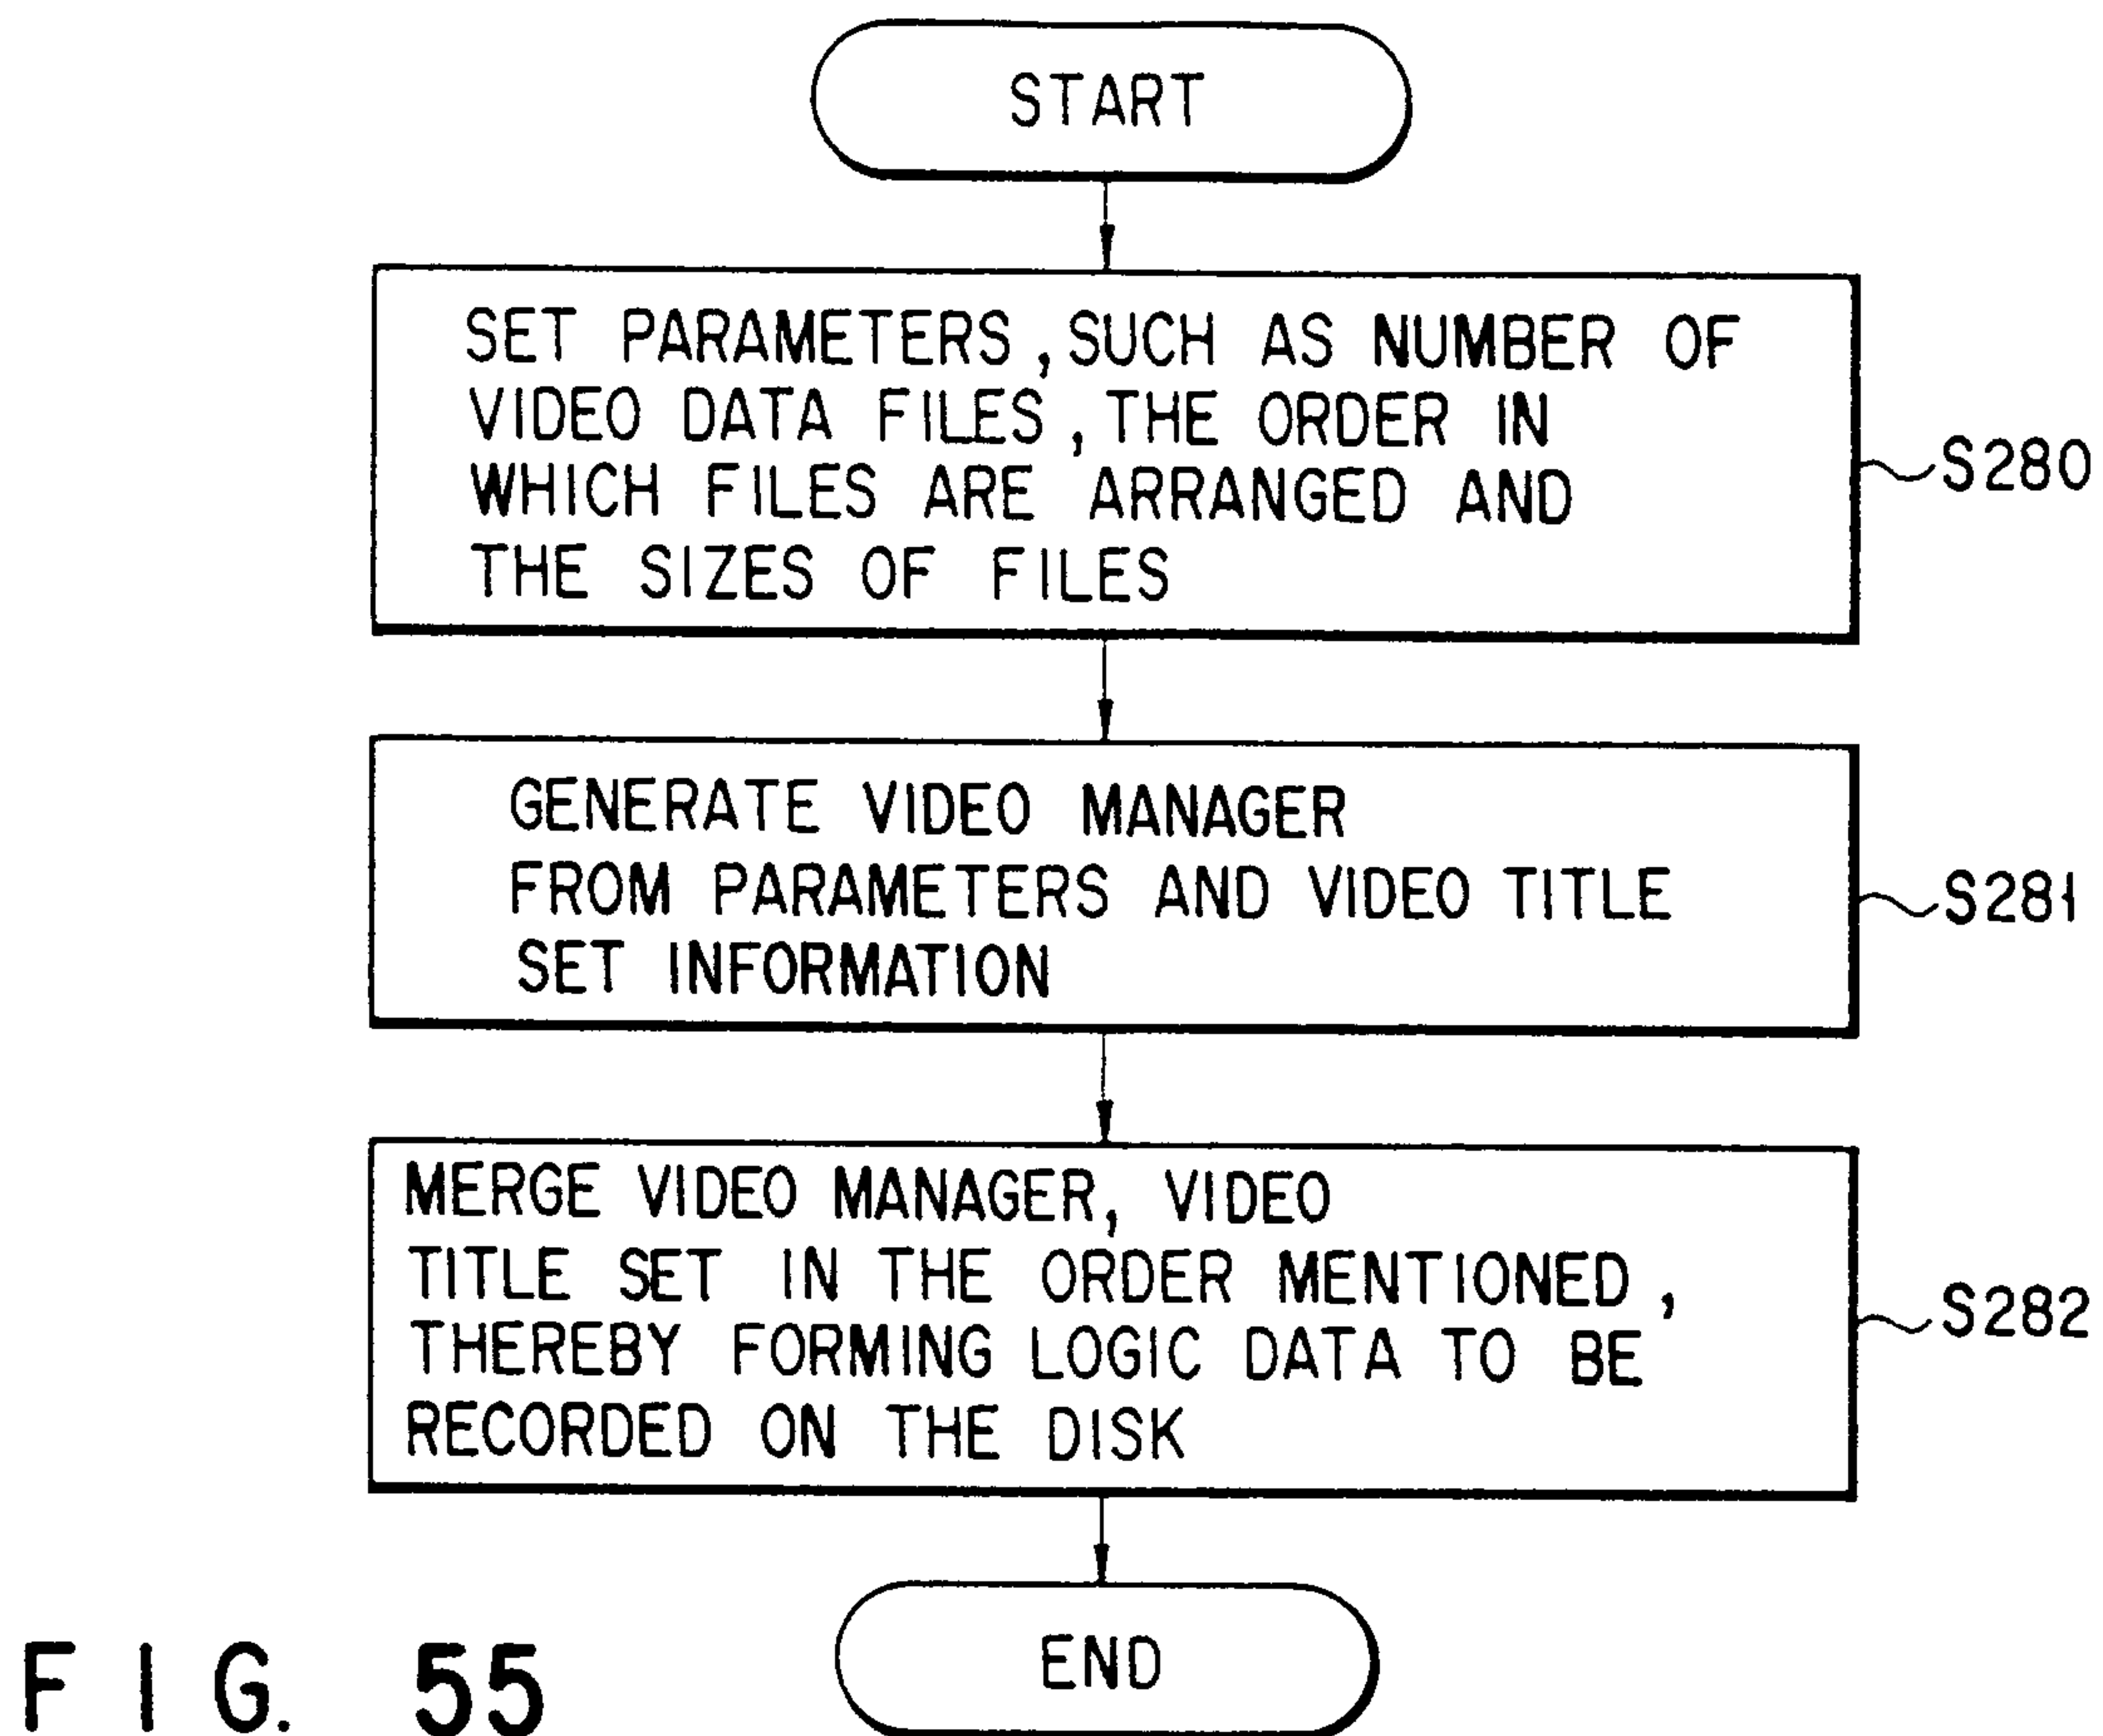


FIG. 53



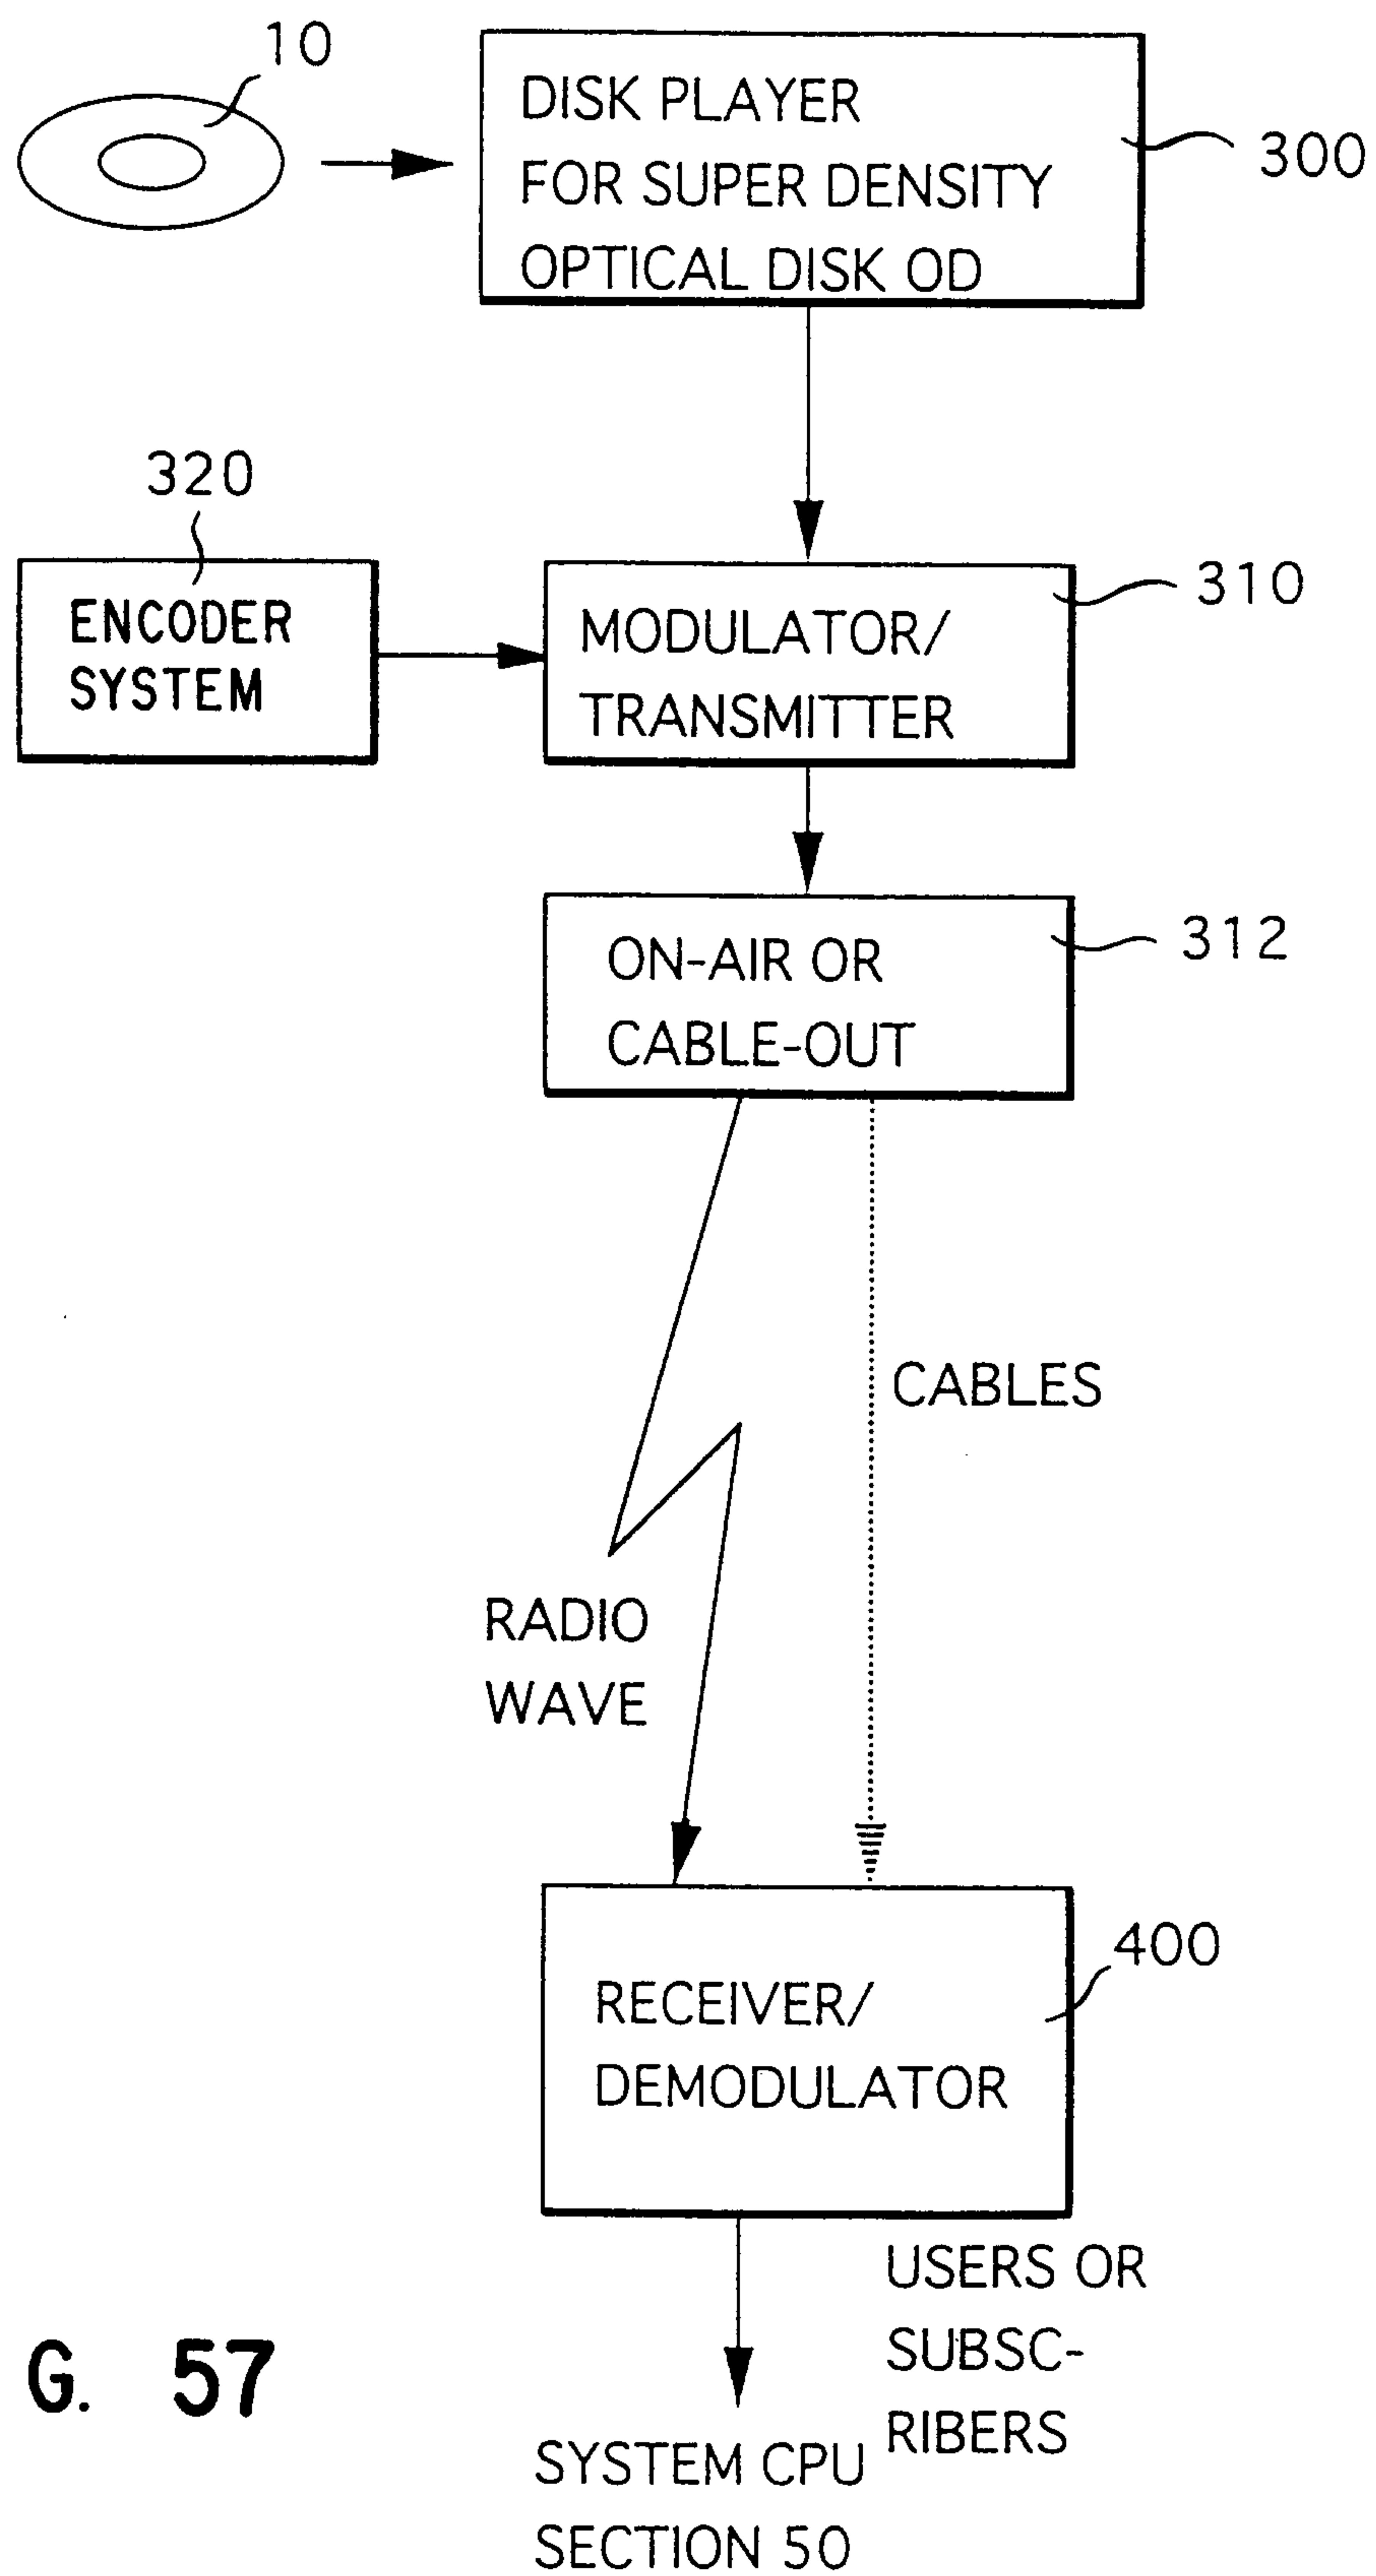


FIG. 57

