



(86) Date de dépôt PCT/PCT Filing Date: 2004/12/07
(87) Date publication PCT/PCT Publication Date: 2005/08/18
(85) Entrée phase nationale/National Entry: 2006/06/13
(86) N° demande PCT/PCT Application No.: EP 2004/053315
(87) N° publication PCT/PCT Publication No.: 2005/075584
(30) Priorité/Priority: 2004/02/03 (DE10 2004 005 207.7)

(51) Cl.Int./Int.Cl. *C09D 161/02* (2006.01),
C08L 61/02 (2006.01), *C08G 6/02* (2006.01),
C08L 61/24 (2006.01), *C08L 61/32* (2006.01),
C09D 161/24 (2006.01), *C09D 161/32* (2006.01),
C09D 4/06 (2006.01), *C09J 161/02* (2006.01),
C09J 161/24 (2006.01), *C09J 161/32* (2006.01)

(71) Demandeur/Applicant:
DEGUSSA AG, DE

(72) Inventeurs/Inventors:
GLOECKNER, PATRICK, DE;
MINDACH, LUTZ, DE

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : UTILISATION DE RESINES RADIODURCISSABLES A BASE DE RESINES CETONE ALDEHYDE ET/OU
UREE ALDEHYDE
(54) Title: USE OF RADIATION-CURABLE RESINS BASED ON KETONE-ALDEHYDE AND/OR UREA-ALDEHYDE
RESINS

(57) Abrégé/Abstract:

The invention relates to the utilization of radiohardenable resins based on ketone and urea aldehyde resins.

Abstract:

Use of radiation-curable resins based on ketone-aldehyde and/or urea-aldehyde resins

- 5 The invention relates to the use of radiation-curable resins based on ketone-aldehyde and urea-aldehyde resins.

Use of radiation-curable resins based on ketone-aldehyde and/or urea-aldehyde resins

The invention relates to the use of radiation-curable resins based on ketone-aldehyde and urea-aldehyde resins.

5

Radiation-curable coating materials have increasingly gained in importance within recent years, owing not least to the low VOC (volatile organic compounds) content of these systems.

10

The film-forming components in the coating material are of relatively low molecular mass and hence of low viscosity, so that there is no need for high fractions of organic solvents. Durable coatings are obtained by the formation, following application of the coating material, of a high molecular mass, polymeric network by means of crosslinking reactions initiated, for example, by electron beams or UV light.

15

Hard resins such as, for example, ketone-aldehyde resins are used in coating materials, for example, as additive resins in order to enhance certain properties such as initial drying rate, gloss, hardness or scratch resistance. Owing to their relatively low molecular weight, customary ketone-aldehyde resins possess a low melt viscosity and solution viscosity and therefore also serve as film-forming functional fillers in coating materials.

20

Ketone-aldehyde resins normally possess hydroxyl groups and can therefore be crosslinked only with, for example, polyisocyanates or amine resins. These crosslinking reactions are usually initiated and/or accelerated thermally.

25

For radiation-initiated crosslinking reactions, in accordance with cationic and/or free-radical reaction mechanisms, the ketone-aldehyde resins are not suitable.

30

Accordingly, the ketone-aldehyde resins are normally added to radiation-curable coating systems as, for example, a film-forming passive, i.e., noncrosslinking component. Owing to the uncrosslinked resin fractions, the resistance of such coatings to gasoline, chemicals or solvents, for example, is often relatively low.

WO 95/17476, DE 23 45 624, EP 736 074, DE 28 47 796, DD 24 0318, DE 24 38 724, and JP 09143396 describe the use of ketone-aldehyde resins and ketone resins, e.g., cyclohexanone-formaldehyde resins, in radiation-curable systems. Radiation-induced crosslinking reactions of these resins are not described.

5

EP 0 902 065 describes the use of nonradiation-curable resins formed from urea (derivatives), ketone or aldehydes as an added component in a mixture with radiation-curable resins.

DE 24 38 712 describes radiation-curing printing inks composed of film-forming resins, ketone resins and ketone-formaldehyde resins, and polymerizable components such as polyfunctional acrylate esters of polyhydric alcohols. To the skilled worker it is obvious that radiation-induced crosslinking reaction of the modified ketone-aldehyde resins and ketone resins can only come about through the use of unsaturated fatty acids. It is known, however, that resins having a higher oil content tend toward, for example, unwanted yellowing and thus their use in high-quality coatings is limited.

15

US 4,070,500 describes the use of nonradiation-curable ketone-formaldehyde resins as a film-forming component in radiation-curable inks.

20

It was an object of the present invention to find radiation-curable crosslinkable resins for use in coating materials, adhesives, inks, including printing inks, polishes, varnishes, pigment pastes and masterbatches, fillers, sealants and insulants and/or cosmetic articles which produce durable and robust coatings, seals and adhesive bonds, are insoluble after crosslinking, and possess great hardness and abrasion resistance, a high gloss, and a high stability toward hydrolysis.

25

Surprisingly it has been possible to achieve this object by using ketone-aldehyde resins and/or urea-aldehyde resins containing ethylenically unsaturated moieties as a main, base or additional component in radiation-curing coating materials, adhesives, inks, including printing inks, polishes, varnishes, pigment pastes and masterbatches, fillers, sealants and insulants and/or cosmetic articles.

30

It has been found that the use of the radiation-curable resins of the invention based on ketone-aldehyde resins and/or urea-aldehyde resins as a main, base or additional component in radiation-curing coating materials, adhesives, inks, including printing inks, polishes, varnishes, pigment pastes and masterbatches, fillers, sealants and insulants and/or cosmetic articles brings about a reduction in viscosity, thereby making it possible very largely to omit low molecular mass constituents - particularly volatile organic solvents which may possibly also contain reactive groups (and are then known as reactive diluents) - which is desirable on environmental and toxicological reasons.

The use of the radiation-curable resins of the invention based on ketone-aldehyde resins and/or urea-aldehyde resins as a main, base or additional component in radiation-curing coating materials, adhesives, inks, including printing inks, polishes, varnishes, pigment pastes and masterbatches, fillers, sealants and insulants and/or cosmetic articles results in greater gloss and greater hardness and also abrasion resistance, improved chemical resistance and solvent resistance, and very high stability toward hydrolysis at the same time.

Additionally there is an improvement in the adhesion to substrates such as metals, plastics, wood, paper, textiles, and glass, for example, and also mineral substrates, thereby enhancing the protection afforded to these substrates, through an increase in corrosion resistance, for example. There is also an increase in the intercoat adhesion, thereby improving the adhesion of further applied coats.

Both pigment wetting and stabilization of the pigments are improved. It is possible to achieve the same color shade and color strengths with a smaller amount of pigment if the products according to the invention are used. This is particularly advantageous not least on economic reasons, since not only high-priced pigments but also additive wetting and stabilizing agents can be at least reduced.

The invention provides for the use of radiation-curable resins essentially comprising

A) at least one ketone-aldehyde resin

and/or

B) at least one urea-aldehyde resin

and

C) at least one compound comprising at least one ethylenically unsaturated moiety having at the same time at least one moiety which is reactive toward A) and/or B), as a main component, base component or additional component in radiation-curing coating materials, adhesives, inks, including printing inks, polishes, varnishes, pigment pastes and masterbatches, fillers, sealants and insulants and/or cosmetic articles.

The invention also provides for the use of radiation-curable resins obtained by polymer-analogously reacting

A) at least one ketone-aldehyde resin

and/or

B) at least one urea-aldehyde resin

and

C) at least one compound comprising at least one ethylenically unsaturated moiety and

at the same time at least one moiety which is reactive toward A) and/or B), as a main component, base component or additional component in radiation-curing coating materials, adhesives, inks, including printing inks, polishes, varnishes, pigment pastes and masterbatches, fillers, sealants and insulants and/or cosmetic articles.

Particular preference is given to the use of the radiation-curable resins as a main component, base component or additional component in radiation-curing fillers, primers, surfacers, base-coat, topcoat, and clearcoat materials, particularly on metals, plastics, wood, paper, textiles and glass and also on mineral substrates.

Besides the radiation-curable resins it is possible for other oligomers and/or polymers, selected from the group consisting of polyurethanes, polyesters, polyacrylates, polyolefins, natural resins, epoxy resins, silicone oils and silicone resins, amine resins, fluoro polymers, and derivatives thereof, to be present, alone or in combination. Depending on the desired properties and the nature of the application it is possible for the amount of the further oligomers and/or polymers to be between 98% and 5%.

The radiation-curable resins may also comprise auxiliaries and additives selected from

inhibitors, organic solvents, with or without unsaturated moieties, surface-active substances, oxygen scavengers and/or free-radical scavengers, catalysts, light stabilizers, color brighteners, photoinitiators, photosensitizers, thixotropic agents, antiskinning agents, defoamers, dyes, pigments, fillers, and dulling agents. The amount varies greatly according to
5 the field of use and nature of the auxiliary and additive.

The text below describes in more detail the radiation-curable resins of the invention based on ketone-aldehyde resins and/or urea-aldehyde resins.

10 Suitable ketones for preparing the ketone-aldehyde resins (component A) include all ketones, especially acetone, acetophenone, methyl ethyl ketone, tert-butyl methyl ketone, heptan-2-one, pentan-3-one, methyl isobutyl ketone, cyclopentanone, cyclododecanone, mixtures of 2,2,4- and 2,4,4-trimethylcyclopentanone, cycloheptanone and cyclooctanone, cyclohexanone and all alkyl-substituted cyclohexanones having one or more alkyl radicals containing in total
15 1 to 8 carbon atoms, individually or in a mixture. Examples that may be mentioned of alkyl-substituted cyclohexanones include 4-tert-amylcyclohexanone, 2-sec-butylcyclohexanone, 2-tert-butylcyclohexanone, 4-tert-butylcyclohexanone, 2-methylcyclohexanone, and 3,3,5-trimethylcyclohexanone.

20 In general, however, any of the ketones said in the literature to be suitable for ketone resin syntheses, more generally all C-H-acidic ketones, can be used. Preference is given to ketone-aldehyde resins based on the ketones acetophenone, cyclohexanone, 4-tert-butylcyclohexanone, 3,3,5-trimethylcyclohexanone, and heptanone, alone or in a mixture.

Suitable aldehyde components of the ketone-aldehyde resins (component A) include in
25 principle linear or branched aldehydes, such as formaldehyde, acetaldehyde, n-butyraldehyde and/or isobutyraldehyde, valeraldehyde, and dodecanal. In general it is possible to use any of the aldehydes said in the literature to be suitable for ketone resin syntheses. It is preferred, however to use formaldehyde, alone or in mixtures.


30 The requisite formaldehyde is normally used in the form of an aqueous or alcoholic (e.g. methanol or butanol) solution with a strength of from about 20 to 40% by weight. Other forms of formaldehyde, such as para-formaldehyde or trioxane, for example, are likewise possible.

Aromatic aldehydes, such as benzaldehyde, can likewise be present in a mixture with formaldehyde.


Particularly preferred starting compounds used for component A) are acetophenone,
 5 cyclohexanone, 4-tert-butylcyclohexanone, 3,3,5-trimethylcyclohexanone, and heptanone,
 alone or in a mixture, and formaldehyde.

The preparation and the monomers for component B) are described in EP 0 271 776:

10 As component B) use is made of urea-aldehyde resins using a urea of the general formula (i)

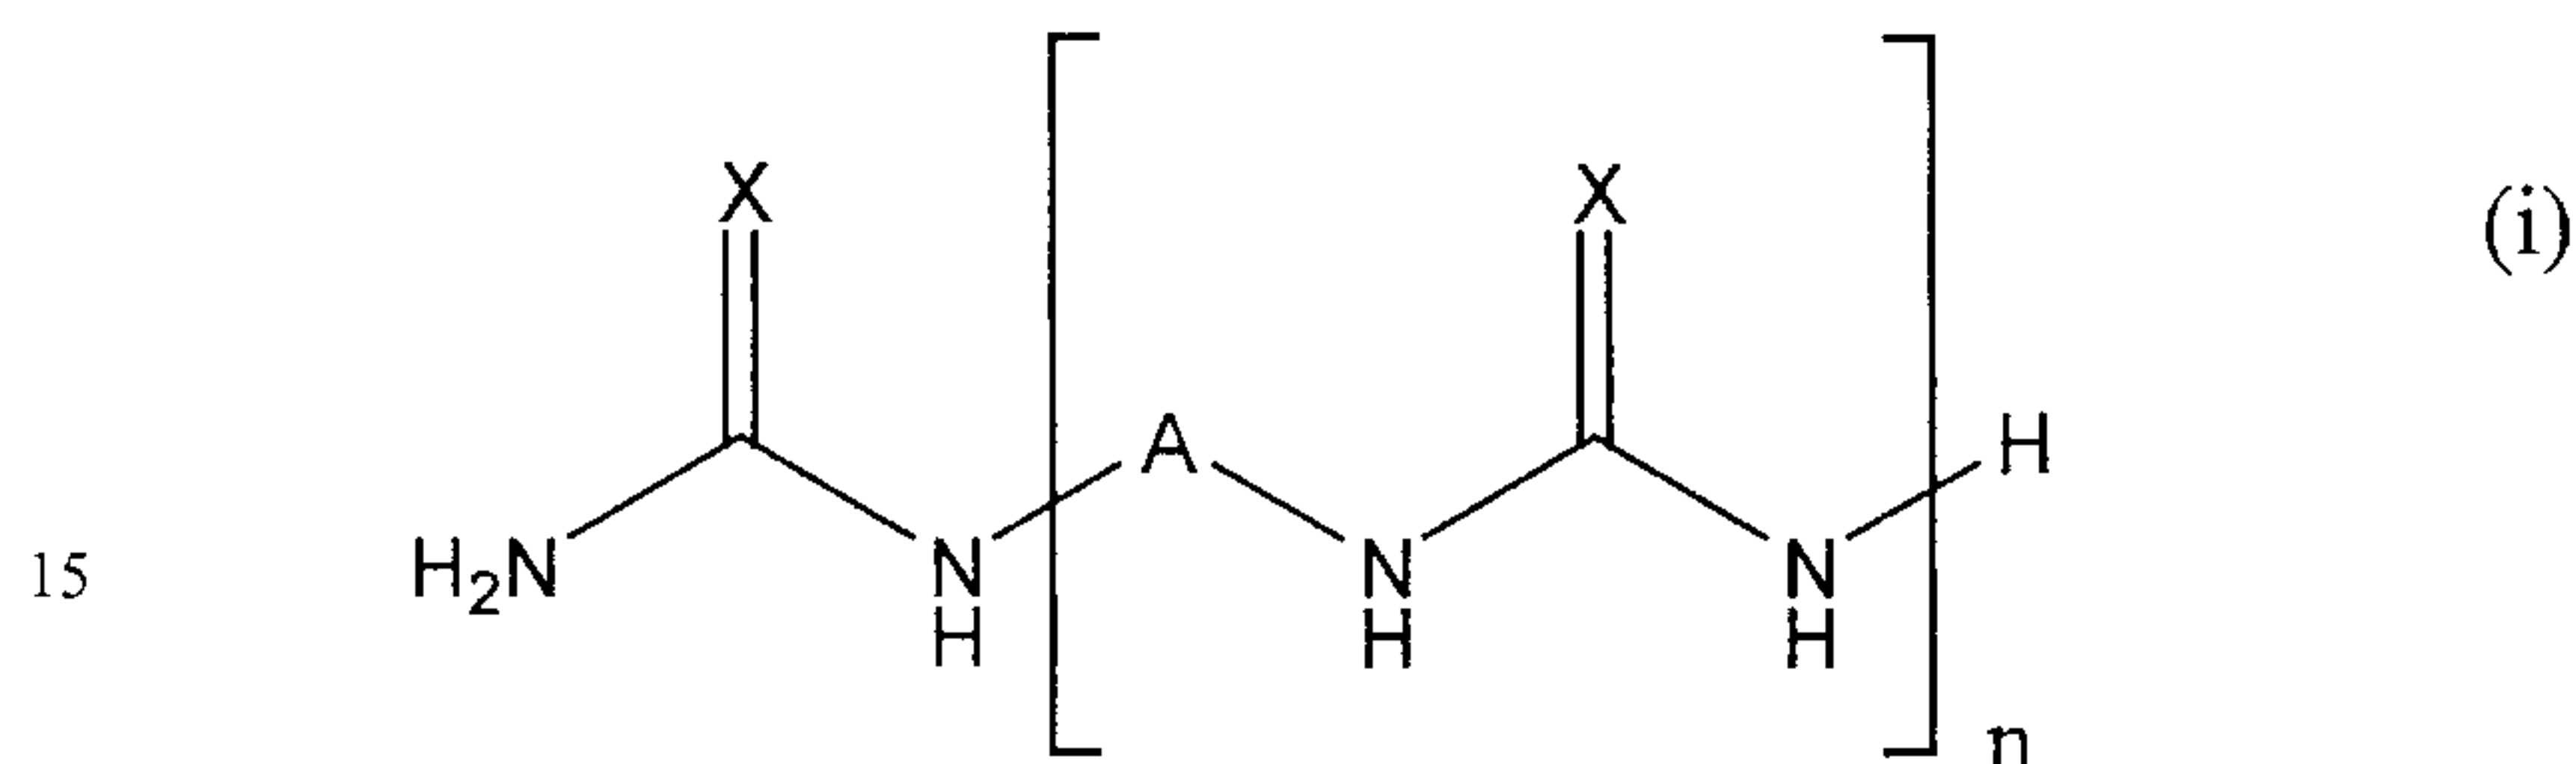

in which X is oxygen or sulfur, A is an alkylene radical, and n is from 0 to 3, with from 1.9
 (n + 1) to 2.2 (n + 1) mol of an aldehyde of the general formula (ii)

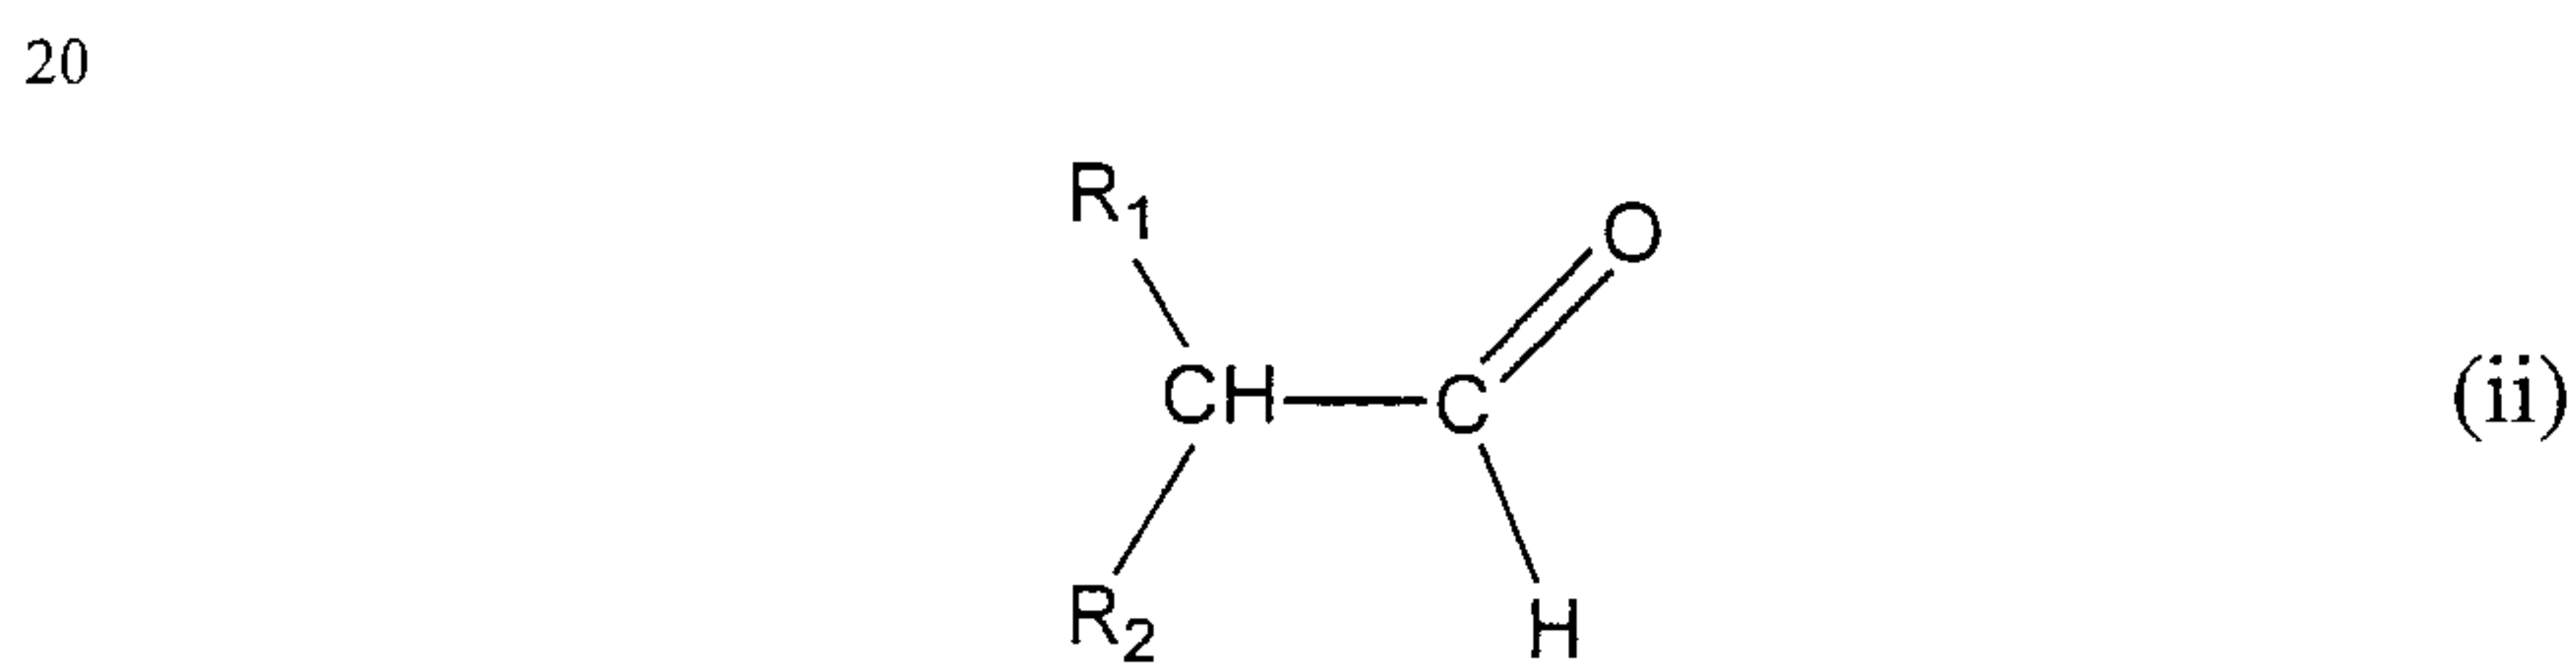

25 in which R₁ and R₂ are hydrocarbon radicals (e.g. alkyl, aryl and/or alkylaryl radicals) each
 having up to 20 carbon atoms
 and/or formaldehyde.

Suitable ureas of the general formula (i) where n = 0 are, for example, urea and thiourea,
 30 where n = 1, methylenediurea, ethylenediurea, tetramethylenediurea and/or hexamethylene-
 diurea and also mixtures thereof. Preference is given to urea.

Suitable aldehydes of the general formula (ii) are, for example, isobutyraldehyde, 2-methylpentanal, 2-ethylhexanal, and 2-phenylpropanal, and also mixtures thereof. Preference is given to isobutyraldehyde.

- 5 Formaldehyde can be used in aqueous form, which may also include, in part or entirely, alcohols such as methanol or ethanol, for example, or else as paraformaldehyde and/or trioxane.

Generally speaking, all monomers described in the literature for the preparation of aldehyde-
10 urea resins are suitable.

Typical compositions are described, in, for example, DE 27 57 220, DE-A 27 57 176, and EP 0 271 776.

- 15 The radiation-curable resins on which the invention is based are obtained by polymer-analogous reaction of the ketone-aldehyde resins and/or of the urea-aldehyde resins, in the melt or in a suitable solvent solution, with component C). Suitability as component C) is possessed by maleic anhydride, (meth)acrylic acid derivatives such as (meth)acryloyl chloride, glycidyl (meth)acrylate, (meth)acrylic acid and/or the low molecular mass alkyl
20 esters and/or anhydrides thereof, alone or in a mixture. It is also possible to obtain radiation-curable resins by reacting the ketone-aldehyde resins and urea-aldehyde resins with isocyanates possessing an ethylenically unsaturated moiety, such as (meth)acryloyl isocyanate, α,α -dimethyl-3-isopropenylbenzyl isocyanate, (meth)acryloylalkyl isocyanate with alkyl spacers possessing from 1 to 12, preferably from 2 to 8, more preferably from 2 to
25 6 carbon atoms, such as methacryloyl ethyl isocyanate and methacryloyl butyl isocyanate, for example. Further reaction products which have proven suitable are those of hydroxyalkyl (meth)acrylates whose alkyl spacers have from 1 to 12, preferably from 2 to 8, more preferably from 2 to 6 carbon atoms and diisocyanates such as, for example, cyclohexane diisocyanate, methylcyclohexane diisocyanate, ethylcyclohexane diisocyanate, propyl-
30 cyclohexane diisocyanate, methyldiethylcyclohexane diisocyanate, phenylene diisocyanate, tolylene diisocyanate, bis(isocyanatophenyl)methane, propane diisocyanate, butane diisocyanate, pentane diisocyanate, hexane diisocyanate, such as hexamethylene diisocyanate

(HDI) or 1,5-diisocyanato-2-methylpentane (MPDI), heptane diisocyanate, octane diisocyanate, nonane diisocyanate, such as 1,6-diisocyanato-2,4,4-trimethylhexane or 1,6-diisocyanato-2,2,4-trimethylhexane (TMDI), nonane triisocyanate, such as 4-isocyanatomethyloctane 1,8-diisocyanate (TIN), decane di- and triisocyanate, undecane di- and triisocyanate, dodecane di- and triisocyanates, isophorone diisocyanate (IPDI), bis(isocyanatomethylcyclohexyl)methane (H₁₂MDI), isocyanatomethylmethylcyclohexyl isocyanate, 2,5(2,6)-bis(isocyanatomethyl)bicyclo[2.2.1]heptane (NBDI), 1,3-bis(isocyanatomethyl)cyclohexane (1,3-H₆-XDI) or 1,4-bis(isocyanatomethyl)cyclohexane (1,4-H₆-XDI), alone or in a mixture. Examples that may be mentioned include the reaction products in a 1:1 molar ratio of hydroxyethyl acrylate and/or hydroxyethyl methacrylate with isophorone diisocyanate and/or H₁₂MDI and/or HDI.

Another preferred class of polyisocyanates are the compounds having more than two isocyanate groups per molecule which are prepared by trimerizing, allophanatizing, biuretizing and/or urethaneizing the simple diisocyanates, examples being the reaction products of these simple diisocyanates, such as IPDI, HDI and/or HMDI, for example, with polyhydric alcohols (e.g., glycerol, trimethylolpropane, pentaerythritol) and/or polyfunctional polyamines or else the triisocyanurates obtainable by trimerizing the simple diisocyanates, such as IPDI, HDI, and HMDI, for example.

If desired it is possible to use a suitable catalyst for preparing the resins of the invention. Suitable compounds are all those known in the literature which accelerate an OH-NCO reaction, such as diazabicyclooctane (DABCO) or dibutyltin dilaurate (DBTL) for example.

The functionality of the resins obtained ranges from low to high in accordance with the ratio of the reactants to one another. Through the choice of reactants it is also possible to set the subsequent hardness of the crosslinked film. If, for example, a hard resin such as cyclohexanone-formaldehyde resin is reacted with α,α -dimethyl-3-isopropenylbenzyl isocyanate, the resulting products are harder than those obtained through the use of (meth)acryloyl ethyl isocyanate and/or hydroxyethyl acrylate-isophorone diisocyanate adducts; the flexibility, however, is then lower. It has also been found that the reactivity of ethylenically unsaturated compounds with little steric hindrance - such as of hydroxyethyl

acrylate, for example - is higher than in the case of those which are sterically hindered, such as α,α -dimethyl-3-isopropenylbenzyl isocyanate, for example.

In principle it is possible to consider incorporating ethylenically unsaturated moieties even during the actual preparation of the ketone-aldehyde and/or urea-aldehyde resins. By way of the proportional use of suitable monomers, such as polymerizable ketones having olefinic double bonds, for example, any desired degrees of functionalization can be set. The disadvantage of this procedure lies in the limited availability of suitable monomer building blocks.

It is also possible to replace some of the ketone-aldehyde resins A) and/or urea-aldehyde resins B) by further hydroxy-functionalized polymers such as hydroxy-functional polyethers, polyesters and/or polyacrylates, for example. In this case, mixtures of these polymers with the ketone-aldehyde resins and/or urea-aldehyde resins can be reacted polymer-analogously with component C). It has been found that first of all it is also possible to prepare adducts of the ketone-aldehyde resins and/or urea-aldehyde resins with, for example, hydroxy-functional polyethers, polyesters and/or polyacrylates using the abovementioned diisocyanates and/or triisocyanates, and only then are these adducts reacted polymer-analogously with component C). In contrast to the "plain" ketone-aldehyde resins and/or urea-aldehyde resins it is possible by this means better to set properties such as flexibility and hardness, for example. The further hydroxy-functional polymers generally possess molecular weights M_n of between 200 and 10 000 g/mol, preferably between 300 and 5 000 g/mol.

The resins on which the invention is based are prepared in the melt or in a suitable, organic solvent solution of the ketone-aldehyde resins and/or urea-aldehyde resins. Said organic solvent may if desired likewise possess unsaturated moieties, in which case it acts directly as a reactive diluent in the subsequent application.

For this purpose, in one preferred embodiment I, the compound C), in the presence if desired of a suitable catalyst, is added to the solution or melt of the ketone-aldehyde resins A) and/or urea-aldehyde resins B).

The temperature of the reaction is selected in accordance with the reactivity of component C). Where isocyanates are used as component C), suitable temperatures have been found to be between 30 and 150°C, preferably between 50 and 140°C.

5 The solvent that may be present can be separated off if desired after the end of the reaction, in which case a powder of the product of the invention is generally obtained.

It has proven advantageous to react 1 mol of the ketone-aldehyde resins and/or urea-aldehyde resins - based on M_n - with from 0.5 to 15 mol, preferably from 1 to 10 mol, in particular from 2 to 8 mol of the unsaturated compound (component C).

10

In a preferred embodiment II

the compound C), in the presence if desired of a suitable catalyst, is added to the solution or melt of the ketone-aldehyde resins A) and/or urea-aldehyde resins B) and the hydroxy-functional polymer, such as polyether, polyester and/or polyacrylate, for example.

15

The temperature of the reaction is selected in accordance with the reactivity of component C). Where isocyanates are used as component C), suitable temperatures have been found to be between 30 and 150°C, preferably between 50 and 140°C.

20 The solvent that may be present can be separated off if desired after the end of the reaction, in which case a powder of the product of the invention is generally obtained.

It has proven advantageous to react 1 mol of the ketone-aldehyde resins and/or urea-aldehyde resins and/or additional polymers - based on M_n - with from 0.5 to 15 mol, preferably from 1 to 10 mol, in particular from 2 to 8 mol of the unsaturated compound (component C).

25

In a preferred embodiment III

a di- and trifunctional isocyanate is added to the solution or melt of the ketone-aldehyde resins A) and/or urea-aldehyde resins B) and the hydroxy-functional polymer, such as polyether, polyester and/or polyacrylate, for example and a hydroxy-functional preadduct is prepared.

30 Only then is the compound C), in the presence if desired of a suitable catalyst, added.

The temperature of the reaction is selected in accordance with the reactivity of component C).

Where isocyanates are used as component C), suitable temperatures have been found to be between 30 and 150°C, preferably between 50 and 140°C.

The solvent that may be present can be separated off if desired after the end of the reaction, in which case a powder of the product of the invention is generally obtained.

It has proven advantageous to react 1 mol of the ketone-aldehyde resins and/or urea-aldehyde resins and/or additional polymers - based on M_n - with from 0.5 to 15 mol, preferably from 1 to 10 mol, in particular from 2 to 8 mol of the unsaturated compound (component C).

In the presence of suitable photoinitiators, and in the presence if desired of suitable photosensitizers, these resins can be converted by irradiation into polymeric, insoluble networks which, depending on the level of ethylenically unsaturated groups present, produce elastomers to thermosets.

The examples which follow are intended to illustrate the invention but not to restrict its scope of application:

Examples

Preparation of a radiation-crosslinking resin (UV 22):

Synthesis takes place by reaction of 1 mol of an anhydrous cyclohexanone-formaldehyde resin (water content < 0.2% by weight, OHN = 105 mg KOH/g (acetic anhydride method), $M_n \sim 650$ g/mol, against polystyrene) with 1.2 mol of a reaction product of IPDI and hydroxyethyl acrylate in a ratio of 1:1 in the presence of 0.2% (on resin) of 2,6-bis(tert-butyl)-4-methylphenol (Ralox BHT, Degussa AG) and 0.1% (on resin) of dibutyltin dilaurate, 65% strength in methoxypropyl acetate, at 80°C under nitrogen in a three-necked flask with stirrer, reflux condenser, and temperature sensor until an NCO number of less than 0.1 is reached. The pale, clear solution obtained possesses a dynamic viscosity of 11.5 Pa·s.

Use examples

The base resin (UV 20) used was an adduct of trimethylolpropane, IPDI, Terathane 650 and hydroxyethyl acrylate, as a 70% strength solution in MOP acetate, viscosity at 23°C =

19.2 Pas.

Viscosities of the different systems in 50% form in MOP acetate without photoinitiator

Number BXXVII/xxx/03	Mixing ratio Solids	dyn. Viscosity 23°C
Mixtures		
481	A-UV 20	775 mPas
500	A-UV 20: A-UV 22 = 95:5	715 mPas
501	A-UV 20: A-UV 22 = 90:10	710 mPas
502	A-UV 20: A-UV 22 = 80:20	590 mPas

5

As the proportion of the products of the invention goes up there is a fall in the dynamic viscosity of the formulations.

Summary of the coatings data obtained

10

Darocure 1173 (for amount see table) was added to the mixtures and they were drawn down to metal panels using a doctor blade. The systems contain solvent; therefore initial drying was carried out in a forced-air oven at 80°C for 30 minutes. The films were then cured by means of UV light (medium-pressure mercury lamp, 70 W/optical filter 350 nm) (3×6 s).

15

Coating No. BXXVII/xxx/03	Resin mix. based on resin	1173 [% based on resin]	NVC [%]	FT μ	CH / Tesa	HB	EC	HK	Flow
481	A-UV 20	1.50	50.4	31-39	2B / 5B	n.m.	n.m.	38	minimally restless tacky
500	A-UV 20 95 A-UV 22 5	1.50	50.4	31-34	0-1B/ 5B	63	n.m.	39	ok
501	A-UV 20 90 A-UV 22 10	1.50	50.4	27-32	0-1B/ 5B	67	n.m.	43	minimally restless
502	A-UV 20 80 A-UV 22 20	1.50	50.4	26-31	0B/ 3B	73	>10.,5	45	minimally restless

1173 : Darocur 1173

Chemical crosslinking of the products according to the invention increases the hardness and the adhesion. In addition the films become less tacky and the values for the Erichson cupping are improved.

5 **Abbreviations**

DBTL: dibutyltin dilaurate

EC: Erichson cupping

HB: Buchholz hardness

HK: König pendulum hardness

10 IPDI: isophorone diisocyanate

MOP acetate: methoxypropyl acetate

NVC: nonvolatile constituents

FT: film thickness

CH: cross-hatch

What is claimed is:

1. The use of a radiation-curable resin essentially comprising

A) at least one ketone-aldehyde resin

and/or

B) at least one urea-aldehyde resin

and

C) at least one compound comprising at least one ethylenically unsaturated moiety having at the same time at least one moiety which is reactive toward A) and/or B), as a main component, base component or additional component in radiation-curing coating materials, adhesives, inks, including printing inks, polishes, varnishes, pigment pastes and masterbatches, fillers, sealants and insulants and/or cosmetic articles.

Cancelled

2. The use of a radiation-curable resin obtained by polymer-analogously reacting

A) at least one ketone-aldehyde resin

and/or

B) at least one urea-aldehyde resin

and

C) at least one compound comprising at least one ethylenically unsaturated moiety and at the same time at least one moiety which is reactive toward A) and/or B), as a main component, base component or additional component in radiation-curing coating materials, adhesives, inks, including printing inks, polishes, varnishes, pigment pastes and masterbatches, fillers, sealants and insulants and/or cosmetic articles.

3. The use of a radiation-curable resin as claimed in claim 1 or 2, obtained by polymer-analogously reacting

A) at least one ketone-aldehyde resin

and/or

B) at least one urea-aldehyde resin


and

C) at least one compound comprising at least one ethylenically unsaturated moiety and at the same time at least one moiety which is reactive toward A) and/or B), and at least one further hydroxyl-functionalized polymer.


- 5 4. The use of a radiation-curable resin as claimed in claim 3, wherein polyethers, polyesters and/or polyacrylate are contained as further hydroxy-functional polymers.
5. The use of a radiation-curable resin as claimed in claim 3 or 4, wherein mixtures of the further polymers with the ketone-aldehyde resins A) and/or urea-aldehyde resins B) are
10 reacted polymer-analogously with component C).
6. The use of a radiation-curable resin as claimed in claim 3 to 5, wherein first of all adducts of the ketone-aldehyde resins A) and/or urea-aldehyde resins B) with the further polymers, using suitable di- and triisocyanates, are prepared, and these adducts are then
15 reacted polymer-analogously with component C).
7. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein C-H-acidic ketones are used in component A).
- 20 8. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein ketones selected from acetone, acetophenone, methyl ethyl ketone, tert-butyl methyl ketone, heptan-2-one, pentan-3-one, methyl isobutyl ketone, cyclopentanone, cyclododecanone, mixtures of 2,2,4- and 2,4,4-trimethylcyclopentanone, cycloheptanone, cyclooctanone, and cyclohexanone are used as starting compounds,
25 alone or in mixtures, in the ketone-aldehyde resins of component A).
9. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein alkyl-substituted cyclohexanones having one or more alkyl radicals containing in total 1 to 8 carbon atoms, individually or in a mixture, are used in the ketone-
30 aldehyde resins of component A).
10. The use of a radiation-curable resin as claimed in claim 9, wherein 4-tert-

amylcyclohexanone, 2-sec-butylcyclohexanone, 2-tert-butylcyclohexanone, 4-tert-butylcyclohexanone, 2-methylcyclohexanone, and 3,3,5-trimethylcyclohexanone are used in the ketone-aldehyde resins of component A).

- 5 11. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein acetophenone, cyclohexanone, 4-tert-butylcyclohexanone, 3,3,5-trimethylcyclohexanone, and heptanone, alone or in a mixture, are used in component A).
- 10 12. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein formaldehyde, acetaldehyde, n-butyraldehyde and/or isobutyraldehyde, valeraldehyde, and dodecanal, alone or in mixtures, are used as aldehyde component of the ketone-aldehyde resins in component A).
- 15 13. The use of a radiation-curable resin as claimed in claim 12, wherein formaldehyde and/or paraformaldehyde and/or trioxane are used as aldehyde component of the ketone-aldehyde resins in component A).
- 20 14. The use of a radiation-curable resin as claimed in claim 1, 2 or 3, wherein resin formed from acetophenone, cyclohexanone, 4-tert-butylcyclohexanone, 3,3,5-trimethylcyclohexanone, and heptanone, alone or in a mixture, and formaldehyde (component A) is used.
- 25 15. The use of a radiation-curable resin as claimed in any one of the preceding claims, wherein as component B) use is made of urea-aldehyde resins prepared using a urea of the general formula (I)

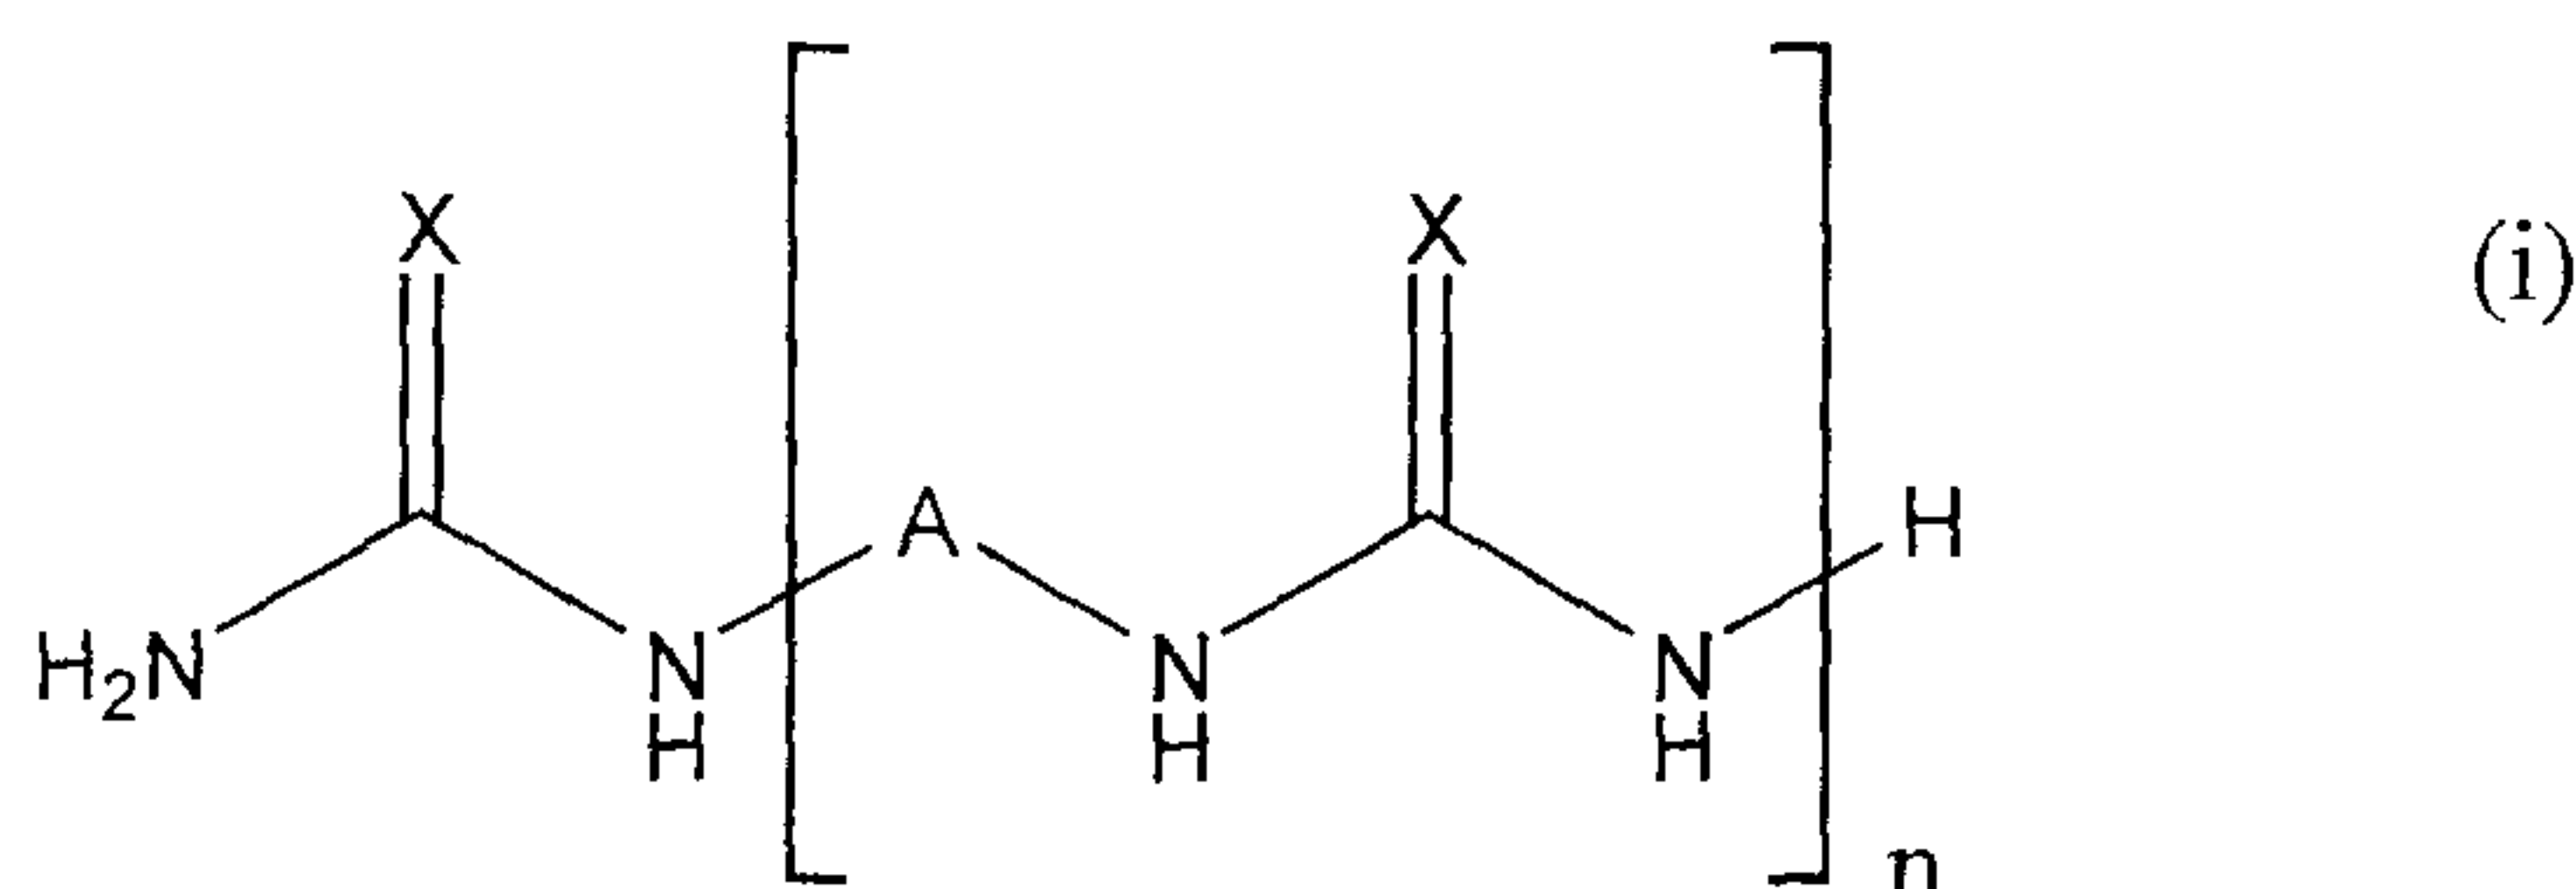

in which X is oxygen or sulfur, A is an alkylene radical, and n is from 0 to 3, with from 1.9 (n + 1) to 2.2 (n + 1) mol of an aldehyde of the general formula (ii)

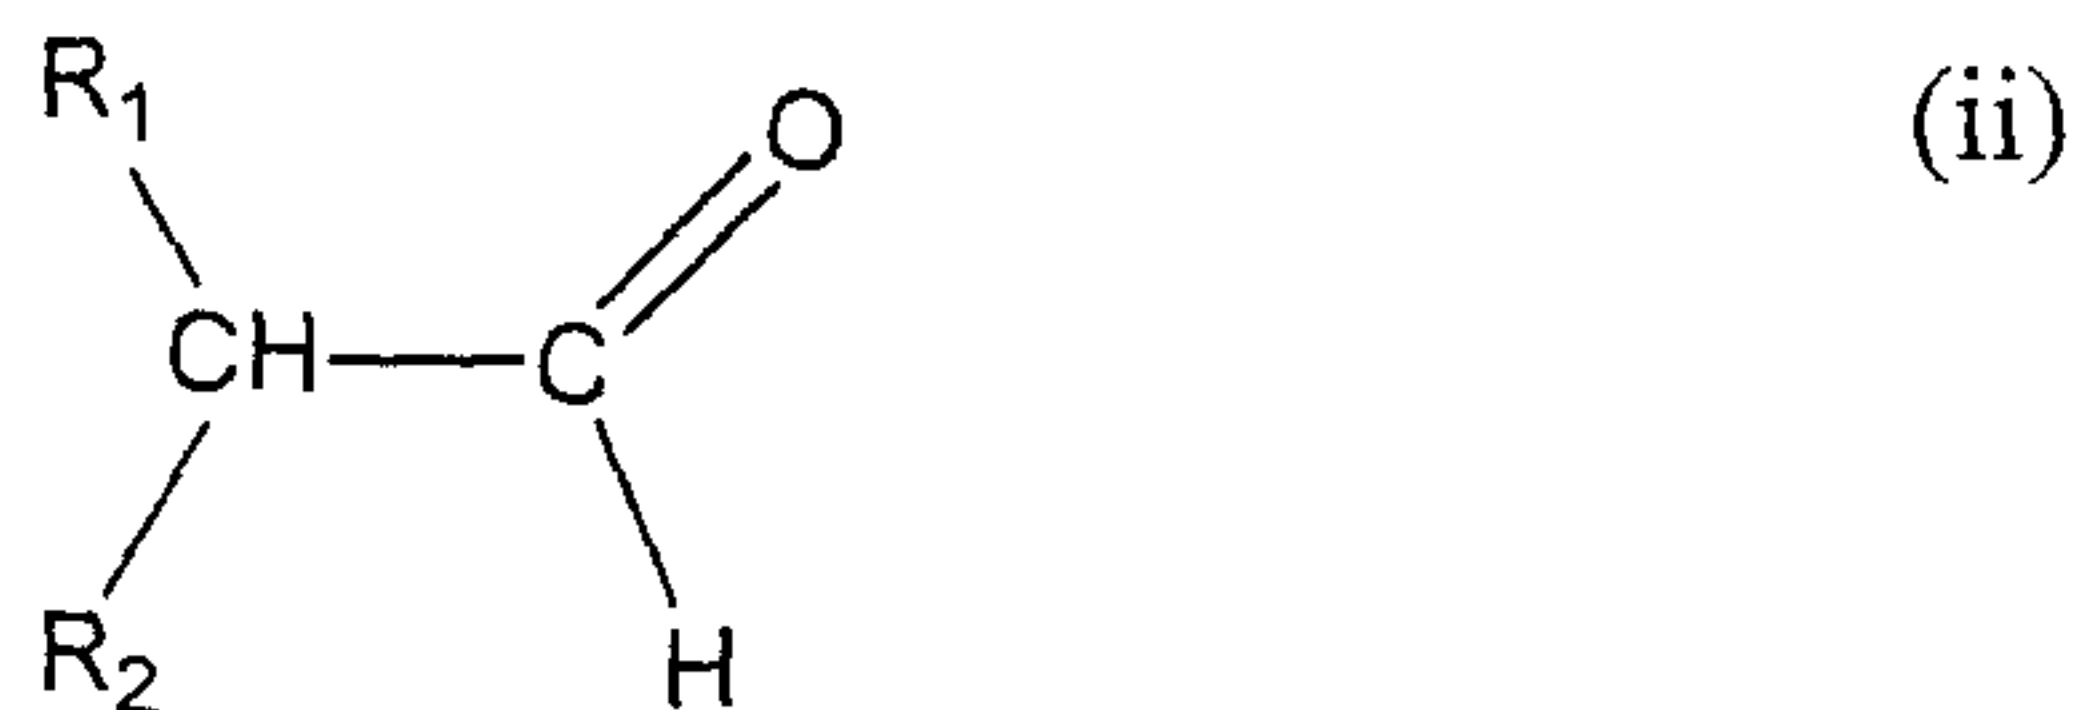

in which R₁ and R₂ are hydrocarbon radicals each having up to 20 carbon atoms and/or formaldehyde are used.

10

16. The use of a radiation-curable resin as claimed in any one of the preceding claims, wherein urea-aldehyde resins prepared using urea and thiourea, methylenediurea, ethylenediurea, tetramethylenediurea and/or hexamethylenediurea or mixtures thereof are used as component B).

15

17. The use of a radiation-curable resin as claimed in any one of the preceding claims, wherein urea-aldehyde resins prepared using isobutyraldehyde, formaldehyde, 2-methylpentanal, 2-ethylhexanal, and 2-phenylpropanal or mixtures thereof are used as component B).

20

18. The use of a radiation-curable resin as claimed in any one of the preceding claims, wherein urea-aldehyde resins prepared using urea, isobutyraldehyde, and formaldehyde are used as component B).

25

19. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein maleic acid is used as component C).

20. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein (meth)acrylic acid and/or derivatives are used as component C).

30

21. The use of a radiation-curable resin as claimed in claim 20, wherein (meth)acryloyl chloride, glycidyl (meth)acrylate, (meth)acrylic acid and/or the low molecular mass

alkyl esters and/or anhydrides thereof, alone or in a mixture, are used as component C).

22. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein isocyanates which possess an ethylenically unsaturated moiety, preferably (meth)acryoyl isocyanate, α,α -dimethyl-3-isopropenylbenzyl isocyanate, (meth)acryloylalkyl isocyanate with alkyl spacers possessing 1 to 12, preferably 2 to 8, more preferably 2 to 6 carbon atoms, preferably methacryloylethyl isocyanate and/or methacryloylbutyl isocyanate, are used as component C).
23. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein reaction products of hydroxyalkyl (meth)acrylates whose alkyl spacers possess 1 to 12, preferably 2 to 8, more preferably 2 to 6 carbon atoms with diisocyanates and/or polyisocyanates are used as component C).
24. The use of a radiation-curable resin as claimed in claim 23, wherein diisocyanates selected from cyclohexane diisocyanate, methylcyclohexane diisocyanate, ethylcyclohexane diisocyanate, propylcyclohexane diisocyanate, methyl-diethylcyclohexane diisocyanate, phenylene diisocyanate, tolylene diisocyanate, bis(isocyanatophenyl)methane, propane diisocyanate, butane diisocyanate, pentane diisocyanate, hexane diisocyanate such as, for example, hexamethylene diisocyanate (HDI) or 1,5-diisocyanato-2-methylpentane (MPDI), heptane diisocyanate, octane diisocyanate, 1,6-diisocyanato-2,4,4-trimethylhexane, 1,6-diisocyanato-2,2,4-trimethylhexane (TMDI), 4-isocyanatomethyloctane 1,8-diisocyanate (TIN), decane di- and triisocyanate, undecane di- and triisocyanate, dodecane di- and triisocyanates, isophorone diisocyanate (IPDI), bis(isocyanatomethylcyclohexyl)methane (H_{12} MDI), isocyanatomethylmethylcyclohexyl isocyanate, 2,5(2,6)-bis(isocyanatomethyl)bicyclo-[2.2.1]heptane (NBDI), 1,3-bis(isocyanatomethyl)cyclohexane (1,3- H_6 -XDI), 1,4-bis(isocyanatomethyl)cyclohexane (1,4- H_6 -XDI), alone or in mixtures, are used.
25. The use of a radiation-curable resin as claimed in claim 24, wherein polyisocyanates prepared by trimerizing, allophanatizing, biuretizing and/or urethaneizing simple diisocyanates are used.

26. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein the reaction products in a molar ratio of from 1:1 to 1:1.5, preferably 1:1, of hydroxyethyl acrylate and/or hydroxyethyl methacrylate with isophorone diisocyanate and/or H₁₂MDI and/or HDI are used as component C).

27. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein 1 mol of the ketone-aldehyde resin and/or urea-aldehyde resin - based on M_n - and from 0.5 to 15 mol, preferably from 1 to 10 mol, in particular from 2 to 8 mol of the unsaturated compound are used.

28. The use of a radiation-curable resin as claimed in at least one of the preceding claims as a main, base or additional component in radiation-curing coating materials such as primers, surfacers, basecoat, topcoat, and clearcoat materials and also in radiation-curing adhesives, inks, including printing inks, polishes, varnishes, pigment pastes and masterbatches, fillers, cosmetic articles and/or sealants and insulants.

29. The use of a radiation-curable resin as claimed in at least one of the preceding claims for metals, plastics, wood, paper, textiles, and glass and also mineral substrates.

30. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein further oligomers and/or polymers are present.

31. The use of a radiation-curable resin as claimed in claim 30, wherein further oligomers and/or polymers selected from the group consisting of polyurethanes, polyesters, polyacrylates, polyolefins, natural resins, epoxy resins, silicone oils and silicone resins, amine resins, fluoro polymers and derivatives thereof are present, alone or in combination.

32. The use of a radiation-curable resin as claimed in at least one of the preceding claims, wherein auxiliaries and additives are present.

33. The use of a radiation-curable resin as claimed in claim 32, wherein auxiliaries and additives selected from inhibitors, organic solvents, with or without unsaturated moieties, surface-active substances, oxygen scavengers and/or free-radical scavengers, catalysts, light stabilizers, color brighteners, photoinitiators, photosensitizers, thixotropic agents, antiskinning agents, defoamers, dyes, pigments, fillers and/or dulling agents are present.

Fetherstonhaugh
Ottawa, Canada
Patent Agents