

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 August 2010 (05.08.2010)

PCT

(10) International Publication Number
WO 2010/088377 A1

(51) International Patent Classification:
C10M 135/18 (2006.01)

(21) International Application Number:
PCT/US2010/022392

(22) International Filing Date:
28 January 2010 (28.01.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/149,067 2 February 2009 (02.02.2009) US

(71) Applicant (for all designated States except US): **R.T. VANDERBILT COMPANY, INC.** [US/US]; 30 Winfield Street, Norwalk, CT 06855 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CHASE, Kevin, J.** [US/US]; 26 Surrey Lane, Branford, CT 06405 (US).
STUNKEL, Brian, W. [US/US]; 16 Wascussee Lane, Stamford, CT 06902 (US).

(74) Agent: **LONDA, Bruce, S.**; Norris, McLaughlin & Marcus, P.A., 875 Third Avenue, 8th Floor, New York, NY 10022 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ASHLESS LUBRICANT COMPOSITION

(57) Abstract: A lubricant composition with improved antioxidant capability is provided by way of an additive composition containing a metal free sulfur-containing compound, an aromatic amine, and a hindered amine. Particularly effective metal-free sulfur-containing compounds include ashless dithiocarbamates, such as methylenebis(dibutyldithiocarbamate), and sulfurized fatty acids.



WO 2010/088377 A1

ASHLESS LUBRICANT COMPOSITION

The present invention relates to lubricant compositions that are stabilized from oxidation by the presence of a (a) metal-free sulfur-containing compound, (b) a hindered amine, and (c) an aromatic amine.

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to lubricating oil compositions, their method of preparation and use. Specifically, this invention relates to lubricating compositions that contain an antioxidant additive comprising a metal-free sulfur-containing compound, a hindered amine and an aromatic amine.

Description of the Related Art

Oxidation is a major cause of the breakdown of lubricants. This results in a shortened lifespan of the lubricant, requiring more frequent changes, especially in demanding environments such as internal combustion engines.

Antioxidants have therefore played an important role as additives in lubricants in order to extend their useful life. Aryl amines (also called aromatic amines), especially secondary diarylamines, e.g., alkylated diphenylamines, phenothiazines, and alkylated N-naphthyl-N-phenylamines have been important additives to lubricating compositions. Also important have been phenolic compounds in retarding oxidation.

Other combinations of antioxidants have also been used. U.S. Pat. Nos. 5,073,278 and 5,273,669 to Schumacher et al. disclose the synergistic combination of aromatic amines and hindered amines in a lubricating oil. U.S. Pat. No. 5,268,113 to Evans et al. discloses the combination of a hindered amine with phenolic compounds.

Sulfurized organic compounds have also been shown to have antioxidant activity. U.S. Pat. Nos. 4,880,551 to Doe and 6,743,759 to Stunkel disclose the synergies between an ashless dithiocarbamate with triazole compounds. U.S. Pat. No. 6,806,241 discloses the synergy between an ashless dithiocarbamate, a molybdenum compound, and an alkylated diphenylamine.

SUMMARY OF THE INVENTION

We have discovered that a lubricant composition containing an additive comprising a metal free sulfur-containing compound, an aromatic amine, and a hindered amine can synergistically give antioxidant protection. More specifically, the invention provides for a lubricant composition which comprises a mineral or a synthetic base oil, a mixture of such oils, or a grease, and an antioxidant additive composition comprising (as weight percent of the total lubricant composition):

at least one, metal-free sulfur-containing compound at between about 0.001 and 10%, preferably between about 0.1 and 1.0%, and most preferably at between about 0.25 and 0.5%;

at least one hindered amine at between 0.001 and 10%, preferably between about 0.05 and 1.0%, and most preferably between about 0.1 and 0.5%; and

at least one aromatic amine at between 0.001 and 10%, preferably between about 0.1 to 1.0%, and most preferably between about 0.25 and 0.5%.

Particularly effective metal-free sulfur-containing compounds include ashless dithiocarbamates, such as methylenebis(dibutyldithiocarbamate), and sulfurized fatty acids. In addition, the highest degree of synergy was noted with a relatively small amount of hindered amine in the additive, such as a preferred composition comprising about 0.1% hindered amine, about 0.4% aromatic amine, and about 0.5% metal-free sulfur-containing compound.

DETAILED DESCRIPTION OF THE INVENTION

Lubricant Basestocks

Typical lubricant basestocks that can be used in this invention may include both mineral and synthetic oils. Included are polyalphaolefins, (also known as PAOS), esters, diesters and polyol esters or mixtures thereof. The basestock comprises at least 90%, and preferably at least 95% of the total lubricant composition.

Grease

Base grease compositions consist of a lubricating oil and a thickener system. Generally, the base oil and thickener system will comprise 65 to 95, and 3 to 10 mass percent of the final grease respectively. The base oils most commonly used are petroleum oils, bio-based oils or synthetic base oils. The most common thickener systems known in the art are lithium soaps, and lithium-complex soaps, which are produced by the neutralization of fatty carboxylic acids or the saponification of fatty carboxylic acid esters with lithium hydroxide typically directly in the base fluids. Lithium-complex greases differ from simple lithium greases by incorporation of a complexing agent, which usually consists of di-carboxylic acids.

Other thickener systems that can be used in this invention include aluminum, aluminum complex, sodium, calcium, calcium complex, organo-clay, sulfonate and polyurea, etc.

Metal-Free Sulfur-Containing Compounds

Sulfur-containing compounds used in this invention are of many types. Typically, the sulfur-containing compound is oil-soluble and contains a readily oxidizable sulfur atom or atoms. Examples of such compounds are sulfurized olefins, alkyl sulfides and disulfides, dialkyl dithiocarbamates, dithiocarbamate esters, ashless dithiocarbamates, thiuram disulfides, sulfurized fatty acids, sulfurized fatty acid derivatives, and thiadiazole compounds.

1. Sulfurized Fatty Acids and Derivatives

Sulfurized fatty acids can be prepared by the reaction with unsaturated fatty acids with the sulfur sources mentioned above. Examples of unsaturated fatty acids include but are not limited to; linoleic acid, oleic acid, arachidonic acid, linolenic acid, and myristoleic acid.

Derivatives of sulfurized fatty acids include but are not limited to sulfurized fatty acid esters and sulfurized fatty acid amides.

2. Other Sulfur-Containing Compounds

Ashless dithiocarbamates, tetraalkylthiuram disulfides, and thiadiazole compounds that are suitable for use in this invention include, but are not limited to; methylenebis(dialkyldithiocarbamate), ethylenebis(dialkyldithiocarbamate), and tetraalkylthiuram disulfide where the alkyl groups have preferentially have between 1 and 20 carbon atoms. Examples of preferred ashless dithiocarbamates are methylenebis(dibutyldithiocarbamate) and ethylenebis(dibutyldithiocarbamate). Examples of preferred thiuram disulfides include tetrabutylthiuram disulfide and tetraoctylthiuram disulfide. Examples of thiadiazole compounds include dialkyl thiadiazoles.


It is found that sulfurized olefins do not provide a noticeable synergy when used in the proposed three-component system of the invention. Sulfurized olefins are usually derived from alpha olefins, isomerized alpha olefins, cyclic olefins, branched olefins, and polymeric olefins that are reacted with a sulfur source. Specific examples of olefins include but are not limited to; 1-butene, isobutylene, diisobutylene, 1, pentene, 1-hexene, 1-heptene, 1-octene, and more with longer carbon chains up to C₆₀ and beyond to polymeric olefins. Examples of sulfur sources include sulfur, hydrogen sulfide, sodium hydrogen sulfide, sodium sulfide, sulfur chloride, and sulfur dichloride.

Hindered Amines

The hindered amines used in this invention are of many types, with three types predominating: pyrimidines, piperidines and stable nitroxide compounds. Many more are described in the book “Nitrones, Nitronates, and Nitroxides”, E. Breuer, et al., 1989, John Wiley & Sons. The hindered amines are also known as HALS (hindered amine light stabilizers) and are a special type of amine that are capable of antioxidant behavior. They are used extensively in the plastics industry to retard photochemical degradation.

1. Pyrimidine compounds

Pyrimidine compounds are of the substituted tetrahydro type and include the general structure of a 2,3,4,5 tetrahydropyrimidine as given below (I), and described by Volodarsky, et al. in U.S. Pat. No. 5,847,035, and by Alink in U.S. Pat. No. 4,085,104.




(I)

R1 is H, O, or a hydrocarbon from 1 to 25 carbon atoms, or an alkoxy radical with the oxygen bound to the nitrogen with the alkyl portion containing 1 to 25 carbon atoms. R2, R3, R4, R5, R6, and R7 are hydrocarbons with 1 to 25 carbon atoms each. Most preferably, R2, R3, R6, and R7 are methyls.

Other pyrimidine compounds that can be of the hexahydro type, (II)

(II)




R8 and R11 are H, O, or a hydrocarbon from 1 to 25 carbon atoms, or an alkoxy radical with the oxygen bound to the nitrogen with the alkyl portion containing 1 to 25 carbon atoms. R9, R10, R11, R12, R13, R14, and R15 are hydrocarbons with 1 to 25 carbon atoms each. Most preferably, R9, R10, R14, and R15 are methyls.

2. Piperidine compounds

The piperidine compounds used in this invention are described by Schumacher, et al., U.S. Pat. 5,073,278 and by Evans in U.S. Pat. 5,268,113. These compounds have the general formula (III);

(III)



where R16 is H, O or a hydrocarbon from 1 to 25 carbon atoms, or an alkoxy radical with the oxygen bound to the nitrogen with the alkyl portion containing 1 to 25 carbon atoms. R17, R18, R22, and R23 are preferentially methyl groups. R20 is either OH, H, O, NH₂, an ester group O₂CR where R is a hydrocarbon with 1 to 25 carbon atoms or a succinimide group.

Examples of hindered amines based upon piperidine include 4-hydroxy-2,2,6,6-tetramethylpiperidine, 1-allyl-4-hydroxy-2,2,6,6-tetramethylpiperidine, 1-benzyl-

4-hydroxy-2,2,6,6-tetramethylpiperidine, 1-(4-tert-butylbut-2-enyl)-4-hydroxy-2,2,6,6-tetramethylpiperidine, 4-stearoyloxy-2,2,6,6-tetramethylpiperidine, 1-ethyl-4-salicyloyloxy-2,2,6,6-tetramethylpiperidine, 4-methacryloyloxy-1,2,2,6,6-pentamethylpiperidine, 1,2,2,6,6-pentamethylpiperidin-4-yl-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate, di(1-benzyl-2,2,6,6-tetramethylpiperidin-4-yl) maleate, di(2,2,6,6-tetramethylpiperidin-4-yl) succinate, di(2,2,6,6-tetramethylpiperidin-4-yl) glutarate, di(2,2,6,6-tetramethylpiperidin-4-yl) adipate, di(2,2,6,6-tetramethylpiperidin-4-yl) sebacate, di(1,2,2,6,6-pentamethylpiperidin-4-yl) sebacate, di(1,2,3,6-tetramethyl-2,6-diethylpiperidin-4-yl) sebacate, di(1-allyl-2,2,6,6-tetramethylpiperidin-4-yl) phthalate, 1-hydroxy-4-.beta.-cyanoethoxy-2,2,6,6-tetramethylpiperidine, 1-acetyl-2,2,6,6-tetramethylpiperidin-4-yl acetate, tri(2,2,6,6-tetramethylpiperidin-4-yl) trimellitate, 1-acryloyl-4-benzyloxy-2,2,6,6-tetramethylpiperidine, di(2,2,6,6-tetramethylpiperidin-4-yl) diethylmalonate, di(1,2,2,6,6-pentamethylpiperidin-4-yl) dibutylmalonate, di(1,2,2,6,6-pentamethylpiperidin-4-yl) butyl(3,5-di-tert-butyl-4-hydroxybenzyl)malonate, di(1-octyloxy-2,2,6,6-tetramethylpiperidin-4-yl) sebacate, di(1-cyclohexyloxy-2,2,6,6-tetramethylpiperidin-4-yl) sebacate, hexane-1',6'-bis(4-carbamoyloxy-1-n-butyl-2,2,6,6-tetramethylpiperidine), toluene-2',4'-bis(4-carbamoyloxy-1-n-propyl-2,2,6,6-tetramethylpiperidine), dimethyl-bis(2,2,6,6-tetramethylpiperidin-4-oxy)silane, phenyl-tris(2,2,6,6-tetramethylpiperidin-4-oxy)silane, tris(1-propyl-2,2,6,6-tetramethylpiperidin-4-yl) phosphate, tris(1-propyl-2,2,6,6-tetramethylpiperidin-4-yl) phosphate, phenyl[bis(1,2,2,6,6-pentamethylpiperidin-4-yl)] phosphonate, 4-hydroxy-1,2,2,6,6-pentamethylpiperidine, 4-hydroxy-N-hydroxyethyl-2,2,6,6-tetramethylpiperidine, 4-hydroxy-N-(2-hydroxypropyl)-2,2,6,6-tetramethylpiperidine, 1-glycidyl-4-hydroxy-2,2,6,6-tetramethylpiperidine, dodecyl-N-(2,2,6,6-tetramethyl-4-piperidinyl)succinate.

Most useful in this invention are the 2,2,6,6-tetramethylpiperidines, 1,2,2,6,6-pentaalkylpiperidines, 1-oxo-2,2,6,6-tetramethylpiperidines, and 1-alkoxy-2,2,6,6-tetramethylpiperidines.


3. Polymers Containing Hindered Amines

Polymeric 2,2,6,6-tetraalkylpiperidines and 1,2,2,6,6-pentaalkylpiperidines are also prevalent and may be used in this formulation. The polymeric compounds used in this invention are described by Schumacher, et al., U.S. Pat. No. 5,073,278, by Evans et al. in U.S. Pat. No. 5,268,113, and by Kazmierzak et al. in U.S. Pat. No. 4857,595. There are several kinds of polymeric piperidine compounds available. Commercially available examples include Tinuvin® 622 from Ciba and Songlight® 9440 from Songwon.

4. Other Hindered Amines


Another type of hindered amine has been disclosed in US Patent No. 5,098,944 and describes hindered amines of the type shown in general formula (IV).

(IV)



Wherein PSP represents a substituent derived from a cyclic amine represented by a structure selected from the group in general formulae (V)

(V)

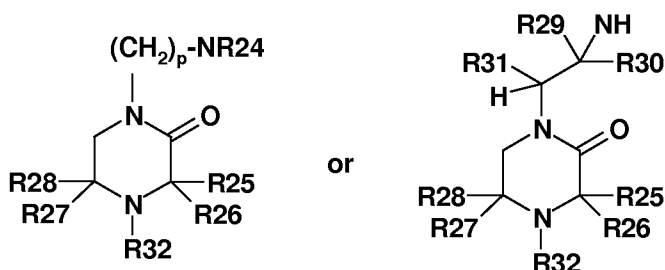


wherein PSP represents a substituent derived from a cyclic amine represented by a structure selected from the group consisting of wherein R24 represents C₁-C₂₄ alkyl, C₅-C₂₀ cycloalkyl C₇-C₂₀ aralkyl or alkaryl, C₁-C₂₄ aminoalkyl, or C₆-C₂₀

aminocycloalkyl; R25, R26, R27, and R28 independently represent C₁-C₂₄ alkyl; and R25 with R26, or R27 with R28 are cyclizable to C₅-C₁₂ cycloalkyl including the C₃ and C₅ atoms respectively, of the piperazin-2-one ring; R29 and R30 independently represent C₁-C₂₄ alkyl, and polymethylene having from 4 to 7 carbonatoms which are cyclizable; R31 represents H, C₁-C₆ alkyl, and phenyl; R32 represents C₁-C₂₅ alkyl, H, or O, or alkoxy with a hydrocarbon chain between 1 and 25 carbon atoms; and, p represents an integer in the range from 2 to about 10.

Diarylamines

The diarylamines used in this invention are of the type Ar₂NR. Since these are well known antioxidants in the art, there is no restriction on the type of diarylamines used in this invention, although there is the requirement of solubility in the lubricating composition.

(VI)




The alkylated diphenylamines are well known antioxidants and there is no particular restriction on the type of secondary diarylamine used in the invention. Preferably, the secondary diarylamine antioxidant has the general formula (X) where R33 and R34 each independently represents a substituted or unsubstituted aryl group having from 6 to 30 carbon atoms. R35 represents either a H atom or an alkyl group containing from 1 to 30 carbon atoms. Illustrative of substituents for the aryl there can be mentioned aliphatic hydrocarbon groups such as alkyl having from about 1 to 20 carbon atoms, hydroxy, carboxyl or nitro, e.g., an alkaryl group having from 7 to 20 carbon atoms in the alkyl group. The aryl is preferably substituted or unsubstituted phenyl or naphthyl, particularly wherein one or both of the aryl groups are substituted with an alkyl such as one having from 4 to 18 carbon atoms. R35 can be either H or alkyl from 1 to 30 carbon atoms. The alkylated diphenylamines used in this invention can be of a structure other than that

shown in the above formula which shows but one nitrogen atom in the molecule. Thus, the alkylated diphenylamine can be of a different structure provided that at least one nitrogen has 2 aryl groups attached thereto, e.g., as in the case of various diamines having a secondary nitrogen atom as well as two aryls on one of the nitrogens. The alkylated diphenylamines used in this invention preferably have antioxidant properties in lubricating oils, even in the absence of the molybdenum compound.

Examples of some alkylated diphenylamines that may be used in this invention include: diphenyl amine, 3-hydroxydiphenylamine; N-phenyl-1,2-phenylened-amine; N-phenyl-1,4-phenylenediamine; dibutyldiphenylamine; dioctyldiphenylamine; dinonyldiphenylamine; phenyl-alpha-naphthylamine; phenyl-beta-naphthylamine; diheptyldiphenylamine; and p-oriented styrenated diphenylamine.

Phenothiazines

Phenothiazines are another class of diarylamines with the general structure (VII),
(VII)

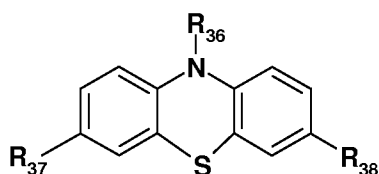

Where R₃₆ is H, or an alkyl from 1 to 30 carbon atoms, and R₃₇ and R₃₈ are alkyl from 1 to 30 carbon atoms

Lubricating Oil Compositions

The lubricating oil compositions of this invention can be prepared by adding the sulfur-containing compound, the hindered amine, and the aromatic amine to a basestock. Combinations can contain from 0.001 to 10 weight percent of each of the three additives in the lubricating oil.

Grease Compositions

In another embodiment, a grease composition of this invention can be prepared by adding sulfur-containing compound, the hindered amine, and the aromatic amine to a base grease. Combinations can contain from 0.001 to 10 weight percent of each of the three additives in the lubricating oil.

Other Additives

In addition, other additives can be added to the lubricating compositions described above. These include the following components:

Other antioxidants, including phenols, hindered phenols, hindered bisphenols, sulfurized phenols, zinc dihydrocarbyl dithiophosphates, zinc dithiocarbamates, organophosphites. A more complete list of useful phenols can be found in US Patent No. 5,073,278 to Schumacher et al.

Antiwear additives, including zinc dihydrocarbyl dithiophosphates, tricresol phosphate, dilauryl phosphate.

Dispersants, including polymethacrylates, styrenemaleic ester copolymers, substituted succinamides, polyamine succinamides, polyhydroxy succinic esters, substituted Mannich bases, and substituted triazoles.

Detergents, including neutral and overbased alkali and alkaline earth metal sulfonates, neutral and overbased alkali and alkaline earth metal phenates, sulfurized phenates, overbased phosphonates, and thiophosphonates.

Viscosity index improvers, including polyacrylates, polymethacrylates, vinylpyrrolidone/methacrylate copolymers, polyvinylpyrrolidones, polybutenes, olefin copolymers, styrene/acrylate copolymers.

Pour point depressants, including polymethacrylate and alkylated naphthalene derivatives.

EXAMPLE 1

*Lubricant Compositions Containing a Hindered Amine, diaryl amine and
Methylenebis(dibutyldithiocarbamate)*

Pressurized Differential Scanning Calorimetry (PDSC) was performed according to ASTM Test Method D6186. These tests were performed on a lubricant composition comprising a polyalphaolefin oil, Durasyn® 166 from BP, and Infineum® C9268, a crankcase dispersant containing 1.2% Nitrogen from Infineum. Also provided in the lubricant composition was Cyasorb® UV-3853, a hindered amine with the name 4-piperidol-2,2,6,6-tetremethyl-RPW stearin (fatty acids mixture) from Cytec. The metal-free sulfur containing compound is VANLUBE® 7723 additive, a methylenebis(dibutyldithiocarbamate) from R.T. Vanderbilt Company, Inc. The diaryl amine used was Vanlube® 961 additive from R.T. Vanderbilt Company, Inc., a mixture of octylated and butylated diphenylamines. The test is performed by blending and adding the ingredients into a DSC cell, heating the cell to 180 degrees C., then pressurizing with 500 psi of oxygen. What is measured is the oxidation induction time (OIT), which is the time takes to observe an exothermic release of heat. The longer the OIT the greater the oxidative stability of the oil blend. The results are shown in Table I labeled as "minutes to induction".

TABLE I

PDSC Induction Times for Motor Oil Blends

% Additive

Cyasorb UV 3853			0.25		0.25	0.25	0.10	0.25	0.50
VL 961	0.50	0.25				0.25	0.40	0.25	
VL 7723	0.50	0.50		0.50	0.50	0.50	0.50		
Infineum C9268	3.90	3.90	3.90	3.90	3.90	3.90	3.90	3.90	3.90
Durasyn 166	95.10	95.35	95.85	95.60	95.35	95.10	95.10	95.60	95.60
PDSC @180°C									
500lbs O ₂									
100ml/min flow									
Minutes to induction	268.6	206.9	48.0	16.0	25.2	229.7	335.7+	91.2	59.2

EXAMPLE 2

Lubricant Compositions Containing a Hindered Amine, Diaryl Amine and a Sulfurized Fatty Acid

Lubricant compositions prepared as above in Example 1, containing the combination of Cyasorb® UV-3853 and Vanlube® 961, and as sulfur-containing compound Arkema® VPS 15, a sulfurized fatty acid mixture containing approximately 15% sulfur (w/w) from Arkema. PDSC (ASTM D1686) was performed as in Example 1, and data is reported in Table II.

TABLE II

PDSC Induction Times for Motor Oil Blends

% Additive							
Cyasorb UV 3853					0.25	0.25	0.1
VL 961	0.5	0.5	0.25			0.25	0.4
Arkema VPS 15		0.5	0.5	0.5	0.5	0.5	0.5
Infineum C9268	3.9	3.9	3.9	3.9	3.9	3.9	3.9
Durasyn 166	95.6	95.1	95.35	95.6	95.35	95.1	95.1
PDSC @180 °C							
500lbs O ₂							
100ml/min flow							
Minutes to induction	69.1	173.3	76.6	8.3	13.4	185.2	213.5

COMPARATIVE EXAMPLE 3

Lubricant Compositions Containing a Hindered Amine, Diaryl Amine and a Sulfurized Olefin

Lubricant compositions were prepared according to Example 1 above, containing the combination of Cyasorb UV3853 and Vanlube® 961, with sulfur-containing compound VANLUBE® SB, a sulfurized olefin containing approximately 45% sulfur from R.T. Vanderbilt Company, Inc.. PDSC (ASTM D1686) was performed as in Example 1, and data is reported in Table III.

TABLE III

PDSC Induction Times for Motor Oil Blends

% Additive

Cyasorb UV 3853					0.25	0.25	0.1
VL 961	0.5	0.5	0.25			0.25	0.4
VL SB		0.5	0.5	0.5	0.5	0.5	0.5
Infineum C9268	3.9	3.9	3.9	3.9	3.9	3.9	3.9
Durasyn 166	95.6	95.1	95.35	95.6	95.35	95.1	95.1
PDSC @180 °C							
500lbs O ₂							
100ml/min flow							
Minutes to induction	69.1	213.1	138.4	12.0	19.0	216.5	215.5

What is claimed is:

1. A lubricating composition comprising at least 90% by weight of a lubricant basestock, and an antioxidant additive composition comprising:
 - (a) a metal-free sulfur-containing compound at between about 0.001 and 10%, chosen from the group consisting of sulfurized fatty acids, ashless dithiocarbamates, tetraalkylthiuram disulfides, and thiadiazoles,
 - (b) a hindered amine at between about 0.001 and 10%, and
 - (c) a diaryl amine at between about 0.001 and 10%.
2. The lubricant composition according to claim 1, wherein the additive composition comprises:
 - (a) the metal-free sulfur-containing compound at between about 0.1 and 1.0%,
 - (b) the hindered amine at between about 0.05 and 1.0%, and
 - (c) the diaryl amine at between about 0.1 and 1.0%.
3. The lubricant composition according to claim 2, wherein the additive composition comprises:
 - (a) the metal-free sulfur-containing compound at between about 0.25 and 0.5%,
 - (b) the hindered amine at between about 0.1 and 0.5%, and
 - (c) the diaryl amine at between about 0.25 and 0.5%.
4. The lubricant composition according to claim 3, wherein the additive composition comprises:
 - (a) the metal-free sulfur-containing compound at about 0.5%,
 - (b) the hindered amine at about 0.1%, and
 - (c) the diaryl amine at about 0.4%.
5. The lubricant composition according to claim 1, wherein the metal-free sulfur-

containing compound is chosen from the group consisting of ashless dithiocarbamates and sulfurized fatty acids.

6. The lubricant composition according to claim 5, wherein the ashless dithiocarbamate is methylenebis(dibutyldithiocarbamate) or sulfurized fatty acids.
7. The lubricant composition according to claim 1, wherein the sulfur-containing compound is methylenebis(dibutyldithiocarbamate) and the hindered amine is 4-piperidol-2,2,6,6-tetremethyl-RPW stearin (fatty acids mixture).
8. The lubricant composition according to claim 2, wherein the sulfur-containing compound is methylenebis(dibutyldithiocarbamate).
9. The lubricant composition according to claim 3, wherein the sulfur-containing compound is methylenebis(dibutyldithiocarbamate).
10. The lubricant composition according to claim 4, wherein the sulfur-containing compound is methylenebis(dibutyldithiocarbamate).
11. The lubricant composition according to claim 1, wherein the additive composition comprises:
 - (a) methylenebis(dibutyldithiocarbamate) at about 0.5%,
 - (b) 4-piperidol-2,2,6,6-tetremethyl-RPW stearin (fatty acids mixture) at about 0.1%, and
 - (c) the diaryl amine at about 0.4%.
12. The lubricant composition according to claim 1, wherein the sulfur-containing compound is sulfurized fatty acid.
13. The lubricant composition according to claim 1, wherein the sulfur-containing compound is sulfurized fatty acid and the hindered amine is 4-piperidol-2,2,6,6-

tetremethyl-RPW stearin (fatty acids mixture).

14. The lubricant composition according to claim 2, wherein the sulfur-containing compound is sulfurized fatty acid.

15. The lubricant composition according to claim 3, wherein the sulfur-containing compound is sulfurized fatty acid.

16. The lubricant composition according to claim 1, wherein the additive composition comprises:

- (a) sulfurized fatty acid at about 0.5%,
- (b) 4-piperidol-2,2,6,6-tetremethyl-RPW stearin (fatty acids mixture) at about 0.1%, and
- (c) the diaryl amine at about 0.4%.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 10/22392

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - C10M 135/18 (2010.01)

USPC - 508/443

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC - 508/443

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
USPC - 508/185, 364, 440, 444 (see search terms on extra sheet)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

(USPT, PGPB, EPAB, JPAB); Google Patent, Google Scholar, Dialog Web

Search terms on extra sheet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2007/0254821 A1 (Aguilar et al.) 01 Nov 2007 (01.11.2007) para [0011], [0012], [0022], [0025], [0026], [0040]	1-16
Y	US 2008/0221000 A1 (Chase et al.) 11 Sep 2008 (11.09.2008) Abstract; para [0090], [0095]	1-16

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

01 Mar 2010 (01.03.2010)

Date of mailing of the international search report

10 MAR 2010

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 10/22392

continued from box B

Search terms:

lubricant, lubricating oil, sulfurized fatty acid, ashless dithiocarbamate, thiadiazole, hindered amine diaryl amine, diarylamine, tetraalkylthiuram disulfide, diphenylamine, diaromatic amine, Methylene dibutyldithiocarbamate, methylenebis dibutyldithiocarbamate, HALS, 4-piperidol-2,2,6,6-tetremethyl, 4-piperidol-2,2,6,6-tetremethyl-RPW, UV-3853, anti-oxidant