

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 June 2011 (16.06.2011)

PCT

(10) International Publication Number
WO 2011/069743 A1

(51) International Patent Classification:
G01N 33/00 (2006.01) *G01N 27/12* (2006.01)

(21) International Application Number:
PCT/EP2010/066169

(22) International Filing Date:
26 October 2010 (26.10.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09178381.1 8 December 2009 (08.12.2009) EP

(71) Applicants (for all designated States except US):
NANOCYL S.A. [BE/BE]; Rue de l'Essor 4, B-5060 Sambreville (BE). UNIVERSITE DE BRETAGNE SUD [FR/FR]; Rue Armand Guillemot, F-56100 Lorient (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): LUIZI, Frederic [BE/BE]; Rue du Broctia 25, B-5020 Malonne (BE). MEZZO, Luca [IT/IT]; Via Faletti 31, IT-10076 Nole (TO) (IT). FELLER, Jean-Fançois [FR/FR]; Kerlébert, F-56530 Queven (FR). CASTRO, Mickaël [FR/FR]; Rue Guillaume Viennet 17, F-56100 Lorient (FR).

(74) Agent: PRONOVEM - OFFICE VAN MALDEREN;
Boulevard de la Sauvenière 85/043, B-4000 Liege (BE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ELECTROCHEMICAL SENSING METHOD

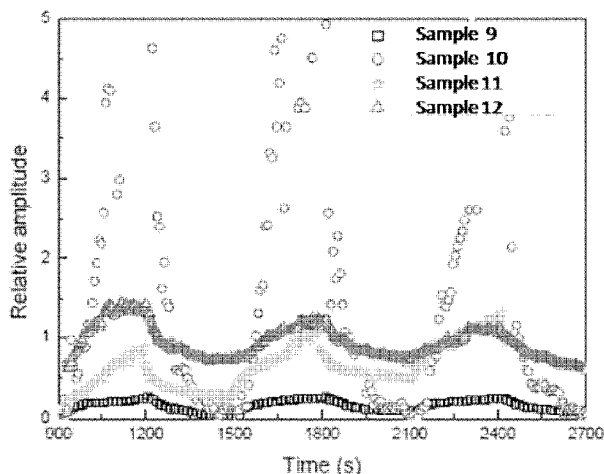


Figure 7

(57) Abstract: The present invention is related to a method for detecting at least one chemical analyte vapour in a gaseous environment comprising the steps of: - providing a fibre-based electrochemical sensor, said fibre-based sensor comprising at least one type of composite fibres, said type of composite fibres comprising a co-continuous phase blend comprising a first and a second continuous polymer phase, the first polymer phase being sensitive to the chemical analyte vapour to be detected in use, wherein said first polymer phase comprises a dispersion of carbon nanotubes at a concentration above the percolation threshold and wherein the chemical analyte is soluble in said first polymer phase; - measuring the initial electrical conductivity of the fibre-based sensor; - bringing said fibre-based sensor into contact with at least one chemical analyte to induce a modification of the electrical conductivity of the fibres; - measuring the modification of the resulting electrical conductivity of said fibre-based sensor and correlating said modification with the identification of the chemical analyte to be detected.



WO 2011/069743 A1

5

ELECTROCHEMICAL SENSING METHOD**Field of the invention**

[0001] The present invention is related to a method
10 for detecting at least one chemical analyte vapour in a
gaseous environment.

State of the art

[0002] Document US 5,417,100 discloses the use of
15 conductive polymers in composites to detect the presence of
solvents in the environment. The detection of the solvents
is achieved by the swelling of the polymer in contact with
said solvents, increasing the space between the polymeric
chains. This modification of the configuration of the
20 polymeric chains increases the resistivity of the
composite. Multiple conductive polymers can be used
together in one system to sense multiple solvents as
disclosed by US 5,698,089.

[0003] US 5,672,297 discloses the use of a
25 conductive filler dispersed in an isolating solvent along
with swellable polymer particles. The swelling of the
polymer particles induced by the environment reduces the
volume of the residual free solvent and the local
concentration of the filler, which reaches the percolation
30 threshold. The swelling of the polymeric particles thus
induces major changes in the electrical conductivity of the
mixture.

[0004] Document US 7,342,479 discloses the use of
coatings comprising carbon nanotubes as chemical sensors,
35 using changes in electrical resistivity of the coating to

determine the concentration of a particular chemical analyte. The coating described in this document uses the intrinsic resistivity variation of the carbon nanotubes embedded in a binder such as a polymer. Such chemical sensors need to be supported and are proposed in the form of coatings on dielectric substrates.

[0005] Document US 6,315,956 discloses a sensor for detecting the presence of a chemical analyte. The disclosed sensor comprises a polymer blend comprising a first and a second continuous polymer phase (co-continuous phases). The first continuous polymer phase comprises a conductive filler at a concentration above the percolation threshold, so that said first phase is electrically conductive. The second phase is insulating and selected so that the analyte to be detected is soluble in said second phase. In the presence of the analyte, the absorption of said analyte by the second phase induces the swelling of this phase, inducing a conductivity change of the macroscopic blend. Furthermore, the first polymer phase is insensitive to the analyte.

Aims of the invention

[0006] The present invention aims to provide a fibre-based electrochemical sensor for the detection of at least one chemical analyte that overcomes the drawbacks of the prior art.

[0007] More particularly, the present invention aims to provide a compact and self-supported fibre-based electrochemical sensor for the detection of at least one chemical analyte.

Summary of the invention

[0008] The present invention is related to a fibre-based electrochemical sensor for the detection of at least one

chemical analyte vapour in a gaseous environment comprising at least one type of composite fibres, said type of composite fibres comprising a co-continuous phase blend with a specific association of a first and a second
5 continuous polymer phase, the first polymer phase being sensitive to the chemical analyte vapour to be detected in use, wherein said first polymer phase comprises a dispersion of carbon nanotubes at a concentration above the percolation threshold and wherein the chemical analyte is
10 soluble in said first polymer phase.

[0009] According to particular preferred embodiments, the invention further discloses at least one or a suitable combination of the following features:

- 15 - the Flory-Huggins interaction parameter between the chemical analyte and the first polymer phase is smaller than 5,64 [$J^{1/2} \text{ cm}^{-3/2}$].
- said carbon nanotubes are multiwall carbon nanotubes with a specific surface area between 100 and 400 m^2/g .
- said first polymer phase is selected from the group
20 consisting of polycaprolactone, polylactic acid, polyethylene oxide and polymethyl methacrylate.
- said at least one chemical analyte is selected from the group consisting of aromatic solvents, preferably styrene and toluene.
- 25 - said at least one chemical analyte is selected from the group consisting of alcohols, preferably methanol.
- said at least one chemical analyte is selected from the group consisting of chlorinated solvents, preferably trichloromethane.
- 30 - said second polymer phase is a polyolefin, preferably polyethylene or polypropylene.
- said second polymer phase is polyamide.
- the first polymer phase is polycaprolactone, for the detection, in use, of tetrahydrofuran.

- the first polymer phase is polylactic acid for the detection, in use, of Styrene.
- the first polymer phase is polyethylene oxide for the detection, in use, of methanol.
- 5 - the first polymer phase is polymethyl metacrylate for the detection, in use, of trichloromethane.

[0010] The present invention further discloses a device for measuring the concentration of at least one chemical analyte comprising a fibre-based electrochemical
10 sensor as disclosed here above.

[0011] Preferably, said device further comprises several different fibre-based electrochemical sensors as disclosed here above.

[0012] The present invention is also related to a
15 method for detecting at least one chemical analyte vapour in a gaseous environment comprising the steps of:

- providing a fibre-based electrochemical sensor, said fibre-based sensor comprising at least one type of composite fibres, said type of composite fibres
20 comprising a co-continuous phase blend comprising a first and a second continuous polymer phase, the first polymer phase being sensitive to the chemical analyte vapour to be detected in use, wherein said first polymer phase comprises a dispersion of carbon nanotubes at a concentration above
25 the percolation threshold and wherein the chemical analyte is soluble in said first polymer phase;

- measuring the initial electrical conductivity of the fibre-based sensor;
- bringing said fibre-based sensor into contact with at
30 least one chemical analyte to induce a modification of the electrical conductivity of the fibres;
- measuring the modification of the resulting electrical conductivity of said fibre-based sensor and correlating

said modification with the identification of the chemical analyte to be detected.

[0013] According to particular preferred embodiments, the method of the invention further discloses at least one
5 or a suitable combination of the following features:

- the Flory-Huggins interaction parameter between the chemical analyte and the first polymer phase is smaller than 5,64 [$\text{J}^{1/2} \text{cm}^{-3/2}$];
- said carbon nanotubes are multiwall carbon nanotubes
10 with a specific surface area between 100 and 400 m^2/g ;
- said first polymer phase is selected from the group consisting of polycaprolactone, polylactic acid, polyethylene oxide and polymethyl metacrylate;
- said at least one chemical analyte is selected from
15 the group consisting of aromatic solvents, preferably styrene and toluene;
- said at least one chemical analyte is selected from the group consisting of alcohols, preferably methanol;
- said at least one chemical analyte is selected from
20 the group consisting of chlorinated solvents, preferably trichloromethane;
- said second polymer phase is a polyolefin, preferably polyethylene or polypropylene;
- said second polymer phase is polyamide;
- the first polymer phase is polycaprolactone, for the
25 detection of tetrahydrofuran;
- the first polymer phase is polylactic acid for the detection of Styrene;
- the first polymer phase is polyethylene oxide for the
30 detection of methanol;
- the first polymer phase is polymethyl metacrylate for the detection of trichloromethane;
- several different fibre-based electrochemical sensors are provided;

- the viscosity ratio between the first and second polymer phases is comprised between 0,67 and 1,5;
- the viscosity ratio between the first and second polymer phases is comprised between 0,8 and 1,2;
- 5 - the co-continuous phase blend further comprises a compatibiliser, preferably, said compatibiliser being selected from the group consisting of maleic anhydride grafted polyolefin, ionnomers and copolymers.

10 **Brief description of the drawings**

[0014] Figure 1 represents the spinning process for the production of the fibres used in the fibre-based electrochemical sensor of the present invention.

15 [0015] Figure 2 represents a SEM analysis of a transverse section of a fibre comprising a PP / PCL blend at 50/50 wt with 3% CNT (sample 4) dispersed in the PCL phase, after extraction of the PCL phase.

[0016] Figure 3 represents a graph of the continuity ratio of PCL measured by selective extraction of PCL using
20 acetic acid.

[0017] Figure 4 represents the electrical conductivity as a function of the weight fraction of PCL in both PA12 and PP.

[0018] Figure 5 represents SEM pictures of PA12/PCL
25 blends at 50/50 wt (sample 9) after extraction of the PCL phase.

[0019] Figure 6 represents the change in electrical conductivity (relative amplitude) of fibres of various compositions in the presence of trichloromethane.

30 [0020] Figure 7 represents the change in electrical conductivity (relative amplitude) of fibres of various compositions in the presence of toluene.

[0021] Figure 8 represents the change in electrical conductivity (relative amplitude) of fibres of various compositions in the presence of styrene.

[0022] Figure 9 represents the change in electrical conductivity (relative amplitude) of fibres of various compositions in the presence of methanol.

[0023] Figure 10 represents the change in electrical conductivity of PA12/PMMA fibres (sample 9) in the presence of various vapours of chemical analytes in dynamic mode at 500 cm³.min⁻¹ of vapour.

[0024] Figure 11 represents the change in electrical conductivity of PP/PCL fibres in the presence of various liquid chemical analytes.

[0025] Figure 12 represents the change in electrical conductivity of PA12/PMMA fibres (sample 9) in the presence of various amounts of vapours of chloroform in dynamic mode for various flow rates.

Detailed description of the invention

[0026] The present invention is related to a fibre-based sensor suitable for the detection of at least one chemical analyte. The fibre sensor comprises a blend of at least two co-continuous polymer phases. By co-continuous phase blend, it is meant a phase blend comprising two continuous phases.

[0027] The first polymer phase comprises a conductive filler, such as carbon nanotubes (CNT). The chemical analyte to be detected is soluble in the first polymer phase.

[0028] By soluble, it is meant in the present invention that at least some of the chemical analytes can be absorbed or expelled by the first polymer phase in response to changes in environmental analyte concentration.

[0029] The absorption of the chemical analyte can induce a swelling of said first polymer phase. The induced swelling modifies the contact between the CNTs and therefore produces a measurable change in the electrical conductivity of the fibre.

[0030] Alternatively the diffusion of an analyte can be sufficient to induce an interaction of the chains (by Van der Waals forces or Hydrogen bonds) between the chemical analyte and said first polymer phase so that the polymer chains are able to rearrange their configuration. This will result in a movement of CNTs which will disturb the electron conduction. Thus said first polymer phase can be sensitive to poor solvents and give an electric signal even without any observable swelling of the polymer matrix.

[0031] The solubility of a solvent in a polymer can for example be deduced from the Flory-Huggins interaction parameter defined by the equation:

$$\kappa_{12} = \frac{V_{seg} (\delta_{Tpol} - \delta_{Tsol})^2}{RT}$$

where δ_T is the total energy from bonds between molecules derived from:

$$\delta_T^2 = \delta_d^2 + \delta_p^2 + \delta_h^2$$

where δ_d is the energy from dispersion bonds between molecules, δ_p is the energy from polar bonds between molecules and δ_h is the energy from hydrogen bonds between molecules. Examples of values of those parameters are given in table 1.

[0032] The concentration of the conductive filler in the first polymer phase is, in the absence of the analyte, above the percolation threshold, so that said first polymer phase is conductive. The percolation threshold is the minimum filler concentration at which a continuous

electrically conducting path is formed in the composite. This threshold is characterised by a sharp increase of the conductivity of the blend with an increasing filler concentration. Usually, in conductive polymer composites, 5 this threshold is considered to be the concentration of the filler which induces a resistivity below 10^6 ohm.cm.

Table 1. Solubility parameters of solvents and polymer and Flory-Huggins interaction parameters

	Δ_r [1] [J ^{1/2} cm ^{3/2}]	δ_d [2] [J ^{1/2} cm ^{3/2}]	δ_p [3] [J ^{1/2} cm ^{3/2}]	δ_h [4] [J ^{1/2} cm ^{3/2}]	Mol. VOL. [cm ³ mol ⁻¹]	χ_{12} [5] (PC/solve nt)	χ_{12} (PC/solve nt)	χ_{12} (DMA/solven t)	χ_{12} (DPO/solve nt)	χ_{12} (PLA/solve nt)
Water	47.9	15.5	16	42.4	18.1	5.09	5.64	5.6	4.82	4.38
Methanol	29.7	15.1	12.3	22.3	40.5	1.10	1.51	1.48	0.92	0.65
Toluene	18.2	18	1.4	2	106.3	0.47	0.15	0.17	0.69	1.16
Tetrahydrofuran (THF)	19.4	16.8	5.7	8	81.4	0.14	0.02	0.02	0.26	0.53
Chloroform	19	17.8	3.1	5.7	79.7	0.2	0.04	0.05	0.33	0.62
Dichloromethan	9.9	8.9	3.1	3.0	65.3	3.5	5.64	2.79	3.99	4.80
Styrene	19	18.6	1	4.1	114.5	0.288	0.06	0.07	0.47	0.89
Poly(oxyethylene)	22.2	17.2	10.8	9	37	-	-	-	-	-
Poly(lactic acid)	23.4	15.4	15	9.3	57	-	-	-	-	-
Poly(methyl methacrylate)	20.2	17.02	5.8	9.2	84	-	-	-	-	-
Poly(carbonate)	20.1	18.7	2.9	7	203	-	-	-	-	-
Poly(caprolactone)	21.5	18.1	9	7.2	96	-	-	-	-	-

[1] δ_r : The total energy from bonds between molecules derived from $\delta_T^2 = \delta_d^2 + \delta_p^2 + \delta_h^2$.

[2] δ_d : The energy from dispersion bonds between molecules

[3] δ_p : The energy from polar bonds between molecules

[4] δ_h : The energy from hydrogen bonds between molecules

[5] χ_{12} : Flory-Huggins interaction parameter defined by the equation

$$\chi_{12} = \frac{V (\delta_{Tpol} - \delta_{Tsol})^2}{RT}$$

[0033] The first polymer phase is selected in such a way that it has a good compatibility with the analyte to be detected (i.e. the analyte can be absorbed). For example, in order to detect the vapour of a solvent, the first
5 polymer phase will be selected so that the Flory Huggins interaction parameter between the analyte to be detected and the first polymer phase is smaller than about $6[J^{1/2} \text{ cm}^{-3/2}]$, preferably smaller than $5,64 [J^{1/2} \text{ cm}^{-3/2}]$.

[0034] Due to the high compatibility of the first
10 polymer phase with the chemical analyte, large amounts of this chemical analyte can diffuse through and be absorbed by said first polymer phase, resulting in a modification of the local mobility of the polymer chain, inducing a CNT reorganisation resulting in a modification of the
15 macroscopic resistivity of the fibre. This diffusion may entail a swelling of the first polymer phase.

[0035] At high analyte concentrations, the swelling can be so high that the mechanical properties of the first phase severely drop. For that reason, a supporting material
20 is necessary to maintain the mechanical integrity of the fibre. This supporting material is formed by the second polymer phase. Said second polymer phase is selected to be almost insensitive to the chemical analyte and is non-conductive. The second polymer phase also act as a
25 protective envelope which, in use, preserves the fibre integrity.

[0036] Preferably, when used in a liquid environment, the second polymer phase is selected from the group consisting of polyolefin, more preferably
30 polypropylene or polyethylene.

[0037] Preferably, when used in a gaseous environment, the second polymer phase is based upon polyamide.

[0038] The fibres are produced in a spinning system, as shown in fig. 1. The use of fibres brings several advantages: the surface to volume ratio can be optimized by using several fibres in bundles, thus reducing the response
5 time delay in resistivity measurements, the fibres can be included in smart textile, they can easily be shaped in particular geometrical forms, etc.

[0039] The compatibility of the polymer blend has an impact on the spinnability of the biphasic systems. More
10 particularly, the adhesion between both phases improves the spinnability of the blend. This adhesion can be achieved either by the selection of intrinsically adhering pairs of polymers, or by addition of a compatibilizer in one of the polymer phases. Examples of compatibilizers are maleic
15 anhydride grafted polyolefins, ionomers, bloc copolymers comprising a bloc of each phase, etc. This cohesion has also an impact on the blend morphology.

[0040] To enable the co-continuity of phases, the ratio of viscosities between the two phases of the biphasic
20 system is preferably comprised between 0.67 and 1.5, more preferably comprised between 0.8 and 1.2, ideally, close to 1. The other parameters determining the co-continuity are the nature of the polymers (viscosities, interfacial tension and the ratio of these viscosities), their volume
25 fractions and the processing conditions.

[0041] A convenient way to evaluate viscosities in the present description is the so called MFI procedure described in the ISO 1133:1997, at a temperature close to the extrusion temperature of the fibres (i.e. 190°C for PE
30 and 230°C for PP as an example). Such MFI measurements are usually good relative estimators of the real viscosity in the usual extrusion conditions. Alternatively, the viscosities may be measured dynamically according to ISO 11443 under shear conditions close to the extrusion

conditions. But such methods are much more difficult to use, and, as already stated, as far as only viscosity ratio are needed, MFI represent sufficient estimators.

5 **Examples**

[0042] The examples presented are related to blends comprising:

- Poly(ϵ -caprolactone) (PCL), polyethylene oxide (PEO), polylactic acid (PLA) and polymethyl metacrylate (PMMA) as the first polymer phase;
- 10 - polypropylene (PP) and polyamide 12 (PA12) as the second polymer phase;
- Carbon Nanotubes (CNT)

[0043] PCL, namely CAPA 6800 from Solvay, is a biodegradable polymer with a relatively low melting temperature of about 60°C. The polyethylene oxide was provided by Sima Aldrich, the grade name was PEO 181986. The PMMA used was VQ101S provided by Rhöm. PLA was the grade L-9000 commercialised by Biomer.

20 **[0044]** PP of the type H777-25R from DOW was chosen. PA12 was Grilamid L16E from EMS-Chemie. These PP and PA12 are spinning types and should lead to a good spinnability of the blends.

[0045] Composites of these polymers with various weight contents of carbon nanotubes (CNT) from Nanocyl were prepared with various weight fractions. Carbon nanotubes are multiwall carbon nanotubes with a diameter between 5 and 20 nm, preferably between 6 and 15 nm, and a specific surface area between 100 m²/g and 400 m²/g.

30 **[0046]** The production of the fibres was done in a two step process. In a first step, the carbon nanotubes were dispersed in the first polymer in a twin-screw compounding extruder. The obtained extrudates are then pelletized and dry blended with the second polymer.

[0047] The obtained dry blend was then fed in the hopper of a single screw extruder, feeding a spinning die as represented in fig. 1. The temperatures in the various zones corresponding to fig. 1 are summarised in table 2. The temperatures were fixed for a given second polymer phase.

First polymer	A	B	C	D	E	F	G
PP	180	190	200	210	230	230	230
PA12	180	185	190	195	200	200	200

Table 2: Temperatures in °C in the different extrusion zones corresponding to fig.1

10

The composition of the conductive polymer composites (CPC) prepared for further experiments are detailed in Table 3.

	polymer blend	polymer phase weight fraction : first polymer/ second polymer	CNT weight fractions in the first polymer phase in wt %
Sample 1	PCL/PP	80/20	3
Sample 2	PCL/PP	70/30	3
Sample 3	PCL/PP	60/40	3
Sample 4	PCL/PP	50/50	3
Sample 5	PCL/PA12	80/20	6
Sample 6	PCL/PA12	70/30	6
Sample 7	PCL/PA12	60/40	6
Sample 8	PCL/PA12	50/50	6
Sample 9	PMMA/PA12	50/50	2
Sample 10	PLA/PA12	50/50	2
Sample 11	PEO/PA12	50/50	3
Sample 12	PCL/PA12	50/50	3

Table 3: CPC compositions used in co-continuity and conductivity experiments.

15

[0048] A melt spinning machine (Spinboy I manufactured by Busschaert Engineering) was used to obtain the multifilament yarns. The multifilament yarns are covered with a spin finish, rolled up on two heated rolls with varying speeds (S1 and S2) to regulate the drawing ratio. The theoretical drawing of multifilament is given by the ratio $DR = S2/S1$. During the fibre spinning, the molten polymer containing nanotubes is forced through a die head with a rather low diameter (400 μm or 1.2 mm depending on the polymer) and through a series of filters. Several parameters were optimized during the process to obtain spinnable blends. These parameters were mainly the temperature of the heating zones, the speed of the volume metering pump and the roll speed.

15

Determination of PCL phase continuity by selective extraction

[0049] An extended study of the co-continuity of the PP/PCL and PA12/PCL blends has been performed. The selective extraction of one phase provides a good estimation of the co-continuity of a mixture. This is achieved by the dissolution of PCL into acetic acid, this solvent having no effect on PA12 and PP. If the mixture has a nodular structure, PCL inclusions will not be affected by the solvent, so they are not dissolved. The percentage of the PCL phase continuity is then deduced by weight loss measurement.

[0050] To remove PCL, fibres of each blend were immersed in acetic acid for 2 days at room temperature. The extracted strands were then rinsed in acetic acid and dried at 50°C to remove the acetic acid. After repeating the extraction process several times, the specimen weight converges toward a constant value.

[0051] The phase continuity was calculated using the ratio of the soluble PCL part to the initial PCL concentration in the blend, where the dissolvable PCL part is the weight difference of the sample before and after
5 extraction.

[0052] The PCL part in the blend is calculated using the following equation:

$$\% \text{ Continuity of PCL} = ((\text{Weight PCL}_{\text{initial}} - \text{Weight PCL}_{\text{final}}) / \text{Weight PCL}_{\text{initial}}) * 100\%$$

10 The results are represented in fig. 3. It can be seen in that figure that the continuity of PCL is reached around 40% PCL in PA12 and 30% PCL in PP.

Vapour sensing

15 [0053] In the so-called static mode of analysis, the desired amount of solvent molecules to analyse is introduced in a closed chamber. In saturated conditions the solvent is present in a liquid state in the bottom of the chamber. The vapour sensing behaviours of several samples
20 were investigated for toluene, styrene, trichloromethane, THF, water and methanol vapour. Electrical resistance measurements were performed with a Keithley multimeter 2000 at room temperature. Each sample was exposed to saturated organic vapours for 300 s and then moved into a dessicator
25 with dried air atmosphere. Those cycles were repeated three times. The resistance of the fibre was measured automatically every 10s. The relative amplitude was then defined as $(R - R_0) / R_0$, where R_0 is the initial resistance of the composite (i.e. when exposed to air atmosphere).

30 [0054] In the so-called dynamic mode, electrochemical properties of the composite fibres comprising CNTs were investigated by recording their electrical responses when submitted to 15 min of successive cycles of nitrogen and vapour streams. The dynamic system

consisting in mass flow controllers, solvent bubblers and electrical valves is controlled by the LabView software. Bubbling N₂ gas in liquid solvent provided a saturated vapour stream, which was in turn diluted by a second N₂ flow to the desired concentration at room temperature. The design of the device allows to keep constant the total flow rate Q_v (cm³.min⁻¹), while the analyte flow rate is adapted to investigate the effect of the analyte content. Electrical characteristics of the CPC transducer were recorded with a KEITHLEY 6517A multimeter. Samples were placed in a chamber of 9 cm × 3 cm × 3.5 cm.

[0055] The relative amplitudes obtained with the different samples and different solvents are represented in fig. 6 to 12. It can be seen in those figures that each particular first polymer phase has a specific sensitivity towards a particular solvent. For example, PLA shows a better sensitivity to styrene vapour and PEO shows a better sensitivity to methanol vapour. Those differences can advantageously be used in vapour sensing devices comprising several sensing fibres for improving the selectivity of the devices towards particular chemicals.

CLAIMS

1. Method for detecting at least one chemical analyte vapour in a gaseous environment comprising the steps of:

- 5 - providing a fibre-based electrochemical sensor, said fibre-based sensor comprising at least one type of composite fibres, said type of composite fibres comprising a co-continuous phase blend comprising a first and a second continuous polymer phase, the first polymer
10 phase being sensitive to the chemical analyte vapour to be detected in use, wherein said first polymer phase comprises a dispersion of carbon nanotubes at a concentration above the percolation threshold and wherein the chemical analyte is soluble in said first polymer phase;
- 15 - measuring the initial electrical conductivity of the fibre-based sensor;
- bringing said fibre-based sensor into contact with at least one chemical analyte to induce a modification of the electrical conductivity of the fibres;
- 20 - measuring the modification of the resulting electrical conductivity of said fibre-based sensor and correlating said modification with the concentration of the chemical analyte to be detected.

2. Method according to claim 1, wherein
25 the Flory-Huggins interaction parameter between the chemical analyte and the first polymer phase is smaller than $5,64 \text{ [J}^{1/2} \text{ cm}^{-3/2}]$.

3. Method according to claim 1 or 2, wherein said carbon nanotubes are multiwall carbon
30 nanotubes with a specific surface area between 100 and 400 m^2/g .

4. Method according to claim 1, 2 or 3, wherein said first polymer phase is selected from the group

consisting of polycaprolactone, polylactic acid, polyethylene oxide and polymethyl metacrylate.

5 5. Method according to any of the previous claims, wherein said at least one chemical analyte is selected from the group consisting of aromatic solvents, preferably styrene and toluene.

10 6. Method according to any of the previous claims, wherein said at least one chemical analyte is selected from the group consisting of alcohols, preferably methanol.

7. Method according to any of the previous claims, wherein said at least one chemical analyte is selected from the group consisting of chlorinated solvents, preferably trichloromethane.

15 8. Method according to any of the previous claims, wherein said second polymer phase is a polyolefin, preferably polyethylene or polypropylene.

9. Method according to any of the previous claims, wherein said second polymer phase is polyamide.

20 10. Method according to any of the previous claims, wherein the first polymer phase is polycaprolactone, for the detection of tetrahydrofuran.

25 11. Method according to any of the previous claims, wherein the first polymer phase is polylactic acid for the detection of Styrene.

12. Method according to any of the previous claims, wherein the first polymer phase is polyethylene oxide for the detection of methanol.

30 13. Method according to any of the previous claims, wherein the first polymer phase is polymethyl metacrylate for the detection of trichloromethane.

14. Method according to any of the previous claims, wherein several different fibre-based electrochemical sensors are provided.

15. Method according to any previous claims, wherein the viscosity ratio between the first and second polymer phases is comprised between 0,67 and 1,5.

16. Method according to any previous
5 claims, wherein the viscosity ratio between the first and second polymer phases is comprised between 0,8 and 1,2.

17. Method according to any of previous claims, wherein the co-continuous phase blend further comprises a compatibiliser.

10 18. Method according to claim 17, wherein the compatibiliser is selected from the group consisting of maleic anhydride grafted polyolefin, ionnomers and copolymers.

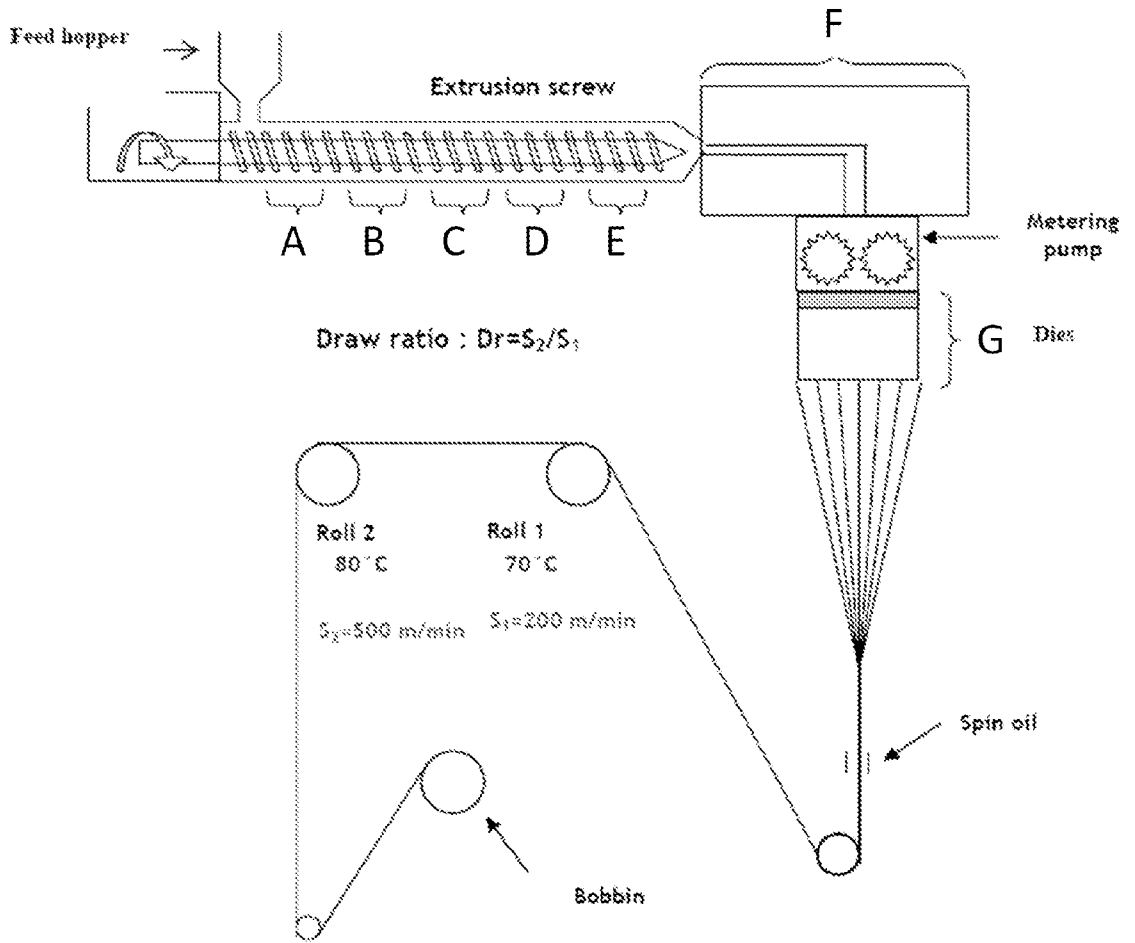


Figure 1

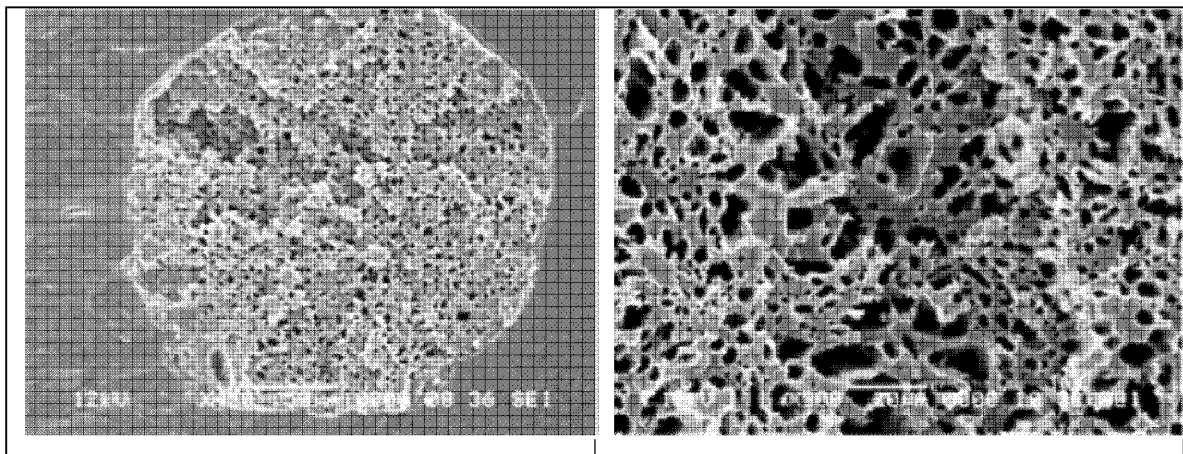


Figure 2

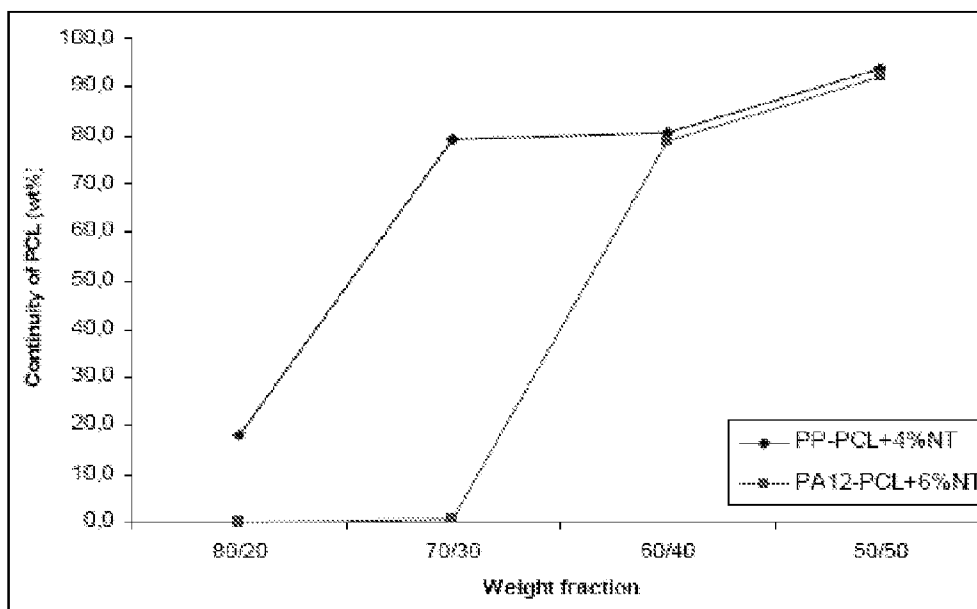


Figure 3

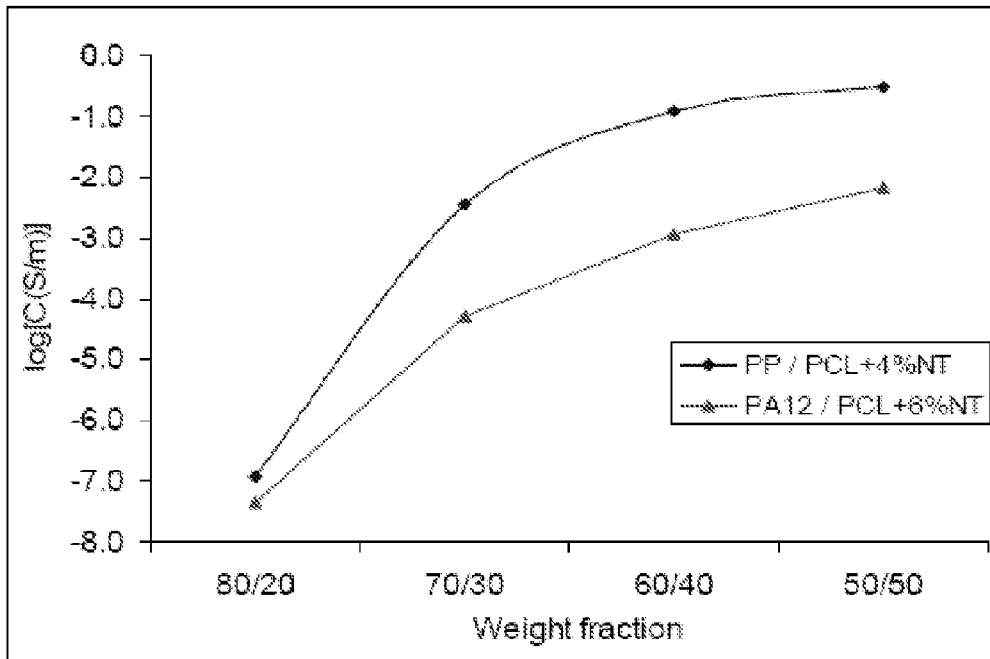


Figure 4

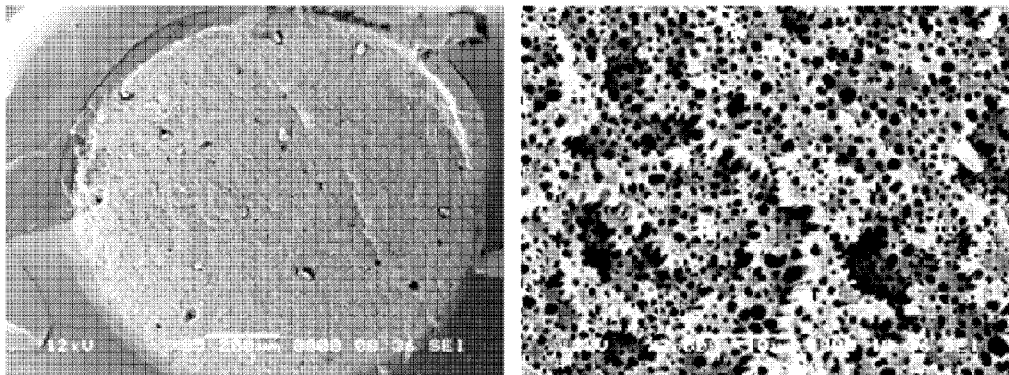


Figure 5

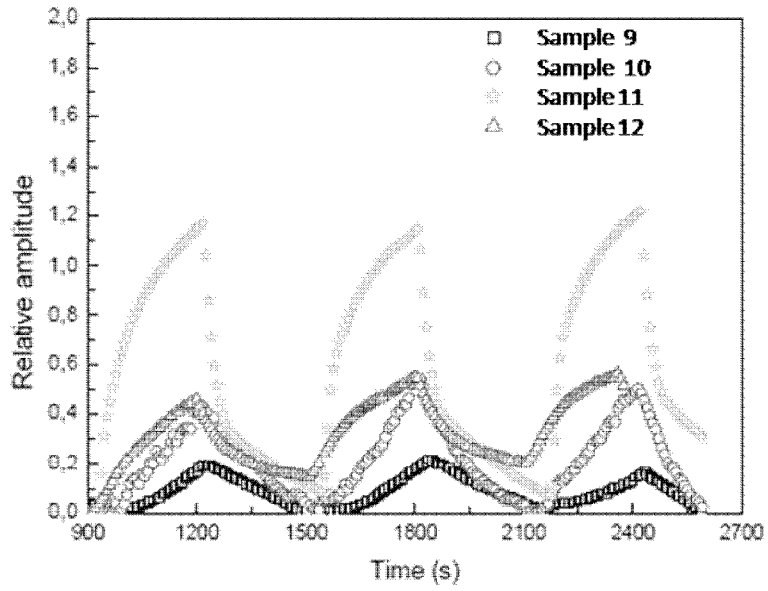


Figure 6

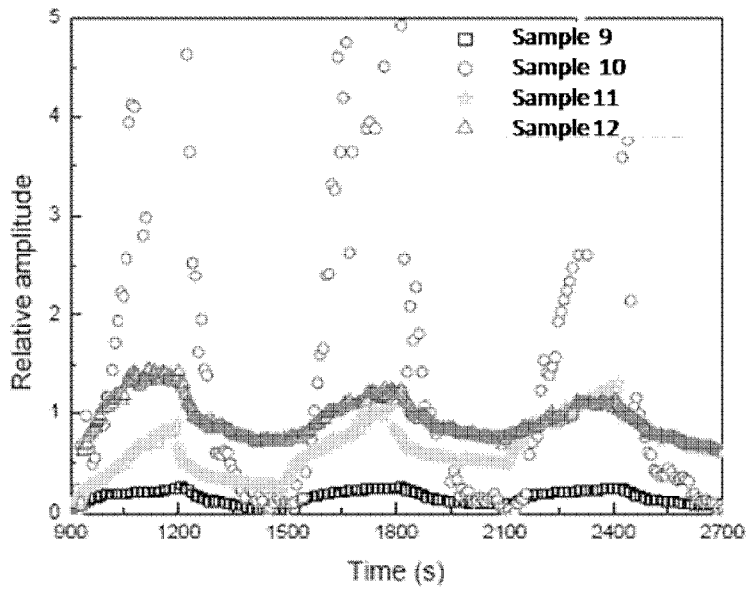


Figure 7

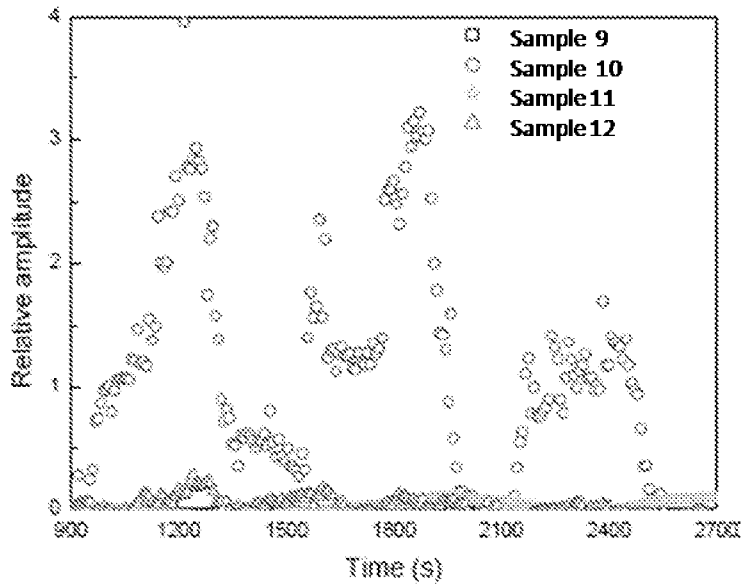


Figure 8

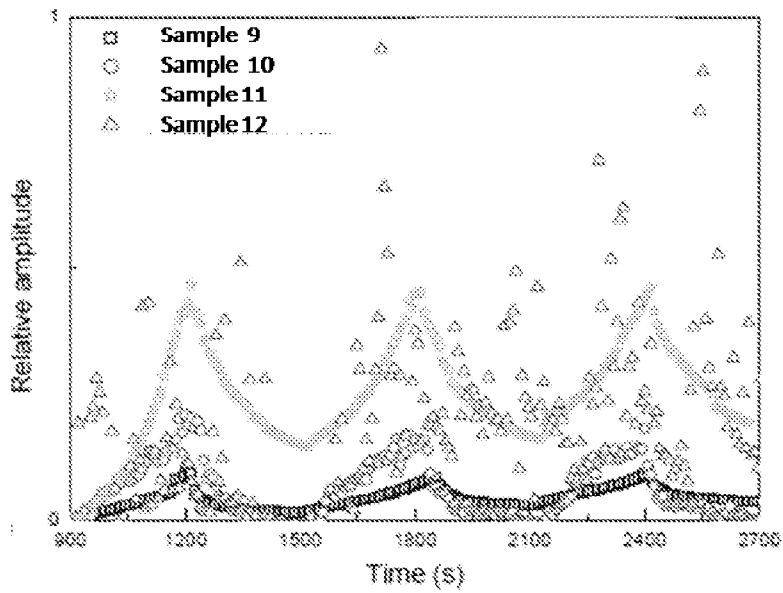


Figure 9

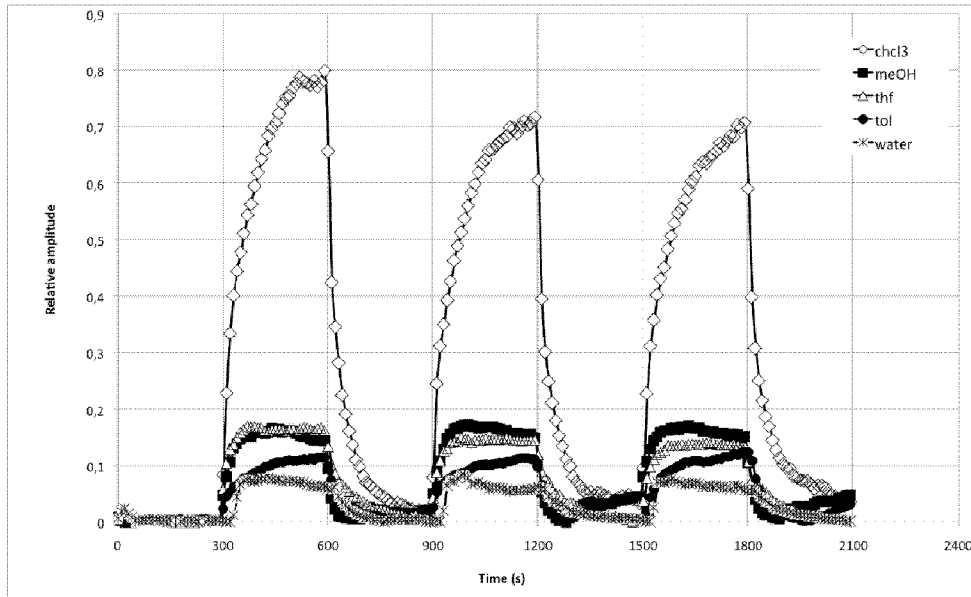


Figure 10

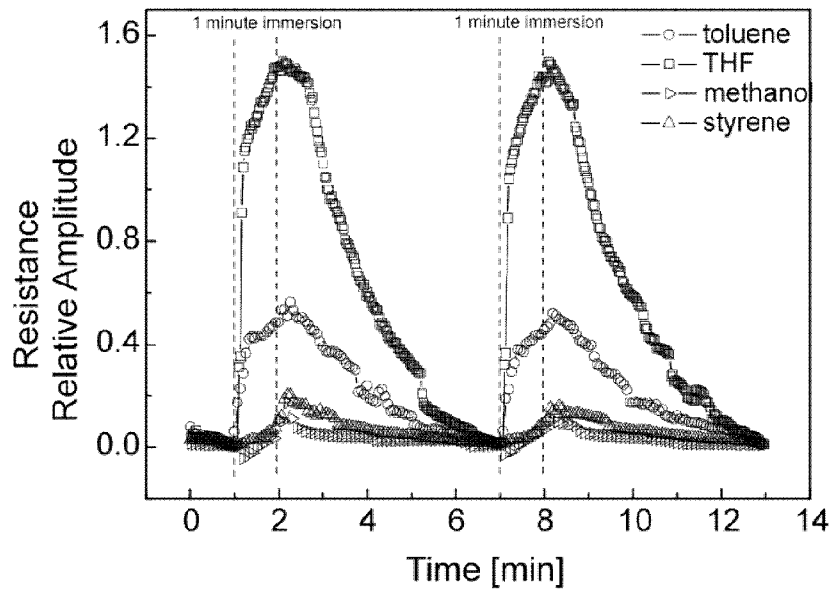


Figure 11

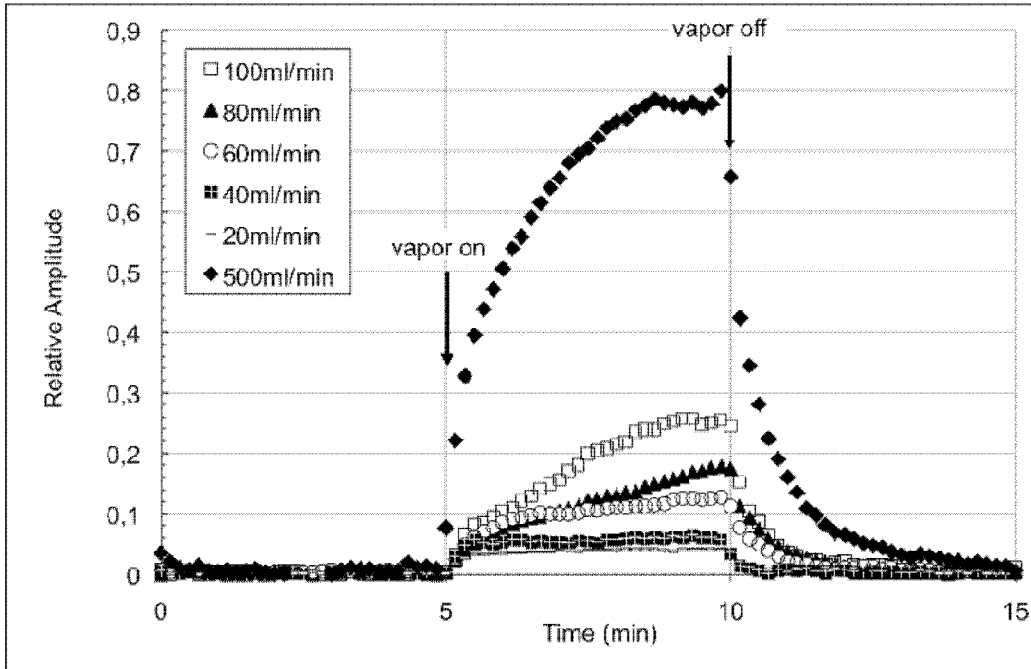


Figure 12

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/066169

A. CLASSIFICATION OF SUBJECT MATTER INV. G01N33/00 G01N27/12 ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) G01N		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, COMPENDEX, INSPEC		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	LU J ET AL: "Thermo- and chemo-electrical behaviour of carbon nanotube filled co-continuous conductive polymer nanocomposites (CPC) to develop amperometric sensors", MATERIALS RESEARCH SOCIETY SYMPOSIUM PROCEEDINGS, US, vol. 1143, 1 December 2008 (2008-12-01), pages 53-58, XP009133196, ISSN: 0272-9172 page 53, paragraph 2 - page 55, paragraph 1 page 56, paragraph 3 - page 57, paragraph 2; figure 5 ----- -/--	1-18
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.		
<input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family	
Date of the actual completion of the international search	Date of mailing of the international search report	
11 January 2011	20/01/2011	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Lazar, Zala	

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/066169

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2009/101501 A1 (TAO XIAO-MING [CN] ET AL) 23 April 2009 (2009-04-23) * abstract paragraphs [0023] - [0025], [0027]; figure 1; examples 1-6 -----	1-5, 8, 9, 15-18
Y	US 6 315 956 B1 (FOULGER STEPHEN H [US]) 13 November 2001 (2001-11-13) * abstract column 9, line 24 - column 11, line 67; figures 1-2; examples 1-4 column 1, lines 56-66 -----	14
Y	WO 2008/109968 A2 (NANOCYL S A [BE]; UNIV BRETAGNE SUD [FR]; FELLER JEAN-FRANCOIS [FR]; C) 18 September 2008 (2008-09-18) paragraphs [0015] - [0017], [0025], [0027], [0029] - [0031], [0033] - [0034]; figures 1-2, 5-6, 8; tables 1, 2 -----	6, 7, 10-13
A	EP 1 803 763 A1 (UNIV RICE WILLIAM M [US]) 4 July 2007 (2007-07-04) paragraphs [0011] - [0012] -----	1-16
A	US 2005/000830 A1 (GLATKOWSKI PAUL J [US] ET AL GLATKOWSKI PAUL J [US] ET AL) 6 January 2005 (2005-01-06) paragraphs [0032], [0052] -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2010/066169

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2009101501	A1	23-04-2009	NONE	
US 6315956	B1	13-11-2001	CA 2300722 A1	16-09-2000
WO 2008109968	A2	18-09-2008	NONE	
EP 1803763	A1	04-07-2007	EP 1818358 A1	15-08-2007
US 2005000830	A1	06-01-2005	NONE	