




(86) Date de dépôt PCT/PCT Filing Date: 2000/12/04
(87) Date publication PCT/PCT Publication Date: 2001/06/07
(45) Date de délivrance/Issue Date: 2010/09/21
(85) Entrée phase nationale/National Entry: 2002/06/03
(86) N° demande PCT/PCT Application No.: SE 2000/002429
(87) N° publication PCT/PCT Publication No.: 2001/040727
(30) Priorité/Priority: 1999/12/03 (SE9904433-1)

(51) Cl.Int./Int.Cl. *F26B 5/06* (2006.01),
C05F 17/00 (2006.01)
(72) Inventeur/Inventor:
WIIGH-MASAK, SUSANNE, SE
(73) Propriétaire/Owner:
PROMESSA AB, SE
(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROCEDE DE DEGRADATION
(54) Title: METHOD AT MOULDERING

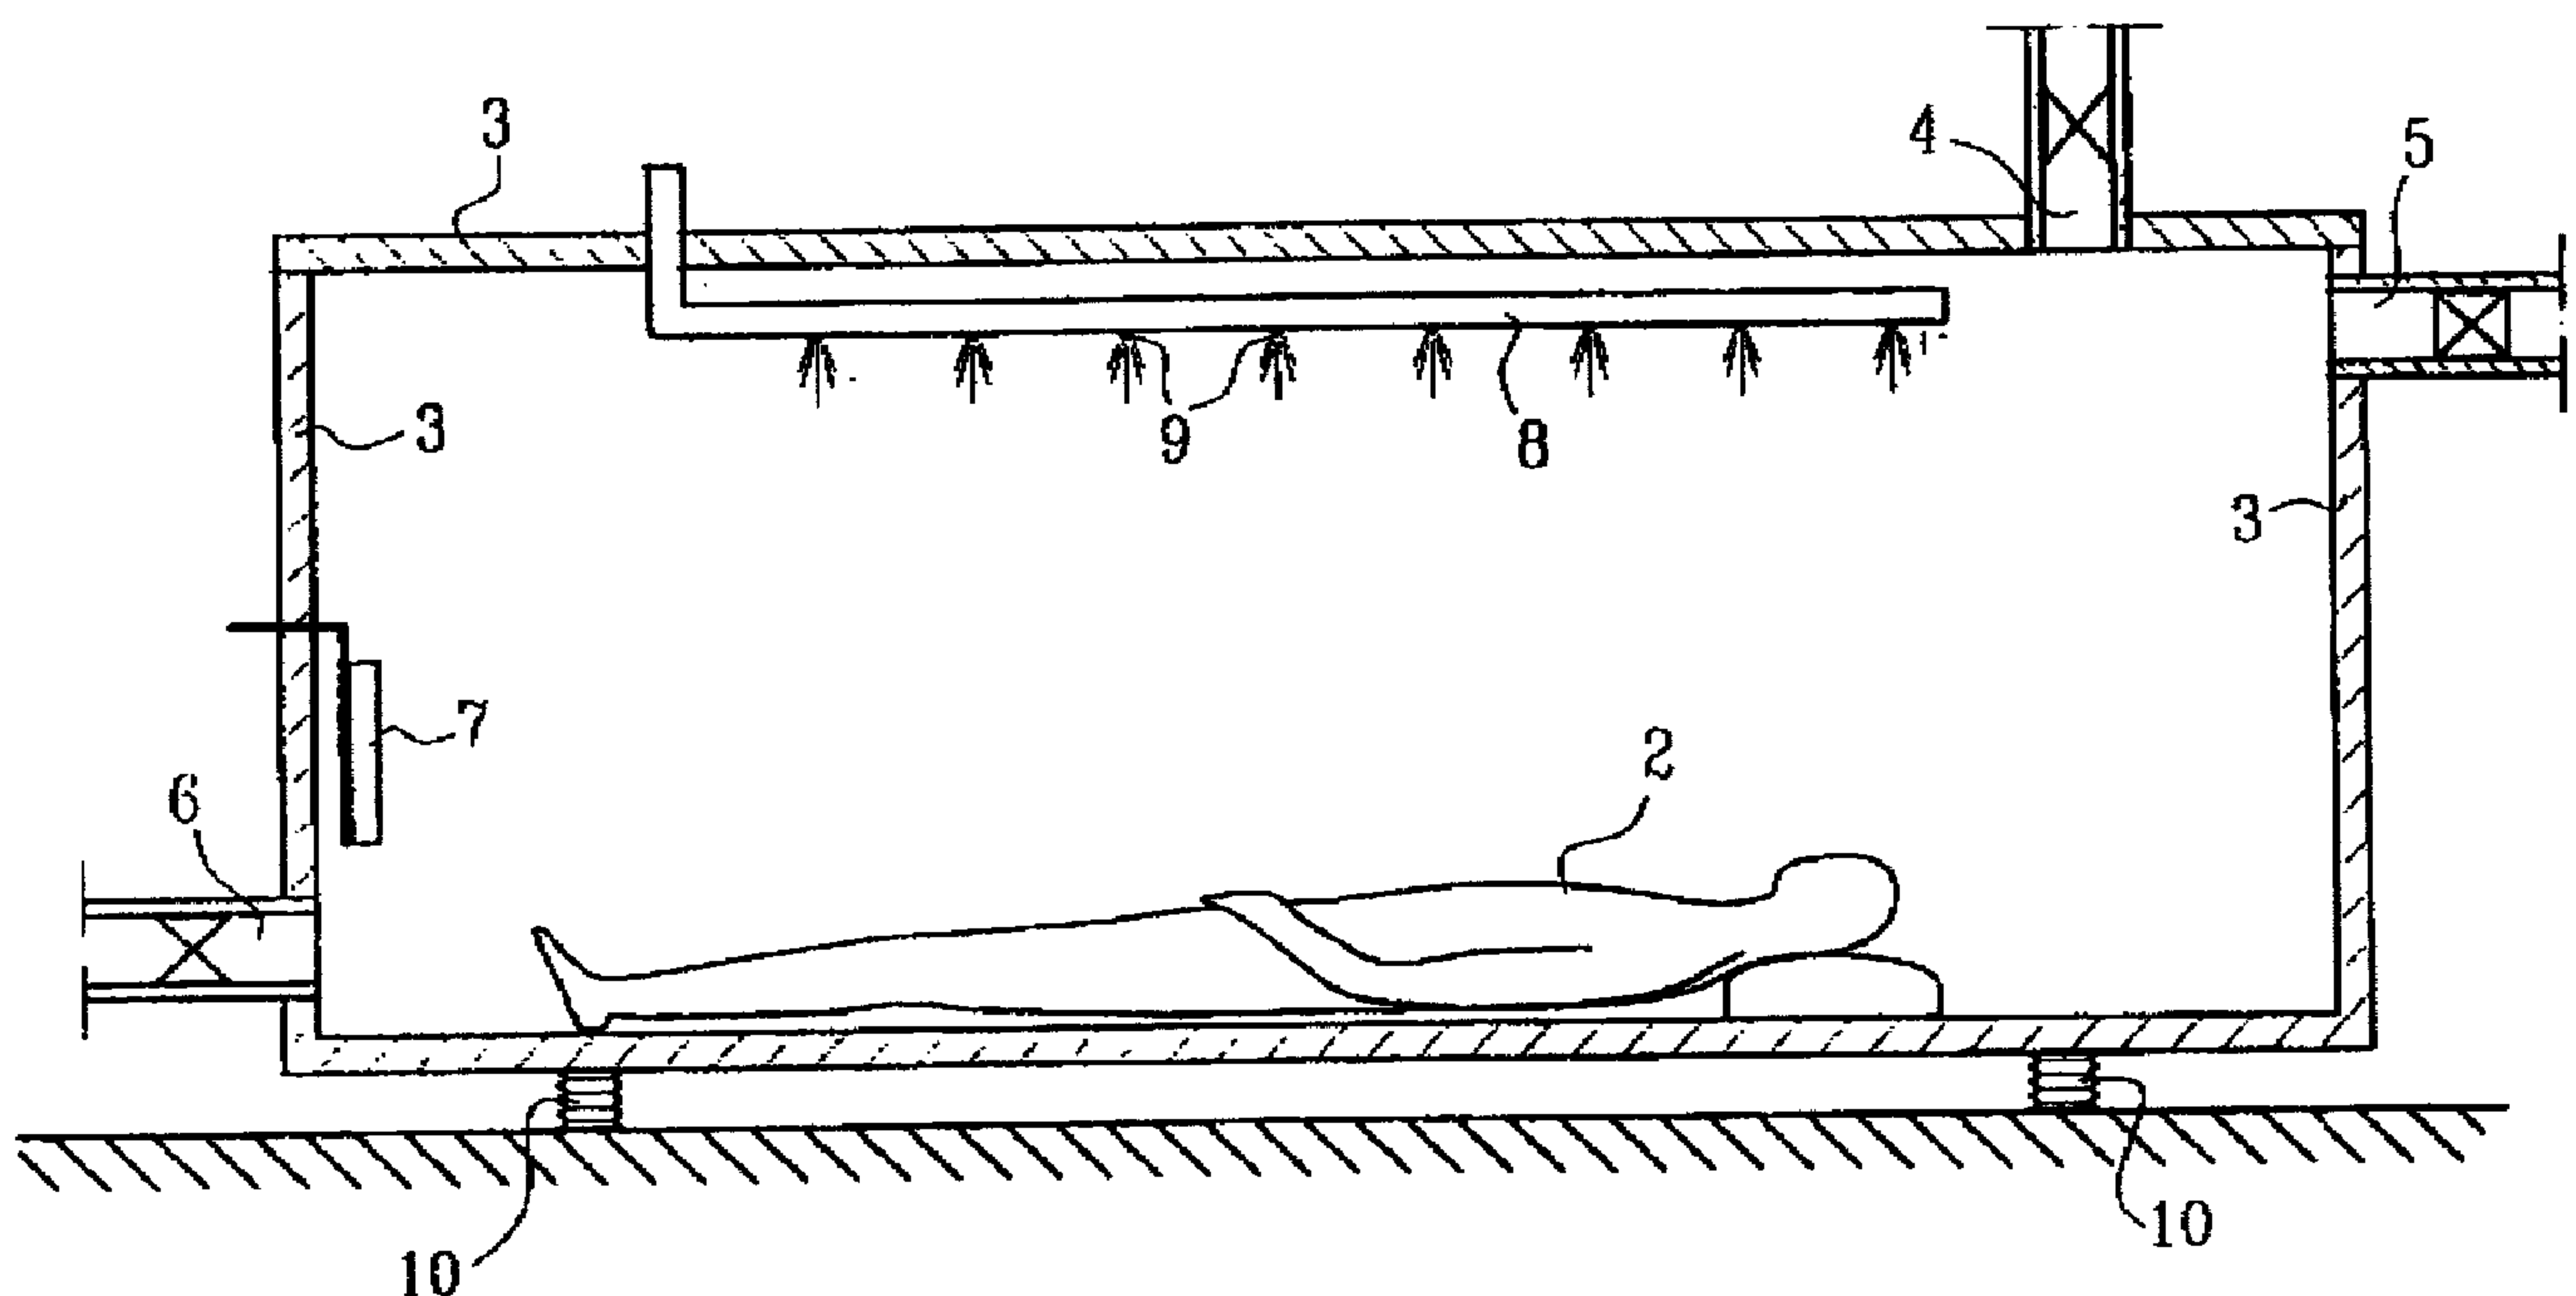

(57) Abrégé/Abstract:

The invention relates to a method for treating organic material before decay or freeze drying. In the method, organic material, preferably refrigerated or frozen, is subjected to a splitting treatment. Subsequently, the material is freeze dried. Next, the material is deposited for decay. The invention also relates to a decayable container, as well as an apparatus for performing the disclosed method.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 June 2001 (07.06.2001)

PCT

(10) International Publication Number
WO 01/40727 A1

(51) International Patent Classification⁷: **F26B 5/06**,
A01N 1/00

(21) International Application Number: PCT/SE00/02429

(22) International Filing Date: 4 December 2000 (04.12.2000)

(25) Filing Language: Swedish

(26) Publication Language: English

(30) Priority Data:
9904433-1 3 December 1999 (03.12.1999) SE

(71) Applicant and

(72) Inventor: **WIIGH-MÄSAK, Susanne** [SE/SE]; Barkedal
7747, S-474 96 Nösund (SE).

(74) Agent: **GÖTEBORGS PATENTBYRÅ DAHLS AB**;
Sjöporten 4, S-417 64 Göteborg (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AT
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AT MOULDERING

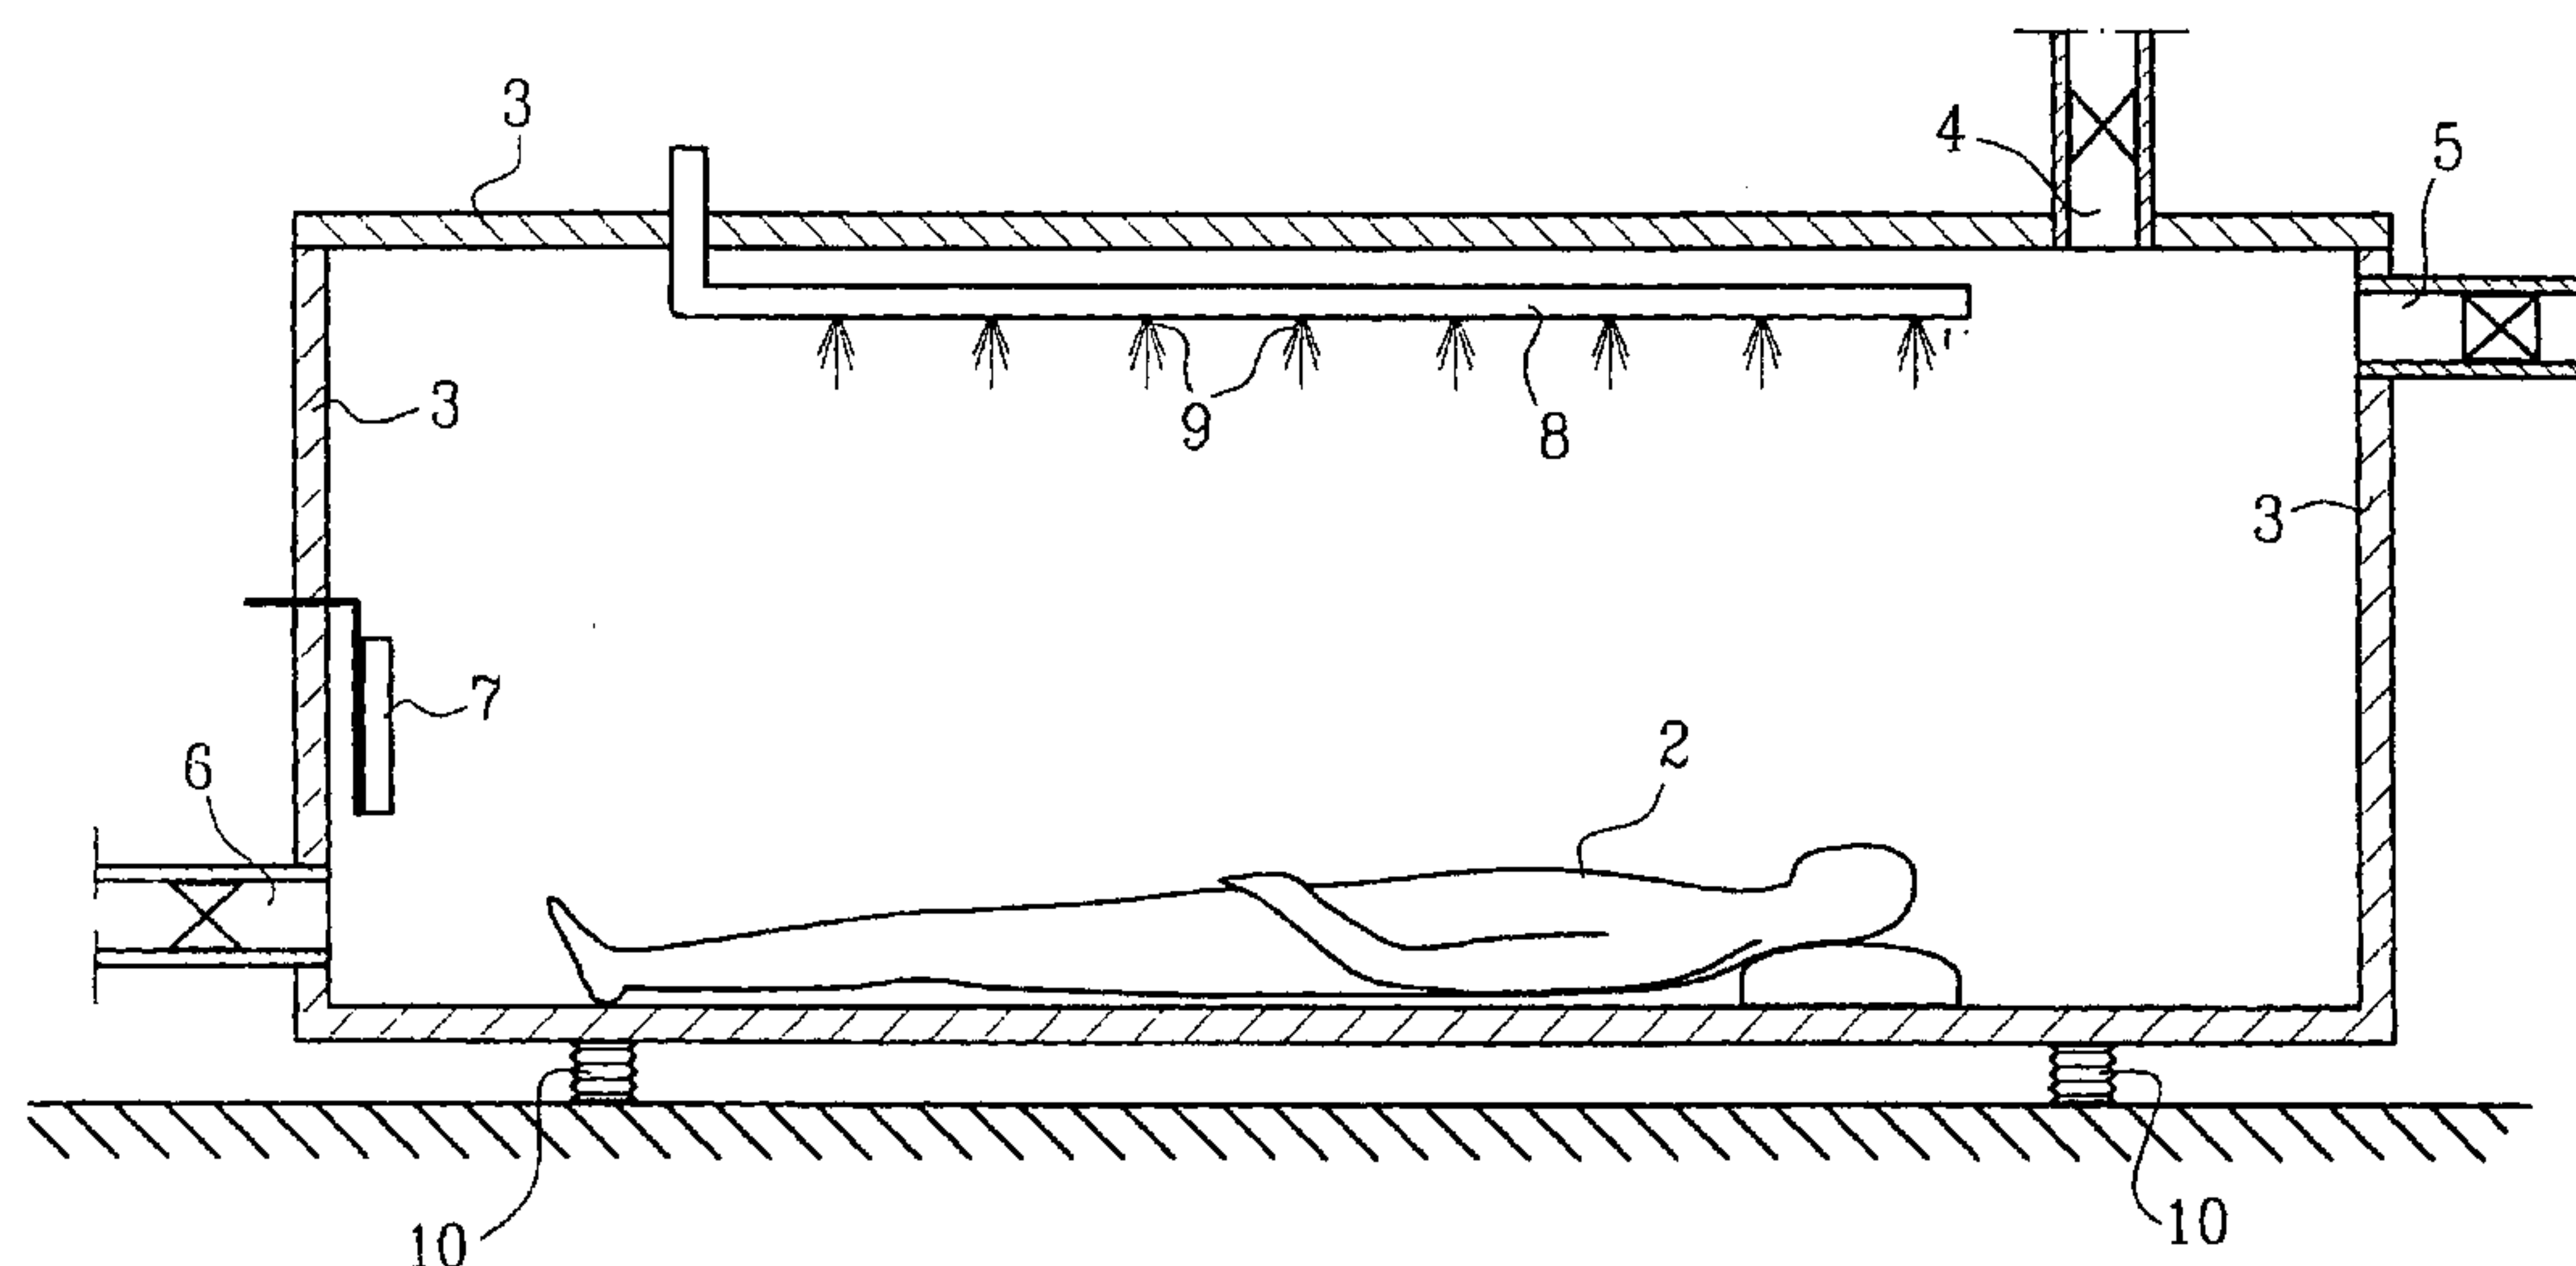

(57) Abstract: The invention relates to a method for treating organic material before decay or freeze drying. In the method, organic material, preferably refrigerated or frozen, is subjected to a splitting treatment. Subsequently, the material is freeze dried. Next, the material is deposited for decay. The invention also relates to a decayable container, as well as an apparatus for performing the disclosed method.

WO 01/40727 A1

WO 01/40727

PCT/SE00/02429

1

TITLE

METHOD AT MOULDERING

5 DESCRIPTION

Technical field

The present invention relates to a method for treating organic matter to mouldering after freeze drying.

10 The object of the present invention is to obtain a method for pretreating organic matter for a mouldering process.

A further object is to obtain a package of such pretreated organic matter which package can be mouldered.

15

Background of the invention

Organic matter can be treated in different ways to be able to be used as a nutritional source. At a common compost organic matter, often so called garden sewage, or kitchen sewage, is brought into a compost vessel and in the presence of oxygen different micro
20 organisms, wood-louses, worms and other small animals can decompose to a nutritionally rich soil, so that plants can utilize the nutritional contents of the material, once again.

As mentioned such mouldering shall be carried out while adding oxygen, which means
25 that a compost should not have any content more than about 25 cm from an airing surface. In a well functioning compost there is no rotting taking place but the leaving gas is steam and carbon dioxide, as well as possibly some nitrogen gas. The temperature of a normal compost is about 30-35°C which provides for an optimal mouldering. During winter time, however, the temperature falls whereby the process rate decreases but still
30 there is a mouldering taking place.

So called hot-compost means that the compost works at a very elevated temperature, 60-

WO 01/40727

PCT/SE00/02429

2

70°C and means that it is not a pure mouldering process as worms, wood-louses and a great part of the micro organisms do not feel comfortable at such temperatures, but the decomposition takes place via heat resistant micro organisms only. The decomposition is moreover slow and takes place during rotting producing gases which smell badly.

5

Composting of house-hold waste may also contribute to drawbacks in the form of rats and mice which are tempted to the compost if the mouldering does not take place fast enough. The greatest problem occurs of course when more complex structures shall be composted such a slaughter and hunting wastes.

10

At soil burials of a human body the body is placed at a depth of 180-200 cm at which depth, however, no mouldering takes place, in the absence of oxygen, but rather a rotting takes place under the influence of sulphur producing micro organisms. The rotten body will float away in the form of a liquid from the grave cavity. The soil, plants

15

will not be able to assimilate the nutritional content of the organic part of the body.

The reason why humans are buried at large depths goes several hundreds of years back in time and was of course a way to stop animals from digging up the body after a burial.

20

At cremation the body is burned at a high temperature and the remains consist of mineral rich ashes which can be deposited in a urn, or often today, is spread in a memorial park. When the ashes are spread in a memorial park the ashes will solubilize at rain falls or other type of down falls and the mineral salt solution obtained will flow away and penetrate into the deeper soil layers without being able to be assimilated by the surrounding ground vegetation. From an environmental point of view cremation should not be recommended either as on one hand gaseous mercury leaves teeth fillings, on the other hand the burning will contribute to the green house effect by releasing great amounts of carbon dioxide.

25

30

Any efficient way of burying a human body in so that the remains moulder and the nutritional contents of the organic matter can be assimilated by the ground vegetation does not exist today.

WO 01/40727

PCT/SE00/02429

3

However, there is a belief that we shall return to earth, which is reflected in the expression "Earth to earth, ashes to ashes, dust to dust" of the burial ceremony, which provides the basis for all our life philosophy. Facts show, however, that we do not return to earth but flow away in liquid state.

5

This life philosophic belief can not be fulfilled using the high degree of embalming of death persons, in particular in the larger cities, where burial capacity is small due to a preference for carrying out funerals under a few of the days of the week, only.

Embalming means that great amounts of preserving formaldehyde is pumped into the
10 body and replaces blood and other body liquids. The formaldehyde as such means that a correct mouldering will not take place.

The body should be stored chilled or frozen until the burial event.

15 US-A-4,067,091 discloses a process for freeze drying a human body to prepare it for an earth burial, and where the object is to provide a moulderable remain. The process is carried out by deep freezing the body, to treat the body at a temperature of below -100°C, to mechanically disintegrate the body into particulate form using e.g., a hammer mill, to freeze dry the particles for removing 95% of the water content and to depose the remains
20 of the freeze drying. Disintegration of a human body in this way prior to freeze drying is, however, not ethically defensible.

DE-A-3,842,341 discloses a process for dewatering animal carcasses and/or chicken eggs by means of freeze drying at temperatures between -15 and -30°C and a pressure of
25 between 1×10^2 and 3×10^2 Pa, optionally after a disintegration at a temperature of 15-25°C. The freeze dried mass can then be stored at room temperature, be burned or be used as a fertilizer.

Thus there is a request for being able to treat organic matter, such as material of
30 vegetabilic and of animal origin so that it can be mouldered in a natural way, as well as in an ethically correct way, when so requested.

WO 01/40727

PCT/SE00/02429

4

Description of the present invention

It has now turned out possible to be able to solve this problem by means of the present invention which is characterized in that organic material, preferably a chilled condition, more preferably in a frozen state, is subjected to a splitting process and is then subjected
5 to a freeze drying process prior to being transferred for deposition for mouldering.

Further characteristics are evident from the accompanying claims.

The term splitting process means here that the body is subjected to a perforation process
10 in accordance with below, or is subjected to such a rapid and large freezing that the tissue structure does no longer stick together but exhibits fractures. Such freezing can be carried out using liquid nitrogen having a boiling point of about -190°C . The splitting process thus does not mean a fragmentation into a particulate form but only that the tissue structure exhibits channels or fractures through which water can sublime in a simple
15 way.

By means of the present invention it is achieved that a rapid freeze drying can take place using reasonable amounts of energy. Calculations made shows that burning requires at least the same or a larger input of energy, to obtain mineral ashes.

20

Perforation of the organic matter, primarily then the animal material can be carried out using water jets of high pressure, preferably airless jets, i.e., without any addition of air, a high pressure steam or a high energy laser. A vegetabilic oil under high pressure can also replace the water in the foregoing.

25

Perforation shall be carried out using such density and from such directions that one preferably forms cubic elements having the side 1 to 2 cm. What is meant is that the perforating jets forms one or more side edges at such a cube prior to freeze drying. This means further that a perforation takes place from at least two sides, suitably arranged
30 substantially perpendicular to each other. Primarily, the perforation further takes place along the body to perforate the large connecting tissue structures of the body.

WO 01/40727

PCT/SE00/02429

5

When the freeze drying has been carried out, the material thus dried is subjected to a light falling down chock/knock so it collapses, whereupon it can be gathered and placed in a suitable container.

- 5 A suitable container for deposition for further mouldering can be a moulderable board or container made of peat which can be placed at a depth of about 25 cm underneath the ground surface where mouldering under aerobic conditions will take place.

- If one relates to a burial in soil of a deceased, freeze dried person one may, e.g.,
10 simultaneously plant a memorial tree close to the burial site, whereby the planted plant will assimilate the mouldering residues.

The invention will be described in the following more in detail with reference to the accompanying drawing, wherein

- 15 FIG. 1 shows a schematic side view of a device for freeze drying of a person where the device comprises a larger vessel 1 having room for a dead body 2 and having surrounding walls and lid/roof 3 to be able to completely enclose the body 2 in liquid nitrogen. The walls 3, in this example, comprises elements for receiving sublimated water, i.e., chilled contact surfaces. The lid 3 of the device 1, which in this embodiment
20 further serves as an introduction opening, is provided with a connecting line 4 to a vacuum source (not shown) in able to bring the whole device under vacuum. Further, the vessel 1 is provided with inlet and outlet lines 5, 6 for liquid nitrogen. Optionally, a ultra sonic probe 7 is placed into the vessel in order to be able to transfer an ultra sound to the content of liquid nitrogen and the organic matter submersed therein, thereby to be able to
25 speed up the sublimation of water. The device may also comprise a vessel 1 which is a channel vessel with a device for continuous in and out transport of organic material, in order to be able to obtain a continuous freeze drying of organic material.

- To the lid 3 there is further arranged a series of high pressure lines 8 having nozzles 9 for
30 being able to carry out a perforation of a body 2 introduced into the vessel 1, using high pressure steam.

WO 01/40727

PCT/SE00/02429

6

Underneath the vessel 1 feet 10, which can be vibrated, are arranged. These are arranged to obtain a shake chock of the material having been treated after freeze drying so that the material collapses and can be collected in a simple way for further packing in a moulderable container (not shown).

5

A pre-preparing treatment of the material to be freeze dried, either it consists of a dead human body, slaughter waste or a common kitchen waste means that one cools/freezes down the material to -70°C whereupon the material is subjected to a perforating treatment after a predetermined density and pattern using high pressure steam. Then the material is submersed into liquid nitrogen, -190°C , whereby its content of water is allowed to sublime to a condensing surface, optionally via a passage in a warmer stream of air having greater ability of carrying moisture.

10

In order to support the sublimation the material can be subjected to either subpressure in the size of $1 \times 10^2 - 1 \times 10^3$ Pa and/or be subjected to ultra sound treatment.

15

When the calculated amount of water has been removed which is simple determined by controlling the amount of water condensed, the material is subjected to a shake chock, whereby the material collapses and can be collected.

20

TEST

Drying has been performed on beef and pork meat as well as pork fat and pork legs. The drying was carried out in a conventional laboratory freeze drier at -50°C and by using a vacuum of 1×10^2 Pa. Parallel hereto fat concentration and water content was determined by a chemical laboratory and the drying resulted in that all water having been registered as water content at the laboratory test was found eliminated. The residual amount of water was less than 1% in most samples.

25

Treatment using submersing in liquid nitrogen resulted in formation of fractures in both bone and muscle tissue. Such formation of fractures did not exist in samples having been cooled to -80°C . This indicates that the spontaneous splitting of the meat is facilitated by the extremely rapid cooling as the treatment using liquid nitrogen means. If perforation

30

WO 01/40727

PCT/SE00/02429

7

has started the process and optionally been supported by an ultra sound treatment the spontaneous splitting is further facilitated. It is extremely important from an ethical point of view and the dominant reason that the present process differs from what has been known from US-A- 4,067,091.

5

In total 10 different tests were carried out of which four are shown here and which can be regarded most typical to the result obtained.

Table

10	Chem. Lab analysis		Drying result		
	<u>Fat content</u>	<u>Water content</u>	<u>Original</u>	<u>Dried</u>	<u>Water dried off</u>
	(%)	(%)	weight (g)	weight (g)	(%)
	1. 22,97	59,58	61,190	24,462	60,02
	2. 22,35	59,78	167,767	68,483	59,20
15	3. 33,91	51,97	38,642	18,580	51,90
	4. 31,95	52,72	142,125	67,975	52,17

As evident from the Table above an almost complete dewatering of the material was obtained. The material was perforated to 1-2 x 1-2 x 1-2 cm large cubes.

20

The material so freeze dried to be mouldered is collected in a moulderable container, such as compressed peat, paper, cardboard, board or the similar and is placed in a suitable site in soil and at a depth of up to 25 cm. In connection with a rehydratization and influence by micro organisms, insects, worms, and small animals the material is

25 odourless mouldered to compost soil having a high nutritional value, which can be assimilated by nearby vegetation.

30

Optionally, as the freeze dried material is light hygroscopic the container can suitably be provided with a water tight layer, such as an easily decomposable starch polymer, so called corn plastic, which forms an effective water barrier when the product is stored above ground.

WO 01/40727

PCT/SE00/02429

8

An organic material which is very rapidly decomposed under simultaneous production of odour, is fish and shellfish wastes and these are very suitable for the present treatment, as well, where the water content can be lowered to some percent and the material can then be composted, optionally after a preceding packing in a moulderable container.

5

CLAIMS

1. Method for treating organic matter to mouldering after freeze drying, characterized in that organic material, in a frozen state, is subjected to a splitting process, whereby the splitting process is in the form of a perforating treatment by means of high pressure water jets, high pressure steam, high energy laser or a vegetabilic oil under high pressure, and the organic material is then subjected to a freeze drying process prior to being transferred for deposition for mouldering.
2. Method according to claim 1, characterized in that the perforation takes place from at least two sides, suitably arranged perpendicular to each other.
3. Method according to claim 1, characterized in that the material is subjected to a splitting operation by means of deep freezing to -190°C in liquid nitrogen.
4. Method according to any one of claims 1 - 3, characterized in that freeze drying is carried out during simultaneous influence of ultra sound.
5. Method according to any one of claims 1 - 3, characterized in that freeze drying is carried out during simultaneous influence of vacuum.
6. Method according to any one of claims 1 - 5, characterized in that the material is slaughter waste.
7. Method according to any one of claims 1 - 5, characterized in that the material is household/kitchen waste.
8. Method according to any one of claims 1 - 5, characterized in that the material is fish and/or shell fish waste.
9. Method according to any one of claims 1 - 8, wherein any freeze dried organic material is subjected to a light falling down chock/knock so it collapses, whereupon it can be gathered and placed in a suitable container.

10. Method according to any one of claims 1 – 5, wherein the organic material in form of body remains is placed at a depth of about 25 cm underneath a ground surface where mouldering under aerobic conditions will take place.
11. A device for carrying out the method according to any one of claims 1 - 10,
5 characterized in that the device comprises a closed vessel (1) provided with an inlet opening for an organic material, inlet and outlet (5, 6) for liquid nitrogen as well as a connection (4) to a vacuum source, a device (8, 9) for carrying out a splitting by means of high pressure water jets, high pressure steam, high energy laser or a vegetabilic oil under high pressure.
- 10 12. Device according to claim 11, characterized in that the device further comprises an ultra sound probe (7).
13. Device in accordance with any one of claims 11 - 12, characterized in that the vessel (1) consists of a tunnel vessel for a continuous in and out transport of organic material.
- 15 14. Device in accordance with any one of claims 11 - 13, characterized in that the device further comprises vibrating means (10) for obtaining a shake chock on an organic material after a freeze drying present in the device.
15. Method according to any one of claims 1 – 10, in which the high pressure water jets are airless.
- 20 16. Device according to any one of claims 11 – 14, in which the high pressure water jets are airless.

WO 01/40727

PCT/SE00/02429

1/1

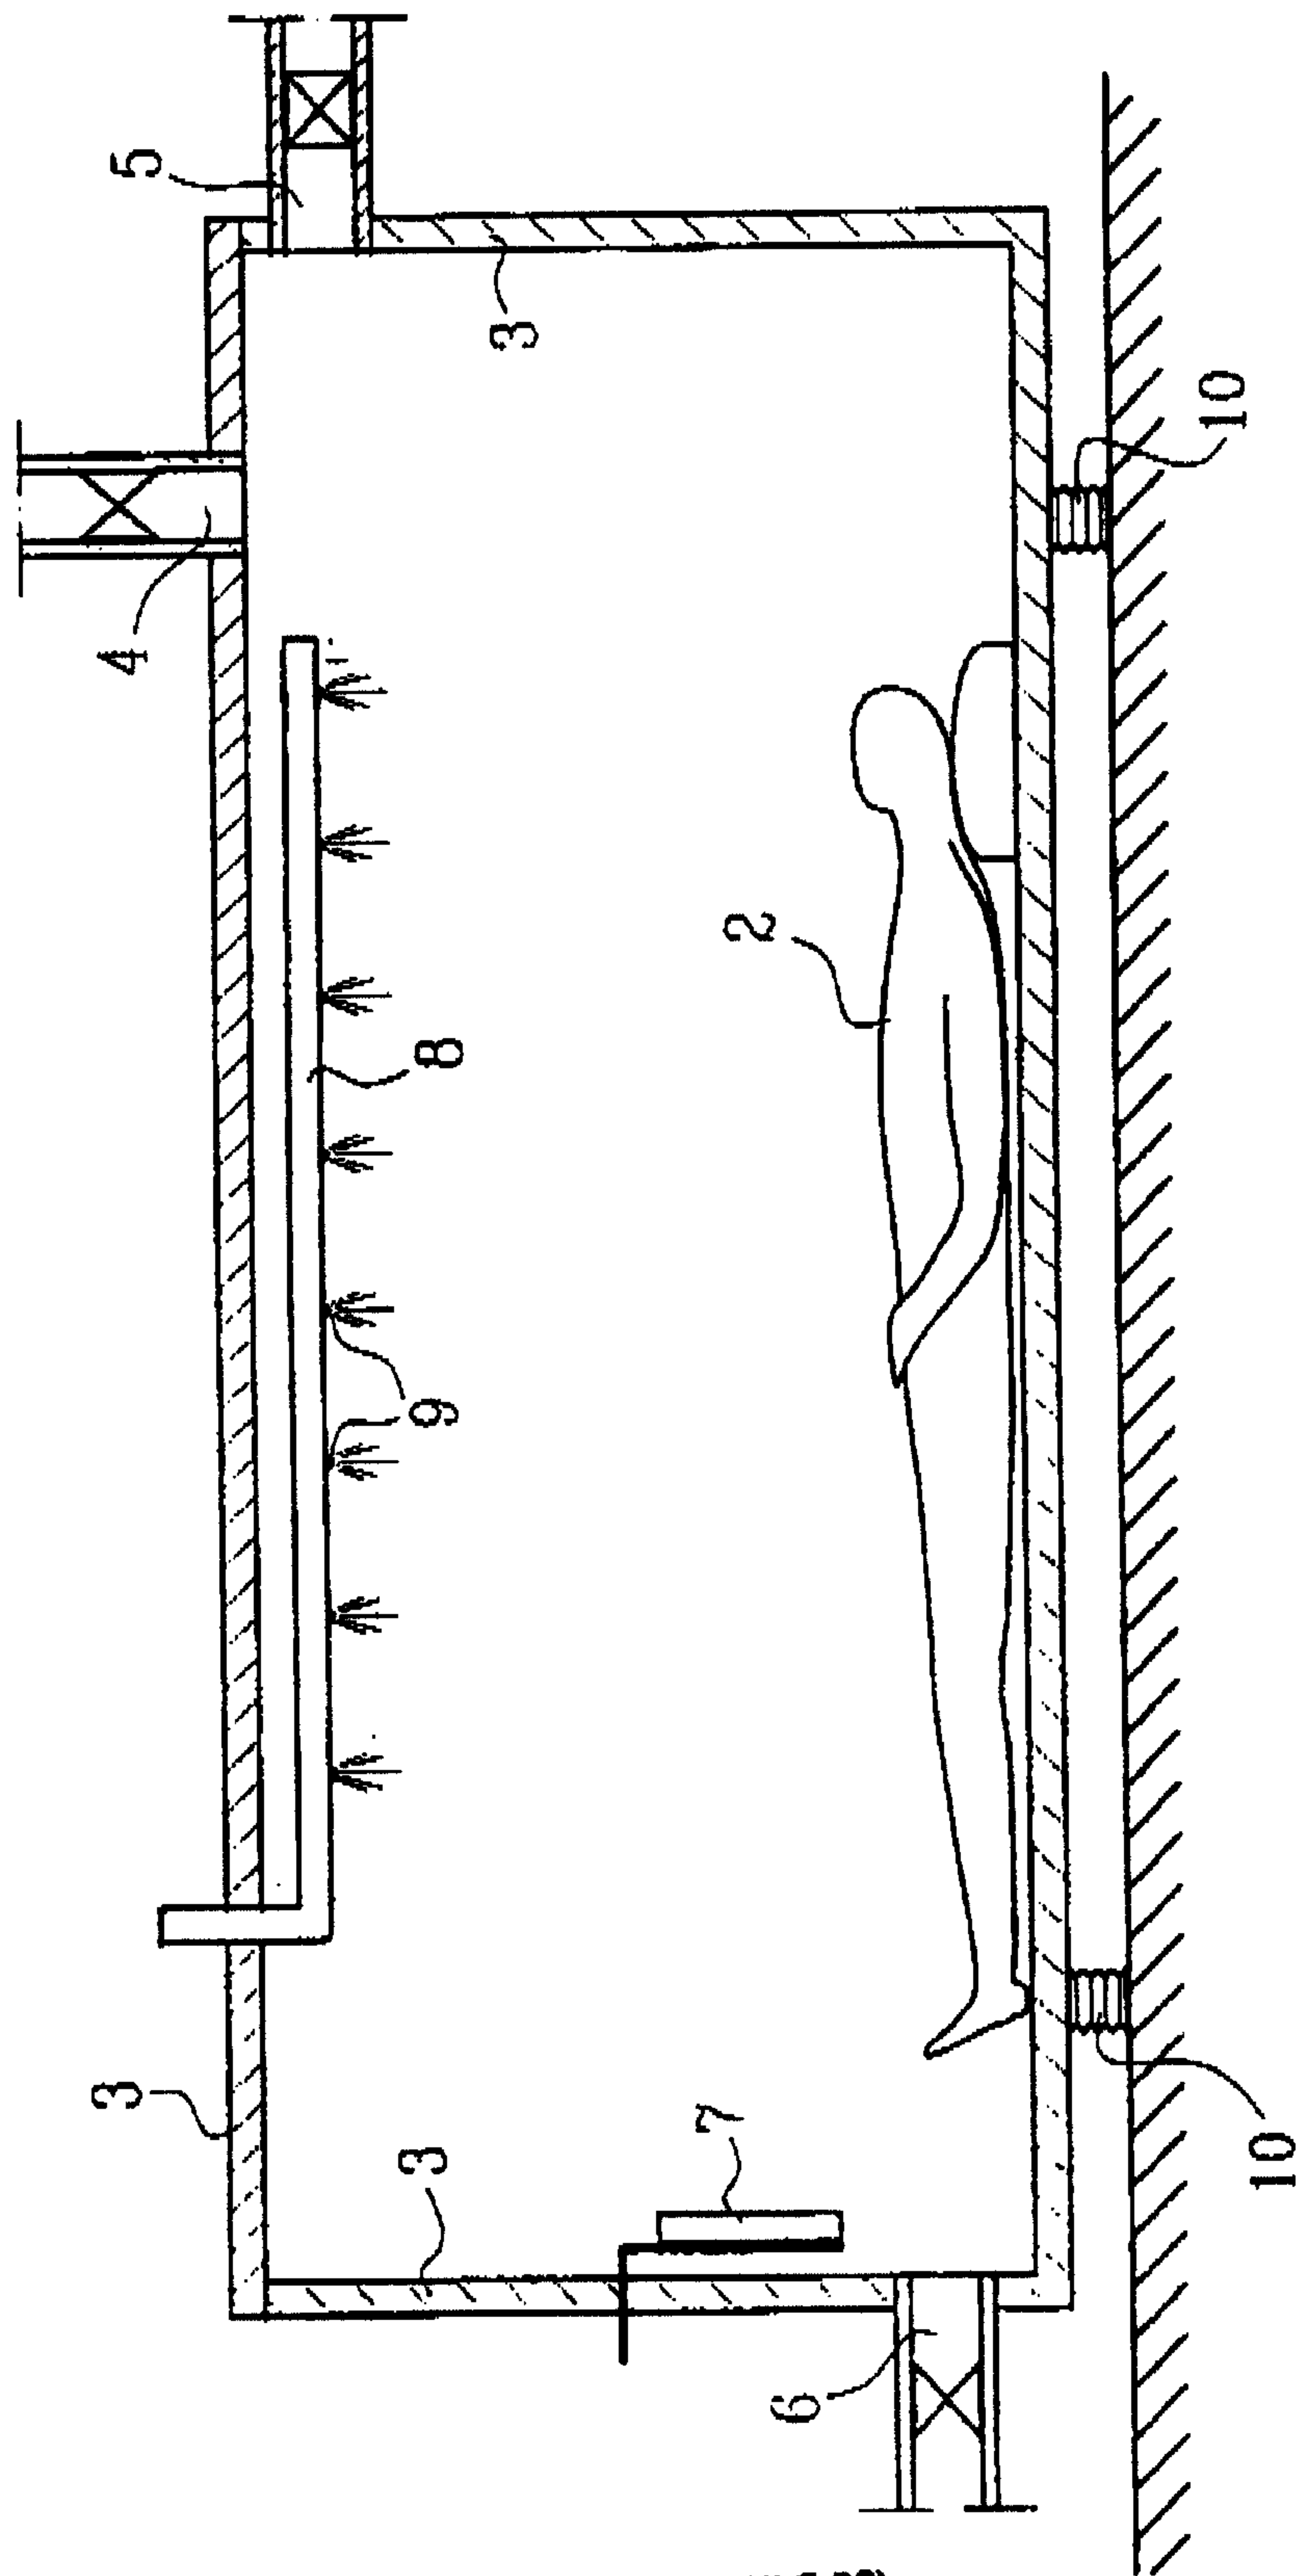


FIG.1

SUBSTITUTE SHEET (RULE 26)

