




- (51) International Patent Classification:
A61M 16/16 (2006.01)
- (21) International Application Number:
PCT/NZ2015/050005
- (22) International Filing Date:
29 January 2015 (29.01.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/933,775 30 January 2014 (30.01.2014) US
- (71) Applicant: FISHER & PAYKEL HEALTHCARE LIMITED [NZ/NZ]; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).
- (72) Inventor: SUN, Yi-cheng; 15 Maurice Paykel Place, East Tamaki, Auckland, 2013 (NZ).
- (74) Agent: AJ PARK; Level 22, State Insurance Tower, 1 Willis Street, Wellington, 6011 (NZ).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) Title: BREATHING ASSISTANCE APPARATUS WITH LIQUID CONTAINMENT

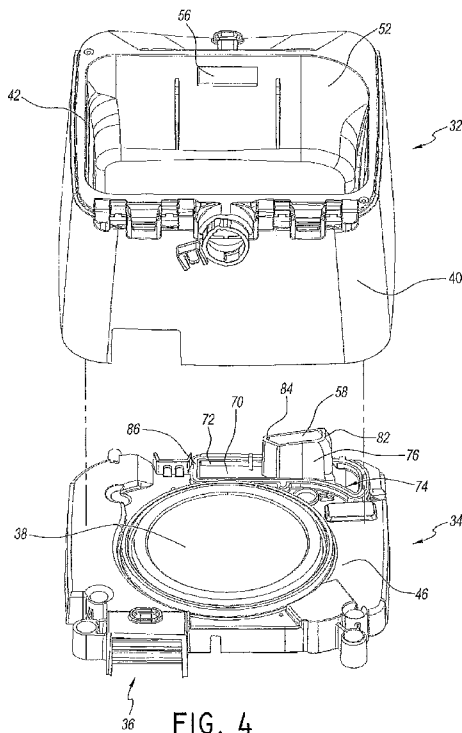

(57) Abstract: A breathing assistance apparatus has a humidification compartment defined within a main body and is adapted to receive a humidification chamber. A flow generator is also positioned within the main body. The flow generator and the humidification compartment are fluidly connected via a liquid containment compartment which is interposed between the flow generator and the humidification compartment. The liquid containment compartment prevents water spills from the humidification chamber from reaching other areas of the breathing assistance apparatus.

BREATHING ASSISTANCE APPARATUS WITH LIQUID CONTAINMENT**BACKGROUND OF THE INVENTION**Field of the Invention

5 [0001] The present invention generally relates to respiratory devices. More particularly, the present invention relates to respiratory devices receiving pressurized breathing gases for humidification and having liquid isolation constructions.

Description of the Related Art

10 [0002] Breathing treatment devices typically include an airflow generator to supply pressurized gases. In some breathing treatment devices the device may include an integrated water supply chamber. The water chamber can include a supply of water that is used to humidify the breathing gases that are being supplied by the breathing treatment device.

15 [0003] In some configurations the breathing treatment devices are designed to be portable and/or movable. When such devices are moved while containing a water supply reservoir, the reservoir may tip and allow water to spill from the water reservoir into other regions of the breathing treatment devices.

SUMMARY OF THE INVENTION

20 [0004] To protect various components, it would be desirable if the spilled water or other liquids could be contained and the infiltration of the water or liquid could be controlled. Accordingly, certain features, aspects and advantages of the present invention relate to providing a liquid containment construction. It also is an object of the present invention to at least provide the industry and users with a useful choice.

25 [0005] The invention broadly consists in a breathing assistance apparatus comprising a main body, a humidification compartment defined within the main body and adapted to receive a humidification chamber, a flow generator positioned within the main body, the flow generator and the humidification compartment being fluidly connected and a liquid containment compartment being interposed within the main body between the flow generator and the humidification compartment, the liquid containment compartment being
30 fluidly connected to both the flow generator and the humidification compartment such that a

gas flow path from the flow generator to the humidification compartment passes through the liquid containment compartment, and wherein the liquid containment compartment comprises a first opening that defines an outlet for gases flow out of the liquid containment compartment to the humidification compartment and a second opening that defines an inlet for gases flow into the liquid containment compartment from the flow generator, the first opening and the second opening of the liquid containment compartment being offset from each other in at least two orthogonal spatial directions.

[0006] In some configurations, the first opening and the second opening of the liquid containment compartment are offset horizontally and vertically.

10 [0007] In some configurations, the first opening and the second opening of the liquid containment compartment are offset from each other in three orthogonal spatial directions. In one example, the first opening and the second opening of the liquid containment compartment may be offset horizontally in two orthogonal directions and vertically.

15 [0008] In some configurations, no portion of the first opening is vertically aligned with the second opening.

[0009] In some configurations, no portion of the first opening is horizontally aligned with the second opening.

[0010] In some configurations, the liquid containment compartment comprises a lower surface and the second opening being positioned generally vertically higher than the lower surface. In one example, the second opening spans a vertical distance and the lowermost portion of the second opening is vertically higher than the lower surface of the liquid containment compartment. In another example, the lower surface of the liquid containment compartment spans a vertical distance and the second opening is vertically higher than any portion of the lower surface that is directly adjacent to the second opening.

25 [0011] In some configurations, the second opening is canted toward the first opening.

[0012] In some configurations, a lowermost portion of the second opening is vertically higher than a lowermost portion of the lower surface of the liquid containment compartment.

30

[0013] In some configurations, the second opening has a lip defined on a portion of the second opening that is on an opposite side of the second opening from the first opening. In one example, the lip overhangs a passage defined within a pedestal leading to the second opening, the passage forming part of the gas flow path.

5 [0014] In some configurations, the second opening has a narrowing region defined on a portion of the second opening that is disposed closest to the first opening.

[0015] In some configurations, the second opening is provided atop of a pedestal extending within the liquid containment compartment from the lower surface of the liquid containment compartment, the pedestal comprising a passage fluidly connected to the flow generator to form part of the gas flow path.

10 [0016] In some configurations, the second opening is fluidly connected to the flow generator by one or more passages within the main body that form part of the gas flow path.

[0017] In some configurations, the main body comprises an upper housing and a lower housing that are configured to be secured together, and wherein the liquid containment compartment comprises a lower surface that is part of the lower housing of the main body and a vertical wall defining the sides of the liquid containment compartment that is part of the upper housing of the main body.

15 [0018] In some configurations, a portion of the vertical wall of the liquid containment compartment corresponds to a portion of a vertical wall that defines the humidification compartment. In one example, the first opening extends through the portion of the vertical wall of the liquid containment compartment that corresponds to the vertical wall of the humidification compartment.

[0019] In some configurations, a portion of the vertical wall of the liquid containment compartment corresponds to a portion of an outer wall of the main body provided by the upper housing.

20 [0020] In some configurations, the liquid containment compartment comprises a ridge that defines the periphery of the lower surface of the liquid containment compartment and which extends from the lower housing of the main body, the ridge matching the configuration of the vertical wall of the liquid containment compartment provided in the

30

upper housing such that the ridge of the lower housing and vertical wall of the upper housing abut each other to form the liquid containment compartment when the main body is assembled.

[0021] In some configurations, the ridge of the liquid containment compartment
5 defines and encircles a reservoir of the liquid containment compartment.

[0022] In some configurations, the ridge of the liquid containment compartment surrounds the second opening.

[0023] In some configurations, a seal is provided between ridge of the lower housing and the vertical wall of the upper housing that form the liquid containment
10 compartment. In one example, the ridge comprises a groove and the seal is provided within the groove.

[0024] In some configurations, the flow generator is mounted to or within the lower housing of the main body.

[0025] Other aspects are also described in the following. In some configurations,
15 a breathing assistance apparatus comprises a main body. A humidification compartment is defined within the main body and is adapted to receive a humidification chamber. A flow generator is positioned within the main body. The flow generator and the humidification compartment are fluidly connected and a liquid containment compartment is interposed between the flow generator and the humidification compartment. The liquid containment
20 compartment is fluidly connected to both the flow generator and the humidification compartment.

[0026] In some such configurations, a gas flow path from the flow generator to the humidification compartment passes through the liquid containment compartment.

[0027] In some such configurations, the liquid containment compartment
25 comprises a first opening that defines an outlet for gases flow out of the liquid containment compartment and a second opening that defines an inlet for gases flow into the liquid containment compartment. The liquid containment compartment comprises a lower surface and the second opening is positioned generally vertically higher than the lower surface.

[0028] In some such configurations, the second opening is canted toward the first
30 opening.

[0029] In some such configurations, a lowermost portion of the second opening is vertically higher than a lowermost portion of the lower surface.

[0030] In some such configurations, the second opening has a lip defined on a portion of the second opening that is on an opposite side of the second opening from the first opening.

[0031] In some such configurations, the lip overhangs a passage defined within a pedestal leading to the second opening.

[0032] In some such configurations, the liquid containment compartment comprises a first opening that defines an outlet for gases flow out of the liquid containment compartment and a second opening that defines an inlet for gases flow into the liquid containment compartment. The first opening is offset from the second opening such that the first opening is not vertically aligned with the second opening.

[0033] In some such configurations, no portion of the first opening is vertically aligned with the second opening.

[0034] In some such configurations, the first opening and the second opening are offset from each other in three orthogonal spatial directions.

[0035] The term “comprising” as used in the specification and claims means “consisting at least in part of”. When interpreting a statement in this specification and claims that includes “comprising”, features other than that or those prefaced by the term may also be present. Related terms such as “comprise” and “comprises” are to be interpreted in the same manner.

[0036] In this specification where reference has been made to patent specifications, other external documents, or other sources of information, this is generally for the purpose of providing a context for discussing the features of the invention. Unless specifically stated otherwise, reference to such external documents is not to be construed as an admission that such documents, or such sources of information, in any jurisdiction, are prior art, or form part of the common general knowledge in the art.

BRIEF DESCRIPTION OF THE DRAWINGS

[0037] These and other features, aspects and advantages of the present invention will now be described with reference to the drawings of a preferred embodiment, which embodiment is intended to illustrate and not to limit the invention, and in which figures:

[0038] Figure 1 is a perspective view of a system including a respiratory humidification device that is arranged and configured in accordance with certain features aspects and advantages of the present invention.

[0039] Figure 2 is a perspective view of the respiratory humidification device of Figure 1.

[0040] Figure 3 is a perspective view of a portion of the respiratory humidification device of Figure 1.

[0041] Figure 4 is an exploded perspective view of a portion of the respiratory humidification device of Figure 1.

[0042] Figure 5 is a section view of a portion of the humidification device of Figure 1 taken along the line 5-5 in Figure 3.

[0043] Figure 6 is top view of a lower portion of the respiratory humidification device of Figure 1.

[0044] Figure 7 is a section view illustrating airflow path through the liquid isolation chamber of the respiratory humidification device of Figure 1.

20 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0045] With reference now to Figure 1, a breathing assistance apparatus 20 is shown that is arranged and configured in accordance with certain features, aspects and advantages of the present invention. In the illustrated configuration, the breathing assistance apparatus 20 is connected to a conduit 22 and the conduit 22 is connected to a user interface 25 24, such as a breathing mask or the like. Any suitable user interface 24 can be used.

[0046] The breathing assistance apparatus 20 is configured to deliver a flow of pressurized breathing gases to the user through the conduit 22 and the user interface 24. Accordingly, the illustrated breathing assistance apparatus 20 comprises a flow generator 26, which has been schematically illustrated in Figure 1. The flow generator 26 can have any 30 suitable construction. In some configurations, the flow generator 26 is a blower that draws

ambient air into the breathing assistance apparatus 20 and generates the flow of pressurized breathing gases.

[0047] The breathing assistance apparatus 20 also is configured to humidify the flow of pressurized breathing gases prior to deliver to the user. Accordingly, as illustrated in Figure 2, the illustrated breathing assistance apparatus 20 also comprises a humidification chamber 28. The humidification chamber 28 can be removable from the breathing assistance apparatus 20. Any suitable construction can be used for the humidification chamber 28. The humidification chamber 28 can be configured to contain a volume of liquid, such as water. The flow of pressurized breathing gases can pass over the volume of liquid en route to the user such that the flow of pressurized breathing gases can increase in humidity.

[0048] As illustrated, the breathing assistance apparatus 20 generally comprises a main body 30. With reference to Figure 4, the main body 30 can comprise an upper housing 32 and a lower housing 34. The upper housing 32 and the lower housing 34 can be secured together in any suitable manner. In some configurations, the bottom of the lower housing 34 can be enclosed by a further cover.

[0049] With continued reference to Figure 4, the lower housing 34 can include an air inlet 36 through which the flow generator 26 draws air. The flow generator 26 can be mounted to or within the lower housing 34. The lower housing 34 also can support a heating element 38. The liquid within the humidification chamber 28 can be heated through an interaction with the heating element 38. In some configurations, the heating element 38 can be a heater plate and the humidification chamber 28 can rest on the heater plate. Other configurations are possible.

[0050] With reference to Figure 2, the main body 30 comprises at least one outer wall 40. In the illustrated configuration, the main body 30 comprises four generally vertical outer walls 40. An upper portion of the at least one wall 40 generally defines an opening 42. As shown in Figure 1, the opening 42 can be closed with a lid 44. The lid 44 can seal the opening 42 in some configurations.

[0051] The main body 30 contains a humidification compartment 50 that receives the humidification chamber 28. In the illustrated configuration, the humidification compartment 50 is generally defined within the at least one outer wall 40, the lid 44 and a

base surface 46. More particularly, in the illustrated configuration, at least one generally vertical inner wall 52 defines at least a portion of the humidification compartment 50. Even more particularly, four generally vertical walls, including the at least one generally vertical inner wall 52, largely define the humidification compartment 50.

5 [0052] A liquid containment compartment 54 can be separated from the humidification compartment 50. In some configurations, the liquid containment compartment 54 limits the travel of liquid that may spill from the humidification chamber 28. In some configurations, the liquid containment compartment 54 can limit the travel of liquid that may be spilled within the humidification compartment 50 and outside of the
10 humidification chamber 28.

 [0053] The liquid containment compartment 54 can be positioned within the main body 30 of the breathing assistance apparatus 20. In the illustrated configuration, the liquid containment compartment 54 is integrated into the main body 30 of the breathing assistance apparatus 20. The liquid containment compartment 54 and the flow generator 26 both can be
15 integrated into the main body 30. In some configurations, the liquid containment compartment 54 is fluidly connected to the flow generator 26 and to the humidification compartment 50. In some such configurations, the liquid containment compartment 54 is positioned between the flow generator 26 and the humidification compartment 54. In some configurations, the liquid containment compartment 54 can be positioned between the outer
20 wall 40 and the inner wall 52 of the main body. In some configurations, the inner wall 52 separates the humidification compartment 50 from the liquid containment compartment 54.

 [0054] The liquid containment compartment 54 can include two openings. A first opening 56, as shown in Figure 3, extends through the inner wall 52. The first opening 56 defines a gas inlet for the humidification compartment 50 and a gas outlet for the liquid
25 containment compartment 54. Gases flowing through the first opening 56 will be received by the humidification chamber 28 and will be humidified prior to delivery to the user. In other words, with the lid 44 in position and closed, the humidification chamber 28 is sealed in position within the humidification compartment 50. Gas passing through the first opening 56 will flow into the humidification compartment 50, and from the humidification compartment,

the gases will flow into the humidification chamber 28 prior to passing out of the breathing assistance apparatus 20.

[0055] A second opening 58, shown in Figure 4, defines a gas inlet into the liquid containment compartment 54 and a gas outlet for flow from a passage 66 leading from the flow generator 26. In one configuration, the first opening 56 is in the upper housing 32 and the second opening 58 is in the lower housing 34. In some configurations, the first opening 56 is offset both horizontally and vertically from the second opening. In some configurations, the first opening 56 is offset at least horizontally from the second opening 58, as shown in Figure 5 (i.e., the first opening 56 is to the right of the second opening 58). In some configurations, the first opening 56 is completely offset at least horizontally from the second opening 58. In some configurations, the two openings 56, 58 are offset in two orthogonal directions (e.g., horizontally and vertically). In some configurations, the two openings 56, 58 are offset in three orthogonal directions (horizontally in two orthogonal directions and vertically). Offset positioning of the first opening 56 relative to the second opening 58 reduces the likelihood of liquids spilling, draining, depositing or otherwise passing through the first opening 56 into the liquid containment compartment 54 passing further upstream toward the flow generator 26 relative to the liquid containment chamber 54. In other words, liquid is unlikely to easily pass through the first opening 56 and into the second opening 58. As such, liquid infiltration from the humidification chamber 28 toward the flow generator 26 can be inhibited.

[0056] With reference to now to Figure 4, the liquid containment compartment 54 comprises at least a lower wall 70. The lower wall 70 can be formed as part of the lower housing 34. In the illustrated configuration, a ridge 72 can be defined on a portion of the lower housing 34. The illustrated ridge 72 can generally encircle a reservoir 74. As shown in Figure 6, the ridge 72 generally surrounds the second opening 58. Other configurations are possible.

[0057] With reference again to Figure 5, the second opening 58 is vertically higher than the lower wall 70. In some configurations, the second opening 58 spans a vertical distance and the lowermost portion of the second opening 58 is vertically higher than the lower wall 70. In some configurations, the lower wall 70 can span a vertical distance (i.e.,

not be substantially flat) and the second opening 58 is vertically higher than any portion of the lower wall 70 that is directly adjacent to the second opening 58.

[0058] In the illustrated configuration, the second opening 58 is formed atop of a pedestal 76. The pedestal 76 can be integrally formed with the lower housing 34. The pedestal 76 generally encircles a passage 80 as shown in Figures 5 and 6. At the upper end of the illustrated pedestal 76, the second opening 58 is generally canted such that the upper surface of the illustrated pedestal angles toward the first opening 56. Moreover, with reference to Figure 5, at least an inner surface of the pedestal 76 that is furthest from the first opening 56 bends toward the first opening 56. The deflected portion of pedestal 76 that is generally adjacent the second opening 58 forms a lip 82. The lip 82 can help to deflect the gases flow toward the general direction of the first opening 56.

[0059] With reference to Figure 6, the second opening 58 also has a narrowing region 84. The narrowing region 84 is disposed closest to the first opening 56 in the illustrated configuration. As shown in Figure 5, the narrowing region 84 does not extend upward to the same extent as the lip region 82. The lip region 82 and/or the narrowing region 84 can help tailor and direct the gas flow in a desired manner. Other configurations are possible.

[0060] As described above, in some configurations, at least a portion of the liquid containment compartment 54 is defined between the inner wall 52 and the outer wall 40 of the main body 30. With reference to Figure 7, at least a first wall 78 and, in some configurations, a second wall 84 can cooperate with the inner wall 52 and the outer wall 40 to define the sides of the liquid containment compartment 54. These walls 40, 52, 78, 84 can be integrally formed with the upper housing 32.

[0061] The ridge 72 can match the configuration of these walls 40, 52, 78, 84. As such, the ridge 72 and these walls 40, 52, 78 and 84 can abut each other. To reduce the likelihood of leaks at the junction of the ridge 72 and the walls 40, 52, 78, 84, a seal 86 can be positioned between the upper housing 32 and the lower housing 34. In the illustrated configuration, the seal 86 is positioned within a groove 90 (see Figure 5). The groove 90 may be positioned within the ridge 72. The seal 86 can be formed of a more resilient material than the ridge 72. As such, the seal 86 can deform upon contact with the walls 40, 52, 78, 84.

The compression of the seal 86 can reduce the likelihood of liquid or gas leaks into or out of the liquid containment compartment 54.

5 [0062] Moreover, in the event of liquid passing through the first opening 56 into the liquid containment chamber 54, the liquid will be held within the liquid containment chamber 54. As such, the seal 86 between the upper housing 32 and the lower housing 34 can reduce the likelihood of liquid migration even if the level of liquid within the liquid containment chamber 54 exceeds the height of the ridge 72.

10 [0063] Although the present invention has been described in terms of a certain embodiment, other embodiments apparent to those of ordinary skill in the art also are within the scope of this invention. Thus, various changes and modifications may be made without departing from the spirit and scope of the invention. For instance, various components may be repositioned as desired. Moreover, not all of the features, aspects and advantages are necessarily required to practice the present invention. Accordingly, the scope of the present invention is intended to be defined only by the claims that follow.

15

CLAIMS:

1. A breathing assistance apparatus comprising a main body, a humidification compartment defined within the main body and adapted to receive a humidification chamber, a flow generator positioned within the main body, the flow generator and the humidification compartment being fluidly connected and a liquid containment compartment being interposed within the main body between the flow generator and the humidification compartment, the liquid containment compartment being fluidly connected to both the flow generator and the humidification compartment such that a gas flow path from the flow generator to the humidification compartment passes through the liquid containment compartment, and wherein the liquid containment compartment comprises a first opening that defines an outlet for gases flow out of the liquid containment compartment to the humidification compartment and a second opening that defines an inlet for gases flow into the liquid containment compartment from the flow generator, the first opening and the second opening of the liquid containment compartment being offset from each other in at least two orthogonal spatial directions.

2. A breathing assistance apparatus according to claim 1 wherein the first opening and the second opening of the liquid containment compartment are offset horizontally and vertically.

3. A breathing assistance apparatus according to claim 1 wherein the first opening and the second opening of the liquid containment compartment are offset from each other in three orthogonal spatial directions.

4. A breathing assistance apparatus according to claim 3 wherein the first opening and the second opening of the liquid containment compartment are offset horizontally in two orthogonal directions and vertically.

5. A breathing assistance apparatus according to any one of the preceding claims wherein no portion of the first opening is vertically aligned with the second opening.

6. A breathing assistance apparatus according to any one of the preceding claims wherein no portion of the first opening is horizontally aligned with the second opening.

7. A breathing assistance apparatus according to any one of the preceding claims wherein the liquid containment compartment comprises a lower surface and the second opening being positioned generally vertically higher than the lower surface.

5 8. A breathing assistance apparatus according to claim 7 wherein the second opening spans a vertical distance and the lowermost portion of the second opening is vertically higher than the lower surface of the liquid containment compartment.

9. A breathing assistance apparatus according to claim 7 wherein the lower surface of the liquid containment compartment spans a vertical distance and the second opening is vertically higher than any portion of the lower surface that is directly adjacent to the second
10 opening.

10. A breathing assistance apparatus according to any one of claims 7-9 wherein the second opening is canted toward the first opening.

11. A breathing assistance apparatus according to any one or claims 7-10 wherein a lowermost portion of the second opening is vertically higher than a lowermost portion of the
15 lower surface of the liquid containment compartment.

12. A breathing assistance apparatus according to any one of claims 7-11 wherein the second opening has a lip defined on a portion of the second opening that is on an opposite side of the second opening from the first opening.

13. A breathing assistance apparatus according to claim 12 wherein the lip overhangs
20 a passage defined within a pedestal leading to the second opening, the passage forming part of the gas flow path.

14. A breathing assistance apparatus according to any one of claims 7-13 wherein the second opening has a narrowing region defined on a portion of the second opening that is disposed closest to the first opening.

25 15. A breathing assistance apparatus according to claim 7 wherein the second opening is provided atop of a pedestal extending within the liquid containment compartment from the lower surface of the liquid containment compartment, the pedestal comprising a passage fluidly connected to the flow generator to form part of the gas flow path.

16. A breathing assistance apparatus according to any one of the preceding claims wherein the second opening is fluidly connected to the flow generator by one or more passages within the main body that form part of the gas flow path.

5 17. A breathing assistance apparatus according to any one of the preceding claims wherein the main body comprises an upper housing and a lower housing that are configured to be secured together, and wherein the liquid containment compartment comprises a lower surface that is part of the lower housing of the main body and a vertical wall defining the sides of the liquid containment compartment that is part of the upper housing of the main body.

10 18. A breathing assistance apparatus according to claim 17 wherein a portion of the vertical wall of the liquid containment compartment corresponds to a portion of a vertical wall that defines the humidification compartment.

15 19. A breathing assistance apparatus according to claim 18 wherein the first opening extends through the portion of the vertical wall of the liquid containment compartment that corresponds to the vertical wall of the humidification compartment.

20. A breathing assistance apparatus according to any one of claims 17-19 wherein a portion of the vertical wall of the liquid containment compartment corresponds to a portion of an outer wall of the main body provided by the upper housing.

20 21. A breathing assistance apparatus according to any one of claims 17-20 wherein the liquid containment compartment comprises a ridge that defines the periphery of the lower surface of the liquid containment compartment and which extends from the lower housing of the main body, the ridge matching the configuration of the vertical wall of the liquid containment compartment provided in the upper housing such that the ridge of the lower housing and vertical wall of the upper housing abut each other to form the liquid containment
25 compartment when the main body is assembled.

22. A breathing assistance apparatus according to claim 21 wherein the ridge of the liquid containment compartment defines and encircles a reservoir of the liquid containment compartment.

30 23. A breathing assistance apparatus according to claim 21 or claim 22 wherein the ridge of the liquid containment compartment surrounds the second opening.

24. A breathing assistance apparatus according to any one of claims 21-23 wherein a seal is provided between ridge of the lower housing and the vertical wall of the upper housing that form the liquid containment compartment.

25. A breathing assistance apparatus according to claim 24 wherein the ridge
5 comprises a groove and the seal is provided within the groove.

26. A breathing assistance apparatus according to any one of claims 17-25 wherein the flow generator is mounted to or within the lower housing of the main body.

17

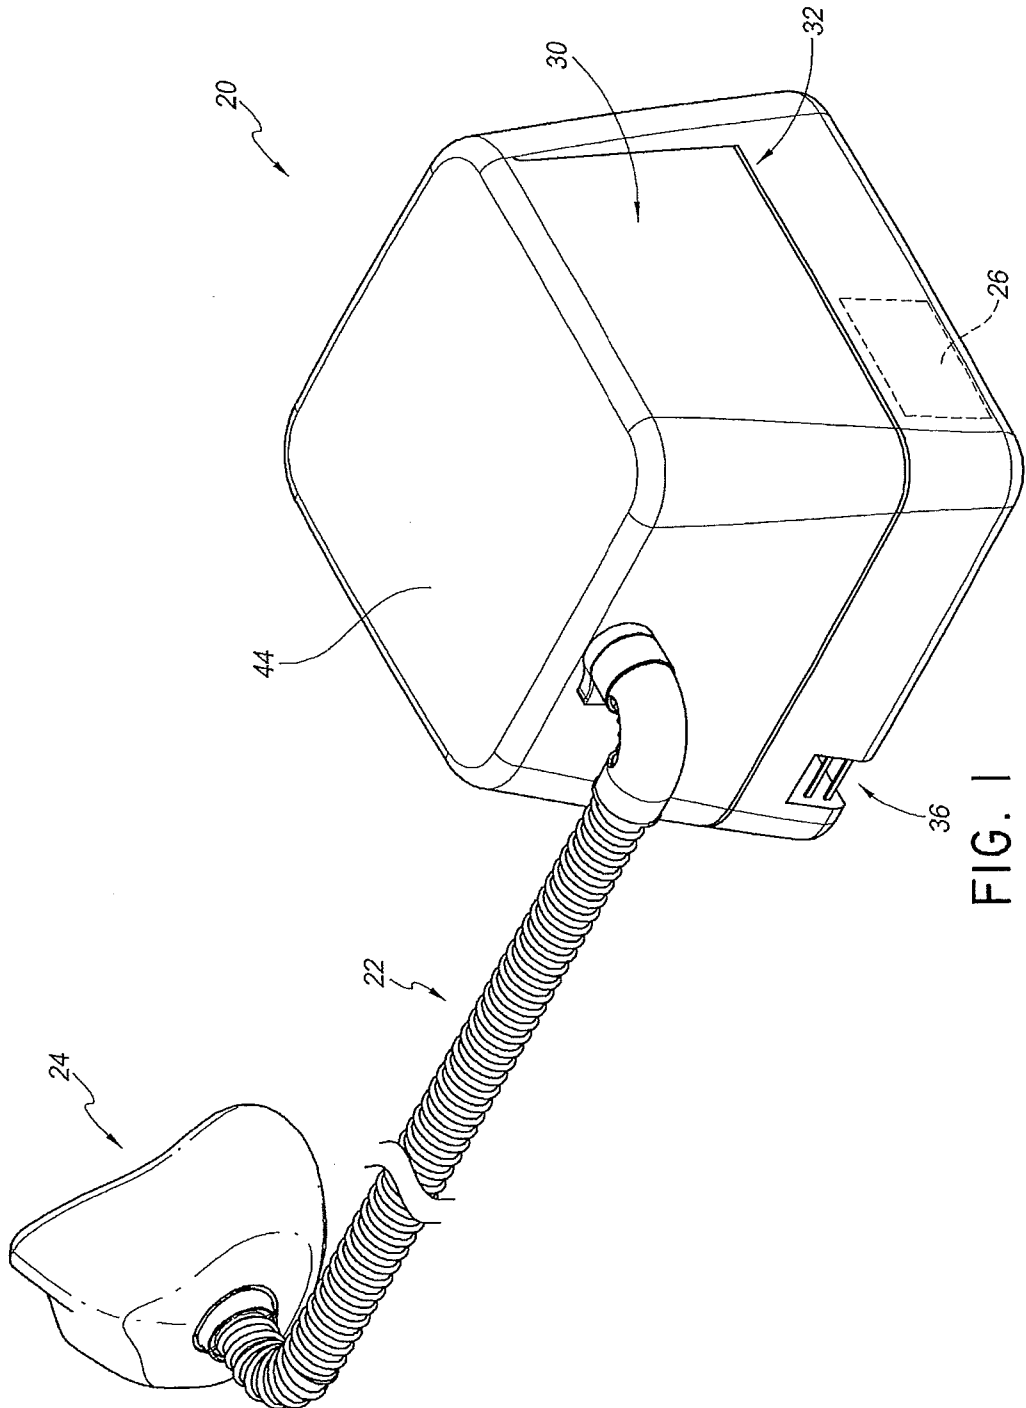


FIG. 1

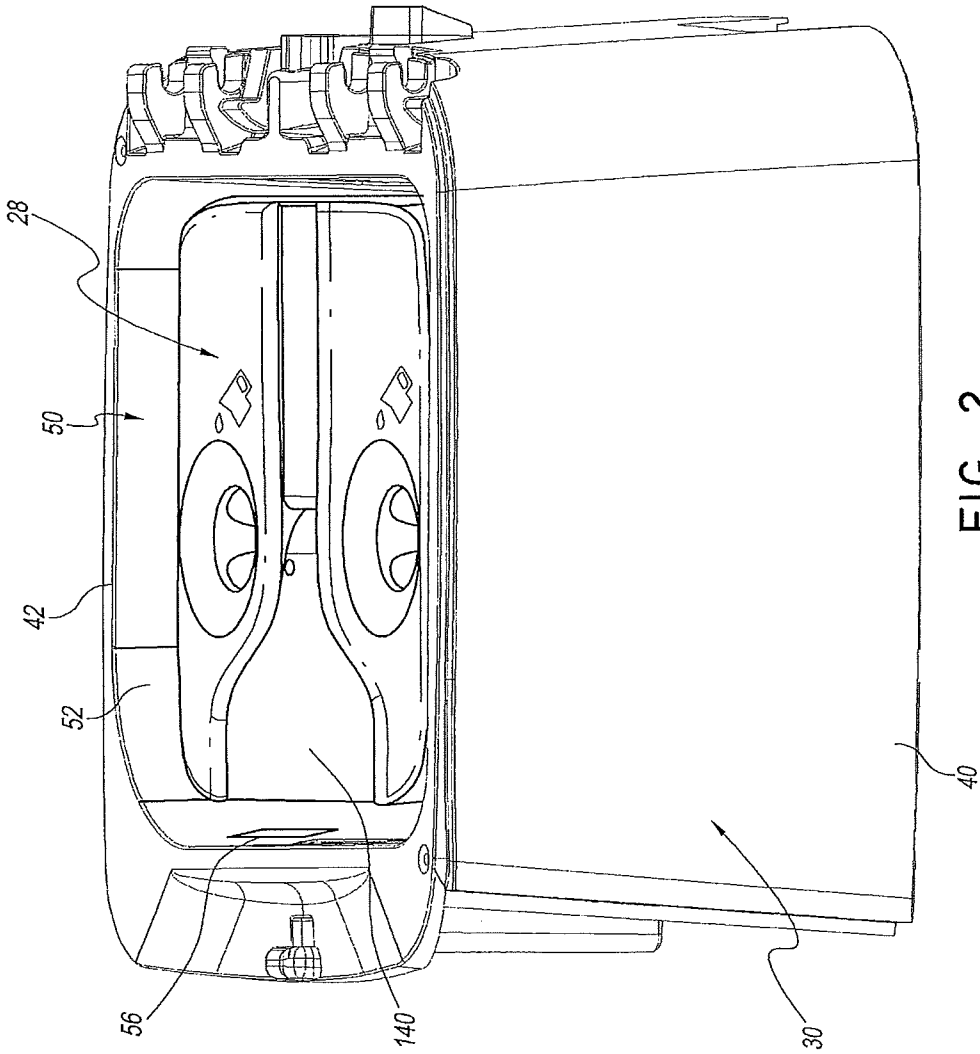


FIG. 2

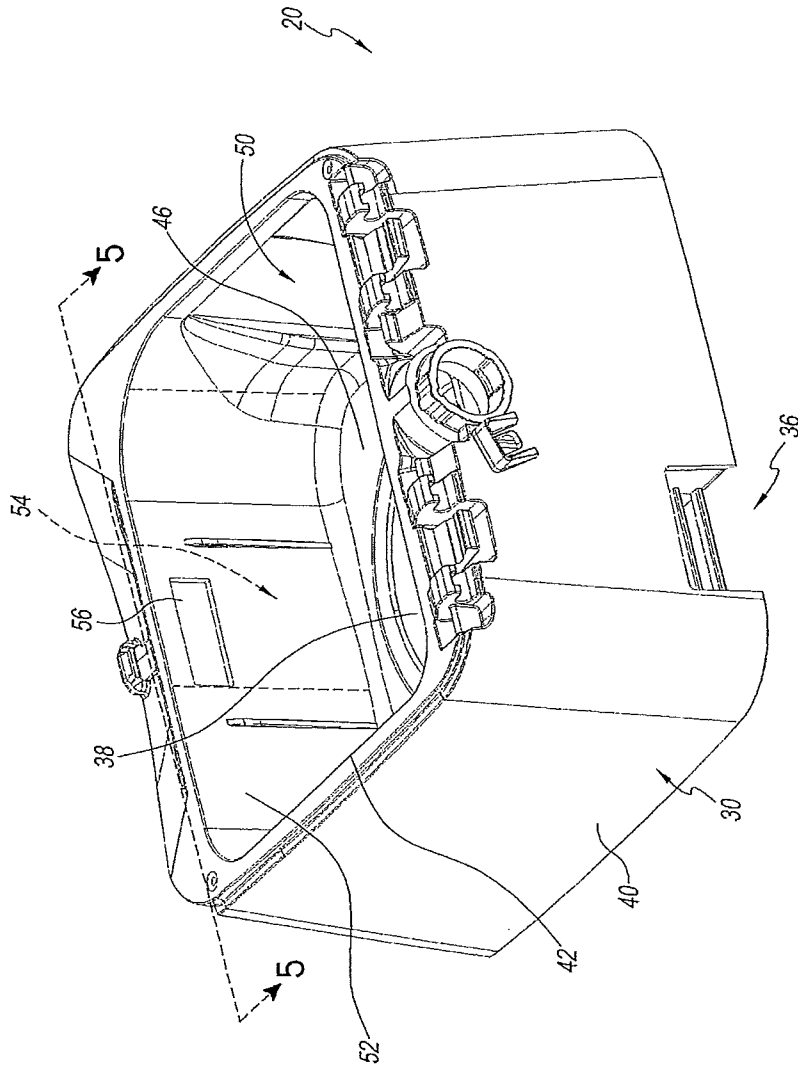


FIG. 3

4/7

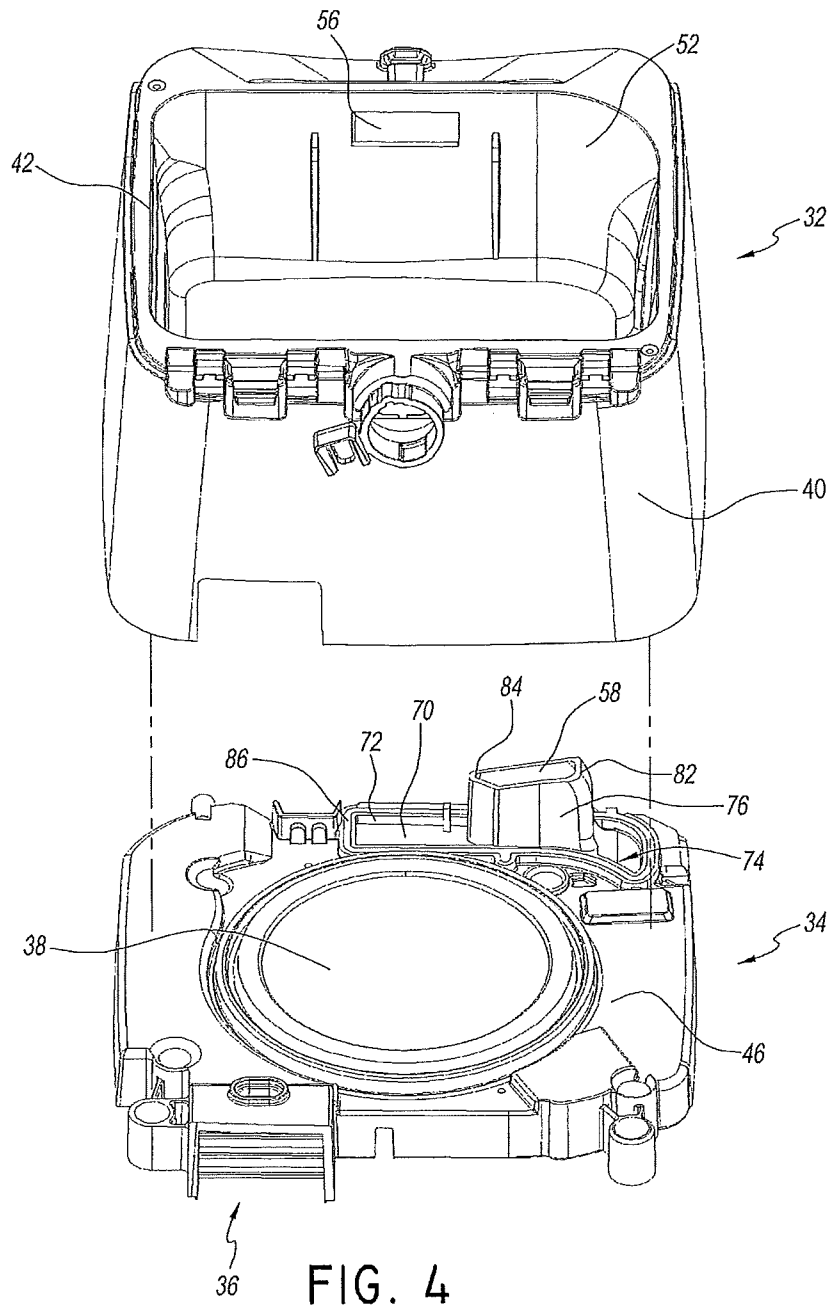


FIG. 4

5/7

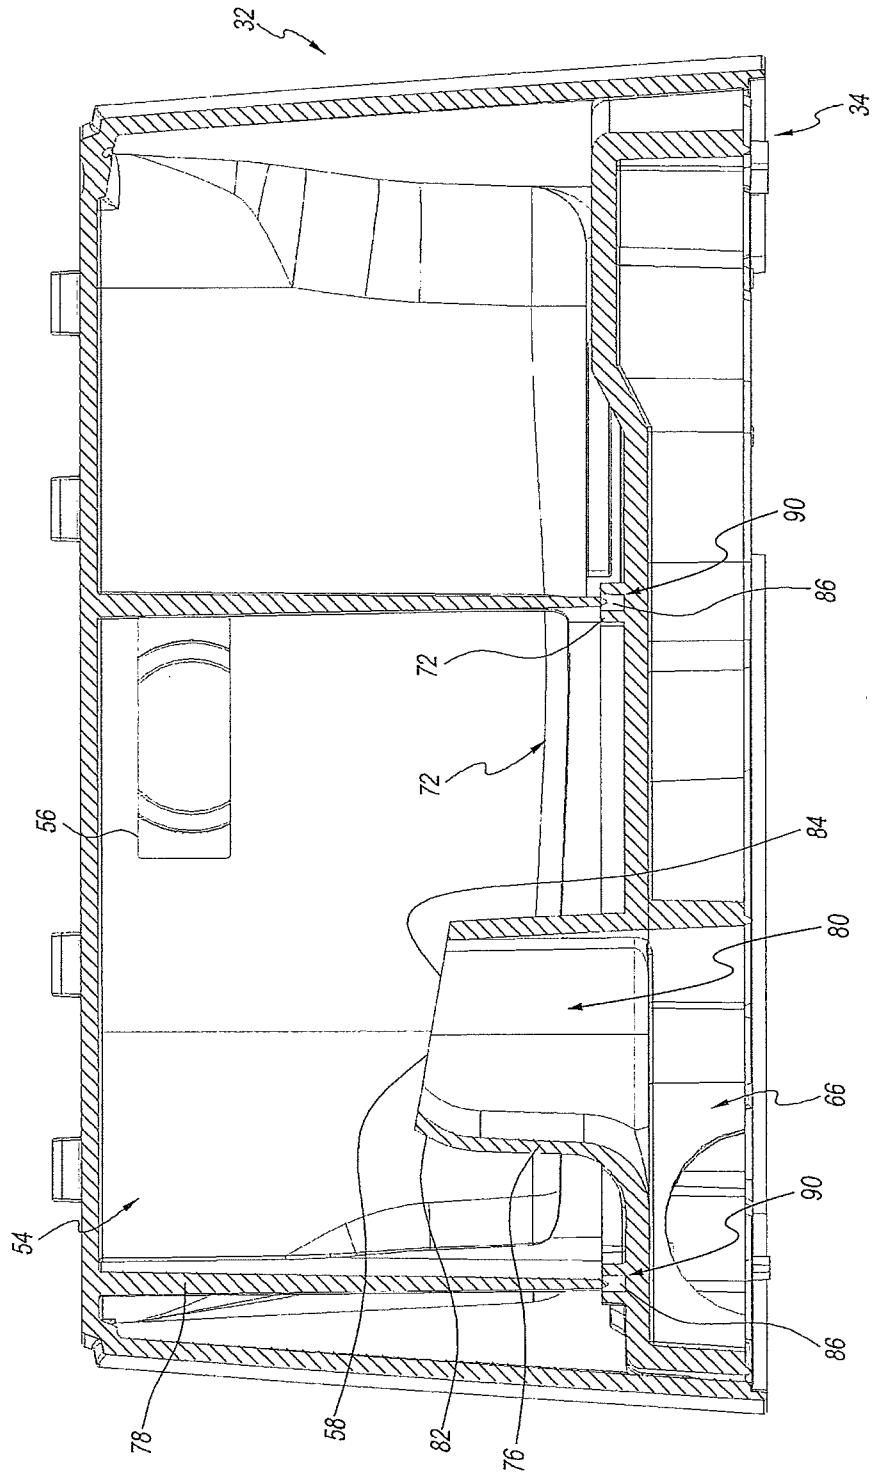


FIG. 5

6/7

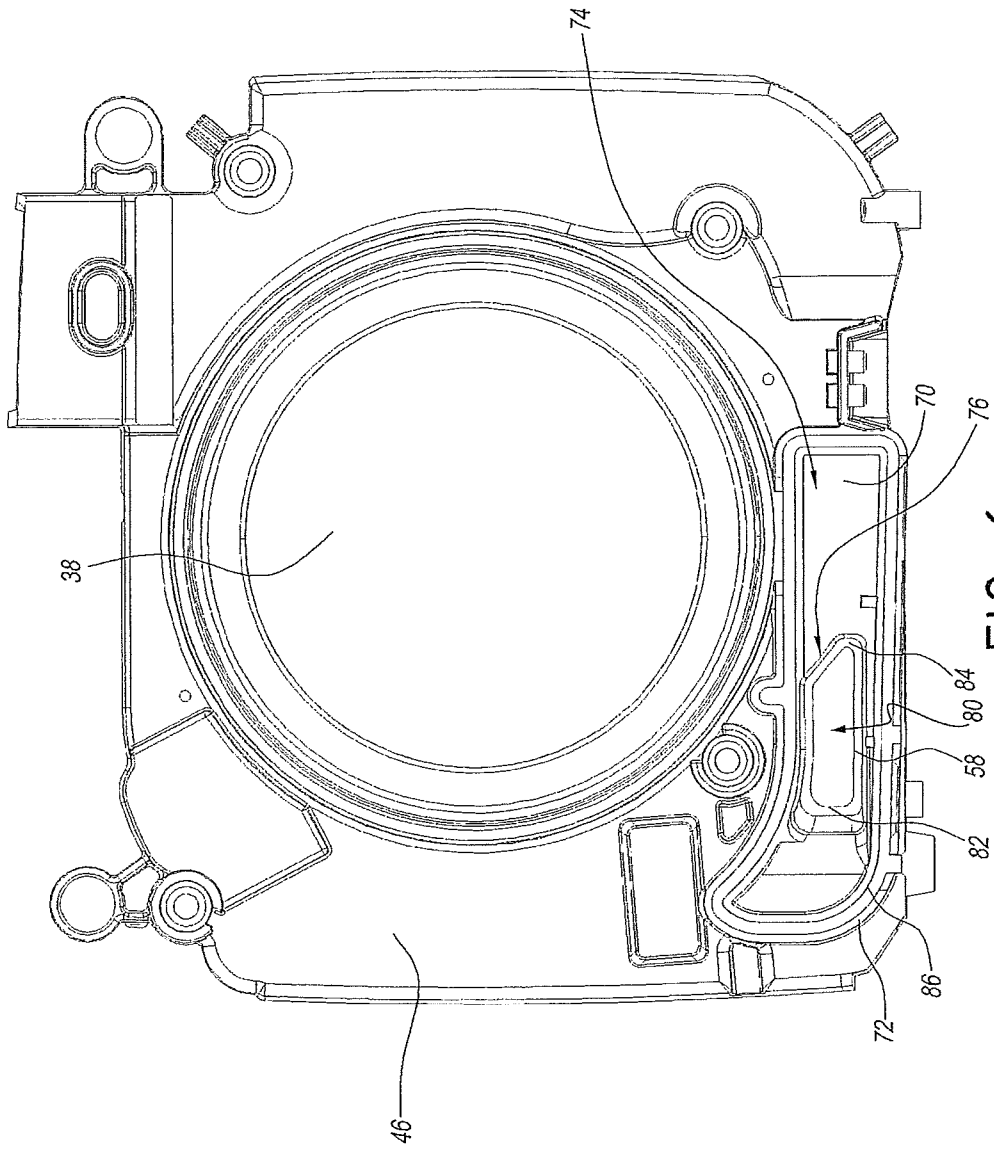


FIG. 6

77

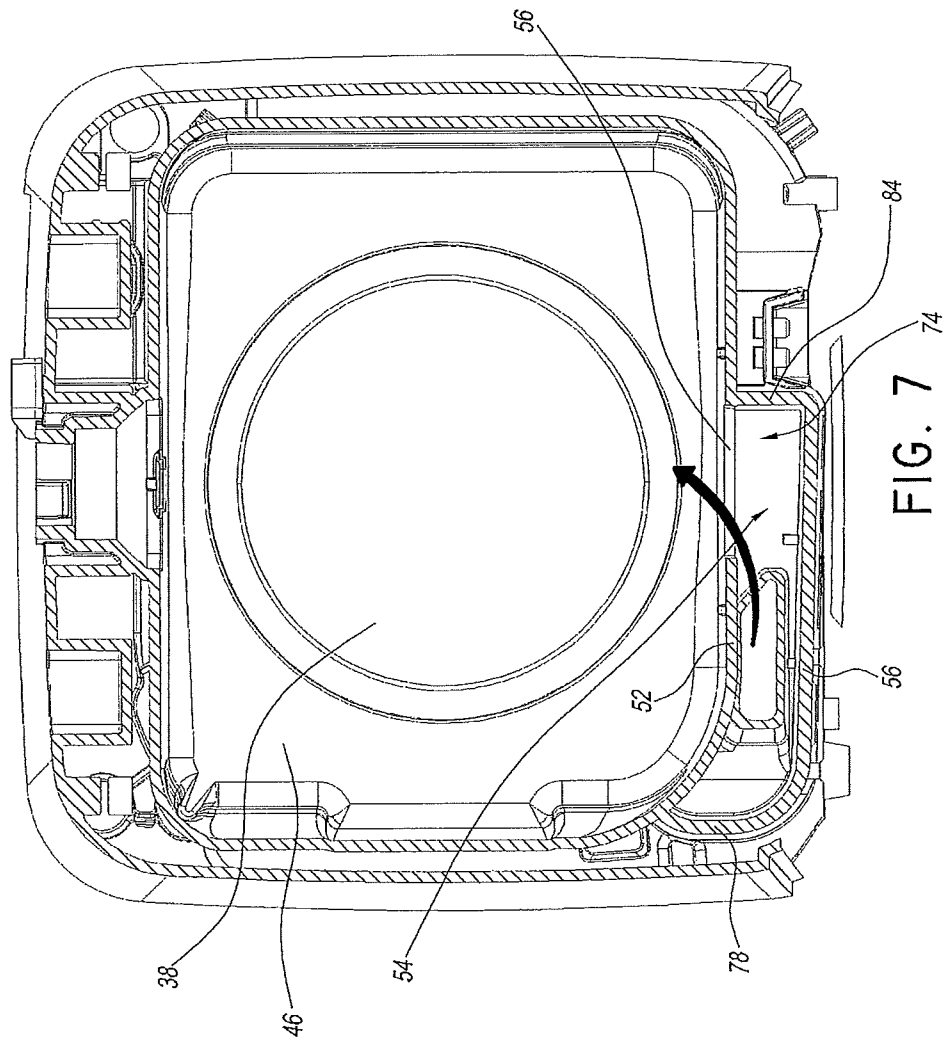


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/NZ2015/050005

A. CLASSIFICATION OF SUBJECT MATTER A61M 16/16 (2006.01)		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPIAP, EPODOC and A61M 16/16/low and keywords: liquid and spill and trap and fan and humidifier and similar terms Espace: Applicant and inventor name searches.		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	Documents are listed in the continuation of Box C	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 27 April 2015		Date of mailing of the international search report 27 April 2015
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA Email address: pct@ipaustrialia.gov.au		Authorised officer David Melhuish AUSTRALIAN PATENT OFFICE (ISO 9001 Quality Certified Service) Telephone No. 0262832426

INTERNATIONAL SEARCH REPORT		International application No. PCT/NZ2015/050005
C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2002/066106 A1 (RESMED LIMITED) 29 August 2002 page 2 lines 7 - 25, page 6 lines 11 - 20	1 - 12, 14, 16 - 26
X	WO 2009/156921 A1 (KONINKLIJKE PHILIPS ELECTRONICS N.V.) 30 December 2009 paragraphs 18 to 25	1 - 16
X	WO 2007/019625 A1 (RESMED LTD) 22 February 2007 paragraphs 67 to 75	1, 6 - 12, 14, 16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ2015/050005

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
WO 2002/066106 A1	29 August 2002	AU 2002231456 B2	24 May 2007
		AU 2002233025 B2	31 May 2007
		CN 1491124 A	21 Apr 2004
		CN 1491123 A	21 Apr 2004
		EP 1359962 A1	12 Nov 2003
		EP 1359963 A1	12 Nov 2003
		EP 1359963 B1	17 Jul 2013
		EP 2335761 A1	22 Jun 2011
		EP 2465565 A1	20 Jun 2012
		HK 1065265 A1	14 Dec 2007
		HK 1065493 A1	29 Jun 2007
		JP 2004524087 A	12 Aug 2004
		JP 4420605 B2	24 Feb 2010
		JP 2004524088 A	12 Aug 2004
		NZ 527088 A	29 Apr 2005
		NZ 527089 A	30 Sep 2005
		US 2004060559 A1	01 Apr 2004
		US 6935337 B2	30 Aug 2005
		US 2004055597 A1	25 Mar 2004
		US 7137388 B2	21 Nov 2006
		US 2005247314 A1	10 Nov 2005
		US 7614398 B2	10 Nov 2009
		US 2006237005 A1	26 Oct 2006
WO 02066107 A1	29 Aug 2002		
WO 2009/156921 A1	30 December 2009	AU 2009263813 A1	30 Dec 2009
		AU 2009263813 B2	19 Mar 2015
		CN 102083492 A	01 Jun 2011
		CN 102083492 B	25 Feb 2015
		EP 2313140 A1	27 Apr 2011
		JP 2011525833 A	29 Sep 2011
		US 2011100363 A1	05 May 2011
WO 2007/019625 A1	22 February 2007	AU 2006281985 A1	22 Feb 2007
		AU 2006281985 B2	02 Feb 2012
		CN 101242867 A	13 Aug 2008
		CN 101242867 B	18 May 2011

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/NZ2015/050005

This Annex lists known patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document/s Cited in Search Report		Patent Family Member/s	
Publication Number	Publication Date	Publication Number	Publication Date
		CN 102133447 A	27 Jul 2011
		CN 102133447 B	07 Jan 2015
		CN 103157165 A	19 Jun 2013
		EP 1924311 A1	28 May 2008
		JP 2009504277 A	05 Feb 2009
		NZ 564886 A	25 Feb 2011
		NZ 586325 A	12 Jan 2012
		NZ 597020 A	28 Jun 2013
		NZ 607890 A	25 Jul 2014
		US 2009120434 A1	14 May 2009
		US 2011271956 A2	10 Nov 2011
		US 8544465 B2	01 Oct 2013
		US 2009194106 A1	06 Aug 2009
		US 2011283999 A2	24 Nov 2011
		US 2013340757 A1	26 Dec 2013
		WO 2007019627 A1	22 Feb 2007

End of Annex

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

Form PCT/ISA/210 (Family Annex)(July 2009)