



US007700221B2

(12) **United States Patent**
Yeo

(10) **Patent No.:** **US 7,700,221 B2**
(45) **Date of Patent:** **Apr. 20, 2010**

(54) **ELECTRODE ASSEMBLY AND LITHIUM ION SECONDARY BATTERY USING THE SAME**

(75) Inventor: **Kwang Soo Yeo**, Gyeonggi-do (KR)

(73) Assignee: **Samsung SDI Co., Ltd.**, Suwon-si (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 938 days.

(21) Appl. No.: **11/157,475**

(22) Filed: **Jun. 20, 2005**

(65) **Prior Publication Data**

US 2006/0003221 A1 Jan. 5, 2006

(30) **Foreign Application Priority Data**

Jun. 22, 2004 (KR) 10-2004-0046669

(51) **Int. Cl.**

H01M 4/02 (2006.01)

H01M 4/64 (2006.01)

H01M 10/00 (2006.01)

(52) **U.S. Cl.** **429/94**; 429/161; 429/209; 429/211; 429/233

(58) **Field of Classification Search** None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,203,938 B1 * 3/2001 Yoshida et al. 429/94

2003/0180605 A1 * 9/2003 Mizutani 429/94

2005/0130035 A1 * 6/2005 Inada et al. 429/161

FOREIGN PATENT DOCUMENTS

JP 2001-35484 2/2001

JP 2001-155779 6/2001

KR 1996-0015982 5/1996

WO WO2004012284 * 2/2004

OTHER PUBLICATIONS

Patent Abstracts of Japan for Publication No.: 2001-035484; Date of publication of application Feb. 9, 2001, in the name of Chika Kanbe et al.

Patent Abstracts of Japan, Publication No. 2001-155779; Publication Date: Jun. 8, 2001; in the name of Taizo Sunano, et al.

* cited by examiner

Primary Examiner—Dah-Wei D Yuan


Assistant Examiner—Katherine Turner

(74) *Attorney, Agent, or Firm*—Christie, Parker & Hale, LLP

(57) **ABSTRACT**

An electrode assembly and a lithium ion secondary battery using the electrode assembly having reduced winding thickness. Active materials are coated on a first region of a negative electrode collector to which a negative electrode conductive tab is welded, and on an adjacent region overlapping the first region. Active materials are also coated on a first region of a positive electrode collector, to which a positive electrode conductive tab is welded, and an adjacent region overlapping the first region. Parts of the electrode assembly corresponding to the conductive tabs do not protrude from the electrode assembly, allowing for easy insertion of the electrode assembly into a can or pouch.

17 Claims, 6 Drawing Sheets

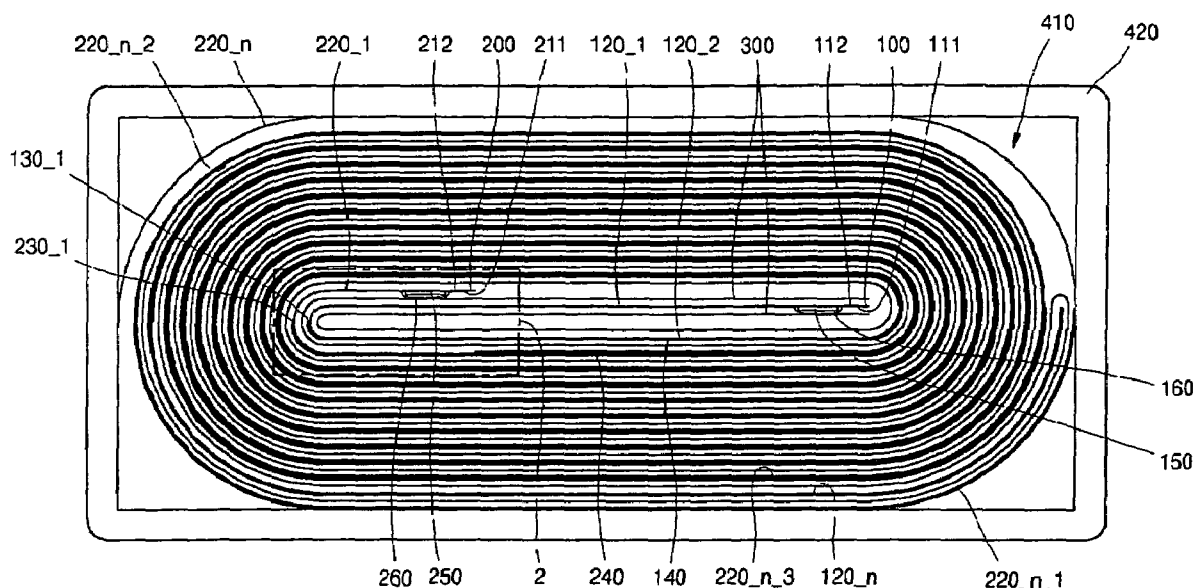

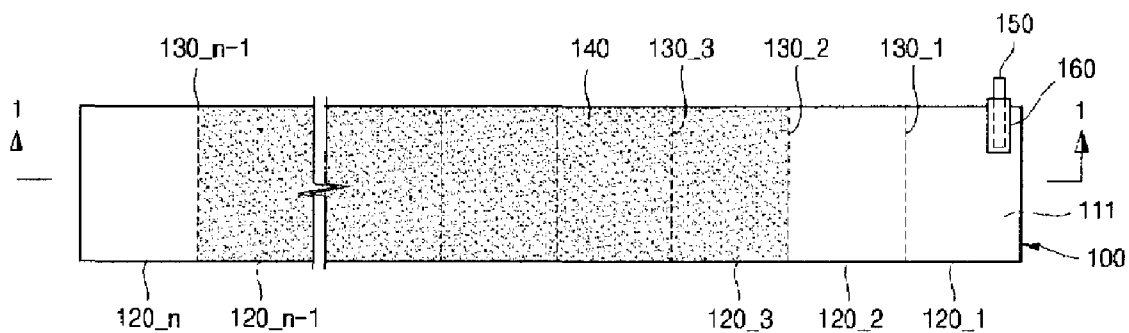


FIG. 1A.1

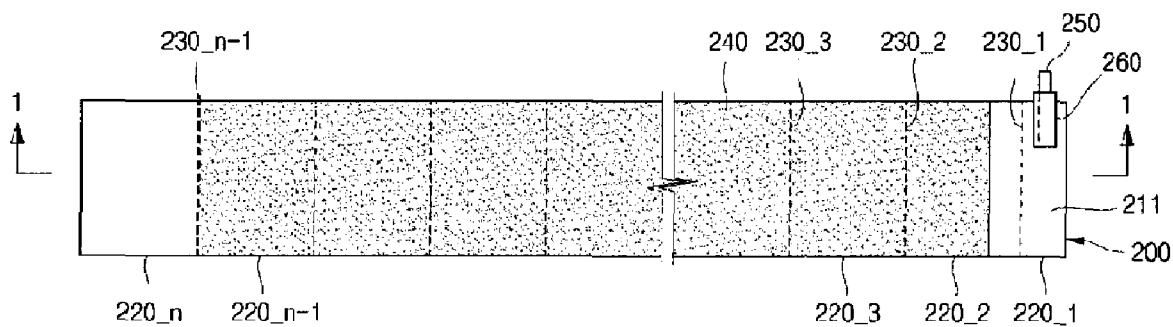


FIG. 1A.2

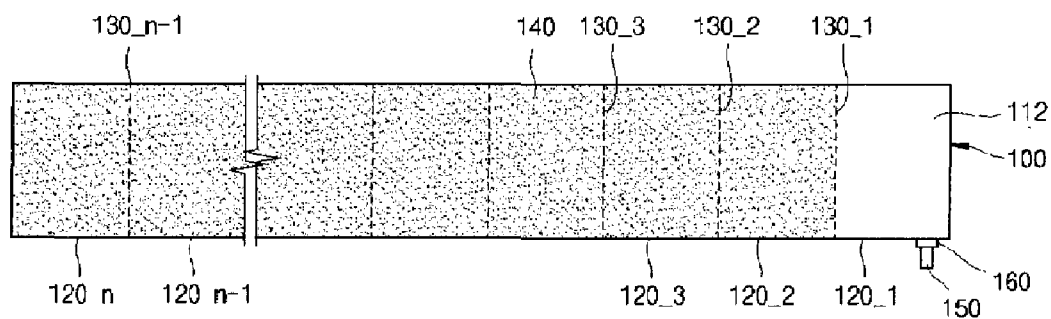


FIG. 1B.1

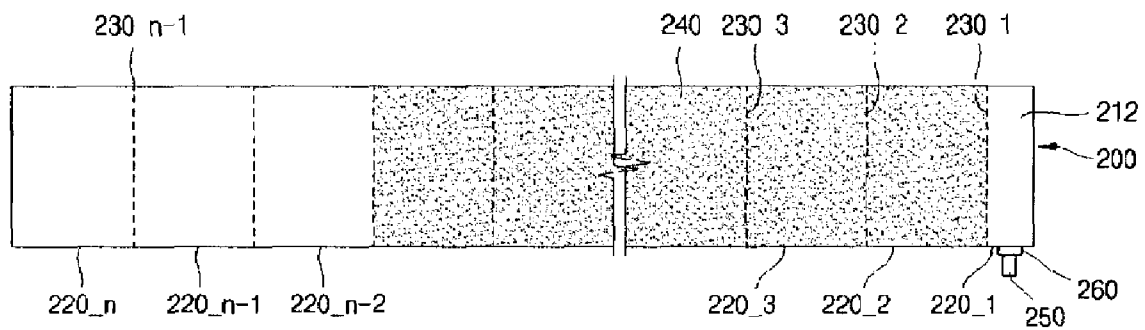


FIG. 1B.2

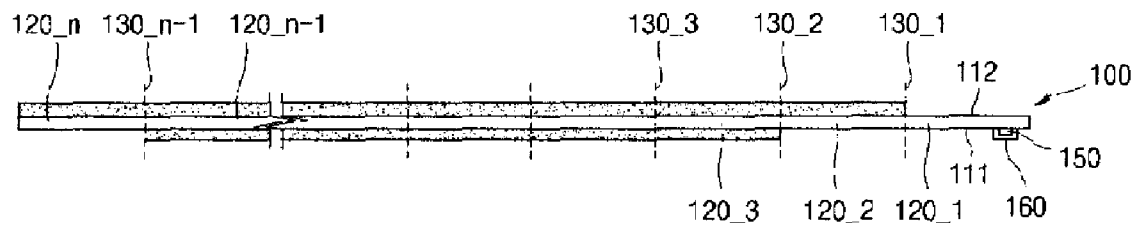


FIG. 1C.1

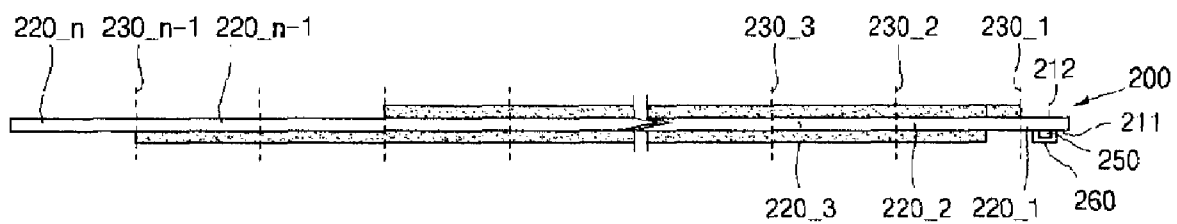


FIG. 1C.2

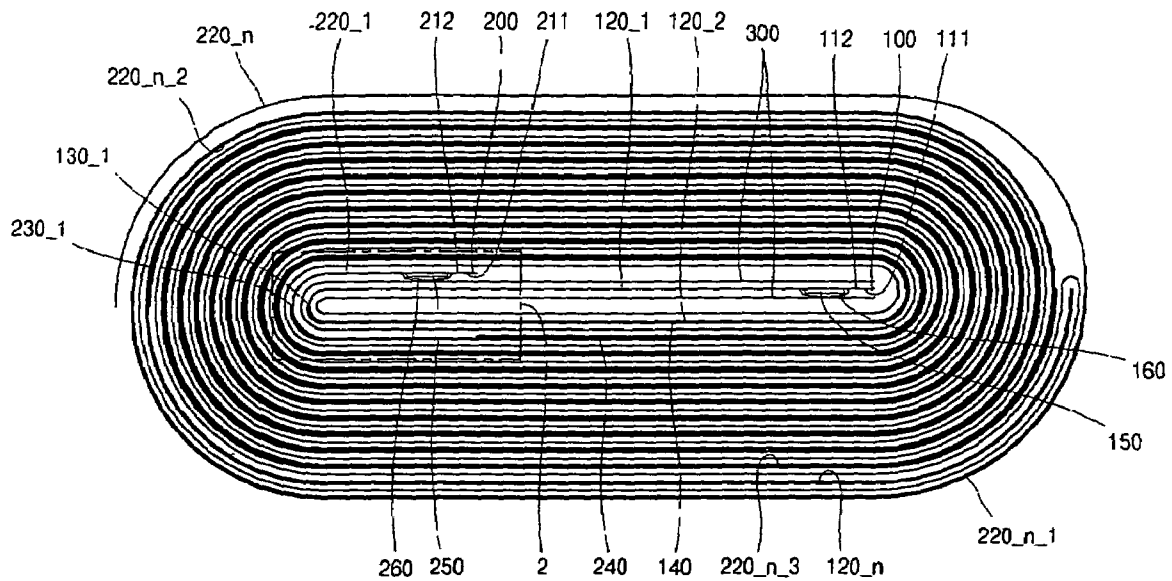


FIG. 2A

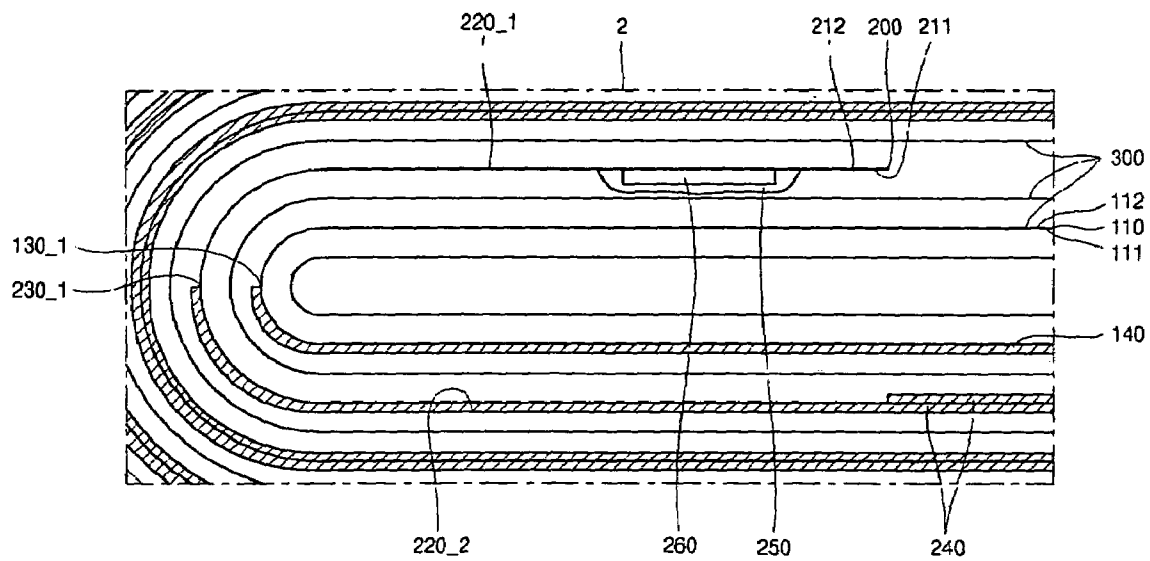


FIG. 2B

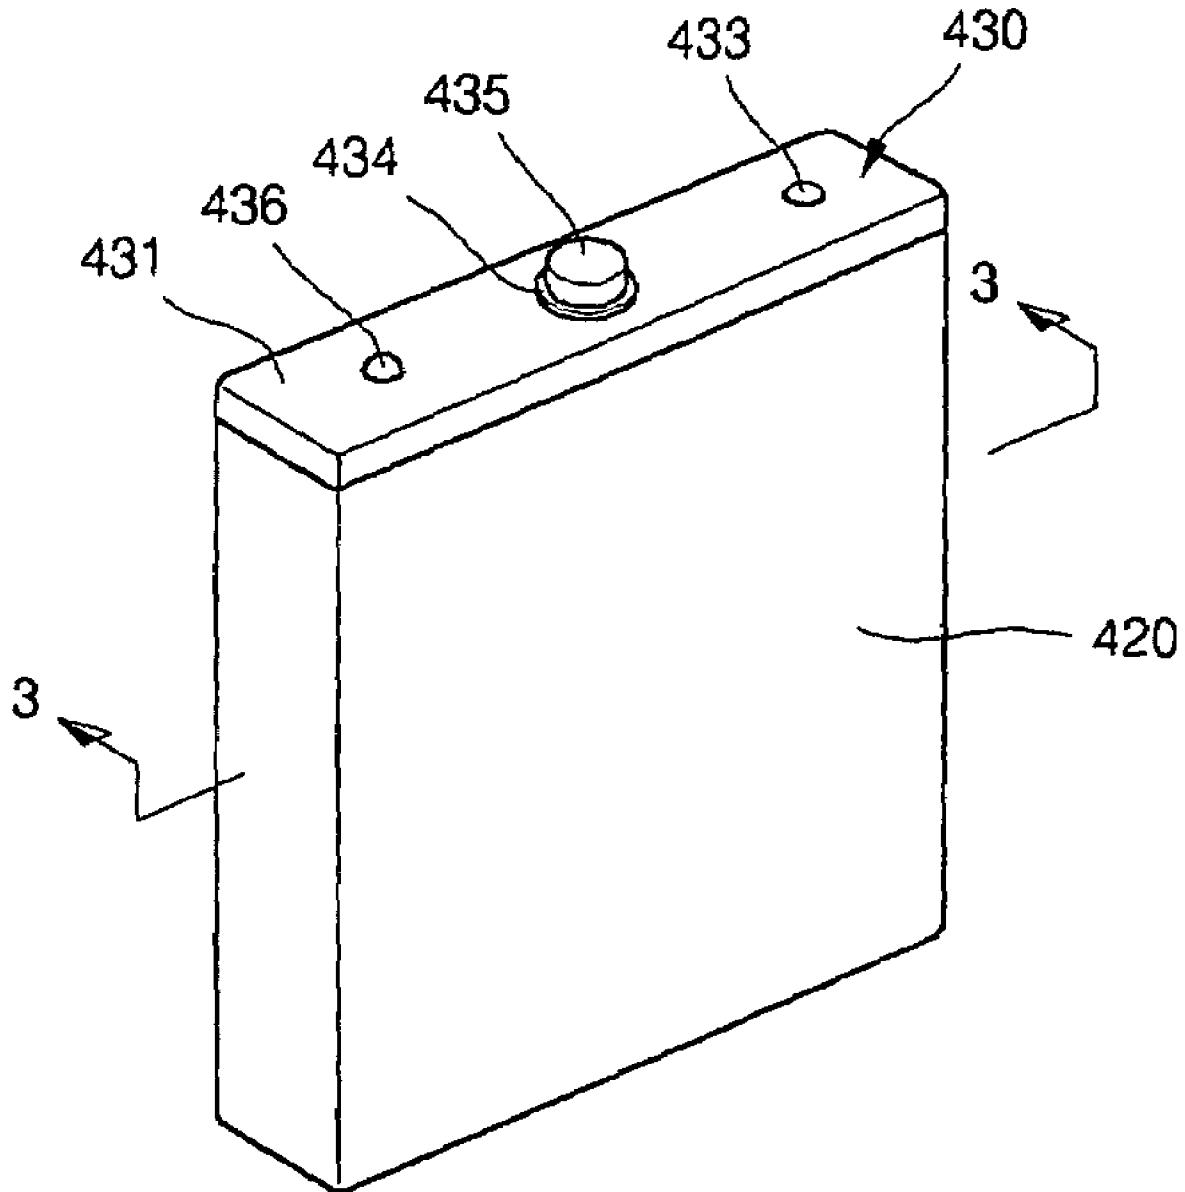


FIG.3A

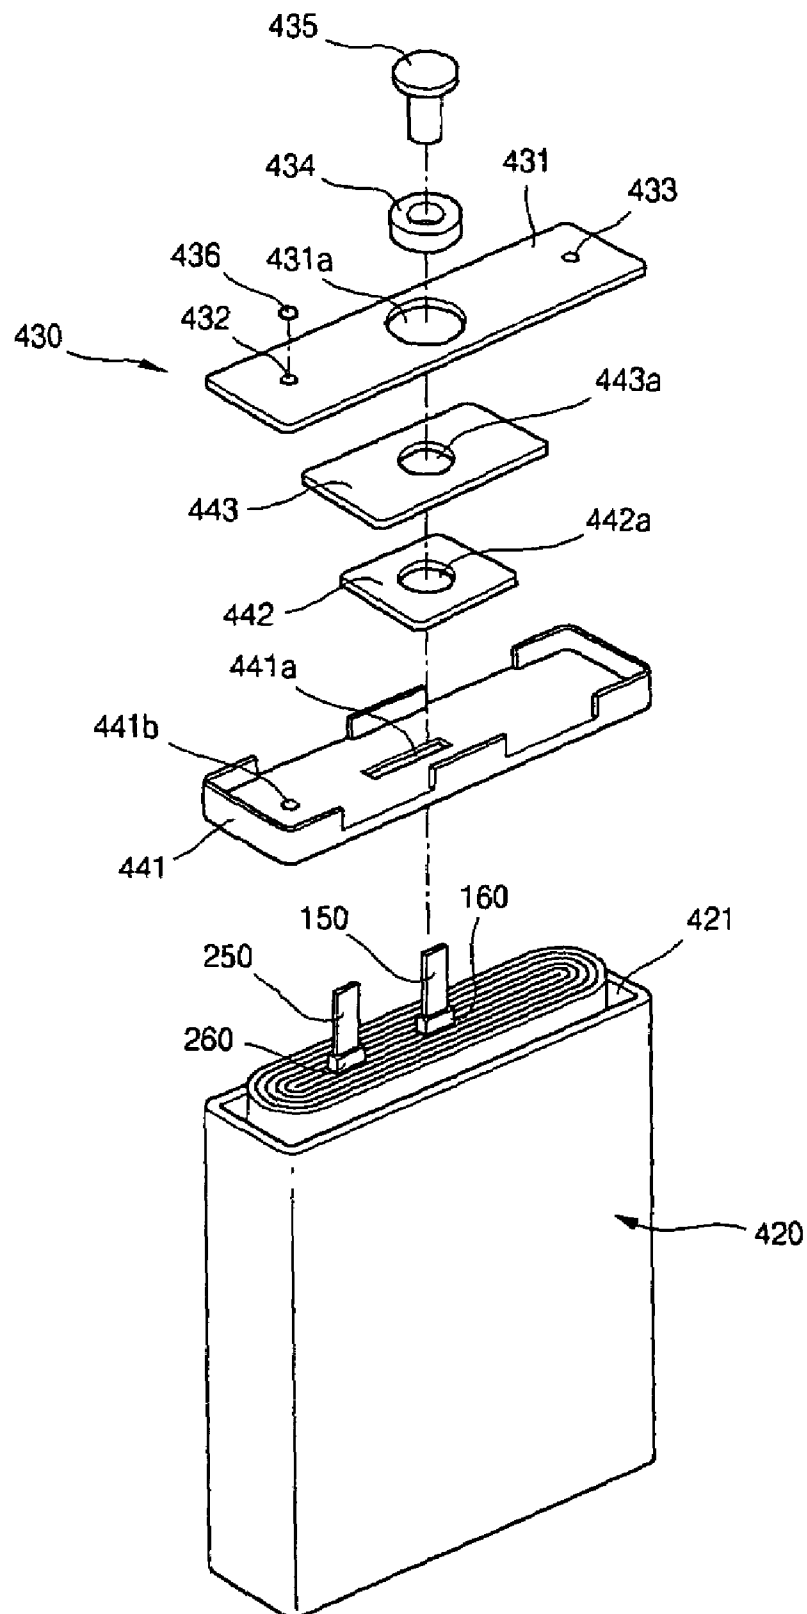


FIG.3B

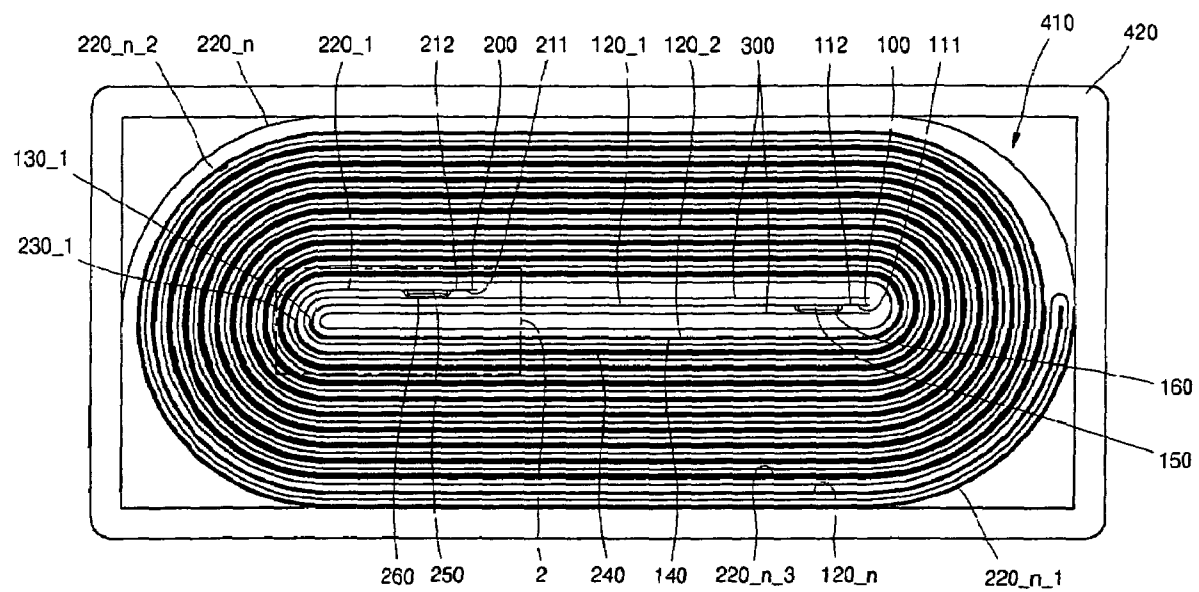


FIG.3C

ELECTRODE ASSEMBLY AND LITHIUM ION SECONDARY BATTERY USING THE SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to and the benefit of Korean Patent Application No. 2004-0046669 filed on Jun. 22, 2004 in the Korean Intellectual Property Office, the entire content of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a lithium ion secondary battery, and more particularly to an electrode assembly thereof.

2. Description of the Related Art

As is generally known in the art, a lithium ion secondary battery includes an electrode assembly which has positive and negative electrode collectors coated with active materials of a predetermined thickness and a separator interposed between the collectors and which is wound a number of times into a jelly roll configuration. After being wound a number of times into a jelly roll configuration, the electrode assembly is contained in a cylindrical or square-type can or a pouch and is sealed.

The collectors have conductive tabs welded thereto which extend a predetermined distance to the exterior so that charging electrical power can be applied from the exterior of the battery or discharging electrical power can be applied to the exterior of the battery. Particularly, positive and negative electrode conductive tabs are welded to the positive and negative electrode collectors, respectively. The positive and negative electrode conductive tabs have insulation tape attached to the surface thereof with a predetermined thickness to prevent the separator from being damaged and to avoid a direct short circuit.

The thickness of the collectors is about 10 μm , of the active materials, about 120 μm , of the conductive tabs, about 100 μm , and of the insulation tape, about 40 μm . The total thickness of the conductive tabs and the insulation tape is substantially larger than that of the active materials.

When the electrode assembly configured as above is wound into a jelly roll configuration, the wound regions corresponding to the conductive tabs and the insulation tape are substantially thicker than the remaining wound regions. Particularly, the wound regions corresponding to the conductive tabs and the insulation tape protrude further to the exterior than the remaining regions. When the electrode assembly is inserted into a can or pouch, therefore, such irregular thickness makes the insertion of the electrode assembly difficult, sometimes causing the protruding portions to deform. Such deformation may decrease the battery capacity.

Since the electrode assembly is not easily insertable into a can, it may be pressed or squeezed to achieve the desired result. As a result, the active materials corresponding to the lower conductive tap and the insulation tape are then compressed by a strong force and may have degraded usefulness in those parts. In other words, the active materials may have little use but still increase the thickness of the electrode assembly.

Accordingly, there is a need for an electrode assembly having a reduced overall winding thickness and a lithium ion secondary battery using the same.

SUMMARY OF THE INVENTION

In accordance with the present invention, an electrode assembly is provided having active materials formed on an outer surface of a region to which a conductive tab is welded, as well as the active materials being coated on an adjacent region overlapping the conductive tab, for reduced overall winding thickness.

An electrode assembly is provided including a negative electrode collector having a negative electrode conductive tab welded near an end thereof and negative electrode active materials coated on the outer peripheral edge thereof with a predetermined spacing from the negative electrode conductive tab. Additionally, the electrode assembly includes a positive electrode collector having a positive electrode conductive tab welded near an end thereof and positive electrode active materials coated on the outer peripheral edge thereof with a predetermined spacing from the positive electrode conductive tab, the positive electrode collector being wound a number of times together with the negative electrode collector.

In accordance with another embodiment of the present invention, a lithium ion secondary battery is provided including an electrode assembly including a negative electrode collector having a negative electrode conductive tab welded to a surface thereof while extending to the exterior and negative electrode active materials coated on both surfaces thereof. The electrode assembly may also include a positive electrode collector having a positive electrode conductive tab welded to a surface thereof while protruding to the exterior and positive electrode active materials coated on the outer peripheral edge of both surfaces thereof, except for a region corresponding to the positive electrode conductive tab during winding. The electrode assembly may be wound with a separator being interposed between both surfaces of the negative electrode collector. The battery may also include a can having first surface, a second surface connected to the first surface, a third surface connected to both the first and second surfaces, and an opening formed on the top thereof facing the third surface so that the electrode assembly may be coupled thereto; a cap assembly welded to the top of the can to prevent the electrode assembly from escaping to the exterior; and an electrolyte injectable into the can.

The electrode assembly and the lithium ion secondary battery using the same do not have active materials formed in the regions of the negative and positive electrode collectors constituting the electrode assembly, which overlap the conductive tabs. This minimizes the winding thickness of the electrode assembly. Particularly, the winding regions corresponding to the conductive tabs and the insulation tape do not protrude further to the exterior than the remaining regions. Such an electrode assembly is easily insertable into a can or pouch. This improves workability, suppresses deformation, and avoids degradation of battery capacity.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A.1 is a top view showing an unfolded negative electrode collector of an electrode assembly according to an embodiment of the present invention.

FIG. 1A.2 is a top view showing an unfolded positive electrode collector of an electrode assembly according to an embodiment of the present invention.

FIG. 1B.1 is a bottom view of the electrode assembly shown in FIG. 1A.1.

FIG. 1B.2 is a bottom view of the electrode assembly shown in FIG. 1A.2.

FIG. 1C.1 is a sectional view taken along line 1-1 of FIG. 1A.1.

FIG. 1C.2 is a sectional view taken along line 1-1 of FIG. 1A.2.

FIG. 2A is an overall sectional view showing an electrode assembly which is wound with a separator interposed.

FIG. 2B is a magnified view of region 2 of FIG. 2A.

FIG. 3A is a perspective view showing a lithium ion secondary battery according to an embodiment of the present invention.

FIG. 3B is an exploded perspective view of the lithium ion secondary battery shown in FIG. 3A.

FIG. 3C is a sectional view taken along line 3-3 of FIG. 3A.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGS. 1A.1, 1B.1 and 1C.1, the electrode assembly according to an embodiment of the present invention includes an approximately plate-shaped negative electrode collector **100**, negative electrode active materials **140** coated on predetermined regions of both surfaces of the negative electrode collector **100** and a negative electrode conductive tab **150** welded to a predetermined region of the negative electrode collector **100**. Referring to FIGS. 1A.2, 1B.2 and 1C.2, the electrode assembly may also include a positive electrode collector **200**, positive electrode active materials **240** formed by coating in predetermined regions of both surfaces of the positive electrode collector **200**, and a positive electrode conductive tab **250** welded to a predetermined region of the positive electrode collector **200**.

The negative electrode collector **100** has a substantially planar first surface **111** and substantially second surface **112** opposing the first surface **111**. The negative electrode collector **100** has substantially square or rectangular 1^{st} , 2^{nd} , . . . $(n-1)^{th}$, and n^{th} regions **120_1**, **120_2**, . . . **120_n-1**, and **120_n** formed on the first and second surfaces **111**, **112** and 1^{st} , 2^{nd} , . . . $(n-2)^{th}$, and $(n-1)^{th}$ folding lines **130_1**, **130_2**, . . . **130_n-2**, and **130_n-1** formed between the respective regions. The negative electrode collector **100** is wound a number of times by folding it about the respective folding lines **130_1**, **130_2**, . . . **130_n-2**, and **130_n-1**. The negative electrode collector **100** may be made up of, for example, copper foil or an equivalent thereof, but is not limited to that material.

The negative electrode active materials **140** are formed by coating the 3^{rd} , 4^{th} , . . . $(n-2)^{th}$, and $(n-1)^{th}$ regions **120_3**, **120_4**, . . . **120_n-2**, and **120_n-1** of the first surface **111** of the negative electrode collector **100**. The negative electrode active materials are also coated on the 2^{nd} , 3^{rd} , . . . $(n-1)$, and n^{th} regions **120_2**, **120_3**, . . . **120_n-1**, and **120_n** of the second surface **112** of the negative electrode collector **100** to a predetermined thickness. The negative electrode active materials **140** may be made up of, for example, graphite or an equivalent thereof, but are not limited to that material.

The negative electrode conductive tab **150** is welded to the first region **120_1** of the first surface **111** of the negative electrode collector **100** and protrudes a predetermined distance to the exterior. The surface of the negative electrode conductive tab **150** is enclosed by insulation tape **160** to prevent the separator (described in more detail below) from being damaged and avoid a direct short circuit to the positive electrode collector **200**. The negative electrode collector **150** may be made from, for example, nickel or an equivalent thereof, but is not limited to that material.

The positive electrode collector **200** has a substantially planar first surface **211** and a substantially planar second

surface **212** opposing the first surface **211**. The positive electrode collector **200** has substantially square or rectangular 1^{st} , 2^{nd} , . . . $(n-1)^{th}$, and n^{th} regions **220_1**, **220_2**, . . . **220_n-1**, and **220_n** formed on the first and second surfaces **211** and **212** and 1^{st} , 2^{nd} , . . . $(n-2)^{th}$, and $(n-1)^{th}$ folding lines **230_1**, **230_2**, . . . **230_n-2**, and **230_n-1** formed between the respective regions.

The first region **220_1** of the positive electrode collector **200** may have a width smaller than that of the remaining 2^{nd} , 3^{rd} , . . . $(n-1)^{th}$, and n^{th} regions **220_2**, **220_3**, . . . **220_n-1**, and **220_n**. More specifically, the first region **220_1** of the positive electrode collector **200** may have a width, length, or area ratio corresponding to 20-80% of that of the remaining regions. The positive electrode collector **200** is wound a number of times by folding it about the respective folding lines **230_1**, **230_2**, . . . **230_n-2**, and **230_n-1**. The positive electrode collector **200** may be made from, for example, aluminum foil, aluminum mesh, or an equivalent thereof, but is not limited to that material.

The positive electrode active materials **240** are coated on the 3^{rd} , 4^{th} , . . . $(n-2)^{th}$, and $(n-1)^{th}$ regions **220_3**, **220_4**, . . . **220_n-2**, and **220_n-1** of the first surface **211** of the positive electrode collector **200**. The positive electrode active materials **240** are also coated on the 2^{nd} , 3^{rd} , . . . $(n-4)^{th}$, and $(n-3)^{th}$ regions **220_2**, **220_3**, . . . **220_n-4**, and **220_n-3** of the second surface **212** of the positive electrode collector **200** with a predetermined thickness. Additionally, the positive electrode active materials **240** may also be coated on a predetermined region of the second region **220_2** of the first surface **211** of the positive electrode collector **200**. More specifically, the positive electrode active materials **240** may be coated on the outer peripheral edge of the second region **220_2** of the first surface **211**, except for a part thereof which contacts the positive electrode conductive tab **250** (described in more detail below) as the positive electrode collector **200** is folded. This minimizes the winding thickness because the positive electrode active materials **240** are not coated on a region which directly contacts the positive electrode conductive tab **250** as the positive electrode collector **200** is wound. As a result, the total thickness does not increase from the combined thickness of the positive electrode conductive tab **250** and the insulation tape **260**, since the positive electrode active materials **240** are not coated on a region contacting them. Such thickness control minimizes the amount of protrusion of the electrode assembly after it is wound. The positive electrode active materials **240** may be made up of lithium cobalt oxide or an equivalent thereof, but are not limited to that material.

The positive electrode conductive tab **250** is welded to the first region **220_1** of the first surface **211** of the positive electrode collector **200** and extends a predetermined distance to the exterior. The surface of the positive electrode conductive tab **250** is enclosed by the insulation tape **260** to prevent the separator (not shown) from being damaged by the positive electrode conductive tab **250** and to avoid a direct short circuit of the negative electrode collector **100**. The positive electrode collector **250** may be made up of aluminum or an equivalent thereof, but is not limited to that material.

FIG. 2A shows a sectional view of an electrode assembly which is wound with a separator interposed and FIG. 2B shows a magnified view of region 2 of FIG. 2A. In the drawings, the negative electrode collector **100**, the separator **300**, and the positive electrode collector **200** are shown to be positioned with some spacing among them for ease of understanding. It is to be noted, however, that they are wound with respect to one another with little spacing in the actual electrode assembly.

5

As shown, the negative electrode collector **100** coated with the negative electrode active materials **140** is wound in the counterclockwise direction about the negative electrode conductive tab **150**. Specifically, the negative electrode collector **100** is wound beginning with the first and second regions **120_1** and **120_2** of the first surface **111** facing each other. The negative electrode conductive tab **150** is welded to the first region **120_1** of the first surface **111** of the negative electrode collector **100** and is enclosed by insulation tape **160**. The first and second surfaces **111** and **112** of the negative electrode collector **100** are enclosed by the separator **300** to prevent the negative electrode collector **100** from directly short-circuiting the positive electrode collector **200**. The separator **300** is also interposed between the first and second regions **120_1** and **120_2** of the first surface **111** of the negative electrode collector **100** to prevent the first and second regions **120_1** and **120_2** from directly contacting each other.

The negative electrode active materials **140** coating the negative electrode collector **100** are coated starting from the third region **120_3** of the first surface **111** and from the second region **120_2** of the second surface **112**. The negative electrode active materials **140** are coated up to the $(n-1)^{th}$ region **120_{n-1}** of the first surface **111** of the negative electrode collector **100** and up to the n^{th} region **120_n** of the second region **112** thereof.

The first region **220_1** of the first surface **211** of the positive electrode collector **200** is fastened to the first region **120_1** of the second surface **112** of the negative electrode collector **100** with the separator **300** interposed between them. The first region **220_1** of the positive electrode collector **200** has a width or length smaller than the remaining regions. The positive electrode conductive tab **250** is welded to the first region **220_1** of the first surface **211** and is enclosed by insulation tape **260**. The positive electrode active materials **240** coating the first surface **211** of the positive electrode collector **200** are coated on a predetermined part of the second region **220_2**. More specifically, the positive electrode active materials **240** are coated on the outer peripheral edge of the second region **220_2** overlapping the positive electrode conductive tab **250** and minimizing the increase in thickness due to the positive electrode conductive tab **250** and insulation tape **260**. In practice, such a coating structure of the positive electrode active materials **240** results in thickness reduction of about 100 μ m in the electrode assembly.

The positive electrode active materials **240** coating the second surface **212** of the positive electrode collector **200** are coated starting from the second region **220_2**. The first surface **220_1** of the positive electrode collector **200** is wound together when the negative electrode collector **100** is folded for the second time and, at the end of winding, the positive electrode collector **200** encloses the negative electrode collector **100**. In the case of a square-type can, the can itself acts as the positive electrode and short circuiting between the negative electrode collector **100** and the can may be effectively avoided. The positive electrode active materials **240** are coated up to the $(n-1)^{th}$ region **220_{n-1}** of the first surface **211** of the positive electrode collector **200** and up to the $(n-3)^{th}$ region **220_{n-3}** of the second region **212** thereof. Thus, the positive electrode collector **200** is directly exposed to the surface of the electrode assembly without the positive electrode active materials **240** being interposed.

FIG. 3A shows a perspective view of a lithium ion secondary battery according to an embodiment of the present invention. Additionally, FIG. 3B shows an exploded perspective view of the lithium ion secondary battery shown in FIG. 3A and FIG. 3C shows a sectional view taken along line 3-3 of FIG. 3A.

6

As shown, the lithium ion secondary battery according to an embodiment of the present invention includes an electrode assembly **410** (**100** and **200** are combined into **410**) (FIG. 3C), a can **420** for containing the electrode assembly **410**, an electrolyte (not shown) injectable into the can **420** to enable lithium ions to move, and a cap assembly **430** for covering the can **420** and preventing the electrode assembly **410** and the electrolyte from escaping to the exterior. Although a square-type battery is given as an example herein, the present invention may also be applied to other batteries, for example, cylindrical and pouch-type batteries.

The electrode assembly **410** includes a negative electrode collector **100** having negative electrode active materials **140** (for example, graphite) attached thereto, a positive electrode collector **200** having positive electrode active materials **240** (for example, lithium cobalt oxide) attached thereto, and a separator **300** enclosing the negative and positive electrode collectors **100** and **200** to avoid a short circuit and to enable only lithium ions to move. The negative and positive electrode collectors **100** and **200** and the separator **300** are wound a number of times into a jelly roll configuration and are contained in the can **420**. The negative electrode collector **100** is provided with insulation tape **160** after a negative electrode conductive tab **150** is welded thereto and the positive electrode collector **200** is provided with insulation tape **260** after a positive electrode conductive tab **250** is welded thereto.

The coating configuration of the negative and positive electrode active materials **140**, **240** include all features described with reference to FIGS. 1a.1, 1a.2, 1b.1, 1b.2, 1c.1, 1c.2, 2a and 2b. Specifically, the negative electrode active materials **140** are coated on the 2^{nd} , 3^{rd} , $\dots$, $(n-2)^{th}$, and $(n-1)^{th}$ regions **120_2**, **120_3**, $\dots$, **120_{n-2}**, and **120_{n-1}** of the first surface **111** of the negative electrode collector **100** and on the 2^{nd} , 3^{rd} , $\dots$, $(n-1)^{th}$, and n^{th} regions **120_2**, **120_3**, $\dots$, **120_{n-1}**, and **120_n** of the second surface **112** thereof. The positive electrode active materials **240** are coated from a predetermined region of the second region **220_2** of the first surface **211** of the positive electrode collector **200**, which is the outer peripheral edge of a region thereof overlapping the positive electrode conductive tab **250** and the insulation tape **260**, to the $(n-1)^{th}$ region. The positive electrode active materials **240** are also coated on the 2^{nd} , 3^{rd} , $\dots$, $(n-4)^{th}$, and $(n-3)^{th}$ regions **220_2**, **220_3**, $\dots$, **220_{n-4}**, and **220_{n-3}** of the second surface **212**.

Such a structure of the electrode assembly **410** minimizes the increase in thickness caused by the negative or positive electrode conductive tab **150**, **250** and allows easy insert of the electrode assembly **410** into the can **420**.

The can **420** has a substantially hexahedron shape with a top opening **421**. The can **420** may be made up of aluminum (Al), iron (Fe), an alloy, or an equivalent thereof, but is not limited to those materials.

The electrolyte (not shown) is injected into the can **420** and is positioned between the negative and positive electrode collectors **100**, **200** of the electrode assembly **410**. The electrolyte acts as a medium for movement of lithium ions created by the electrochemical reaction between the negative and positive electrode collectors **100**, **200** inside the battery during charging/discharging and may be a non-aqueous organic electrolyte, which is a mixture of lithium salt and a high-purity organic solution. The electrolyte may also be made up of a polymer using a high molecular electrolyte.

An insulation case **441**, a terminal plate **442**, and an insulation plate **443** may be additionally coupled to the opening **421** of the can **420** on top of the electrode assembly **410**, but these components are not always necessary. The insulation case **441**, the terminal plate **442**, and the insulation plate **443**

7

have through holes **441a**, **442a**, **443a** formed therein, respectively, so that the negative and positive electrode conductive tabs **150** and **250** may protrude through in the upward direction. The insulation plate **442** has an electrolyte through-hole **441b** formed therein so that, when an electrolyte is injected 5 through the cap plate **431** (described later), it can easily flow toward the electrolyte assembly **410**.

The cap assembly **430** is welded to the opening **421** of the can **420** by laser welding and includes a substantially rectangular plate-shaped cap plate **431**. The cap plate **431** has a through-hole **431a** formed at the center thereof with a predetermined size, an electrolyte injection hole **432** formed on a side thereof for electrolyte injection, and a safety vent **433** formed on the other side thereof with a comparatively small thickness. An insulation gasket **434** is coupled to the through-hole **431** a of the cap plate **431** and a negative electrode terminal **435** is coupled to the insulation gasket **434**. The electrode terminal **435** is welded to the negative electrode conductive tab **150** to act as a negative electrode during charging or discharging of the battery. The positive electrode conductive tab **250** is welded between the electrode injection hole **432** of the cap plate **431** and the electrode terminal **435**, so that the cap plate **431** and the can **420** as a whole act as a positive electrode. The electrolyte injection hole **432** of the cap plate **431** has a plug **436** coupled and welded thereto so that after electrolyte is injected, the electrolyte is prevented from leaking out. 15

As mentioned above, the electrode assembly and the lithium ion secondary battery using the electrode assembly do not have active materials formed in the regions of the negative and positive electrode collectors constituting the electrode assembly, which overlap the conductive tabs. This minimizes the winding thickness of the electrode assembly. Specifically, the winding regions corresponding to the conductive tabs and the insulation tape do not protrude further to the exterior than the remaining regions. Such an electrode assembly can be easily inserted into a can or pouch. This improves workability, suppresses deformation, and avoids degradation of battery capacity. 20

Although exemplary embodiments of the present invention have been described for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims. 25

What is claimed is:

1. An electrode assembly comprising:

a negative electrode collector having a negative collector first surface and a negative collector second surface opposite the negative collector first surface and extending between a negative electrode collector first end and a negative electrode collector second end, the negative electrode collector including a negative electrode conductive tab adjacent to the negative electrode collector first end and a negative electrode active material coated on the negative collector first surface spaced from the negative electrode conductive tab, wherein the negative collector first surface and the negative collector second surface each have a plurality of regions and a plurality of folding lines, each of the plurality of folding lines between adjacent regions of the plurality of regions, wherein a number of the plurality of folding lines is one less than a number of the plurality of regions and wherein the negative electrode active materials are coated on all but a first two regions and a last region of the plurality of regions of the negative collector first 50

8

surface and coated on all but a first region of the plurality of regions of the negative collector second surface; and a positive electrode collector having a positive collector first surface and a positive collector second surface opposite the positive collector first surface and extending between a positive electrode collector first end and a positive electrode collector second end, the positive electrode collector including a positive electrode conductive tab adjacent to the positive electrode collector first end wherein the positive electrode collector sequentially includes, in a direction from the positive electrode collector first end to the positive electrode collector second end, (1) a region in which both the positive collector first surface and the positive collector second surface are uncoated, (2) a region in which only the positive collector second surface is coated by a positive electrode active material, and (3) a region in which both the positive collector first surface and the positive collector second surface are coated by the positive electrode active material, 15

wherein the positive electrode collector and the negative electrode collector are wound together from their respective first ends to their respective second ends.

2. The electrode assembly as claimed in claim 1, wherein the negative electrode conductive tab is welded to a first region of the plurality of regions of the negative collector first surface and wherein the negative electrode conductive tab protrudes from the electrode assembly and is partially covered by insulation tape. 20

3. The electrode assembly as claimed in claim 1, wherein the negative electrode collector is wound about a first folding line of the plurality of folding lines and wherein the negative collector first surface of a first region of the plurality of regions and the negative collector first surface of a second region of the plurality of regions are fastened to each other. 25

4. The electrode assembly as claimed in claim 1, wherein a separator is on the negative collector first surface and on the negative collector second surface.

5. The electrode assembly as claimed in claim 1, wherein the positive collector first surface and the positive collector second surface each have a plurality of regions and a plurality of folding lines, each of the plurality of folding lines-between adjacent regions of the plurality of regions, and wherein a number of the plurality of folding lines is one less than a number of the plurality of regions. 30

6. The electrode assembly as claimed in claim 5, wherein the positive electrode active material is coated on all but a first region and a last region of the plurality of regions of the positive collector first surface and are coated on all but a first region and a last three regions of the plurality of regions of the positive collector second surface. 35

7. The electrode assembly as claimed in claim 5, wherein the positive electrode conductive tab is welded to a first region of the plurality of regions of the positive collector first surface and wherein the positive electrode conductive tab protrudes from the electrode assembly and is partially enclosed by insulation tape. 40

8. The electrode assembly as claimed in claim 6, wherein the positive electrode active material is on a second region of the plurality of regions of the positive collector first surface. 45

9. The electrode assembly as claimed in claim 6, wherein the positive electrode active material is on an outer peripheral edge of a second region of the plurality of regions of the positive collector first surface that overlaps the positive electrode conductive tab wherein the positive electrode collector is wound about a first folding line of the plurality of folding lines. 50

9

10. The electrode assembly as claimed in claim 5, wherein a first region of the plurality of regions of the positive electrode collector has a length less than a length of other regions of the plurality of regions.

11. The electrode assembly as claimed in claim 1, wherein the negative collector first surface and the negative collector second surface each have a plurality of regions, and wherein the positive collector first surface and the positive collector second surface each have a plurality of regions; wherein the negative collector second surface of a first region of the plurality of regions of the negative electrode collector is fastened to and wound with the positive collector first surface of a first region of the plurality of regions of the positive electrode collector.

10

12. The electrode assembly as claimed in claim 1, wherein the negative electrode collector comprises copper foil.

13. The electrode assembly as claimed in claim 1, wherein the negative electrode active materials comprise graphite.

14. The electrode assembly as claimed in claim 1, wherein the negative electrode conductive tab is a nickel tab.

15. The electrode assembly as claimed in claim 1, wherein the positive electrode collector comprises aluminum foil or aluminum mesh.

16. The electrode assembly as claimed in claim 1, wherein the positive electrode active materials comprise lithium cobalt oxide.

17. The electrode assembly as claimed in claim 1, wherein the positive electrode tab is an aluminum tab.

* * * * *