



(22) Date de dépôt/Filing Date: 2009/10/08

(41) Mise à la disp. pub./Open to Public Insp.: 2010/04/15

(30) Priorité/Priority: 2008/10/15 (DE10 2008 051 370.9-15)

(51) Cl.Int./Int.Cl. *F03B 3/12* (2006.01),
E02B 9/08 (2006.01), *F03B 13/26* (2006.01)


(71) Demandeur/Applicant:
VOITH PATENT GMBH, DE

(72) Inventeurs/Inventors:
ARLITT, RAPHAEL, DE;
STARZMANN, RALF, DE

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : CENTRALE ELECTRIQUE SOUS-MARINE AVEC COMMANDE DE PUISSANCE PASSIVE

(54) Title: AN UNDERWATER POWER PLANT WITH PASSIVE POWER CONTROL

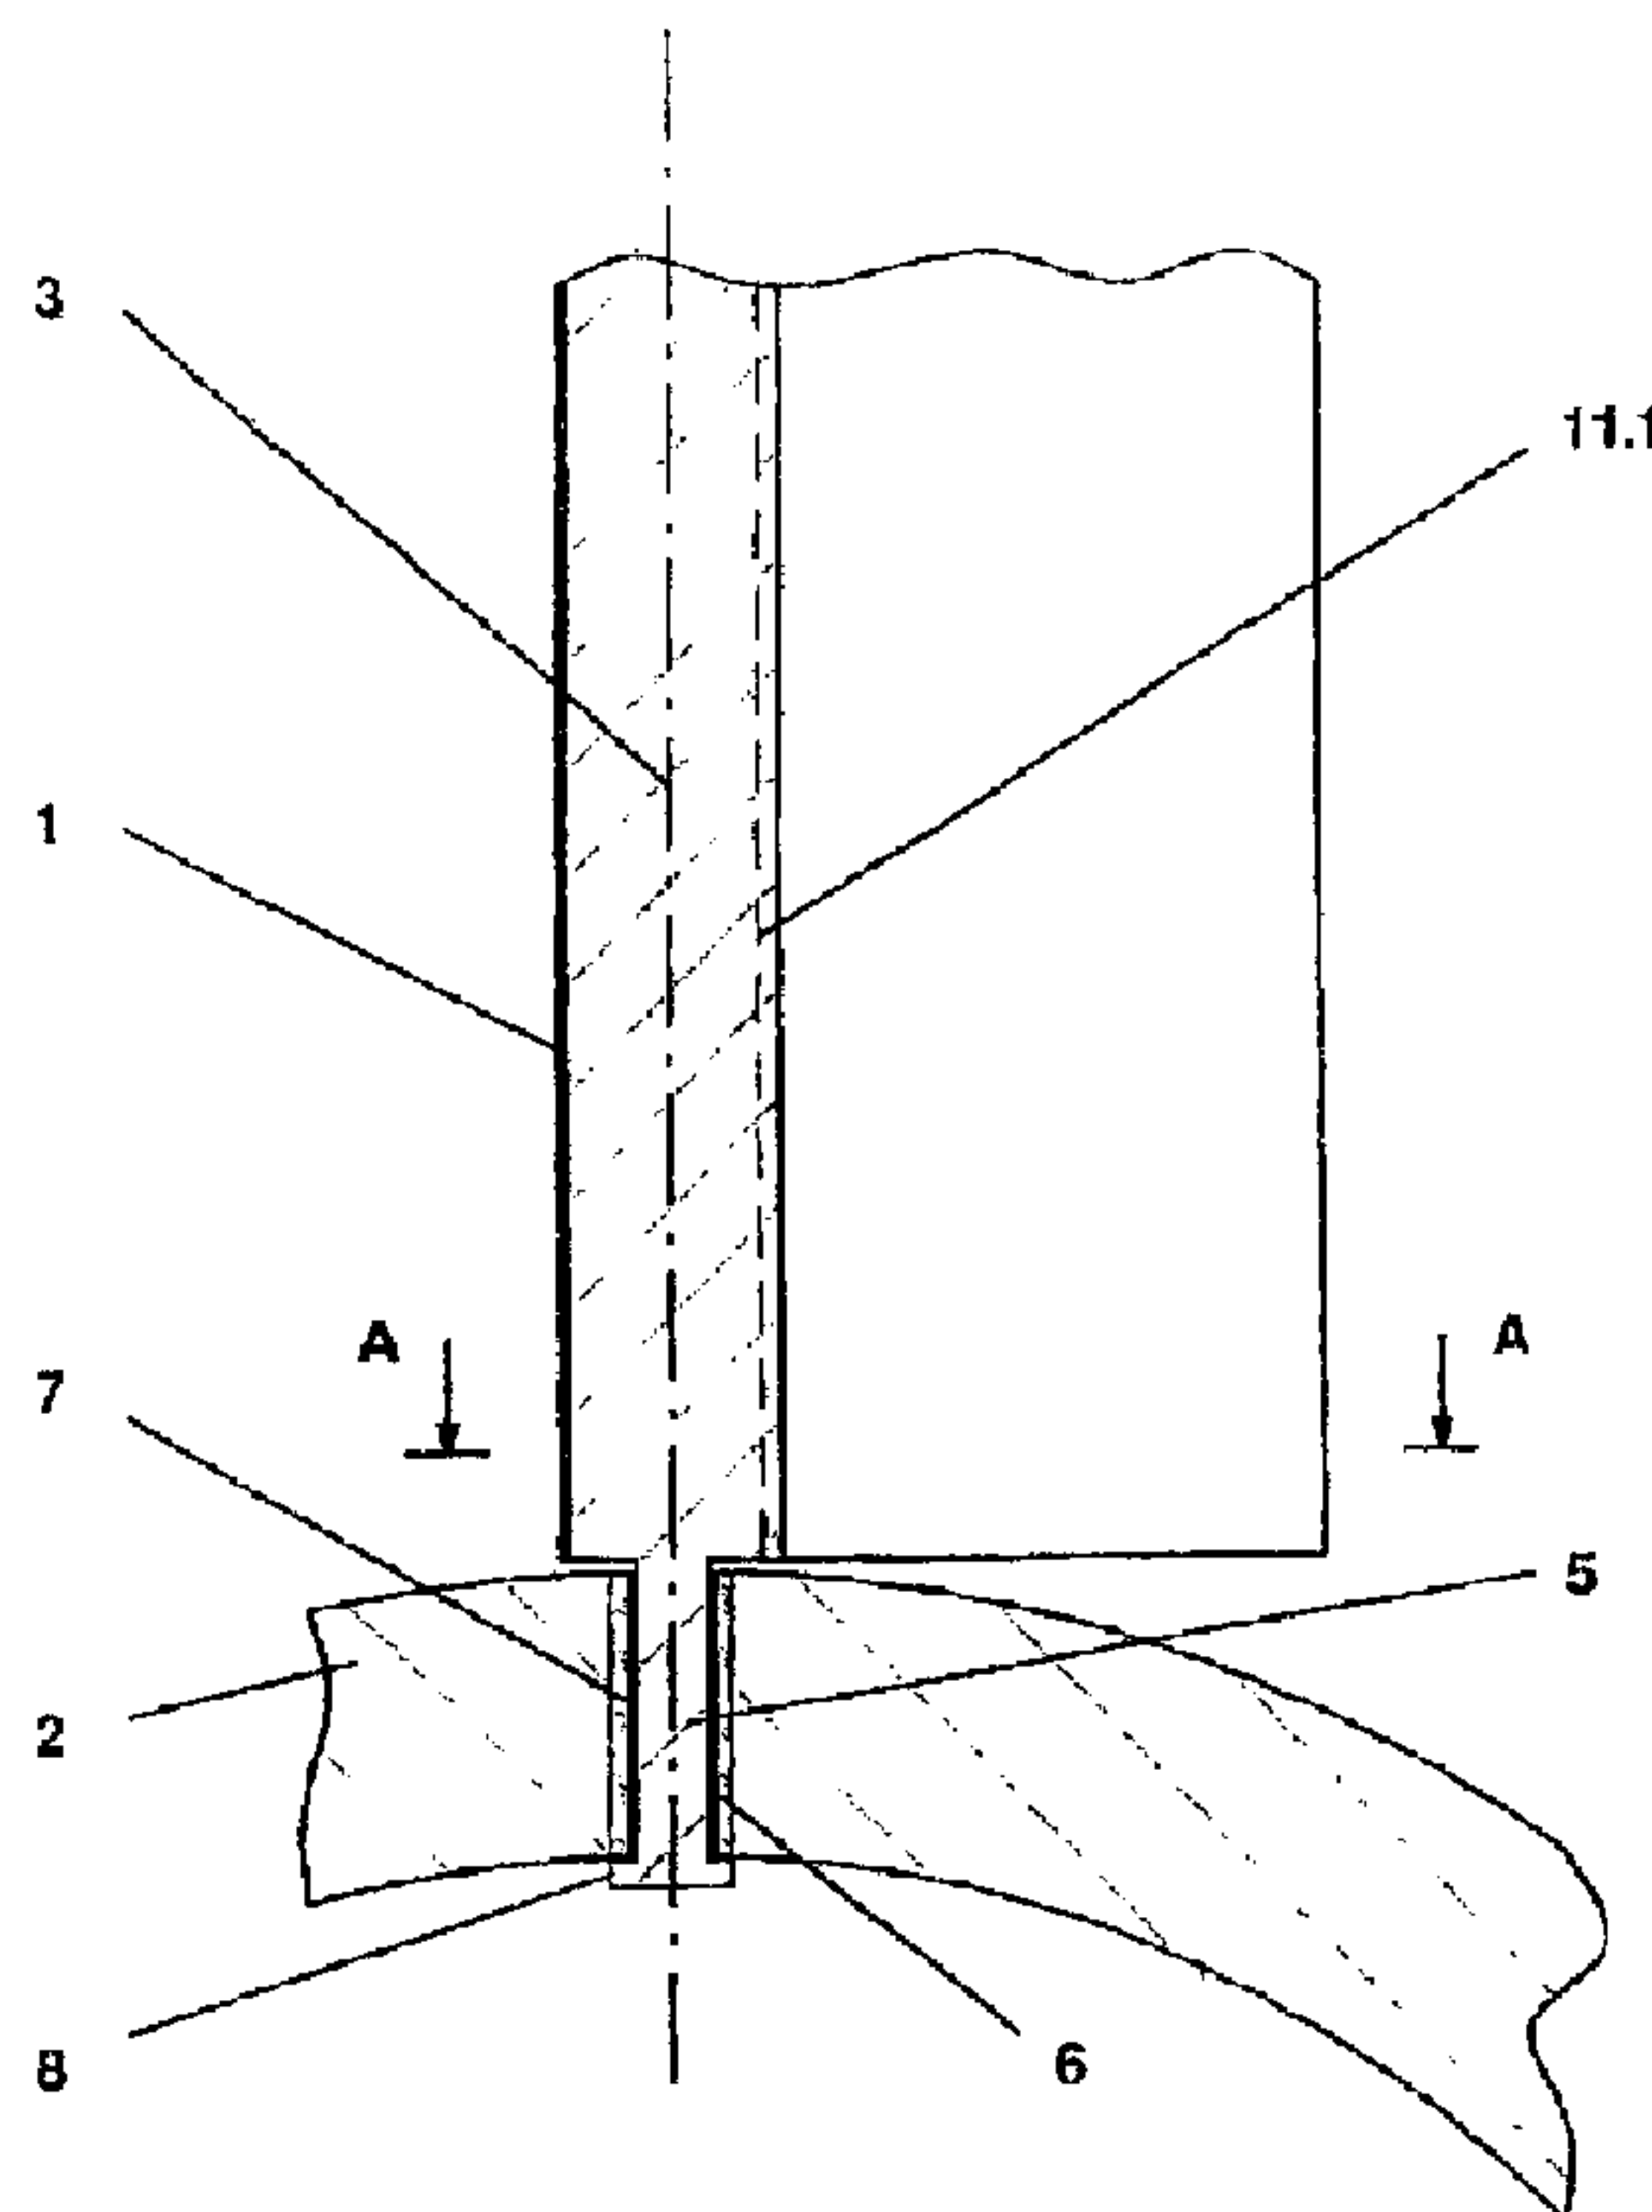

(57) Abrégé/Abstract:

The invention relates to an underwater power plant which comprises a propeller-shaped water turbine in horizontal rotor configuration with a plurality of rotor blades which are fastened to a revolving unit, with each rotor blade being associated with a swivel axis which extends substantially along the respective rotor blade, with the rotor blades being arranged elastically about the swivel axis at least in sections of the longitudinal extension concerning a torsion and/or the fastening of the rotor blades to the revolving unit enabling a rotation of the rotor blades about the swivel axis, and the position of the swivel axis is chosen relative to the profile shape of the rotor blades in such a way that hydrodynamic forces acting during operation on the rotor blade generate a moment which is directed in the feathered pitch position and the centrifugal forces originating during the rotation cause restoring centrifugal moments on the rotor blade against the feathered pitch position.

Abstract

The invention relates to an underwater power plant which comprises a propeller-shaped water turbine in horizontal rotor configuration with a plurality of rotor blades which are fastened to a revolving unit, with each rotor blade being associated with a swivel axis which extends substantially along the respective rotor blade, with the rotor blades being arranged elastically about the swivel axis at least in sections of the longitudinal extension concerning a torsion and/or the fastening of the rotor blades to the revolving unit enabling a rotation of the rotor blades about the swivel axis, and the position of the swivel axis is chosen relative to the profile shape of the rotor blades in such a way that hydrodynamic forces acting during operation on the rotor blade generate a moment which is directed in the feathered pitch position and the centrifugal forces originating during the rotation cause restoring centrifugal moments on the rotor blade against the feathered pitch position.

AN UNDERWATER POWER PLANT WITH PASSIVE POWER CONTROL

The invention relates to an underwater power plant with passive power control, especially a tidal power plant, having a propeller-shaped water turbine in horizontal rotor configuration.

Underwater power plants which absorb kinetic energy in a free-standing manner without any dam structure from a water flow are especially suitable for power generation from an ocean current, preferably a tidal current. An advantageous embodiment for underwater power plants comprises propeller-shaped water turbines with a plurality of rotor blades which are fixed to a revolving unit.

Such a water turbine can be fastened to a support structure via a machine gondola in which an electric generator is typically accommodated, which support structure is arranged to be fixed to foundations in the floor of the water body or to be floating. For the economic design of generic underwater power plants, especially for power generation from a tidal current, the mean flow speeds that occur over the course of the year are typically used as a basis. However, in the case of a location of the plant in the sea, inflow speeds may occur in certain cases at least over short periods of time which lie above the chosen plant configuration. Such extreme situations occur especially under stormy conditions, for which the wind and waves run in the direction of the tidal current. The mechanical power absorbed by the water turbine from the flow needs to be limited in such cases of stress.

A known form of power limitation provides the use of an active blade angle adjusting device. This allows choosing the angle of attack of the rotor blades of the driving flow in such a way that a desired power curve is obtained. In extreme situations, the rotor blades are guided in the direction of the feathered pitch position and the power intake is thus limited. Accordingly, the components downstream of the water turbine are protected in the drive train against overloading. The disadvantageous aspect in this approach is the constructional effort required for arranging such a blade angle adjusting device. Moreover, additional movable components are necessary in the revolving unit which lead to an increased failure risk and consequently require regular maintenance.

In order to achieve a sturdy configuration of the system that requires as little maintenance as possible, speed guidance by means of the supporting effect through the electric generator in the drive train can be caused as an alternative measure for power limitation. The generator and possibly further braking apparatuses will reduce the speed of the rotor in the case of an overload in order to guide the same away from power optimum. This reduction in speed can go so far that a stall occurs at the profile of the rotor blades, so that power intake is reduced efficiently. The disadvantageous aspect in this approach is that mechanical loads occurring under the conditions of a stall are high as a result of the occurring blade excitations and require a respective configuration of the structural stiffness of the rotor blades. A high constructional effort is the result of this requirement placed on strength and makes the water turbine heavier.

When the above speed guidance of the water turbine for power limitation is arranged in such a way that in the case of overload an increase of speed to a rotational speed above the best point is allowed, it is possible to prevent stalling. However, high forces will act on the water turbine in the range of high rotational speeds. The increasing centrifugal moments need to be taken into account for the design of the plant especially in the range of high speeds.

The invention is based on the object of providing a power limitation in the case of overloading which is simple from a constructional standpoint and for which it is possible to omit an associated open-loop and closed-loop control device. Moreover, the power limitation shall be arranged in such a way that the impact of excessively high loads on the rotor can be excluded as a result of the construction.

The inventors have recognized for the solution of the above object that a sturdy and efficient power limitation is provided by means of self-adjustment of the rotor blades for a water turbine in horizontal-rotor design. For this purpose, a water turbine arranged in the manner of a propeller with a plurality of rotor blades fastened to a revolving unit is assumed. Each rotor blade is associated with a swivel axis which extends substantially along the rotor blades. The swivel axis is displaced towards the inflow profile nose in relation to the hydrodynamic center.

The respective rotor blade can rotate about the swivel axis either at the base point, which means the fastening point to the revolving unit, and/or the rotor blade performs a torsion about the swivel axis as a result of the load caused by the hydrodynamic forces. The torsion can extend

over the entire blade or be limited to a portion of the longitudinal extension, which means over a section of the swivel axis.

The embodiment alternatives of a rotatably arranged fastening on the one hand and an elastic arrangement of the rotor blade in relation to a torsion on the other hand lead to an upwardly pivoting moment in the case of a respective choice of the swivel axis relative to the threading line of the hydrodynamic centers of the profile sections with the swivel axis as the surface normal. This shall be understood as a moment that twists the rotor blade in the direction of feathered pitch position or causes a torsion facing in this direction.

The centrifugal forces occurring during the revolving of the rotor blade act against the movement towards the feathered pitch position, so that in every operational situation there is a balance in moments between the centrifugal moments which generate a moment guiding the blade back and the upwardly pivoting, hydrodynamic moment. Additional elastic restoring forces must be considered in the case of an elastic deformation of the rotor blades or components attached thereto. They can arise during a torsion in the blade per se or a device for generating a restoring force is included in addition in the fastening of the rotor blade in the revolving unit.

In the event that a device for generating a restoring force is integrated in the fastening of the rotor blade in the revolving unit which elastically counteracts a rotation of the rotor blade about the swivel axis in the direction of the feathered pitch position, the rotor blades are automatically returned to the rotor plane after the fading of the overload case. The same applies when the upwardly swiveling movement in the direction of the feathered pitch position is based substantially on torsion of the rotor blades.

If such elastic restoring forces are missing for an arrangement with rotor blades which are fastened rotatably on the revolving unit, the return from the feathered pitch position must be caused by the effect of the centrifugal moments. For this purpose, the water turbine is accelerated either by means of motive operation of the electric generator of the underwater power plant to such an extent until return swiveling occurs or there is also a minimum driving moment in the feathered pitch position at inflow which is sufficient to operate the plant, so that automatic run-up to a speed threshold occurs for which the centrifugal moments exceed the hydrodynamic

moments with upwardly swiveling effect and a return to the position for normal operation occurs.

According to a further development of the invention, the passive power control in accordance with the invention is used for an underwater power plant with bidirectional inflow. Profiles with bidirectional inflow for the rotor blades are advantageous especially for tidal power plants because in such a construction a cyclic change of the inflow direction does not require any rotation of the rotor blades about their longitudinal axis or a rotation of the entire plant about the vertical axis. For this purpose, it is possible to use hydrodynamic symmetrically arranged profiles of a lens-shaped configuration or point-symmetrical profiles with an S-twist. When the passive rotor blade adjustment is combined with inflow capability on both sides, a plant design is obtained which is especially simplified in a constructional respect concerning open-loop and closed-loop control: The requirements placed on the electronic control system which is necessary for monitoring the plant are accordingly reduced, so that an underwater power plant of high sturdiness is obtained. The invention is explained below in closer detail by reference to embodiments in conjunction with the drawings, which show in detail:

Fig. 1 shows a rotor blade adjustment device in accordance with the invention;

Fig. 2 explains the inflow conditions and the resulting force action for a unidirectional rotor blade profile;

Fig. 3 illustrates the upward swiveling of a rotor blade in the direction of the feathered pitch position;

Fig. 4 shows the elastic torsion of a rotor blade in the direction of the feathered pitch position;

Fig. 5 shows a further development of the embodiment according to Fig. 1 with additional weights and a device generating a restoring force;

Fig. 6 shows the embodiment according to Fig. 5 in a cross-sectional view;

Figs. 7, 8 show the hydrodynamic forces for inflow from different directions for a bidirectional profile;

Fig. 9 shows a cross-sectional view of the guide grooves of a rotor blade adjustment device in accordance with the invention for a bidirectional rotor blade profile;

Fig. 10 shows the sectional view B-B of Fig. 9,

Fig. 11 shows the normal operating state for an inflow from a first direction for the sectional view of Fig. 9 with a superimposed rotor blade profile;

Fig. 12 shows the overload state with a rotor blade upwardly swiveled to the feathered pitch position for the sectional view of Fig. 9 with a superimposed rotor blade profile;

Figs. 13 and 14 show the change of the swivel axis as a consequence of a reversal of the inflow direction for the sectional view of Fig. 9 with a superimposed rotor blade profile.

Fig. 1 shows a longitudinal sectional view of a partial section of a rotor blade 1 with passive rotor blade adjustment. The rotor blade 1 is linked in a rotatable manner about a swivel axis 3 on a revolving unit 2 which is arranged in a hub-like manner in this case. An axial pin 5 is provided for this purpose which is inserted in a receptacle 6 in the revolving unit 2. The receptacle 6 is associated with a bearing 7 which can be arranged as a water-lubricated slide bearing and which allows the axial pin 5 to perform a rotational movement. The bearing 7 must absorb the forces introduced by the rotor blade into the revolving unit 2. In addition, a radial securing means 8 is provided on the axial pin 5 which grasps behind a thrust bearing on the revolving unit '2 in order to secure the rotor blade 1 in the radial direction.

As a result of the rotatable linkage of rotor blade 1 as shown in Fig. 1 to the revolving unit 2, the blade angle of the rotor blade 1 relative to the rotational plane 39 will set during the operation of the plant according to the balance of the acting moments. One of the acting moments is obtained by the hydrodynamic forces acting upon the rotor blade 1. This is shown in Fig. 2, with a unidirectional profile of a rotor blade 1 being outlined according to the section A-A of Fig. 1. The illustrated profile is schematically simplified, with profiles similar to those of hydrofoils being generally used for underwater power plants of this kind.

Fig. 2 shows the driving flow c and the negative circumferential speed u of the rotor blade, which add up as vectors to the effective inflow w . It meets the profile nose 10 and generates a

force effect on the profile which acts upon the hydrodynamic center 11. It is composed of buoyancy F_a and the flow resistance F_d which result in the hydrodynamic force F_r when added up as vectors. In the present case, the hydrodynamic center 11 lies approximately at a quarter of the length of the profile chord 9. The resulting hydrodynamic force F_r which acts upon the hydrodynamic center 11 can be broken down into two components. This is the tangential force F_t on the one hand which extends parallel to the profile chord 9. On the other hand, a transversal force F_q is obtained with an orientation perpendicular to the profile chord 9.

The swivel axis 3 is chosen in such a way according to the invention that the hydrodynamic forces generate a moment which is directed in the direction of the feathered pitch position. For this purpose, the swivel axis 3 is arranged upstream in a displaced manner, spaced from the hydrodynamic center. As a result of the thus resulting lever, the transversal force F_q generates a moment which is directed in a counter-clockwise direction for the present illustration. This moment acts in an upwardly swiveling manner and tries to twist the profile to the feathered pitch position, which means that the angle between profile chord 9 and the rotational plane 39 is increased in order to reduce the angle of attack of profile 40 in relation to the effective inflow w . A profile 40 in the initial position and, in broken lines, for the upwardly swiveled position 12 in the direction of the feathered pitch position is outlined for a predetermined driving flow c in Fig. 3.

For an alternative embodiment of the invention, the rotor blade 1 is linked in a non-rotatable way to the revolving unit 2. Instead, the upward swiveling is caused by an elastic behavior of the rotor blade 1. This is shown in Fig. 4. The position of a reinforcement 4 for a rotor blade 1 which is arranged as a hollow profile is chosen in such a way that the region of increased structure strength is disposed upstream in relation to the hydrodynamic center 11. As a result of this measure, the transversal force F_q leads to a twisting about a torsion axis 13 which will be designated below, in accordance with the terminology as already chosen above, as swivel axis 3, with such axis extending along the reinforcement 4 for the illustrated embodiment. A limited twisting of the rotor blade 1 about the swivel axis 3 is obtained for the profile 40 associated with the section A-A, as indicated in Fig. 4, so that the profile 40 is guided only from a specific radial distance by the revolving unit 2 to the region of the feathered pitch position. There is a possibility to adjust the characteristics for upward swiveling and the moment necessary for this

purpose by adjusting the reinforcement 4 and the resulting local determination of the elastic counter-forces against torsion.

Furthermore, the two measures as described above concerning the twisting about the swivel axis 3 by a rotatable linkage of the rotor blade 1 to the revolving unit 2 and torsion about a swivel axis 3 arranged upstream in relation to the hydrodynamic center 11 can be combined with each other.

In contrast to the upwardly swiveling moments as a result of the hydrodynamic force action on the profile 40 of the rotor blades 1 as described above, the centrifugal forces originating during the rotation act upon the rotor blade 1. They tend to guide the rotor blade 1 back to the rotational plane 39, so that a balance of moments is obtained for a predetermined inflow speed on the rotor blade 1. Such a configuration can be chosen by profile configuration and determination of position of the swivel axis 3 in conjunction with speed guidance caused by the directly coupled electric generator that the equilibrium position lies in the range of the feathered pitch position only in the case of an extreme load the rotor blade 1 assumes for normal operation an angle which is beneficial for propulsion in relation to effective inflow w .

The resulting equilibrium position can be influenced by further measures. Additional weights 14.1, 14.2 which are arranged in pairs are provided for this purpose in the further development of the embodiment according to Fig. 1 which is shown in Fig. 5. The cross-sectional view of Fig. 6 shows that the additional weights 14.1, 14.2 are spaced from the swivel axis 3 parallel to the rotational plane 39. This increases the surface centrifugal moment of rotor blade 1, so that the returning moments which guide the rotor blade 1 to the position of attack against the feathered pitch position are increased during the rotation. A device for generating a restoring force 15 can be provided in addition or alternatively. In Fig. 5, an apparatus is shown which is integrated for this purpose in the revolving unit 2 and which acts upon an extension about the axial pin 5. Passive systems are especially preferred which generate a counter-force during a rotational movement of the rotor blade 1 in the direction of the feathered pitch position. Spring arrangements are suitable for this purpose.

Furthermore, the measures as shown in Figs. 5 and 6 improve the start-up of an underwater power plant with passive rotor blade adjustment in accordance with the invention. It is assumed

that the rotor blades 1 are in the feathered pitch position and there is no overloading with respect to inflow. In the case that no device for generating a restoring force 15 has been provided, it is necessary to bring the water turbine at first to a specific revolving speed. This is achieved by a motive operation of the electric generator. From a specific revolving speed, the centrifugal forces will guide the rotor blade 1 to the rotational plane 39, so that for normal operation the propulsion during generator operation of the electric generator as produced by the individual rotor blades 1 will make the water turbine revolve with such a speed that the centrifugal forces will hold the rotor blades against the upwardly swiveling hydrodynamic moments in the position of attack up to a predetermined speed of the driving flow c .

Figs. 7 to 14 concern an embodiment of a passive rotor blade adjustment for a generic underwater power plant with a profile 16 with bidirectional inflow. Such a one is shown in a schematically simplified way in Figs. 7 and 8, with a lens-shaped profile being assumed which is arranged symmetrically in relation to profile chord 9 and the central line 34. The profile can perform an S-twist alternatively. In this case, the skeleton line is symmetric to point and follows an S-shaped contour. Such a profile arrangement is not shown in detail in the drawings.

Fig. 7 further shows in an exemplary profile sectional view the driving flow c from a first direction, the negative revolving speed u and the effective inflow w , with the resulting hydrodynamic force F_r being generated which acts upon the first hydrodynamic center 19. The resulting hydrodynamic force F_r' is obtained for a second opposite direction of inflow with the driving flow c' which is shown in Fig. 8, which force acts upon the symmetrically disposed, second hydrodynamic center 20. In order to realize a passive rotor blade adjustment, the swivel axis must be arranged upstream of the hydrodynamic center in order to provide a lever arm for generating an upwardly swiveling moment in relation to the transversal force F_q, F_q' . There is a necessity, depending on the inflow direction, of performing a change from a first swivel axis 3.1 to a second swivel axis 3.2. Active systems can be used for this purpose, but this would lead to an undesirable effort in regard to control systems. It is therefore preferable to also perform the transition from the first swivel axis 3.1 to the second swivel axis 3.2 in a passive way depending on the inflow direction, so that the change can be caused exclusively by the flow forces themselves.

The breakdown of the resulting hydrodynamic force F_r, F_r' into a transversal force F_q, F_q' which is perpendicular to the profile chord 9 and a tangential force F_t, F_t' which is parallel to the profile chord 9 as chosen in Figs. 7 and 8 leads to a tangential force F_t, F_t' for the illustrated embodiment which faces from the profile nose on the inflow side to the profile nose on the outflow side. This direction can be set by choosing the profile and its installation angle for a predetermined inflow speed range by determining the ratio between the buoyancy and the flow resistance in the profile. The following embodiment of a passive rotor blade adjustment for a profile 16 with bidirectional inflow assumes such a chosen direction for the tangential force F_t, F_t' . However, the illustrated principle can also be applied to an oppositely directed tangential force F_t, F_t' .

Figs. 9 and 10 show a possible embodiment of a passive rotor blade adjustment for a rotor blade 1 with a bidirectional profile. A planar guide region 29 is provided for this purpose in the revolving unit 2, on which a sliding apparatus 30 which is rigidly connected with the rotor blade 1 performs a guided sliding motion and simultaneously transmits rotor blade forces. For the present arrangement, the sliding apparatus 30 comprises an upper support plate 27 and a bottom support plate 28 which are applied in a plane-parallel manner and are chosen with respect to their distance in such a way that sliding on the upper and lower side of the same occurs during a relative motion to the planar guide region 29. The acting running surfaces of these components are advantageously covered with a sliding material such as PTFE for example or are arranged as slide bearings. In this case, one component is preferably made of a hard material, typically special steel, and the counter-running surface is made of a soft material such as an elastomer, especially Orkot®.

The connection between the upper support plate 27 and the bottom support plate 28 occurs by a first coupling element 23 and a second coupling element 24 with a preferably cylindrical shape. The coupling elements 23, 24 are arranged with respect to the bidirectional profile of the rotor blade 1 in such a way that their longitudinal axes define the first and second swivel axis 3.1, 3.2. The first coupling element 23 moves in a first guide groove 21 which reaches through the planar guide region 29. Accordingly, a second guide groove 29 is associated with the second coupling element 24.

The effectiveness of one each of the two swivel axes 3.1, 3.2 is determined by the moving capabilities of the coupling elements 23, 24 in the associated guide grooves 21, 22. This is shown from the sectional view C-C as shown in Fig. 9. The two guide grooves 21, 22 are arranged in a mirror-like manner with respect to one another and each comprise a short leg which extends at least in the end regions parallel to the profile chord 9 of the rotor blade 1 in the normal operating position. The short legs shall be designated below as tangential guides 25.1, 25.2. They can be associated with a coinciding longitudinal axis of the tangential guides 33. Furthermore, upward swiveling regions 26.1 and 26.2 are provided for the guide grooves 21, 22, which regions are adjacent to the tangential guides 25.1, 25.2. Preferably, the sliding surface of an upward swiveling region 26.1, 26.2 for the respectively associated coupling segment 23, 24 substantially follows the arc of a circle whose central point lies in the end region of the tangential guide 25.1, 25.2 of the opposite guide groove 21, 22 for the non-associated coupling element 23, 24. The radius of the arc of the circle corresponds substantially to the distance of the central points of the two coupling elements 23, 24.

The function of the guide grooves 21, 22 is shown in the Figs. 11 to 14. The drawings show the projection of the profile 31 with bidirectional inflow to the sectional view of Fig. 9 for different operating situations. Fig. 11 shows the revolving speed v for normal operation for a driving flow. The first coupling element 23 is positioned in the end region of the first tangential guide 25.1 and the second coupling element 24 is disposed in the second guide groove 22 in such a way that an upwardly swiveling motion along the second upward swiveling region 26.2 is possible. Consequently, the first swivel axis 3.1 is determined by the first coupling element 23. Furthermore, the hydrodynamic forces are taken up through the walls of the first guide groove 21. In addition, the preferably planar arrangement of the upper and bottom support plates 27, 28 act in a load-absorbing way. Based on this normal operating state, the upward swiveling of the rotor blade 1 occurs in the case of overloading. This is shown in Fig. 12.

When there is a change of the direction of the driving flow c' , the change as shown in Figs. 13 and 14 occurs from the first swivel axis 3.1 to the second swivel axis 3.2. The flow pressure on the rotor blade 1 and the gradually building tangential force F_t lead to a sliding motion of the coupling elements 23, 24 in the tangential guides 25.1, 25.2. In the further course of this movement, the first coupling element 23 follows the curved sliding path 32 on the inside of the

first guide groove 21 and the second coupling element 24 is moved up to the end region of the second tangential guide 25.2. As a result, the second swivel axis 3.2 is determined by the second coupling element 24. As a result of a subsequent increase in the revolving speed v , there is an equilibrium of moments which leads to a parallel alignment of the profile chord 9 relative to the axis of the tangential guides 33. This position which is mirror-like to Fig. 9 is not shown in detail in the drawings.

Further embodiments of the invention are possible. It is especially possible that the swivel axis has a curved progression, especially in the case of sickle-shaped rotor blades. The same applies to the case of a swivel axis 3 with a twisting of the rotor blade as a result of hydrodynamic forces when the reinforcing components which determine the swivel axis 3 do not extend in a straight line. A swivel axis which does not extend in a straight line represents a possible embodiment of the invention. Furthermore, an underwater power plant which is arranged in accordance with the invention can have a growth protection system., especially in the region of the rotor blade adjustment device. Such a system may comprise devices for heating parts of the plant in order to remove growth and to especially keep the guide paths and the running elements of the rotor blade adjustment in a functional state. Further embodiments of the invention are obtained from the scope of the following claims.

List of reference numerals

1	Rotor blade
2	Revolving unit
3	Swivel axis
3.1	First swivel axis
3.2	Second swivel axis
4	Reinforcement
5	Axial pin
6	Receptacle
7	Bearing
8	Radial securing means
9	Profile chord
10	Profile nose
11	Hydrodynamic center
11.1	Threading line of hydrodynamic centers
12	Upwardly swiveled position
13	Torsion axis
14	Additional weight
15	Device generating restoring force
16	Profile with bidirectional inflow
17	First profile nose
18	Second profile nose
19	First hydrodynamic center
20	Second hydrodynamic center
21	First guide groove
22	Second guide groove
23	First coupling element
24	Second coupling element
25.1	First tangential guide
25.2	Second tangential guide
26.1	First upward swiveling region
26.2	Second upward swiveling region

27	Upper support plate
28	Bottom support plate
29	Planar guide region
30	Sliding apparatus
31	Projection of the bidirection inflow profile
32	Curved sliding path
33	Longitudinal axes of tangential guides
34	Central line
39	Rotational plane
40	Profile

c, c'	Driving flow
d	Angle of attack
u, u'	Negative revolving speed
v, v'	Revolving speed
w, w'	Effective inflow
F_a, F_a'	Buoyancy
F_d, F_d'	Flow resistance
F_r, F_r'	Resulting hydrodynamic force
F_q, F_q'	Transversal force
F_t, F_t'	Tangential force

CLAIMS:

1. An underwater power plant, comprising
 - 1.1 a propeller-shaped water turbine in horizontal rotor configuration with a plurality of rotor blades (1) which are fastened to a revolving unit (2), with
 - 1.2 each rotor blade (1) being associated with a swivel axis (3, 3.1, 3.2) which extends substantially along the respective rotor blade (1), with the rotor blades (1) being arranged elastically about the swivel axis (3, 3.1, 3.2) at least in sections of the longitudinal extension concerning a torsion and/or the fastening of the rotor blades (1) to the revolving unit enabling a rotation of the rotor blades (1) about the swivel axis (3, 3.1, 3.2), and
 - 1.3 the position of the swivel axis (3, 3.1, 3.2) is chosen relative to the profile shape of the rotor blades (1) in such a way that hydrodynamic forces acting during operation on rotor blade (1) generate a moment which is directed in the feathered pitch position and the centrifugal forces originating during the rotation cause restoring centrifugal moments on the rotor blade (1) against the feathered pitch position, with an equilibrium of moments occurring between the centrifugal moments and the hydrodynamic moments.
2. An underwater power plant according to claim 1, characterized in that the rotor blade (1) has an elasticity for torsion which varies over the course of the swivel axis (3, 3.1, 3.2).
3. An underwater power plant according to claim 2, characterized in that the rotor blade (1), when seen from the revolving unit, generates a larger elastic restoring force against a torsion about the swivel axis (3, 3.1, 3.2) in the first third of the longitudinal extension than in the remaining region of its longitudinal extension.
4. An underwater power plant according to one of the preceding claims, characterized in that the rotor blades (1) have a profile with bidirectional inflow.
5. An underwater power plant according to claim 4, characterized in that the hydrodynamic forces acting upon the rotor blade (1) cause a change from a first swivel axis (3.1) to a second swivel axis (3.2) during a change of the inflow direction, with the swivel axes

(3.1, 3.2) each being arranged upstream of the hydrodynamic center (11, 20) acting for a predetermined driving flow (c, c').

6. An underwater power plant according to one of the claims 4 or 5, characterized in that in the case of a changing inflow the hydrodynamic forces move a first coupling element (23) in a first guide groove (21) and a second coupling element (24) in a second guide groove (22).
7. An underwater power plant according to claim 6, characterized in that for a change from the first swivel axis (3.1) to the second swivel axis (3.2) the first coupling element (23) is moved out of a first tangential guide (25.1) in the first guide groove (21) and the second coupling element (24) is moved into a second tangential guide (25.2) in the second guide groove (22).
8. A method for operating an underwater power plant according to one of the claims 1 to 7, characterized in that the blade angle of the rotor blade (1) relative to the rotational plane (39) is set by the equilibrium of moments of centrifugal moments and hydrodynamic moments.

Fig. 1

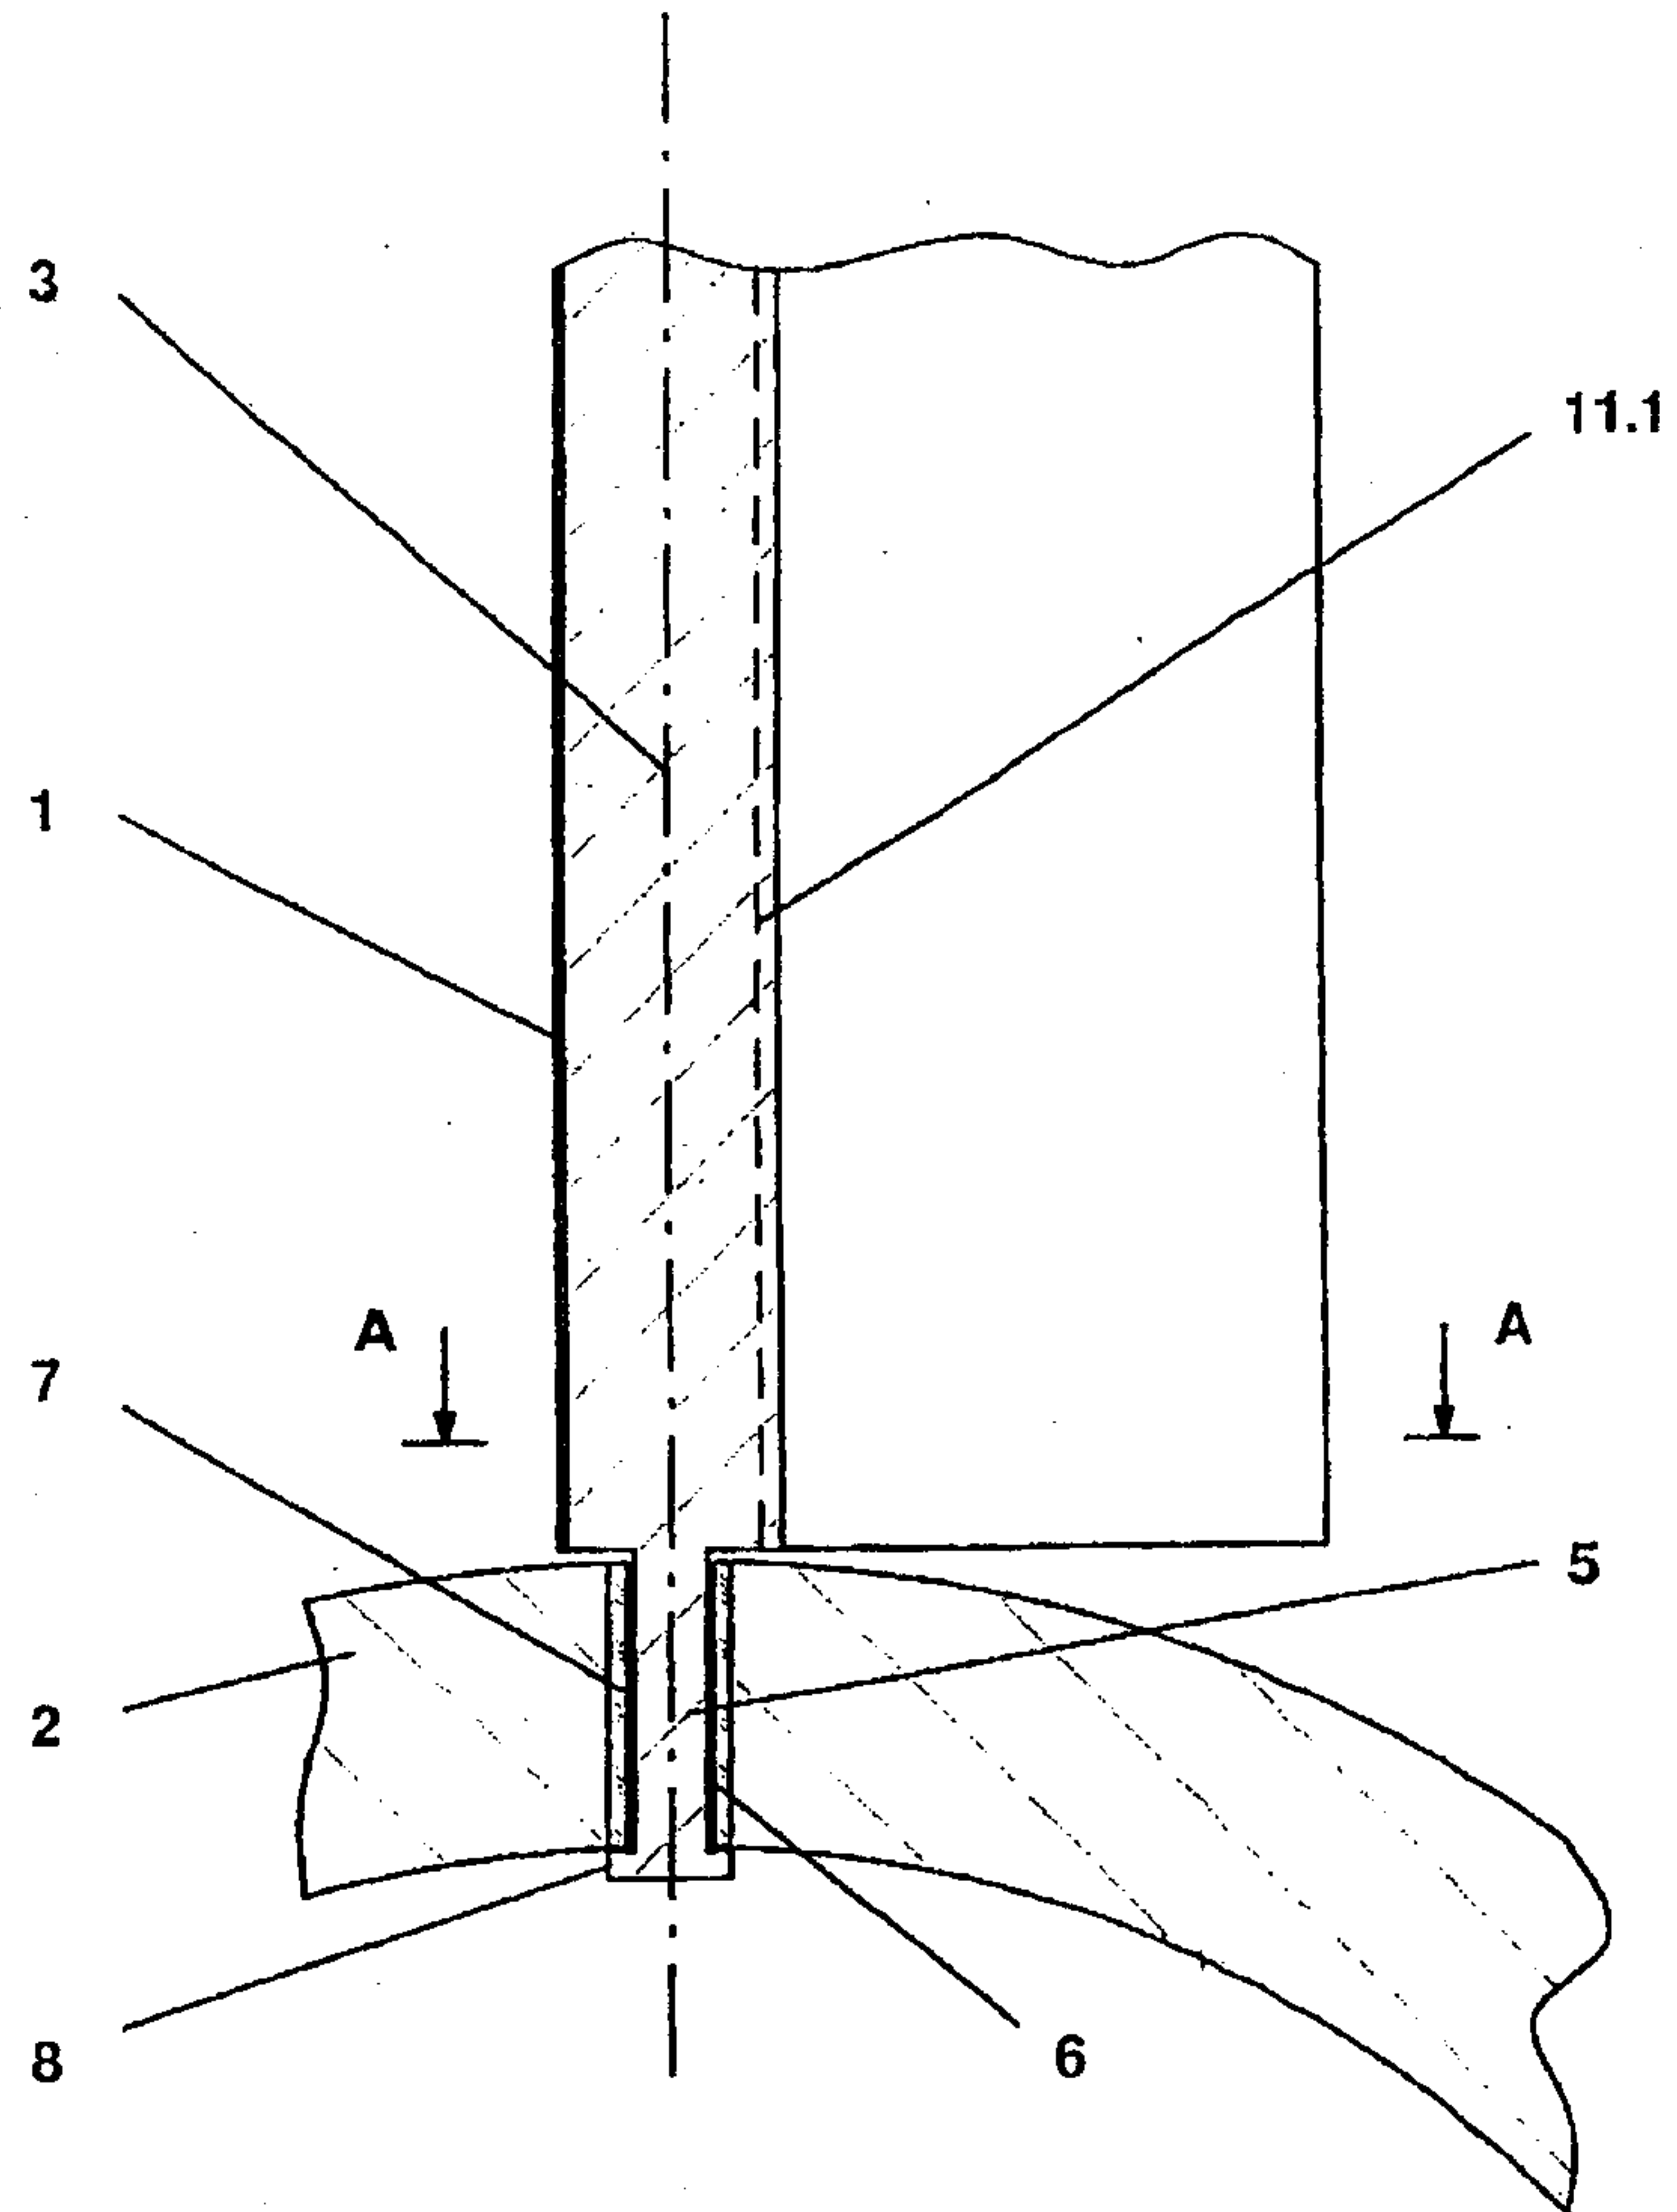


Fig. 2

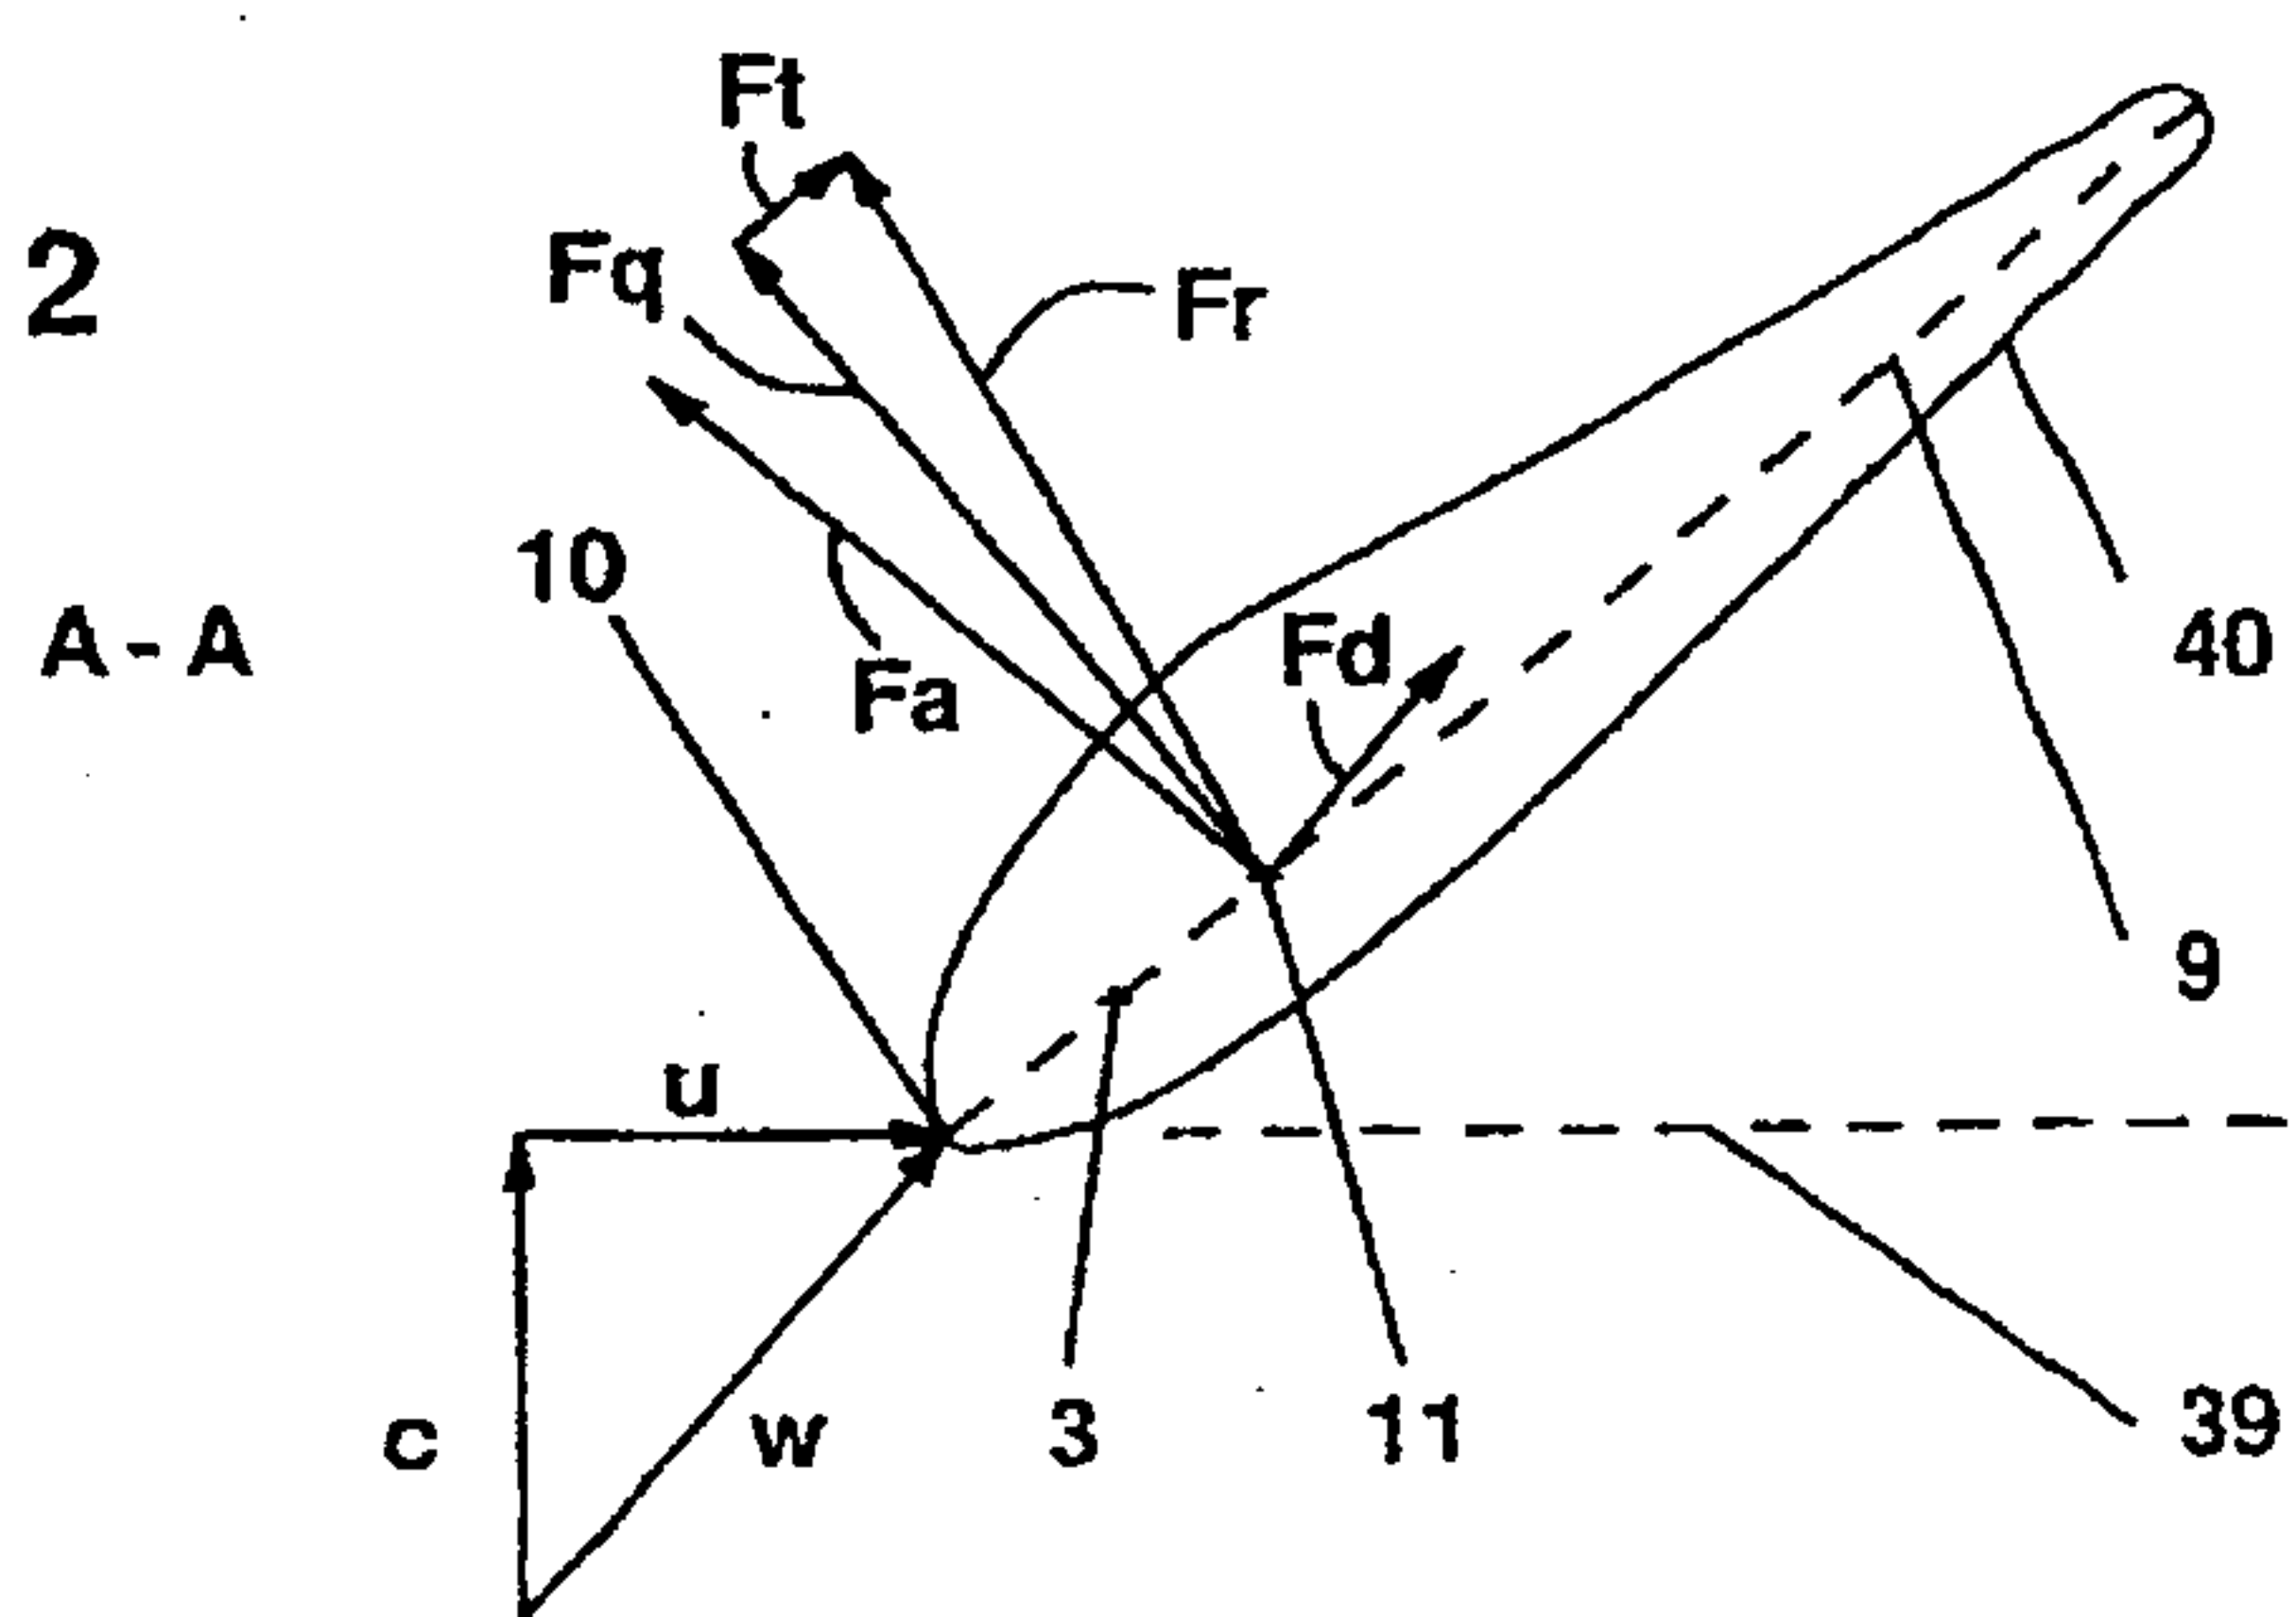
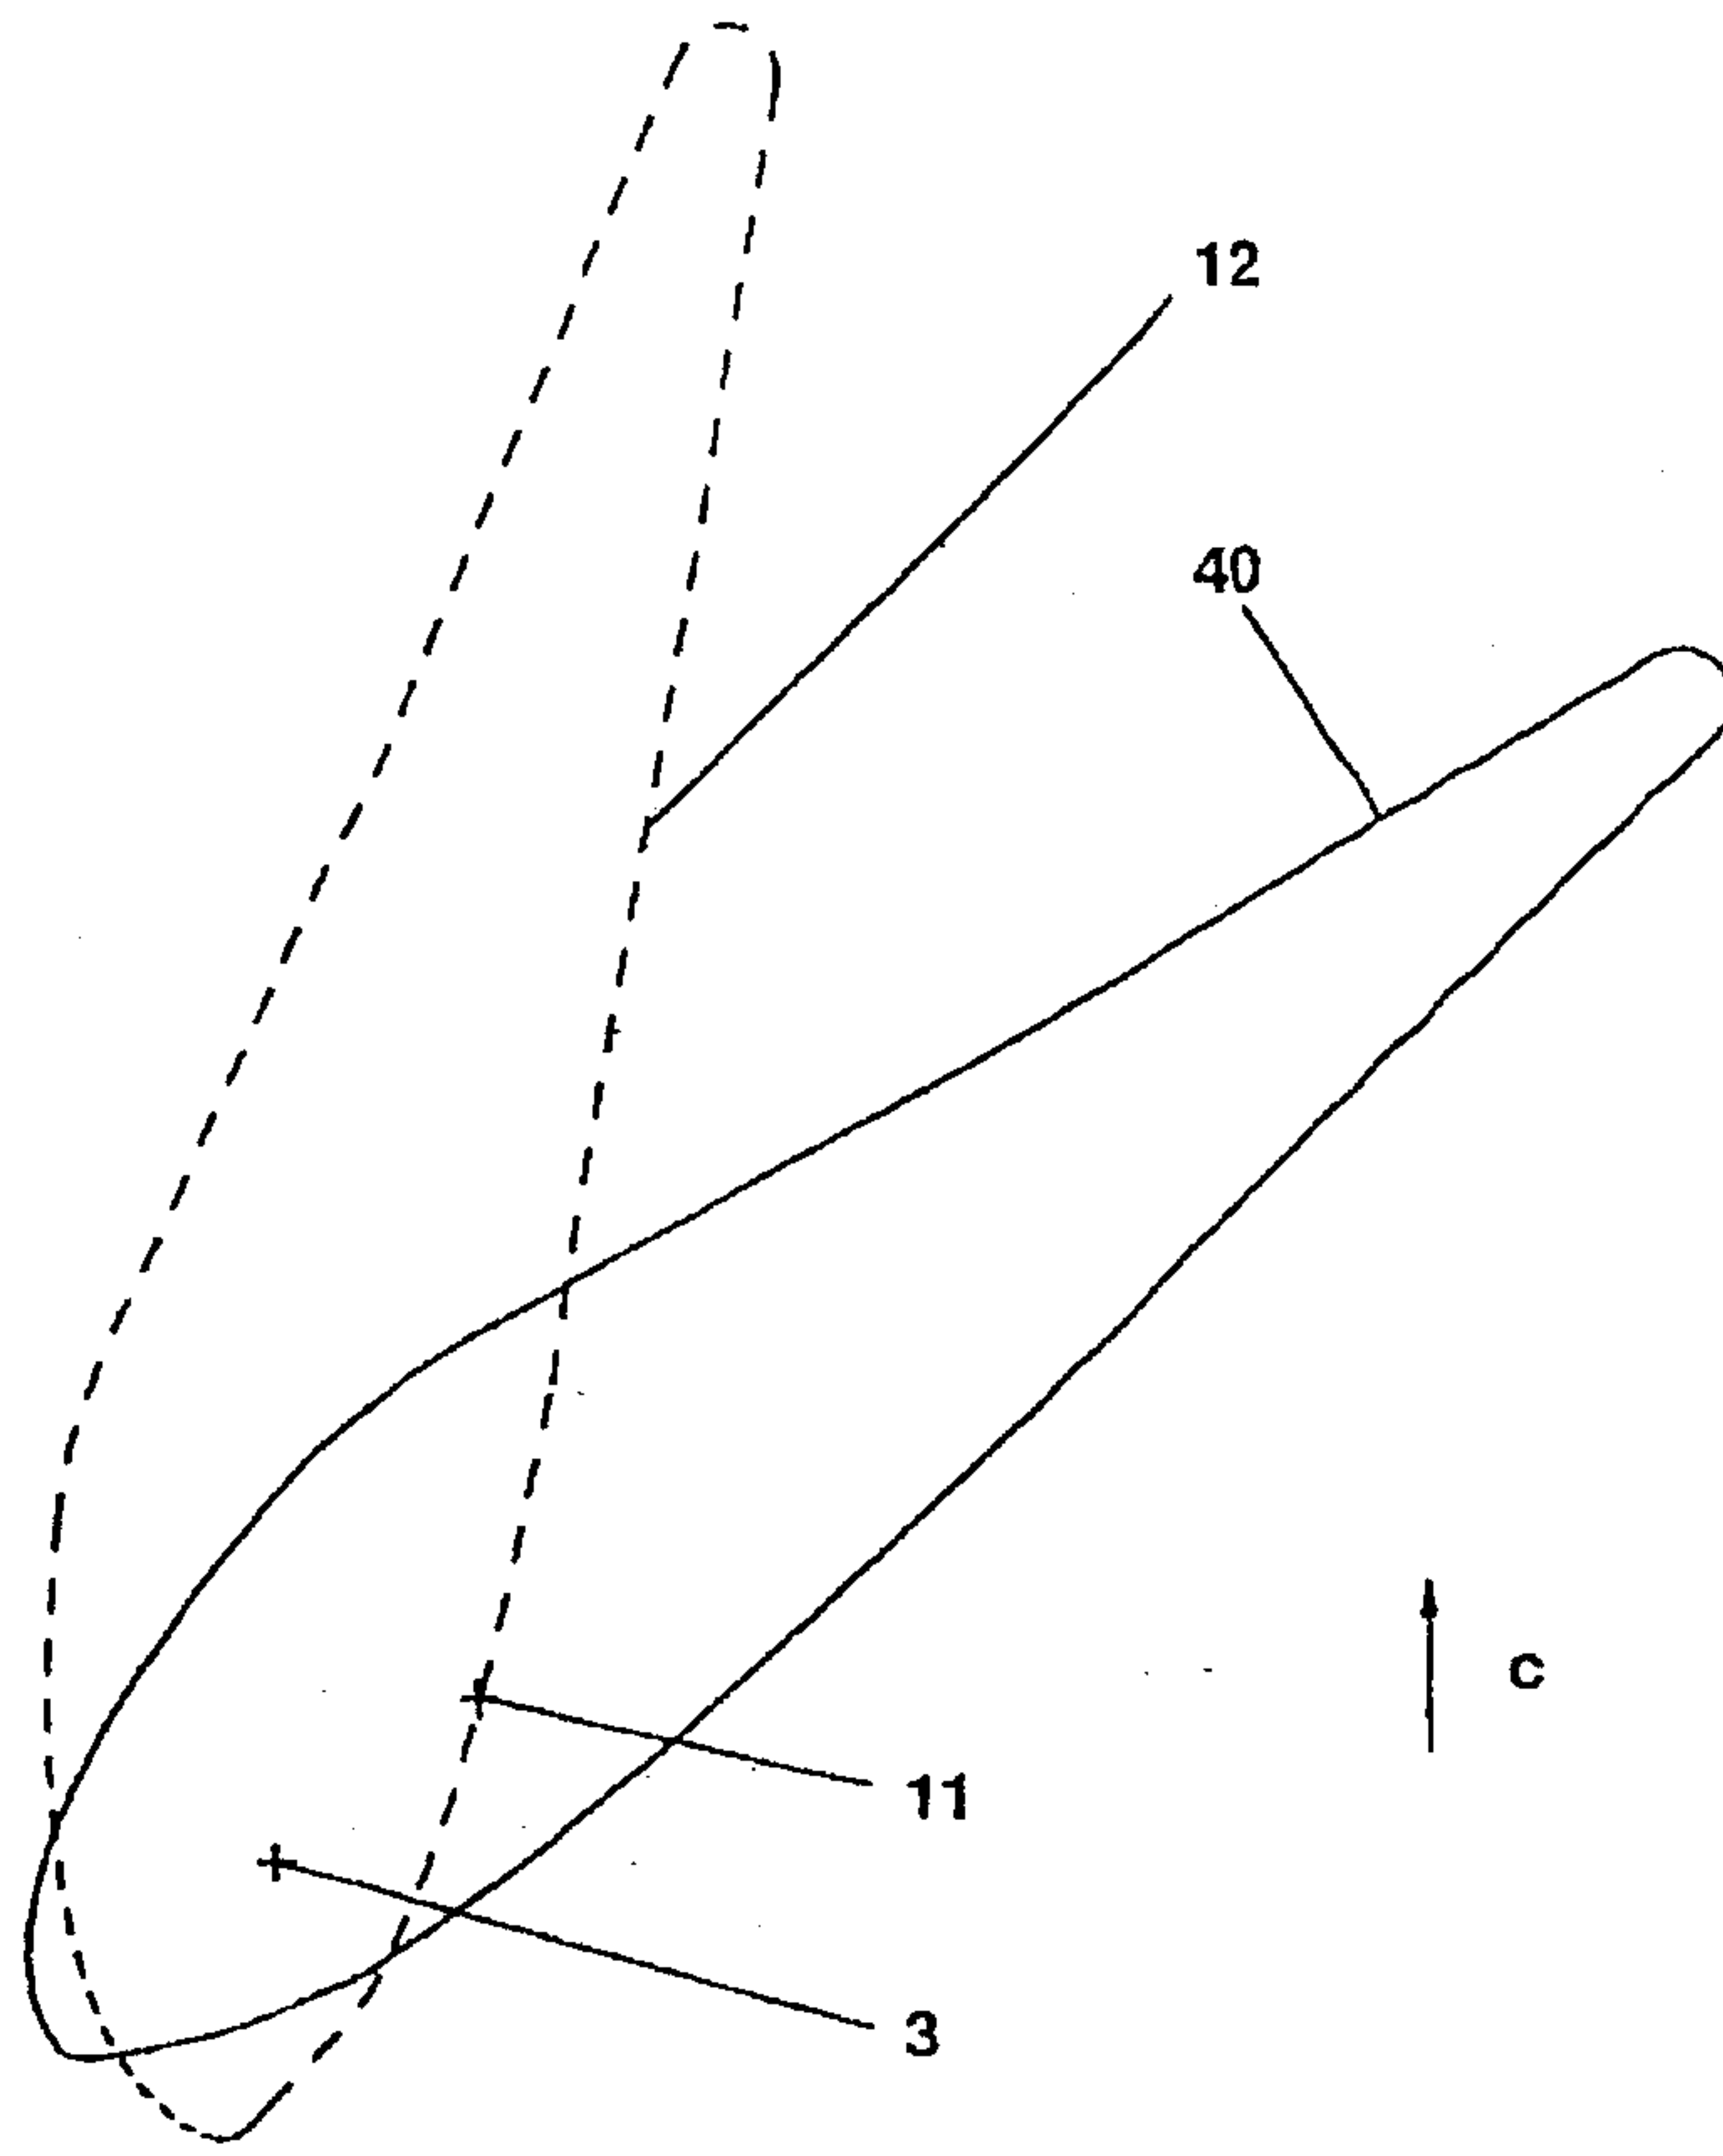


Fig. 3

A - A

**Fig. 4**

A - A

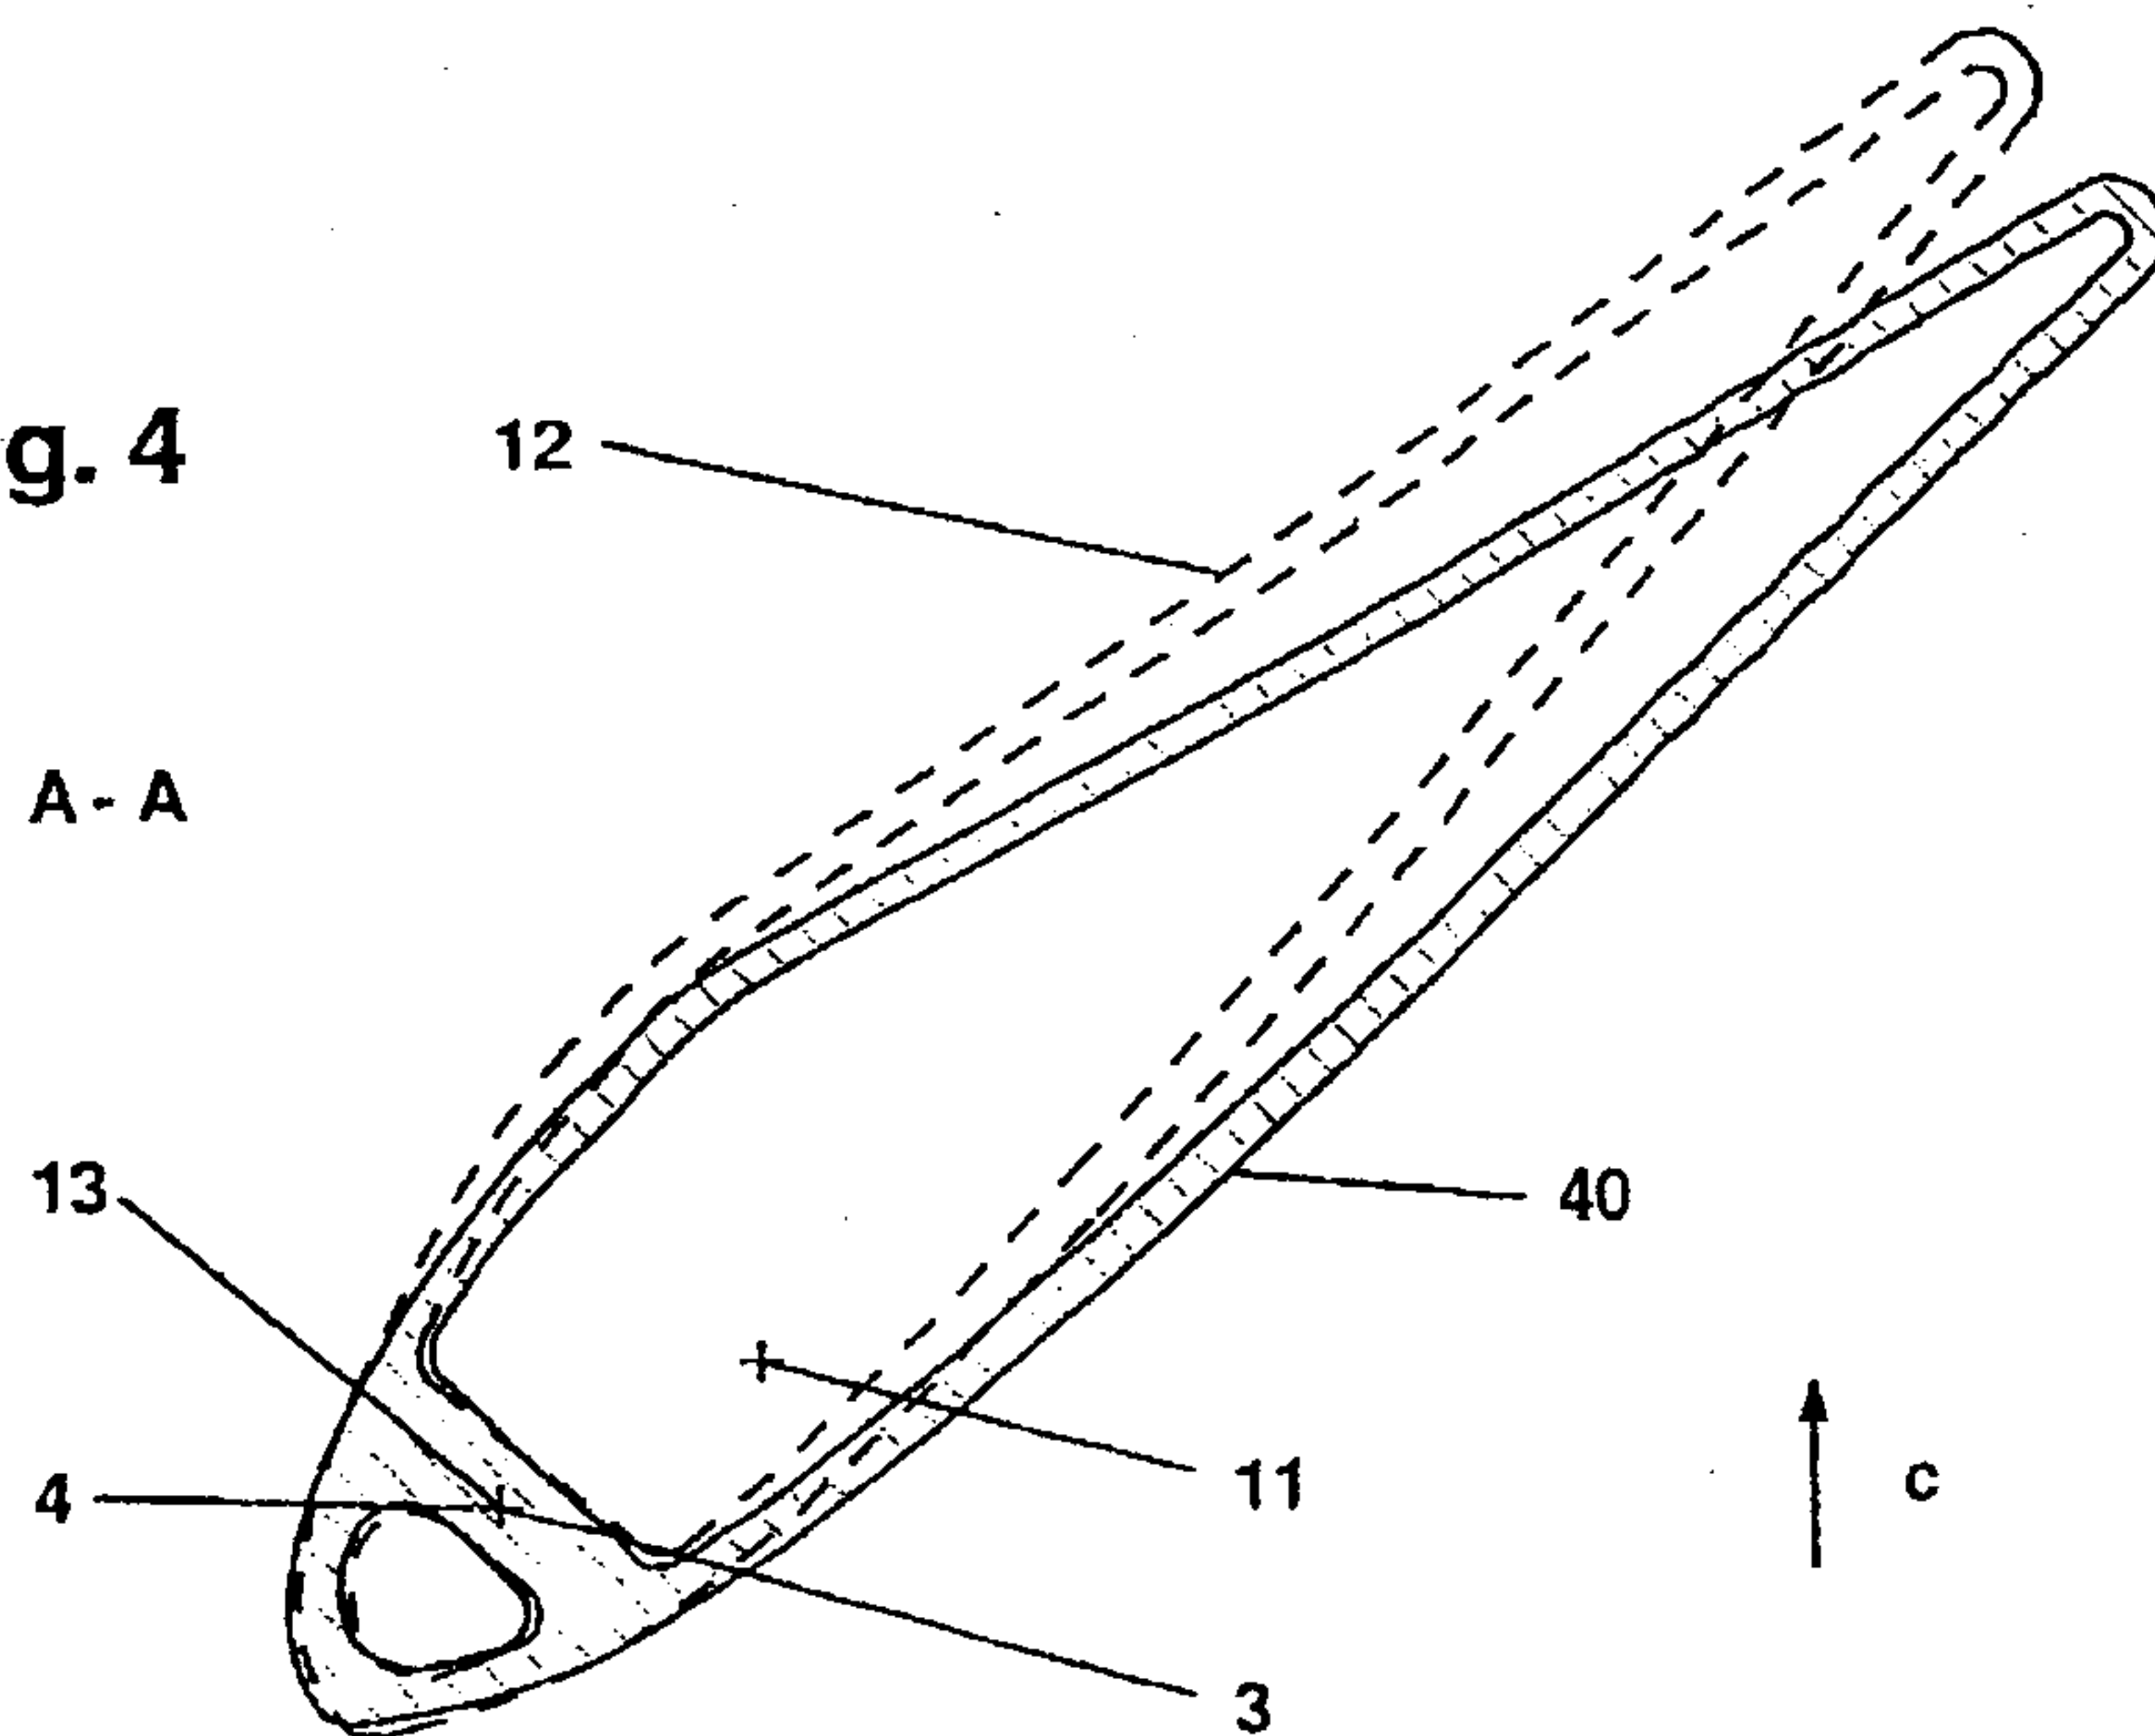


Fig. 5

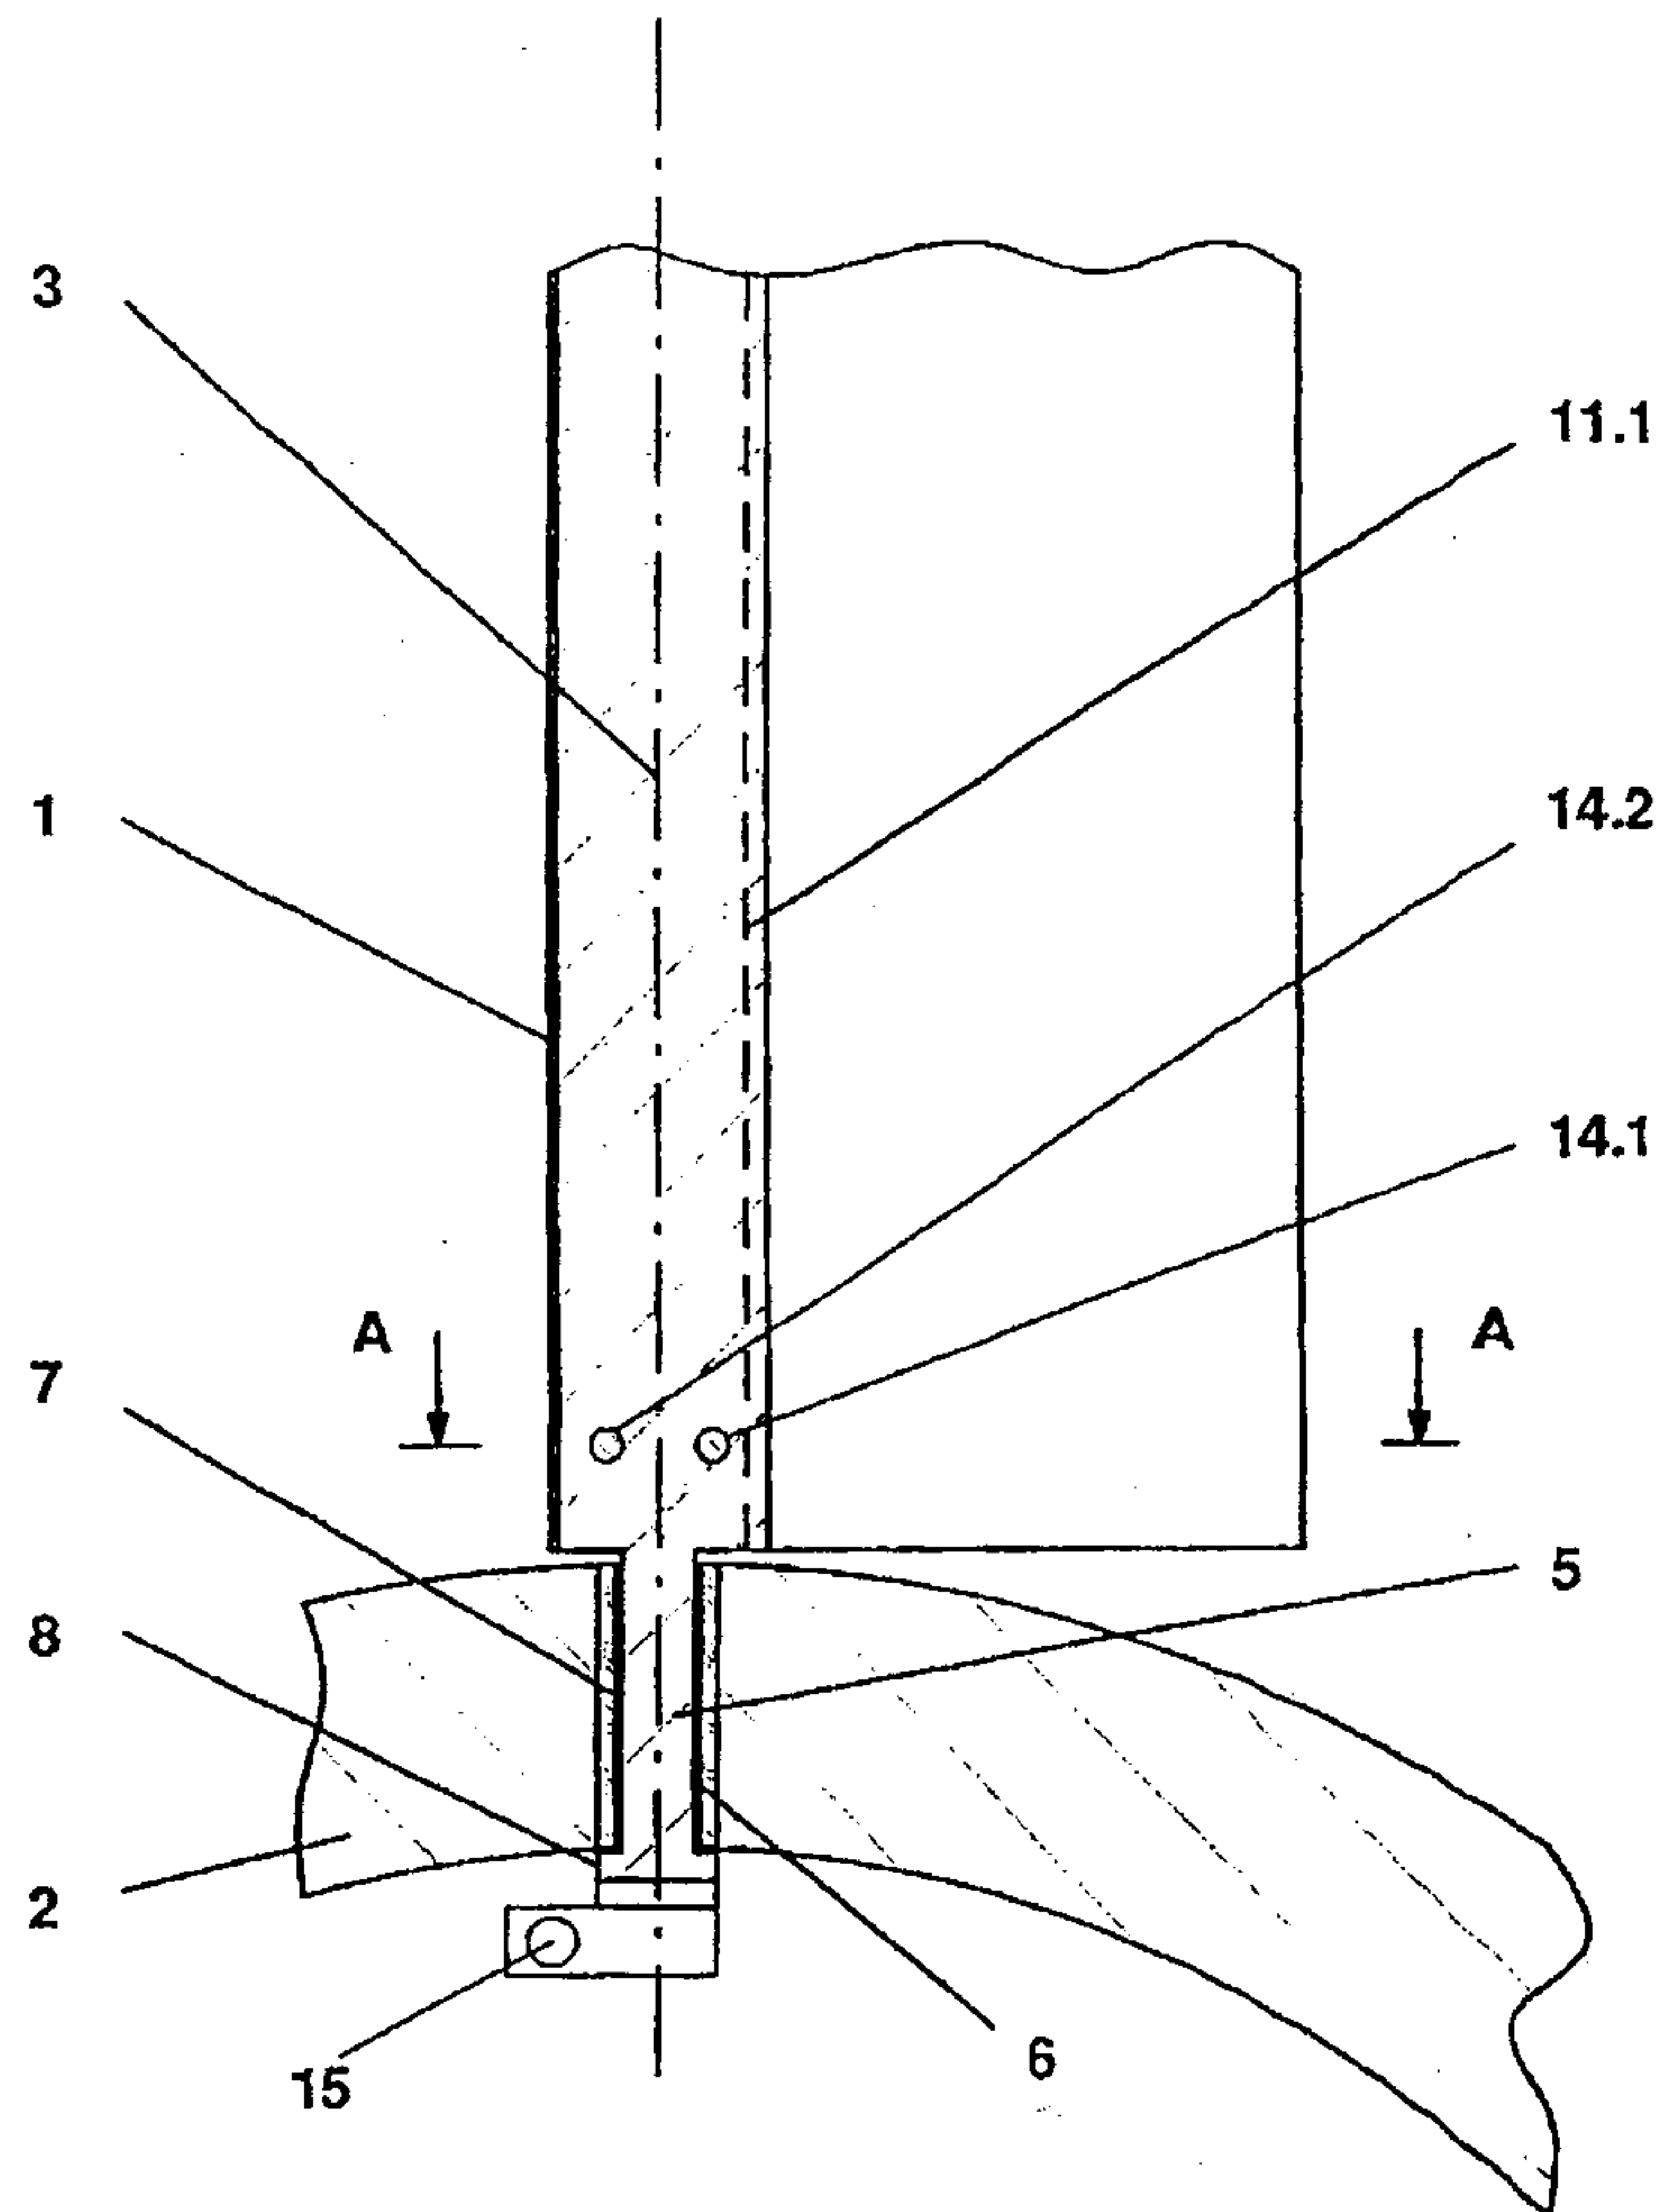


Fig. 6

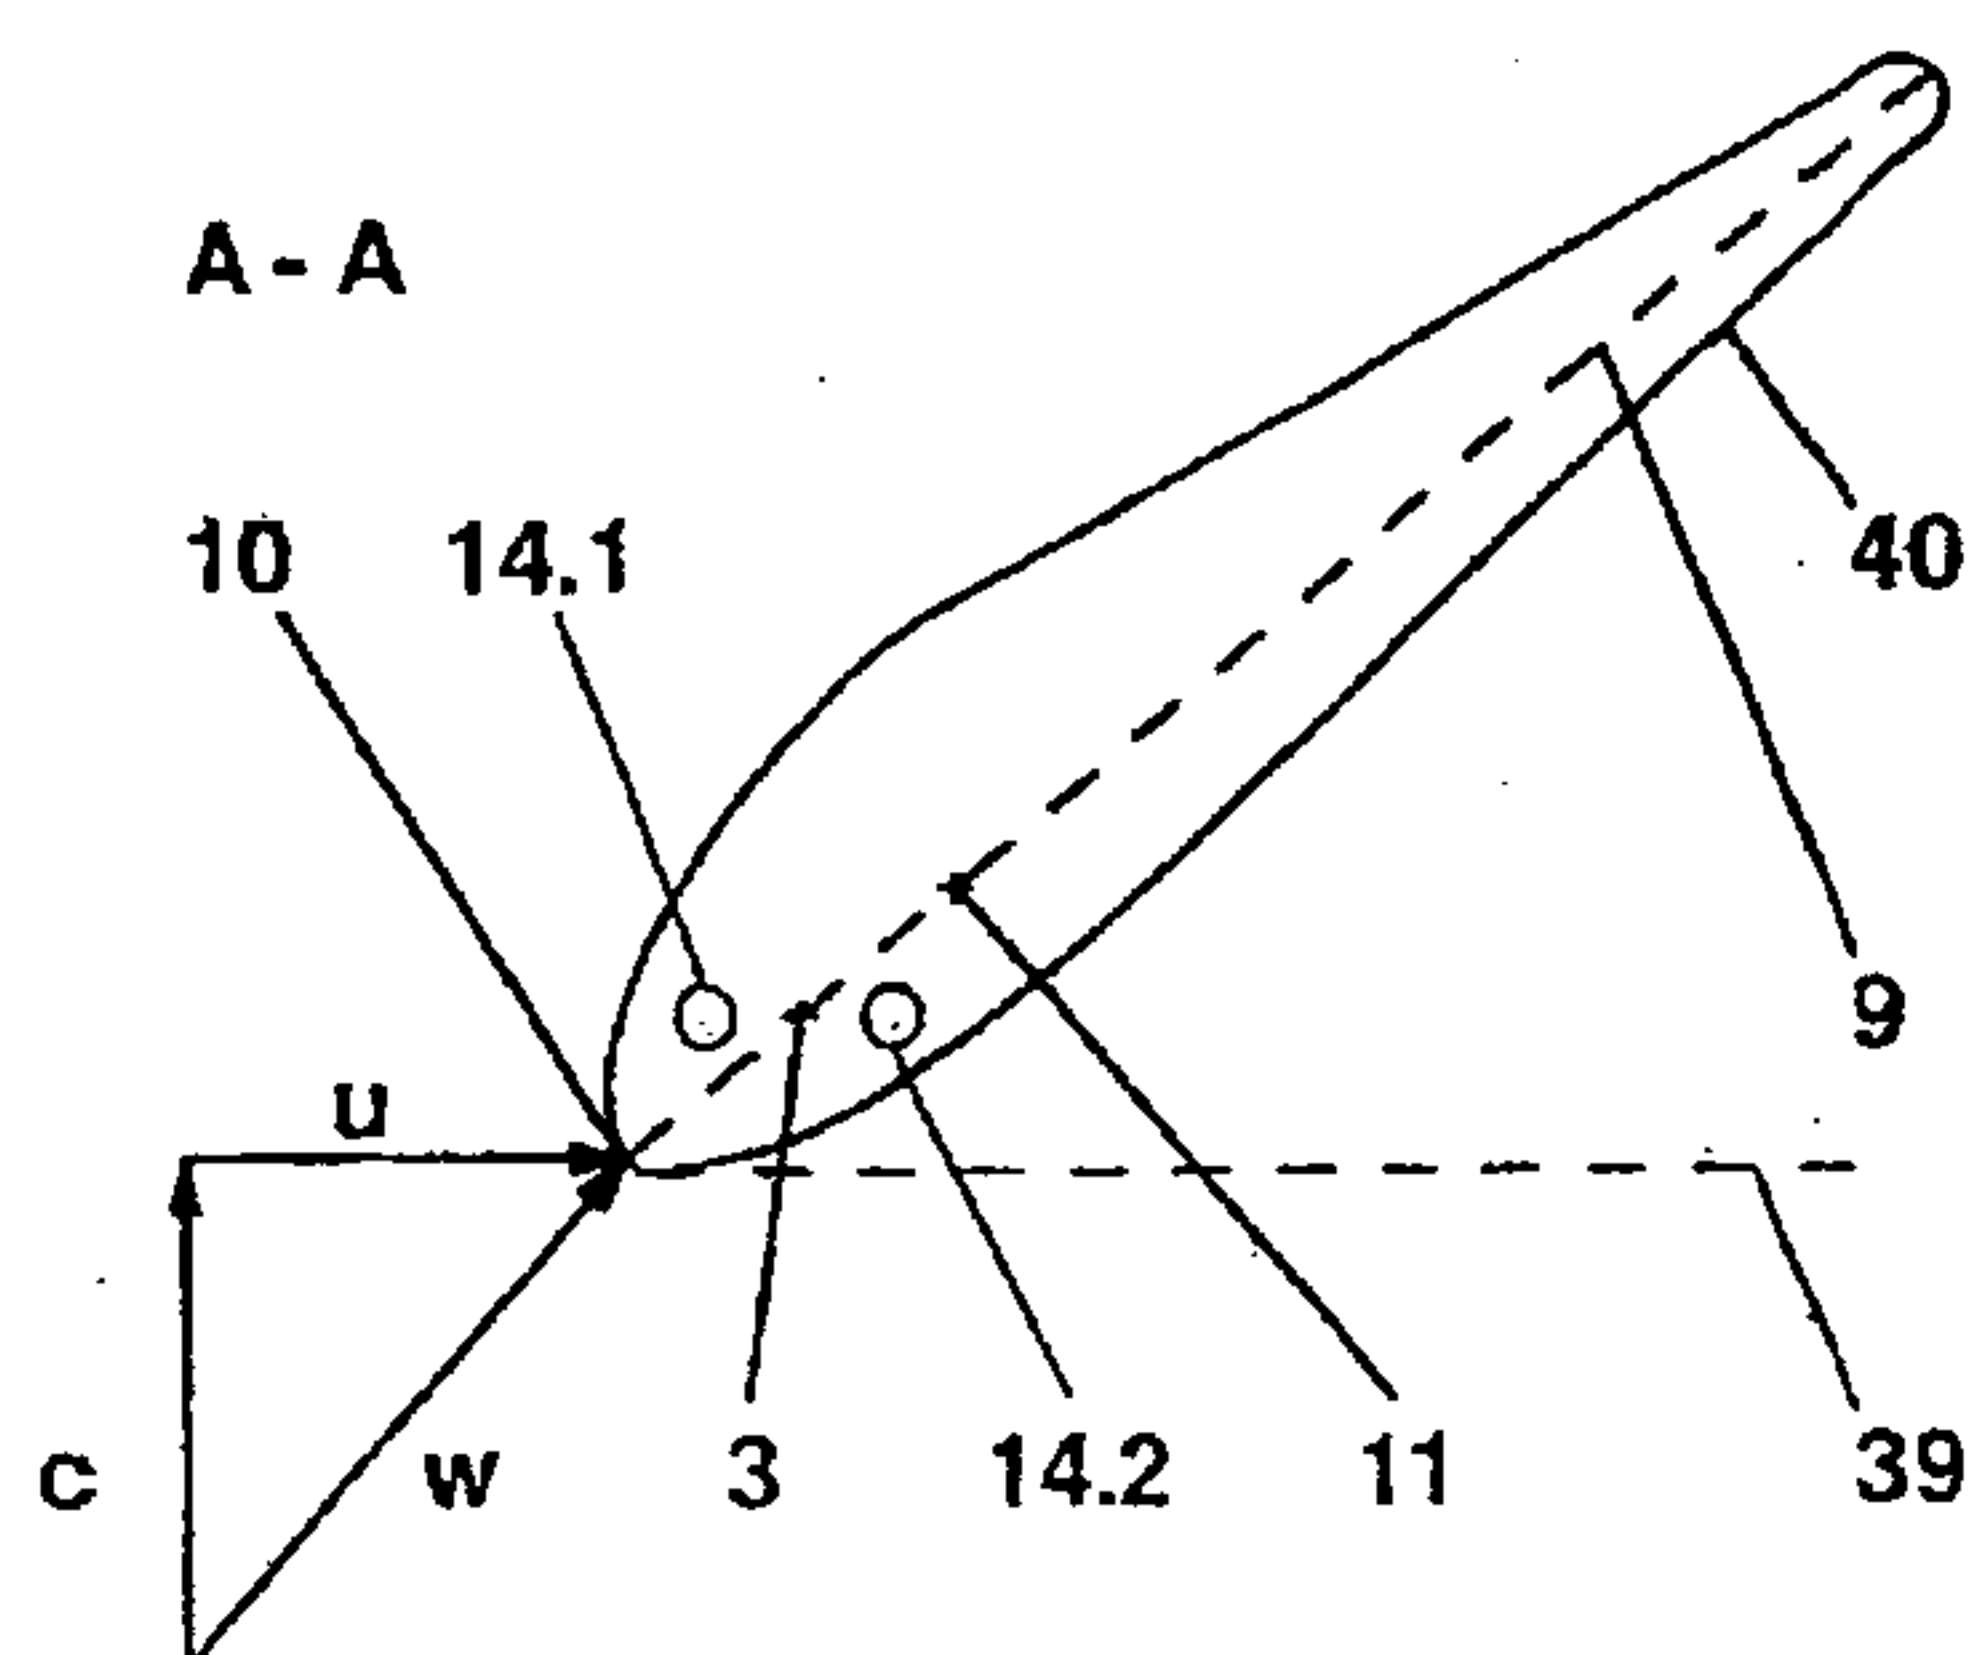


Fig. 7


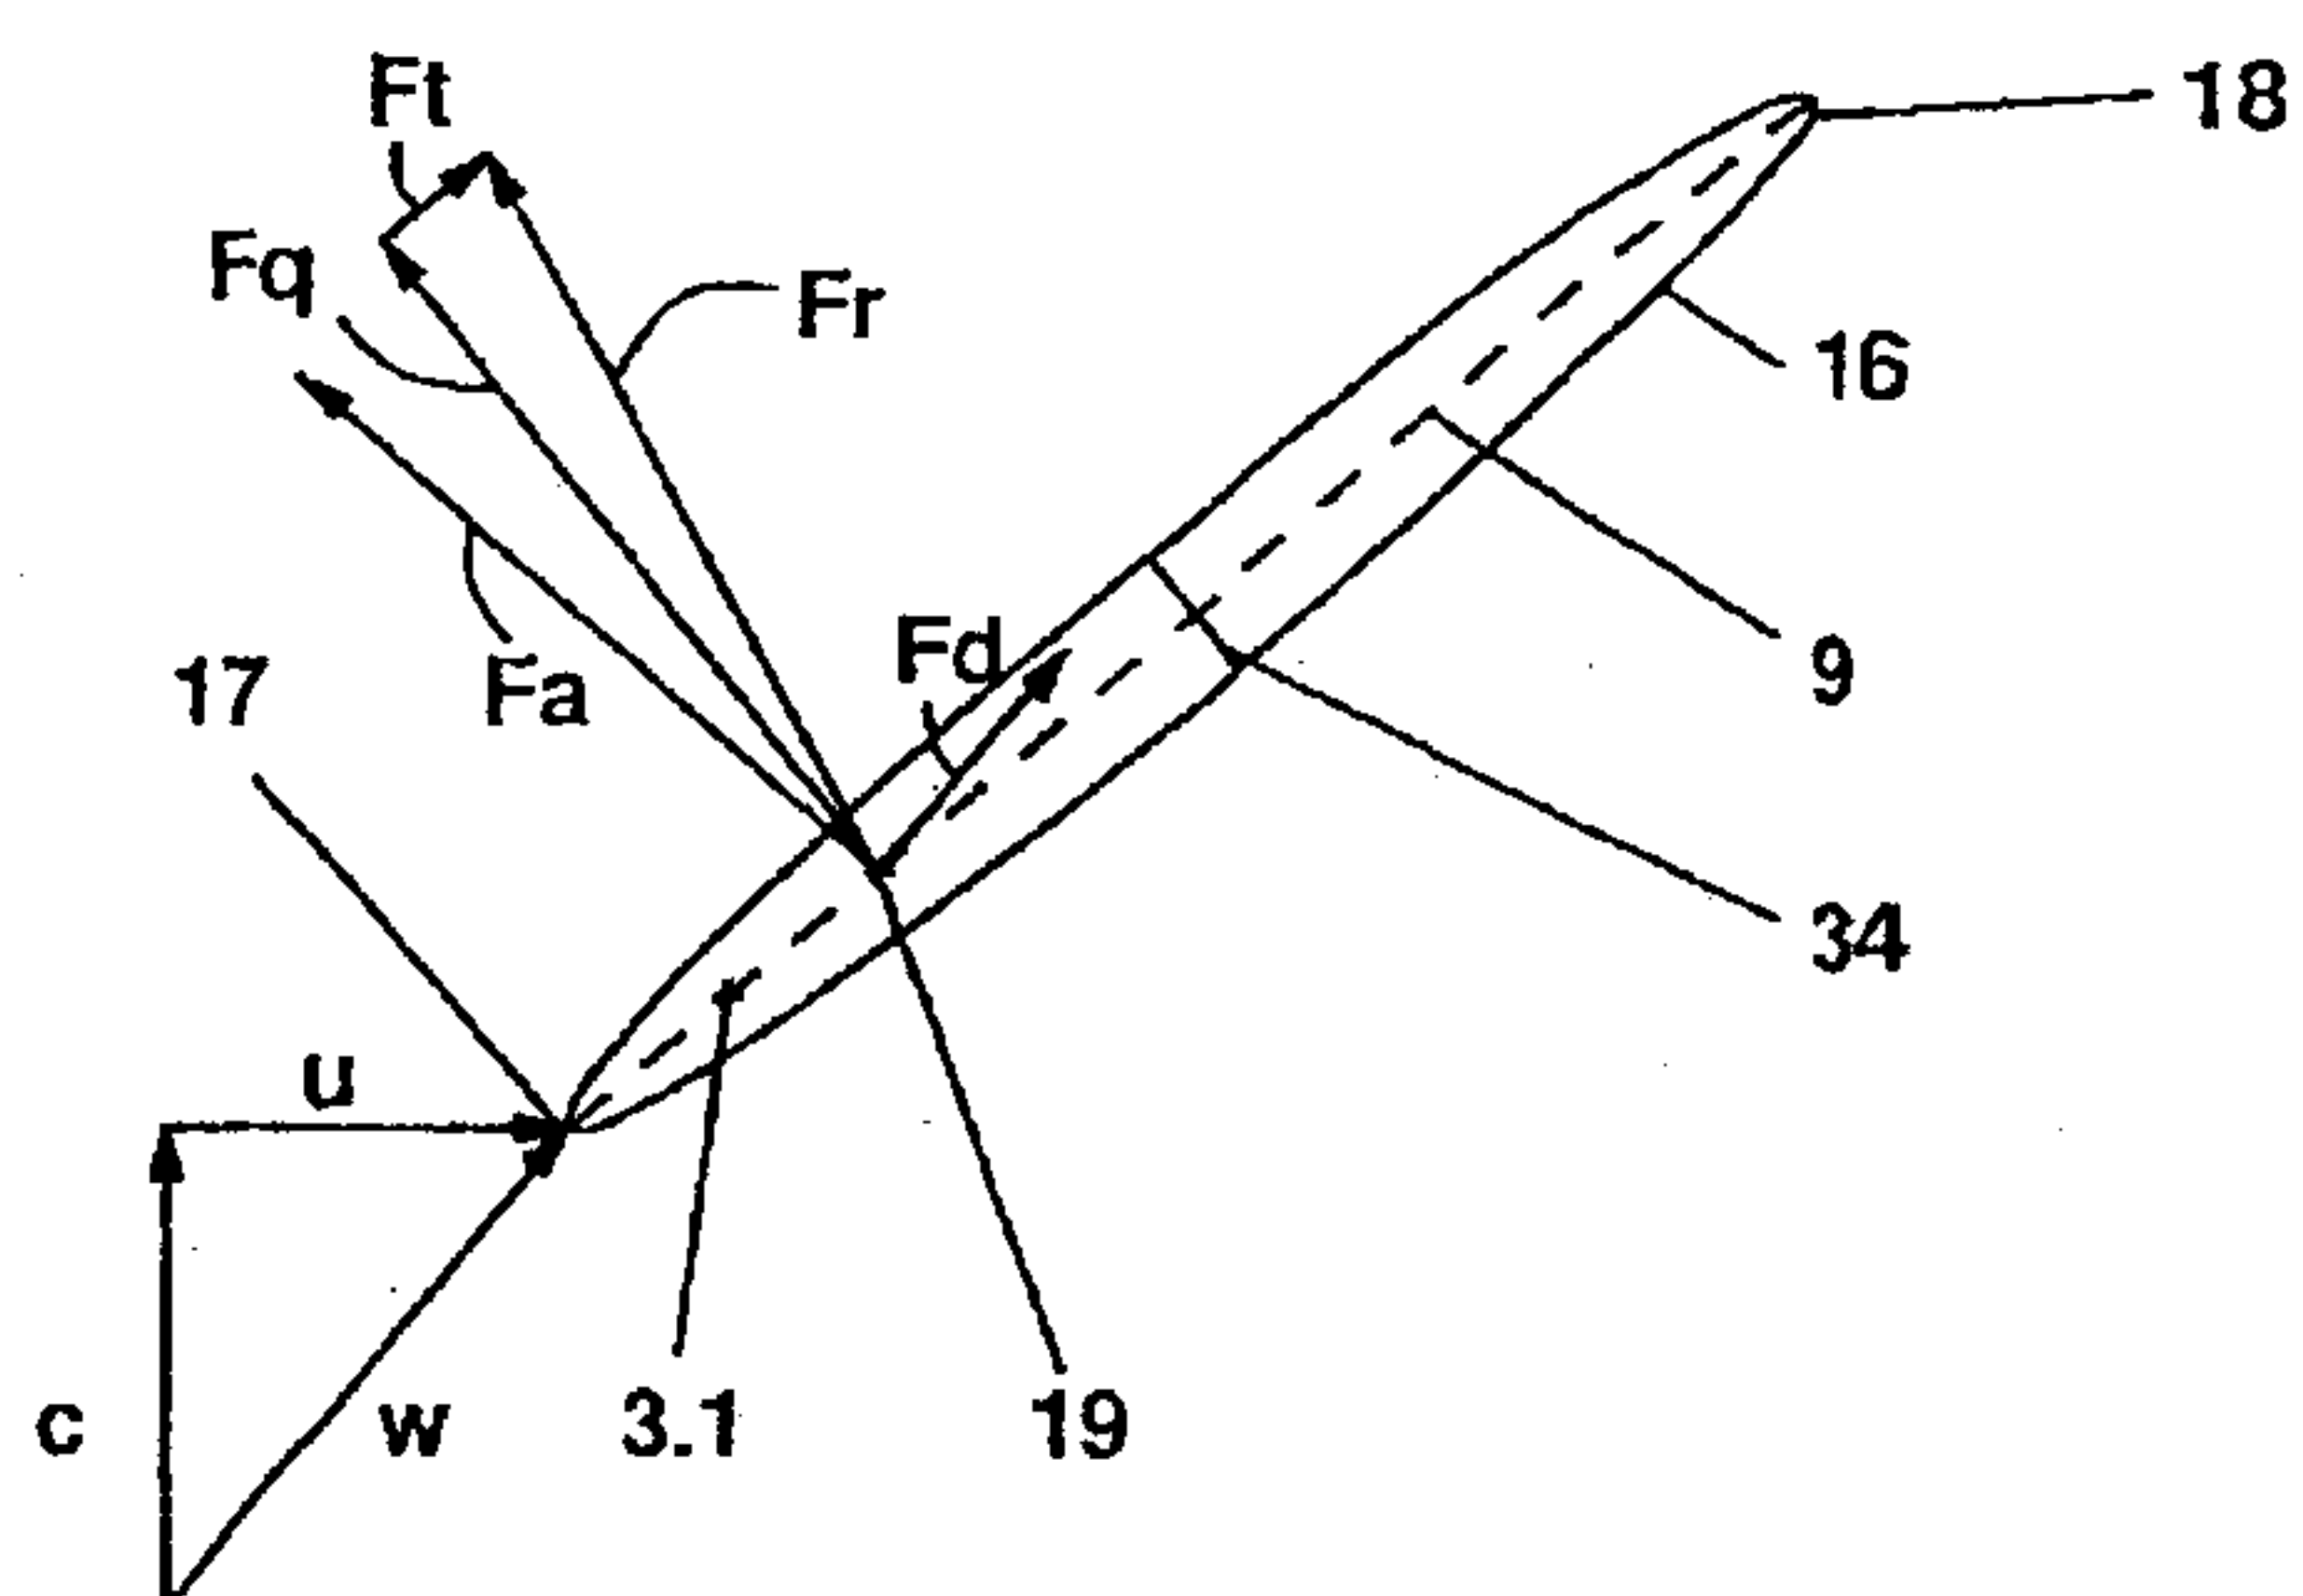


Fig. 8

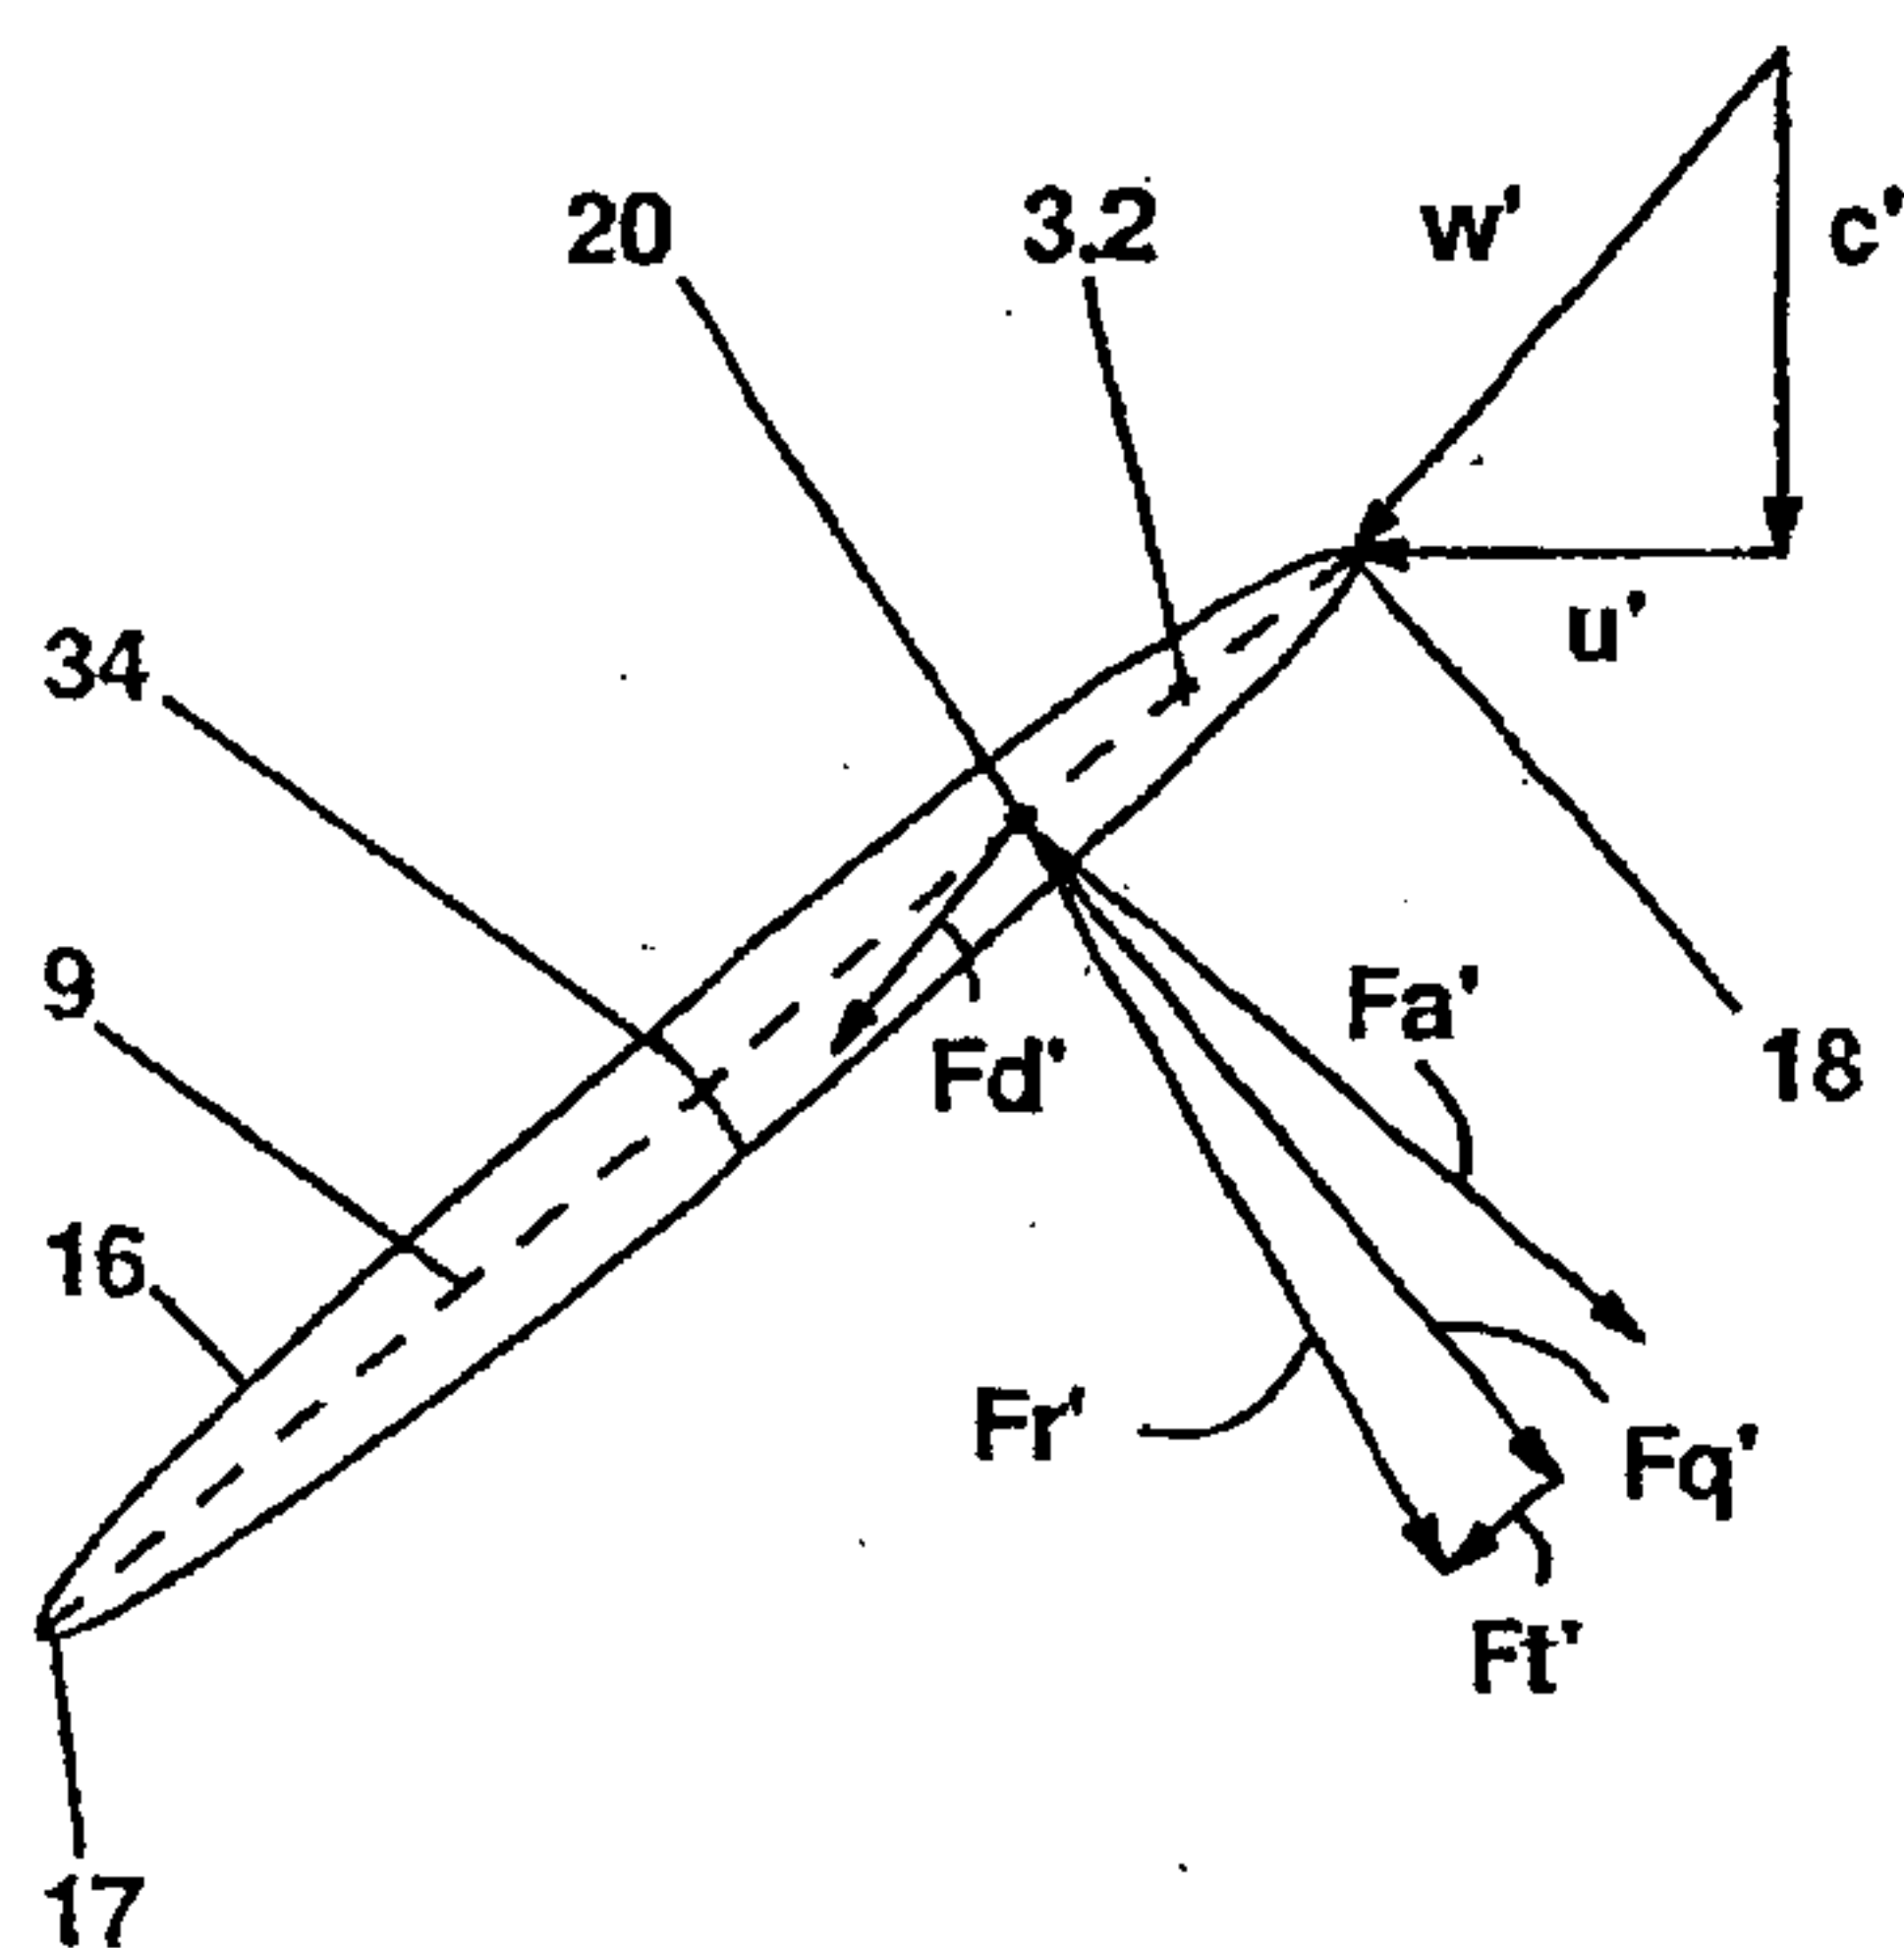

C-C

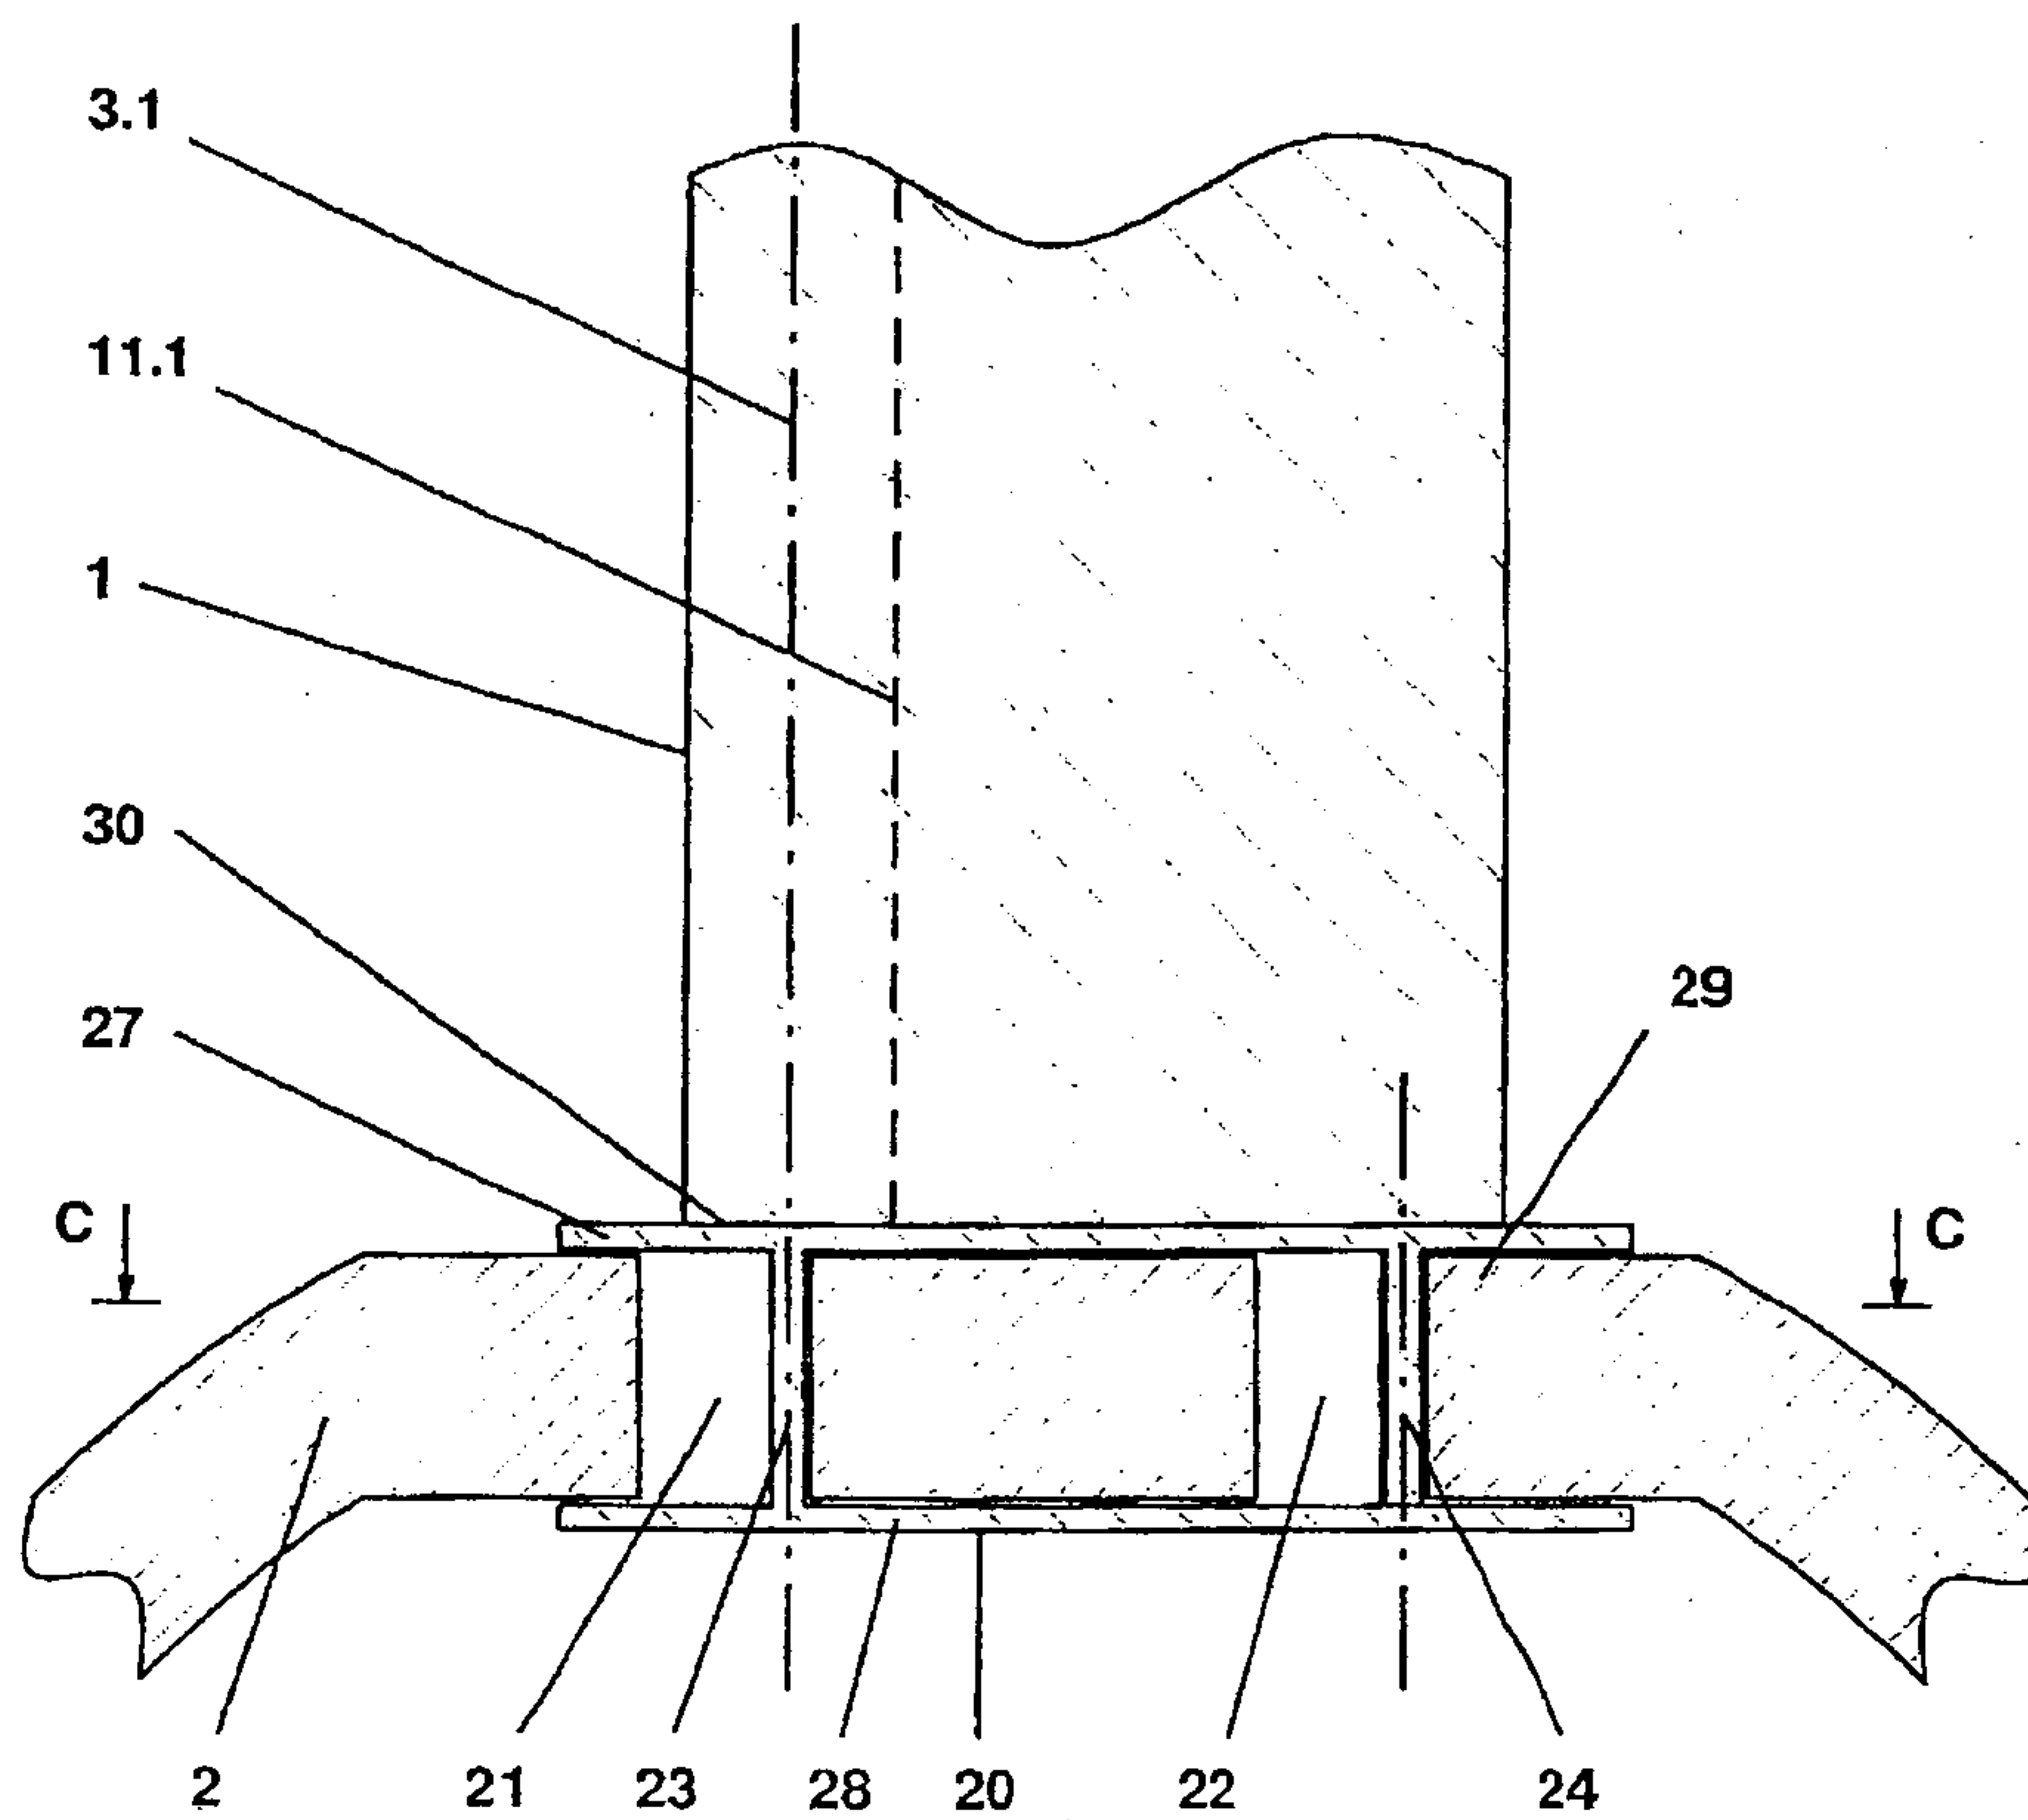



Fig. 11

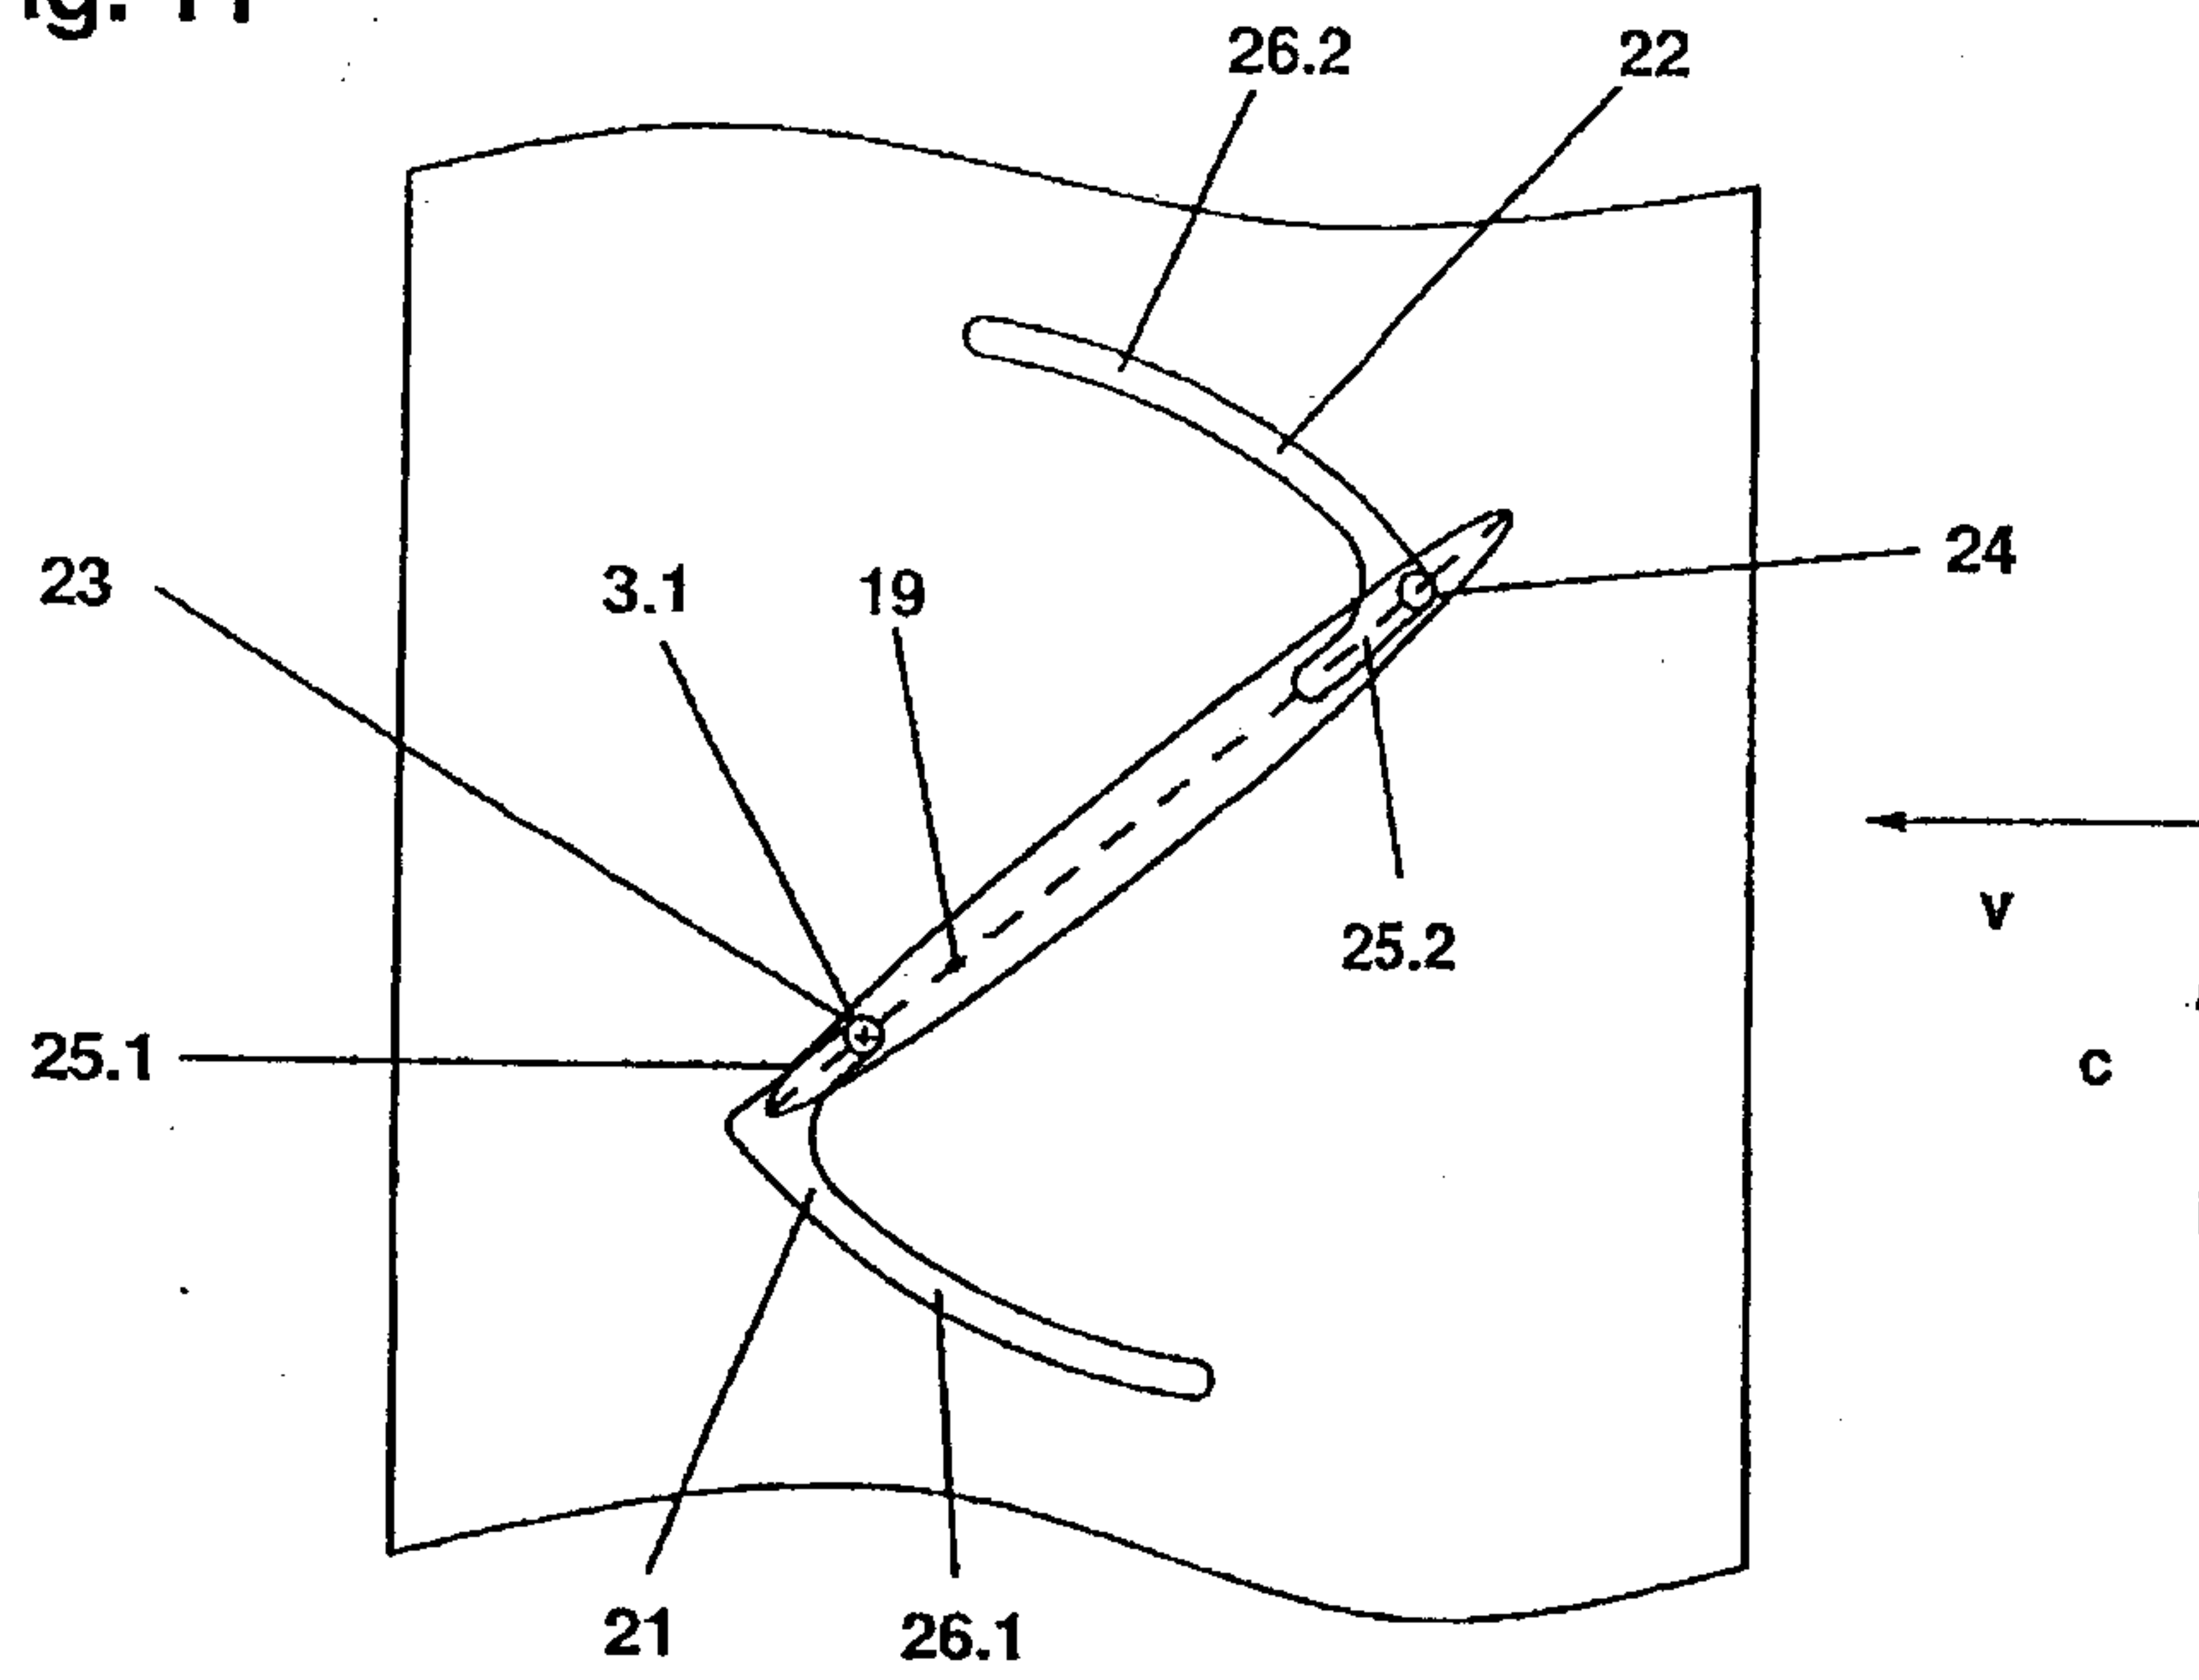


Fig. 12

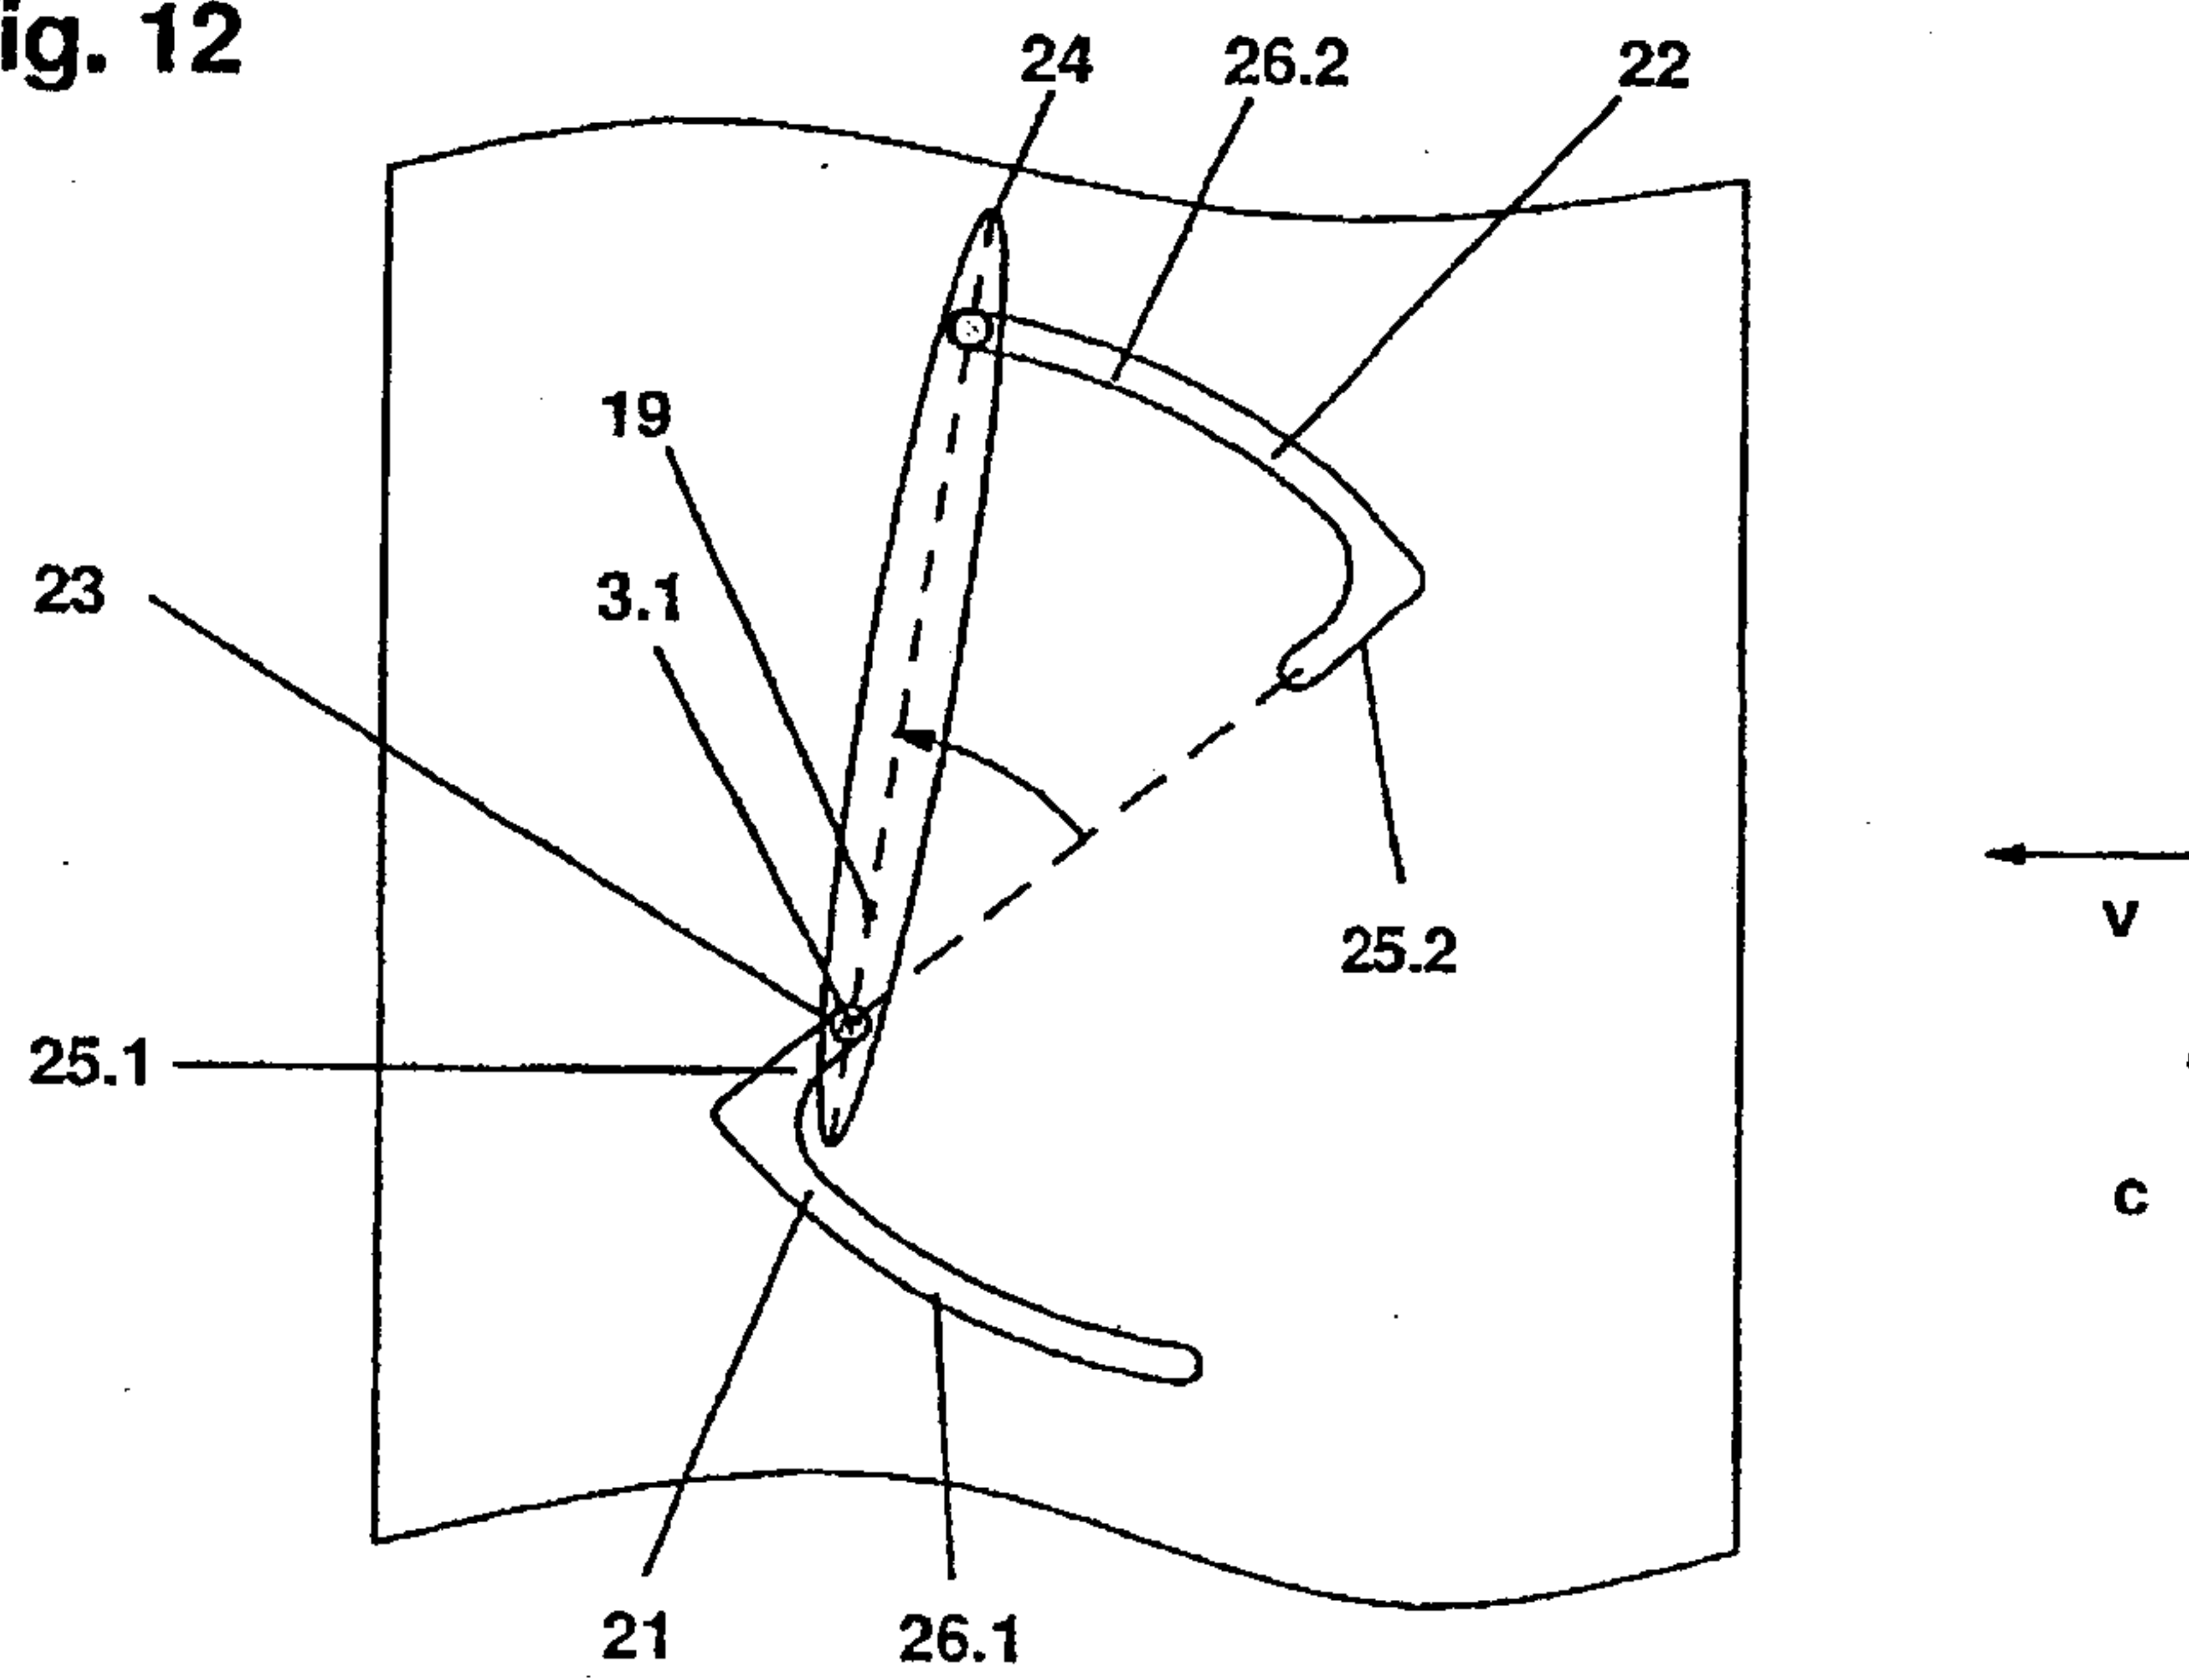


Fig. 13

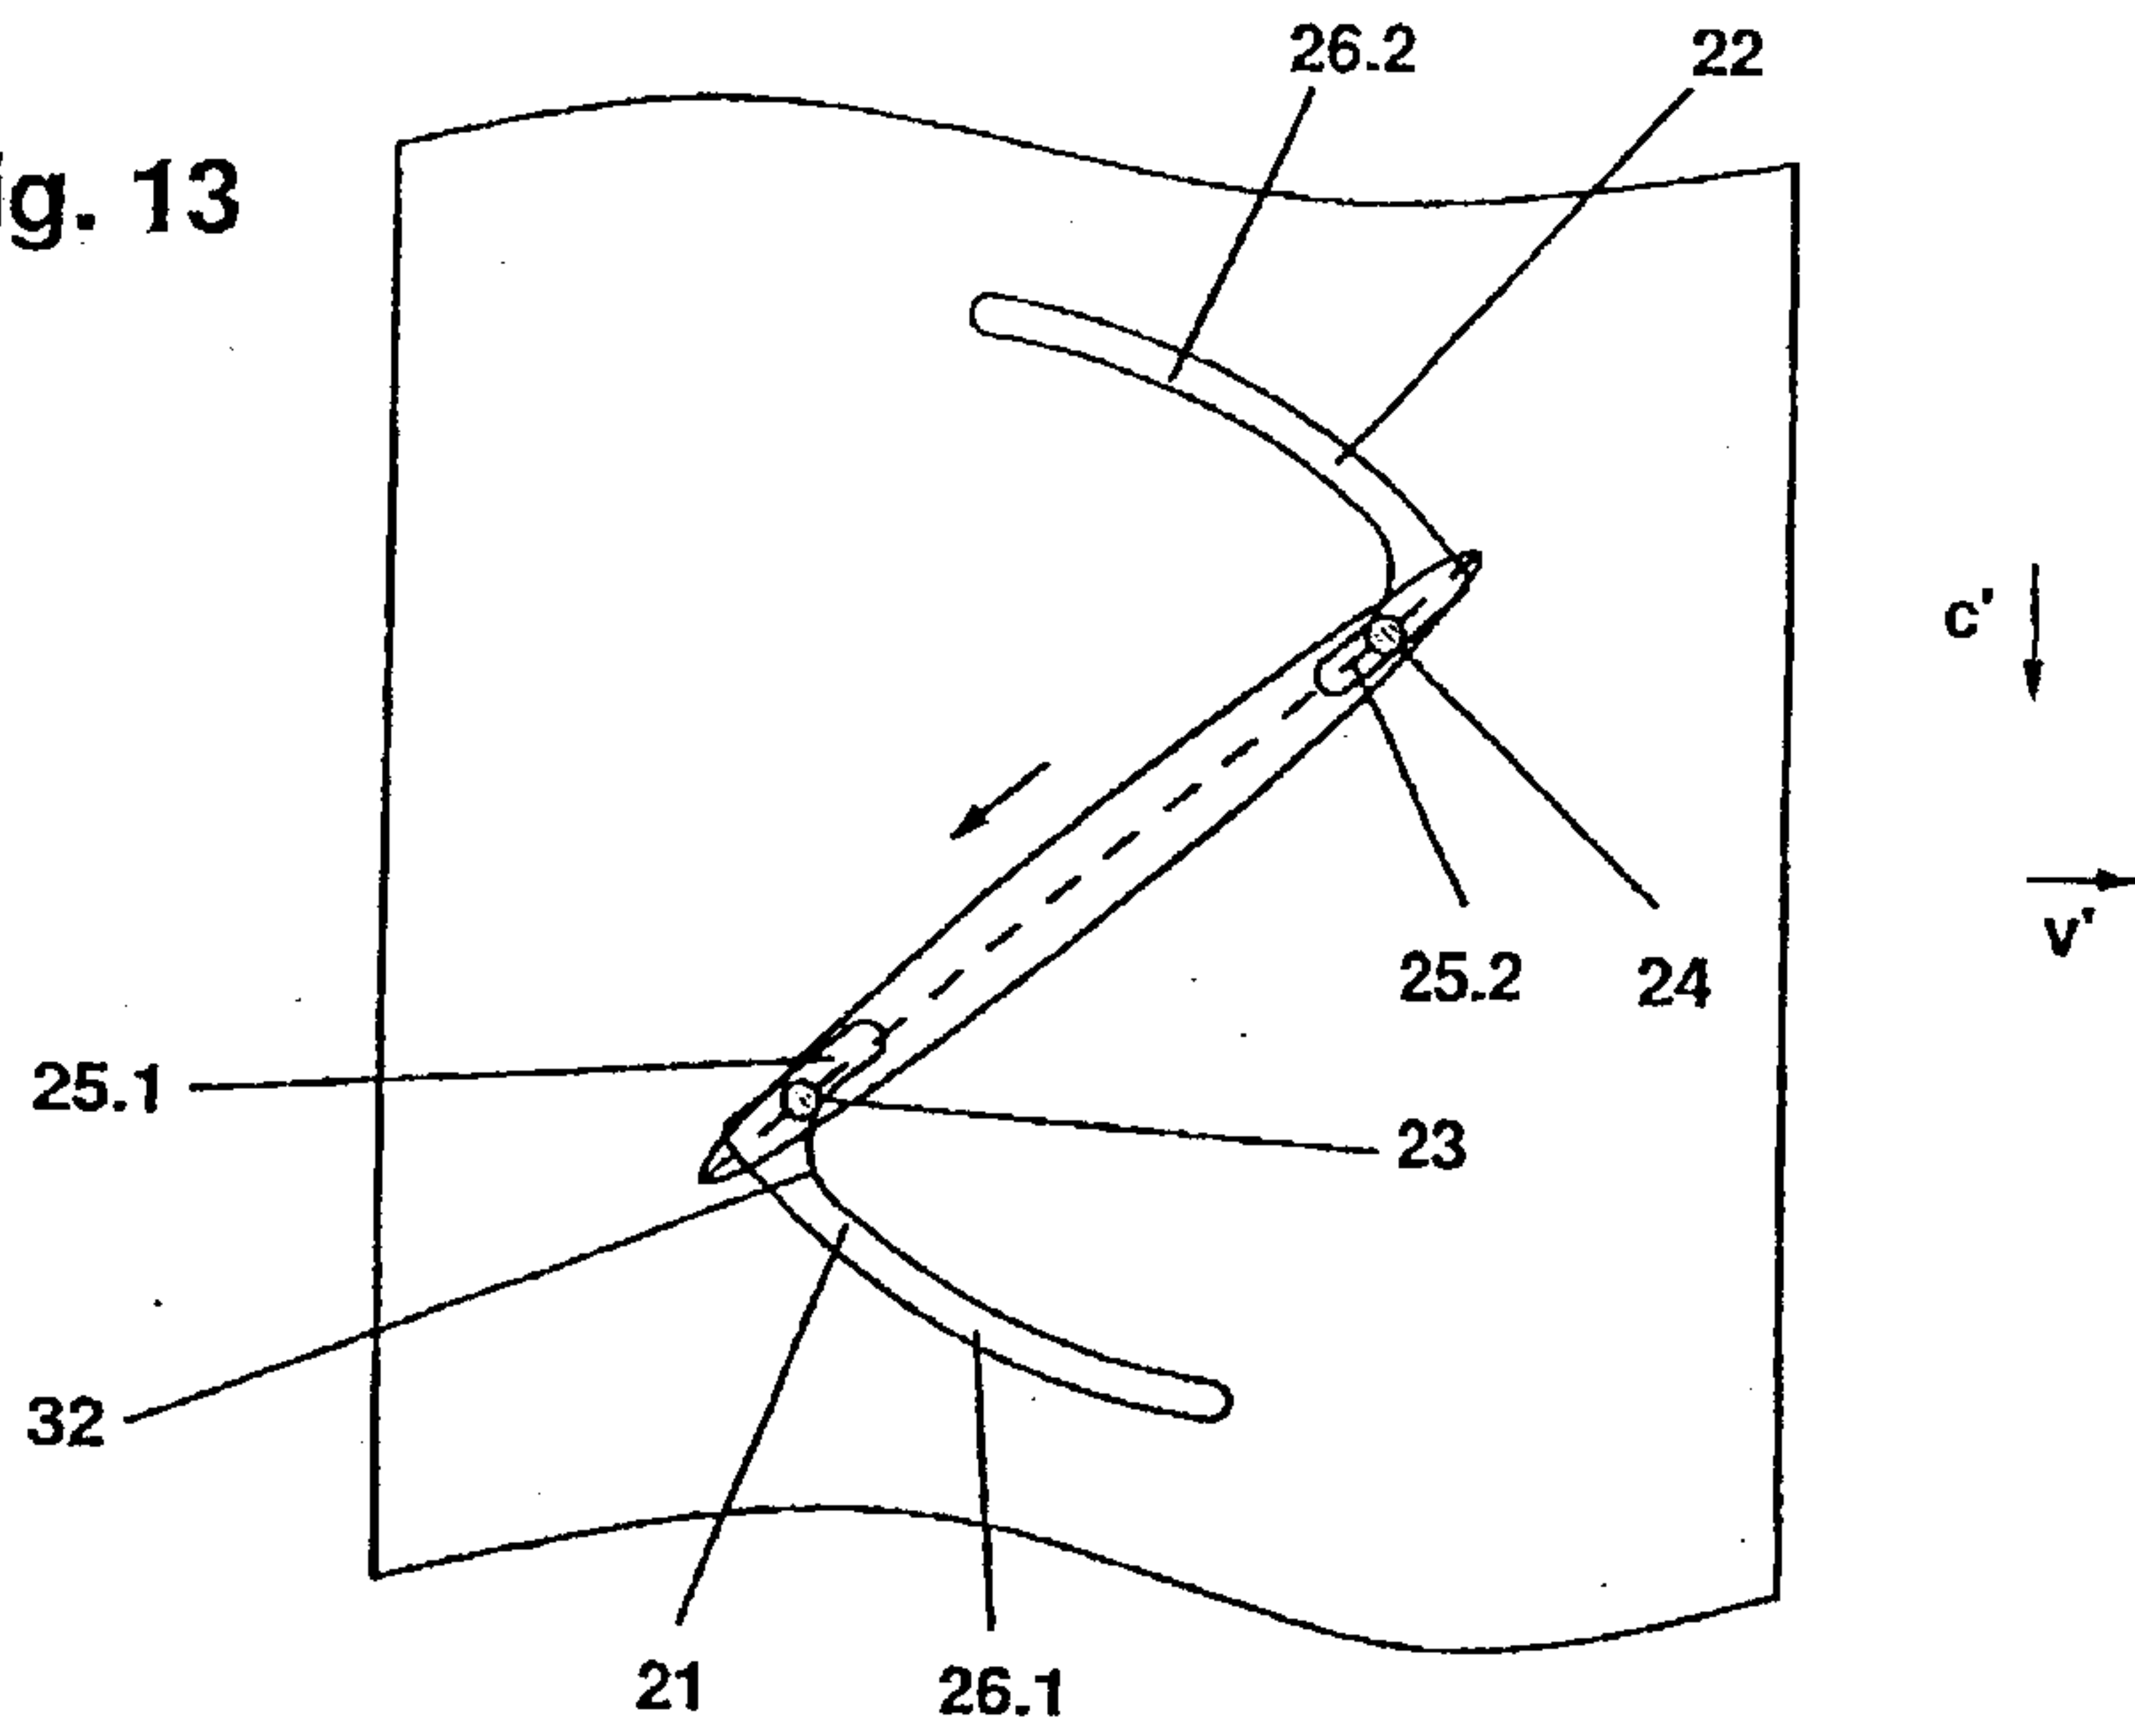


Fig. 14

