660194

SPRUSON & FERGUSON

AUSTRALIA

PATENTS ACT 1990

PATENT REQUEST: STANDARD PATENT

I/We, the Applicant(s)/Nominated Person(s) specified below, request I/We be granted a patent for the invention disclosed in the accompanying standard complete specification.

[70,71] Applicant(s)/Nominated Person(s):

Koninklijke PTT Nederland N.V., of c/o Legal Affairs, Intellectual Property Group, 2509 CH The Hague, THE NETHERLANDS

[54] Invention Title:

Method for Authenticating Communication Participants, System for Application of the Method and First Communication Participant and Second Communication Participant for Application in the System

[72] Inventor(s):

Klaas Pieter Vlieg, Jurgen Jacob Spaanderman and Maria Leo Wenas

[74] Address for service in Australia:

Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower
31 Market Street
Sydney New South Wales Australia (Code **SF**)

Details of Basic Application(s):

[31] Appl'n No(s):	**[33] Country:**	**[32] Application Date:**
9101796	NL	25 October 1991

DATED this TWENTY THIRD day of OCTOBER 1992

Koninklijke PTT Nederland N.V.

By: J. Ferguson.

Registered Patent Attorney

IRN: 223576

INSTR CODE: 59380

5845/7

SPRUSON & FERGUSON

Australia

Patents Act 1990

NOTICE OF ENTITLEMENT

I, John Gordon Hinde, of Spruson & Ferguson, St Martins Tower, 31 Market Street, Sydney, New South Wales 2000, Australia, being the patent attorney for the Applicant(s)/Nominated Person(s) in respect of an application entitled:

Method for Authenticating Communication Participants, System for Application of the Method and First Communication Participant and Second Communication Participant for Application in the System

state the following:-

The Applicant(s)/Nominated Person(s) has/have entitlement from the actual inventor(s) as follows:-

The Applicant(s)/Nominated Person(s), by virtue of a Contract of Employment between the actual inventor(s) as employee(s) and the Applicant(s)/Nominated Person(s) as employer(s), is a person entitled to have the patent assigned to it if a patent were granted on an application made by the actual inventor(s).

The Applicant(s)/Nominated Person(s) is/are the applicant(s) of the basic application(s) listed on the Patent Request. The basic application(s) listed on the Patent Request is/are the application(s) first made in a Convention Country in respect of the invention.

DATED this 13th day of January 19 93

.....

John Gordon Hinde

IRN: 223576 INSTR CODE: 59380

KRS/665P

AU9227290

(12) PATENT ABRIDGMENT (11) Document No. AU-B-27290/92
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 660194

(54) Title
METHOD FOR AUTHENTICATING COMMUNICATION PARTICIPANTS, SYSTEM FOR APPLICATION OF THE METHOD AND FIRST COMMUNICATION PARTICIPANT AND SECOND COMMUNICATION PARTICIPANT FOR APPLICATION IN THE SYSTEM

International Patent Classification(s)
(51)[5] H04L 009/32 H04L 009/14 H04M 001/72

(21) Application No. : 27290/92 (22) Application Date : 23.10.92

(30) Priority Data

(31) Number	(32) Date	(33) Country
9101796	25.10.91	NL THE NETHERLANDS

(43) Publication Date : 29.04.93

(44) Publication Date of Accepted Application : 15.06.95

(71) Applicant(s)
KONINKLIJKE PTT NEDERLAND N.V.

(72) Inventor(s)
KLAAS PIETER VLIEG; JURGEN JACOB SPAANDERMAN; MARIA LEO WENAS

(74) Attorney or Agent
SPRUSON & FERGUSON , GPO Box 3898, SYDNEY NSW 2001

(56) Prior Art Documents
US 5067156
GB 2146158
US 4193131

(57) Claim

1. A method for authenticating communication participants, comprising the steps of

generating a command signal and a first code signal at the location of a first communication participant, said first code signal being a function of at least the command signal and a first key value identifying said first communication participant, and

generating, at the location of a second communication participant, a second code signal which is a function of at least said command signal and a second key value identifying said second communication participant;

comparing said first and second code signals with each other;

generating at the location of the first communication participant, in response to a first control signal, a subsequent first key value, said subsequent first key value being a function of said first key value, and said subsequent first key value replacing said first key value;

generating at the location of the second communication participant, in response to a second control signal, a subsequent second key value, said subsequent second key value being a function of said second key value, and said subsequent second key value replacing said second key value.

.../2

3. A system of communication participant stations, wherein a first communication participant station is equipped with

command signal generation means for generating a command signal,

first code signal generation means for generating a first code signal as a function of at least the command signal and a first key value identifying the first communication participant station,

means of comparison for comparing with one another the first code signal and a second code signal, generated in a second communication participant station,

first key value generation means for generating a subsequent first key value in response to the first control signal, said subsequent first key value being a function of said first key value, and said subsequent first key value replacing said first key value, and wherein

said second communication participant station is equipped with

second code signal generation means for generating said second code signal as a function of at least said command signal and a second key value identifying said second communication participant station,

second key value generation means for generating a subsequent second key value in response to said second control signal, said subsequent second key value being a function of said second key value, and said subsequent second key value replacing said second key value.

660194

S & F Ref: 223576

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

Name and Address of Applicant: Koninklijke PTT Nederland N.V.
c/o Legal Affairs
Intellectual Property Group
2509 CH The Hague
THE NETHERLANDS

Actual Inventor(s): Klaas Pieter Vlieg, Jurgen Jacob Spaanderman and Maria Leo Wenas

Address for Service: Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia

Invention Title: Method for Authenticating Communication Participants, System for Application of the Method and First Communication Participant and Second Communication Participant for Application in the System

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

Titel:

Method for authenticating communication participants, system for application of the method and first communication participant and second communication participant for application in the system.

A. BACKGROUND OF THE INVENTION

The invention relates to a method for authenticating communication participants, a first communication participant generating a command signal and generating a first code signal which is a function of at least the command signal and a first key value associated with the first communication participant, and a second communication participant generating a second code signal which is a function of at least the command signal and a second key value associated with the second communication participant, which first and second code signal are compared to each other, the first communication participant generating, in response to a first control signal, a subsequent first key value and the second communication participant generating, in response to a second control signal, a subsequent second key value.

A method of this type is disclosed in US 4,688,250. This describes how a ground station (the first communication participant) and a satellite (the second communication participant, also called secondary communication participant) communicate with each other, the satellite only being allowed to execute commands originating from this one ground station and not being allowed to react to commands originating from other (hostile) ground stations. For this purpose, the ground station transmits, together with some command data (the command signal), a code word (the first code signal) which is a cryptographic function of the command data and a secret key (the first key value) which is stored in the ground station. The satellite subsequently generates, on the basis of the same command data and a secret key (the

second key value) which is stored in the satellite, a code word (the second code signal), and compares this with the code word transmitted by the ground station. The two code words will be equal if and only if the two secret keys are identical. In the case of identical code words, the ground station has been authenticated sufficiently, and the command is executed by the satellite. In all other cases the command is ignored.

This does require changing the secret keys from time to time. In the abovementioned US patent specification this is implemented by having the ground station transmit a key change command (the first and second control signal), in response to which both the ground station and the satellite generate new secret keys (the subsequent first key value and the subsequent second key value) which are a function of a change code word and a master key, both of which are stored in the ground station as well as in the satellite. Moreover, this change code word is changed regularly.

This known method has the drawback that the new secret keys to be generated are a function of the master key which is stored in the ground station as well as in the satelli and which has a fixed value during the entire satellite mission. As soon as the value of this master key has become known to outsiders, it becomes much easier for them to find out during the remainder of the satellite mission the new secret keys to be generated. Furthermore, this method, when applied in larger systems with considerably more secondary communication participants (such as ISDN networks with many NT's, and smart card systems), has the drawback that each secondary communication participant must have his own unique master key, and the method, when applied in many closely adjacent systems (each system comprising a first and a second communication participant, such as cordless telephone systems), has the drawback that each system should have its own unique master key, which

makes additional demands on the production process.

B. SUMMARY OF THE INVENTION

An object of the invention, inter alia, is to provide a method in which the abovementioned drawback of the master key having the fixed value no longer occurs, in which, in the case of application in a large system with more secondary communication participants, all secondary communication participants are in principle identical, and in which, in the case of application in many closely adjacent systems, all systems are in principle identical, so that no additional demands need to be made on the production process.

The invention is based on the insight that by having the (first or second) communication participant generate the subsequent (first or second) key value in response to the (first or second) control signal, the result is achieved that the subsequent key value is no longer determined on the basis of a master key having a fixed value, that all in principle identical secondary communication participants can each be made unique by varying the number of control signals per secondary communication participant immediately after installation of said participant, each secondary communication participant being provided a different number of times with a subsequent key value and thus being made unique with regard to the other secondary communication participants, and that all the closely adjacent systems, which are in principle identical, can each be made unique by varying the number of control signals per system immediately after installation of said system, each system being provided a different number of times with a subsequent key value and thus being made unique with regard to the other closely adjacent systems.

Generating the subsequent (first or second) key value also as a function of the (first or second) control signal achieves the result that the number of possible subsequent key values is substantially increased and that the number of control signals required for making the communication participants unique after they have been installed is substantially reduced. For example, if the control signal is a randomly generated number (which, together with the instantaneous key value, therefore determines the subsequent key value) very many communication participants who are, in principle, identical to each other, can be made almost completely unique with respect to one another, by generating only one or a few control signals.

AUSTRALIAN PATENT OFFICE

It is furthermore an object of the invention, inter alia, to provide a system for applying the method of the type described in the preamble, in which the above mentioned drawback of the master key having the fixed value no longer occurs and in which, in the case of using a large system with more secondary communication participants, all the secondary communication participants are in principle identical and, in the case of using many closely adjacent systems, all the systems are in principle identical, so that no additional demands are made on the production process.

According to the invention there is provided a method for authenticating communication participants, comprising the steps of

generating a command signal and a first code signal at the location of a first communication participant, said first code signal being a function of at least the command signal and a first key value identifying said first communication participant, and

generating, at the location of a second communication participant, a second code signal which is a function of at least said command signal and a second key value identifying said second communication participant;

comparing said first and second code signals with each other;

generating at the location of the first communication participant, in response to a first control signal, a subsequent first key value, said subsequent first key value being a function of said first key value, and said subsequent first key value replacing said first key value;

generating at the location of the second communication participant, in response to a second control signal, a subsequent second key value, said subsequent second key value being a function of said second key value, and said subsequent second key value replacing said second key value.

The invention also provides a system of communication participant stations, wherein a first communication participant station is equipped with

command signal generation means for generating a command signal,

first code signal generation means for generating a first code signal as a function of at least the command signal and a first key value identifying the first communication participant station,

means of comparison for comparing with one another the first code signal and a second code signal, generated in a second communication participant station,

first key value generation means for generating a subsequent first key value in response to the first control signal, said subsequent first key value being a function of said first key value, and said subsequent first key value replacing said first key value, and wherein

said second communication participant station is equipped with

second code signal generation means for generating said second code signal as a function of at least said command signal and a second key value identifying said second communication participant station,

second key value generation means for generating a subsequent second key value in response to said second control signal, said subsequent second key value being a function of said second key value, and said subsequent second key value replacing said second key value.

AUSTRALIAN PATENT OFFICE

The invention also provides a first communication participant station for a communication system, which is equipped with:

command signal generation means for generating a command signal,

first code signal generation means for generating a first code signal as a function of at least the command signal and a first key value identifying the first communication participant station,

means for comparing, with one another, the first code signal and a second code signal, and

first key value generation means for generating a subsequent first key value in response to the first control signal, said subsequent first key value being a function of said first key value, and said subsequent first key value replacing said first key value.

The invention also provides a second communication participant station for a communication system, which is equipped with

second code signal generation means for generating a second code signal as a function of at least a command signal and a second key value identifying the second communication participant station, and

second key value generation means for generating a subsequent second key value in response to the second control signal, said subsequent second key value being a function of said second key value, and said subsequent second key value replacing said second key value.

AUSTRALIAN PATENT OFFICE

Naturally, in the case of the method according to the invention it is possible to authenticate from both sides. If the system, for example, comprises two first communication participants, the one may authenticate the other and vice versa, because both communication participants are provided with the command signal generation means and the means of comparison.

C. REFERENCE

US 4,688,250

D. EXEMPLARY EMBODIMENTS

The invention will be explained in more detail by reference to an exemplary embodiment shown in the figures, in which:

Figure 1 shows a diagrammatic illustration of the method according to the invention and

Figure 2 shows a block diagram of the system according to the invention, provided with the first and second communication participant according to the invention.

In the diagrammatic illustration of the method according to the invention shown in Figure 1, the boxes have the following significance:

PATENT OFFICE

	1	CMMNCTN PRTCPNT	the first communication participant
	2	CMMNCTN PRTCPNT	the second communication participant
5	3	CMMNDSGNL	generating the command signal
	4	CODESGNL	generating the first code signal
	5	CODESGNL	generating the second code signal
10			
	6	KEYVL	generating the first key value
	7	KEYVL	generating the second key value
15	8	CNTRLSGNL	generating the first control signal
	9	CNTRLSGNL	generating the second control signal
	10	CMPR	comparing the code signals
20			

	11	EQL ?	if code signals are equal:
			exit yes
			if code signals are not equal:
			exit no

12	CMMNCTN STRTD COUNTR : =0	the start of the communication after the equality of the two code signals has been found in box 11; the output of the counter (see box 14) is set to 0
13	AFTR CMMNCTN GNRT NXT CNTRL SGNLS	generating the next first and second control signals after the communication has terminated, in response to which the subsequent first and second key values are generated
14	INCRMNT COUNTR	incrementing the counter by 1 after the inequality of the two code signals has been found in box 11
15	COUNTR = 10 ?	if the value of the output of the counter is 10 : output yes if the value of the output of the counter is not 10 : exit no
16	COUNTR : = 0 GNRT ALRM SGNL	the output of the counter is set to 0 generating the alarm signal
17	RPT CMMNDSGNL NO CMMNCTN	repeating the command signal communication is not yet taking place

The method according to the invention as illustrated diagrammatically in Figure 1 takes place as follows. If the first communication participant (box 1) wishes to communicate with the second communication participant (box 2), the first communication participant transmits a command signal (box 3). In response thereto, the first communication participant generates a first code signal (box 4) which is a function of both the command signal and a first key value (box 6), and the second communication participant generates a second code signal (box 5) which is a function of both the command signal and a second key value (box 7). Subsequently the two code signals are mutually compared (box 10, equal yes or no, box 11). If they are equal (which is only possible if the two key values are also equal to one another), the two communication participants may communicate with one another, an output of a counter to be used subsequently being set to 0 (communication started, counter: = 0, box 12). After the communication, subsequent first and second control signals are generated (after communication, generate subsequent control signals, box 13), a subsequent first key value (box 6) being generated as a function of the subsequent first control signal (box 8) and of an instantaneous first key value (box 6), and a subsequent second key value (box 7) being generated as a function of the subsequent second control signal (box 9) and of an instantaneous second key value (box 7).

If the two code signals are not equal to one another (which is only possible if the two key values are also not equal to one another), the output of the counter is incremented by 1 (increment counter, box 14). Whether the output of this counter has the value 10 (counter = 10 ?, box 15) is then tested. So long as this is not the case, the command signal is repeated, and no communication takes place (repeat command signal, no communication, box 17). As soon as the output of the counter has the value 10, this output is set to

the value 0 and the alarm signal is generated (counter := 0, generate alarm signal, box 16).

For the method according to the invention to function correctly, it is necessary that the first and second code signal are each the same function of the command signal and of the first and second key value, respectively (in other words that box 4 and 5 are identical), that the subsequent first and second key value are each the same function of the instantaneous first and second key value, respectively, and of the first and second control signal, respectively (in other words that box 6 and 7 are identical), and that the first and second control signal are identical to one another (in other words that box 8 and 9 are identical), which could, for example, be effected by taking both of them from the output of a random generator. The output value 10 of the counter, at which the alarm signal is generated, is of course chosen completely arbitrarily from the set of natural numbers.

The first and second control signals in response to which the subsequent first and second key signals may be generated, may be transmitted either after the communication (Figure 1) or before the communication or during the communication, in which connection the term communication should be interpreted as widely as possible. For example, it may be a telephone conversation between different (cordless) subscribers or merely a command originating from a ground station and intended for a satellite. It could also be a complete data file, or a data word, of which, for example, a number of bytes are intended for authentication.

The block diagram shown in Figure 2 of the system 20 according to the invention comprises a first communication participant 21 and a second communication participant 22. For the sake of simplicity, only two mutually coupled communication participants are shown, in practice (such as, for

example, in the case of a telephone network) many second communication participants may be coupled to a first communication participant, and 2 first communication participants may also be mutually coupled. Communication participant 21 and communication participant 22 are mutually coupled via link 23, which may be implemented in either completely physical form or partly in wireless form.

Communication participant 21 comprises a monitoring unit 30 having an input 30-1 and an output 30-2 which are both connected to link 23 for the purpose of continuously monitoring the state of the link. Monitoring unit 30 also has an output 30-3 which is connected to an input 31-1 of a control signal generator 31 which, via an output 31-3, generates a first control signal in response to a monitoring signal present at input 31-1. Output 31-3 is connected to an input 32-1 of first key value generation means 32 which, in response to the first control signal, generate a (subsequent) first key value which may be a function of the first control signal and which, in any case, is a function of an (instantaneous) first key value. To this end, an output 32-3 of key value generation means 32 is connected to an input 32-2. Output 32-3 is also connected to an input 33-1 of first code signal generation means 33, which furthermore have an input 33-2 and an output 33-3. Input 33-2 is connected to an output 34-3 of command signal generation means 34, which furthermore have an input 34-1, which is connected to link 23, and an input 34-2 which is connected to output 30-3. In response to the monitoring signal present at input 34-2 and/or the signal present at input 34-1, command signal generation means 34 generate a command signal which, via output 34-3 and input 33-2, is supplied to code signal generation means 33. Code signal generation means 33 generate a first code signal which is a function of the command signal present at input 33-2 and of the first key value present at input 33-1. The first

code signal is supplied, via output 33-3, to an input 35-1 of means of comparison 35, which also have an input 35-2, which is connected to link 23 for the purpose of receiving a second code signal, and an output 35-3. Output 35-3 is connected to link 23 and to an input 36-1 of counter means 36, which furthermore have an output 36-3 which is connected to an input 37-1 of comparator 37 and an input 36-2 which is connected to an output 37-3 of comparator 37. In addition, comparator 37 has an input 37-2, to which a signal having the value 10 is supplied, and the output 37-3 is connected to link 23. If the first code signal at input 35-1 and a second signal at input 35-2 do not correspond, means of comparison 35 generate a counter signal to counting means 36 which in response thereto increment their output value by 1. As soon as this output value has the value 10, comparator 37 generates an alarm signal to alarm unit 38 and a reset signal which is supplied to counting means 36, which, in response thereto, set their output value to zero.

Communication participant 22 comprises a monitoring unit 40 having an input 40-1 and an output 40-2 which are both connected to link 23 for the purpose of continuously monitoring the state of the link. Monitoring unit 40 also has an output 40-3 which is connected to an input 41-1 of a control signal generator 41 which, via an output 41-3, generates a second control signal in response to a monitoring signal present at input 41-1. Output 41-3 is connected to an input 42-1 of second key value generation means 42 which, in response to the second control signal, generate a (subsequent) second key value which may be a function of the second control signal and which, in any case, is a function of an (instantaneous) second key value. To this end, an output 42-3 of key value generation means 42 is connected to an input 42-2. Output 42-3 is also connected to an input 43-1 of second code signal generation means 43, which furthermore have an input 43-2 and an output 43-3. Input 43-2 is

connected to link 23. Code signal generation means 43 generate a second code signal which is a function of the command signal present at input 43-2, which is supplied via link 23, and of the second key value present at input 43-1. The second code signal is supplied, via output 43-3 and link 23, to input 35-2 of means of comparison 35.

The system 20 shown in Figure 2 works as follows. If communication is required, command signal generation means 34 generate the command signal which is supplied to code signal generation means 33 and, via link 23, to code signal generation means 43. Code signal generation means 33 generate the first code signal which is a function of the command signal and of the first key value originating from key value generation means 32. Code signal generation means 43 generate the second code signal which is a function of the command signal and of the second key value originating from key value generation means 42. The first code signal is supplied directly, and the second code signal is supplied via link 23, to means of comparison 35.

Normally, the two code signals will be identical because the two key values are identical, and means of comparison 35 generate a signal which, via link 23, is supplied to monitoring unit 30 and monitoring unit 40, in response whereto the communication can start. The means by which this communication is implemented are not shown in Figure 2, and they may, in principle, be embodied in many ways. Thus, it is, for example, possible to arrange for subsequent command signals, which are provided with data, to be generated by the command signal generation means 34, which command signals, either encrypted or not encrypted via code signal generation means 33 and 43, are then transmitted back and forth via link 23. It would also be possible to transmit long data words back and forth via link 23, a number of bytes of each data word serving for authentication and thus a check being

carried out for each data word whether the two key values agree.

After the communication has ended, which is monitored by monitoring units 30 and 40, monitoring unit 30 generates a signal to control signal generator 31, in response whereto said generator generates the first control signal which is supplied to key value generation means 32, and monitoring unit 40 generates a signal to control signal generator 41, in response whereto said generator generates the second control signal which is supplied to key value generation means 42. Key value generation means 32 and 42, respectively, then generate the subsequent first and second key value, respectively, which is a function of the instantaneous first and second key value, respectively, and which may be a function of also the first and the second control signal, respectively. Subsequently, the next communication can take place on the basis of the new key values. It is expedient in this context that all the secondary communication participants (in Figure 2, only 1 secondary communication participant 22 is shown) can be produced in the same way, without each communication participant having to be supplied with a unique key. Or, in the case of, for example, a cordless telephone system having a primary and a secondary communication participant, that of all the cordless telephone systems to be produced, all the primary communication participants on the one hand and all the secondary communication participants on the other hand can be produced in an identical manner. After authentication has taken place only a few times, each secondary communication participant, or each set of primary and secondary communication participants, will have become completely unique with respect to all the other communication participants or with respect to all the other sets of communication participants.

If the two code signals are not identical (because the two key values

are not equal), means of comparison 35 generate the counter signal, in response whereto counting means 36 increment their output value by 1 and in response whereto command signal generation means 34 generate the command signal again. As a result, the two code signals are generated again by code signal generation means 33 and 43 on the basis of the instantaneous, unaltered key values of key value generation means 32 and 42, and the two code signals are compared again, etc. If the two code signals are indeed identical this time, for example because there was a fault during the previous generation, communication may start. In this case, the output value of the counting means should be set to zero. If the two code signals have been found to be unequal on ten successive occasions, the output value of counting means 36 has the value ten and the comparator 37 generates the alarm signal to alarm unit 38.

The generation of the command signal by command signal generation means 34 when communication is required is generally carried out under the control of monitoring unit 30, or else under control of communication participant 21. If communication participant 22 is also required to be able to initiate a communication, this can be effected by making monitoring unit 40 as well as monitoring unit 30 suitable for controlling command signal generation means 34 (via link 23). Alternatively, this could be achieved by likewise providing communication participant 22 with command signal generation means. In both cases, priority rules then have to be established in order to prevent the two communication participants 21, 22 getting out of synchronisation as a consequence of simultaneous notification of the desire to communicate. Moreover, communication participant 22 could be provided with further means of comparison, further counting means and/or a further comparator, corresponding to communication participant 21, which then

makes it possible to have each communication participant 21, 22 check the identity of the other himself.

Having each communication participant 21, 22 check the identity of the other himself provides, with a small extension, the possibility of enabling communication even after the counting means present in both communication participants have or should have generated the reset signal and the alarm signal. By, for example, having a fixed reset key value generated in the apparatus of each communication participant 21, 22 in response to the reset signal of the counting means, it is achieved that the two communication participants will subsequently generate equal code signals, which enables communication. This "resetting" should take place internally and in such a way that each communication participant 21, 22 is only able to do this with regard to himself, it not being possible for any outsider to be able to do the same with regard to the communication participant in question. The reset signal in this case must under no circumstances be transmitted via link 23 or reach link 23, this being prevented by providing each communication participant 21, 22 with his own counting means.

The design of communication participants 21, 22 as shown in the block diagram of Figure 2 could be considerably simplified by omitting the two control signal generators 31, 41, in which case the two key value generation means 32, 42 may, for example, be controlled by command signal generation means 34. In practice this means that the first and second control signal then coincide with the command signal and that the subsequent key value is a function of the instantaneous key value and of the command signal.

In the case of different secondary communication participants 22, all of which must be able to communicate with primary communication participant 21, it would be possible to have an identification code transmitted

prior to the communication, which identification code indicates which secondary communication participant 22 should be involved in the communication. Such an identification code could for example be added to the command signal. It is, however, also conceivable that the code signal by itself serves per se for identification, for example by each secondary communication participant 22 having codes signal generation means 43 which are based on a unique function, or by having key value generation means which are based on a unique function. In this case it is disadvantageous that each secondary communication participant 22 then has to be provided with a unique function, which puts additional demands on the production process. Furthermore, all the unique functions must be known at the first communication participant 21, which increases the latter's extent and complexity.

Having the command signal generation means 34 generate the command signal once more if the two code signals are not identical is, of course, only one embodiment. It is, for example, also conceivable for this command signal to remain present at output 34-3 as long as no equality of code signals is found, i.e. until the reset signal is generated or has been generated by comparator 37.

The claims defining the invention are as follows:

1. A method for authenticating communication participants, comprising the steps of

generating a command signal and a first code signal at the location of a first communication participant, said first code signal being a function of at least the command signal and a first key value identifying said first communication participant, and

generating, at the location of a second communication participant, a second code signal which is a function of at least said command signal and a second key value identifying said second communication participant;

comparing said first and second code signals with each other;

generating at the location of the first communication participant, in response to a first control signal, a subsequent first key value, said subsequent first key value being a function of said first key value, and said subsequent first key value replacing said first key value;

generating at the location of the second communication participant, in response to a second control signal, a subsequent second key value, said subsequent second key value being a function of said second key value, and said subsequent second key value replacing said second key value.

2. A method according to claim 1, characterised in that each said subsequent first key value is also a function of at least the first control signal and each said subsequent second key value is also a function of at least said second control signal.

3. A system of communication participant stations, wherein a first communication participant station is equipped with

command signal generation means for generating a command signal,

first code signal generation means for generating a first code signal as a function of at least the command signal and a first key value identifying the first communication participant station,

means of comparison for comparing with one another the first code signal and a second code signal, generated in a second communication participant station,

first key value generation means for generating a subsequent first key value in response to the first control signal, said subsequent first key value being a function of said first key value, and said subsequent first key value replacing said first key value, and wherein

said second communication participant station is equipped with

AUSTRALIAN PATENT OFFICE

second code signal generation means for generating said second code signal as a function of at least said command signal and a second key value identifying said second communication participant station,

second key value generation means for generating a subsequent second key value in response to said second control signal, said subsequent second key value being a function of said second key value, and said subsequent second key value replacing said second key value.

4. A system of communication participant stations according to claim 3, characterised in that

the first key value generation means comprise means for generating the subsequent first key value also as a function of the first control signal, and

the second key value generation means comprise means for generating the subsequent second key value also as a function of the second control signal.

5. A first communication participant station for a communication system, which is equipped with:

command signal generation means for generating a command signal,

first code signal generation means for generating a first code signal as a function of at least the command signal and a first key value identifying the first communication participant station,

means for comparing, with one another, the first code signal and a second code signal, and

first key value generation means for generating a subsequent first key value in response to the first control signal, said subsequent first key value being a function of said first key value, and said subsequent first key value replacing said first key value.

6. A first communication participant station according to claim 5, characterised in that the first key value generation means comprise means for generating said further subsequent first key value also as a function of the first control signal.

7. A second communication participant station for a communication system, which is equipped with

second code signal generation means for generating a second code signal as a function of at least a command signal and a second key value identifying the second communication participant station, and

second key value generation means for generating a subsequent second key value in response to the second control signal, said subsequent second key value being a function of said second key value, and said subsequent second key value replacing said second key value.

AUSTRALIAN PATENT OFFICE

8. A second communication participant station according to claim 7, characterised in that the second key value generation means comprise means for generating said subsequent second key value also as a function of the second control signal.

9. A method for authenticating communication participants, the method being substantially as hereinbefore described with reference to Figure 1.

10. A system of communication participant stations, substantially as hereinbefore described with reference to Figure 2.

11. A first communication participant station, substantially as hereinbefore described with reference to Figure 2.

12. A second communication participant station, substantially as hereinbefore described with reference to Figure 2.

DATED this Twenty-third Day of March 1995
Koninklijke PTT Nederland NV

Patent Attorneys for the Applicant
SPRUSON & FERGUSON

AUSTRALIAN PATENT OFFICE

Method for Authenticating Communication Participants,
System for Application of the Method and First Communication Participant
and Second Communication Participant for Application in the System

Abstract of the Disclosure

Method for authenticating communication participants, system for application of the method and first communication participant (1) and second communication participant (2) for application in the system. Known methods for authenticating communication participants (1) add a code word (4) to a command signal (3), which code word is a crytographic function of the command signal (3) and a key value (6) which in its turn is a function of a master key value and a change code word. The master key value has a permanently fixed value, in contrast to the change code word which serves to change the key value (6). The method according to the invention makes use of a key value (7) which is a function of at least one previous key value (6), the master key value with the permanently fixed value, which, once it has been discovered or leaked, substantially weakens the encryption, no longer being required.

Figure 1

jed/7940T

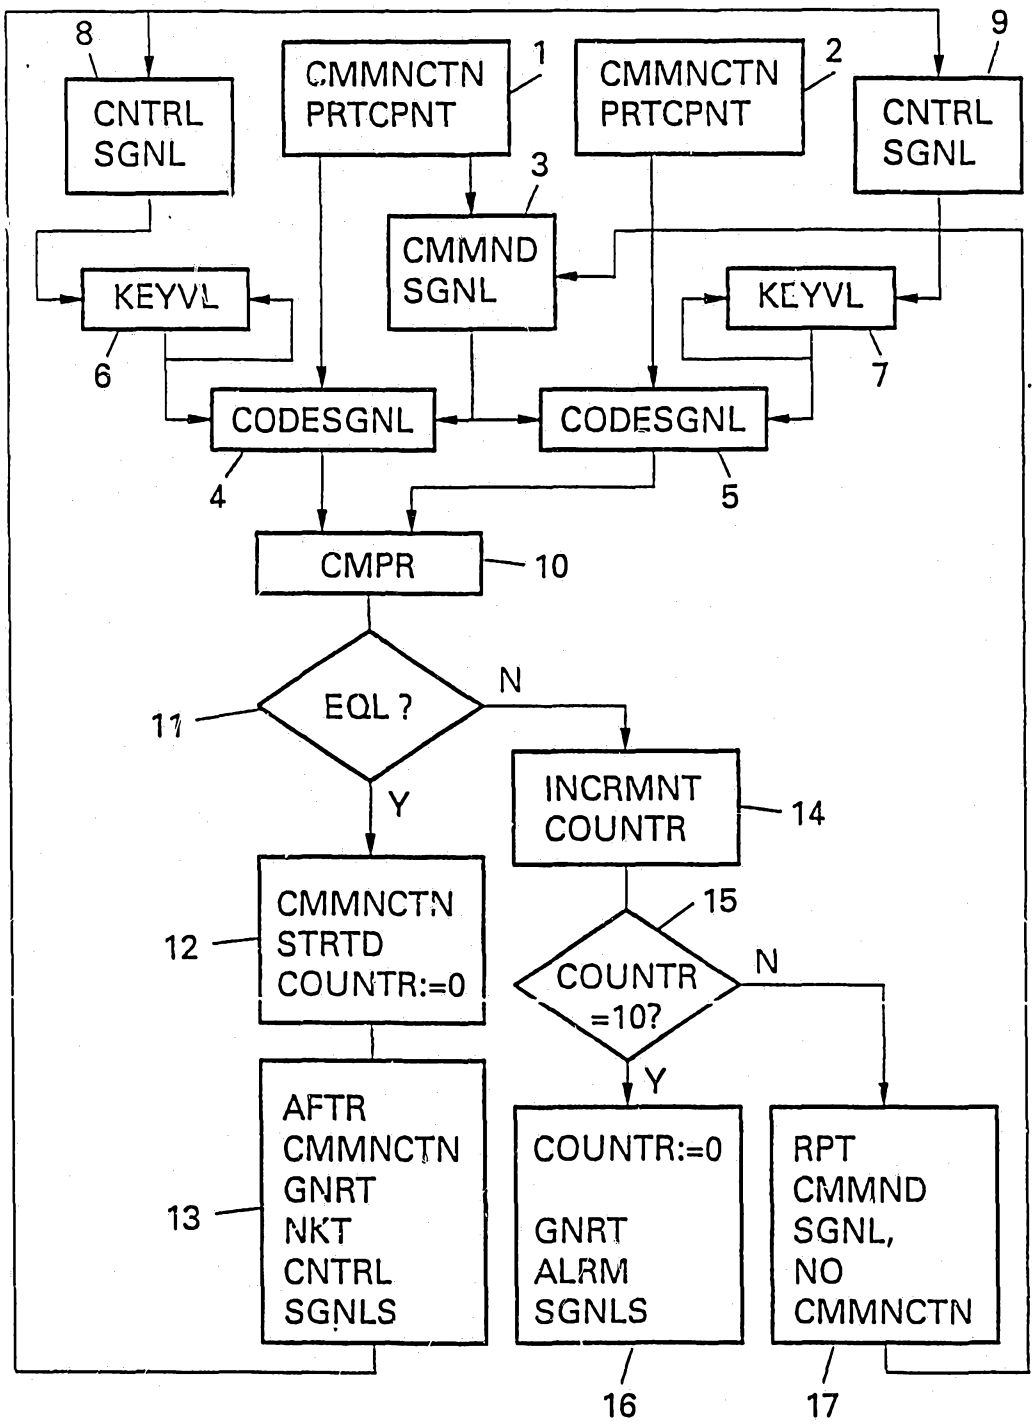

8
CNTRL SGNL
CMMNCTN PRTCPNT
1
CMMNCTN PRTCPNT
2
9
CNTRL SGNL
3
CMMND SGNL
KEYVL
6
KEYVL
7
CODESGNL
CODESGNL
4
5
CMPR
10
EQL ?
11
N
Y
INCRMNT COUNTR
14
CMMNCTN STRTD COUNTR:=0
12
15
COUNTR =10?
N
Y
AFTR CMMNCTN GNRT NKT CNTRL SGNLS
13
COUNTR:=0
GNRT ALRM SGNLS
16
RPT CMMND SGNL, NO CMMNCTN
17

Fig. 1

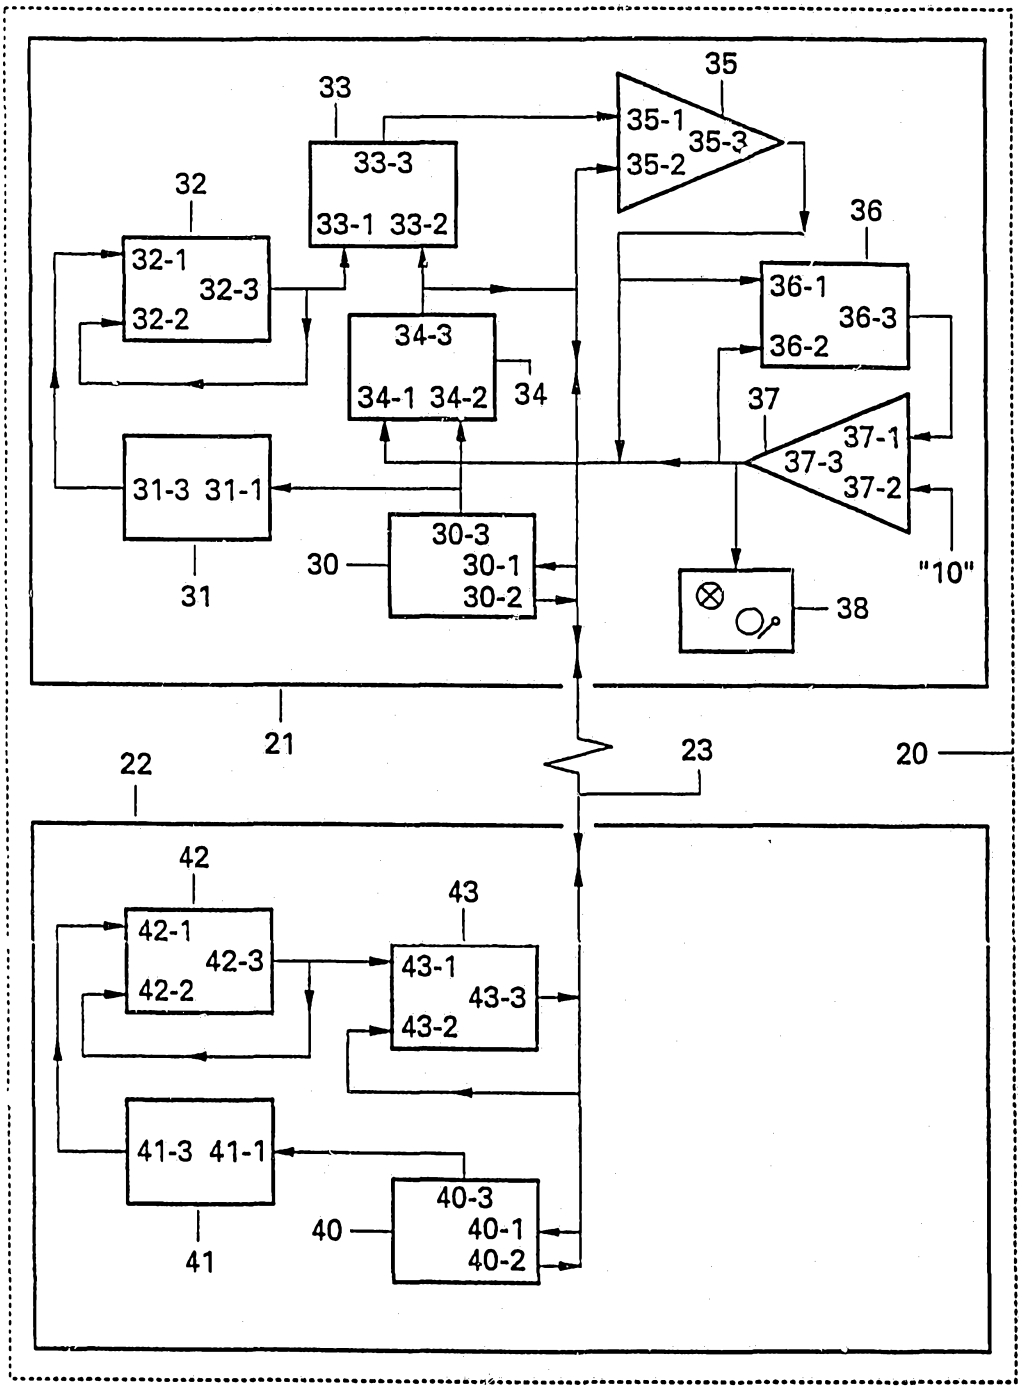

33
35
35-1
35-3
35-2
33-3
33-1 33-2
32
36
32-1
32-3
32-2
36-1
36-3
36-2
34-3
34-1 34-2
34
37
37-1
37-3
37-2
31-3 31-1
30-3
30
30-1
30-2
"10"
38
31
21
20
23
22
42
43
42-1
42-3
42-2
43-1
43-3
43-2
41-3 41-1
40-3
40
40-1
40-2
41

Fig. 2