

J. D. FARKAS.

DIAPER.

APPLICATION FILED JULY 23, 1914.

1,133,945.

Patented Mar. 30, 1915.

Fig. 1.


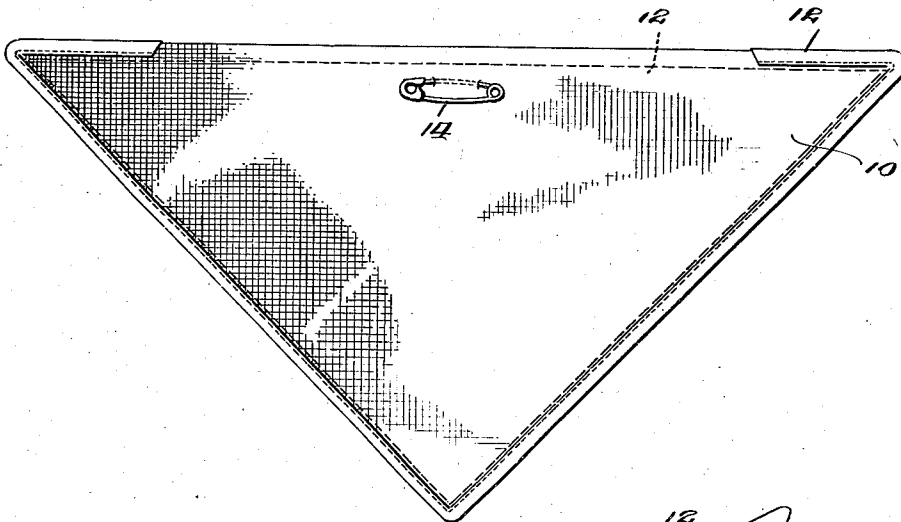


Fig. 2.

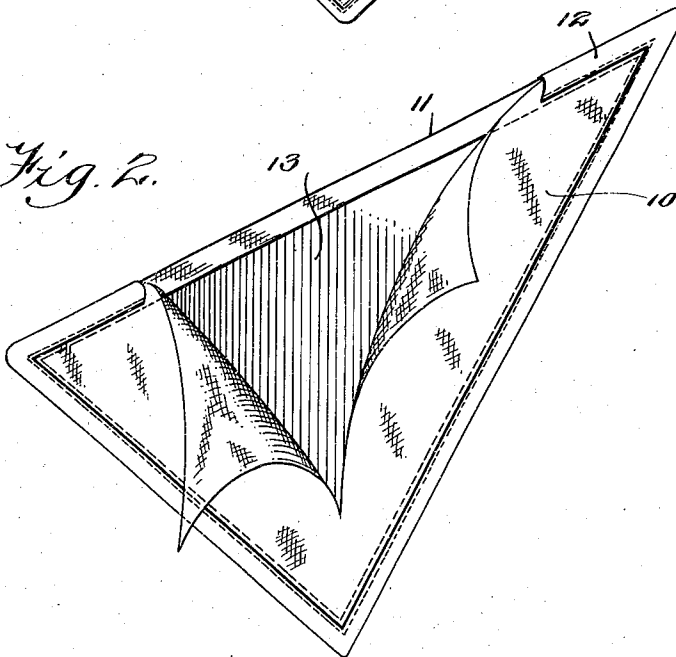

Inventor

Joseph D. Farkas.

Witnesses

J. D. Farkas
B. A. Hanway

By

Mason Fennick Lawrence

Attorneys

UNITED STATES PATENT OFFICE.

JOSEPH D. FARKAS, OF BROOKLYN, NEW YORK, ASSIGNOR TO J. J. BEYERLE MFG. CO.,
OF BROOKLYN, NEW YORK, A FIRM.

DIAPER.

1,133,945.

Specification of Letters Patent.

Patented Mar. 30, 1915.

Application filed July 23, 1914. Serial No. 852,698.

To all whom it may concern:

Be it known that I, JOSEPH D. FARKAS, a citizen of the United States, residing at Brooklyn, in the county of Kings and State of New York, have invented certain new and useful Improvements in Diapers; and I do hereby declare the following to be a full, clear, and exact description of the invention, such as will enable others skilled in the art to which it appertains to make and use the same.

This invention relates to wearing apparel and more particularly to diapers.

It has for an object to provide an improved means for including a ply of waterproof material therein.

A further object of this invention is an improved means for securing the ply and waterproof material therein.

Further objects will be apparent from the following specification, appended claim and drawings in which—

Figure 1 is a plan view of a diaper constructed in accordance with this invention and Fig. 2 is a perspective view thereof with parts broken away.

Referring to the drawings, 10 and 11 indicate the plies of material of which the diaper is made and these plies of material are secured to one another about the major portions of the edges as indicated as by stitching passing through a tape 12 which is folded over the meeting edges of said plies of material. The interval between the ends of the tape 12 is left free from stitching to provide an opening permitting access between the plies of material 10 and 11.

A ply of rubberized fabric or other waterproof material 13 which is cut to triangular configuration to conform the general outlines of the plies of matter 10 and 11 may be inserted through the opening, between these plies of material as shown in dotted lines in Fig. 1.

This article is applied in the usual manner when the points of the triangular formation may be secured by the usual form of safety pin while the safety pin 14, necessary in supporting the back of the garment also holds the waterproof material in place.

The drawings are submitted for illustrative purposes only and this invention is not restricted to the limited form shown as modifications may be made within the scope of this invention.

Having thus described my invention I claim:

In a garment of the class described, two triangular plies of fabric stitched together about their short sides and along the long sides for a short distance from each end, a ply of waterproof material of a size equal to the interior of the pocket formed by the stitching, between the outer plies of fabric, and the ends of said ply of water proof material being retained in the corners formed by the stitching along the long edge.

In testimony whereof I affix my signature in presence of two witnesses.

JOSEPH D. FARKAS.

Witnesses:

GEORGE L. THOM,
HUGO MOCK.