



(11)

EP 3 412 799 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
12.12.2018 Bulletin 2018/50

(51) Int Cl.:
C25D 3/56 (2006.01)
C25D 5/18 (2006.01)
C25D 5/10 (2006.01)

(21) Application number: **18176707.0**

(22) Date of filing: **08.06.2018**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

- **IJERI, Vijaykumar S.**
Chicago, IL Illinois 60606-1596 (US)
- **PRAKASH, Om**
Chicago, IL Illinois 60606-1596 (US)
- **MISHRA, Trilochan**
831007 Jamshedpur (IN)
- **SINGH, Raghuvir**
831007 Jamshedpur (IN)
- **TIWARI, Shashi Kant**
831007 Jamshedpur (IN)

(30) Priority: **09.06.2017 IN 201711020237**
18.08.2017 US 201715680326

(71) Applicant: **The Boeing Company**
Chicago, IL 60606-1596 (US)

(74) Representative: **Harris, Jennifer Lucy**
Kilburn & Strode LLP
Lacon London
84 Theobalds Road
London WC1X 8NL (GB)

(72) Inventors:
• **GAYDOS, Stephen P.**
Chicago, IL Illinois 60606-1596 (US)

(54) **COMPOSITIONALLY MODULATED ZINC-IRON MULTILAYERED COATINGS**

(57) The present disclosure provides electrolyte solutions for electrodeposition of zinc-iron alloys, methods of forming electrolyte solutions, and methods of electrodepositing zinc-iron alloys. An electrolyte solution for electroplating can include an alkali metal citrate, an alkali metal acetate, a citric acid, and glycine with a metal salt. An electrolyte solution can be formed by dissolving an alkali metal citrate, an alkali metal acetate, a citric acid, and glycine in water or an aqueous solution. Electrodepositing zinc-iron alloys on a substrate can include introducing a cathode and an anode into an electrolyte solution comprising an alkali metal citrate, an alkali metal acetate, a citric acid, and glycine. Electrodepositing can further include passing a current between the cathode and the anode through the electrolyte solution to deposit zinc and iron onto the cathode.

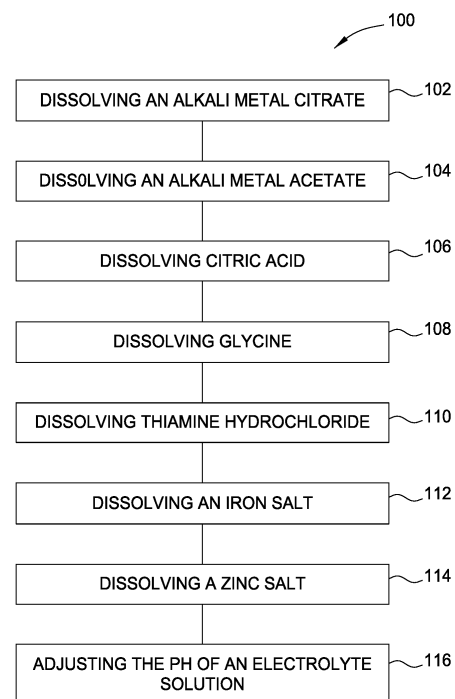


FIG. 1

EP 3 412 799 A1

Description**FIELD**

5 **[0001]** The present disclosure provides electrolyte solutions for electrodeposition of zinc-iron alloys, methods of forming electrolyte solutions, and methods of electrodepositing zinc-iron alloys.

BACKGROUND

10 **[0002]** Development of corrosion resistant coatings is of commercial interest in, for example, the aerospace and automobile industries. In particular, the development of zinc (Zn) coatings has been an area of interest for protection of aerospace and automobile components made of steel. To further improve the corrosion resistance of zinc coatings, zinc alloys can be electrodeposited onto a steel substrate. For example, zinc-nickel (Zn-Ni) alloy has been used in the mass production of steel sheets for automobile bodies and also for small components such as nuts and bolts. Nonetheless,

15 **[0003]** Zinc-iron (Zn-Fe) alloy, for example, has excellent corrosion resistance, good weldability, paintability, and formability. In addition, zinc-iron alloy having high iron content serves as an effective undercoating for paints. Furthermore, the time for white rust formation of typical zinc-iron alloy coatings is often two to three times longer than that of a pure zinc metal coating.

20 **[0004]** Zinc-iron alloys can be deposited by electrodeposition. Electrodeposition of zinc-iron alloys often involves electrolyte solutions having a cyanide, an acid sulphate, ammonium chloride and/or an acid chloride. However, electrodeposition using these electrolyte solutions tends to deposit zinc metal onto a substrate under plating conditions in much larger quantities as compared to iron deposition. Commercially operated baths deposit less than 1% iron with zinc. This occurs because of formation of zinc hydroxide ($\text{Zn}(\text{OH})_2$) which inhibits the deposition of iron onto the substrate.

25 $\text{Zn}(\text{OH})_2$ also adsorbs onto the cathode. Furthermore, complexing agents, such as ammonium chloride or amine based compounds complex very strongly with iron salts in the electrolyte solution which hinders iron metal deposition onto a substrate. Thus, formation of zinc alloys having high iron content is difficult to achieve and, accordingly, so are the beneficial properties of iron in a zinc iron alloy.

30 **[0005]** Therefore, there is a need in the art for improved electrolyte solutions for electrodeposition of zinc-iron alloys, methods of forming zinc-iron alloys, and methods of electrodepositing zinc-iron alloys.

SUMMARY

35 **[0006]** The present disclosure provides electrolyte solutions for electrodeposition of zinc-iron alloys, methods of forming electrolyte solutions, and methods of electrodepositing zinc-iron alloys.

[0007] At least one electrolyte solution for electroplating includes an alkali metal citrate, an alkali metal acetate, a citric acid, and glycine.

[0008] At least one electrolyte solution is formed by dissolving an alkali metal citrate, an alkali metal acetate, a citric acid, and glycine in water or an aqueous solution.

40 **[0009]** At least one method of electrodepositing zinc-iron alloys onto a substrate includes introducing a cathode and an anode into an electrolyte solution comprising an alkali metal citrate, an alkali metal acetate, the metal salts, a citric acid, and glycine. A current is introduced between the cathode and the anode through the electrolyte solution to deposit zinc and iron onto the cathode.

BRIEF DESCRIPTION OF THE DRAWINGS

45 **[0010]** So that the manner in which the above recited features of the present disclosure can be understood in detail, a more particular description of the disclosure, briefly summarized above, may be had by reference to aspects, some of which are illustrated in the appended drawings. It is to be noted, however, that the appended drawings illustrate only typical aspects of this present disclosure and are therefore not to be considered limiting of its scope, for the present disclosure may admit to other equally effective aspects.

55 Figure 1 is a flow diagram illustrating a method for forming an electrolyte solution according to an aspect of the present disclosure.

Figure 2 is a flow diagram illustrating a method for forming a zinc-iron coating of the present disclosure on a substrate by electrodeposition according to an aspect of the present disclosure.

Figure 3A is a graph illustrating open circuit potential of zinc-iron CMMA coatings in distilled water according to an aspect of the present disclosure.

Figure 3B is a graph illustrating open circuit potential of zinc-iron CMMA coatings in salt water according to an aspect of the present disclosure.

Figure 4A is a graph illustrating open circuit potential of zinc-iron CMMA coatings in distilled water according to an aspect of the present disclosure.

Figure 4B is a graph illustrating open circuit potential of zinc-iron CMMA coatings in salt water according to an aspect of the present disclosure.

Figure 5 is a graph illustrating open circuit potential of zinc-iron CMMA coatings in salt water according to an aspect of the present disclosure.

Figure 6A is a graph illustrating open circuit potential of pure zinc coatings in salt water according to an aspect of the present disclosure.

Figure 6B is a graph illustrating open circuit potential of zinc-iron CMMA coatings in salt water according to an aspect of the present disclosure.

[0011] To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures. It is contemplated that elements and features of one aspect may be beneficially incorporated in other aspects without further recitation.

DETAILED DESCRIPTION

[0012] The present disclosure provides electrolyte solutions for electrodeposition of zinc-iron alloys and methods of forming zinc-iron alloys. In at least one aspect, electrolyte solutions of the present disclosure are aqueous. In at least one aspect, an electrolyte solution comprises a zinc salt, such as zinc sulphate, and an iron salt, such as ferrous sulphate. Electrolyte solutions of the present disclosure further comprise at least one complexing agent selected from glycine and thiamine hydrochloride (THC). It has been discovered that one or more of these complexing agents present in an electrolyte solution provides deposition of high iron content zinc-iron alloy layers on a substrate, such as a steel substrate. Electrolyte solutions of the present disclosure further comprise at least one buffering agent selected from citric acid, sodium acetate, sodium citrate, and boric acid. It has been discovered that sodium acetate, sodium citrate, and citric acid are mild iron stabilizing agents, which provide deposition of high iron content zinc-iron alloy layers on a substrate, such as a steel substrate.

[0013] Electrolyte solutions of the present disclosure provide controllable zinc-iron alloy deposition on a substrate. In at least one aspect, a substrate is a steel substrate, copper substrate, brass substrate, copper-coated substrate, nickel-coated substrate, or other metal or metal alloy-containing substrate. In at least one aspect, iron content of a zinc-iron alloy of the present disclosure is from about 1 wt% iron to about 20 wt% iron based on the total weight of the alloy. Changes in iron deposition can be less affected at lower pH, such as 3 - 4, but iron deposition can be more affected at higher pH such as 5 - 6. Lower pH can decrease amount of deposition of iron content and higher pH can cause precipitation in the electrolyte bath and poor deposits.

[0014] Zinc-iron alloy coatings of the present disclosure provide high corrosion resistance for substrates, such as steel substrates (for example, no red rust observed after salt spray testing for 500 hours or more, and in some examples 1000 hours or more), and pass a number of tests for use as coatings such as hydrogen embrittlement and salt spray tests. Zinc-iron alloys of the present disclosure may be disposed on components of aircraft, spacecraft, watercraft, engine and blown-flap, exhaust-washed structures, warm-structure components for high-performance supersonic, hypersonic, and space re-entry vehicle structures, automobile parts, architectural structures such as steel bridges and propulsion structures such as power-generation turbines, vehicle engines, alternative-energy applications, and related technologies. As one specific example, alloys of the present disclosure may be disposed on steel-based landing gears and/or a bottom surface of an aircraft.

[0015] In at least one aspect, the zinc-iron coatings of the present disclosure are multilayered electrodeposited coatings referred to as composition modulated multilayered alloy (CMMA) coatings. CMMA coatings are one way to improve the corrosion resistance capability of a coating as compared to, for example, a monolithic zinc-nickel alloy coating. CMMA coatings have a plurality of thin alternating metal layers or alloy layers, and each layer plays its own distinctive role in achieving preferred performances. For example, a zinc-iron alloy layer has a barrier effect (a barrier against moisture

exposure of the substrate) for protection of a steel substrate while the zinc metal in the layer has a sacrificial effect (e.g., degrades over time). Such CMMA coatings typically have improved corrosion resistance as compared to monolithic coatings of the same thickness as the CMMA coating. For CMMA coatings, each layer has a different corrosion potential relative to an adjacent layer. Therefore, the corrosion current that is flowing will be blocked by an adjacent layer having a different corrosion potential, which reduces or prevents corrosion potential from reaching the substrate. Another possible phenomena could be that the less noble layer (e.g., layer having less iron content) corrodes preferentially and the corrosion products block the pores of an adjacent layer, thereby making it protective.

[0016] In at least one aspect, CMMA coatings of the present disclosure are formed using a single bath technique. The deposition vessel is a glass beaker at a lab scale or large polypropylene tanks for plating on a commercial scale. In at least one aspect, the deposition vessel contains an electrolyte solution that is prepared by mixing all ingredients of the electrolyte solution concurrently or in a stepwise manner starting with the complexing agents followed by zinc and iron salts. The anode (graphite or zinc) is introduced into the beaker containing electrolyte solution, as described in more detail below. The deposition process is modulated by altering the pulse sequence (from low current density to high current density, or from high current density to low current density) which creates the successive layers of alternating metal composition (e.g., alternating layers having different iron content). The thickness of each layer can be controlled by the duration of the energy pulse applied to the electrolyte solution electrodes. In at least one aspect, the total thickness of a CMMA coating is from about 1 micron to about 100 microns, such as from about 10 microns to about 50 microns, such as from about 20 microns to about 40 microns, for example about 30 microns. The thickness of the individual CMMA layers may range from 0.1 to 5 microns by varying the current density, time of deposition and pulse duration. In at least one aspect, CMMA coatings of the present disclosure have one or more passivation/conversion coatings disposed thereon. Such coatings include Hex-chrome or Tri-chrome based passivation/conversion coatings that are commercially available.

[0017] CMMA coatings of the present disclosure can comprise a plurality of alternating layers where:

- (1) the alternating layers have the same thickness and the same composition (e.g., iron content);
- (2) the alternating layers have the same thickness but have a different composition (e.g., two or more of the layers have a different iron content);
- (3) the alternating layers have different thickness (e.g., two or more of the layers have a different thickness) and have different composition;
- (4) the alternating layers each have a different thickness, but the plurality of layers includes two different alternating compositions (e.g., a first layer has a first iron content, a second layer has a second iron content, and a third layer has the first iron content (i.e., the third layer has the same iron content the first layer);
- (5) the alternating layers each have the same thickness, but each composition of each layer differs from the composition of the other layers (a graded alloy composition);
- (6) the alternating layers each have a different thickness and each composition of each layer differs from the composition and thickness of the other layers (also a graded alloy composition).

[0018] Varying the thickness and composition of a CMMA coating can be controlled by current density and time scale of a deposition process of the present disclosure.

[0019] In at least one aspect, an electrolyte solution is aqueous and comprises a metal salt. In at least one aspect, metal salts include one or more of a zinc salt and an iron salt. In at least one aspect, electrolyte solutions of the present disclosure further comprise at least one complexing agent selected from glycine and thiamine hydrochloride (THC). Complexing agents, such as glycine, coordinate to iron ions in an electrolyte solution and also promote controllable iron deposition on a substrate upon application of a current density to the electrolyte solution.

[0020] Electrolyte solutions of the present disclosure further comprise at least one buffering agent selected from citric acid, sodium acetate, sodium citrate, and boric acid. Buffering agents of the present disclosure maintain a desirable pH of the electrolyte solution and do not substantially interfere with iron deposition on a substrate, as described in more detail below. In at least one aspect, the pH of electrolyte solutions of the present disclosure are between about 2 and about 6, such as between about 3 and about 5, for example the pH is 3 or 5. In at least one aspect, the pH of electrolyte solutions of the present disclosure are controlled by addition of one or more bases, such as a sodium hydroxide (NaOH) solution, to increase the pH of the solution or addition of one or more acids, such as a sulfuric acid (H₂SO₄) solution, to decrease the pH of the solution. pH is also maintained by appropriate combinations of alkali metal citrate and citric acid. Zinc salts, iron salts, complexing agents, buffering agents, acids, and bases can be obtained from any suitable commercial

source, such as MERCK-India or Sigma-Aldrich Co. LLC of St. Louis, MO.

[0021] Electrodeposition can include preparing an electrolyte solution and passing current between an anode and a cathode in the electrolyte solution. Figure 1 is a flow diagram illustrating a method **100** for forming an electrolyte solution.

[0022] As shown in Figure 1, method **100** includes dissolving **102** an alkali metal citrate in water in a vessel, such as a beaker, to form a first electrolyte solution. In at least one aspect, an alkali metal citrate is a sodium citrate, potassium citrate, and/or other alkali metal citrate. Sodium citrates include citric acid trisodium salt, citric acid disodium salt, citric acid monosodium salt, or other sodium citrate. Potassium citrates include citric acid tripotassium salt, citric acid dipotassium salt, citric acid monopotassium salt, or other potassium citrate. In at least one aspect, an alkali metal citrate includes its respective hydrated forms. For example, citric acid trisodium salt has the formula $\text{Na}_3\text{C}_6\text{H}_5\text{O}_7 \cdot x\text{H}_2\text{O}$, where x is a whole number (e.g., 0, 1, or 2). Accordingly, citric acid trisodium salt can be, for example, anhydrous citric acid trisodium salt, citric acid trisodium salt monohydrate, or citric acid trisodium salt dihydrate. In at least one aspect, the alkali metal citrate is dissolved in water or aqueous solution, for example, by stirring at a temperature from about 20°C to about 30°C, such as about 25°C. In at least one aspect, stirring is performed for from about 5 minutes to about 60 minutes, such as from about 10 minutes to about 50 minutes, such as from about 20 minutes to about 40 minutes or until substantially all of the alkali metal citrate has been dissolved.

[0023] In at least one aspect, the concentration of an alkali metal citrate in an electrolyte solution of the present disclosure is from about 0.001 moles per liter (mol/L) to about 0.1 mol/L, such as from about 0.01 mol/L to about 0.05 mol/L, such as from about 0.01 mol/L to about 0.03 mol/L of the electrolyte solution, for example about 0.001 mol/L, about 0.017 mol/L, about 0.018 mol/L, about 0.019 mol/L, or about 0.1 mol/L.

[0024] Method **100** further includes dissolving **104** an alkali metal acetate, for example, in water or an aqueous solution (such as the first solution) to form an electrolyte solution (e.g., a second electrolyte solution). In at least one aspect, an alkali metal acetate is a sodium acetate, potassium acetate, and/or other alkali metal acetate. Sodium acetates include acetic acid sodium salt. Potassium citrates include acetic acid potassium salt. In at least one aspect, an alkali metal acetate includes its respective hydrated forms. For example acetic acid sodium salt has the formula $\text{CH}_3\text{COONa} \cdot x\text{H}_2\text{O}$, where x is a whole number (e.g., 0, 1, or 2). In at least one aspect, the alkali metal acetate is dissolved, for example, by stirring at a temperature from about 20°C to about 30°C, such as about 25°C. In at least one aspect, stirring is performed for from about 5 minutes to about 60 minutes, such as from about 10 minutes to about 50 minutes, such as from about 20 minutes to about 40 minutes or until substantially all of the alkali metal acetate has been dissolved.

[0025] In at least one aspect, the concentration of an alkali metal acetate in an electrolyte solution of the present disclosure is from about 0.1 moles per liter (mol/L) to about 3 mol/L, such as from 0.2 mol/L to about 1 mol/L, such as from about 0.5 mol/L to about 0.8 mol/L of the electrolyte solution, for example about 0.1 mol/L, about 0.65 mol/L, about 0.75 mol/L, about 0.85 mol/L, or about 3 mol/L.

[0026] Method **100** further includes dissolving **106** citric acid, for example, in water or an aqueous solution (such as the second solution to form an electrolyte solution, (e.g., a third electrolyte solution). In at least one aspect, citric acid can includes its respective hydrated forms. For example, citric acid has the formula $\text{C}_6\text{H}_8\text{O}_7 \cdot x\text{H}_2\text{O}$, where x is a whole number (e.g., 0, 1, or 2). In at least one aspect, citric acid is dissolved, for example, by stirring at a temperature from about 20°C to about 30°C, such as about 25°C. In at least one aspect, stirring is performed for from about 5 minutes to about 60 minutes, such as from about 10 minutes to about 50 minutes, such as from about 20 minutes to about 40 minutes or until substantially all of the citric acid has been dissolved.

[0027] In at least one aspect, the concentration of citric acid in an electrolyte solution of the present disclosure is from about 0.01 moles per liter (mol/L) to about 3 mol/L, such as from about 0.05 mol/L to about 1 mol/L, such as from about 0.1 mol/L to about 0.5 mol/L of the electrolyte solution, for example about 0.01 mol/L, about 0.08 mol/L, about 0.1 mol/L, about 0.12 mol/L, or about 3 mol/L.

[0028] Method **100** further includes dissolving **108** glycine, for example, in water or an aqueous solution (such as the third solution) to form an electrolyte solution (e.g., a fourth electrolyte solution). In at least one aspect, glycine includes its respective salt forms. In at least one aspect, glycine is one or more of glycine sodium salt, glycine potassium salt, and glycine zinc salt. Glycine zinc salt can participate as a source of zinc ions in the electrolyte solution for zinc deposition onto a substrate. In at least one aspect, glycine includes its respective hydrated forms. For example, glycine has the formula $\text{NH}_2\text{CH}_2\text{COOH} \cdot x\text{H}_2\text{O}$, where x is a whole number (e.g., 0, 1, or 2). In at least one aspect, glycine is dissolved, for example, by stirring at a temperature from about 20°C to about 30°C, such as about 25°C. In at least one aspect, stirring is performed for from about 5 minutes to about 60 minutes, such as from about 10 minutes to about 50 minutes, such as from about 20 minutes to about 40 minutes or until substantially all of the glycine has been dissolved.

[0029] In at least one aspect, the concentration of glycine in an electrolyte solution of the present disclosure is from about 0.01 moles per liter (mol/L) to about 2 mol/L, such as from 0.1 mol/L to about 1 mol/L, such as from about 0.12 mol/L to about 0.5 mol/L of the electrolyte solution, for example about 0.01 mol/L, about 0.13 mol/L, about 0.14 mol/L, about 0.15 mol/L, or about 2 mol/L.

[0030] Method **100** further includes dissolving **110** thiamine hydrochloride or thiamine, for example, in water or an aqueous solution (such as the fourth solution) to form an electrolyte solution (e.g., a fifth electrolyte solution). The

combination of citric acid and thiamine hydrochloride, for example, act as a brightening agent for a deposited alloy. In at least one aspect, thiamine hydrochloride or thiamine include their respective hydrated forms. For example, thiamine hydrochloride has the formula $C_{12}H_{17}ClN_4OS \cdot HCl \cdot xH_2O$, where x is a whole number (e.g., 0, 1, or 2). In at least one aspect, thiamine hydrochloride or thiamine are dissolved, for example, by stirring at a temperature from about 20°C to about 30°C, such as about 25°C. In at least one aspect, stirring is performed for from about 5 minutes to about 60 minutes, such as from about 10 minutes to about 50 minutes, such as from about 20 minutes to about 40 minutes or until substantially all of the thiamine hydrochloride or thiamine has been dissolved.

[0031] In at least one aspect, the concentration of thiamine hydrochloride in an electrolyte solution of the present disclosure is from about 0.0001 moles per liter (mol/L) to about 1 mol/L, such as from 0.001 mol/L to about 0.01 mol/L, such as from about 0.001 mol/L to about 0.003 mol/L of the electrolyte solution, for example about 0.0001 mol/L, about 0.0014 mol/L, about 0.0015 mol/L, about 0.0016 mol/L, or about 1 mol/L. In at least one aspect, the concentration of thiamine in an electrolyte solution of the present disclosure is from about 0.01 g/L to about 2 g/L, such as from 0.1 g/L to about 1 g/L, such as from 0.3 g/L to about 0.7 g/L, for example about 0.01 g/L, about 0.4 g/L, about 0.5 g/L, about 0.6 g/L, or about 2 g/L.

[0032] Method **100** further includes dissolving **112** an iron salt, for example, in water or an aqueous solution (such as the fifth solution) to form an electrolyte solution (e.g., a sixth electrolyte solution). In at least one aspect, the iron salt is a divalent iron salt. In at least one aspect, a divalent iron salt includes iron (II) sulfate, iron (II) chloride, iron (II) acetate, and/or other divalent iron salt. Each of these divalent iron salts can include its respective hydrated forms. For example, iron (II) sulfate has the formula $FeSO_4 \cdot xH_2O$, where x is a whole number (e.g., 0, 1, 2, 4, 5, 6, or 7). Accordingly, in at least one aspect, iron (II) sulfate is anhydrous iron (II) sulfate, iron (II) sulfate monohydrate, iron (II) sulfate dihydrate, iron (II) sulfate tetrahydrate, iron (II) sulfate pentahydrate, iron (II) sulfate hexahydrate, iron (II) sulfate heptahydrate, or iron (II) sulfate with another hydration state. In at least one aspect, the iron salt is dissolved, for example, by stirring at a temperature from about 20°C to about 30°C, such as about 25°C. In at least one aspect, stirring is performed for from about 5 minutes to about 60 minutes, such as from about 10 minutes to about 50 minutes, such as from about 20 minutes to about 40 minutes or until substantially all of the iron salt has been dissolved.

[0033] In at least one aspect, the concentration of an iron salt in an electrolyte solution of the present disclosure is from about 0.01 moles per liter (mol/L) to about 0.5 mol/L, such as from about 0.03 mol/L to about 0.45 mol/L, such as from about 0.05 mol/L to about 0.4 mol/L, such as from about 0.1 mol/L to about 0.3 mol/L of the electrolyte solution, for example about 0.01 mol/L, about 0.07 mol/L, about 0.35 mol/L, or about 0.5 mol/L.

[0034] Method **100** further includes dissolving **114** a zinc salt, for example, in water or an aqueous solution (such as the sixth solution) to form an electrolyte solution (e.g., a seventh electrolyte solution). The zinc salt can be a divalent zinc salt. In at least one aspect, a divalent zinc salt is zinc (II) sulfate, zinc (II) chloride, zinc (II) acetate, and/or other divalent zinc salt. In at least one aspect, each of these divalent zinc salts include its respective hydrated forms. For example, zinc (II) sulfate has the formula $ZnSO_4 \cdot xH_2O$, where x is a whole number (e.g., 0, 1, 2, 4, 5, 6, or 7). Accordingly, in at least one aspect, zinc (II) sulfate is anhydrous zinc (II) sulfate, zinc (II) sulfate monohydrate, zinc (II) sulfate dihydrate, zinc (II) sulfate tetrahydrate, zinc (II) sulfate pentahydrate, zinc (II) sulfate hexahydrate, zinc (II) sulfate heptahydrate, or zinc (II) sulfate with another hydration state. In at least one aspect, the zinc salt is dissolved, for example, by stirring at a temperature from about 20°C to about 30°C, such as about 25°C. In at least one aspect, stirring is performed for from about 5 minutes to about 60 minutes, such as from about 10 minutes to about 50 minutes, such as from about 20 minutes to about 40 minutes or until substantially all of the zinc salt has been dissolved.

[0035] In at least one aspect, the concentration of a zinc salt in an electrolyte solution of the present disclosure is from about 0.01 moles per liter (mol/L) to about 0.5 mol/L, such as from 0.1 mol/L to about 0.4 mol/L, such as from about 0.15 mol/L to about 0.3 mol/L, such as from 0.15 mol/L to about 0.2 mol/L of the electrolyte solution, for example about 0.01 mol/L, about 0.16 mol/L, 0.17 mol/L, about 0.18 mol/L, or about 0.5 mol/L.

[0036] Method **100** further includes adjusting **116** the pH of the electrolyte solution using one or more aqueous acid solutions or aqueous base solutions, such as potassium hydroxide (KOH), sodium hydroxide (NaOH), and/or sulfuric acid (H_2SO_4). The volume of aqueous acid solution or aqueous base solution added to the electrolyte solution is sufficiently small such that the concentration of other components (complexing agents, buffering agents, etc.) of the electrolyte solution is not substantially affected. Alternatively, solid potassium hydroxide and/or solid sodium hydroxide is added directly to the electrolyte solution and/or concentrated sulfuric acid is added directly to the electrolyte solution. In at least one aspect, the pH of the electrolyte solution is adjusted to a target pH from about 2 to about 7, such as from about 3 to about 6, such as from about 3 to about 5, for example 3, 3.5, 4, 4.5, or 5. In at least one aspect, the pH of an electrolyte solution of the present disclosure is adjusted before passing a current through the electrolyte solution (as described in more detail below). In at least one aspect, the pH of an electrolyte solution of the present disclosure is maintained at a target pH or a target pH range during the passing of a current through the electrolyte solution.

[0037] Furthermore, in at least one aspect, methods of the present disclosure include dissolving a borate, for example, in water or an aqueous solution to form an electrolyte solution. A borate can be dissolved, for example, by stirring at a temperature from about 20°C to about 30°C, such as about 25°C. In at least one aspect, stirring is performed for from

about 5 minutes to about 60 minutes, such as from about 10 minutes to about 50 minutes, such as from about 20 minutes to about 40 minutes or until substantially all of the borate has been dissolved.

[0038] In at least one aspect, the concentration of borate in an electrolyte solution of the present disclosure is from about 0.01 moles per liter (mol/L) to about 2 mol/L, such as from 0.1 mol/L to about 1.5 mol/L, such as from about 0.5 mol/L to about 1 mol/L of the electrolyte solution, for example about 0.01 mol/L, about 0.85 mol/L, about 0.9 mol/L, about 0.95 mol/L, about 1 mol/L, or about 2 mol/L.

[0039] Figure 2 is a flow diagram illustrating a method **200** for forming a zinc-iron coating of the present disclosure on a substrate by electrodeposition. Method **200** includes adjusting and/or maintaining **202** a temperature of an electrolyte solution, such as an electrolyte solution formed by method **100**. The temperature may be adjusted to/maintained at a target temperature of from about 20°C to about 70°C, such as from about 20°C to about 40°C, such as from about 20°C to about 35°C, for example 20°C, 25°C, or 30°C, using any suitable heating or cooling apparatus. In at least one aspect, the temperature of an electrolyte solution is adjusted before passing a current through the electrolyte solution. In at least one aspect, the temperature of an electrolyte solution is maintained during the passing of a current through an electrolyte solution to maintain the appearance of a deposited layer. Maintaining the temperature within a desirable range promotes obtaining reproducible results in terms of appearance and alloy composition.

[0040] Method **200** further includes introducing **204** a cathode and an anode into the electrolyte solution, the cathode including the substrate, and passing **206** a current between the cathode and the anode through the electrolyte solution to deposit zinc and iron onto the cathodic substrate. In at least one aspect, the cathodic substrate is, for example, a steel substrate, a copper substrate, a brass substrate, a nickel substrate, a copper-coated substrate, or a nickel-coated substrate.

[0041] In at least one aspect, an anode includes a zinc material, platinum material, platinized titanium material, or a carbonaceous electrode material. For example, zinc can be used as an anode and it also provides replenishment of zinc concentration to the electrolyte solution. A carbonaceous anode can be a graphite anode or other anode that includes carbon. A graphite anode or other carbonaceous anode minimizes gas evolution and formation of byproducts, as well as facilitating a desired deposition rate (e.g., from about 1 micron per minute to about 2 microns per minute). In at least one aspect, a deposition rate of metal on a substrate is from about 0.1 micron per minute to about 10 microns per minute, such as from about 0.5 micron per minute to about 5 microns per minute, such as from 1 micron per minute to about 2 microns per minute, for example about 1 micron per minute, about 1.5 microns per minute, about 2 microns per minute.

[0042] In at least one aspect, passing **206** a current between the cathode and the anode is performed using direct current. In at least one aspect, direct current having a current density of from about 5 mA/cm² to about 500 mA/cm², such as from about 10 mA/cm² to about 300 mA/cm², such as from about 10 mA/cm² to about 250 mA/cm², such as from about 10 mA/cm² to about 200 mA/cm², such as from about 30 mA/cm² to about 150 mA/cm², for example 20 mA/cm², 50 mA/cm², 150 mA/cm² is used. For CMMA coatings, a pulsed current is used. In at least one aspect, the current density of each pulse is from about 5 mA/cm² to about 500 mA/cm², such as from about 20 mA/cm² to about 300 mA/cm², such as from about 20 mA/cm² to about 250 mA/cm², such as from about 30 mA/cm² to about 150 mA/cm², for example 20 mA/cm², 50 mA/cm², 150 mA/cm².

[0043] In at least one aspect, a pulsed current has a duty cycle from about 20% to about 95%, such as from about 40% to about 90%, such as from 75% to about 90%, for example, about 80%, about 85%, or about 90%. In at least one aspect, a pulsed current has a frequency ranging from about 10 Hz to about 100 Hz, such as from about 20 Hz to about 80 Hz, such as from 50 Hz to about 70 Hz, for example about 20 Hz, about 25 Hz, or about 30 Hz. In at least one aspect, one or more pulses of a series of pulses have a duration ('ON time') of from about 1 millisecond to about 1,000 milliseconds, such as from about 5 milliseconds to about 800 milliseconds, such as from about 20 milliseconds to about 500 milliseconds, such as from about 50 milliseconds to about 200 milliseconds, such as from about 10 milliseconds to about 30 milliseconds, for example about 15 milliseconds, about 25 milliseconds, or about 30 milliseconds. There is also a duration of time in between each pulse (an 'OFF time') of from about 1 millisecond to about 1000 milliseconds, depending on the 'ON time'. In one aspect, a duration of time in between each pulse is from about 5 milliseconds to about 500 milliseconds, such as from about 10 milliseconds to about 200 milliseconds, for example about 15 milliseconds, about 25 milliseconds, or about 30 milliseconds.

[0044] In response to passing **206** a current between the cathode and the anode, zinc and iron deposit onto the cathodic substrate. Passing **206** is performed until a zinc-iron coating layer having a desired thickness is formed on the substrate. The zinc-iron coating layer is a zinc-iron alloy having from about 1 wt% iron to about 60 wt% iron, such as from about 1 wt% iron to about 20 wt% iron, such as from about 1 wt% iron to about 5 wt% iron or from about 10 wt% iron to about 20 wt% iron based on the total weight of the alloy. For example, the zinc-iron alloy can have a wt% iron of about 1 wt%, 2 wt%, 10 wt%, 11 wt%, or 12 wt%. Furthermore, the zinc-iron alloy has from about 80 wt% zinc to about 99 wt% zinc, such as from about 85 wt% zinc to about 95 wt% zinc, for example about 99 wt% zinc, 98 wt% zinc, 90 wt% zinc, 89 wt% zinc, or 88 wt% zinc, based on the total weight of the alloy.

[0045] In at least one aspect, passing **206** is repeated to deposit one or more additional coating layers onto an already deposited zinc-iron coating layer. The thickness of each layer formed on the substrate (or previously deposited layer)

is controlled by the duration of an energy (current) pulse applied to the electrodes in the electrolyte solution. In at least one aspect, the total thickness of coatings deposited on a substrate is from about 1 micron to about 200 microns, such as from about 10 microns to about 100 microns, such as from about 20 microns to about 50 microns, for example about 30 microns. In at least one aspect, the total number of layers in a CMMA zinc-iron coating of the present disclosure is from about 2 layers to about 500 layers, such as from about 10 layers to about 200 layers, such as from about 50 layers to about 150 layers, for example about 90 layers, about 100 layers, or about 110 layers.

Examples

[0046] Steel substrates used in the following examples were mild steel, 4130 steel, or 4340 steel substrates.

[0047] Example 1: The components of Example 1 were mixed in a stepwise manner starting with the complexing agents first followed by metal salts. The pH of Example 1 was 3.

Example 1		
Zinc sulphate ($\text{ZnSO}_4 \cdot 7\text{H}_2\text{O}$)	50 g/L	0.174 M
Ferrous sulphate ($\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$)	20 g/L	0.072 M
Na acetate (CH_3COONa)	60 g/L	0.731 M
Na citrate ($\text{C}_6\text{H}_5\text{Na}_3\text{O}_7 \cdot 2\text{H}_2\text{O}$)	5.3 g/L	0.018 M
Glycine ($\text{NH}_2\text{CH}_2\text{COOH}$)	11 g/L	0.146 M
Citric acid ($\text{C}_6\text{H}_8\text{O}_7 \cdot \text{H}_2\text{O}$)	21.2 g/L	0.1 M
Thiamine hydrochloride ($\text{C}_{12}\text{H}_{17}\text{ClN}_4\text{OS} \cdot \text{HCl}$)	0.5 g/L	0.0015 M

[0048] Example 2: The components of Example 2 were mixed in a stepwise manner starting with the complexing agents first followed by metal salts. The pH of Example 2 was 5.

Example 2		
Zinc sulphate ($\text{ZnSO}_4 \cdot 7\text{H}_2\text{O}$)	50 g/L	0.0174 M
Ferrous sulphate ($\text{FeSO}_4 \cdot 7\text{H}_2\text{O}$)	100 g/L	0.36 M
Na acetate (CH_3COONa)	60 g/L	0.731 M
Na citrate ($\text{C}_6\text{H}_5\text{Na}_3\text{O}_7 \cdot 2\text{H}_2\text{O}$)	5.3 g/L	0.018 M
Glycine ($\text{NH}_2\text{CH}_2\text{COOH}$)	11 g/L	0.146 M
Citric acid ($\text{C}_6\text{H}_8\text{O}_7 \cdot \text{H}_2\text{O}$)	21.2 g/L	0.1 M
Thiamine hydrochloride ($\text{C}_{12}\text{H}_{17}\text{ClN}_4\text{OS} \cdot \text{HCl}$)	0.5 g/L	0.0015 M

[0049] Using each of the electrolyte solutions of Example 1 and Example 2, CMMA zinc-iron alloy coatings were deposited by a pulse current method by alternating pulses at two different current densities, 50 mA/cm² and 20 mA/cm². The pulse duration of each pulse was performed such that substantially equal layer thicknesses at each current density were achieved and 50 layers at each current density were deposited alternatively using a Dynatronix Pulse rectifier. A total of 100 layers having a total thickness of about 30 microns was achieved. The deposition was performed in a single bath vessel.

[0050] For the electrolyte solution of Example 1, the zinc-iron alloy layers deposited at 20 mA/cm² had an iron content of about 1 wt%, while the zinc-iron alloy layers deposited at 50 mA/cm² had an iron content of about 2 wt%. For the electrolyte solution of Example 2, the zinc-iron alloy layer deposited at 50 mA/cm² had an iron content of about 1 wt% by wt., while the zinc-iron alloy layer deposited at 150 mA/cm² had an iron content of about 11 wt%.

[0051] Table 1 illustrates dependence of iron content on the pH of the electrolyte solution of Example 1. The electrolyte solution of Example 1 was titrated with NaOH solution until reaching a pH of 3.5 or 5. Then, electrodeposition was performed as described for Examples 1 and 2. As shown in Table 1, changes in pH or current density do not affect the deposited alloy composition of an electrodeposited coating very much. More specifically, the variation in iron content is between about 0.5 wt% to about 2.5 %.

Table 1

pH	iron content 50 mA/cm ⁻²	iron content 150 mA/cm ⁻²	Remarks/appearance
3.5	Fe = 0.83 wt%	Fe = 1.46 wt%	Bright
5.0	Fe = 0.88 wt%	Fe = 2.47 wt%	Dull metallic

[0052] Table 2 illustrates dependence of iron content on the pH of the electrolyte solution of Example 2. The electrolyte solution of Example 2 was titrated with NaOH solution until reaching a pH of 6 or was titrated with H₂SO₄ solution until reaching a pH of 3, 4, or 5. Then, electrodeposition was performed as described for Examples 1 and 2. As shown in Table 2, a change in current density for pH 3 or 4 do not affect the alloy composition much, but at pH 5 and 6, the changes are larger.

Table 2

pH	iron content 50 mA cm ⁻²	iron content 150 mA cm ⁻²	Remarks/appearance 50mA 150 mA	
3.0	Fe = 1.2 wt%	Fe = 2.5 wt%	Bright	Blackish metallic
4.0	Fe = 1.4 wt%	Fe = 3.5 wt%	Bright	Bright
5.0	Fe = 1.8 wt%	Fe = 11.7 wt%	Dull	Very Bright
6.0	Fe = 8.9 wt%	Fe = 62.4 wt%	Grey	Brown red

[0053] Example 3: The components of Example 3 were mixed in a stepwise manner starting with the complexing agents first followed by metal salts. Example 3 has an identical composition as Example 2, but the thiamine hydrochloride is not present in Example 3. Thiamine hydrochloride acts as a brightening agent as well as a complexing agent. Although not as bright, the coatings formed using the electrolyte solution of Example 3 are uniform grey. The advantage of removing this brightening / complexing agent is that it enables higher iron content in the deposit so that the open circuit potential of the deposited layer is not too negative. Furthermore, the consistency of the electrolyte solution and alloy deposits is better.

Example 3 (pH = 4)		
Zinc sulphate (ZnSO ₄ ·7H ₂ O)	50 g/L	0.0174 M
Ferrous sulphate (FeSO ₄ ·7H ₂ O)	100 g/L	0.36 M
Na acetate (CH ₃ COONa)	60 g/L	0.731 M
Na citrate (C ₆ H ₅ Na ₃ O ₇ ·2H ₂ O)	5.3 g/L	0.018 M
Glycine (NH ₂ CH ₂ COOH)	11 g/L	0.146 M
Citric acid (C ₆ H ₈ O ₇ ·H ₂ O)	21.2 g/L	0.1 M

[0054] Table 3 illustrates dependence of iron content on the pH of the electrolyte solution of Example 3. The electrolyte solution of Example 3 was titrated with NaOH solution or H₂SO₄ solution until reaching a particular pH. Then, electrodeposition was performed as described for Examples 1 and 2. As shown in Table 3, iron content is dependent on pH and current density.

Table 3

pH	iron content 50 mA/cm ⁻²	iron content 150 mA/cm ⁻²	Remarks/appearance 50 mAcm ⁻² 150 mAcm ⁻²	
3.0	Fe = 2.9 wt%	Fe = 17.4 wt%	Dull bright	Grey bright
4.0	Fe = 3.2 wt%	Fe = 24.5 wt%	Dull bright	Light Grey
5.0	Fe = 9.9 wt%	Fe = 44.5 wt%	Blackish dull	Metallic grey

(continued)

pH	iron content	iron content	Remarks/appearance	
	50 mA/cm-2	150 mA/cm-2	50 mAcm-2	150 mAcm-2
6.0	Fe = 12.2 wt%	Fe = 61.9 wt%	Grey	Metallic grey

Salt Spray Testing (ASTM B 117)

[0055] A conversion coating, chromate coating ALODINE 1200, was disposed on the coated samples and the CMMA coatings were receptive to these conversion coatings. The passivated samples were tested for corrosion protection by Open Circuit Potential measurements and in a salt spray chamber (according to ASTM B 117).

[0056] Salt spray results of zinc-iron CMMA coatings deposited from electrolyte solution of Example 1 and passivated with Alodine 1200 indicate corrosion protection of steel substrates of 500 hours or more. No red rust was observed for 1500 hours or more.

[0057] Salt spray results of zinc-iron CMMA coatings deposited from electrolyte solution of Example 2 and passivated with Alodine 1200 indicate corrosion protection of steel substrates of 500 hours or more. No red rust was observed for 1000 hours or more. Salt spray results of zinc-iron CMMA coatings deposited from the electrolyte solution of Example 2 and without passivation also indicate corrosion protection of steel substrates of 500 hours or more. No red rust was observed for 750 hours or more.

[0058] Without being bound by theory, it is believed that one of the two alternating types of layers (e.g., the layers with lower iron concentration) corrode and the corrosion product of the corroded layer blocks the pores of adjacent layers having higher iron concentration, making the overall CMMA layer more protective than a monolithic zinc-iron alloy layer. Hence, zinc-iron alloy CMMA coatings can also be equally protective without passivation.

Open Circuit Potential:

[0059] Open circuit potential was used as a quantitative criterion for the corrosion protection ability of zinc-iron alloy coatings of the present disclosure disposed on steel substrates. The open circuit potential of a coating should be negative to steel, which indicates that the coating provides sacrificial protection to the steel. The open circuit potential is a parameter which indicates the thermodynamic tendency of a material to electrochemical oxidation in a corrosive medium. The open circuit potential of these zinc-iron alloy coatings was measured in distilled water and 3.5% NaCl solution for 16 days as per ASTM G 82. Electrochemical cells were made with the coated surface as the working electrode and a Calomel electrode was used as reference electrode. The temperature during an open circuit potential measurement was maintained at about 30°C.

[0060] Figures 3A and 3B are graphs illustrating open circuit potential of zinc-iron CMMA coatings in distilled water and salt water, respectively. The zinc-iron coatings were deposited from the electrolyte solution of Example 1 and passivated with Alodine 1200. The zinc-iron coatings (samples 1, 2, and 3) were prepared by pulsing at an alternating current density of 50 mA/cm² and 20 mA/cm² until a total of 100 layers were obtained for each sample. As shown in Figures 3A and 3B, these zinc-iron alloy coatings provide cathodic protection to steel in distilled water and salt water, respectively.

[0061] Figures 4A and 4B are graphs illustrating open circuit potential of zinc-iron CMMA coatings in distilled water and salt water, respectively. The zinc-iron coatings were deposited from the electrolyte solution of Example 2 and passivated with Alodine 1200. The zinc-iron coatings (samples 1, 2, and 3) were prepared by pulsing at an alternating current density of 50 mA/cm² and 150 mA/cm² until a total of 100 layers were obtained for each sample. As shown in Figures 4A and 4B, these zinc-iron alloy coatings provide cathodic protection to steel in distilled water and salt water, respectively.

[0062] Figure 5 is a graph illustrating open circuit potential of zinc-iron CMMA coatings in salt water. The zinc-iron coatings were deposited from the electrolyte solution of Example 2 and passivated with Trichrome HB 1701 CF. The zinc-iron coatings (samples 1, 2, and 3) were prepared by pulsing at an alternating current density of 50 mA/cm² and 150 mA/cm² until a total of 50 layers were obtained (with about 15 microns in total thickness) for each sample. As shown in Figure 5, these zinc-iron alloy coatings provide cathodic protection to steel in salt water. These layers also provide 500 hours or more of corrosion protection under the salt spray test (ASTM B 117).

[0063] Figures 6A and 6B are graphs illustrating open circuit potential of pure zinc coatings and zinc-iron CMMA coatings, respectively, in salt water. The total thickness of all coatings shown in Figures 6A and 6B was about 15 microns. As shown in Figures 6A and 6B, CMMA layers maintain a more steady potential difference between bare steel and coated steels over a number of days as compared to a pure zinc coating.

Hydrogen Embrittlement and Re-Embrittlement

[0064] Hydrogen Embrittlement (HE) tests were performed according to ASTM F 519 using Type 1a.1 specimens having a notch. For HE testing, a load is applied to a notch on a High Strength Steel 4340 sample without any coating to determine an average Notch Fracture Strength (NFS) value based from three uncoated samples. Average NFS for the High Strength Steel 4340 sample was determined to be 3,953 Kg for 200 hours. No failure was observed under ASTM F 519.

[0065] Alloys, as described above, were electrodeposited onto new High Strength Steel 4340 samples having a notch. The zinc-iron CMMA coated specimens were passivated, baked (190°C for 24 hours). Then, 75% load of the average NFS value (75% of 3,953 Kg = 2,964.75 Kg, about 2,965 Kg) was applied to the samples and held at this load for 200 hours. No fracturing was observed, indicating that these coatings pass the HE test.

[0066] For the Hydrogen Re-Embrittlement test, a specimen is loaded at 45% of NFS and the test is performed as described above, but with exposure of the notch area to a 3.5% NaCl solution. 3 out of 4 specimens tested passed 150h of loading in saline media, indicating very good resistance of the different CMMA coatings to corrosive embrittling media.

[0067] Example 4: The components of Example 4 were mixed in a stepwise manner starting with the complexing agents first followed by metal salts. When deposited at 50 mA/cm² using the electrolyte composition of Example 4, a coating with 21.5% Fe is obtained.

Example 4		
Zinc sulphate (ZnSO ₄ ·7H ₂ O)	50 g/L	0.0174 M
Ferrous sulphate (FeSO ₄ ·7H ₂ O)	50 g/L	0.18 M
Boric acid (H ₃ BO ₃)	50 g/L	0.95
Sodium Sulphate (Na ₂ SO ₄ ·10H ₂ O)	50 g/L	0.19

[0068] Overall, the present disclosure provides improved electrolyte solutions for electrodeposition of zinc-iron alloys, methods of forming zinc-iron alloys, and methods of electrodepositing zinc-iron alloys.

[0069] Further aspects are described according to the following clauses:

Clause 1. An electrolyte solution for electroplating comprising:

a metal salt;
an alkali metal citrate;
an alkali metal acetate;
a citric acid; and
glycine.

Clause 2. The electrolyte solution of Clause 1, wherein the metal salt comprises an iron salt and a zinc salt.

Clause 3. The electrolyte solution of Clauses 1 or 2, wherein the pH of the electrolyte solution is from about 3 to about 6.

Clause 4. The electrolyte solution of Clauses 2 or 3, wherein the iron salt is a divalent iron salt comprising one or more of iron (II) sulfate, iron (II) chloride, iron (II) acetate, and hydrates thereof.

Clause 5. The electrolyte solution of Clause 4, wherein the concentration of the iron salt is from about 0.07 mol/L to about 0.35 mol/L.

Clause 6. The electrolyte solution of any one of Clauses 2 - 5, wherein the zinc salt is a divalent zinc salt comprising one or more of zinc (II) sulfate, zinc (II) chloride, zinc (II) acetate, and hydrates thereof.

Clause 7. The electrolyte solution of Clause 6, wherein the concentration of the zinc salt is from about 0.02 mol/L to about 0.2 mol/L.

Clause 8. The electrolyte solution of any one of Clauses 1 - 7, further comprising at least one of thiamine hydrochloride and hydrates thereof.

Clause 9. The electrolyte solution of Clause 8, wherein the concentration of thiamine hydrochloride or hydrate thereof is from about 0.001 mol/L to about 0.003 mol/L of the electrolyte solution.

Clause 10. The electrolyte solution of any one of Clauses 1 - 9, wherein the alkali metal citrate is one or more of citric acid trisodium salt, citric acid disodium salt, citric acid monosodium salt, citric acid tripotassium salt, citric acid dipotassium salt, citric acid monopotassium salt, or hydrates thereof.

Clause 11. The electrolyte solution of Clause 10, wherein the concentration of the alkali metal citrate is from about 0.01 mol/L to about 0.05 mol/L.

Clause 12. The electrolyte solution of any one of Clause 1 - 11, wherein the alkali metal acetate is one or more of acetic acid sodium salt or acetic acid potassium salt, or hydrates thereof.

Clause 13. The electrolyte solution of Clause 12, wherein the concentration of the alkali metal acetate is from about 0.5 mol/L to about 0.8 mol/L.

Clause 14. The electrolyte solution of any one of Clauses 1 - 13, wherein the concentration of citric acid is from about 0.05 mol/L to about 0.5 mol/L.

Clause 15. The electrolyte solution of any one of Clauses 1 - 4, wherein the concentration of glycine is from about 0.1 mol/L to about 0.3 mol/L.

Clause 16. A method for electrodepositing a zinc-iron alloy on a substrate, the method comprising:

introducing a cathode and an anode into an electrolyte solution comprising a zinc salt, an iron salt, an alkali metal citrate, an alkali metal acetate, a citric acid, and glycine; and
passing a current between the cathode and the anode through the electrolyte solution to deposit a layer containing zinc and iron onto the cathode.

Clause 17. The method of Clause 16, further comprising thiamine hydrochloride.

Clause 18. The method of Clauses 16 or 17, wherein the cathode is a steel substrate, a copper substrate, a brass substrate, a nickel substrate, a copper-coated substrate, or a nickel-coated substrate.

Clause 19. The method of any one of Clauses 16 - 18, wherein the anode is a zinc material, platinum material, platinized titanium material, a carbonaceous electrode material.

Clause 20. The method of any one of Clauses 16 - 19, wherein the current has a current density from about 1 mA/cm² to about 200 mA/cm².

Clause 21. The method of Clause 20, wherein the pulsed current is a series of pulses and each pulse has a duration of from about 20 milliseconds to about 800 milliseconds.

Clause 22. The method of Clause 21, wherein the temperature of the electrolyte solution is maintained at a temperature from about 20°C to about 35°C while passing the current.

Clause 23. The method of any one of Clauses 16 - 22, further comprising passing a second current between the cathode and the anode having a current density different than a current density of the first current to deposit a second layer comprising zinc and iron onto the first layer deposited by the first current.

Clause 24. The method of any one of Clauses 16 - 22, further comprising passing a second current between the cathode and the anode having the same current density as a current density of the first current to deposit a second layer comprising zinc and iron onto the first layer deposited by the first current.

Clause 25. The method of Clause 23 or 24, further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers having an iron content, wherein the currents have substantially the same duration and the layers have substantially the same thickness and substantially the same iron content.

Clause 26. The method of any one of Clauses 23 - 25, further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers, wherein the layers have substantially the same thickness and two or more of the layers have a different iron content.

Clause 27. The method of any one of Clauses 23 - 26, further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers, wherein two or more of the layers have a different thickness and two or more of the layers have a different iron content.

Clause 28. The method of any one of Clauses 23 - 27, further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers comprising:

- a first layer having a first iron content,
- a second layer having a second iron content different than the first iron content,
- a third layer having the same iron content as the first layer, and
- a fourth layer having the same iron content as the second layer.

Clause 29. The method of any one of Clauses 23 - 28, further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers, wherein each layer has substantially the same thickness and each layer has a different iron content.

Clause 30. The method of any one of Clauses 23 - 29, further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers, wherein each layer has a different thickness and each layer has a different iron content.

[0070] The descriptions of the various aspects of the present disclosure have been presented for purposes of illustration, but are not intended to be exhaustive or limited to the aspects disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the described aspects. The terminology used herein was chosen to best explain the principles of the aspects, the practical application or technical improvement over technologies found in the marketplace, or to enable others of ordinary skill in the art to understand the aspects disclosed herein. While the foregoing is directed to aspects of the present disclosure, other and further aspects of the present disclosure may be devised without departing from the basic scope thereof.

Claims

1. An electrolyte solution for electroplating comprising:

- a metal salt;
- an alkali metal citrate;
- an alkali metal acetate;
- a citric acid; and
- glycine.

2. The electrolyte solution of claim 1, wherein the metal salt comprises an iron salt and a zinc salt; and/or wherein the pH of the electrolyte solution is from about 3 to about 6.

3. The electrolyte solution of claims 1 or 2, wherein the iron salt is a divalent iron salt comprising one or more of iron (II) sulfate, iron (II) chloride, iron (II) acetate, and hydrates thereof.

4. The electrolyte solution of claim 3, wherein the concentration of the iron salt is from 0.07 mol/L to 0.35 mol/L.

5. The electrolyte solution of any one of claims 2 - 4, wherein the zinc salt is a divalent zinc salt comprising one or more of zinc (II) sulfate, zinc (II) chloride, zinc (II) acetate, and hydrates thereof.

6. The electrolyte solution of claim 5, wherein the concentration of the zinc salt is from 0.02 mol/L to 0.2 mol/L.

7. The electrolyte solution of any one of claims 1 - 6, wherein the alkali metal citrate is one or more of citric acid trisodium salt, citric acid disodium salt, citric acid monosodium salt, citric acid tripotassium salt, citric acid dipotassium salt,

citric acid monopotassium salt, or hydrates thereof.

8. The electrolyte solution of claim 7, wherein the concentration of the alkali metal citrate is from 0.01 mol/L to 0.05 mol/L.

9. The electrolyte solution of any one of claims 1 - 8, wherein the alkali metal acetate is one or more of acetic acid sodium salt or acetic acid potassium salt, or hydrates thereof; and/or wherein the concentration of citric acid is from about 0.05 mol/L to about 0.5 mol/L; and/or wherein the concentration of glycine is from about 0.1 mol/L to about 0.3 mol/L.

10. A method for electrodepositing a zinc-iron alloy on a substrate, the method comprising:

introducing a cathode and an anode into an electrolyte solution comprising a zinc salt, an iron salt, an alkali metal citrate, an alkali metal acetate, a citric acid, and glycine; and passing a current between the cathode and the anode through the electrolyte solution to deposit a layer containing zinc and iron onto the cathode.

11. The method of claim 10, wherein the cathode is a steel substrate, a copper substrate, a brass substrate, a nickel substrate, a copper-coated substrate, or a nickel-coated substrate; and/or wherein the anode is a zinc material, platinum material, platinized titanium material, a carbonaceous electrode material; and/or wherein the current has a current density from about 1 mA/cm² to about 200 mA/cm²

12. The method of claims 10 or 11, further comprising passing a second current between the cathode and the anode having a current density different than a current density of the first current to deposit a second layer comprising zinc and iron onto the first layer deposited by the first current; or further comprising passing a second current between the cathode and the anode having the same current density as a current density of the first current to deposit a second layer comprising zinc and iron onto the first layer deposited by the first current; or further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers, wherein the layers have substantially the same thickness and two or more of the layers have a different iron content; or further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers, wherein two or more of the layers have a different thickness and two or more of the layers have a different iron content

13. The method of any one of claims 10 - 12, further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers comprising:

a first layer having a first iron content,
a second layer having a second iron content different than the first iron content,
a third layer having the same iron content as the first layer, and
a fourth layer having the same iron content as the second layer.

14. The method of any one of claims 10 - 13, further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers, wherein each layer has substantially the same thickness and each layer has a different iron content.

15. The method of any one of claims 10 - 14, further comprising repeating passing currents between the cathode and the anode to form a coating having a plurality of alternating layers, wherein each layer has a different thickness and each layer has a different iron content.

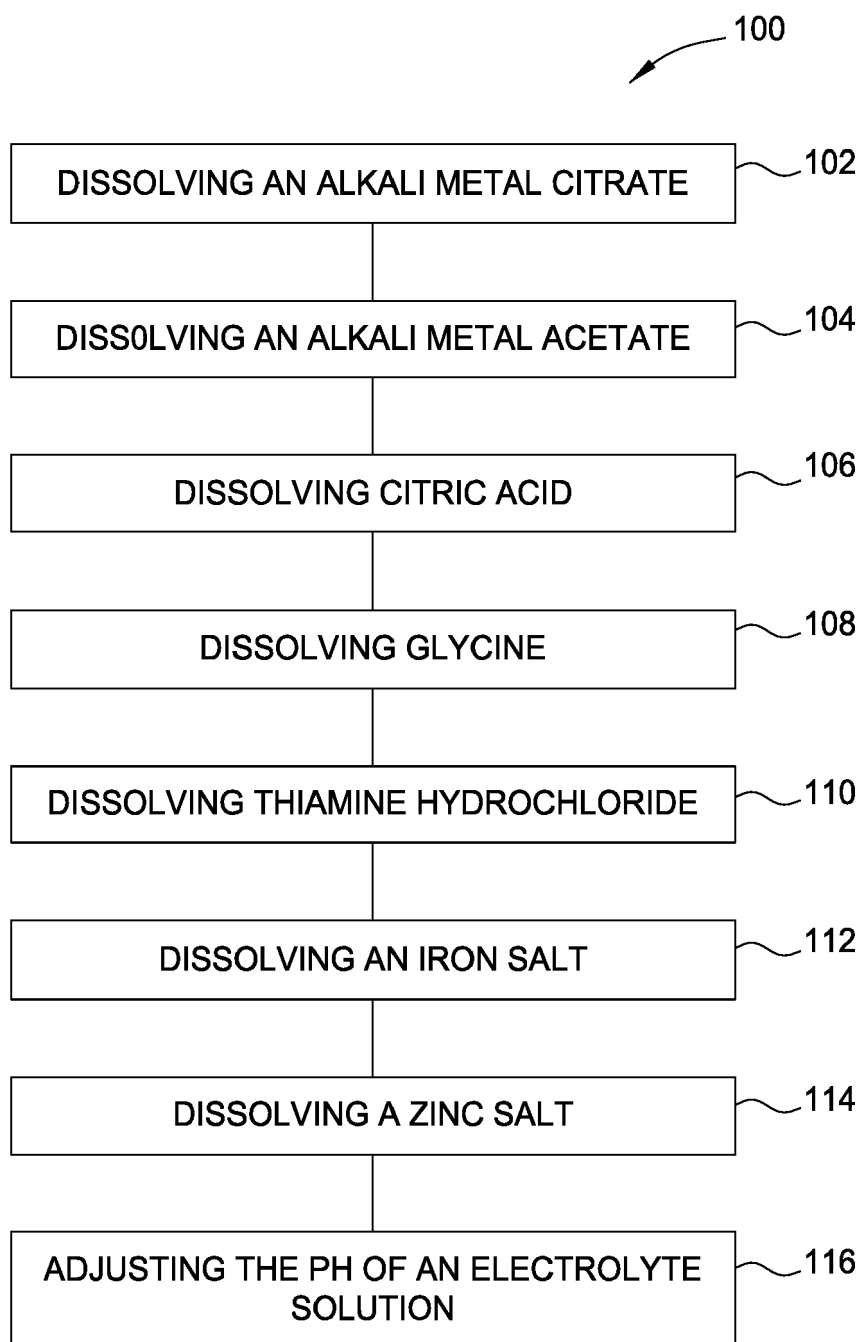


FIG. 1

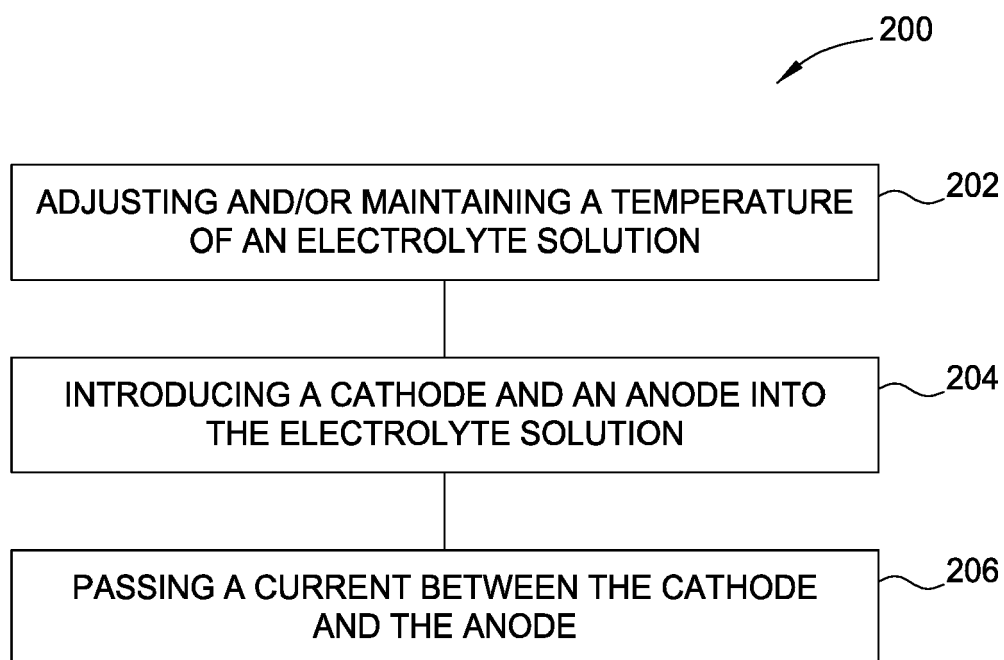


FIG. 2

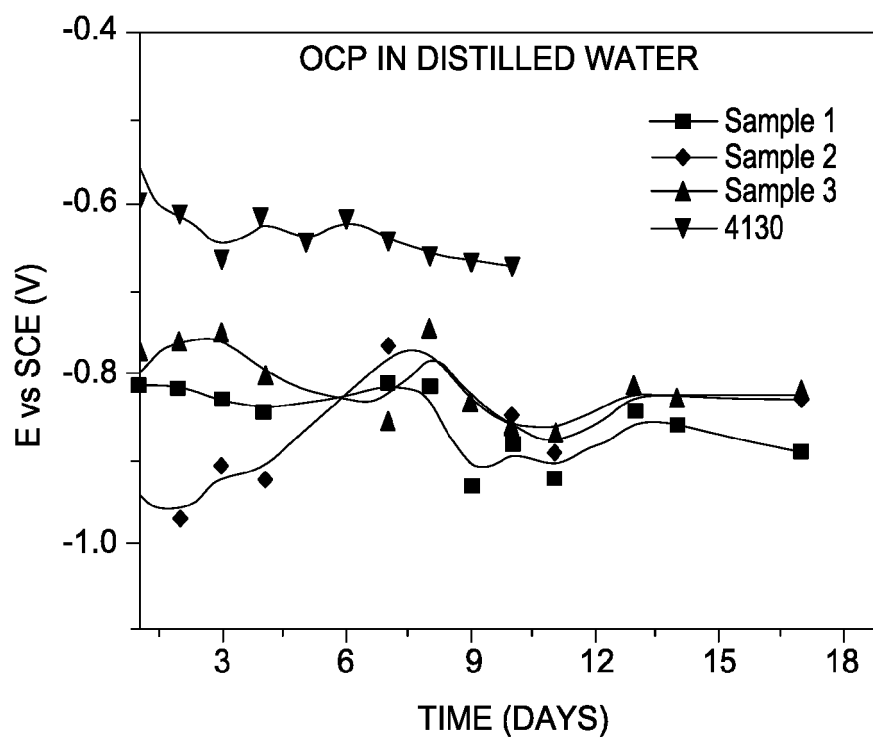


FIG. 3A

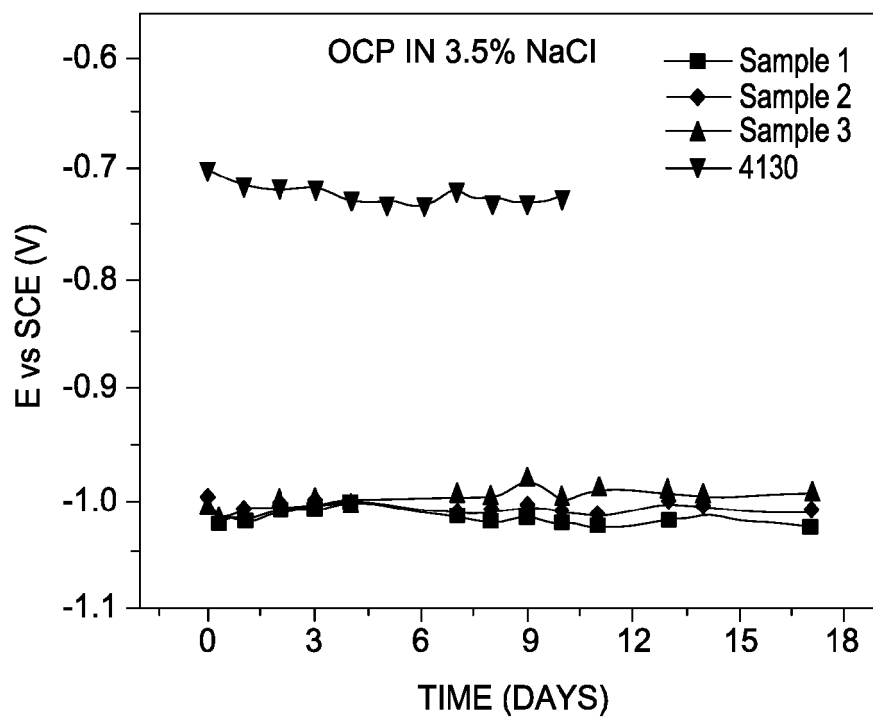


FIG. 3B

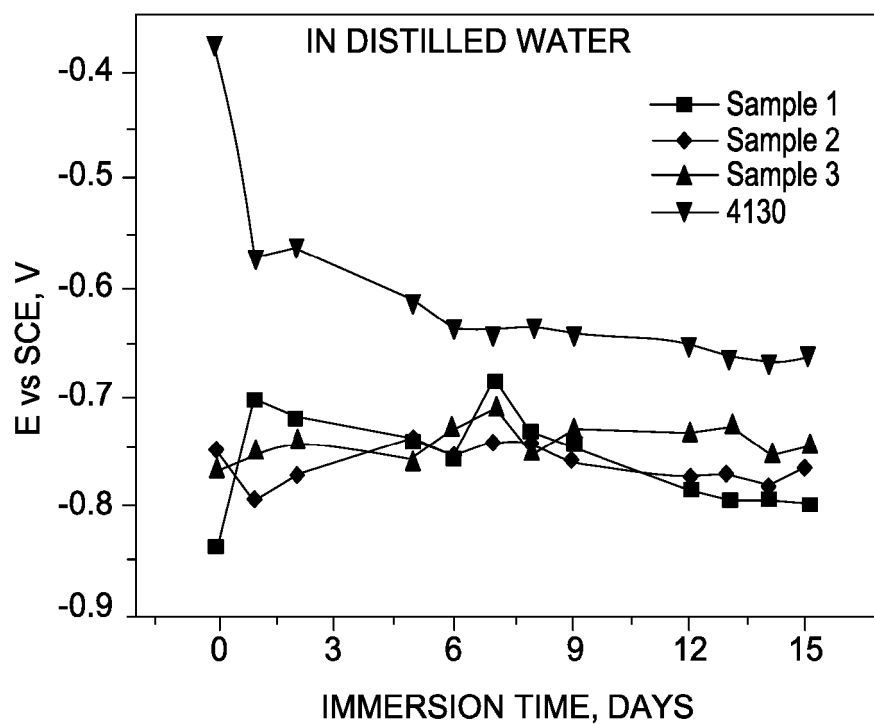


FIG. 4A

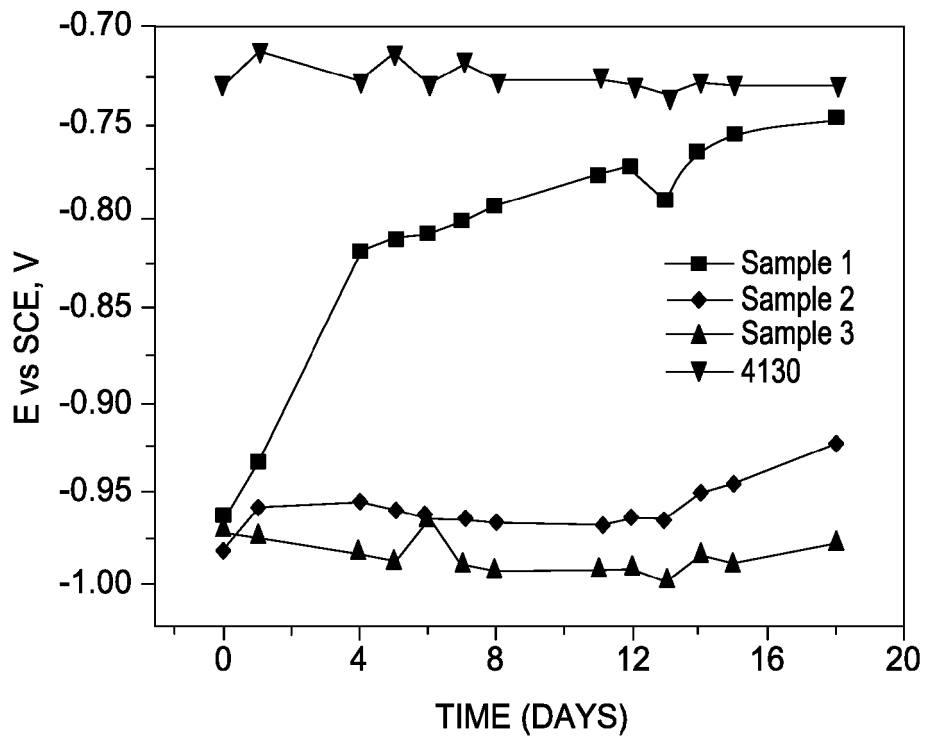


FIG. 4B

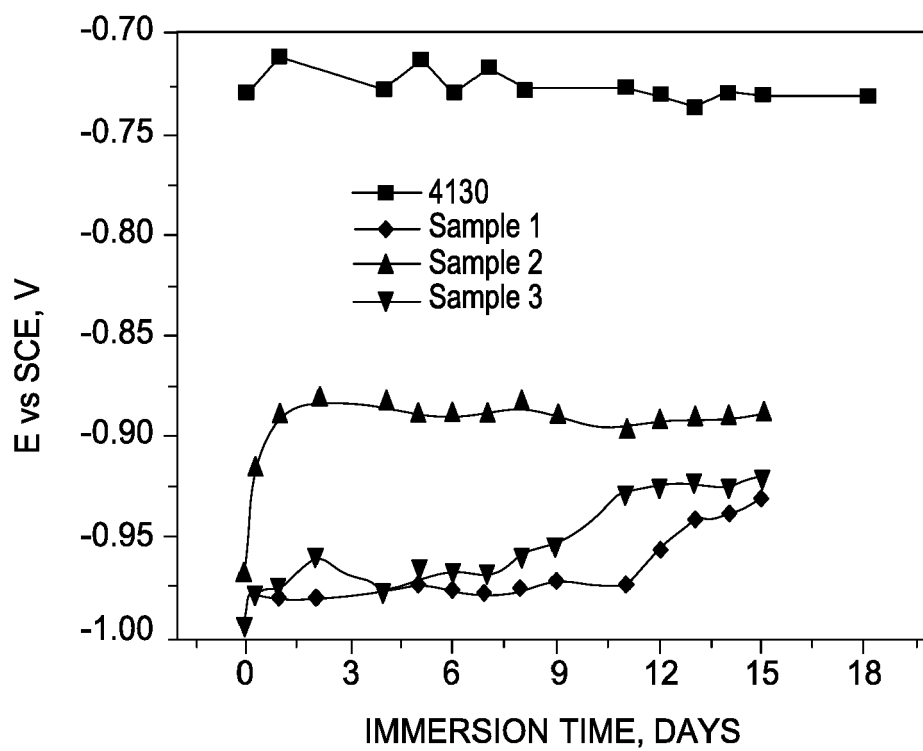


FIG. 5

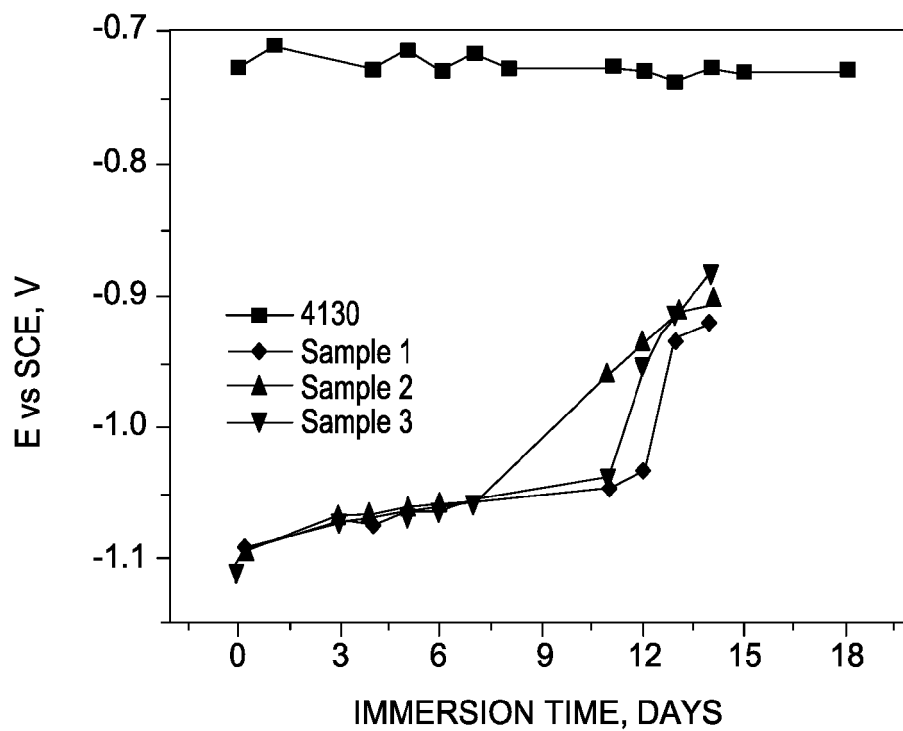


FIG. 6A

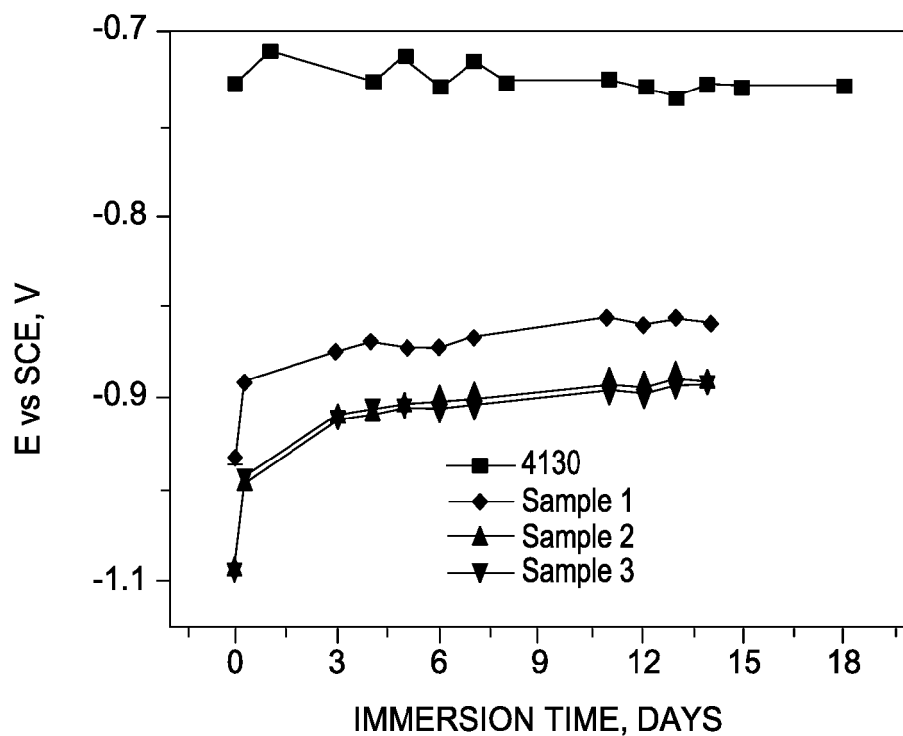


FIG. 6B



EUROPEAN SEARCH REPORT

 Application Number
 EP 18 17 6707

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	CN 103 451 663 B (NANTONG BAOLAILI AXLETREE CO LTD) 2 September 2015 (2015-09-02) * paragraph [0017] * -----	1,2	INV. C25D3/56 C25D5/10 C25D5/18
X	BHAT AND A C HEGDE R S: "Production of layer by layer Zn-Fe compositional multilayer alloy coatings using triangular current pulses for better corrosion protection", TRANSACTIONS OF THE IMF, MANEY, vol. 93, no. 3, 1 May 2015 (2015-05-01), pages 157-163, XP001595710, DOI: HTTP://DX.DOI.ORG/10.1179/0020296715Z.000000000236 * Last paragraph; page 158; figure 1; table 1 * * Experimental * * Compositional multilayer coating - Development of CMA Zn-Fe coating * -----	3-15	
A	V. THANGARAJ ET AL: "Surface Modification by Compositionally Modulated Multilayered Zn-Fe Alloy Coatings", CHINESE JOURNAL OF CHEMISTRY, vol. 26, no. 12, 1 December 2008 (2008-12-01), pages 2285-2291, XP055501864, CN ISSN: 1001-604X, DOI: 10.1002/cjoc.200890405 * abstract * * Experimental * ----- -/--	1-15	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 24 August 2018	Examiner Telias, Gabriela
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 18 17 6707

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	RAMESH BHAT ET AL: "Optimization of deposition conditions for bright Zn-Fe coatings and its characterization", PROTECTION OF METALS AND PHYSICAL CHEMISTRY OF SURFACES, SP MAIK NAUKA/INTERPERIODICA, DORDRECHT, vol. 47, no. 5, 17 September 2011 (2011-09-17), pages 645-653, XP019954187, ISSN: 2070-206X, DOI: 10.1134/S2070205111050030 * abstract; tables 1, 2 * * Last paragraph; page 646 * -----	1-15	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		24 August 2018	Telias, Gabriela
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 17 6707

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-08-2018

10	Patent document cited in search report	Publication date	Patent family member(s)	Publication date
15	CN 103451663	B	02-09-2015	NONE
20	-----			
25				
30				
35				
40				
45				
50				
55				

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82