



(86) Date de dépôt PCT/PCT Filing Date: 1992/02/05
(87) Date publication PCT/PCT Publication Date: 1992/08/20
(45) Date de délivrance/Issue Date: 2003/05/13
(85) Entrée phase nationale/National Entry: 1993/07/28
(86) N° demande PCT/PCT Application No.: US 1992/000991
(87) N° publication PCT/PCT Publication No.: 1992/014109
(30) Priorité/Priority: 1991/02/11 (653,768) US


(51) Cl.Int.⁵/Int.Cl.⁵ F28D 7/00, F25D 17/00

(72) Inventeurs/Inventors:
ROCKENFELLER, UWE, US;
KIROL, LANCE D., US

(73) Propriétaire/Owner:
ROCKY RESEARCH, US

(74) Agent: SIM & MCBURNEY

(54) Titre : SYSTEME DE RECYCLAGE DE REFRIGERANT
(54) Title: REFRIGERANT RECYCLING SYSTEM

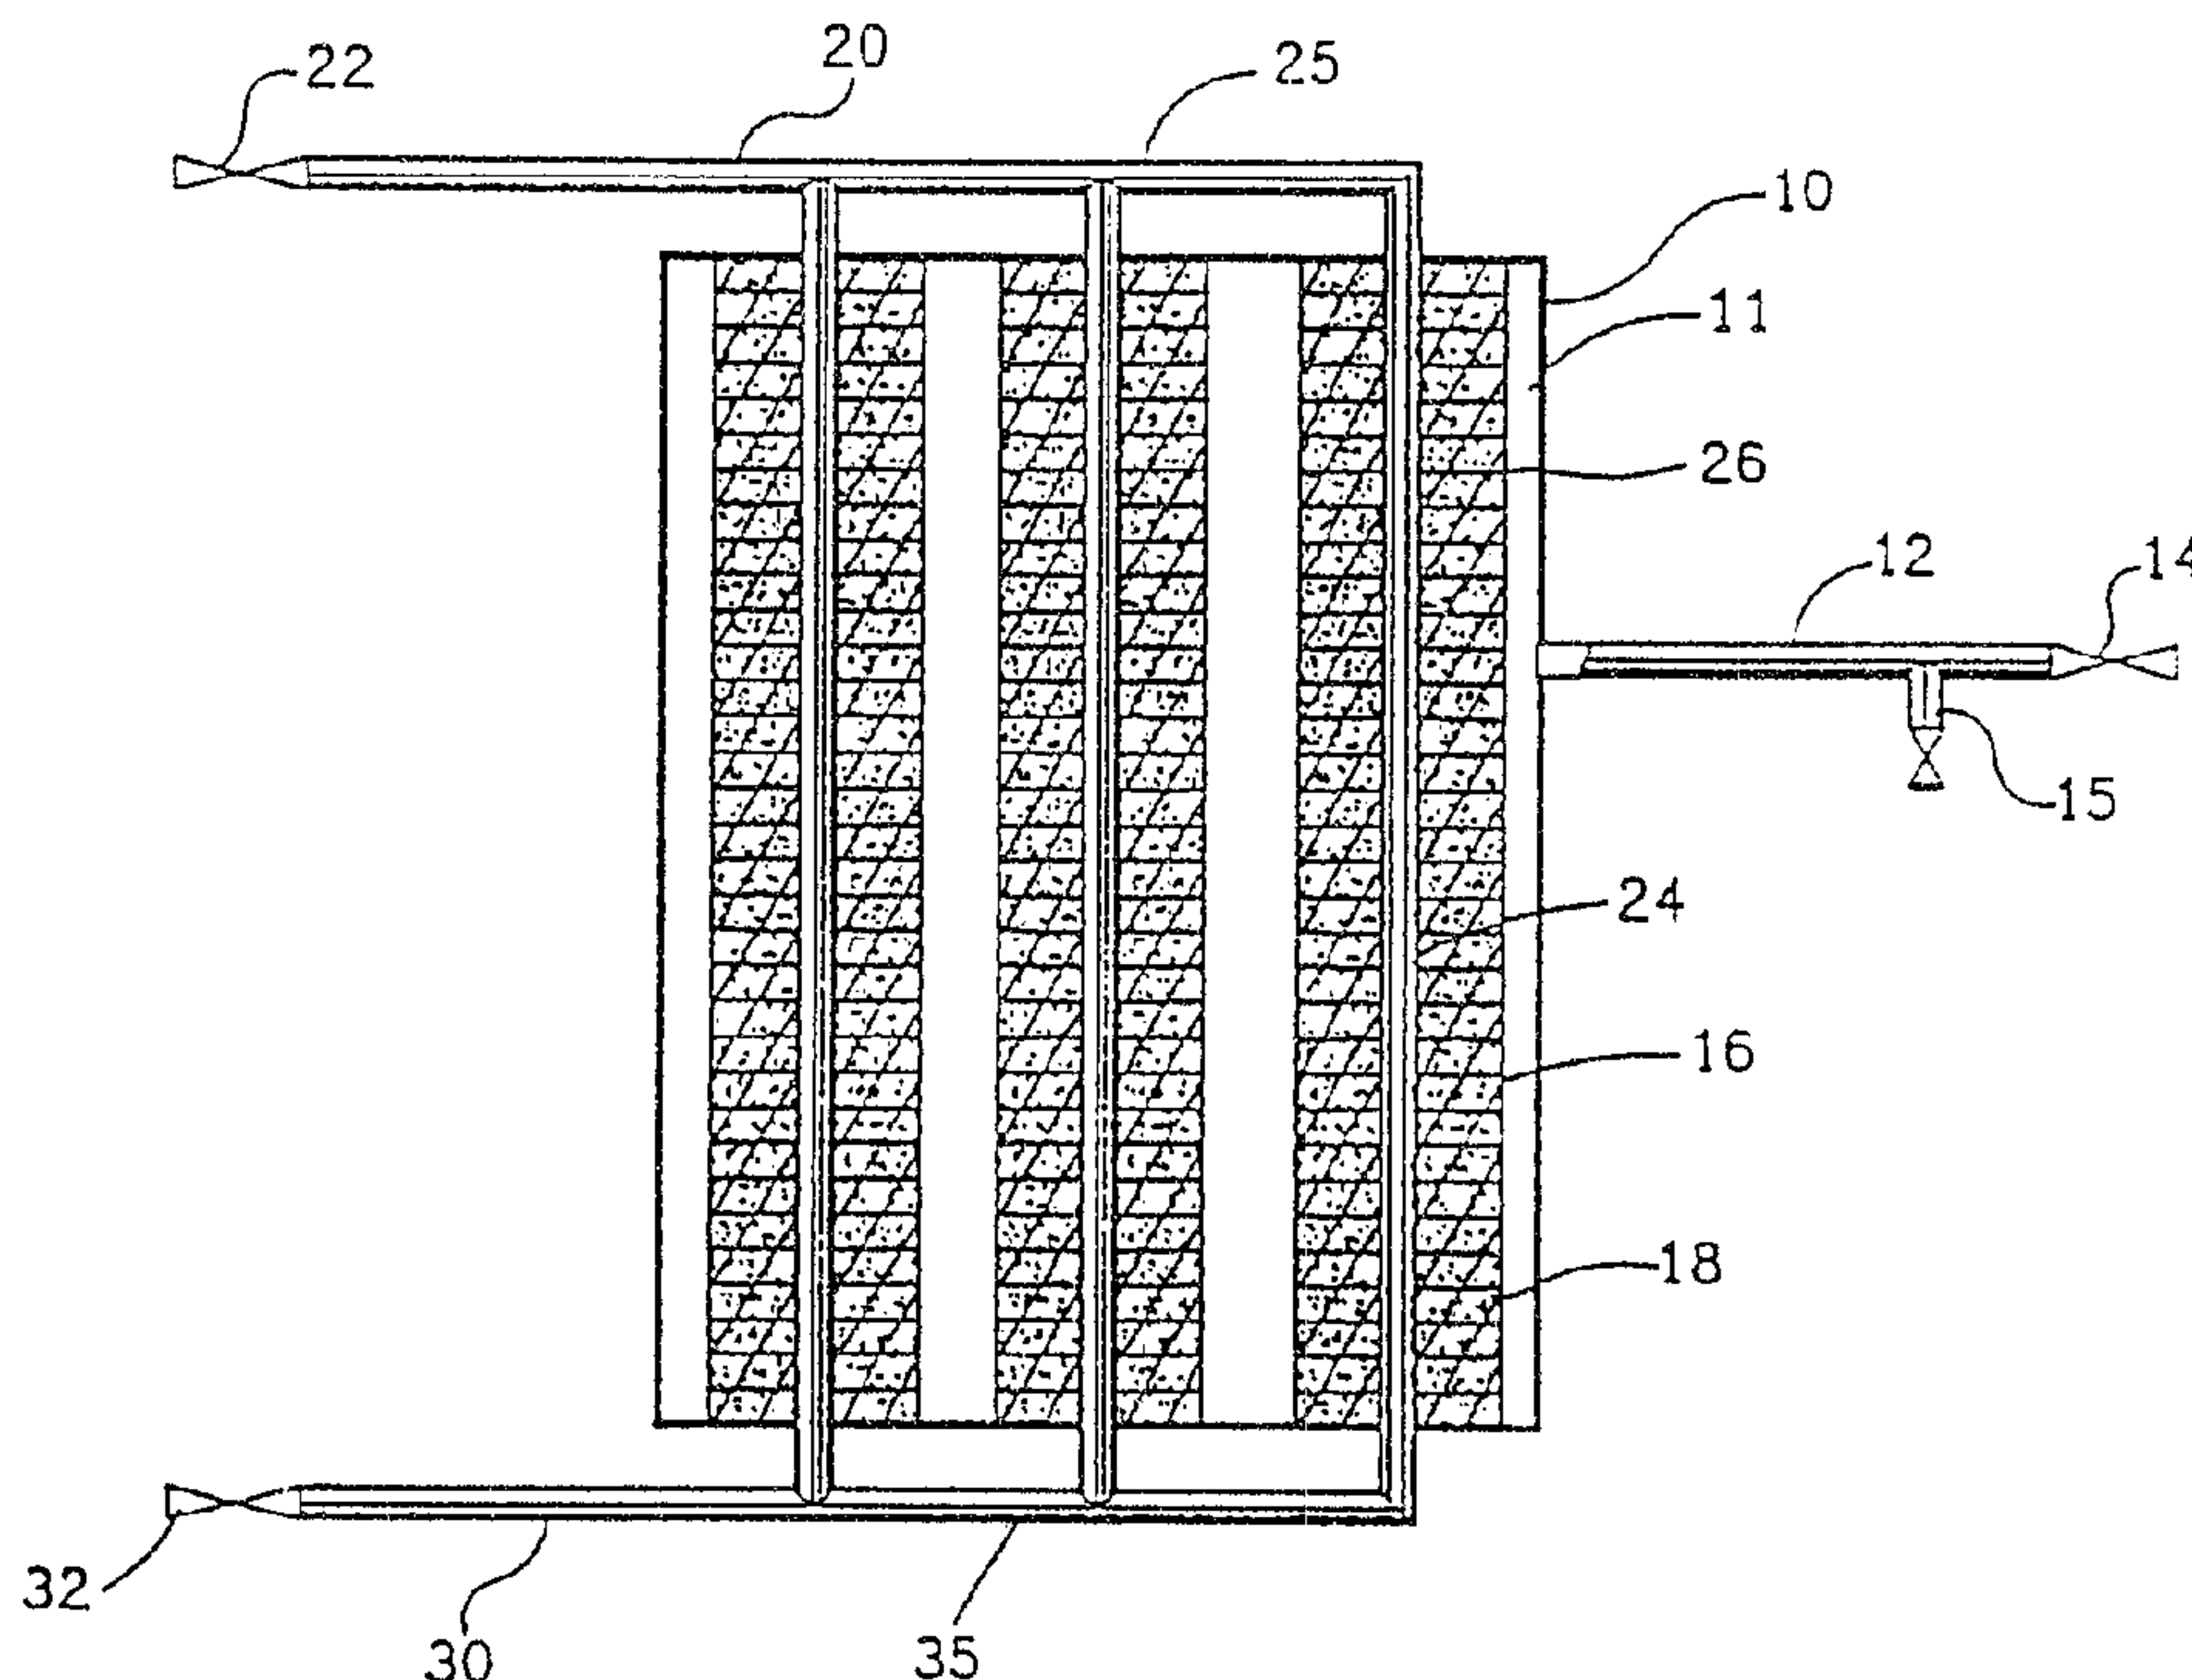

(57) **Abrégé/Abstract:**


The invention disclosed herein relates to an apparatus for being detachably connected to a chemical or refrigeration system for selectively receiving and dispensing a gaseous refrigerant or chemical from and to that system, respectively, including a vessel (10) having a chamber (11) capable of maintaining a pressurized gas therein, gas inlet means (12) for directing the gas to and from the chamber, and connection means (14) for connecting the gas inlet to a refrigeration or chemical system; a plurality of heat exchange conduits (25) exposed in the chamber for directing heat exchange fluid therethrough and fluid inlet and outlet means (22, 32) communicating exteriorly of the vessel for directing the fluid to and from the conduits, respectively; and a solid adsorbent (18) capable of alternately adsorbing and desorbing the gaseous refrigerant or chemical and positioned in thermal communication with each of the heat exchange conduits.





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : F28D 7/00, 17/00	A1	(11) International Publication Number: WO 92/14109 (43) International Publication Date: 20 August 1992 (20.08.92) 2101551
(21) International Application Number: PCT/US92/00991 (22) International Filing Date: 5 February 1992 (05.02.92) (30) Priority data: 653,768 11 February 1991 (11.02.91) US (71) Applicant: ROCKY RESEARCH [US/US]; 1598 Foothill Drive, Boulder City, NV 89005 (US). (72) Inventors: ROCKENFELLER, Uwe ; 1513 Christina Drive, Boulder City, NV 89005 (US). KIROL, Lance, D. ; 896 Fairway Drive, Boulder City, NV 89005 (US). (74) Agents: SIMPSON, Andrew, H. et al.; Knobbe, Martens, Olson & Bear, 620 Newport Center Drive, Suite 1600, Newport Beach, CA 92660 (US).		(81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, KR, LU (European patent), MC (European patent), NL (European patent), SE (European patent). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

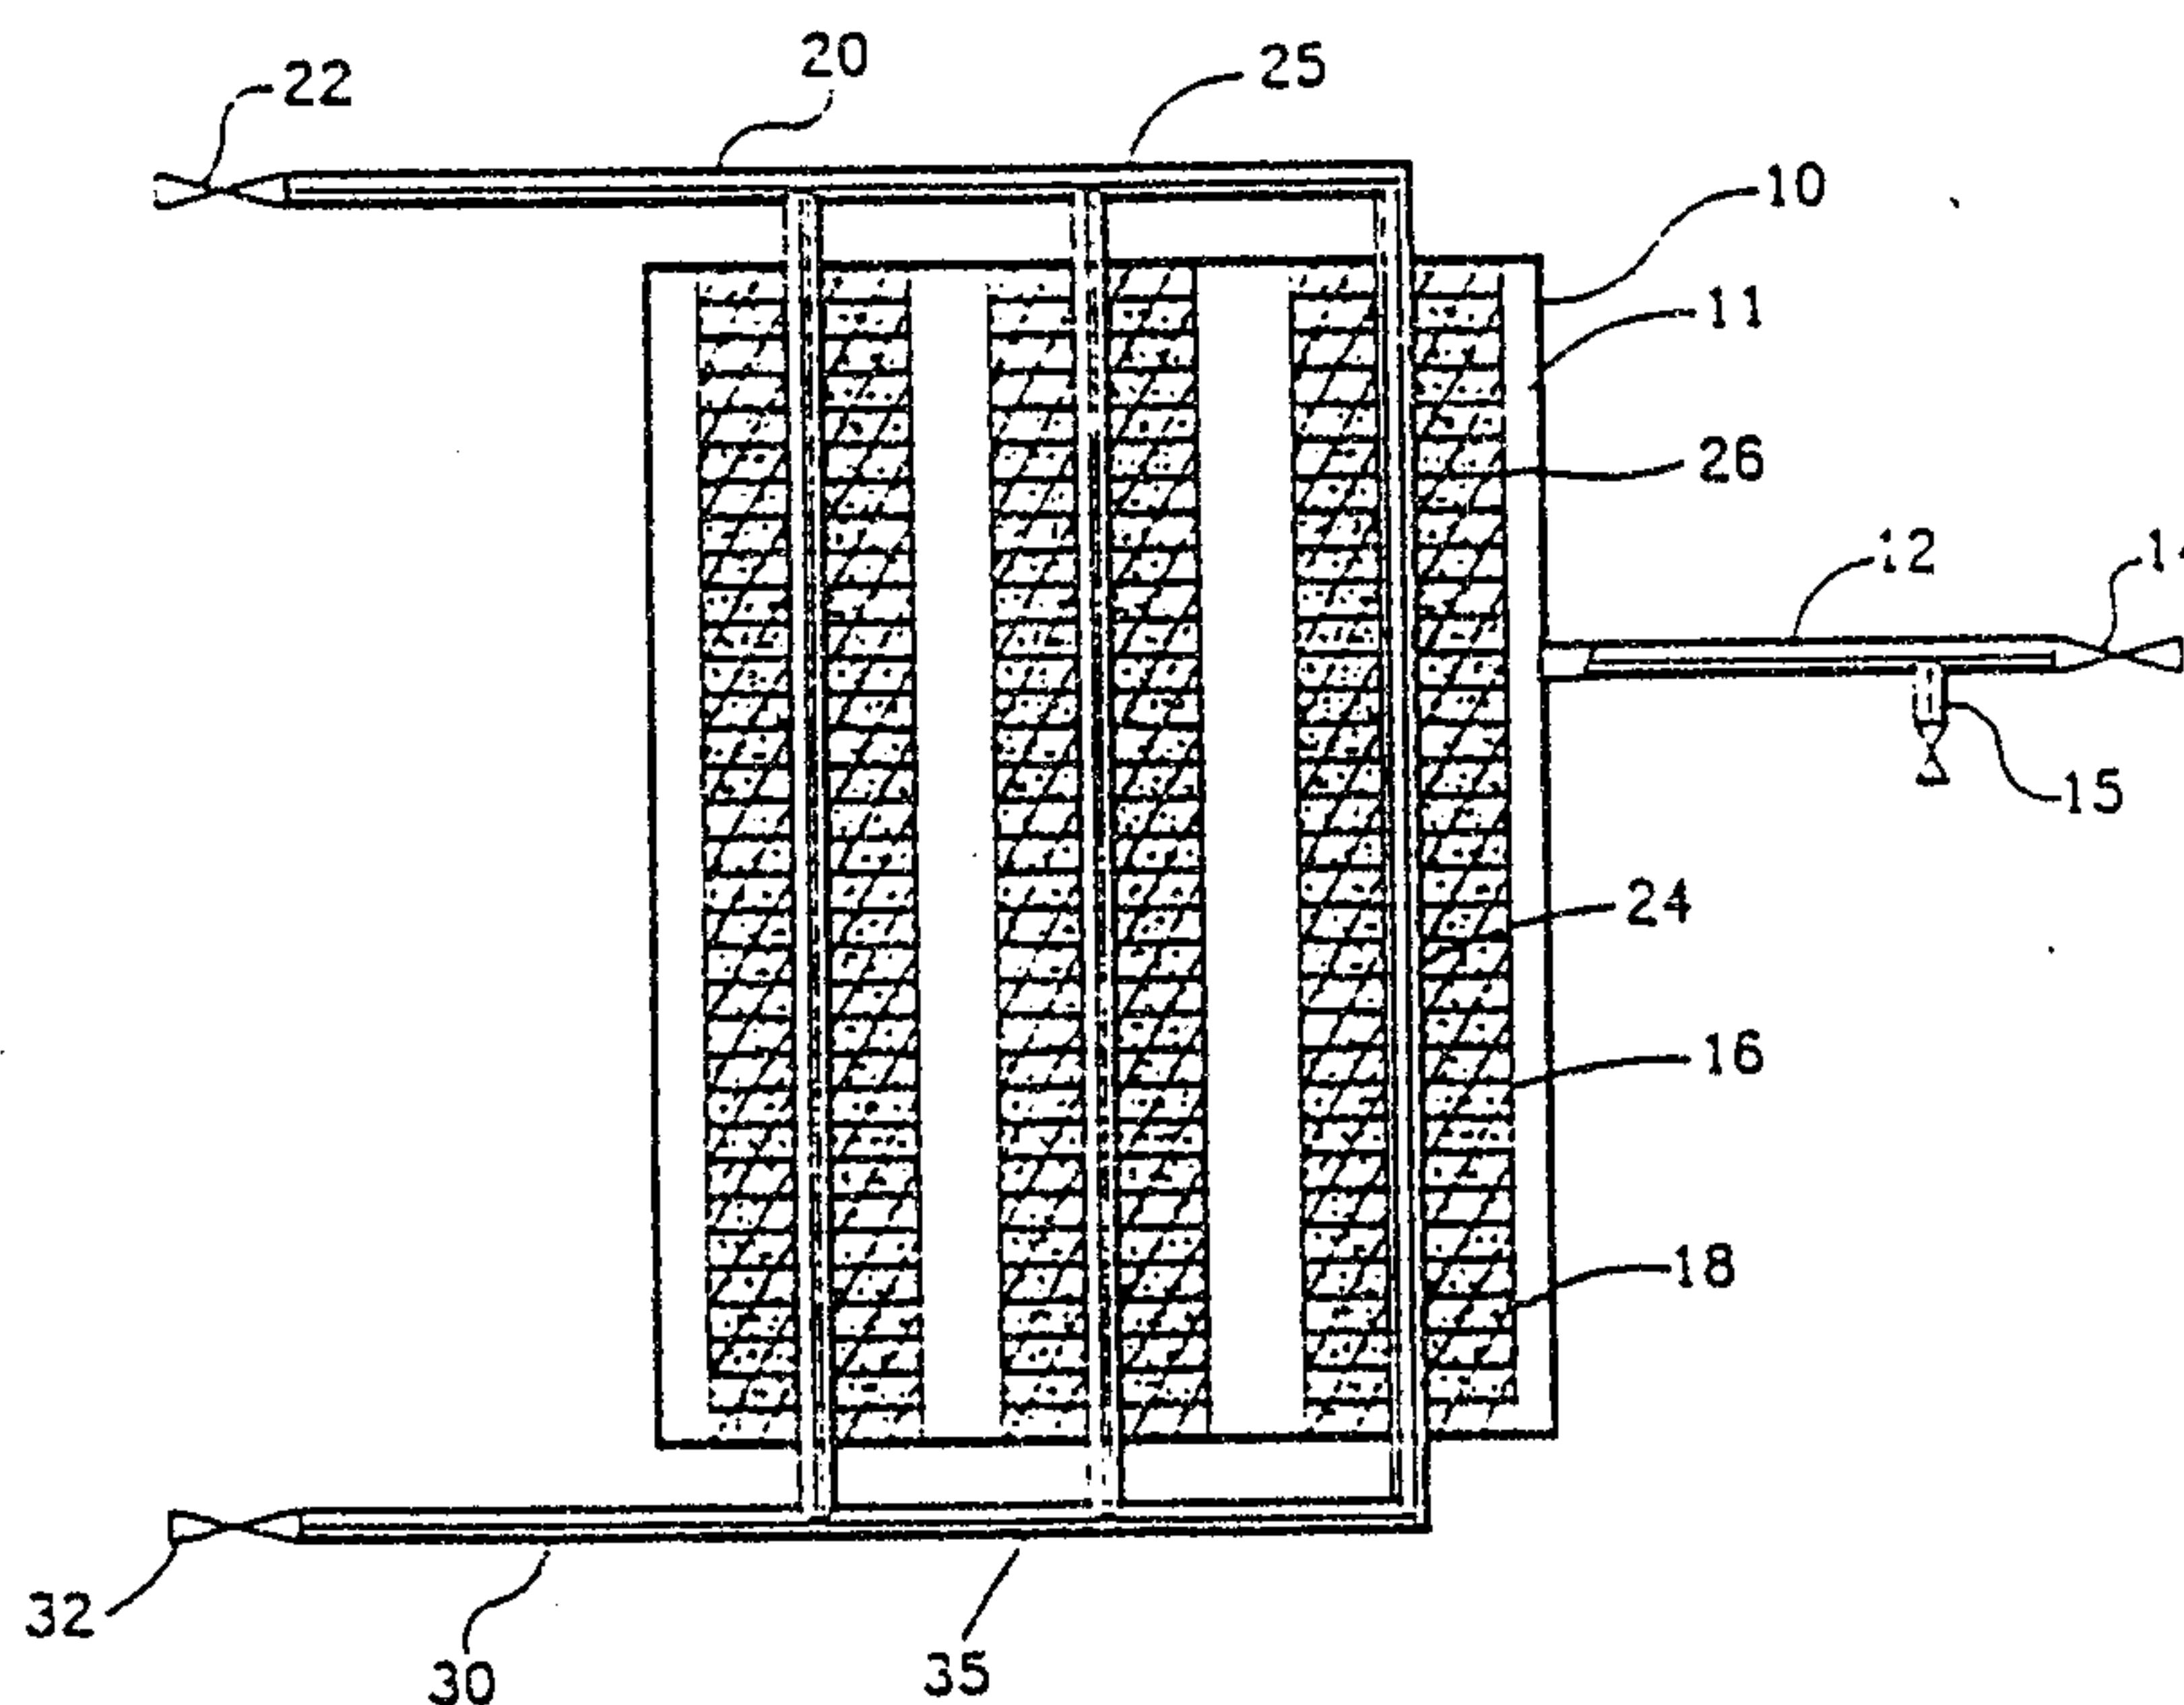(54) Title: REFRIGERANT RECYCLING SYSTEM**(57) Abstract**

The invention disclosed herein relates to an apparatus for being detachably connected to a chemical or refrigeration system for selectively receiving and dispensing a gaseous refrigerant or chemical from and to that system, respectively, including a vessel (10) having a chamber (11) capable of maintaining a pressurized gas therein, gas inlet means (12) for directing the gas to and from the chamber, and connection means (14) for connecting the gas inlet to a refrigeration or chemical system; a plurality of heat exchange conduits (25) exposed in the chamber for directing heat exchange fluid therethrough and fluid inlet and outlet means (22, 32) communicating exteriorly of the vessel for directing the fluid to and from the conduits, respectively; and a solid adsorbent (18) capable of alternately adsorbing and desorbing the gaseous refrigerant or chemical and positioned in thermal communication with each of the heat exchange conduits.

-1-

REFRIGERANT RECYCLING SYSTEM**Background of the Invention**

5 The collection or capture of gaseous refrigerants to be evacuated from refrigeration systems is often not practiced due to the lack of suitable available commercial equipment or convenient methods. Although the use of fluorocarbon or CFC refrigerants are intended to be gradually phased out because of atmospheric and environmental pollution, even with the use of other gaseous refrigerants including hydrogen, nitrogen or polarized gaseous refrigerants such as ammonia, water, methanol, methylamine, sulfur dioxide, and the like, release of such materials into the atmosphere is environmentally and economically undesirable and may be prohibited by law. 10 Similarly, the temporary evacuation or purging of toxic gases from chemical systems to avoid atmospheric pollution, or to prevent the loss of valuable or expensive gases, are of substantial interest, but practical systems for such uses are not presently available.

Summary of the Invention

20 The system of an aspect of the present invention is directed to an apparatus for being permanently or selectively installed with a refrigeration or chemical system whereby a gas may be evacuated from the system and adsorbed on a solid adsorbent material, and later desorbed and returned to the system, if and when desired. In one embodiment, the invention comprises a portable system incorporating a pressure holding vessel for adsorbing the gas therein and includes means for selectively desorbing the gas for return to the refrigeration or chemical system. 25 In another embodiment, the invention comprises a vessel having the gas adsorbing and desorbing capability which may be permanently installed with a system for selectively capturing the gas and for returning it to the system when desired. 30

-1a-

In accordance with another aspect of the present invention there is provided Apparatus for being detachably connected to a system containing a refrigerant or chemical for selectively evacuating and charging said
5 refrigerant or chemical in a gaseous state from and to said system, respectively, comprising:

a vessel having a chamber capable of maintaining a pressurized gas therein, gas inlet means for directing gaseous refrigerant or gaseous chemical to and from said
10 chamber, and connection means for connecting said gas inlet to a refrigeration or chemical system containing said refrigerant or said chemical,

a solid adsorbent capable of alternatively adsorbing and desorbing said gaseous refrigerant or said
15 gaseous chemical, and

a plurality of heat exchange conduits exposed in said chamber for directing heat exchange fluid therethrough, substantially all of said heat exchange conduits having said solid adsorbent secured thereon
20 whereby said gaseous refrigerant or said gaseous chemical may be adsorbed along substantially all of said conduits, and fluid inlet and outlet means communicating exteriorly of said vessel for directing said heat exchange fluid to and from substantially all said conduits during said
25 adsorption, and for directing a heat exchange fluid having a second temperature to and from substantially all said conduits during said desorption.

In accordance with another aspect of the present invention there is provided, apparatus for receiving and
30 dispensing ammonia from a system containing said ammonia comprising:

a vessel having a pressure sealed chamber and gas inlet means for being connected to said system containing said ammonia,

-1b-

a solid adsorbent salt capable of forming a complex coordinated compound with said ammonia, which compound is capable of adsorbing at least 25% ammonia, by weight, of said compound, and

5 heat exchange means exposed in said sealed chamber comprising a plurality of heat exchange conduit, substantially all of said conduits having said solid adsorbent secured thereon thereby said ammonia may be absorbed along substantially all of said conduits, and
10 having a fluid inlet and fluid outlet, said fluid inlet including means for being connected to a fluid supply source for directing a heat exchange fluid through substantially all said conduits for adsorbing said ammonia, and for directing a heat exchange fluid through
15 substantially all of said conduits for desorbing said ammonia.

The advantages of a system and apparatus of an aspect of the present invention include providing means for evacuating the gas from a refrigeration or chemical
20 system, for example, when a leak

2101551

-2-

is detected or during repair or modification of the system during which removal of the gas is desired. Such evacuation may be initiated automatically utilizing suitable monitoring and valve engaging means, or accomplished manually. These, as well as other features and advantages of the invention, will be evident from the following detailed description.

Brief Description of the Drawings

Figure 1 is a schematic view of the interior of an apparatus according to the invention illustrating components and features thereof; and

Figure 2 is a partial view of an example of a heat exchange conduit as used in the apparatus with solid adsorbent disposed in heat exchange relationship with the conduit.

Detailed Description of the Invention

Although the present invention will be primarily described for the capture of gaseous refrigerants, particularly polarized gases, and especially ammonia, from refrigeration systems, it is to be understood that it may be useful in broader applications, as will be explained hereinafter. Referring to Figure 1, there is shown a schematic illustration of the components and features of an apparatus of the invention. The vessel 10 defines an interior chamber 11 capable of maintaining a pressurized gas. Within the interior chamber are a plurality of conduits or pipes 24 which extend exteriorly of the vessel to be connected to a source of heat exchange fluid, typically water. Any number of interior pipes may be used, depending on the size of the vessel, with the latter being of a number and size depending on the amount of refrigerant gas which is to be received and adsorbed when the system is used. The plurality of heat exchange pipes 24 are secured to a common inlet header or manifold 25 which may be interior or exterior to the vessel wall 10. Secured to header 25 is an inlet pipe 20 and valve 22 for being attached to a source of heat exchange fluid. The inclusion of valve 22 on the inlet line is optional, and instead, a coupling or connection means for simply securing the inlet pipe to a source of hot or cold water, which source

-3-

is usually valved, is also suitable. Each of the heat exchange pipes is also connected to an outlet header or manifold 35 interiorly or outside of the vessel walls. The manifold is connected to an exterior pipe or outlet line 30, which also may be provided with a valve 32.

5 A refrigerant gas inlet pipe 12, which also may have a valve 14 and/or coupling means for securing the inlet pipe to a refrigeration system line or conduit, extends exteriorly of the vessel 10 and provides the passageway for introducing and discharging a gaseous refrigerant to and from the apparatus. 10 The refrigerant gas inlet pipe 12 communicates with the interior chamber 11 of the vessel 10 so that the refrigerant gas may be directly introduced into the vessel when the valve or connection means is tapped into a gas line of a refrigeration system. Also shown extending from inlet pipe 12 15 is an accessory conduit or nipple 15, which may be provided with a valve or other shut-off means, for securing a pressure line from a pump or compressor. Although an accessory compressor or pump or other source of pressurizing the vessel may be installed as component of the apparatus, it is an optional feature since it may not be necessary to utilize pressure or suction assist where the refrigeration system to which the apparatus is connected has sufficient compressor capacity or where sufficiently high temperature heat can be 20 supplied to the vessel to raise the temperature.

25 Secured in heat exchange communication with each of the pipes 24 is solid adsorbent 18 capable of alternately adsorbing and desorbing gaseous refrigerant. The solid adsorbent is preferably fixed or positioned around and in contact with the heat exchange pipes as disclosed in United States Patent No. 5,298,231, issued March 29, 1994. Preferably, the pipes include heat transfer projections in the form of plates, fins, trays, or the like extending from and preferably attached along the length of each of the heat 30 exchange pipes for improving heat exchange between the heat exchange fluid passing through the pipes and the absorbent 35

2101551

-4-

material. Extending around the exterior of the solid adsorbent is a barrier 16 for retaining the solid adsorbent particles or mass in place around the pipes and in contact with the heat exchange plates or surfaces. It is important that this barrier material be porous to allow the passage of the gaseous refrigerant to and from the adsorbent. For this purpose, the barrier material may be wire mesh, porous foam or refractory material, inert fabric, and the like. An example of the heat exchange pipes on the interior of the apparatus is illustrated in Figure 2, showing a heat exchange pipe having a plurality of fins 26 extending there- around, with solid adsorbent 18 located between the fins and further surrounded by a mesh or gaseous permeable fabric 16. The embodiment shown is only one example of such a construction, and other ways and means for designing the shape of the heat exchange pipes within the interior of the apparatus and for positioning the solid adsorbent and heat exchange communication with the pipes in such a manner that the gaseous refrigerant introduced into the vessel is readily exposed to the adsorbent may be used within the purview of the invention for achieving the desired purpose and results.

The specific solid adsorbent or adsorbents used within the apparatus will depend on the nature of the gas to be received and adsorbed. Where polar gases such as ammonia, water, sulfur dioxide, lower alkanols, alkylamines, polyamines or phosphine are to be received, preferred solid adsorbents include metal oxides, halides, carbonates, nitrates, nitrites, sulfates, oxalates, or sulfides capable of forming coordinative bonds with the refrigerant. Particularly suitable for such solid adsorbents are those in which the metal of the salt is selected from the group consisting of alkali or alkaline earth metals, transition metals, aluminum, zinc, cadmium or tin. Preferred adsorbents are capable of adsorbing gaseous refrigerant at between about -30°C and about 60°C , and can adsorb an amount of refrigerant corresponding to at least about 25% of the weight of the compound.

-5-

Of particular interest are the solid adsorbents for creating complex compounds for use with ammonia refrigeration systems. For that purpose, the solid adsorbent salts and
5 < complex compounds disclosed in U.S. Patent No. 4,848,944, are particularly desirable. Within those groups, the preferred complex compounds comprise chlorides, bromides, sulfates and chlorates of metals selected from the group consisting of alkali and alkaline earth metals, chromium, manganese, iron,
10 cobalt, nickel, cadmium, tantalum, and rhenium or double metal chloride salts. The preferred ammonia/salt complex compounds are those having an equilibrium temperature at 1 bar pressure at least 20°C higher than the ammonia equilibrium temperature, and not greater than about 160°C. Most preferred ammoniated
15 complex compounds used in the apparatus of the invention are those selected from the group consisting of $\text{CaCl}_2 \cdot 4-8 (\text{NH}_3)$, $\text{SrCl}_2 \cdot 1-8 (\text{NH}_3)$, $\text{CaBr}_2 \cdot 2-6 (\text{NH}_3)$, $\text{SrBr}_2 \cdot 0-8 (\text{NH}_3)$, and $\text{LiCl} \cdot 0-3 (\text{NH}_3)$. Mixtures of these compounds may also be used. The solid adsorbent composition may also comprise a mixture of the
20 complex compound and a solid inert material such as pumice, alumina silica, porous metal granulates, etc., especially porous and highly thermally conductive materials.

Where non-polar gases are to be adsorbed, zeolites or activated carbon may be used. Metal hydrides are useful for
25 the adsorption of hydrogen used in certain refrigeration and chemical systems known in the art.

In operating a method utilizing the apparatus of the invention for receiving a gaseous refrigerant from a refrigeration system in which the refrigerant is to be
30 withdrawn, for example, when necessary for repairs to the refrigeration system or its equipment, compressors, pumps, lines, and the like, the inlet pipe 12 and connector means 14 is connected to the refrigerant loop system at any suitable point, the heat exchange fluid inlet pipe 20 connected to a
35 source of cooling heat exchange fluid, for example, water, and the outlet pipe 30 connected to a heat exchange fluid

2101551

-6-

discharge receiving means or drain. After the cooling heat exchange fluid has been passed through the heat exchange pipes for a time sufficient to cool the solid adsorbent to the desired temperature, valve 14 or other means for communicating the refrigeration system line to the gas inlet line 12 is opened. Because the adsorption reaction of the gaseous refrigerant with the solid adsorbent is exothermic, it is necessary or preferred to maintain an approximately constant temperature of the solid adsorbent during the time that the gaseous reactant is being introduced and adsorbed. By way of example, where ammonia is to be adsorbed on a solid adsorbent, for example, SrCl_2 , cooling fluid temperature ranges of between about 0°C and about 25°C at atmospheric pressure are used. The pressure within the adsorbent vessel may be adjusted as desired using the compressor of the refrigerant system being evacuated, or using an accessory compressor as previously described, or both. It will be understood that during adsorption, higher pressures will decrease the time requirements needed for adsorbing the gaseous refrigerant. The pressure of refrigerant systems encountered are typically between about 0.2 and about 20 bars, and often around 3 bars. During the adsorption, the pressure of the refrigerant in the system is reduced as adsorption occurs.

After the refrigerant has been effectively evacuated, the valve means between the refrigeration system and the apparatus of the invention is closed, flow of heat exchange fluid into the apparatus terminated, and if desired, the apparatus may be disconnected. Thereafter, the apparatus may be stored with the refrigerant gas adsorbed on the solid adsorbent until it is desired to be recharged into the system from which it was removed or charged into another system.

When recharging of a refrigerant system is desired, the gas refrigerant inlet line 12 of the apparatus is secured into the refrigerant system line where desired, while heat exchange fluid is introduced into the heat exchange pipes of the apparatus. During this phase of using the apparatus, the

-7- 2101551

adsorbed refrigerant, is desorbed from the solid adsorbent by heating the solid adsorbent, thereby increasing the vapor pressure of the adsorbed gaseous refrigerant. If desired, the rate of the endothermic desorption reaction may be increased by reducing the pressure in the chamber of the vessel, for example, by pulling a suction on gas pipe 12 utilizing the vacuum side of an accessory compressor and/or the suction may be pulled from the compressor of the refrigeration system in which the gaseous refrigerant is being introduced. Again, constant temperatures of the heating fluid for desorbing the gaseous refrigerant is preferred. In an example using ammonia adsorbed on SrCl_2 , desorption temperatures of the heat exchange fluid and solid adsorbent between about 5°C and about 150°C and preferably about 30°C and about 125°C are suitable.

The use of a compressor for creating a suction in the line during the feedback of the gas into the refrigerant loop may not be required, although it should be understood that the lower the system pressure during desorption, the faster the rate of desorption.

It has been found utilizing apparatus according to the invention for ammonia adsorption and desorption with SrCl_2 as the solid adsorbent, depending on pressure and temperature conditions, each adsorption and desorption phase can be completed in between about 15 minutes and about 2 hours. Again, lower cooling temperatures during adsorption and higher heating temperatures during desorption accelerate the reaction to provide faster and more dramatic pull-down, or faster and higher pressure ammonia recycling, respectively. Of course, the heating and cooling of the solid adsorbent bed of the apparatus will depend on the temperature of the heat exchange fluid available at the site.

It is also within the purview of the invention that the apparatus be portable, where desired or otherwise convenient so that it may be moved to different refrigeration equipment or chemical sites for being connected to evacuate refrigeration or chemical loops as it is needed. For example,

2101551

-8-

portable systems incorporating reactors capable of adsorbing up to 1,000 lbs. of refrigerant may be especially useful. In other locations, especially where very large gas containing systems are installed, it may be preferred to permanently
5 locate such an apparatus for evacuating and recharging (recycling), whereby the apparatus of the invention need not be portable or moveable to any substantial extent. It may also be desirable to incorporate a gas detector with the system such that adsorption may be triggered by monitoring the
10 atmosphere adjacent the refrigeration system for indicating a leak and by removal of gas where such a leak is detected. Such equipment may include valves automatically actuated in response to a detected gas leak for initiating a cool water supply into the heat exchange conduit of the apparatus and for
15 opening the valve to begin withdrawing the gas, as previously described. Such equipment may be especially useful where injury to humans or expensive damage to products or materials could result in the event of significant exposure to leaking gases. These, as well as other modifications and advantages
20 of the components of the invention and uses thereof, will be evident to those skilled in the art.

WHAT IS CLAIMED:

1. Apparatus for being detachably connected to a system containing a refrigerant or chemical for selectively evacuating and charging said refrigerant or chemical in a gaseous state from and to said system, respectively, comprising:

10 a vessel having a chamber capable of maintaining a pressurized gas therein, gas inlet means for directing gaseous refrigerant or gaseous chemical to and from said chamber, and connection means for connecting said gas inlet to a refrigeration or chemical system containing said refrigerant or said chemical,

15 a solid adsorbent capable of alternatively adsorbing and desorbing said gaseous refrigerant or said gaseous chemical, and

20 a plurality of heat exchange conduits exposed in said chamber for directing heat exchange fluid therethrough, substantially all of said heat exchange conduits having said solid adsorbent secured thereon whereby said gaseous refrigerant or said gaseous chemical may be adsorbed along substantially all of said conduits, and fluid inlet and outlet means communicating exteriorly of said vessel for directing said heat exchange fluid to and from substantially all said conduits during said adsorption, and for directing a heat exchange fluid having a second temperature to and from substantially all said conduits during said desorption.

30 2. Apparatus of Claim 1 wherein said heat exchange conduits include heat exchange surfaces extending from the exterior of said conduits in said chamber.

3. Apparatus of Claim 2 wherein said heat exchange surfaces comprise fins.

35 4. Apparatus of Claim 2 wherein said solid adsorbent is secured adjacent the exterior of said conduits in contact with said heat exchange surfaces.

5. Apparatus of Claim 1 for receiving and dispensing a polar gaseous refrigerant wherein said solid adsorbent is a complex compound of said polar refrigerant and a metal salt

-10-

capable of alternately adsorbing and desorbing said gaseous refrigerant, said salt comprising:

5 a metal halide, oxide, sulfate, sulfite, nitrate, nitrite or oxalate in which the metal is an alkali metal, alkaline earth metal, transition metal, aluminum, or zinc;

a double metal salt in which the two metals are selected from strontium, sodium, aluminum, silver, gold, calcium, magnesium and cobalt;

10 ammonium chloride; or

a double metal salt in which one metal is an alkali or alkaline earth metal.

6. Apparatus of Claim 5 wherein said solid adsorbent is capable of adsorbing said gaseous refrigerant at a temperature of between about -30°C and about 60°C.

7. Apparatus of Claim 1 wherein said gaseous refrigerant is ammonia and said solid adsorbent comprises CaCl_2 , SrCl_2 , LiCl , CaBr_2 , or SrBr_2 , and mixtures thereof.

8. Apparatus of Claim 1 wherein said gaseous refrigerant is ammonia and said solid adsorbent is a complex compound of ammonia and a metal salt having an equilibrium temperature at 1 bar pressure at least 20°C higher than the ammonia equilibrium temperature, and not greater than about 160°C.

9. Apparatus of Claim 1 including a porous, inert solid material mixed with said solid adsorbent.

10. Apparatus of claim 1 wherein said gas comprises a non-polar gas and said solid adsorbent comprises zeolite or activated carbon.

11. Apparatus of claim 1 wherein said gas comprises hydrogen and said solid adsorbent comprises a metal hydride.

12. Apparatus of Claim 1 wherein heat exchange fluid is at a first temperature for adsorption and at a second temperature for desorption.

13. Apparatus for receiving and dispensing ammonia from a system containing said ammonia comprising:

a vessel having a pressure sealed chamber and gas inlet means for being connected to said system containing said ammonia,

5 a solid adsorbent salt capable of forming a complex coordinated compound with said ammonia, which compound is capable of adsorbing at least 25% ammonia, by weight, of said compound, and

10 heat exchange means exposed in said sealed chamber comprising a plurality of heat exchange conduit, substantially all of said conduits having said solid absorbent secured thereon thereby said ammonia may be absorbed along substantially all of said conduits, and having a fluid inlet and fluid outlet, said fluid inlet including means for being connected to a fluid supply source for directing a heat
15 exchange fluid through substantially all said conduits for adsorbing said ammonia, and for directing a heat exchange fluid through substantially all of said conduits for desorbing said ammonia.

14. Apparatus of Claim 13 wherein said salt comprises a
20 metal halide, oxide, sulfate, sulfite, nitrate, nitrite or oxalate in which the metal is an alkali metal, alkaline earth metal, transition metal, aluminum, or zinc;

a double metal salt in which the two metals are selected from strontium, sodium, aluminum, silver, gold,
25 calcium, magnesium and cobalt;

ammonium chloride; and

a double metal salt in which one metal is an alkali or alkaline earth metal.

15. Apparatus of Claim 13 wherein said salt comprises
30 CaCl_2 , SrCl_2 , LiCl , CaBr_2 or SrBr_2 , and mixtures thereof.

16. Apparatus of Claim 13 wherein said vessel is capable of being transported from one location to another and said sealed chamber is capable of holding up to about 1,000 lbs. ammonia.

35 17. Apparatus of Claim 14 wherein said salt comprises SrCl_2 and said complex coordinated compound comprises $\text{SrCl}_2 \cdot \text{X NH}_3$, wherein X is between 1 and 8.

-12-

18. Apparatus of Claim 13 wherein said heat exchange conduits comprises finned conduits.

19. Apparatus of Claim 13 wherein said heat exchange means includes inlet manifold means for distributing water from said fluid inlet to said heat exchange conduits and outlet manifold means for directing water from said heat exchange conduits to said outlet.

20. Apparatus of Claim 13 including a porous, inert solid material mixed with said solid adsorbent.

21. Apparatus of Claim 13 including valve means cooperating with said gas inlet means for selectively directing ammonia to and from said sealed chamber.

22. Apparatus of Claim 13, wherein said heat exchange fluid for adsorbing ammonia has a relatively low temperature, and said heat exchange fluid for desorbing ammonia has a relatively high temperature.

23. A method of removing a gas from a refrigeration or chemical system pressurized with said gas comprising:

connecting the gas inlet means of an apparatus of Claim 1 to a gas line of said system, connecting the fluid inlet means of said apparatus of Claim 1 to a source of cooling fluid having a temperature between about -30°C and about 60°C, concurrently introducing said gas into said chamber while directing said cooling fluid through substantially all of said heat exchange conduits, and adsorbing said gas on the solid adsorbent in an exothermic adsorption reaction while continuing to direct cooling fluid through said heat exchange conduits.

24. The method of Claim 23 including closing the valved gas inlet means to terminate further introduction of said gas into said chamber from said refrigeration or chemical system, terminating the flow of cooling fluid into said heat exchange conduits, and thereafter selectively charging a refrigeration system with said gas comprising connecting the fluid inlet means of said apparatus to a source of heating fluid having a

-13-

temperature sufficient to induce desorption of said gas from said solid adsorbent, opening the valved gas inlet means, and desorbing said gas from said solid adsorbent in an endothermic reaction while continuing to direct heating fluid through substantially all of said heat exchange conduits.

25. A method of removing ammonia refrigerant from a refrigeration system comprising:

feeding ammonia from said refrigeration system to the sealed chamber of an apparatus of Claim 13 and concurrently supplying cooling fluid at a temperature of between about -30°C and about 60°C through substantially all of the heat exchange conduits of said apparatus whereby said ammonia is adsorbed on said salt in an exothermic reaction,

continuing to supply cooling fluid through said heat exchange conduits while feeding ammonia into said pressure sealed chamber, and

selectively terminating said ammonia removal by disconnecting communication between said sealed chamber and said refrigeration system and terminating supply of cooling fluid through said heat exchange conduits of said apparatus.

26. A method of Claim 25 wherein said salt comprises SrCl_2 and wherein said ammonia is fed into said sealed chamber at a pressure of between about 0.2 and about 20 atmospheres, and water is supplied to said heat exchange conduits at a temperature of between about 0°C and about 25°C during said adsorption.

27. A method of supplying polar refrigerant to a refrigeration system comprising:

providing an apparatus of Claim 5 having polar refrigerant adsorbed on said salt and capable of being desorbed therefrom,

connecting said gas inlet means of said apparatus with said refrigeration system, desorbing polar

refrigerant from salt and supplying said desorbed polar refrigerant to said refrigeration system.

28. A method of Claim 27 wherein said polar
5 refrigerant is desorbed from said salt using compressor suction.

29. A method of Claim 27 wherein ammonia is desorbed from said salt by supplying a heating fluid through said heat exchange conduits at a temperature of
10 between about 5°C and about 150°C during said desorption.

30. A method of Claim 29 wherein said salt in said apparatus comprises SrCl_2 and wherein said ammonia is desorbed by supplying water or steam through said heat exchange conduits at a temperature of between about 5°C
15 and about 150°C.

31. Apparatus of Claim 30 wherein heat exchange fluid for adsorption is at a first temperature and for desorption is at a second temperture.

2101551

1/1

FIG. 1

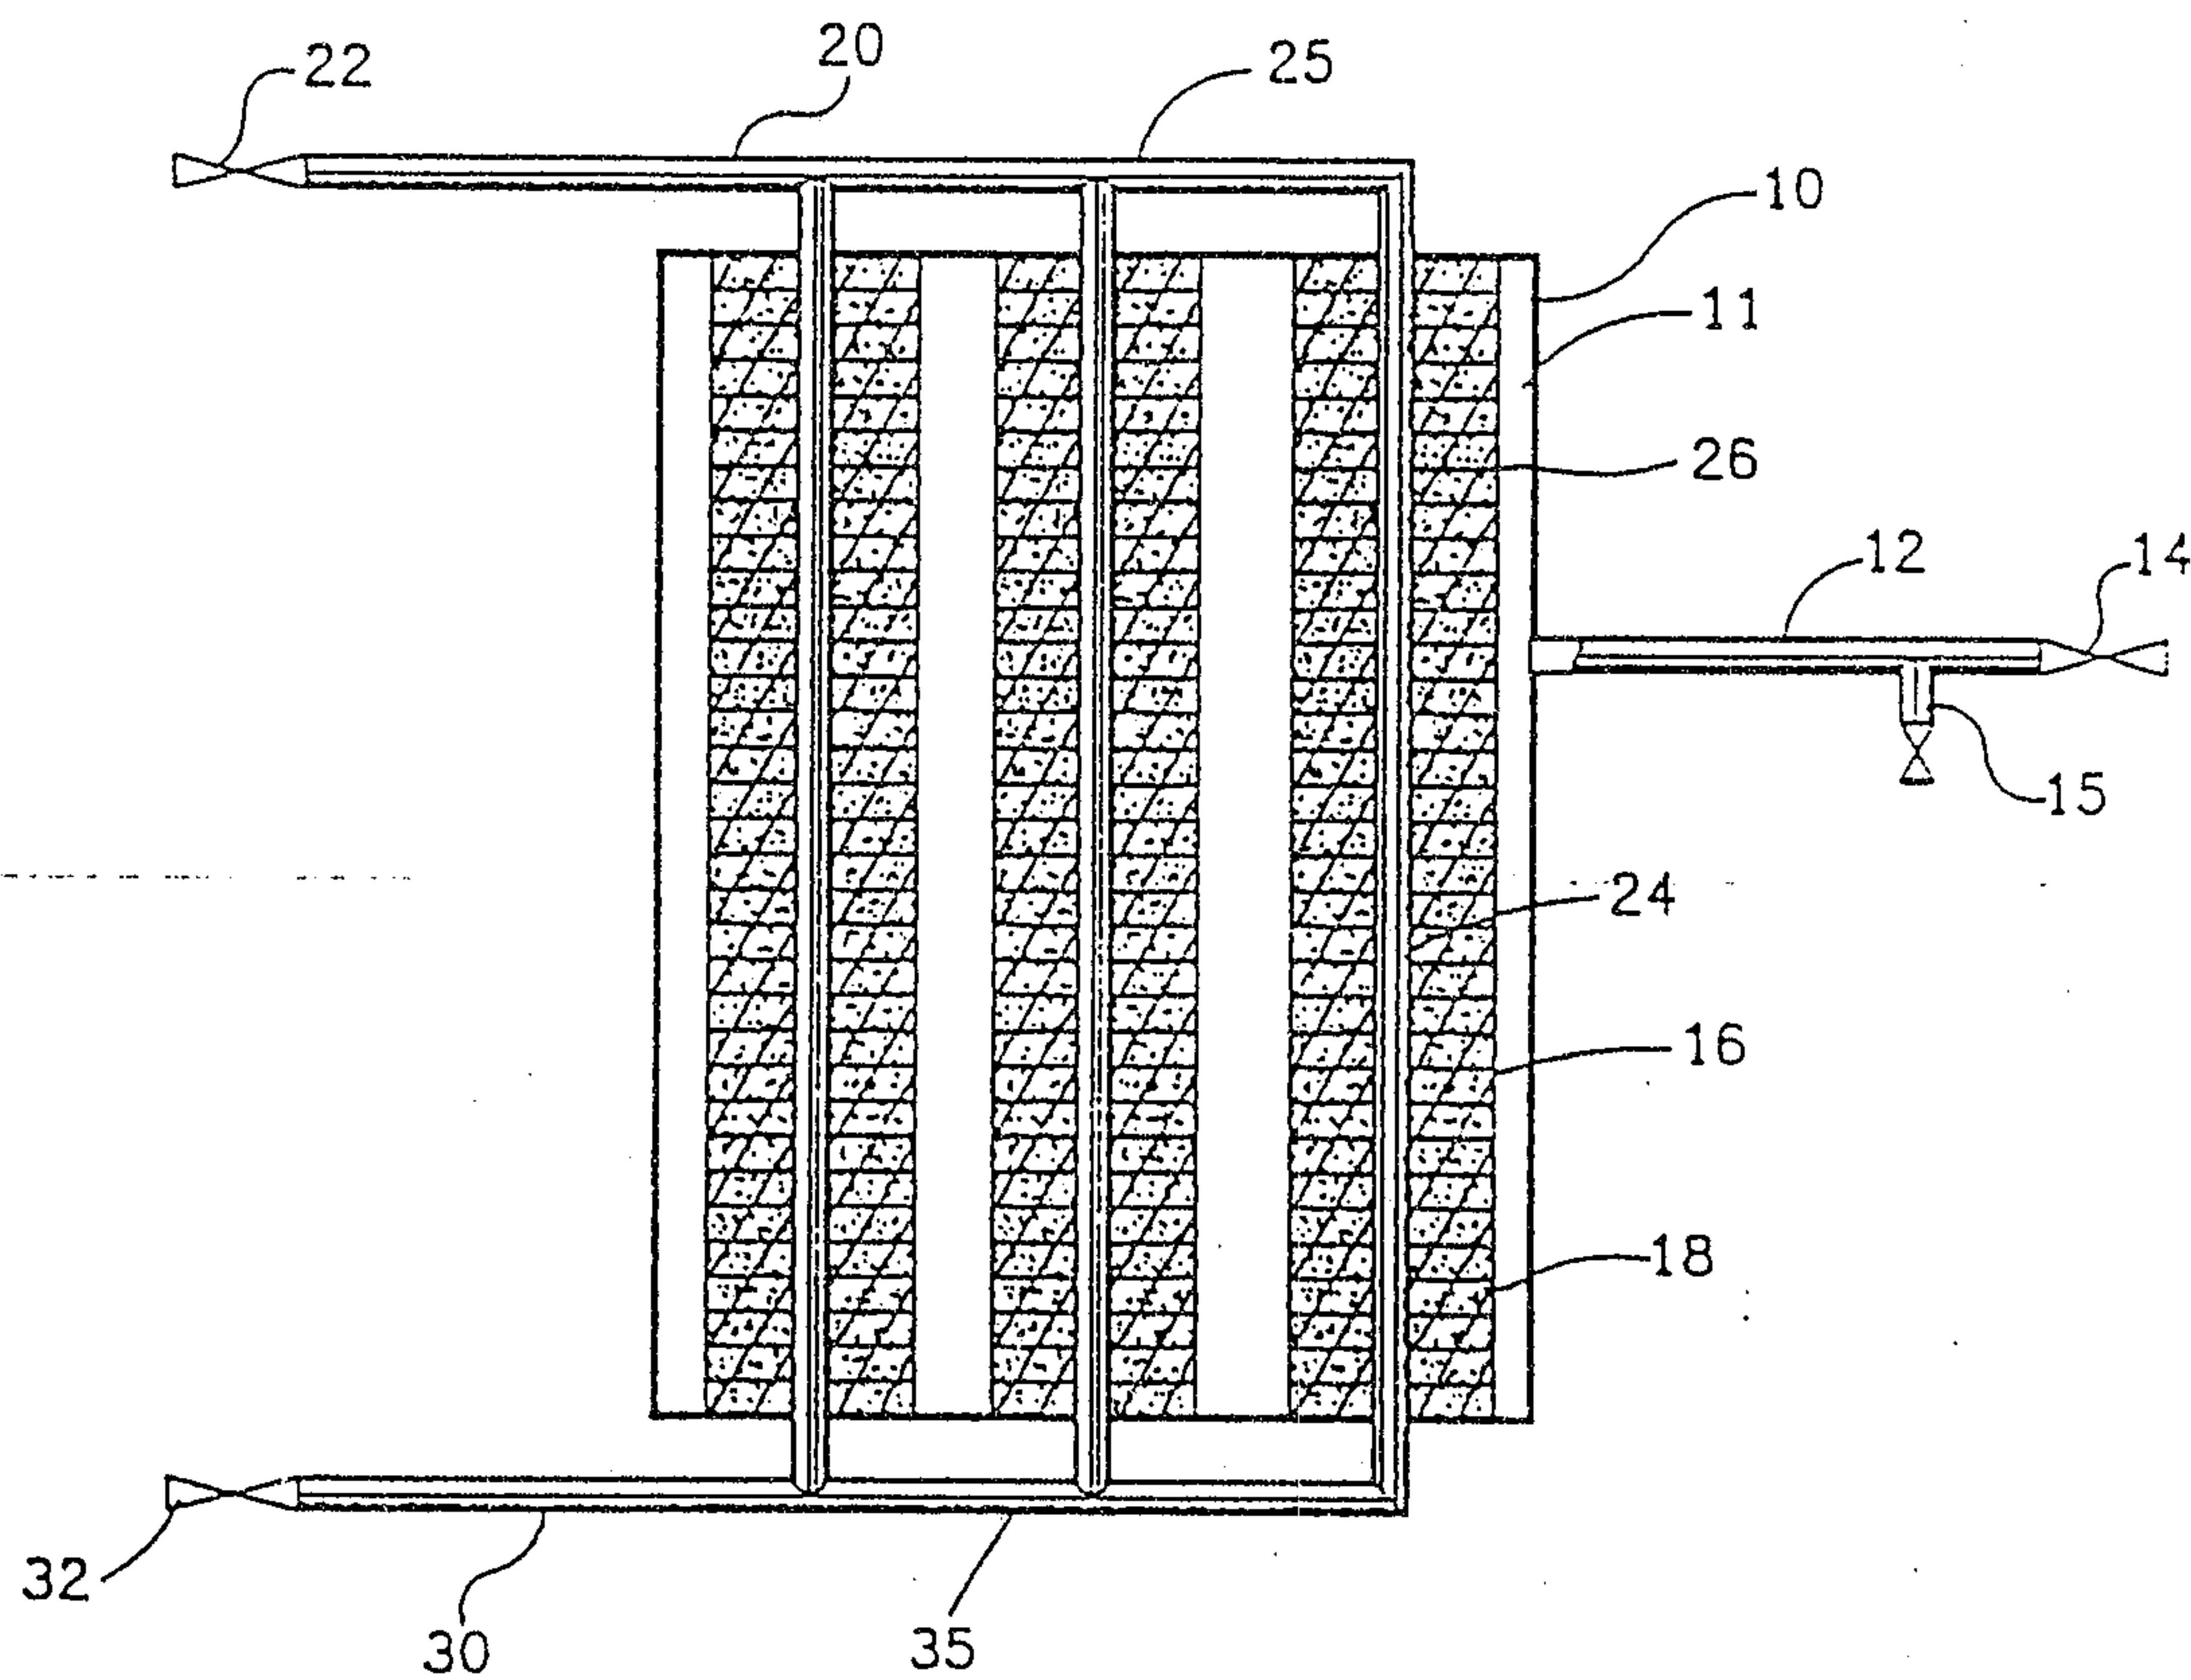


FIG. 2

