

(19)



(11)

EP 3 236 143 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.03.2019 Bulletin 2019/11

(51) Int Cl.:
F21V 21/26^(2006.01)

(21) Application number: **17165928.7**

(22) Date of filing: **11.04.2017**

(54) ARTICULATED STRUCTURE

GELENKSTRUKTUR

STRUCTURE ARTICULÉE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **20.04.2016 IT UA20162755**

(43) Date of publication of application:
25.10.2017 Bulletin 2017/43

(73) Proprietor: **Viabizzuno S.r.L.
40010 Bentivoglio (Bologna) (IT)**

(72) Inventor: **NANNI, Mario
40125 BOLOGNA (IT)**

(74) Representative: **Firmati, Leonardo
Bugnion S.p.A.
Via di Corticella, 87
40128 Bologna (IT)**

(56) References cited:
**DE-B- 1 090 759 DE-C- 334 417
US-A1- 2006 096 444**

EP 3 236 143 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention relates to an articulated structure according to claim 1 and a method of assembling an articulated structure according to claim 12.

[0002] More specifically, this invention relates to an articulated structure equipped with a friction member.

[0003] Yet more specifically, this invention relates to an articulated structure equipped with a friction member and integrated in lighting structures, such as spotlights and lighting projectors.

[0004] In the production of a lighting system which comprise a multiplicity of spotlights or the like, for example inside a store or a display area, the spotlights are usually inserted in rectilinear guides which simplify both the positioning and the powering. Once positioned, the spotlights must then be oriented to direct the light beam in the desired direction.

[0005] In order to allow this orientation, the spotlights are usually connected to the guide by supports, such as arms or articulated arms.

[0006] The supports, although they provide a certain versatility in the orientation of the spotlights, are not free from drawbacks.

[0007] A first drawback consists in the fact that many of these supports have friction connections and joints for friction which must therefore be loosened before the adjustment and subsequently tightened once the desired configuration has been identified.

[0008] Moreover, the mechanical means designed for the above-mentioned tightening by friction are often bulky and not always pleasing in appearance.

[0009] A further drawback connected to the use of the supports of known type is due to the fact that sometimes the spotlight is not easily accessible, thereby making the above-mentioned loosening and tightening operations even more difficult.

[0010] Moreover, the supports of known type are often mechanically complex, costly and difficult to manufacture.

[0011] An articulated structure of the known type is disclosed in document DE 334 417.

[0012] The aim of this invention is to provide an articulated model which is able to overcome the drawbacks of the prior art and which is at the same time practical to use and simple to make.

[0013] A further aim of this invention is to provide an articulated structure which is easy to adjust and which is stable in its configuration.

[0014] A further aim of this invention is to provide an articulated structure which is inexpensive to make.

[0015] Another aim of the invention is to provide a method for assembling an articulated structure which is simple and practical to implement.

[0016] The technical features of the invention, with reference to the above aims, are clearly described in the claims below and its advantages are more apparent from the detailed description which follows, with reference to

the accompanying drawings which illustrate a preferred, non-limiting embodiment of the invention by way of example and in which:

- 5 - Figure 1 is a schematic side elevation view of a preferred embodiment of an articulated structure according to this invention;
- Figure 2 is an exploded schematic view of the articulated structure of Figure 1;
- 10 - Figure 3 is schematic rear elevation view of the articulated structure of Figure 1;
- Figure 4 is a cross section view through the line IV-IV of Figure 3;
- 15 - Figure 5 is a partly exploded schematic view of the articulated structure of the preceding drawings;
- Figure 6 is a schematic perspective view of a detail of the articulated structure of the preceding drawings.

20 **[0017]** As illustrated in Figure 1, the numeral 1 denotes in its entirety an articulated structure made in accordance with this invention. The articulated structure 1 according to the invention is advantageously used to support lighting devices, not illustrated, such as spotlights and the like.

25 **[0018]** With reference to Figures 1 and 2, the articulated structure 1 comprises a first element 2 with an elongate shape and a second element 3 also with an elongate shape.

30 **[0019]** The first and second elements 2, 3 are advantageously made of sheet metal.

[0020] According to different embodiments of the invention, not illustrated, the elements 2, 3 are made by casting, in configurations which are also not flat.

35 **[0021]** The two elements 2, 3 shown in the accompanying drawings are of equal length and substantially coincident.

[0022] Advantageously, the first and second elements 2, 3 are equal and interchangeable.

40 **[0023]** According to different embodiments of the invention, not illustrated, the elements 2, 3 have different lengths.

[0024] The above-mentioned first element 2 and second element 3 are pivoted to each other by a pin 4, shown in Figure 4.

45 **[0025]** The pivot pin 4 makes the first and second elements 2, 3 movable relative to each other in a tilting fashion about a predetermined axis of rotation A, coinciding with a central axis of the pin 4.

50 **[0026]** As shown in Figure 2, at the relative longitudinal ends close to the pivot, the two first and second elements 2, 3 have respective circular through holes 20, 30 designed to allow the insertion of the pin 4.

[0027] A respective rectangular cavity 21, 31, extending in a radial direction, originates from each of the holes 20, 30.

55 **[0028]** As illustrated in Figure 2, the articulated structure 1 comprises, operatively positioned between the two first and second elements 2, 3, a first friction member 5

with a circular extension and a second friction member 6 with a circular extension.

[0029] With reference in particular to Figure 6, the first friction member 5 comprises an annular C-shaped wall 7. In other words, the annular wall 7 has the form of a cylindrical ring without an axial extension portion.

[0030] The first friction member 5 also comprises a tab 8 protruding in an axial direction from the annular wall 7 and integral with the latter.

[0031] The tab 8, as clearly shown in Figures 2 and 3, is configured to be inserted in the respective cavity 21 which is exactly shaped to match, for making the first friction member 5 integral with the first element 2 relative to the rotation of the latter about the axis A.

[0032] With reference in particular to Figures 2, 4 and 6, the second friction member 6 comprises two concentric annular walls 9, 10, respectively smaller and larger, both C-shaped.

[0033] Exactly as described above with reference to the first friction member 5, the two smaller and larger annular walls 9, 10 both have the shape of a cylindrical ring without a portion with axial extension.

[0034] The second friction member 6 also comprises a tab 11 protruding in an axial direction from the annular walls 9, 10 and integral with them.

[0035] More specifically, the tab 11 rigidly connects the two smaller and larger annular walls 9, 10, guaranteeing also their concentricity.

[0036] The tab 11 is configured to be inserted in the respective cavity 31 which is exactly shaped to match, for making the section friction member 6 integral with the second element 3 relative to the rotation of the latter about the axis A.

[0037] The above-mentioned first and second friction members 5, 6 interpenetrate with each other in the direction of the predetermined axis of rotation A.

[0038] As illustrated in Figure 5, the annular wall 7 of the first friction member 5 is inserted between the two smaller and larger annular concentric walls 9, 10 of the second member 6, in a concentric fashion.

[0039] In short, due to the rotation restriction by the tabs 8, 11, a reciprocal rotation of the elements 2, 3 about the predetermined axis A will result in a reciprocal rotation also of the respective first and second friction members 5, 6.

[0040] Under these circumstances, the mutual rubbing of the cylindrical surfaces of the annular walls 7, 9, 10 facing each other generates respective friction forces which therefore tend to obstruct the above-mentioned rotation.

[0041] The expression "cylindrical surfaces" is used to mean the approximately cylindrical inner and outer faces (apart from, that is, the missing portion) of the annular walls 7, 9, 10 of the friction members 5, 6.

[0042] In use, for the purposes of assembling the articulated structure 1, use is made of a rivet 12 for clamping all the components of the articulated structure 1 in a pack.

[0043] Advantageously, the rivet 12 is of the expansion

type and comprises a male element 13 and a female element 14, both these male and female elements 13, 14 having respective heads 13a, 14a.

[0044] The rivet 12 defines, with its elements 13, 14, the above-mentioned pivot pin 4.

[0045] More specifically, as illustrated in Figures 2 and 4, the two first and second friction members 5, 6 interpenetrate with each other in such a way that their axial dimension reduces to that of only one of the two, after which the respective tabs 8, 11 are inserted in respective cavities 21, 31 of the first and second elements 2, 3, located with the holes 20, 30 coaxial with each other and the annular walls 7, 9, 10.

[0046] Two Belleville springs 15, 16 are positioned outside the first and second elements 2, 3, coaxial with the holes 20, 30.

[0047] The Belleville springs 15, 16 usefully perform the purpose of eliminating any possible axial clearances in the assembly of the articulated structure 1.

[0048] The above-mentioned Belleville springs 15, 16 are interposed between a respective head 13a, 14a of the rivet 12 and the outer surfaces of the first and second elements 2 and 3.

[0049] Lastly, as clearly illustrated in Figure 4, the two elements 13, 14 which make up the rivet 12, are positioned with the male element 13 inserted inside female element 14.

[0050] The female element 14 is positioned with a relative outer cylindrical surface facing an inner cylindrical surface of the smaller annular wall 9 of the second friction member 6.

[0051] The tightening in a pack by the rivet 12 is advantageously actuated by a compression of the two elements 13, 14 in the direction of the axis of rotation A, as indicated by the arrows F in Figure 2; this compression is achieved with a suitable press not illustrated.

[0052] This compression, on the basis of the operating principle of the rivet 12, determines a radial expansion of the rivet 12, the expansion of which is transmitted to the adjacent smaller annular wall 9.

[0053] Thanks to the relative "C" shape, the smaller annular wall 9 acts like a spring, deforming elastically when opening and transmitting in turn the deformation to the adjacent annular wall 7 of the first friction member 5. Similarly, the annular wall 7 of the first friction member 5 deforms elastically and transmits the relative deformation to the larger annular wall 10 which in turn will undergo any elastic deformation.

[0054] The described succession of deformations therefore brings the surfaces in contact with the annular walls 7, 9, 10 to generate a mutual rubbing together, at a rotation of the elements 2, 3, which generates respective friction forces resulting from the above-mentioned rotation.

[0055] The above-mentioned first and second friction members 5, 6 thus define, for the articulated structure 1, respective friction means 17 which are operatively positioned between the first and second elements 2, 3 to ob-

struct the reciprocal rotation.

[0056] The above-mentioned rivet 12, with its male and female elements 13, 14 and Belleville springs 15, 16 define, in their entirety for the articulated structure 1, respective means 18 for clamping in a pack, in the direction of the predetermined axis of rotation A, the first and second elements 2, 3 and the first and second friction members 5, 6 interposed between them. The invention also relates to a method for assembling an articulated structure and comprises a plurality of steps.

[0057] A first step consists in preparing a first element 2 and a second element 3 with an elongate shape which are pivoted to each other by means of a pin 4, to make the first and the second elements 2, 3 movable relative to each other in tilting fashion around a predetermined axis of rotation A.

[0058] A subsequent step comprises preparing a first friction member 5 with a circular extension, which is integral in rotation with one of the above-mentioned first and second elements 2, 3, and a second friction member 6 with a circular extension, which is integral in rotation with the other of the above-mentioned first and second elements 2, 3, with the first and second friction members 5, 6 interpenetrating with each other in the direction of the predetermined axis of rotation A.

[0059] The method according to the invention therefore requires positioning an expansion rivet 12, passing centrally inside the first and second friction members 5, 6, and pressing the expansion rivet 12 to close the articulated structure 1 tightly in a pack and to radially force the friction members 5, 6 so as to increase the friction force generated on respective surfaces in mutual contact.

[0060] Advantageously, the friction members 5, 6 are made by casting, and are preferably made of zama.

[0061] This invention achieves the preset aims and brings important advantages. The articulated structure 1 according to the invention is exceptionally compact at the pivot and the friction members have a limited size. Moreover, the articulated structure 1 does not require any adjustment in use of the friction force which is determined in advance also as a function of the diameter of the rivet which can also vary as a function of the load which the articulated structure 1 is designed to support.

[0062] Experimentally, by means of special duration tests, it has been seen that the friction action between the friction members 5, 6, thanks to the forced clamping actuated by means of expansion rivets, is particularly durable over time.

Claims

1. An articulated structure comprising

- a first element (2) and
- a second element (3), which are pivoted to each other by means of a pin (4) to make the first and the second elements (2, 3) movable relative to

each other in tilting fashion around a predetermined axis of rotation (A),

- friction means (17), which are operatively positioned between the first and second elements (2, 3) to prevent the reciprocal rotation of them, the friction means (17) comprising a first friction member (5) with a circular extension, which is integral in rotation with one of the first (2) and second (3) elements, and a second friction member (6) with a circular extension, which is integral in rotation with the other of the first (2) and second (3) elements, the first and second friction members (5, 6) being at least partly fitted together in the direction of the predetermined axis of rotation (A) and configured to have respective cylindrical portions in mutual contact, **characterised in that** the first friction member (5) comprises an annular wall (7) and the second friction member (6) comprises two annular walls (9, 10), respectively small and large, which are concentric to each other, the annular wall (7) of the first member (5) being configured to be at least partly inserted between the two concentric annular walls (9, 10) of the second element (6), concentrically to them.

2. The articulated structure according to claim 1, **characterised in that** the first and second friction members (5, 6) are interposed between the first and second elements (2, 3) in the direction of the predetermined axis of rotation (A).
3. The articulated structure according to claim 1 or 2, **characterised in that** the annular walls (7, 9, 10) of the first and second friction members (5, 6) are C-shaped.
4. The articulated structure according to any one of claims 1 to 3, **characterised in that** the first friction member (5) comprises a tab (8) protruding in an axial direction from the space of the annular wall (7), which is integral with it and extending radially, the tab (8) being configured to be inserted into a relative matching cavity (21) made in the first element (2) to make the first friction member (5) integral in rotation with the first element (2).
5. The articulated structure according to any one of the preceding claims, **characterised in that** the second friction member (6) comprises a tab (11) protruding in an axial direction from the space of the of the small and large annular walls (9, 10), which is connected to both of the small and large annular walls (9, 10) and extending radially, the tab (11) being configured to be inserted into a relative matching cavity (31) made in the second element (3) to make the second friction member (6) integral in rotation with the second element (3).

6. The articulated structure according to any one of the preceding claims, **characterised in that** it comprises means (18) for closing the first and second elements (2, 3) and the first and second friction members (5, 6) interposed between them tightly in a pack, in the direction of the predetermined axis of rotation (A). 5
7. The articulated structure according to claim 6 when it depends on claim 3, **characterised in that** the closing means (18) comprise an expansion rivet (12), which passes through the inside of the small annular wall (9) of the second friction member (6) and is configured to radially force the small annular wall (9). 10
8. The articulated structure according to claim 7, **characterised in that** the closing means (18) comprise at least one Belleville spring (15, 16) interposed between a head (13a, 14a) of the rivet (12) and one of the first and second elements (2, 3). 15
9. The articulated structure according to claim 7 or 8, **characterised in that** the rivet (12) comprises a male element (13) and a female element (14), both the male and female elements (13, 14) having respective heads (13a, 14a). 20
10. The articulated structure according to any of claims 7 to 9, **characterised in that** the rivet (12) defines the fulcrum pin (4) of the first and second elements (2, 3). 25
11. The articulated structure according to any one of the preceding claims, **characterised in that** the first and second elements (2, 3) have an elongate shape. 30
12. A method of assembling an articulated structure comprising the steps of: 35
- preparing a first element (2) and a second element (3), which are pivoted to each other by means of a pin (4) to make the first and the second elements (2, 3) movable relative to each other in tilting fashion around a predetermined axis of rotation (A), 40
 - preparing a first friction member (5) with a circular extension, which is integral in rotation with one of the first and second elements (2, 3), and a second friction member (6) with a circular extension, which is integral in rotation with the other of the first and second elements (2, 3), the first and second friction members (5, 6) being at least partly fitted together in the direction of the predetermined axis of rotation (A), 45
 - positioning an expansion rivet (12) passing centrally through the inside of the friction members (5, 6) with a circular extension, 50
 - pressing the expansion rivet (12) to close the 55

articulated structure tightly in a pack and to radially force the friction members (5, 6) so as to increase the friction force generated on respective surfaces in mutual contact.

Patentansprüche

1. Gelenkstruktur, umfassend

- ein erstes Element (2) und
- ein zweites Element (3), die mittels eines Zapfens (4) schwenkbar miteinander verbunden sind, um dafür zu sorgen, dass das erste und das zweite Element (2, 3) relativ zueinander kippbar rund um eine vorgegebene Rotationsachse (A) bewegbar sind;
- Reibungsmittel (17), die betriebswirksam zwischen dem ersten und dem zweiten Element (2, 3) positioniert sind, um deren gegenseitige Drehung zu verhindern, wobei die Reibungsmittel (17) ein erstes Reibungsglied (5) mit einer kreisförmigen Ausdehnung umfassen, das in Drehung fest entweder mit dem ersten (2) oder dem zweiten (3) Element verbunden ist, sowie ein zweites Reibungsglied (6) mit einer kreisförmigen Ausdehnung, das in Drehung fest mit dem anderen entweder ersten (2) oder zweiten (3) Element verbunden ist, wobei das erste und das zweite Reibungsglied (5, 6) mindestens teilweise in der Richtung der vorgegebenen Rotationsachse (A) zusammengefügt und ausgelegt sind, um jeweilige zylindrische Abschnitte in gegenseitigem Kontakt aufzuweisen, **dadurch gekennzeichnet, dass** das erste Reibungsglied (5) eine ringförmige Wand (7) umfasst und das zweite Reibungsglied (6) zwei ringförmige Wände (9, 10) umfasst, jeweils klein bzw. groß, die konzentrisch zueinander angeordnet sind, wobei die ringförmige Wand (7) des ersten Glieds (5) ausgelegt ist, um mindestens teilweise zwischen die zwei konzentrischen ringförmigen Wände (9, 10) des zweiten Elements (6) konzentrisch zu diesen eingesetzt zu werden.

2. Gelenkstruktur nach Anspruch 1, **dadurch gekennzeichnet, dass** das erste und das zweite Reibungsglied (5, 6) zwischen dem ersten und dem zweiten Element (2, 3) in Richtung der vorgegebenen Rotationsachse (A) eingesetzt sind.

3. Gelenkstruktur nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** die ringförmigen Wände (7, 9, 10) des ersten und des zweiten Reibungsglieds (5, 6) C-förmig sind.

4. Gelenkstruktur nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** das erste Rei-

bungsglied (5) eine Lasche (8) umfasst, die in einer axialen Richtung vom Bereich der ringförmigen Wand (7) hervorsteht, die fest mit ihr verbunden ist und sich radial erstreckt, wobei die Lasche (8) ausgelegt ist, um in einen jeweiligen passenden Hohlraum (21) eingefügt zu werden, der im ersten Element (2) ausgebildet ist, damit das erste Reibungsglied (5) in Drehung fest mit dem ersten Element (2) verbunden wird.

5. Gelenkstruktur nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** das zweite Reibungsglied (6) eine Lasche (11) umfasst, die in einer axialen Richtung vom Bereich der kleinen und der großen ringförmigen Wand (9, 10) hervorsteht, die fest mit sowohl der kleinen als auch der großen ringförmigen Wand (9, 10) verbunden ist und sich radial erstreckt, wobei die Lasche (11) ausgelegt ist, um in einen jeweiligen passenden Hohlraum (31) eingefügt zu werden, der im zweiten Element (3) ausgebildet ist, damit das zweite Reibungsglied (6) in Drehung fest mit dem zweiten Element (3) verbunden wird.
6. Gelenkstruktur nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** sie Mittel (18) zum Schließen des ersten und des zweiten Elements (2, 3) und des ersten und des zweiten Reibungsglieds (5, 6) umfasst, eingesetzt zwischen diesen fest in einem Paket in Richtung der vorgegebenen Rotationsachse (A).
7. Gelenkstruktur nach Anspruch 6, wenn dieser von Anspruch 3 abhängt, **dadurch gekennzeichnet, dass** die Mittel zum Verschließen (18) eine Spreizniete (12) umfassen, die durch die Innenseite der kleinen ringförmigen Wand (9) des zweiten Reibungsglieds (6) führt und ausgelegt ist, um die kleine ringförmige Wand (9) radial zu forcieren.
8. Gelenkstruktur nach Anspruch 7, **dadurch gekennzeichnet, dass** die Mittel zum Verschließen (18) mindestens eine Tellerfeder (15, 16) umfassen, eingesetzt zwischen einem Kopf (13a, 14) der Niete (12) und entweder dem ersten oder dem zweiten Element (2, 3).
9. Gelenkstruktur nach Anspruch 7 oder 8, **dadurch gekennzeichnet, dass** die Niete (12) ein Federelement (13) und ein Nutelement (14) umfasst, wobei sowohl das Feder- als auch das Nutelement (13, 14) jeweilige Köpfe (13a, 14a) aufweisen.
10. Gelenkstruktur nach einem der Ansprüche 7 bis 9, **dadurch gekennzeichnet, dass** die Niete (12) den Drehzapfen (4) des ersten und des zweiten Elements (2, 3) definiert.

11. Gelenkstruktur nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** das erste und das zweite Element (2, 3) eine verlängerte Form aufweisen.

12. Verfahren zur Montage einer Gelenkstruktur, umfassend die folgenden Schritte:

- Vorbereiten eines ersten Elements (2) und eines zweiten Elements (3), die mittels eines Zapfens (4) schwenkbar miteinander verbunden sind, um dafür zu sorgen, dass das erste und das zweite Element (2, 3) relativ zueinander kippbar rund um eine vorgegebene Rotationsachse (A) bewegbar sind;
- Vorbereiten eines ersten Reibungsglieds (5) mit einer kreisförmigen Ausdehnung, das in Drehung fest entweder mit dem ersten oder dem zweiten Element (2, 3) verbunden ist, sowie eines zweiten Reibungsglieds (6) mit einer kreisförmigen Ausdehnung, das in Drehung fest mit dem anderen entweder ersten oder zweiten Element (2, 3) verbunden ist, wobei das erste und das zweite Reibungsglied (5, 6) mindestens teilweise in Richtung der vorgegebenen Rotationsachse (A) zusammengefügt sind;
- Positionieren einer Spreizniete (12), die mittig durch die Innenseite der Reibungsglieder (5, 6) mit einer kreisförmigen Ausdehnung führt;
- Pressen der Spreizniete (12), um die Gelenkstruktur fest in einem Paket zu verschließen und um die Reibungsglieder (5, 6) radial zu forcieren, sodass die auf die jeweiligen Oberflächen in gegenseitigem Kontakt wirkende erzeugte Reibungskraft erhöht wird.

Revendications

1. Structure articulée comprenant

- un premier élément (2) et
- un second élément (3), pouvant pivoter réciproquement au moyen d'une cheville (4) pour rendre les premier et second éléments (2, 3) mobiles respectivement de façon basculante autour d'un axe de rotation (A) prédéterminé,
- des moyens de frottement (17) étant fonctionnellement positionnés entre les premier et second éléments (2, 3) pour empêcher leur rotation réciproque, les moyens de frottement (17) comprenant un premier organe de frottement (5) doté d'une extension circulaire étant solidaire en rotation de l'un des premier (2) et second (3) éléments, et un second organe de frottement (6) doté d'une extension circulaire étant solidaire en rotation avec l'autre des premier (2) et second (3) éléments, les premier et second orga-

- nes de frottement (5, 6) étant au moins partiellement montés ensemble dans la direction de l'axe prédéterminé de rotation (A) et configurés pour avoir des parties cylindriques respectives en contact mutuel, **caractérisée en ce que** le premier organe de frottement (5) comprend une cloison annulaire (7) et le second organe de frottement (6) comprend deux cloisons annulaires (9, 10), respectivement petite et grande, étant concentriques réciproquement, la cloison annulaire (7) du premier organe (5) étant configurée pour être au moins en partie introduite entre les deux cloisons annulaires concentriques (9, 10) du second élément (6), de façon concentrique à celles-ci.
2. Structure articulée selon la revendication 1, **caractérisée en ce que** les premier et second organes de frottement (5, 6) sont interposés entre les premier et second éléments (2, 3) dans la direction de l'axe prédéterminé de rotation (A).
 3. Structure articulée selon la revendication 1 ou 2, **caractérisée en ce que** les cloisons annulaires (7, 9, 10) des premier et second organes de frottement (5, 6) sont en forme de « C ».
 4. Structure articulée selon l'une quelconque des revendications de 1 à 3, **caractérisée en ce que** le premier organe de frottement (5) comprend une languette (8), dépassant dans une direction axiale de l'espace de la cloison annulaire (7), étant solidaire de celle-ci et se prolongeant radialement, la languette (8) étant configurée pour être introduite dans une cavité correspondante (21) relative réalisée dans le premier élément (2) pour rendre le premier organe de frottement (5) solidaire en rotation du premier élément (2).
 5. Structure articulée selon l'une quelconque des revendications précédente, **caractérisée en ce que** le second organe de frottement (6) comprend une languette (11), dépassant dans une direction axiale de l'espace des petite et grande cloisons annulaires (9, 10), étant reliée aux petite et grande cloisons annulaires (9, 10) et se prolongeant radialement, la languette (11) étant configurée pour être introduite dans une cavité correspondante (31) relative réalisée dans le second élément (3) pour rendre le second organe de frottement (6) solidaire en rotation du second élément (3).
 6. Structure articulée selon l'une quelconque des revendications précédentes, **caractérisée en ce qu'elle** comprend des moyens (18) de fermeture des premier et second éléments (2, 3) et des premier et second organes de frottement (5, 6) interposés entre eux fermement dans un paquet, dans la direction de l'axe prédéterminé de rotation (A).
 7. Structure articulée selon la revendication 6 lorsqu'elle dépend de la revendication 3, **caractérisée en ce que** les moyens de fermeture (18) comprennent un rivet d'expansion (12) passant à travers l'intérieur de la petite cloison annulaire (9) du second organe de frottement (6) et est configuré pour forcer radialement la petite cloison annulaire (9).
 8. Structure articulée selon la revendication 7, **caractérisée en ce que** les moyens de fermeture (18) comprennent au moins un ressort Belleville (15, 16) interposé entre une tête (13a, 14a) du rivet (12) et un des premier et second éléments (2, 3).
 9. Structure articulée selon la revendication 7 ou 8, **caractérisée en ce que** le rivet (12) comprend un élément mâle (13) et un élément femelle (14), les éléments mâle et femelle (13, 14) comportant des têtes (13a, 14a) respectives.
 10. Structure articulée selon l'une quelconque des revendications de 7 à 9, **caractérisée en ce que** le rivet (12) définit le pivot (4) des premier et second éléments (2, 3).
 11. Structure articulée selon l'une quelconque des revendications précédentes, **caractérisée en ce que** les premier et second éléments (2, 3) ont une forme allongée.
 12. Procédé servant à assembler une structure articulée comprenant les étapes de :
 - préparer un premier élément (2) et un second élément (3), pouvant pivoter réciproquement au moyen d'une cheville (4) pour rendre les premier et second éléments (2, 3) mobiles respectivement de façon basculante autour d'un axe de rotation (A) prédéterminé,
 - préparer un premier organe de frottement (5) doté d'une extension circulaire étant solidaire en rotation de l'un des premier et second éléments (2, 3), et un second organe de frottement (6) doté d'une extension circulaire étant solidaire en rotation avec l'autre des premier et second éléments (2, 3), les premier et second organes de frottement (5, 6) étant au moins partiellement montés ensemble dans la direction de l'axe prédéterminé de rotation (A),
 - positionner un rivet d'expansion (12) passant centralement à travers l'intérieur des organes de frottement (5, 6) dotés d'une extension circulaire,
 - appuyer sur le rivet d'expansion (12) pour fermer la structure articulée fermement dans un paquet et pour forcer radialement les organes

de frottement (5, 6) de manière à augmenter la force de frottement générée sur des surfaces respectives en contact mutuel.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

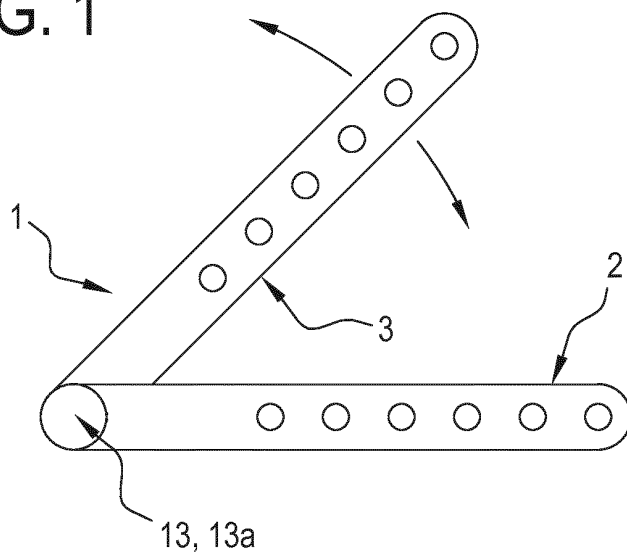


FIG. 2

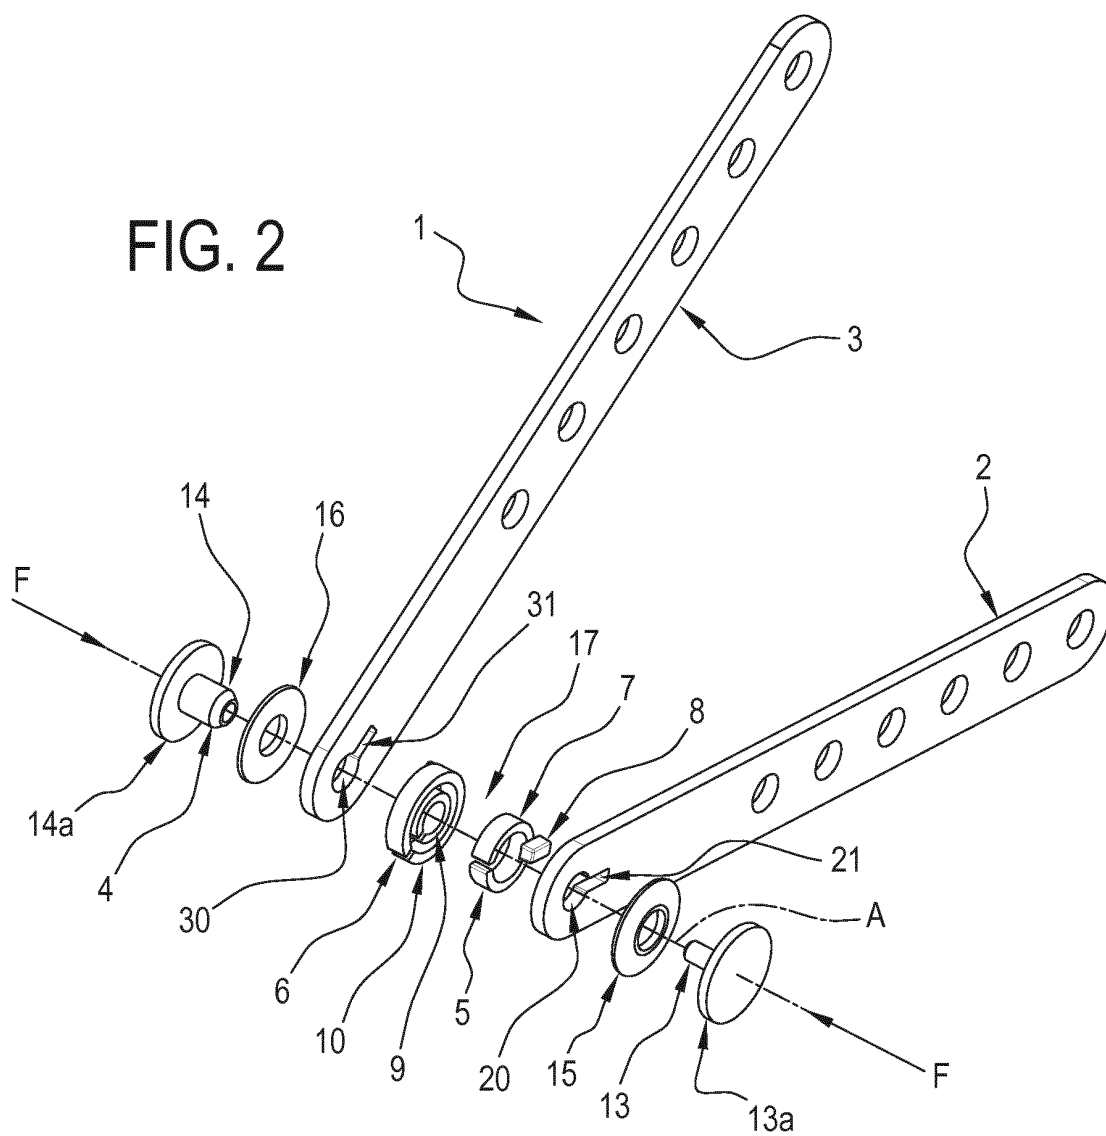


FIG. 3

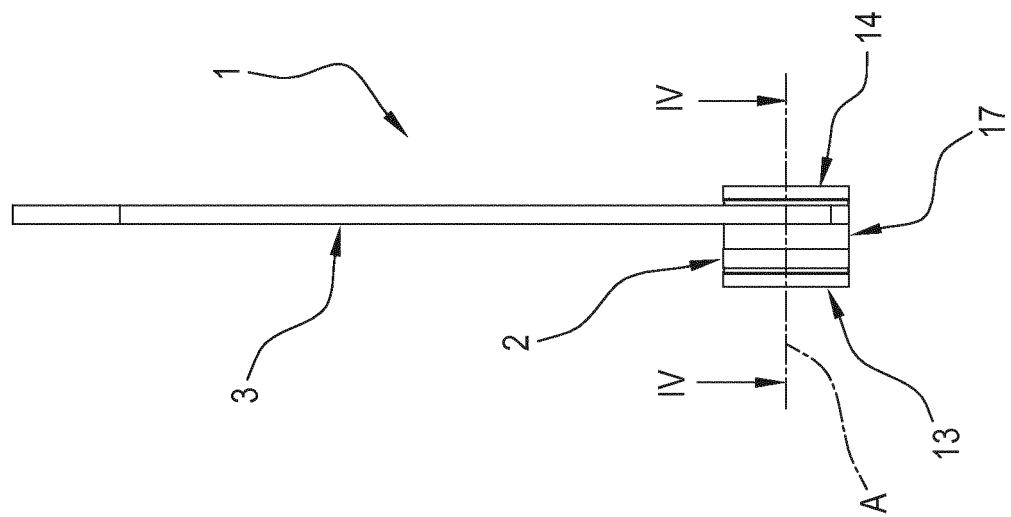


FIG. 4

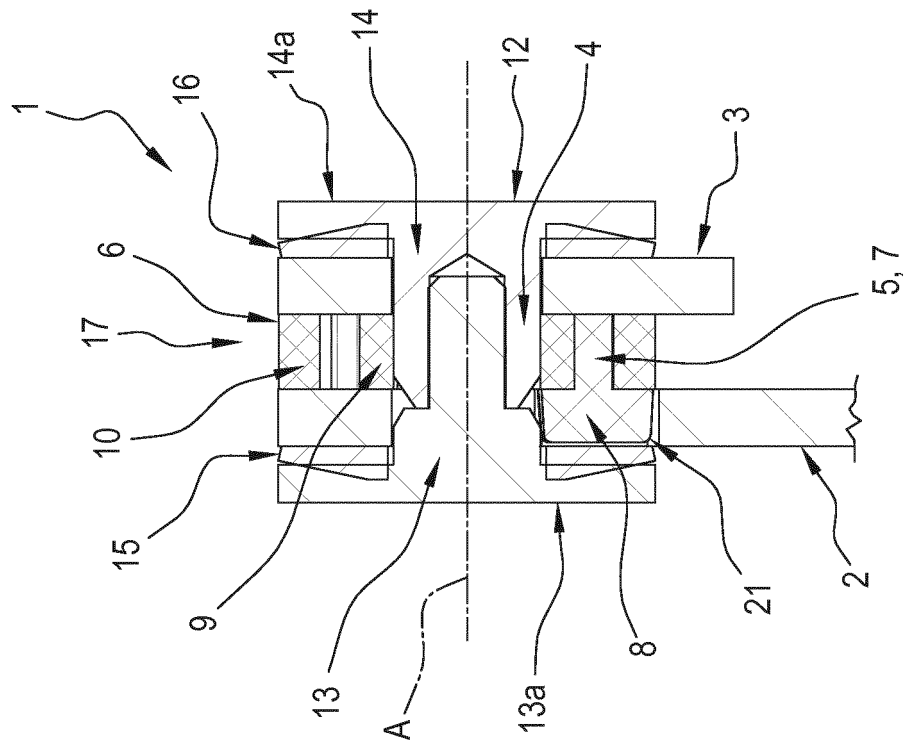


FIG. 5


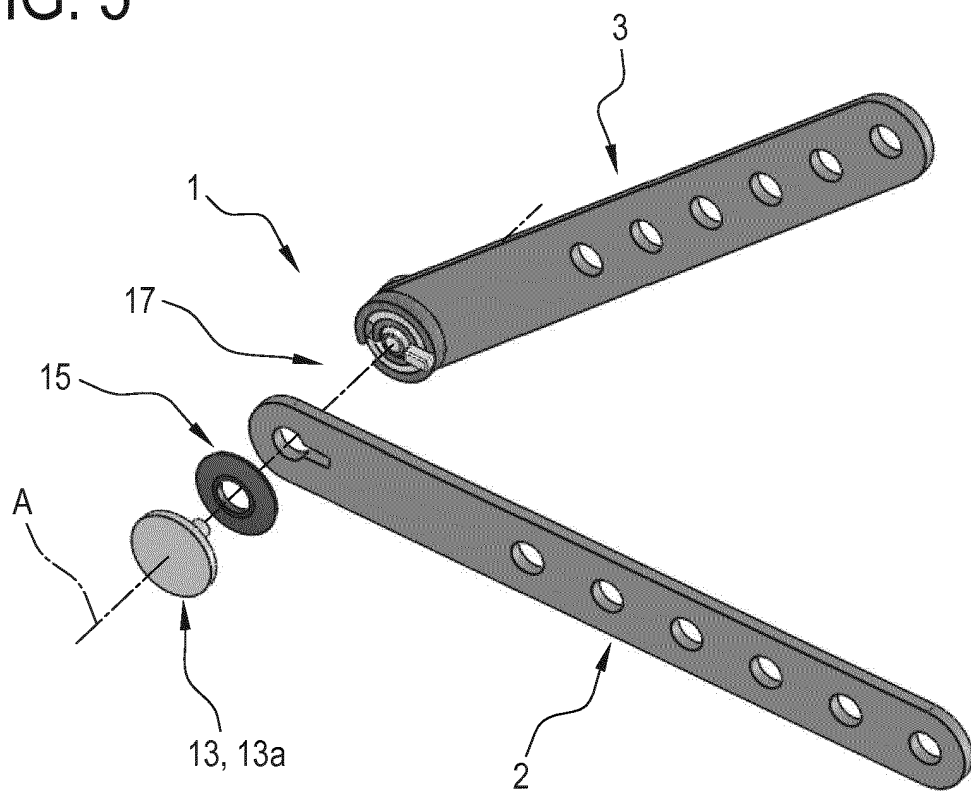


FIG. 6

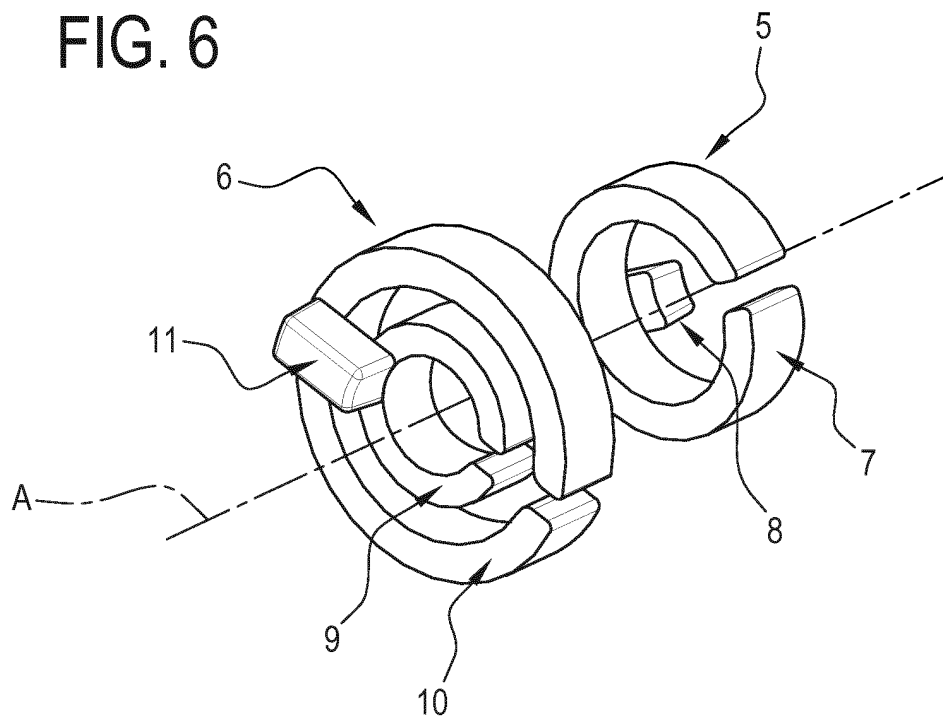

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 334417 [0011]