

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 February 2006 (23.02.2006)

PCT

(10) International Publication Number
WO 2006/020187 A2

(51) International Patent Classification:
G02B 26/08 (2006.01)

(21) International Application Number:
PCT/US2005/025380

(22) International Filing Date: 18 July 2005 (18.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/588,656 16 July 2004 (16.07.2004) US

(71) Applicant (for all designated States except US): **THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL** [US/US]; 308 Bynum Hall, Campus Box 4105, Chapel Hill, NC 27599-4105 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KELLER, Kurtis** [US/US]; 3421 Carriage Trail, Hillsborough, NC 27278 (US). **FUCHS, Henry** [US/US]; 103 Parkview Crescent,

Chapel Hill, NC 27516 (US). **MCMILLAN, Leonard** [US/US]; 121 Hotelling Court, Chapel Hill, NC 27514 (US).


(74) Agent: **HUNT, Gregory, A.**; Jenkins, Wilson & Taylor, P.A., Suite 1400, University Tower, 3100 Tower Boulevard, Durham, NC 27707 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: METHODS, SYSTEMS AND COMPUTER PROGRAM PRODUCTS FOR FULL SPECTRUM PROJECTION

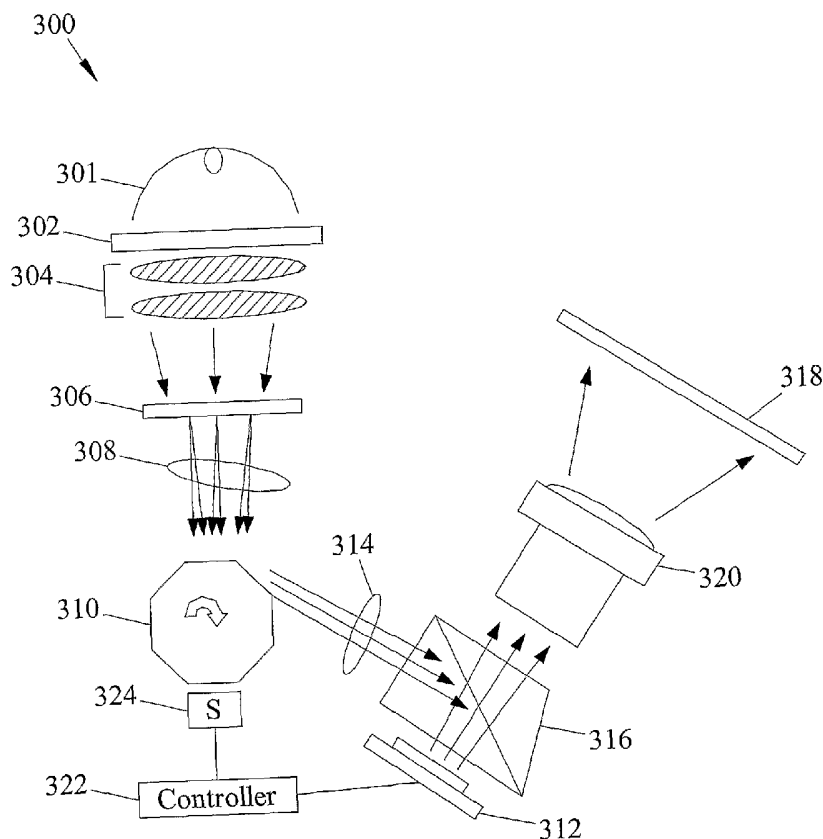

(57) Abstract: Methods, systems, and computer program products for full spectrum projection are disclosed. According to one method, a broadband electromagnetic wave beam is projected from a broadband electromagnetic wave source. The broadband electromagnetic wave beam is separated into narrowband-wavelength beams. The narrowband-wavelength beams are directed across a predetermined area. A narrowband-wavelength beam corresponding to a desired pixel wavelength is selected and displayed on a display surface.



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished
upon receipt of that report*

DESCRIPTION
METHODS, SYSTEMS, AND COMPUTER PROGRAM PRODUCTS FOR FULL SPECTRUM PROJECTION

5 RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Patent Application Serial No. 60/588,656, filed July 16, 2004; the disclosure of which is incorporated herein by reference in its entirety.

10 TECHNICAL FIELD

The subject matter described herein relates to methods, systems, and computer program products for displaying color images. More particularly, the subject matter described herein relates to methods, systems, and computer program products for displaying color images using a full spectrum projector.

15 BACKGROUND ART

In some color display systems, light from a white light source is separated into red, green, and blue. To achieve a desired color, red, green, and blue are projected at different times in the same location during a frame display time. The human eye perceives the desired color that is a mixture of the red, green and blue. The intensities of red, green, and blue can be adjusted to produce different colors.

Figure 1 is an optical schematic diagram of a conventional color display system. Referring to Figure 1, a lamp **100** projects white light through collimating optics **102** to a color wheel **104**. Color wheel **104** typically includes separate sectors of red, green, and blue. Color wheel **104** may also include a white light sector. Light exiting color wheel **104** passes through beam shaping optics **106** and impacts a digital micromirror device (DMD) **108**. DMD **108** includes individually controllable mirrors that reflect beams of red, green, and blue light through a projection lens **110** and onto a display surface **112**.

Figure 2 is a flow chart illustrating exemplary steps for displaying color images using a conventional display device, such as that illustrated in Figure 1. Referring to Figure 2, in step **200**, projector hardware grabs a frame and selects

a pixel to be displayed. In step **202**, the hardware determines a desired pixel color. In step **204**, the projector hardware selects intensities of red, green, and blue to achieve the desired pixel color. For example, if it is desired to display a dark green pixel, the intensity of red may be low, the intensity of green may be high, and the intensity of blue may also be high. In step **206**, the projector displays red, green, and blue during a frame display time for a pixel to achieve the desired color. Displaying red, green, and blue with the selected intensities will cause the viewer to perceive the pixel as being dark green.

One problem with existing color projectors is that such devices utilize only 55% of the available color space. Using only red, green, and blue prevents the generation of many colors, such as those outside of the color triangle. In addition, true Pantone colors cannot be produced using only red, green, and blue.

Another problem with existing red, green, and blue projectors is that they are incapable of reproducing individual wavelengths or frequencies. For example, the red, green, and blue filters used by conventional projectors have wideband color bandwidths of approximately 100 or greater nanometers. For example, a green filter in a conventional color wheel may pass light in the green wavelength ranging from about 450 nanometers to 600 nanometers. Such devices are incapable of producing colors that contain only discrete, narrowband wavelengths or frequencies.

Accordingly, in light of these difficulties associated with conventional color projectors, there exists a need for improved methods, systems, and computer program products for full spectrum projection.

DISCLOSURE OF THE INVENTION

According to one aspect, the subject matter described herein includes a method for full spectrum projection. The method includes projecting electromagnetic waves from a broadband electromagnetic wave source. The broadband electromagnetic waves are separated into narrowband-wavelength, spatially separate beams. The term "narrowband-wavelength," as used herein, refers to a bandwidth of no more than about 25 nanometers. The narrowband-wavelength beams are directed across a predetermined area. A narrowband-

wavelength beam corresponding to a desired pixel wavelength is selected and displayed on a display surface.

According to another aspect, the subject matter described herein includes a system for full spectrum projection. The system includes a
5 broadband electromagnetic wave source for projecting broadband electromagnetic waves. A separator separates the broadband electromagnetic waves into narrowband-wavelength beams. A beam director directs the narrowband-wavelength beams across a predetermined area. A beam selector selects an individual beam corresponding to a desired pixel color and directs
10 the narrowband-wavelength beam to a display surface.

According to yet another aspect, the subject matter described herein includes a method for imperceptibly embedding structured light in a projected image using a full spectrum projector. The method includes determining a single or multiple narrowband colors to be displayed for a pixel in a color image.
15 A value of a structured light pattern to be encoded for the pixel position is determined. A full spectrum projector is used to encode the desired value at the pixel position. The encoded value is detected using a wavelength selective detector.

The methods described herein for implementing full spectrum projection
20 can be implemented using a computer program product comprising computer executable instructions embodied in a computer readable medium. Exemplary computer readable media suitable for implementing the subject matter described herein can include chip memory devices, disk memory devices, application specific integrated circuits, programmable logic devices, and
25 downloadable electrical signals. In addition, a computer program product used for implementing the subject matter described herein can be located on a single device or computing platform or may be distributed across multiple devices or computing platforms.

30 BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the subject matter described herein will now be explained with reference to the accompanying drawings of which:

Figure 1 is an optical schematic diagram of a conventional color projector;

Figure 2 is a flow chart illustrating exemplary steps performed by a conventional color projector in projecting color images;

Figure 3 is an optical schematic diagram of a system for full spectrum projection according to an embodiment of the subject matter described herein;

5 Figure 4 is a flow chart illustrating exemplary steps for performing full spectrum projection according to an embodiment of the subject matter described herein;

Figure 5 is a block diagram illustrating exemplary components of an exemplary imperceptible structured light projection and detection system;

10 Figure 6 is a block diagram illustrating an imperceptible structured light projection and detection system that uses a full spectrum projector according to an embodiment of the subject matter described herein;

Figure 7 is a flow chart illustrating exemplary steps for imperceptibly embedding a structured light pattern in a color image using a full spectrum projector according to an embodiment of the subject matter described herein;

15 Figure 8A is a graph illustrating one method for embedding a structured light value in a broadband projected color according to an embodiment of the subject matter described herein; and

Figure 8B is a graph illustrating an alternate method for embedding a structured light value in a broadband projected color according to an embodiment of the subject matter described herein.

DETAILED DESCRIPTION OF THE INVENTION

According to one aspect, the subject matter described herein includes a system for full spectrum projection that selects individual wavelengths to display at pixel positions on a display surface. By individual wavelengths, it is meant that a full spectrum projection system according to the subject matter described herein is capable of displaying a narrowband-wavelength beam at each pixel in a projected image. For example, a full spectrum projector according to the subject matter described herein may be controlled to display a green pixel having a center wavelength of 577 nanometers and a bandwidth of no more than about 25 nanometers. Adjacent to the green pixel, a full spectrum projection system according to an embodiment of the subject matter described

herein may display a blue pixel having an individual wavelength of 492 nanometers.

According to another aspect, a full spectrum projection system according to an embodiment of the subject matter described herein is preferably capable of displaying an entire range of visible light or other spectra, such as near infrared, infrared, or ultraviolet spectra. For example, a full spectrum projection system according to the subject matter described herein may be capable of displaying light in wavelengths ranging from at least about 390 nanometers in the violet range to 780 nanometers in the red range to over 1000 nanometers in the near infrared. Displaying a full spectrum of colors greatly enhances the quality of the projected image. In addition, because the subject matter described herein is capable of displaying individual wavelengths or frequencies for each pixel, the color quality of each pixel is further enhanced over conventional systems that rely on mixing red, green, and blue to achieve a desired color.

Figure 1 is a block diagram illustrating a system for full spectrum projection according to an embodiment of the subject matter described herein. Referring to Figure 1, the full spectrum projection system **300** includes a broadband electromagnetic wave source **301** for projecting broadband electromagnetic waves. If the full spectrum projection system is a visible light projection system, broadband electromagnetic wave source **301** may be a white light source capable of producing a collimated beam of white light. A filter **302** may be placed in front of broadband electromagnetic wave source **301** to filter wavelengths that are not of interest and to reduce thermal exposure of downstream optical components. In one exemplary implementation, filter **302** may comprise an infrared reflector or filter that removes infrared radiation from the beams emanating from broadband electromagnetic wave source. Collimating optics **304** may be placed downstream from filter **302** to collimate the broadband electromagnetic radiation emanating from broadband electromagnetic wave source **301**.

A separator **306** separates the broadband electromagnetic beam into narrowband-wavelength, spatially separate beams. Separator **306** is a device capable of separating a broadband electromagnetic beam into multiple

narrowband-wavelength beams. In one implementation, separator **306** may comprise a prism. In alternate implementations, separator **306** may comprise a diffraction grating, a variable dichroic filter, or a variable-color holographic filter.

The narrowband wavelength beams may be separated from each other in space. That is, beams exiting separator **306** may appear as a rainbow where individual colors are separated from each other in space. Beam shaping optics **308** compress the narrowband-wavelength beams exiting from separator **306** into a desired area. Beam shaping optics may include any suitable beam shaping device, such as aspheric and holographic lenses.

10 A beam director **310** directs the beams exiting from beam shaping optics **308** across a predetermined area. In one exemplary implementation, beam sweeper **310** may comprise a multifaceted mirror that rotates about an axis to sweep the beams across a desired area. In the example illustrated in Figure 1, mirror **310** is shown from one side in the direction of the axis of rotation. When light emanating from beam shaping optics **308** impacts a face of beam director **310**, the beams are swept sequentially in the direction corresponding to the arrows exiting beam director **310**. In one implementation, beam director **310** may rotate through an arc such that each pixel is capable of seeing each color at least twice during each frame display time.

20 In an alternate implementation, beam director **310** may be configured to sequentially send narrowband-wavelength pulses of light across a predetermined area. For example, rather than sweeping the narrowband-wavelength beams across each pixel, beam director **310** may sequentially emit pulses of light corresponding to each color or wavelength so that the appropriate color or wavelength can be selected for each pixel.

25 A beam selector **312** selects individual beams exiting from beam director **310** corresponding to desired pixel colors. For example, as individual wavelength beams exit beam director **310**, the individual wavelength beams pass through a focusing lens **314** and onto an internal face of total internal reflection optic **316**. The beams are reflected onto a surface of beam selector **312**. As the entire spectrum of colors passes across individual locations of beam selector **312**, beam selector **312** may direct a desired pixel wavelength to a display surface **318** via a projection lens **320**. In one exemplary

implementation, beam selector **312** may comprise a digital micromirror device (DMD). In another implementation, beam selector **312** may comprise a light transmissive liquid crystal display (LCD).

A controller **322** determines the desired pixel color to be displayed and
5 controls beam selector **312** to select the desired pixel. A sensor **324** senses the position of beam director **310** so that controller **322** knows when a desired pixel color is present at a given position of beam selector **312**. Thus, rather than mixing only red, green, and blue to achieve desired colors, the system illustrated in Figure 1 can select individual wavelengths for each pixel in a
10 projected image. In addition, wavelengths outside of red, green, and blue can be displayed, leading to better color projection. The system illustrated in Figure 3 can also mix individual wavelength beams to achieve desired colors during a frame display time.

Figure 4 is a flow chart illustrating exemplary overall steps for full
15 spectrum projection according to an embodiment of the subject matter described herein. Referring to Figure 4, in step **400**, broadband electromagnetic wave beams are projected from a broadband electromagnetic wave source. As stated above, the broadband electromagnetic wave source may be a white light source if it is desirable to project visible light. In an
20 alternate implementation, the electromagnetic wave source may be a near infrared, infrared, or ultraviolet light source. In step **402**, the broadband electromagnetic wave beam is separated into narrowband-wavelength, spatially separated beams. In step **404**, the narrowband-wavelength beams are swept across a predetermined area. In step **406**, a narrowband-wavelength beam
25 corresponding to a desired pixel wavelength is selected and displayed on a display surface.

The color of each displayed pixel may be adjusted or varied by adjusting the intensity of the narrowband-wavelength beam corresponding to the pixel or by adjusting the intensities of narrowband-wavelength beams adjacent to or
30 near the pixel whose color is being varied. When the intensities of adjacent pixels adjacent to an unaltered pixel are varied, a human observer will perceive that the color of the unaltered pixel has changed.

There are many applications for a full spectrum projection system according to an embodiment of the subject matter described herein. One application is imperceptibly embedding structured light patterns in projected color images for display on nonplanar and planar surfaces. For example, commonly assigned, co-pending U.S. patent application no. 11/066,629, filed on February 25, 2005, the disclosure of which is incorporated herein by reference in its entirety, discloses methods, systems, and computer program products for imperceptibly embedding structured light patterns in projected color images for display on planar and nonplanar surfaces. One reason it is desirable to embed structured light patterns in projected color images is so that depth information can be gathered from the images so that the images can be predistorted for display on nonplanar surfaces. In the referenced patent application, DMD mirror flip sequences are analyzed to determine a binary image exposure period during which mirrors of a DMD device switch between on and off for a given pixel intensity being displayed so that structured light value can be embedded in a projected image without significantly altering the projected pixel color. A camera may be synchronized with the projector to acquire a structured light pattern during the binary image exposure period and detect the encoded value.

Figure 5 is a block diagram illustrating one example of a structured light depth extraction system that requires synchronization between the projector and the camera. Referring to Figure 5, a projector **500** projects structured light patterns onto a display surface. A camera **502** detects reflected images. The shutter of camera **502** is controlled by a trigger signal generated by sync generator **504**. A computer **506** outputs a video signal with an embedded structured light image, detects the combined image, and extracts the structured light pattern. For example, if the input image had a red intensity of 129 for a given pixel, the color of the projected pixel may be adjusted to the closest value to 129 where the mirror corresponding to the pixel has the opposite polarity during the binary image exposure period. By synchronizing camera **502** to the binary image exposure period, the mirror polarity and hence the embedded structured light value can be detected.

While the system illustrated in Figure 5 is suitable for its intended purposes, it requires synchronization between camera **502** and projector **500** so that camera **502** acquires an image during the binary image exposure period. It may be desirable to remove the synchronization requirement to further simplify the system. According to the subject matter described herein, full spectrum projection may be used to imperceptibly embed an individual wavelength pixel in a broadband projected image without requiring a binary image exposure period or synchronization between the projector and the camera. Figure 6 illustrates a system for structured light depth extraction using a full spectrum projection system according to an embodiment of the subject matter described herein. Referring to Figure 6, full spectrum projection system **300** may be used to project a color image with an embedded structured light pattern. Camera **502** may include a wavelength selector **600** for selecting individual wavelengths from a projected image. The wavelength selector may be any suitable filter capable of filtering an individual wavelength pixel. Camera **502** need not be synchronized with individual display periods of full spectrum projection system **300**. Rather, camera **502** can simply continuously acquire the projected image and wavelength selector **600** will select the desired wavelength. Computer **506** controls the operation of camera **502** and outputs the video in which the structured light pattern is being encoded. It should be noted that sync generator **504** is not needed in the embodiment illustrated in Figure 6.

Figure 7 is a flow chart illustrating exemplary overall steps for using full spectrum projection to imperceptibly embed a structured light pattern in a projected image according to an embodiment of the subject matter described herein. Referring to Figure 7, in step **700**, a color to be displayed for a pixel in a color image is determined. For example, it may be desirable to display the color green ranging from 525 to 540 nanometers. In step **702**, the value of a structured light pattern to be encoded for a pixel is determined. For example, it may be desirable to encode a binary 1 or a binary 0 in a projected pixel. In step **704**, a full spectrum projector is used to imperceptibly encode a value at a pixel position. Imperceptibly encoding the value at a pixel position may include displaying an individual wavelength beam at the pixel position so that the user would perceive a broadband color. Figure 8A is a graph illustrating one method

for encoding a structured light pattern in a broadband image. Referring to Figure 8A, pixel values ranging from 525 to 540 nanometers may be displayed with the wavelength centered at 532.5 nanometers being turned off. The presence or absence of a 532.5 nanometer wavelength beam can be assumed to be a binary 0 or 1, corresponding to the structured light value being encoded. The curvilinear line in Figure 8A represents the color as perceived by a human eye.

Figure 8B illustrates an alternate method for imperceptibly embedding a structured light pattern in a broadband pixel color. Referring to Figure 8B, it may be desirable to display the color green ranging from 525 to 540 nanometers. In order to achieve a perceived display having this range of wavelengths, individual beams, having wavelengths of 527 and 538 nanometers may be projected. The resulting displayed image appears like a broadband image. However, a frequency sensitive detector may detect the individual wavelengths being projected.

Returning to Figure 7, in step **706**, the structured light pattern is detected using a wavelength selective detector. As described above with regard to Figure 6, exemplary wavelength selective detectors that may be used include notch filters or any other suitable frequency selective detector. Thus, using the steps illustrated in Figure 7, structured light images can be embedded in color images without requiring precise synchronization between the projector and the camera that acquires the images.

In addition to structured light depth extraction, the subject matter described herein may be used to produce narrowband-wavelength lighting, for example for the film and television industries. Narrowband-wavelength lighting may be desirable in environments in which precise control of color is used to achieve a desired effect, such as making all actors in a particular scene appear tan.

Another application of the subject matter described herein includes large projection displays, such as those used in outdoor amphitheatres or even in projection televisions.

Yet another application of the subject matter described herein includes calibrating infrared or other electromagnetic wave tracking equipment. For example, missile, jet, propeller plane, helicopter, and decoy exhaust systems

each have characteristic thermal signatures. Some have higher peak temperatures, while others have high bulk energy at low temperatures. These variations are shown in a histogram of their frequency or temperature distributions in the visible, NIR, and IR spectra. To calibrate ground-based, ship, missile or aircraft tracking systems, simulating these various objects in a controlled environment economically and safely is difficult. However, with a full spectrum projection system described herein, one can project and tailor each pixel or area to correspond to the visible, NIR and IR signature of the simulated object. These "objects" can then be projected individually or in multiples accurately to allow the calibration item (heat seeking missile, etc.) to view the projected items at known locations and tracks and be accurately calibrated.

It will be understood that various details of the invention may be changed without departing from the scope of the invention. Furthermore, the foregoing description is for the purpose of illustration only, and not for the purpose of limitation, as the invention is defined by the claims as set forth hereinafter.

CLAIMS

What is claimed is:

1. A method for full spectrum projection comprising:
 - (a) projecting a broadband electromagnetic wave beam from a broadband electromagnetic wave source;
 - (b) separating the broadband electromagnetic wave beam into a plurality of narrowband-wavelength beams;
 - (c) directing the narrowband-wavelength beams across a predetermined area; and
 - (d) selecting a narrowband-wavelength beam corresponding to a desired pixel wavelength and displaying the desired pixel wavelength at a first pixel on a display surface.
2. The method of claim 1 wherein projecting a broadband electromagnetic wave beam includes projecting a white light beam.
3. The method of claim 2 wherein separating the broadband electromagnetic wave beam includes separating the broadband electromagnetic beam into narrowband-wavelength beams having wavelengths ranging from about 390 nanometers to about 780 nanometers.
4. The method of claim 1 wherein projecting a broadband electromagnetic wave beam includes projecting a beam having at least one of near infrared, infrared, and ultraviolet wavelengths.
5. The method of claim 1 wherein separating the broadband electromagnetic wave beam into narrowband-wavelength beams includes passing the broadband electromagnetic wave beam through a prism.
6. The method of claim 1 wherein separating the broadband electromagnetic wave beam into narrowband-wavelength beams includes passing the broadband electromagnetic wave beam through a variable dichroic filter.
7. The method of claim 1 wherein separating the broadband electromagnetic wave beam into narrowband-wavelength beams includes passing the broadband electromagnetic wave beam through a diffraction grating.

8. The method of claim 1 wherein separating the broadband electromagnetic wave beam into narrowband-wavelength beams includes passing the broadband electromagnetic wave beam through a variable color holographic filter.
- 5 9. The method of claim 1 wherein directing the narrowband-wavelength beams across a predetermined area includes sweeping the narrowband-wavelength beams across a digital micromirror device using a multifaceted, rotating mirror.
- 10 10. The method of claim 1 wherein directing the narrowband-wavelength beams across a predetermined area includes individually pulsing the narrowband-wavelength beams onto the surface of a digital micromirror device (DMD).
- 15 11. The method of claim 1 wherein directing the narrowband wavelength beams across a predetermined area includes directing the narrowband wavelength beams across the surface of a digital micromirror device (DMD) so that each pixel sees at least one visible light spectrum of colors during a frame display time and wherein selecting a narrowband wavelength beam corresponding to a desired pixel color includes reflecting the narrowband-wavelength beam corresponding to the desired pixel color in response to the narrowband-wavelength beam impacting a mirror of a digital micromirror device (DMD).
- 20 12. The method of claim 1 wherein selecting a narrowband-wavelength beam includes selecting a narrowband-wavelength beam using a digital micromirror (DMD) device.
- 25 13. The method of claim 1 wherein selecting a narrowband-wavelength beam includes selecting a narrowband-wavelength beam using a light transmissive liquid crystal display (LCD).
14. The method of claim 1 wherein each narrowband-wavelength beam has a bandwidth on the order of no more than about 25 nanometers.
- 30 15. The method of claim 1 comprising repeating steps (a)-(d) to produce a plurality of narrowband-wavelength beams on a computer graphic display surface.

16. The method of claim 1 comprising directing a plurality of narrowband-wavelength beams into a scene to achieve narrowband-wavelength lighting.
17. The method of claim 1 comprising projecting a plurality of narrowband-wavelength beams onto a projection display surface.
18. The method of claim 1 comprising projecting a plurality of narrowband-wavelength electromagnetic beams onto the display surface to simulate an object being tracked and using the projected beams to calibrate electromagnetic tracking equipment.
19. The method of claim 1 comprising varying a perceived color of the first pixel by adjusting the intensity of the narrowband wavelength beam.
20. The method of claim 1 comprising varying a perceived color of the first pixel by adjusting the intensity of at least one narrowband-wavelength beam corresponding to at least one second pixel near the first pixel.
21. A method for imperceptibly embedding a structured light image in a projected color image using a full spectrum projector, the method comprising:
- (a) determining a color to be displayed for a pixel in a color image;
 - (b) determining a value of a structured light pattern to be encoded for a pixel position;
 - (c) using a full spectrum projector to imperceptibly encode the value at the pixel position; and
 - (d) detecting the encoded value using a wavelength-selective detector.
22. A system for full spectrum projection comprising:
- (a) a broadband electromagnetic wave source for projecting a broadband electromagnetic wave beam;
 - (b) a separator for separating the broadband electromagnetic wave beam into narrowband-wavelength beams;
 - (c) a beam director for directing the narrowband-wavelength beams across a predetermined area; and
 - (d) a beam selector for selecting a narrowband-wavelength beam corresponding to a desired pixel wavelength and directing the beam to a pixel position on a display surface.

23. The system of claim 22 wherein the projector comprises a visible light projector.
24. The system of claim 23 wherein the separator is adapted to separate visible light into narrowband-wavelength beams having wavelengths ranging from 390 nanometers to 780 nanometers.
25. The system of claim 22 wherein the projector is capable of projecting an electromagnetic wave beam having at least one of near infrared, infrared, and ultraviolet wavelength ranges.
26. The system of claim 22 wherein the separator comprises a prism.
27. The system of claim 22 wherein the separator comprises a variable dichroic filter.
28. The system of claim 22 wherein the separator comprises a diffraction grating.
29. The system of claim 22 wherein the separator comprises a variable color holographic filter.
30. The system of claim 22 wherein the beam director comprises a multifaceted mirror arranged to rotate about an axis.
31. The system of claim 22 wherein the beam director is arranged to emit individual pulses of narrowband light corresponding to the narrowband-wavelength beams.
32. The system of claim 22 wherein the beam selector comprises a digital micromirror device (DMD).
33. The system of claim 22 wherein the beam selector comprises a light transmissive liquid crystal display (LCD).
34. The system of claim 22 wherein each narrowband-wavelength beam has a bandwidth on the order of no more than about 25 nanometers.
35. The system of claim 22 wherein the beam director and the beam selector are adapted to generate a plurality of individual wavelength pixels for a computer graphics application.
36. The system of claim 22 wherein the beam director and the beam selector or adapted to project a plurality of narrowband-wavelength beams into a scene for a customized lighting application.
37. The system of claim 22 wherein the beam director and the beam selector are adapted to project a plurality of narrowband-wavelength

pixels into a predetermined area to simulate an object being tracked by an electromagnetic wave tracking application.

38. The system of claim 22 wherein the beam director and the beam selector are adapted to project a plurality of narrowband-wavelength beams onto a projection display surface.
- 5 39. A computer program product comprising computer executable instruction embodied in a computer readable medium for performing steps comprising:
- 10 (a) projecting a broadband electromagnetic wave beam from a broadband electromagnetic wave source;
 - (b) separating the broadband electromagnetic wave beam into a plurality of narrowband-wavelength beams;
 - (c) directing the narrowband-wavelength beams across a predetermined area; and
 - 15 (d) selecting a narrowband-wavelength beam corresponding to a desired pixel wavelength and displaying the desired pixel wavelength on a display surface.
40. The computer program product of claim 39 wherein projecting a broadband electromagnetic wave beam includes projecting a white light beam.
- 20 41. The computer program product of claim 40 wherein separating the broadband electromagnetic wave beam includes separating the broadband electromagnetic beam into narrowband-wavelength beams having wavelengths ranging from about 390 nanometers to about 780 nanometers.
- 25 42. The computer program product of claim 39 wherein projecting a broadband electromagnetic wave beam includes projecting a beam having at least one of near infrared, infrared, and ultraviolet wavelengths.
- 30 43. The computer program product of claim 39 wherein separating the broadband electromagnetic wave beam into narrowband-wavelength beams includes passing the broadband electromagnetic wave beam through a prism.

44. The computer program product of claim 39 wherein separating the broadband electromagnetic wave beam into narrowband-wavelength beams includes passing the broadband electromagnetic wave beam through a variable dichroic filter.
- 5 45. The computer program product of claim 39 wherein separating the broadband electromagnetic wave beam into narrowband-wavelength beams includes passing the broadband electromagnetic wave beam through a diffraction grating.
- 10 46. The computer program product of claim 39 wherein separating the broadband electromagnetic wave beam into narrowband-wavelength beams includes passing the broadband electromagnetic wave beam through a variable color holographic filter.
- 15 47. The computer program product of claim 39 wherein directing the narrowband-wavelength beams across a predetermined area includes sweeping the narrowband-wavelength beams across the predetermined area using a multifaceted, rotating mirror.
48. The computer program product of claim 39 wherein selecting a narrowband-wavelength beam includes selecting a narrowband-wavelength beam using a digital micromirror device (DMD).
- 20 49. The computer program product of claim 39 wherein selecting a narrowband-wavelength beam includes selecting a narrowband-wavelength beam using a light transmissive liquid crystal display (LCD).
50. The computer program product of claim 39 wherein each narrowband-wavelength beam has a frequency bandwidth on the order of no more than about 25 nanometers.
- 25 51. The computer program product of claim 39 comprising repeating steps (a)-(d) to produce a plurality of narrowband-wavelength beams on a computer graphic display surface.
52. The computer program product of claim 39 comprising directing a plurality of narrowband-wavelength beams into a scene to achieve narrowband-wavelength lighting.
- 30 53. The computer program product of claim 39 comprising directing a plurality of narrowband-wavelength beams into a predetermined area to

simulate an object being tracked by an electromagnetic wave tracking application.

54. The computer program product of claim 39 comprising projecting a plurality of narrowband-wavelength beams onto a projection display surface.
- 5
55. A computer program product comprising computer executable instruction embodied in a computer readable medium for performing steps comprising:
- 10
- (a) determining a color to be displayed for a pixel in a color image;
 - (b) determining a value of a structured light pattern to be encoded for a pixel position;
 - (c) using a full spectrum projector to imperceptibly encode the value at the pixel position; and
 - (d) detecting the encoded value using a wavelength-selective
- 15
- detector.

1/8

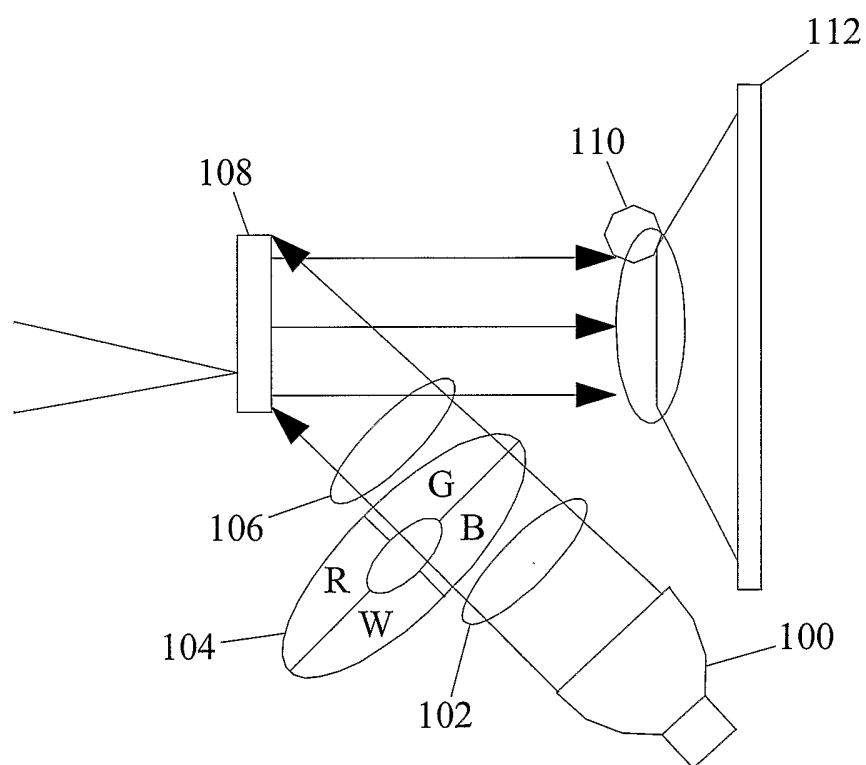


FIG. 1

2/8

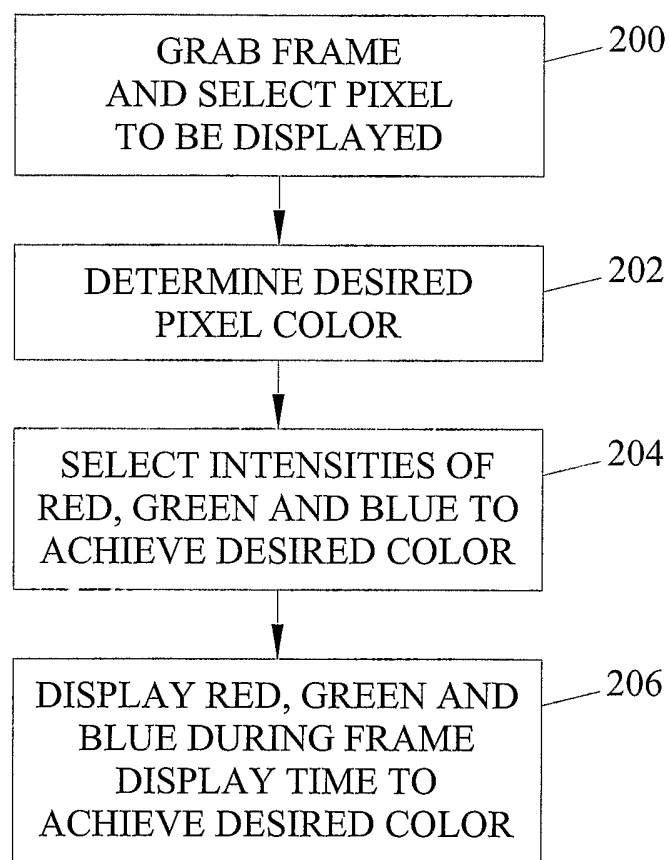


FIG. 2

3/8

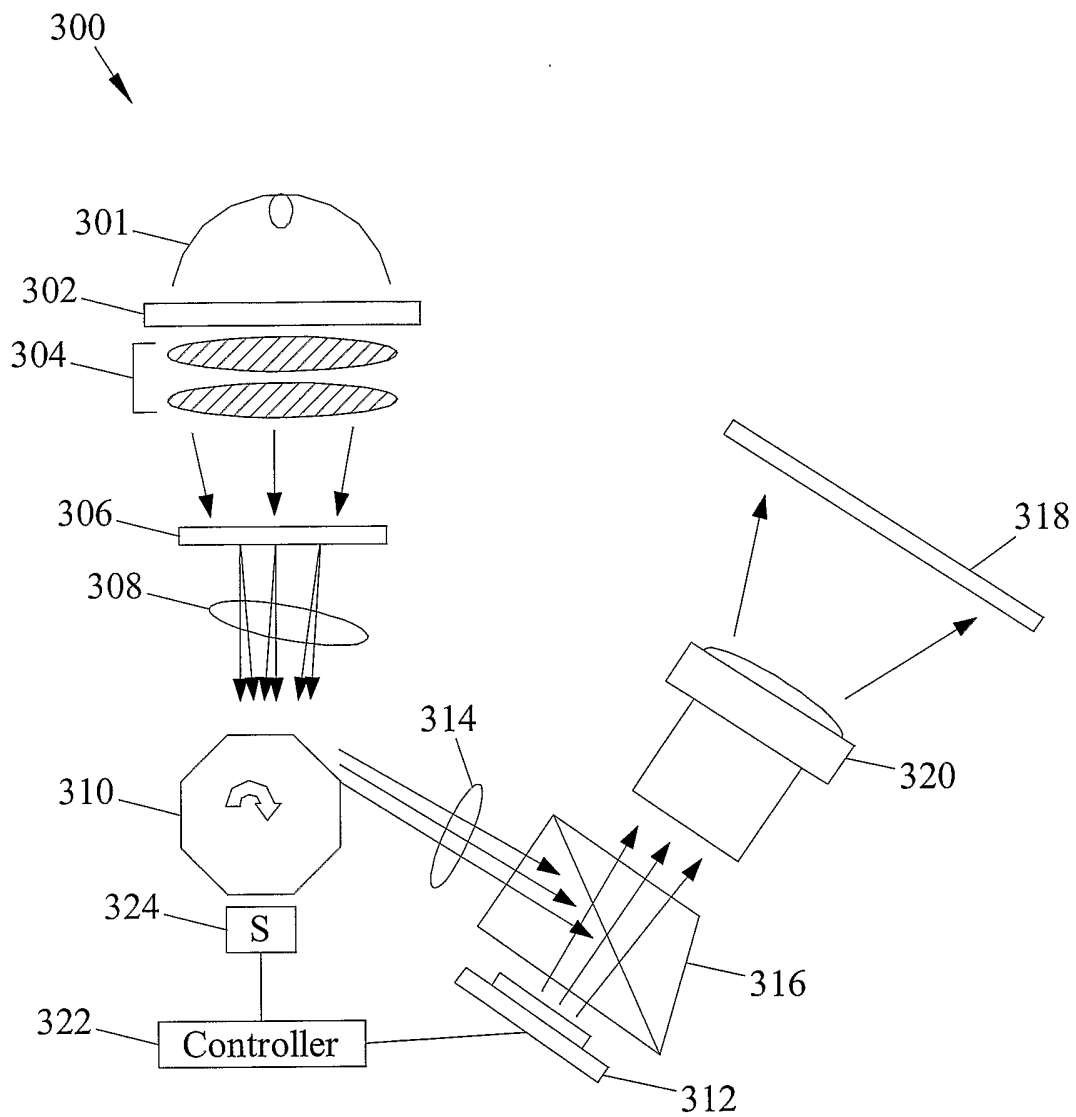


FIG. 3

4/8

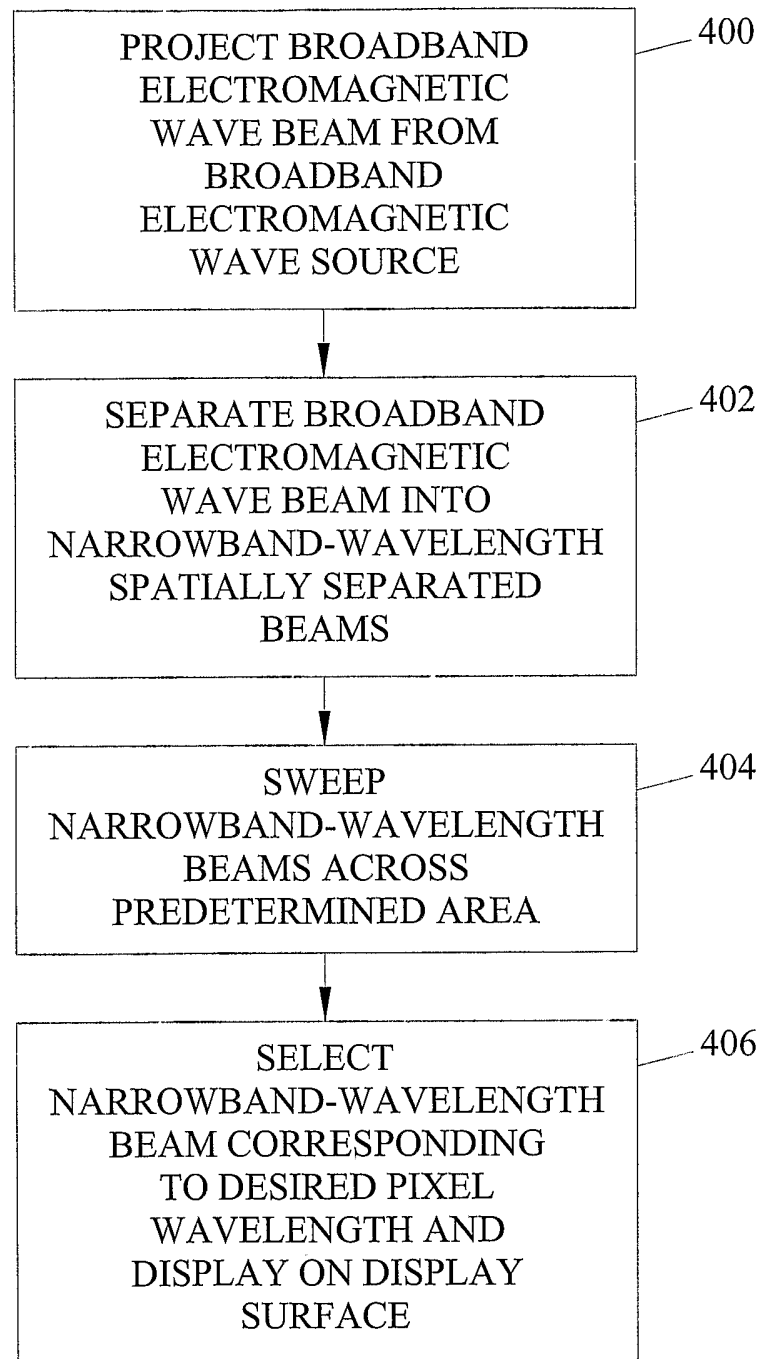


FIG. 4

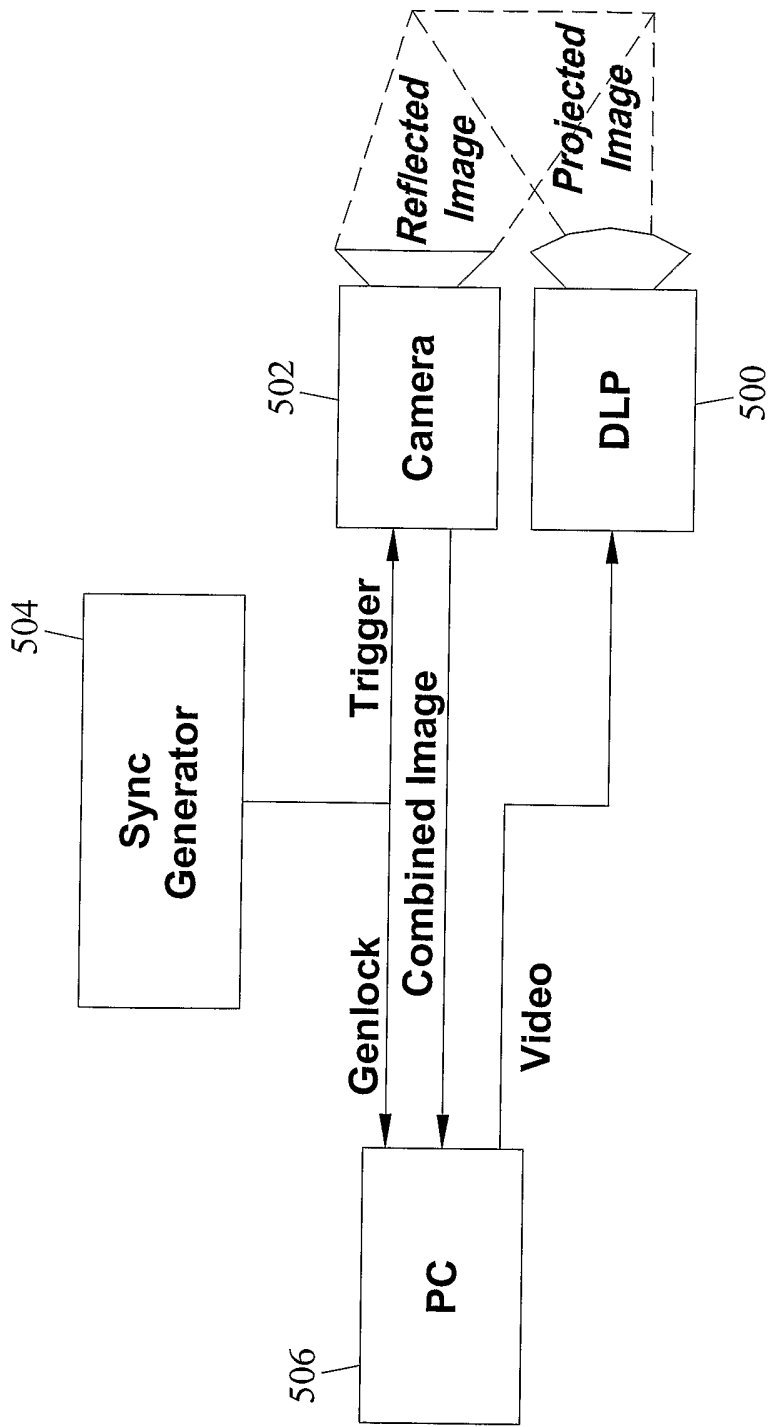


FIG. 5

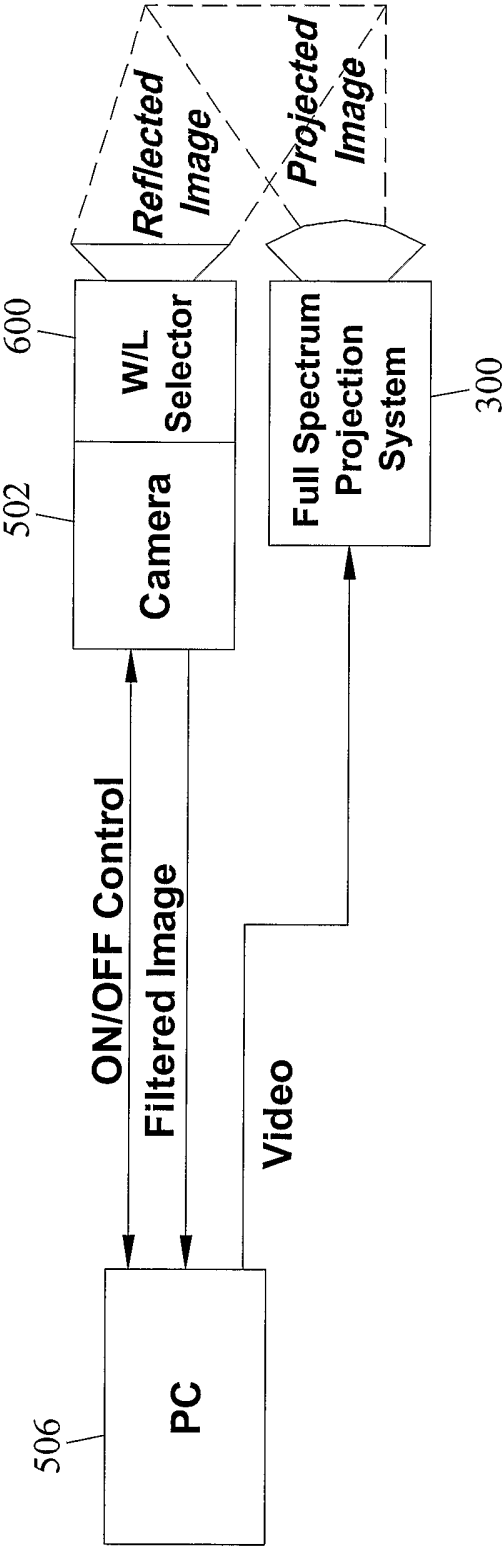


FIG. 6

7/8

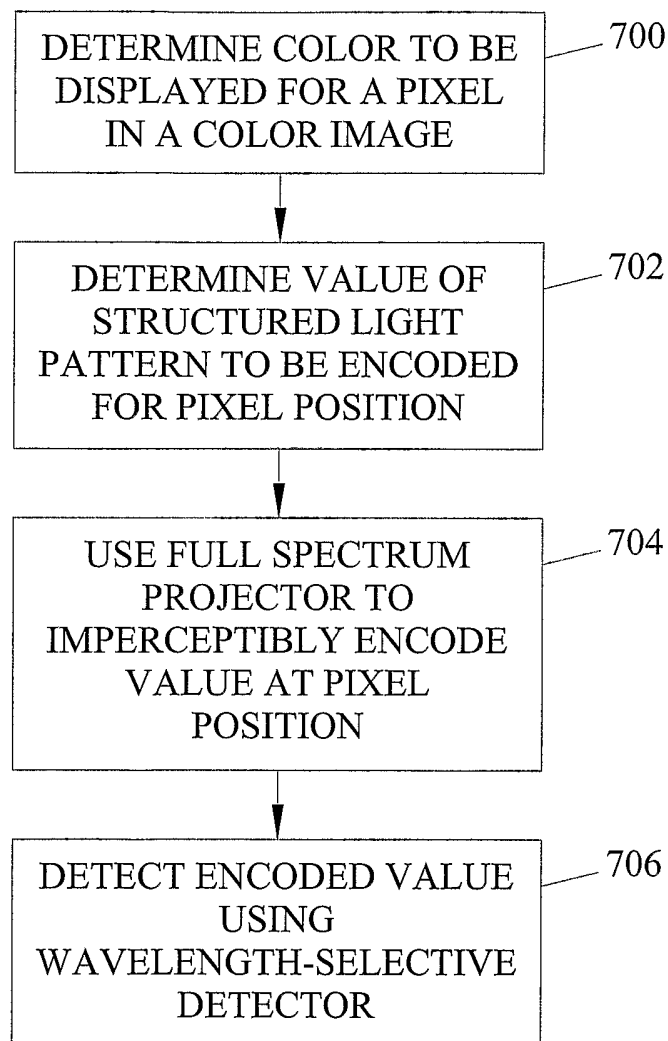


FIG. 7

8/8

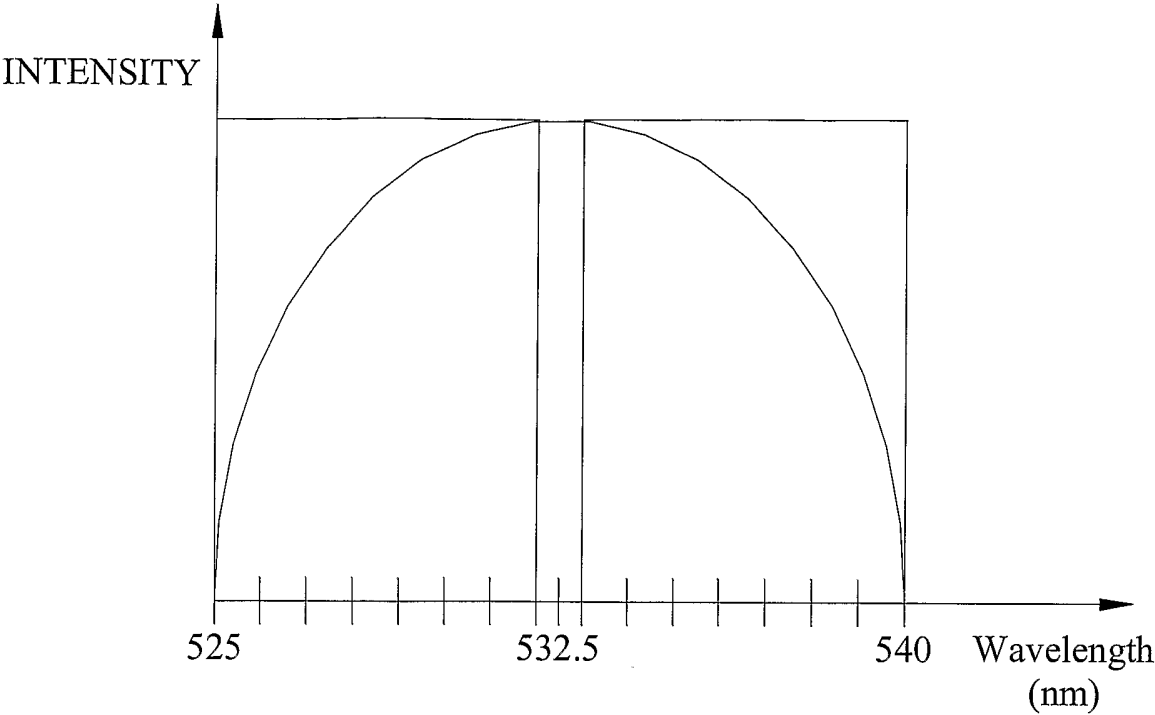


FIG. 8A

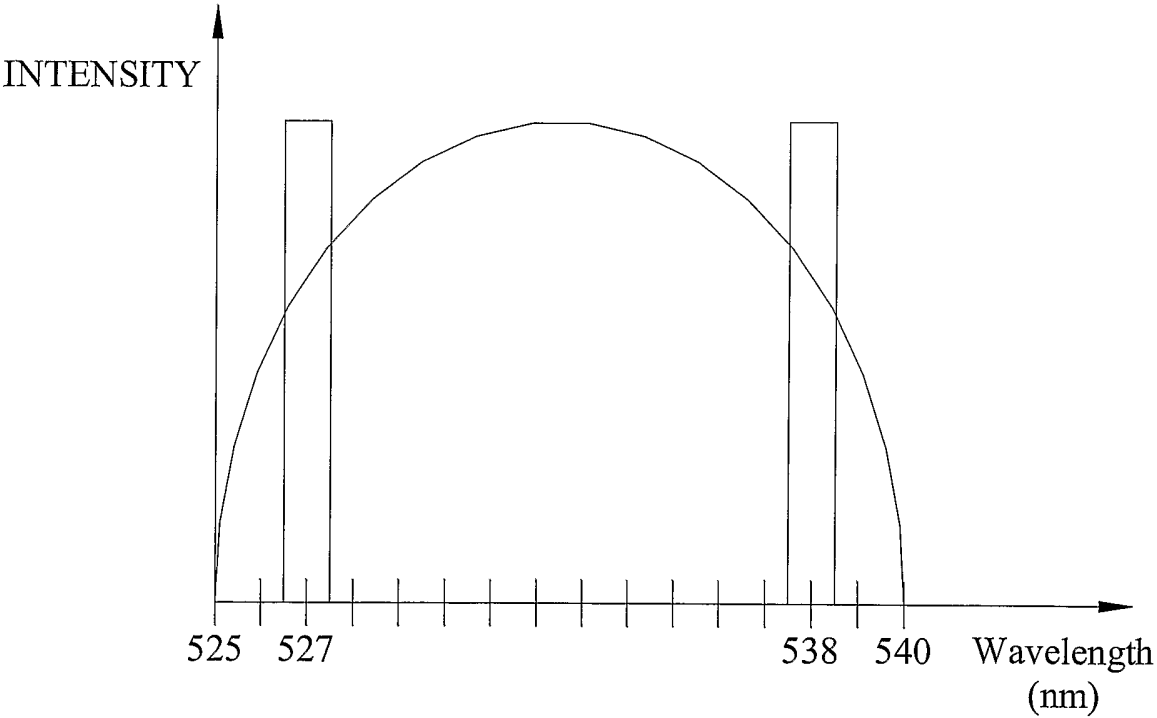


FIG. 8B