



(51) International Patent Classification:
H04R 25/00 (2006.01)

(21) International Application Number:
PCT/US2019/052331

(22) International Filing Date:
23 September 2019 (23.09.2019)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/735,220 24 September 2018 (24.09.2018) US

(71) Applicant: **MED-EL ELEKTROMEDIZINISCHE
GERAETE GMBH** [AT/US]; Fuerstenweg 77, A-6020
Innsbruck (AT).

(72) Inventor: **GRASSO, Peter**; Mitterweg 180 TOP 15,
A-6020 Innsbruck (AT).

(74) Agent: **SANDVOS, Jay et al.**; SUNSTEIN KANN MUR-
PHY & TIMBERS LLP, 125 Summer Street, Boston, Mass-
achusetts 02110 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

(54) Title: UNIVERSAL BONE CONDUCTION AND MIDDLE EAR IMPLANT

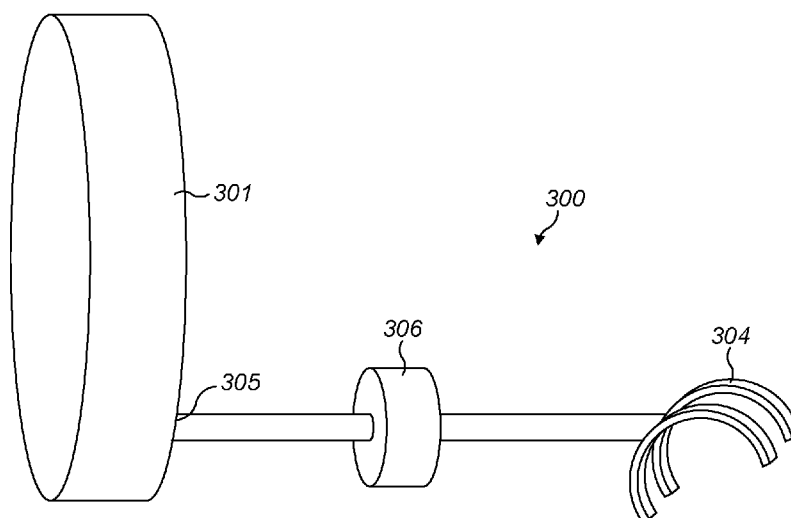


FIG. 3A

(57) Abstract: A middle ear implant system includes a bone conduction transducer configured for fixed attachment to skull bone of a patient beneath the skin behind the ear, and for generating sound vibrations from an external communications signal received through the skin for coupling to the skull bone for bone conduction sound perception by the patient. A malleable ossicle connector is connected to the bone conduction transducer and a middle ear hearing structure of the patient. And one or more isolation springs are configured for placement at the fixed attachment of the bone conduction transducer to the skull bone to acoustically decouple the bone conduction transducer from the skull bone to avoid bone conduction sound perception so that sound perception from the external communications signal is solely via the middle ear sound perception from vibrations coupled to the middle ear hearing structure by the ossicle connector.

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

TITLE

Universal Bone Conduction and Middle Ear Implant

[0001] This application claims priority from U.S. Provisional Patent Application 62/735,220, filed September 24, 2018, which is incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

[0002] The present invention relates to medical implants, and more specifically, to a novel middle ear implant system.

BACKGROUND ART

[0003] A normal ear transmits sounds as shown in Figure 1 through the outer ear **101** to the tympanic membrane **102** which moves the ossicles of the middle ear **103** that vibrate the oval window **106** and round window **107** membranes of the cochlea **104**. The cochlea **104** is a long narrow duct wound spirally about its axis for approximately two and a half turns. The cochlea **104** forms an upright spiraling cone with a center called the modiolar where the spiral ganglion cells of the cochlear nerve **105** reside. In response to received sounds transmitted by the middle ear **103**, the fluid-filled cochlea **104** functions as a transducer to generate electric pulses which are transmitted by the cochlear nerve **105** to the brain.

[0004] Hearing is impaired when there are problems in the ability to transduce external sounds into meaningful action potentials along the neural substrate of the cochlea. To improve impaired hearing, auditory prostheses have been developed. For example, when the impairment is related to operation of the middle ear, a conventional hearing aid, a middle ear implant, or a bone conduction implant may be used to provide acoustic-mechanical stimulation to the auditory system in the form of amplified sound. Or when the impairment is associated with the cochlea, a cochlear implant with an implanted stimulation electrode can electrically stimulate auditory nerve tissue with small currents delivered by multiple electrode contacts distributed along the electrode.

[0005] Middle ear implants employ electromagnetic transducers to convert sounds into mechanical vibration of the middle ear **103**. A coil winding is held stationary by attachment to a non-vibrating structure within the middle ear **103** and microphone signal current is delivered to the coil winding to generate an electromagnetic field. A magnet is attached to an ossicle within the middle ear **103** so that the magnetic field of the magnet interacts with the magnetic field of the coil. The magnet vibrates in response to the interaction of the magnetic fields, causing vibration of the bones of the middle ear **103**. *See* U.S. Patent 6,190,305, which is incorporated herein by reference.

[0006] U.S. Patent 8,246,532 (incorporated herein by reference in its entirety) describes a type of bone conduction implant that delivers a mechanical vibration signal to the cochlea for sound perception in persons with conductive or mixed conductive/sensorineural hearing loss. An implanted bone conduction transducer is affixed beneath the skin to the temporal bone. In response to an externally generated electrical communications signal, the transducer couples a mechanical stimulation signal to the temporal bone for delivery by bone conduction to the cochlea for perception as a sound signal. A certain amount of electronic circuitry also is implanted with the transducer to provide power to the implanted device and at least some signal processing which is needed for converting the external electrical communications signal into the mechanical stimulation signal and mechanically driving the transducer.

SUMMARY OF THE INVENTION

[0007] Embodiments of the present invention include a middle ear implant system with a bone conduction transducer configured for fixed attachment to skull bone of a patient beneath the skin behind the ear, and for generating sound vibrations from an external communications signal received through the skin for coupling to the skull bone for bone conduction sound perception by the patient. A malleable ossicle connector has a proximal end connected to the bone conduction transducer and a distal end connected to a middle ear hearing structure of the patient so that vibrations of the bone conduction transducer are mechanically coupled to the middle ear hearing structure for middle ear sound perception by the patient. And one or more isolation springs are configured for placement at the fixed attachment of the bone conduction transducer to the skull bone to acoustically decouple

the bone conduction transducer from the skull bone to avoid bone conduction sound perception so that sound perception from the external communications signal is solely via the middle ear sound perception from vibrations coupled to the middle ear hearing structure by the ossicle connector.

[0008] In specific embodiments, the ossicle connector may have an adjustable length between the proximal end and the distal end and/or may be made of titanium. The ossicle connector may be configured to pass through a surgically created tunnel in the skull bone and/or the ossicle connector may be configured to connect to the ossicle so as to preserve a normal hearing pathway from the tympanic membrane of the patient.

[0009] Embodiments may also include an external communications component that is attached to the outer surface of the skin and configured to generate the external communications signal. In such embodiments, the external communications component may include an external vibration magnet configured to magnetically cooperate with the bone conduction transducer to couple the external communications signal through the skin. The external communications component may include an attachment surface configured for adhesive attachment to the outer surface of the skin to fixedly secure the external communications component to the outer surface of the skin. Or there may be an implant magnet fixedly attached to the skull bone near the bone conduction transducer, and an external holding magnet that is contained within the external communications component, wherein the implant magnet and the external holding magnet are configured to magnetically cooperate to fixedly secure the external communications component on the outer surface of the skin.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] Figure 1 shows anatomical structures of a typical human ear.

[0011] Figures 2A-2B show structural details of a bone conduction transducer and ossicle connector according to an embodiment of the present invention.

[0012] Figures 3A-3B show structural details of a bone conduction transducer and ossicle connector according to another embodiment of the present invention.

[0013] Figures 4A-4C show a typical surgical implantation process of a device according to an embodiment of the present invention.

[0014] Figures 5A-5B show structural details of an ossicle connector attached to a bone conduction transducer according to another embodiment of the present invention.

[0015] Figure 6 shows a side cross-sectional view of a further embodiment of the invention using a bone conduction transducer that is vibrationally isolated from the connected bone.

DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS

[0016] Embodiments of the present invention are directed to a novel arrangement of a middle ear implant system that includes a bone conduction transducer that is implanted within the soft tissue skin that lies over the skull bone of a patient. Figures 2A-2B show structural details of one specific embodiment of a middle ear implant system **200** with such a bone conduction transducer **201**--in this case, in the specific form of a titanium disc-shape housing--that is configured for implantation in the skin **207** so as to be parallel to an outer surface of the skin **207** and to the skull bone **208**.

[0017] A rigid ossicle connector **202** (e.g., made of titanium) has a proximal end **205** that is connected to the bone conduction transducer **201** that is embedded in the skin **207**. The body of the ossicle connector **202** passes through a surgically excavated tunnel **210** in the skull bone **208** and the distal end **204** of the ossicle connector **204** connects to an ossicle **211** in the middle ear **209** of the patient so that vibrations of the bone conduction transducer **201** are mechanically coupled to the ossicle **211** for perception by the patient as sound. At the same time, an arrangement as shown also preserves a normal hearing pathway from the tympanic membrane of the patient for normal sound perception.

[0018] The ossicle connector **202** shown also includes an adjustment mechanism **206** such as a zip-connector style mechanism that allows the surgeon to adjust the length of the ossicle connector **202** when implanting the device. In addition or alternatively, the length of the ossicle connector **202** may also include one or more strain reliefs (such as one or more spring windings).

[0019] Figures 3A-3B show structural details of a bone conduction transducer and ossicle connector according to another embodiment of the present invention that uses an active external component **309** and wherein the bone conduction transducer **301** is a permanent magnet embedded in the skin **308** over the skull bone **307**. The proximal end **305** of the ossicle connector **300** is connected to the bone conduction transducer **301** in the skin **308**. The body of the ossicle connector **300** passes through a surgically excavated tunnel **310** in the skull bone **307** (via adjustment mechanism **306**) and the distal end **304** of the ossicle connector **300** connects to an ossicle in the middle ear **103**.

[0020] An external active vibration component **309** is attached to the outer surface **310** of the skin **308** and configured to generate the sound vibrations for the bone conduction transducer **301**. Specifically, the external active vibration component **309** contains an external vibration magnet **311** (actively driven by surrounding electromagnetic drive coils controlled by an external signal processor) that magnetically cooperates with the magnetic bone conduction transducer **301** to couple the sound vibrations through the skin **308**. The external active vibration component **309** is fixedly attached to the outer surface **310** of the skin **308** via any known attachment mechanism such as by an attachment surface configured for adhesive attachment to the outer surface of the skin. Or there may be a separate implant magnet fixedly attached to the skull bone **307**, and a separate external holding magnet that is contained within the external active vibration component **309**, wherein the implant magnet and the external holding magnet magnetically cooperate to fixedly secure the external active vibration component **309** on the outer surface **310** of the skin **308**.

[0021] Figures 4A-4C show a typical surgical implantation process of a device according to an embodiment of the present invention. First, as shown in Fig. 4A, the

surgeon makes an incision through the skin behind the ear **401** and uses surgical retractors **402** to expose the underlying skull bone **403**. The surgeon then excavates (e.g., possibly using a robotic drill) an access tunnel **404** into the middle ear **103**. The distal end **204** of the ossicle connector **202** is then connected to one of the exposed ossicles **405** (e.g., incus short process) leaving the female portion of the adjustment mechanism **206** protruding outside the access tunnel **404**, Fig. 4B. The surgeon then fits the male portion of the adjustment mechanism **206** in with the proximal end **205** of the ossicle connector **202** connected to the bone conduction transducer **201** that is slid into position in the skin **401**, Fig. 4C, and the incision is closed.

[0022] Figures 5A-5B show structural details of an ossicle connector **501** with a proximal end **505** attached to a bone conduction transducer **500** (e.g., Med-El's BoneBridge device) according to another embodiment of the present invention. A distal end **504** of the ossicle connector **501** connects to an ossicle in the middle ear **103**. The ossicle connector **501** may include a stress relief loop **502** somewhere along its length, and may be made of titanium, gold, or other stiff biocompatible material. The bone conduction transducer **500** is connected to the adjacent skull bone **208** by flexible connecting wings **506** and bone screws **507**. This allows the vibrations of the bone conduction transducer **500** (e.g., responsive to communication signals from an external signal processor device, not shown) to be coupled by the ossicle connector **501** through the skin **207** in a mastoidectomy to the connected ossicle in the middle ear **103**. At the same time, the separate natural acoustic hearing pathway via the tympanic membrane **102** is preserved.

[0023] Figure 6 shows a side cross-sectional view of a further embodiment of the invention using a bone conduction transducer **500** such as the one in Figure 5, but which is vibrationally isolated from the connected skull bone **208** by isolation springs **601**. The isolation springs **601** can be made of silicone and are structurally separate from the conventional bone conduction transducer **500**. Because the vibrations from the bone conduction transducer **500** are acoustically uncoupled from the skull bone **208** that the bone conduction transducer **500** is attached to, their sole path is via the ossicle connector **501** located in a surgically excavated tunnel **602** in the skull bone **208** below the bone conduction transducer **500** and the connected ossicle at the distal end. Specific such

arrangements may be most useful at lower sound frequencies, for example, below 1000 Hz. And it may be useful to provide the isolation springs **601** as part of a surgical kit of multiple sets of springs with different elastic and acoustic properties for the surgeon to select the optimal specific set before or doing implantation. Of course, the distal end of the ossicle connector **501** in such applications may specifically be connected to other anatomical hearing structures than an ossicle in the middle ear, for example, the round window membrane, the oval window membrane, etc.

[0024] Such a modular system of a conventional bone conduction transducer **500**, ossicle connector **501**, and optional isolation springs **601** can usefully cover the entire range of conductive hearing loss and partial sensorineural hearing loss. By using the isolation springs **601** together with an ossicle connector **501**, the arrangement acts as a middle ear implant (but with greater power from the bone conduction transducer **500** than with an FMT implanted in the middle ear). Without the ossicle connector **501** and isolation springs **601**, the arrangement acts as a conventional bone conduction hearing implant system.

[0025] Although various exemplary embodiments of the invention have been disclosed, it should be apparent to those skilled in the art that various changes and modifications can be made which will achieve some of the advantages of the invention without departing from the true scope of the invention.

CLAIMS

What is claimed is:

1. A middle ear implant system comprising:
 - a bone conduction transducer configured for:
 - i. fixed attachment to skull bone of a patient beneath the skin behind the ear,
 - and
 - ii. generating sound vibrations from an external communications signal received through the skin for coupling to the skull bone for bone conduction sound perception by the patient;
 - a malleable ossicle connector having a proximal end connected to the bone conduction transducer and a distal end connected to a middle ear hearing structure of the patient so that vibrations of the bone conduction transducer are mechanically coupled to the middle ear hearing structure for middle ear sound perception by the patient; and
 - one or more isolation springs configured for placement at the fixed attachment of the bone conduction transducer to the skull bone to acoustically decouple the bone conduction transducer from the skull bone to avoid bone conduction sound perception so that sound perception from the external communications signal is solely via the middle ear sound perception from vibrations coupled to the middle ear hearing structure by the ossicle connector.
2. The system according to claim 1, wherein the ossicle connector has an adjustable length between the proximal end and the distal end.
3. The system according to claim 1, wherein the ossicle connector is made of titanium.
4. The system according to claim 1, further comprising:
 - an external communications component configured for attachment to the outer surface of the skin and generation of the external communications signal.
5. The system according to claim 4, wherein the external communications component

includes an external vibration magnet configured to magnetically cooperate with the bone conduction transducer to couple the external communications signal through the skin.

6. The system according to claim 4, wherein the external communications component includes an attachment surface configured for adhesive attachment to the outer surface of the skin to fixedly secure the external communications component to the outer surface of the skin.

7. The system according to claim 4, further comprising:
an implant magnet fixedly attached to the skull bone near the bone conduction transducer; and
an external holding magnet contained within the external communications component, wherein the implant magnet and the external holding magnet are configured to magnetically cooperate to fixedly secure the external communications component on the outer surface of the skin.

8. The system of claim 1, wherein the ossicle connector is configured to pass through a surgically created tunnel in the skull bone.

9. The system according to claim 1, wherein the distal end of the ossicle connector is configured to connect to the ossicle so as to preserve a normal hearing pathway from the tympanic membrane of the patient.



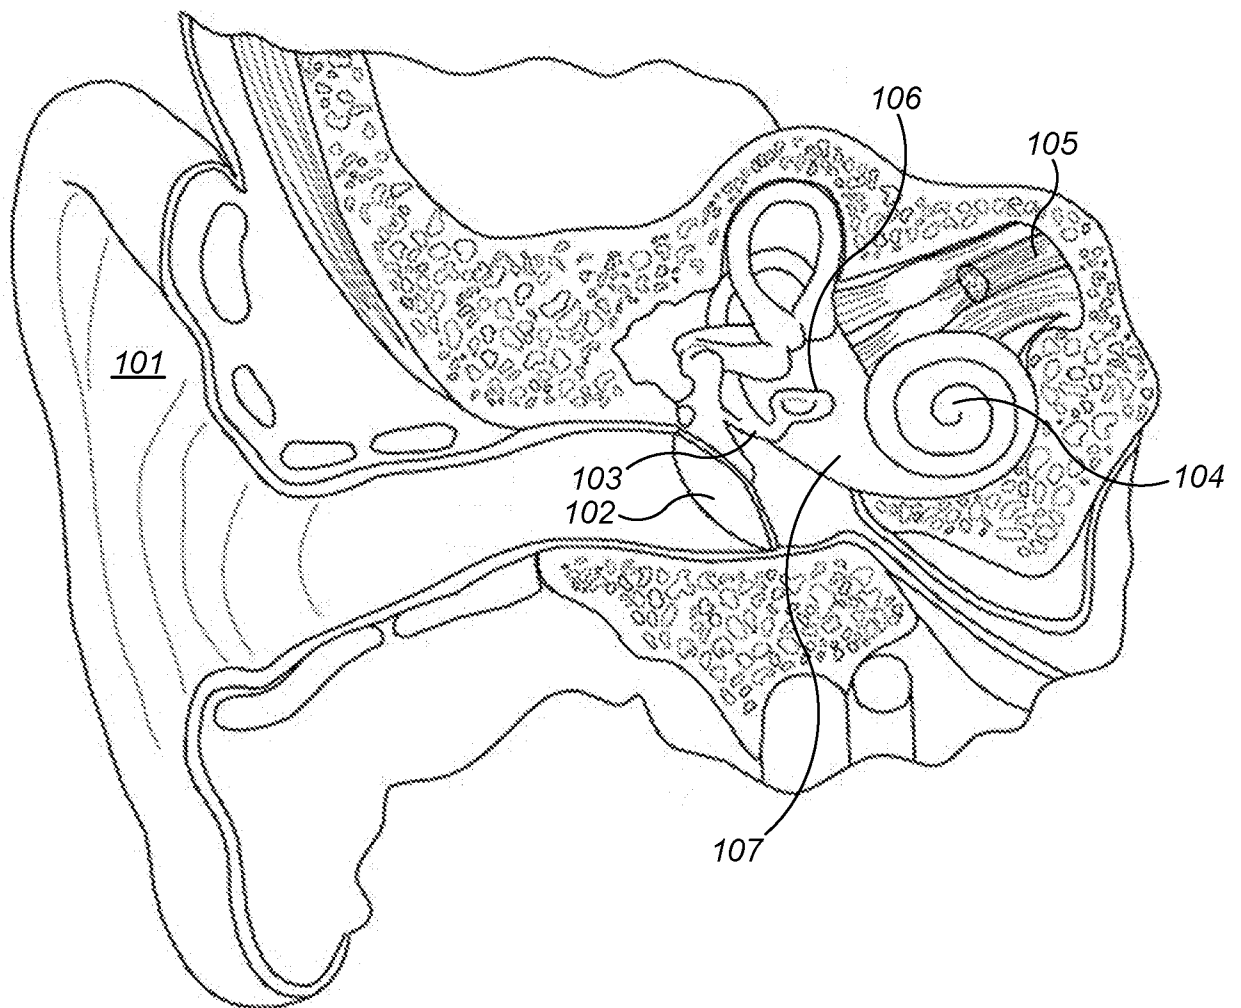


FIG. 1

2 / 7

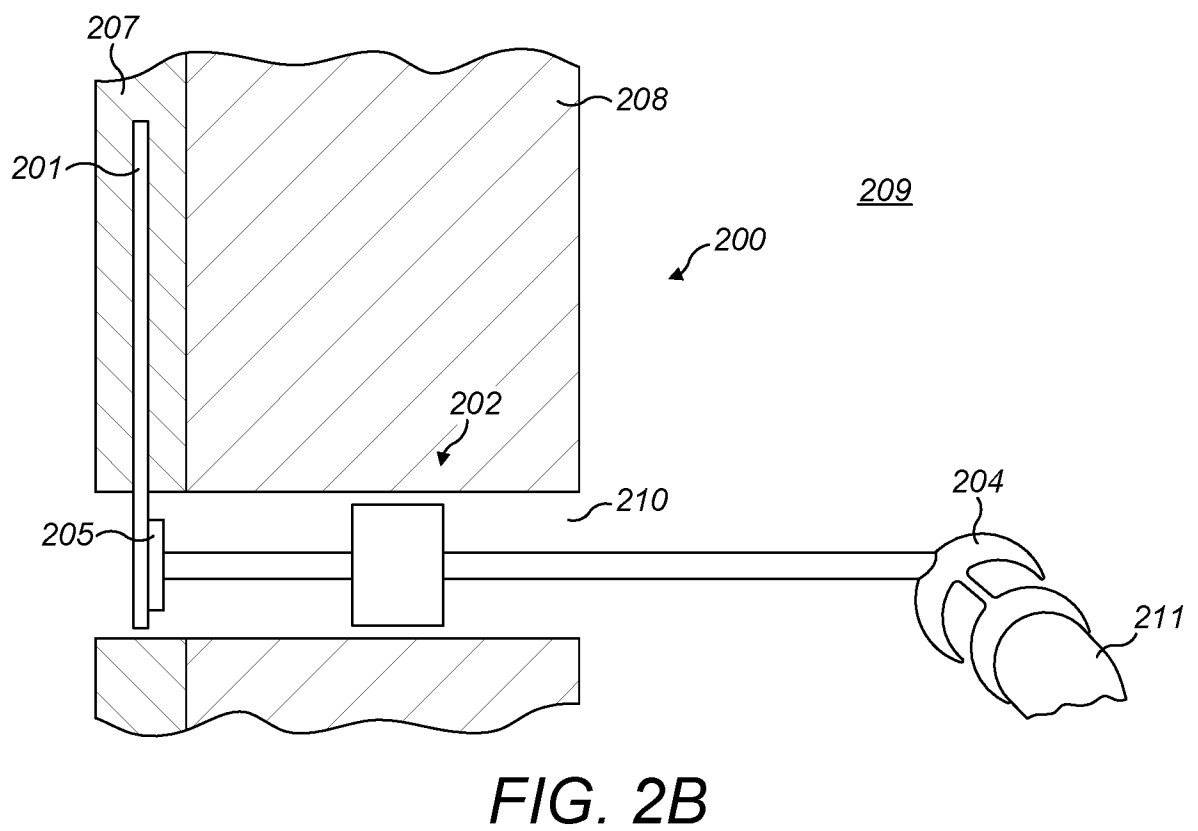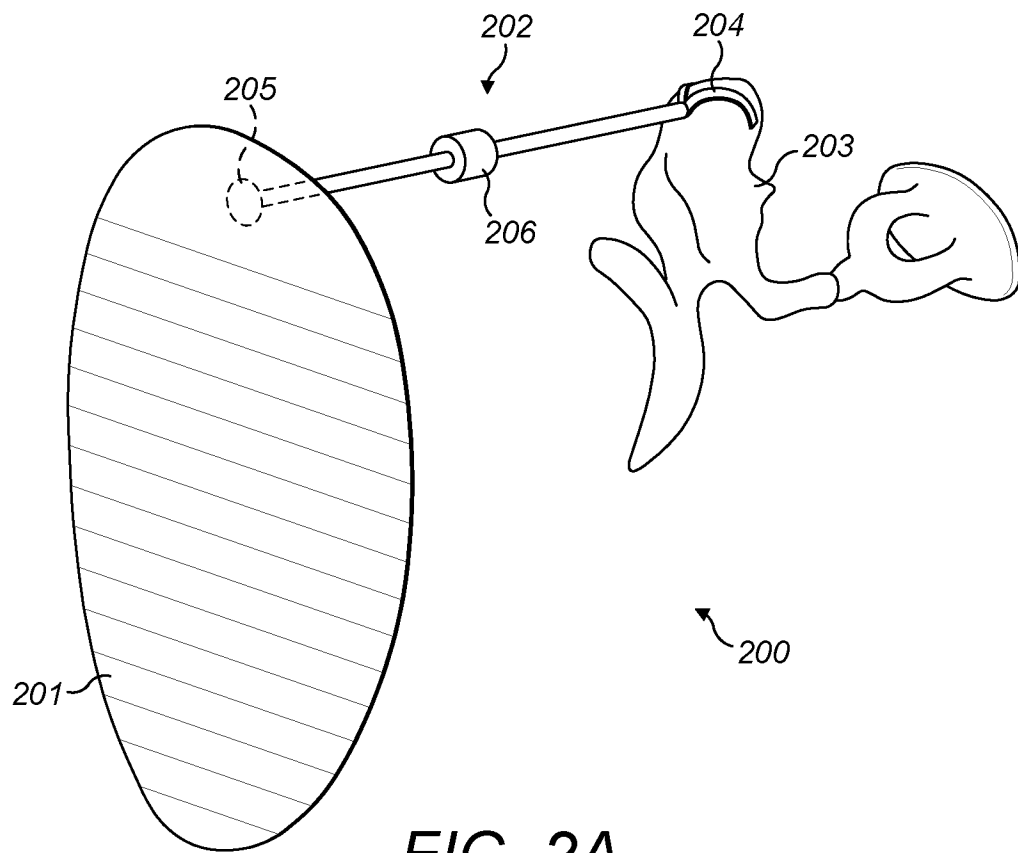

3 / 7

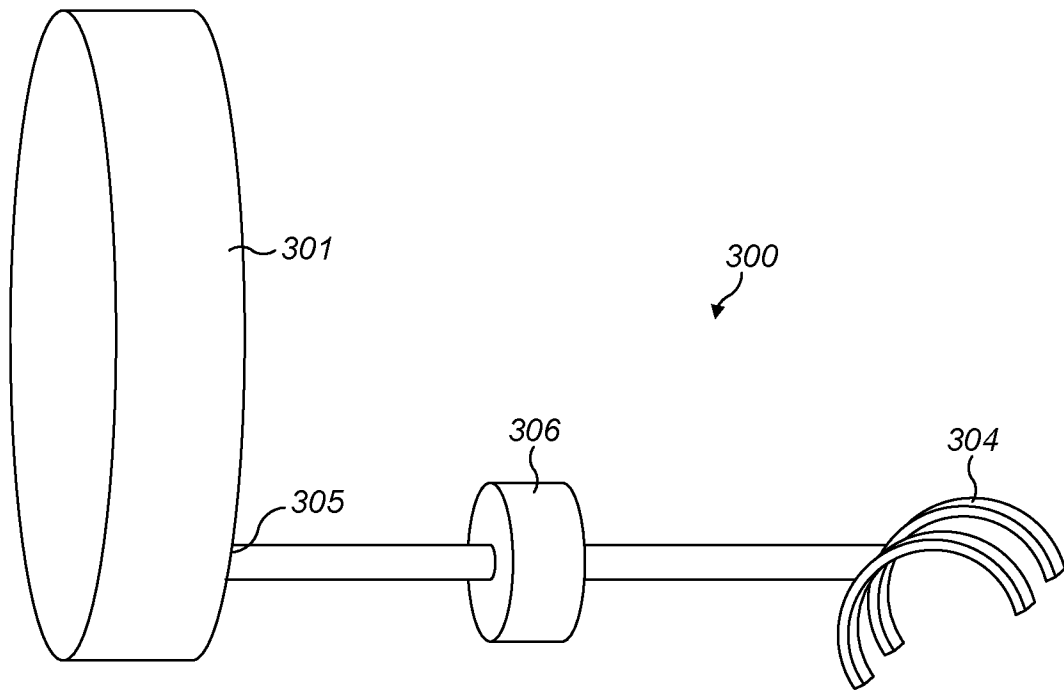


FIG. 3A

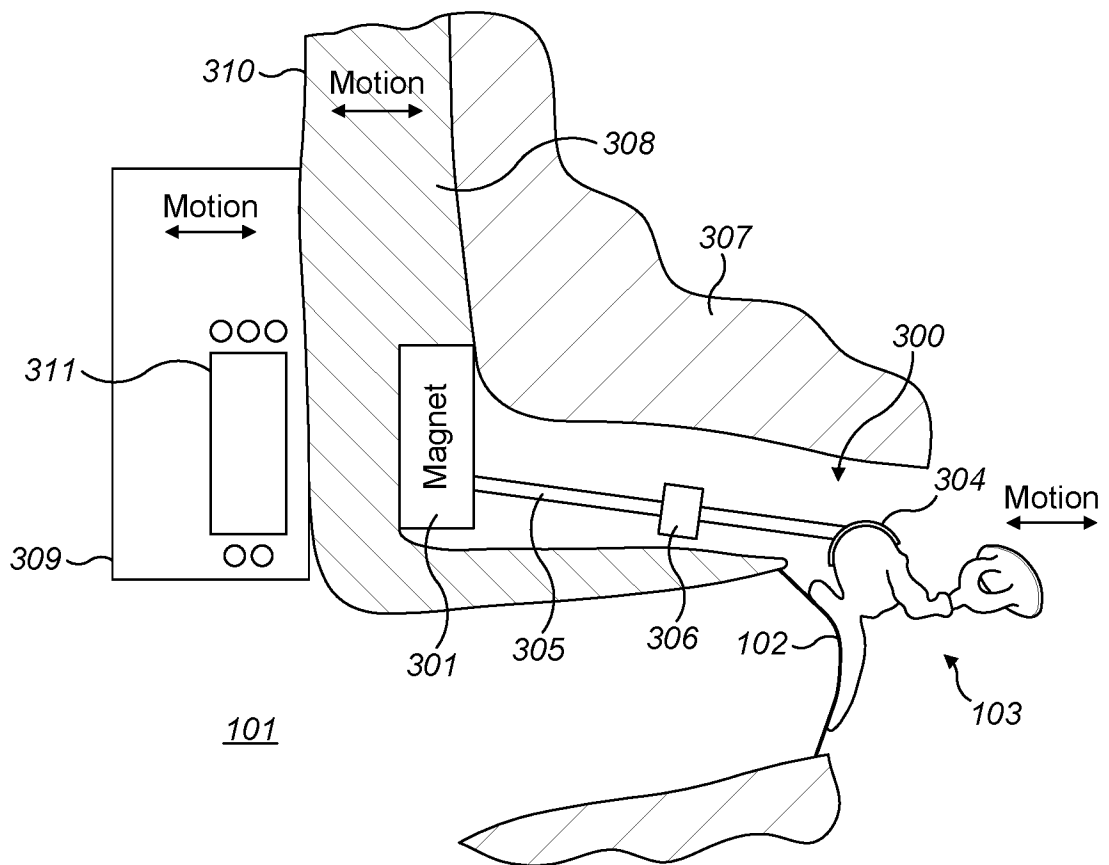


FIG. 3B

4 / 7

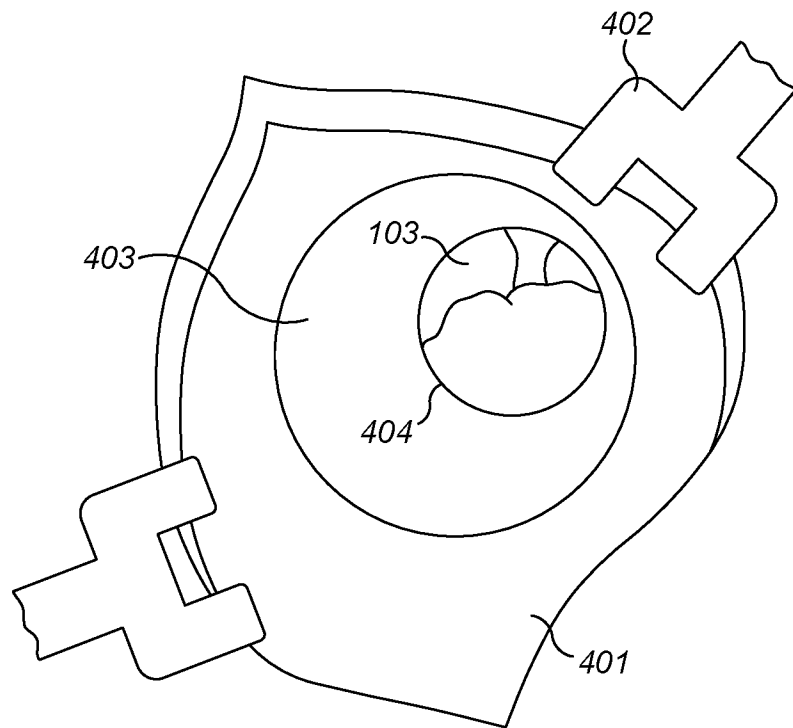


FIG. 4A

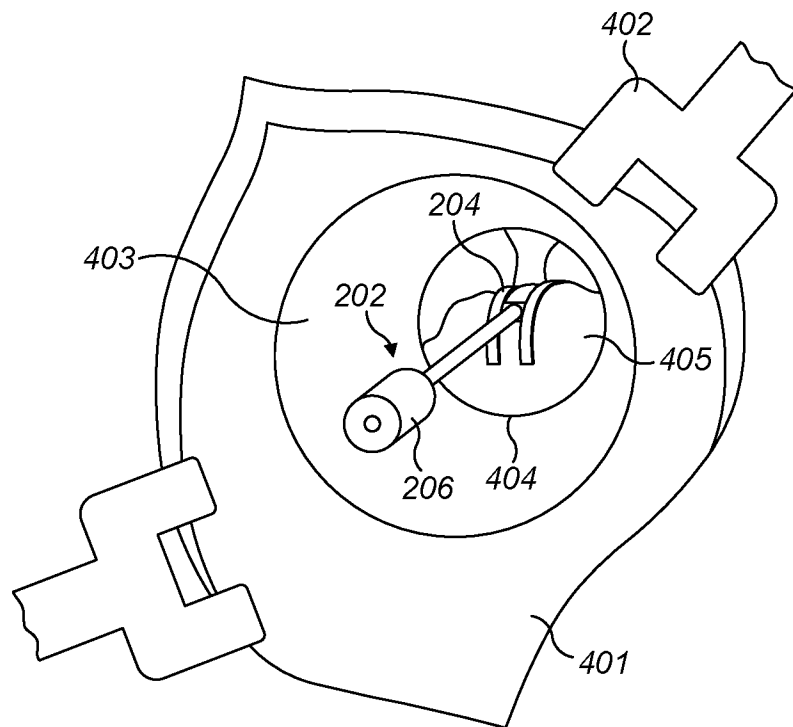


FIG. 4B

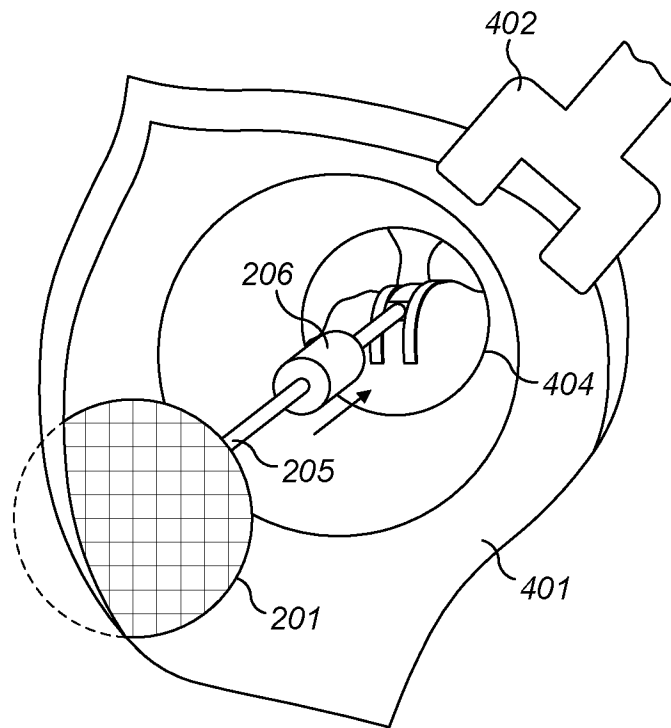


FIG. 4C

6 / 7

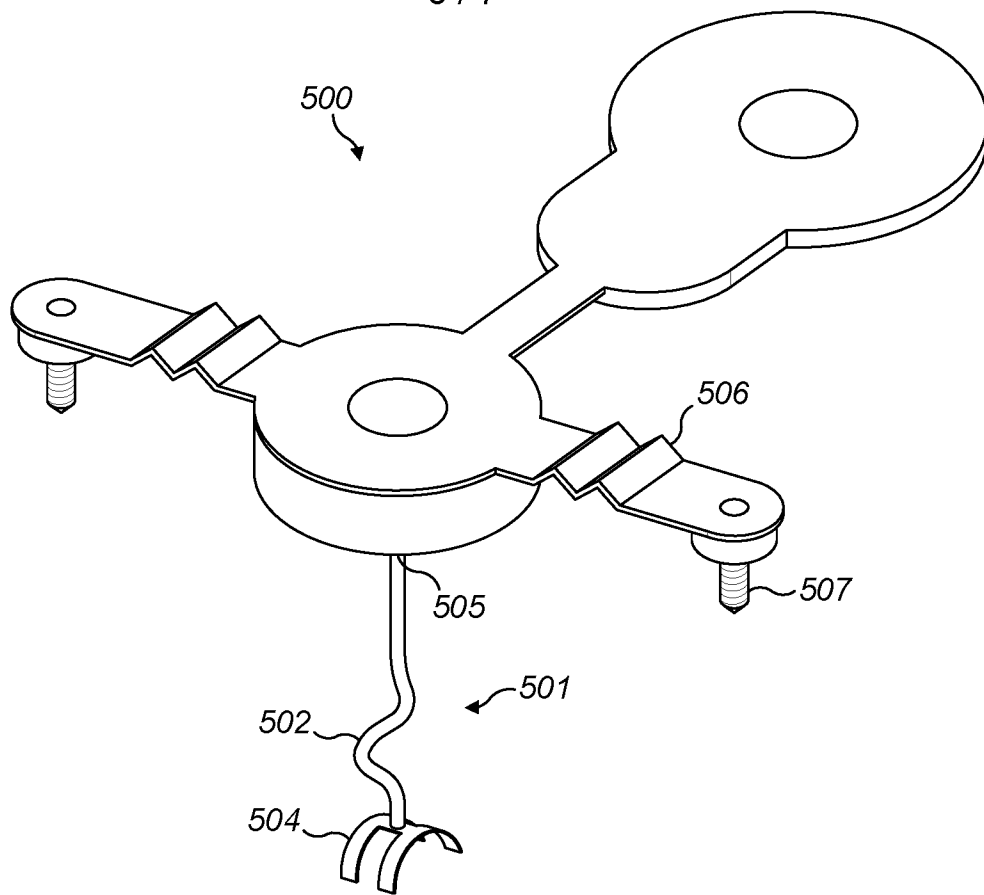


FIG. 5A

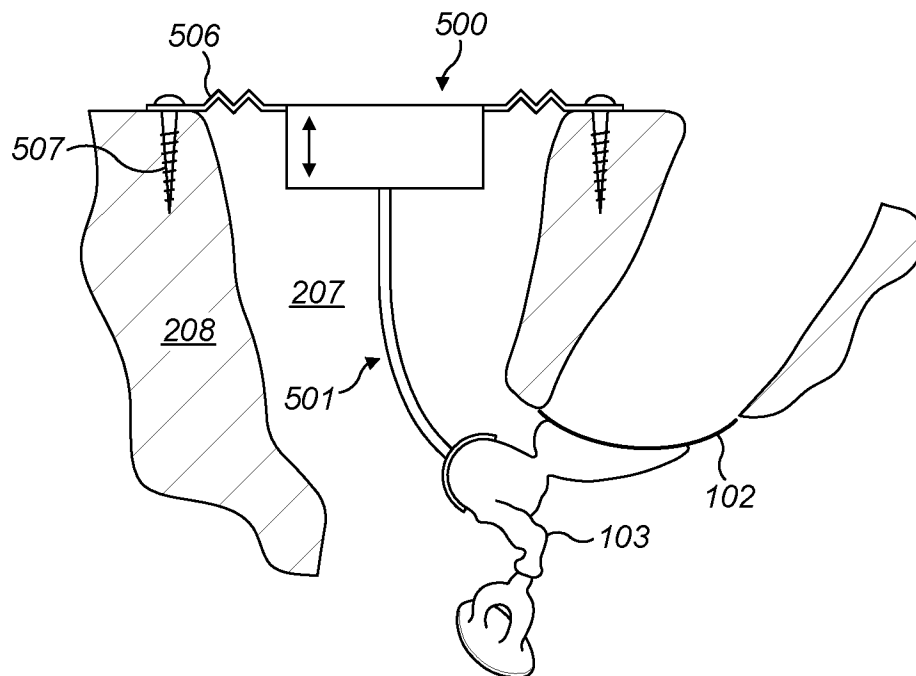


FIG. 5B

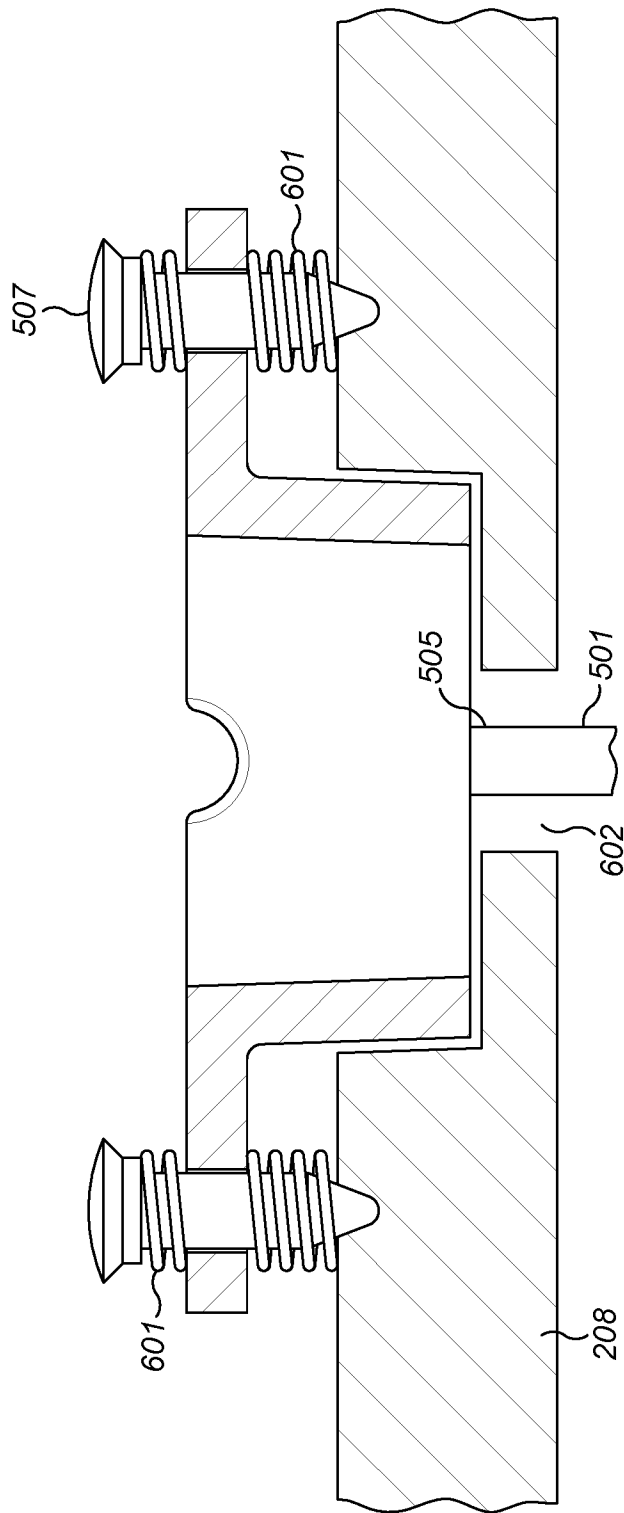


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US19/52331

A. CLASSIFICATION OF SUBJECT MATTER

IPC - H04R 25/00 (2019.01)

CPC - H04R 25/45, 25/60, 25/402, 25/604

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 9,113,277 B2 (BALL, G. et al.) 18 August 2015, figures 9A-C, column 8, lines 9-16, 19-20, 25	1-9
A	US 5,015,224 A (MANIGLIA, A. J.) 14 May 1991, figure 5, column 11, lines 10-11	1-9
A	US 5,624,376 A (BALL, G. R. et al.) 29 April 1997, figures 10, 15, column 11, lines 7, 11-12, 20-21	1-9
A	US 4,606,329 A (HOUGH, J. V. D.) 19 August 1986, figure 3, column 5, lines 47-50, column 6, lines 65-68	1-9
A	US 7,722,524 B2 (LUPIN, A. J. et al.) 25 May 2010, figure 2, column 7, lines 58-59, column 8, lines 2-4	1-9

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"D" document cited by the applicant in the international application

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 November 2019 (12.11.2019)

Date of mailing of the international search report

03 DEC 2019

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

Telephone No. PCT Helpdesk: 571-272-4300