



(22) Date de dépôt/Filing Date: 2011/10/28

(41) Mise à la disp. pub./Open to Public Insp.: 2012/09/03

(45) Date de délivrance/Issue Date: 2023/09/26

(30) Priorité/Priority: 2011/03/03 (CA2,733,110)

(51) Cl.Int./Int.Cl. *G07F 17/24* (2006.01),
G06K 7/10 (2006.01), *G06Q 20/18* (2012.01),
G06Q 20/32 (2012.01), *G06Q 20/34* (2012.01)


(72) Inventeurs/Inventors:
MACKAY, GEORGE ALLAN, CA;
CHAUVIN, GREGORY EMILE, CA

(73) Propriétaire/Owner:
J.J. MACKAY CANADA LIMITED, CA

(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : PARCOMETRE AVEC METHODE DE PAIEMENT SANS CONTACT

(54) Title: PARKING METER WITH CONTACTLESS PAYMENT

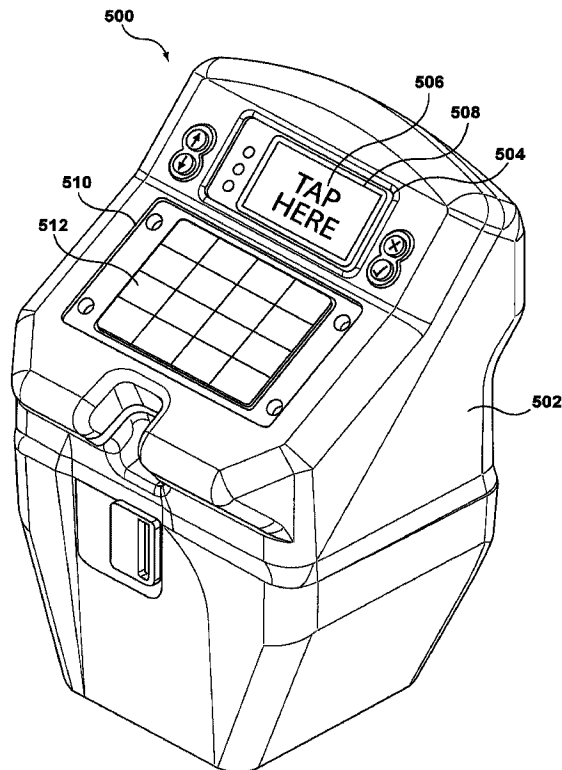

(57) **Abrégé/Abstract:**

A parking meter is described that comprises components for providing parking meter functionality and a display for displaying parking information and a metal housing for protecting the parking meter components from an environment that has a display aperture through which the display is visible. The parking meter also comprises an antenna for a contactless payment reader arranged in or on the parking meter in close proximity to the display.

ABSTRACT

A parking meter is described that comprises components for providing parking meter functionality and a display for displaying parking information and a metal housing for protecting the parking meter components from an environment that has a display aperture through which the display is visible. The parking meter also comprises an antenna for a contactless payment reader arranged in or on the parking meter in close proximity to the display.

PARKING METER WITH CONTACTLESS PAYMENT

TECHNICAL FIELD

The present disclosure relates to parking meters and in particular to parking meters having contactless payment options.

5 BACKGROUND

Parking meters come in many shapes and sizes but are generally divided into two main types or classes: multi-space parking meters which are typically larger devices capable of managing the parking payment and control for typically six or more, or possibly even hundreds of parking spaces; and, single-space parking meters which are
10 typically small devices capable of managing the parking payment and control of a single parking space, but also sometimes additional spaces, such as two, four, or six spaces which are located in close proximity to the parking meter.

For example, Figure 1 depicts a conventional single space parking meter 100 installed on a pole 102. Single space parking meter mechanisms are typically installed
15 in a protective housing on a pole 102 near a parking space. The protective housing components, which are directly exposed to the elements and the public, are traditionally separate from the actual parking meter mechanism (not shown). The protective housing components of previous single space parking meters 100 typically comprise a lower housing 104 that receives a removable parking meter mechanism. A cover cap 106 is
20 placed over the parking meter mechanism and secured to the lower housing 104. The cover cap 106 may comprise a semi-circular opening 110, covered by a transparent material through which a display of the parking meter mechanism is visible. In some previous single space parking meters the display is set back from the exterior surface of the cover cap 106, or the transparent material covering the opening. The lower housing
25 104 is typically secured to a coin vault 108 for storing coins received during operation of the parking meter 100. The coin vault 108 may be secured to the pole 102. The parking meter 100 is operated by inserting payment, either in the form of coins or payment cards such as credit cards, chip cards or electronic purse cards, into the parking meter 100

which then displays and counts down the purchased amount of parking time.

Parking meters are often located in unattended areas, and as such vandalism, tampering and theft are of concern. The protective housing, which typically comprises the lower housing 104 and the cover cap 106, provides protection for the components of the parking meter mechanism from vandalism, tampering and theft, as well as protection from the environment.

Numerous credit card companies have now issued contactless payment cards which allow the card holder to make payment at devices with the appropriate contactless card readers. Previous parking meters have employed contactless card readers that allowed receiving payment from a card without the need of the card reader coming into contact with the payment card. However, previous parking meters have incorporated the contactless card reader as a separate component or with other payment means, such as the coin chute. Alternatively, the card reader could replace other payment means entirely. Although the incorporation of contactless card readers in parking meters may provide flexibility in the payment options available to a user of the parking meter, the position of the contactless card reader within the parking meter provided unsatisfactory user interactions. For example, when a contactless card reader is positioned away from a display of a parking meter, it has been difficult to provide clear instructions using the display indicating where to make payment with the contactless card reader. In addition, a parking meter having a contactless card reader positioned away from a display may require a separate or additional opening in the housing of the parking meter, which may lead to more costly, complex and time consuming manufacturing of the housing, and may make the parking meter more susceptible to vandalism, tampering or theft.

There is therefore a need for a parking meter having an improved implementation for contactless payments.

SUMMARY

There is disclosed a parking meter comprising components for providing parking

meter functionality; a display for displaying parking meter information; a metal housing for protecting the parking meter components from an environment, the housing comprising a display aperture through which the display is visible; and an antenna for a contactless payment reader arranged in or on the parking meter in close proximity to the display.

There is further disclosed a removable parking meter mechanism comprising components for providing parking meter functionality; a display for displaying parking information; and an antenna for a contactless payment reader arranged in close proximity to the display.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Further features and advantages will become apparent from the following detailed description, taken in combination with the appended drawings, in which:

Figure 1 is a schematic showing an installed previous single space parking meter;

15 Figure 2 depicts illustrative components of a single space parking meter including contactless payment means;

Figure 3 depicts illustrative components of a further single space parking meter including contactless payment means;

20 Figure 4 depicts illustrative components of a further single space parking meter including contactless payment means;

Figure 5 depicts illustrative components of a further single space parking meter including contactless payment means;

Figure 6 depicts illustrative components of a further single space parking meter including contactless payment means;

25 Figure 7 depicts illustrative components of a further single space parking meter

including contactless payment means;

Figure 8 depicts illustrative components of a multispace parking meter including contactless payment means; and

Figure 9 depicts an illustrative contactless reader antenna.

5 DETAILED DESCRIPTION

Figure 2 depicts illustrative components of a single space parking meter. The single space parking meter 200 comprises a lower housing 202, a cover housing 210 and a removable parking meter mechanism 230. The parking meter mechanism 230 may be partially received within the lower housing 202, which is typically secured to a coin vault (not shown) that is mounted on a pole (not shown) when in use.

When the parking meter 200 is assembled, that is, the parking meter mechanism 230 is at least partially placed in the lower housing 202 and the cover housing 210 is secured and/or locked to the lower housing 202, the parking meter mechanism 230 is enclosed in a protective housing and protected from the environment, vandalism, tampering, theft or other unauthorized access. When assembled, the parking meter 200 includes a display opening 240 through which a display 242 of the parking meter mechanism 230 is visible. The parking meter mechanism 230 may include a contactless payment reader for providing payment using a contactless payment card issued by the parking operator or by a bank or financial institution under one of the credit card brands, or a card conforming to the ISO 14443 standard, although other types of near field communication (NFC) are possible such as an NFC enabled mobile phone, smartphone, wrist watch, or other appropriate tag, or token.

The contactless payment reader comprises a reader module (not visible) comprising electronics for controlling the operation of the contactless payment reader. The reader module is coupled to a contactless reader antenna 250. The contactless reader antenna 250 may be provided as a thin flexible ring of copper wiring around the perimeter of a viewing area of the display. The contactless reader antenna 250 is depicted by a dashed line in Figure 2 as it is located behind the display 242. The

contactless reader may be provided on a single board or component that includes both the contactless reader module and the contactless reader antenna 250. Alternatively, the contactless reader module may be separate from the contactless reader antenna 250 and connected to it by a wire or wires. The contactless reader module is in communication with electronics of the parking meter mechanism responsible for the overall operation of the parking meter. Alternatively, the contactless reader module may be incorporated into the electronics of the parking meter mechanism responsible for the overall operation of the parking meter.

When a contactless payment card, or other contactless payment device, is placed in close proximity to the contactless reader antenna 250, the contactless reader module can read information from the contactless payment card, which can be provided to the electronics of the parking meter mechanism in order to receive payment. In order to process the payment from the contactless payment card, the electronics of the parking meter mechanism may communicate with a remote server using wired or wireless communication technologies in order to receive authorization of the transaction.

Previous parking meters have included a contactless type payment method using a contactless payment reader. However, there were disadvantages associated with the placement of contactless payment readers, or more particularly the contactless reader antenna, within previous parking meters. For example, the difficulties included difficulty in providing adequate space to place a contactless payment reader as well as difficulty in providing instructions to a user, while still offering other payment means. Having the contactless reader antenna located away from the display, as in previous parking meters, makes it more difficult to provide instructions to a user for where to place the contactless payment card for payment.

The parking meter mechanism 230 includes a contactless payment reader that has a contactless reader antenna 250 located directly behind the display 242, which allows for payment by way of a contactless payment card or device (not shown). The display 242 is located in close enough proximity to the exterior of the parking meter 200

such that the contactless payment reader is able to adequately read contactless payment cards or devices placed over, or in close proximity to, the display 242, and so the contactless reader antenna 250. The maximum read distance between the contactless payment card or device and the contactless reader antenna is typically a function of the size of the contactless reader antenna 250, the presence of any material, and its nature if present, between the contactless reader antenna and the contactless payment card or device, and other operating conditions of the parking meter 200. The distance between the contactless reader antenna and the contactless payment card or device, as well as properties of any intervening material, may affect the probability of successfully reading the contactless payment card or device. Different applications may have different acceptable reading success rates and as such, may have varying acceptable distances between the contactless reader antenna and the contactless payment card or device. A high percentage success rate for reading of contactless payment cards or devices by the contactless payment reader through the display 242 can be accomplished even with a double layer of a clear protective cover placed over the display 242. Since the contactless reader antenna 250 is placed behind the display 242, which is significantly more transparent to the wireless signals used by the contactless payment reader than housing components of the parking meter 200, which are typically made of metal, no additional openings or apertures need to be included in the housing components to provide adequate operation of the contactless payment reader. Thus, by placing the contactless payment reader behind the display 242, in addition to providing a convenient location for placing the contactless payment device to initiate payment, it is possible to provide housing components that provide greater security and environmental protection.

When making payment using the contactless payment reader, the display 242 may be used to display a logo, graphic and/or directions such as "Tap Here" or simply "Tap" as depicted, providing clear and convenient payment instructions to the user. The contactless reader antenna 250 is located sufficiently close to the display so that a user placing the contactless payment card or device in the vicinity of the display 242 as instructed by the display will have an acceptable success rate for reading the contactless payment card or device.

By placing the contactless reader antenna 250 behind the display 242, the amount of space required to offer this method of payment may be reduced, as the need of an additional opening or aperture in the housing components is eliminated. In addition, the display 242 and possible protective covering of the display 242 provide protection and ruggedness so as to allow the contactless payment reader to be deployed in unattended single space parking meters without the need for additional protection. Additionally, by placing the contactless reader antenna behind the display 242, the physical packaging of the parking meter mechanism 230 may be reduced to provide more freedom in the design of the parking meter 200, possibly allowing a smaller more appealing single space parking meter, which may be desirable given the large number of single space parking meters that may be present on a single street or block.

Placing the contactless reader antenna 250 behind the display 242 as described above may work acceptably well if the display 242 does not have a sufficient amount of metal to significantly impeded the RF signals. However, some displays, for example colour displays, may have a metal backing, impeding the transmission of RF signals.

Figure 3 depicts illustrative components of a single space parking meter. The parking meter 300 is similar to the parking meter 200 described above; however, the contactless reader antenna 350 is placed on the front of the display 242. The contactless reader antenna 350 may be placed around the perimeter of an active section of the display that displays information in order to prevent obscuring the view of the display. The contactless reader antenna 350 on the front of the display 242 may be in sufficiently close proximity to the display 242 so that a contactless payment card or device placed in the vicinity of the display 242 as instructed will have an acceptable reading success rate.

The opening 240 in the parking meter housing, through which the display 242 is visible when the parking meter 300 is assembled, also allows the transmission and reception of the required RF signals at the contactless reader antenna 350 for the operation of the contactless payment. The opening 240 is sized so that the RF signals

can pass through a non-metallic material used to seal the opening 240. As a result, the RF signals do not need to pass through the metallic housing, providing improved operation of the contactless payment reader.

Figure 4 depicts illustrative components of a single space parking meter. The parking meter 400 is similar to the parking meters 200 and 300 described above; however, the contactless reader antenna 450 is placed on the interior of a material used to seal or cover the opening 240 in the parking meter housing through which the display 242 is visible. Typically, the external housing of the parking meter 400 is made of metal, which attenuates RF signals. The opening 240 is typically sealed using a transparent or semi-transparent material such as Lexan. The material used to enclose the opening 240 is typically transparent or semi-transparent to RF signals.

As depicted in Figure 4, the contactless reader antenna 450, represented by a dashed line, is placed on the interior side of the material sealing the opening 240. The cover 210 may need to be separated from a lower portion 202 of the parking meter 400 in order to remove the parking meter mechanism 230. The contactless reader antenna 450 may be attached to the contactless reader module of the removable parking meter mechanism 230 by a detachable connection 452, 454. As such, when removing the cover 210, the contactless reader antenna 450 can be detached from the removable parking meter mechanism 230 and then reattached when assembling the parking meter 400.

Figure 5 depicts illustrative components of a single space parking meter. The parking meter 500 comprises a meter housing 502 that encloses a parking meter mechanism and protects it from the environment and vandalism. The meter housing 502 is typically made out of a metal or metal alloy and comprises one or more apertures providing windows to internal components, including a solar panel opening 510 through which a solar panel 512 may be visible. As depicted, the meter housing 502 includes a display opening 504 through which a display 506 is visible when the parking meter 500 is assembled. The display opening 504 in the metal housing 502 is typically sealed with a transparent or semi-transparent protective material such as Lexan. The parking meter

500 may include a solar panel opening 510 in the housing 502 in which a solar panel 512 can sit, or through which a solar panel is visible.

5 The display 506 is located behind the display opening 504 so that it is viewable when the parking meter 500 is assembled. The display 506 includes a contactless reader antenna 508 surrounding a perimeter of the display 506. The reader antenna 508 is located within the display opening 504, providing a transmission path between the antenna 508 and the contactless payment device that is not impeded by the metal of the meter housing 502. Although described as being located around a perimeter of the display 506, it is contemplated that the contactless reader antenna 508 could be located
10 in different locations in or on the parking meter and arranged in sufficiently close proximity to the display 506 so that a contactless payment device placed in the vicinity of the display 506 has an acceptable success rate for reading the contactless payment device.

15 Figure 6 depicts illustrative components of a single space parking meter. The parking meter 600 comprises a meter housing 602 that encloses a parking meter mechanism and protects it from the environment and vandalism. The meter housing 602 is typically made out of a metal or metal alloy and comprises one or more apertures providing windows to internal components. As depicted, the meter housing 602 includes an opening 604 through which a display 606 is visible when the parking meter
20 600 is assembled. The opening 604 in the metal housing 602 is sized such that the display 606 is visible, and a section which incorporates a plurality of buttons 614 for controlling the parking meter 600 is exposed.

25 The display 606 is located behind the opening 604 so that it is viewable when the parking meter 600 is assembled. The display 606 includes a contactless reader antenna 608 surrounding a perimeter of the display 606. The reader antenna 608 is located within the opening 604 which is covered by a material providing a low attenuation of RF signals, providing a transmission path between the antenna 608 and the contactless payment device that is not impeded by the metal of the meter housing 602.

Although described as being located around a perimeter of the display 606, it is contemplated that the antenna 608 could be located in different locations in or on the parking meter 600 and arranged in sufficiently close proximity to the display 606 so that a contactless payment device placed in the vicinity of the display 606 has an acceptable success rate for reading a contactless payment device.

Figure 7 depicts illustrative components of a single space parking meter. The parking meter 700 is substantially similar to parking meter 600; however, the contactless reader antenna 708a is depicted as being located on an interior side of the material used to seal or cover the opening 604 and in close proximity to the display 606. Additionally or alternatively, a second contactless reader antenna 708b may be included on the interior side of the material used to seal or cover the opening 604 and surrounding the input components (i.e., buttons) 614 in close proximity to the display 606. With the contactless reader antenna 708a or 708b located on the interior side of the material used to seal or cover the opening 604, it may be connected to the electronics of the parking meter mechanism using a detachable connection.

Although described as being located around a perimeter of the display 606, it is contemplated that the antenna 708a could be located in different locations in or on the parking meter 700 and arranged in sufficiently close proximity to the display 606 so that a contactless payment device placed in the vicinity of the display 606 has an acceptable success rate for reading a contactless payment device. Likewise, although described as being located around the input components 614, it is contemplated that the antenna 708b could be located in different locations in or on the parking meter 700 and arranged in sufficiently close proximity to the display 606 so that a contactless payment device placed in the vicinity of the display 606 has an acceptable success rate for reading a contactless payment device.

Various possible positions of the antenna within the opening of the parking meter have been described above with reference to Figure 7. Although the possible positions were described with regards to a single opening in the parking meter, a contactless reader antenna may also be positioned within or about a second opening separate from

the opening for the display and still be in sufficiently close proximity to the display to facilitate clear payment instructions. For example, and with regards to Figure 5, the contactless reader antenna could be placed in proximity to the solar panel opening 510, on the solar panel 512, on a cover of the solar panel opening 510, over the top surface of the solar panel 512, or a combination of one or more of the foregoing.

Alternatively, the contactless reader antenna could be placed on an exterior side of the parking meter, for example, over a protective cover of the display opening 504 or the solar panel opening 510. If the contactless reader antenna is placed on the exterior of the parking meter, it may be located at the same height, or slightly elevated relative to the metal housing surrounding the opening. The contactless reader antenna may be protected by a plastic bezel that encapsulates the contactless reader antenna and securely attaches to the parking meter.

Although the solar panel opening is described above as an opening, it may be provided by an indentation such that a solar panel and covering may rest flush with the rest of the housing. If the solar panel opening is provided by an indentation in the metal housing, the properties of the contactless reader antenna and/or the contactless reader module may be adjusted in order to account for the location of the metal.

Figure 8 depicts illustrative components in a multispace parking meter. The multispace parking meter 800 provides metering functionality to a plurality of parking spaces. The multispace parking meter 800 may be a pay and display type meter in which payment is made by a user and a printed ticket is displayed on the user's vehicle. Alternatively, the multispace meter 800 may be a pay by space or pay by plate type of meter, in which payment is made and associated with a specific parking space or license plate. Regardless of the type of multispace meter, the meter 800 typically comprises a metal cabinet or enclosure 802 that encloses the components of the parking meter. Components of the multispace meter may be located or mounted within the enclosure 802 at convenient locations. In contrast to a single space meter, where a parking meter mechanism is typically removable as a unit, the mechanism of the multispace meter may comprise the various components that provide parking meter

functionality. The cabinet 802 includes a payment section 804 comprising input means 806 such as buttons and/or keypads, for controlling operation of the parking meter, one or more payment means 808 such as credit card, debit card and/or smart card readers and coin chutes, and a display 810 for displaying parking information. The multispace parking meter 800 further includes a contactless payment reader that includes a contactless reader antenna 812 located in sufficiently close proximity to the display 810 so that a contactless payment device placed in the vicinity of the display 810 has an acceptable success rate for reading a contactless payment device.

The contactless reader antenna 812 is depicted as being located about a perimeter of the display 810. It is contemplated that the contactless reader antenna 812 could be located in different locations in or on the parking meter 800 and arranged in sufficiently close proximity to the display 810 so that a contactless payment device placed in the vicinity of the display 810 has an acceptable success rate for reading a contactless payment device.

The specific design of the contactless reader antenna may vary depending on numerous factors, including the size of the opening within which the antenna is located, the proximity of the contactless reader antenna to the metal of the parking meter housing, whether or not the opening has a metal backing, etc. Further, the wires or wire traces forming the contactless reader antenna may also vary, for example, if the contactless reader antenna is placed over the viewable portion of the display or solar panels, the wires or wire traces may be sufficiently small so as to not obstruct the view of the display, or functioning of the solar panel.

Figure 9 depicts an illustrative contactless reader antenna. The contactless reader antenna 900 comprises a plurality of connected traces forming a single electrical wire. As depicted, the contactless reader antenna 900 comprises a tail portion 902 that is used to connect the contactless reader antenna to the contactless reader module and a loop portion 904 that surrounds a viewable area 906 of the display of the parking meter. It is noted that the loop portion 904 terminates at an inner location 908, however this inner location 908 is electrically connected to one of the traces of the tail portion

902. This electrical connection, depicted as wire 910, between the inner location 908 of the loop portion 904 and the tail portion 902 is electrically insulated from the other wires or wires traces of the loop portion 904.

As described above, a parking meter may be provided with a contactless payment means having a contactless reader antenna arranged within an opening in the metal housing of the parking meter. As described, the antenna may be arranged on either side of a display of the parking meter. Furthermore, the antenna may be arranged on an interior surface of a material sealing an opening in the parking meter housing. A decal may be placed on the covering of the opening to hide the antenna wires while not impeding the transmission of RF signals. Furthermore the individual conductive wires of the antenna of the contactless card reader may be sufficiently small in diameter or fine that even when placed in front of the display they do not significantly interfere with the display visibility, allowing the antenna to be placed over the display. Advantageously, the opening in the metal housing for the display is typically covered with a protective material through which the display is visible, such as Lexan. This material typically provides a low attenuation of RF signals and as such locating the antenna within the opening covered by the low attenuation material provides an improved transmission path, which can increase the likelihood of successfully communicating with a contactless payment device. Furthermore, since the opening is used for viewing the display, and since the display may be used to display a logo, graphic and/or directions such as "tap here", providing clear and convenient payment instructions to the user, it is not necessary to provide an additional opening in the metal housing of the parking meter, which may improve the strength of the parking meter housing and/or possibly simplifying its construction.

Although various embodiments have been described with different placements of the contactless reader antenna, it is contemplated that the antenna could be located in or on the parking meter in different positions or configurations. The antenna should be placed in sufficiently close proximity to the display, when the parking meter is assembled, to provide an acceptable success rate of reading when a contactless payment device is placed in the vicinity of the display. Arranging the antenna in or on

the parking meter in close proximity to the display allows clear instructions to be presented to the user on the display, indicating to the user where to place the contactless payment device. For example, the antenna could be located on an exterior side of the parking meter in close proximity to the display.

- 5 Various embodiments of parking meters with contactless payment means have been described. The above-described embodiments of the invention are intended to be examples of the present invention and alterations and modifications may be effected thereto, by those of ordinary skill in the art, without departing from the scope of the invention which is defined solely by the claims appended hereto.

WHAT IS CLAIMED IS:

1. A parking meter comprising:

components for providing parking meter functionality including a contactless payment reader;
a display for displaying parking meter information;
a metal housing for protecting the parking meter components from an environment, the housing comprising a display aperture through which the display is visible; and
an antenna for the contactless payment reader arranged in or on the parking meter in close proximity to and in front of the display wherein at least a portion of the antenna has an approximately rectangular shape, wherein at least a portion of the antenna comprises a fine or small diameter of conductive wire, and
wherein the contactless payment reader is operable to read a payment device.
2. The parking meter of claim 1, wherein the antenna is arranged about a perimeter of the display of the parking meter.
3. The parking meter of claim 1 or 2, wherein the antenna is arranged on a front side of the display.
4. The parking meter of claim 1, wherein at least some of the portion of the antenna comprising the fine or small diameter of conductive wire is arranged in front of the display.
5. The parking meter of any one of claims 1 to 4, wherein the antenna is connected to a contactless reader module providing the contactless payment reader via wires.
6. The parking meter of claim 1, wherein the antenna surrounds input components that interact with the parking meter.
7. The parking meter of claim 1, wherein the housing further comprises an additional aperture arranged in close proximity to the display and wherein the antenna is located within or about the additional aperture.

8. The parking meter of claim 7, wherein the additional aperture comprises a solar panel aperture housing a solar panel.
9. The parking meter of any one of claims 6 to 8, wherein the antenna is connected to a contactless reader module providing the contactless payment reader via wires.
10. The parking meter of any one of claims 1 to 7, wherein the parking meter is a multi-space type parking meter.
11. The parking meter of any one of claims 1 to 9, wherein the parking meter is a single space parking meter and the components providing parking meter functionality and the display are provided by a removable parking meter mechanism received within at least a portion of the metal housing.
12. The parking meter of any one of claims 1 to 11, wherein the contactless payment reader comprises a Near Field Communication (NFC) reader.
13. The parking meter of any one of claims 1 to 12, wherein the payment device comprises one or more of:
 - an NFC enabled credit card;
 - a card conforming to ISO 14443 standard;
 - an NFC enabled mobile phone;
 - an NFC enabled smartphone;
 - an NFC enabled wrist watch;
 - an NFC tag; and
 - an NFC token.
14. A removable parking meter mechanism comprising:
 - components for providing parking meter functionality including a contactless payment reader;
 - a display for displaying parking information; and
 - an antenna for the contactless payment reader arranged in close proximity to and in front of the display wherein at least a portion of the antenna has an approximately

rectangular shape, wherein at least a portion of the antenna comprises a fine or small diameter of conductive wire, and
wherein the contactless payment reader is operable to read a payment device.

15. The removable parking meter mechanism of claim 14, wherein the antenna is arranged about a perimeter of the display.
16. The removable parking meter mechanism of claim 14, wherein at least some of the portion of the antenna comprising the fine or small diameter of conductive wire is arranged in front of the display.
17. The removable parking meter mechanism of any one of claims 14 to 16, wherein the antenna is arranged on a front side of the display.
18. The removable parking meter mechanism of any one of claims 14 to 17, wherein the antenna is connected to a contactless reader module providing the contactless payment reader via wires.
19. The removable parking meter mechanism of any one of claims 14 to 18, wherein the contactless payment reader comprises a Near Field Communication (NFC) reader.
20. The removable parking meter mechanism of any one of claims 14 to 19, wherein the payment device comprises one or more of:
 - an NFC enabled credit card;
 - a card conforming to ISO 14443 standard;
 - an NFC enabled mobile phone;
 - an NFC enabled smartphone;
 - an NFC enabled wrist watch;
 - an NFC tag; and
 - an NFC token.
21. A parking meter comprising:
 - components for providing parking meter functionality including a contactless payment reader;

a display for displaying parking meter information;
a metal housing for protecting the parking meter components from an environment, the housing comprising a display aperture through which the display is visible; and
an antenna for the contactless payment reader arranged in or on the parking meter in front of the display wherein at least a portion of the antenna has an approximately rectangular shape, wherein at least a portion of the antenna comprises a fine or small diameter of conductive wire, and
wherein the contactless payment reader is operable to read a payment device.

22. The parking meter of claim 21, wherein the antenna is arranged about a perimeter of the display of the parking meter.
23. The parking meter of claim 21 or 22, wherein the antenna is arranged on a front side of the display.
24. The parking meter of claim 21, wherein at least some of the portion of the antenna comprising the fine or small diameter of conductive wire is arranged in front of the display.
25. The parking meter of any one of claims 21 to 24, wherein the antenna is connected to a contactless reader module providing the contactless payment reader via wires.
26. The parking meter of claim 21, wherein the antenna surrounds input components that interact with the parking meter.
27. The parking meter of claim 21, wherein the housing further comprises an additional aperture arranged in close proximity to the display and wherein a second antenna is located within or about the additional aperture.
28. The parking meter of claim 27, wherein the additional aperture comprises a solar panel aperture housing a solar panel.
29. The parking meter of any one of claims 26 to 28, wherein the antenna is connected to a contactless reader module providing the contactless payment reader via wires.

30. The parking meter of any one of claims 21 to 27, wherein the parking meter is a multi-space type parking meter.
31. The parking meter of any one of claims 21 to 29, wherein the parking meter is a single space parking meter and the components providing parking meter functionality and the display are provided by a removable parking meter mechanism received within at least a portion of the metal housing.
32. The parking meter of any one of claims 21 to 31, wherein the contactless payment reader comprises a Near Field Communication (NFC) reader.
33. The parking meter of any one of claims 21 to 32, wherein the payment device comprises one or more of:
- an NFC enabled credit card;
 - a card conforming to ISO 14443 standard;
 - an NFC enabled mobile phone;
 - an NFC enabled smartphone;
 - an NFC enabled wrist watch;
 - an NFC tag; and
 - an NFC token.
34. A removable parking meter mechanism comprising:
- components for providing parking meter functionality including a contactless payment reader;
 - a display for displaying parking information; and
 - an antenna for the contactless payment reader arranged in front of the display wherein at least a portion of the antenna has an approximately rectangular shape wherein at least a portion of the antenna comprises a fine or small diameter of conductive wire, and
- wherein the contactless payment reader is operable to read a payment device.
35. The removable parking meter mechanism of claim 34, wherein the antenna is arranged about a perimeter of the display.

36. The removable parking meter mechanism of claim 34, wherein at least some of the portion of the antenna comprising the fine or small diameter of conductive wire is arranged in front of the display.
37. The removable parking meter mechanism of claim 34 or 35, wherein the antenna is arranged on a front side of the display.
38. The removable parking meter mechanism of any one of claims 34 to 37, wherein the antenna is connected to a contactless reader module providing the contactless payment reader via wires.
39. The removable parking meter mechanism of any one of claims 34 to 38, wherein the contactless payment reader comprises a Near Field Communication (NFC) reader.
40. The removable parking meter mechanism of any one of claims 34 to 39, wherein the payment device comprises one or more of:
- an NFC enabled credit card;
 - a card conforming to ISO 14443 standard;
 - an NFC enabled mobile phone;
 - an NFC enabled smartphone;
 - an NFC enabled wrist watch;
 - an NFC tag; and
 - an NFC token.
41. A removable single space parking meter mechanism comprising:
- an internal structure to be at least partially and removably received within a lower housing of a single space parking meter;
 - components for providing parking meter functionality including a contactless payment reader;
 - a display; and
 - an antenna for the contactless payment reader arranged in close proximity to and in front of the display wherein at least a portion of the antenna has an approximately

rectangular shape wherein at least a portion of the antenna comprises a fine or small diameter of conductive wire, and
wherein the contactless payment reader is operable to read a payment device.

42. The removable single space parking meter mechanism of claim 41, further comprising a front housing, to be exposed to an external environment, coupled to the internal structure.

43. The removable single space parking meter mechanism of any one of claims 41 or 42, wherein the display presents payment information when parking time is being purchased.

44. The removable single space parking meter mechanism of claim 43, wherein the payment information comprises payment instructions for payment using the contactless payment reader antenna.

45. The removable single space parking meter mechanism of claim 42, wherein the front housing comprises a display opening through which the display is visible.

46. The removable single space parking meter mechanism of claim 42, further comprising additional payment components comprising one or more of:

a card slot in the front housing for receiving a payment card; and a coin slot for receiving coins.

47. The removable single space parking meter mechanism of any one of claims 41 to 46, further comprising a solar panel coupled to the internal structure.

48. The removable single space parking meter mechanism of claim 42, further comprising input components located on the front housing.

49. The removable single space parking meter mechanism of any one of claims 41 to 48, wherein the contactless payment reader comprises at least one of:

a Near-Field Communications (NFC) reader;
a Radio Frequency Identification (RFID) reader; and

an International Organization for Standardization (ISO) 14443 reader.

50. A single space parking meter comprising:

a metallic lower housing;

a removable single space parking meter mechanism comprising:

an internal structure to be at least partially and removably received within the lower housing;

components for providing parking meter functionality including a contactless payment reader; and

a display;

an antenna for the contactless payment reader, wherein the antenna is arranged in close proximity to and in front of the display wherein at least a portion of the antenna has an approximately rectangular shape wherein at least a portion of the antenna comprises a fine or small diameter of conductive wire; and

a metallic meter housing secured to the lower housing and securing the removable single space parking meter mechanism at least partially within the lower housing, wherein the contactless payment reader is operable to read a payment device.

51. The single space parking meter of claim 50, wherein the removable single space parking meter mechanism further comprises a front housing, to be exposed to an external environment, coupled to the internal structure.

52. The single space parking meter of any one of claims 50 or 51, wherein the display presents payment information when parking time is being purchased.

53. The single space parking meter of claim 52, wherein the payment information comprises payment instructions for payment using the contactless payment reader antenna.

54. The single space parking meter of claim 51, wherein the front housing comprises a display opening through which the display is visible.

55. The single space parking meter of any one of claims 50 to 54, wherein the meter housing comprises a display opening through which the display is visible.

56. The single space parking meter of claim 51, further comprising additional payment components comprising one or more of:
- a card slot in the front housing for receiving a payment card; and
 - a coin slot for receiving coins.
57. The single space parking meter of any one of claims 50 to 56, further comprising a solar panel coupled to the internal structure of the removable single space parking meter mechanism.
58. The single space parking meter of claim 51, further comprising input components located on the front housing.
59. The single space parking meter of any one of claims 50 to 58, wherein the contactless payment reader comprises at least one of:
- a Near-Field Communications (NFC) reader;
 - a Radio Frequency Identification (RFID) reader; and
 - an International Organization for Standardization (ISO) 14443 reader.
60. The parking meter of claim 1, wherein the antenna is arranged adjacent to the display of the parking meter.
61. The removable parking meter mechanism of claim 14, wherein the antenna is arranged adjacent to the display of the removable parking meter mechanism.
62. The removable single space parking meter mechanism of claim 41, wherein the antenna is arranged adjacent to the display of the removable parking meter mechanism.
63. The single space parking meter of claim 50, wherein the antenna is arranged adjacent to the display of the parking meter.
64. The parking meter of claim 1, wherein the antenna is arranged adjacent to a solar panel of the parking meter.

65. The parking meter of claim 1, wherein the antenna is arranged adjacent to one or more input components of the parking meter.
66. The removable parking meter mechanism of claim 14, wherein the antenna is arranged adjacent to one or more input components of the removable parking meter mechanism.
67. The removable single space parking meter mechanism of claim 41, wherein the antenna is arranged adjacent to one or more input components of the removable parking meter mechanism.
68. The single space parking meter of claim 50, wherein the antenna is arranged adjacent to one or more input components of the parking meter.
69. The parking meter of claim 1, wherein the antenna is arranged adjacent to a card slot of the parking meter.
70. The removable parking meter mechanism of claim 14, wherein the antenna is arranged adjacent to a card slot of the removable parking meter mechanism.
71. The removable single space parking meter mechanism of claim 41, wherein the antenna is arranged adjacent to a card slot of the removable parking meter mechanism.
72. The single space parking meter of claim 50, wherein the antenna is arranged adjacent to a card slot of the parking meter.
73. The parking meter of claim 1, wherein the antenna is arranged within the display aperture of the parking meter.
74. The single space parking meter of claim 50, wherein the antenna is arranged within a display aperture of the parking meter.
75. The parking meter of claim 1, wherein the antenna is at least partially surrounding or covering at least a portion of the display.

76. The removable parking meter mechanism of claim 14, wherein the antenna is at least partially surrounding or covering at least a portion of the display.
77. The removable single space parking meter mechanism of claim 41, wherein the antenna is at least partially surrounding or covering at least a portion of the display.
78. The single space parking meter of claim 50, wherein the antenna is at least partially surrounding or covering at least a portion of the display.
79. The single space parking meter of any one of claims 1 to 13, wherein the contactless payment reader comprises at least one of:
- a Near-Field Communications (NFC) reader;
 - a Radio Frequency Identification (RFID) reader; and
 - an International Organization for Standardization (ISO) 14443 reader.
80. The removable single space parking meter mechanism of any one of claims 14 to 18, wherein the contactless payment reader comprises at least one of:
- a Near-Field Communications (NFC) reader;
 - a Radio Frequency Identification (RFID) reader; and
 - an International Organization for Standardization (ISO) 14443 reader.
81. The single space parking meter of any one of claims 21 to 31, wherein the contactless payment reader comprises at least one of:
- a Near-Field Communications (NFC) reader;
 - a Radio Frequency Identification (RFID) reader; and
 - an International Organization for Standardization (ISO) 14443 reader.
82. The removable single space parking meter mechanism of any one of claims 34 to 38, wherein the contactless payment reader comprises at least one of:
- a Near-Field Communications (NFC) reader;
 - a Radio Frequency Identification (RFID) reader; and
 - an International Organization for Standardization (ISO) 14443 reader.

83. A removable single space parking meter mechanism comprising:
- an internal structure to be at least partially and removably received within a lower housing of a single space parking meter;
 - a display; and
 - an antenna for a contactless payment reader arranged in front of the display wherein at least a portion of the antenna has an approximately rectangular shape wherein at least a portion of the antenna comprises a fine or small diameter of conductive wire.
84. The removable single space parking meter mechanism of claim 83 further comprising a front housing, to be exposed to an external environment, coupled to the internal structure.
85. The removable single space parking meter mechanism of claim 83 or 84 wherein the antenna for the contactless payment reader is arranged at least partially adjacent to the display.
86. The removable single space parking meter mechanism of claim 84, wherein the front housing comprises a display opening through which the display is visible.
87. The removable single space parking meter mechanism of claim 86, wherein the antenna for the contactless payment reader is arranged at least partially within the display opening.
88. The removable single space parking meter mechanism of claim 86, further comprising a transparent covering within the display opening, wherein the antenna for the contactless payment reader is arranged at least partially on the transparent covering.
89. The removable single space parking meter mechanism of any one of claims 83 to 88, further comprising additional payment components comprising one or more of:
- a card slot in the front housing for receiving a payment card; and,
 - a coin slot for receiving coins.
90. The removable single space parking meter mechanism of any one of claims 83, 84 or 86 to 88, further comprising additional payment components comprising:

a card slot in the front housing for receiving a payment card; and, a coin slot for receiving coins,
wherein the antenna for the contactless payment reader is adjacent to one or more of the card slot and the coin slot.

91. The removable single space parking meter mechanism of any one of claims 83 and 86 to 88, further comprising input components located on the front housing.

92. The removable single space parking meter mechanism of claim 91, wherein the antenna for the contactless payment reader is adjacent to the input components.

93. The removable single space parking meter mechanism of any one of claims 83 to 92, further comprising a solar panel coupled to the internal structure.

94. The removable single space parking meter mechanism of claim 93, wherein the antenna for the contactless payment reader is adjacent to the solar panel.

95. The removable single space parking meter mechanism of any one of claims 83, 84 or 85, wherein the antenna is arranged at least partially around one or more of:
one or more input components; and
a solar panel.

96. The removable single space parking meter mechanism of any one of claims 83 to 95, wherein the antenna for a contactless payment reader is coupled to a contactless payment reader comprising at least one of:
a Near-Field Communications (NFC) reader;
a Radio Frequency Identification (RFID) reader; and
an International Organization for Standardization (ISO) 14443 reader.

97. The removable single space parking meter mechanism of any one of claims 83 to 96, wherein the display presents payment information when parking time is being purchased.

98. The removable single space parking meter mechanism of claim 97, wherein the payment information comprises payment instructions for payment using the contactless payment reader antenna.
99. A single space parking meter comprising:
- a lower housing;
 - a removable single space parking meter mechanism comprising:
 - an internal structure to be at least partially and removably received within the lower housing; and
 - a display;
 - an antenna for a contactless payment reader, wherein the antenna is arranged in front of the display wherein at least a portion of the antenna has an approximately rectangular shape wherein at least a portion of the antenna comprises a fine or small diameter of conductive wire; and
 - a meter housing secured to the lower housing and securing the removable single space parking meter mechanism at least partially within the lower housing.
100. The single space parking meter of claim 99, wherein the antenna for the contactless payment reader is arranged at least partially adjacent to the display.
101. The single space parking meter of claim 99, wherein the meter housing comprises a display opening through which the display is visible.
102. The single space parking meter of claim 101, wherein the antenna for the contactless payment reader is arranged at least partially within the display opening.
103. The single space parking meter of claim 101, further comprising a transparent covering within the display opening, wherein the antenna for the contactless payment reader is arranged at least partially on the transparent covering.
104. The single space parking meter of any one of claims 99 to 103, further comprising additional payment components comprising one or more of:
- a card slot in the meter housing for receiving a payment card; and

a coin slot for receiving coins.

105. The single space parking meter of any one of claims 99 and 100 to 103, further comprising additional payment components comprising:

a card slot in the front housing for receiving a payment card; and, a coin slot for receiving coins,

wherein the antenna for the contactless payment reader is adjacent to one or more of the card slot and the coin slot.

106. The single space parking meter of any one of claims 99 to 105, further comprising a solar panel coupled to the removable single space parking meter mechanism.

107. The single space parking meter of claim 106, wherein the antenna for the contactless payment reader is adjacent to the solar panel.

108. The single space parking meter of any one of claims 99 to 107, further comprising input components located at the meter housing.

109. The single space parking meter of claim 108, wherein the antenna for the contactless payment reader is adjacent to the input components.

110. The single space parking meter of any one of claims 99, 100 to 102, 104 and 105, wherein the antenna is arranged at least partially around one or more of:

one or more input components; and

a solar panel.

111. The single space parking meter of any one of claims 99 to 110, wherein the antenna for a contactless payment reader is coupled to a contactless payment reader comprising at least one of:

a Near-Field Communications (NFC) reader;

a Radio Frequency Identification (RFID) reader; and

an International Organization for Standardization (ISO) 14443 reader.

112. The single space parking meter of any one of claims 99 to 111, wherein the removable single space parking meter mechanism further comprises a front housing, to be exposed to an external environment, rigidly attached to the internal structure of the removable parking meter mechanism, and wherein the meter housing is pivotally attached to the lower housing.
113. The single space parking meter of any one of claims 99 to 112 wherein the display presents payment information when parking time is purchased.
114. The single space parking meter of claim 113, wherein the payment information comprises payment instructions for payment using the contactless payment reader antenna.
115. The parking meter of claim 21, wherein the antenna is arranged adjacent to the display of the removable parking meter mechanism.
116. The parking meter of claim 21, wherein the antenna is arranged adjacent to one or more input components of the removable parking meter mechanism.
117. The parking meter of claim 21, wherein the antenna is arranged adjacent to a card slot of the removable parking meter mechanism.
118. The parking meter of claim 21, wherein the antenna is at least partially surrounding or covering at least a portion of the display.
119. The removable single space parking meter mechanism of claim 34, wherein the antenna is arranged adjacent to the display of the removable parking meter mechanism.
120. The removable single space parking meter mechanism of claim 34, wherein the antenna is arranged adjacent to one or more input components of the removable parking meter mechanism.
121. The removable single space parking meter mechanism of claim 34, wherein the antenna is arranged adjacent to a card slot of the removable parking meter mechanism.

122. The removable single space parking meter mechanism of claim 34, wherein the antenna is at least partially surrounding or covering at least a portion of the display.
123. The parking meter of claim 1, wherein the antenna is at least partially surrounding or covering at least (i) a portion of the display, and (ii) one or more input components.
124. The removable parking meter mechanism of claim 14, wherein the antenna is at least partially surrounding or covering at least (i) a portion of the display, and (ii) one or more input components.
125. The parking meter of claim 21, wherein the antenna is at least partially surrounding or covering at least (i) a portion of the display, and (ii) one or more input components.
126. The removable single space parking meter mechanism of claim 34, wherein the antenna is at least partially surrounding or covering at least (i) a portion of the display, and (ii) one or more input components.
127. The removable single space parking meter mechanism of claim 41, wherein the antenna is at least partially surrounding or covering at least (i) a portion of the display, and (ii) one or more input components.
128. The single space parking meter of claim 50, wherein the antenna is at least partially surrounding or covering at least (i) a portion of the display, and (ii) one or more input components.
129. The removable single space parking meter mechanism of claim 83, wherein the antenna is at least partially surrounding or covering at least (i) a portion of the display, and (ii) one or more input components.
130. The single space parking meter of claim 99, wherein the antenna is at least partially surrounding or covering at least (i) a portion of the display, and (ii) one or more input components.

131. The parking meter of claim 1, further comprising a second antenna for the contactless payment reader arranged around one or more of: a card slot; and, a coin slot.
132. The removable parking meter mechanism of claim 14, further comprising a second antenna for the contactless payment reader arranged around one or more of: a card slot; and, a coin slot.
133. The parking meter of claim 21, further comprising a second antenna for the contactless payment reader arranged around one or more of: a card slot; and, a coin slot.
134. The removable single space parking meter mechanism of claim 34, further comprising a second antenna for the contactless payment reader arranged around one or more of: a card slot; and, a coin slot.
135. The removable single space parking meter mechanism of claim 41, further comprising a second antenna for the contactless payment reader arranged around one or more of: a card slot; and, a coin slot.
136. The single space parking meter of claim 50, further comprising a second antenna for the contactless payment reader arranged around one or more of: a card slot; and, a coin slot.
137. The removable single space parking meter mechanism of claim 83, further comprising a second antenna for the contactless payment reader arranged around one or more of: a card slot; and, a coin slot.
138. The single space parking meter of claim 99, further comprising a second antenna for the contactless payment reader arranged around one or more of: a card slot; and, a coin slot.
139. The parking meter of claim 1, further comprising a second antenna for the contactless payment reader arranged around input components.

140. The removable parking meter mechanism of claim 14, further comprising a second antenna for the contactless payment reader arranged around input components.
141. The parking meter of claim 21, further comprising a second antenna for the contactless payment reader arranged around input components.
142. The removable single space parking meter mechanism of claim 34, further comprising a second antenna for the contactless payment reader arranged around input components.
143. The removable single space parking meter mechanism of claim 41, further comprising a second antenna for the contactless payment reader arranged around input components.
144. The single space parking meter of claim 50, further comprising a second antenna for the contactless payment reader arranged around input components.
145. The removable single space parking meter mechanism of claim 83, further comprising a second antenna for the contactless payment reader arranged around input components.
146. The single space parking meter of claim 99, further comprising a second antenna for the contactless payment reader arranged around input components.
147. The parking meter of claim 1, further comprising a second antenna for the contactless payment reader arranged around a solar panel.
148. The removable parking meter mechanism of claim 14, further comprising a second antenna for the contactless payment reader arranged around a solar panel.
149. The parking meter of claim 21, further comprising a second antenna for the contactless payment reader arranged around a solar panel.

150. The removable single space parking meter mechanism of claim 34, further comprising a second antenna for the contactless payment reader arranged around a solar panel.
151. The removable single space parking meter mechanism of claim 41, further comprising a second antenna for the contactless payment reader arranged around a solar panel.
152. The single space parking meter of claim 50, further comprising a second antenna for the contactless payment reader arranged around a solar panel.
153. The removable single space parking meter mechanism of claim 83, further comprising a second antenna for the contactless payment reader arranged around a solar panel.
154. The single space parking meter of claim 99, further comprising a second antenna for the contactless payment reader arranged around a solar panel.

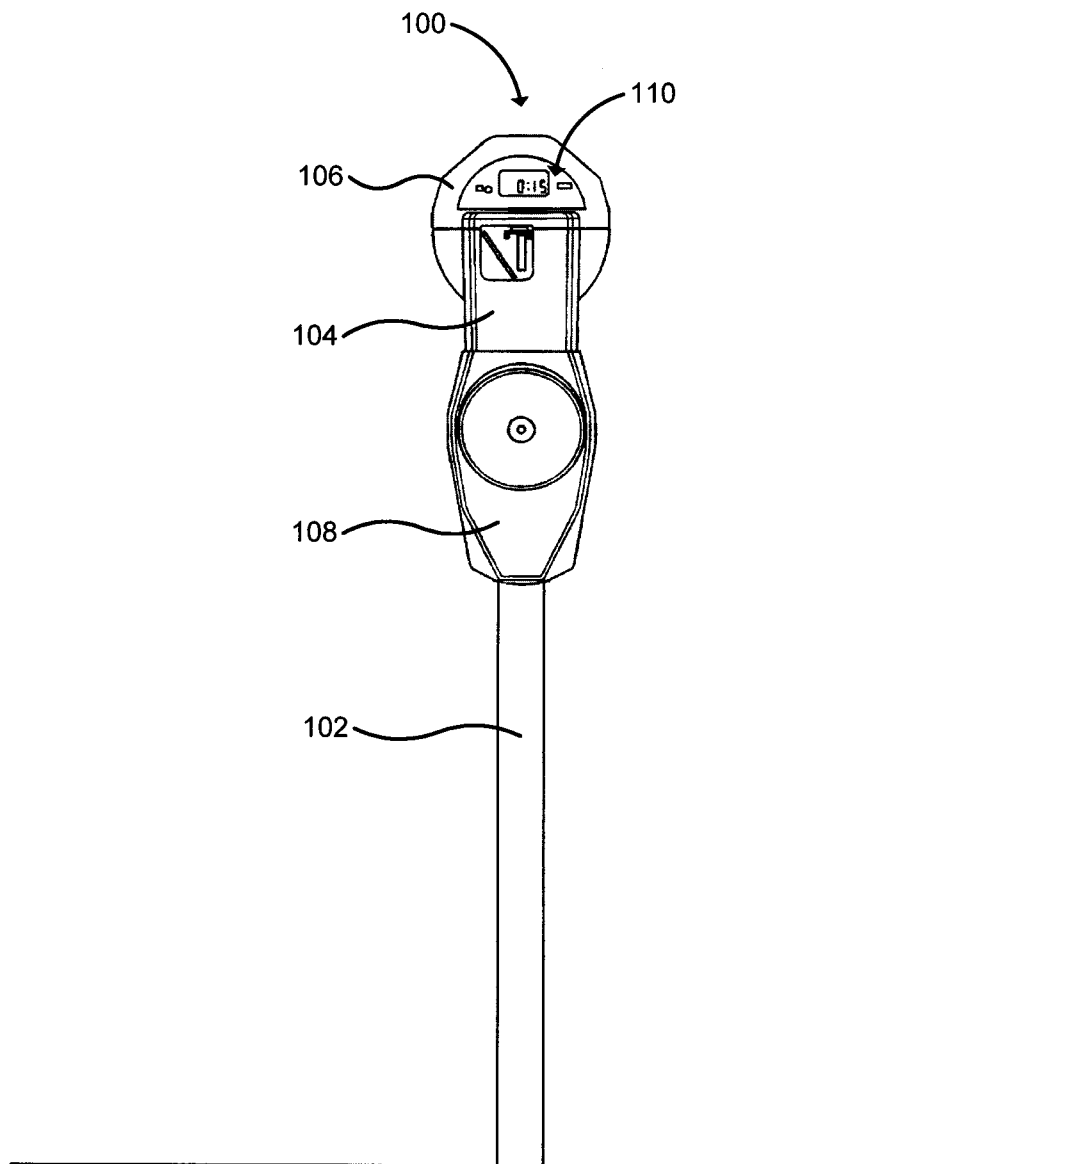


FIG. 1 - Prior Art

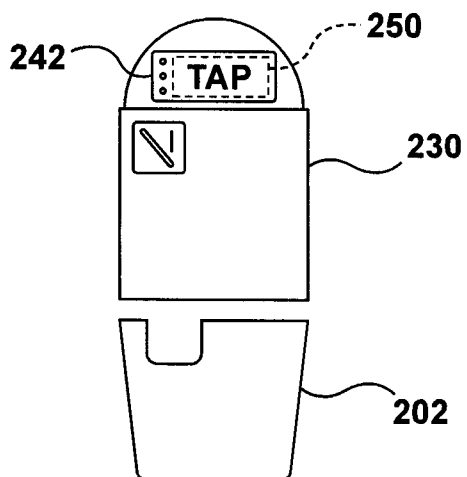
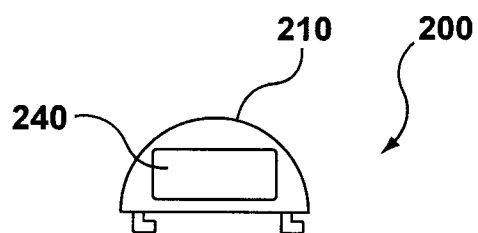


FIG. 2

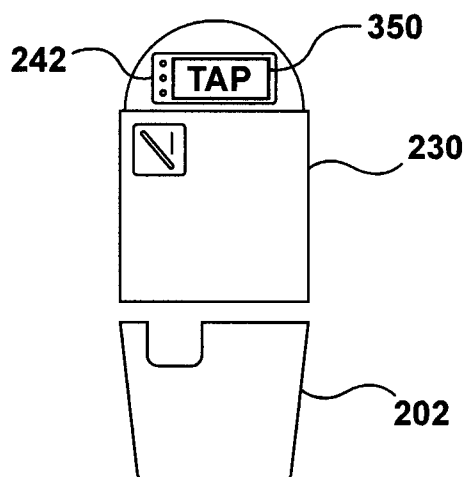
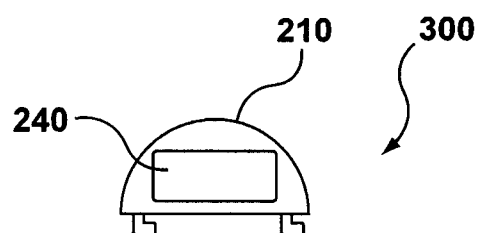


FIG. 3

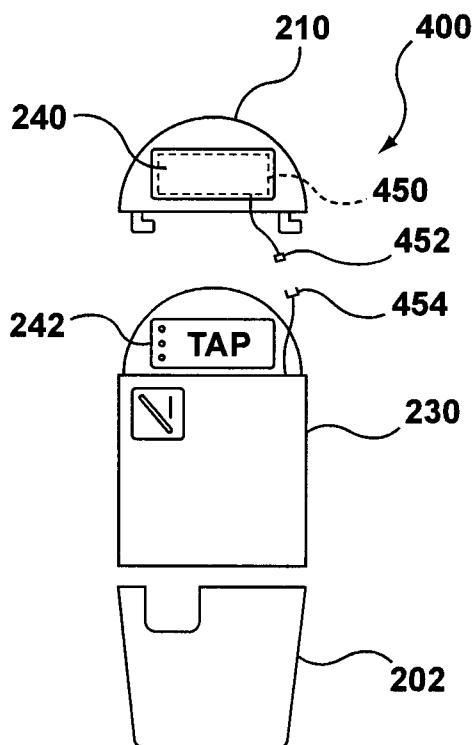


FIG. 4

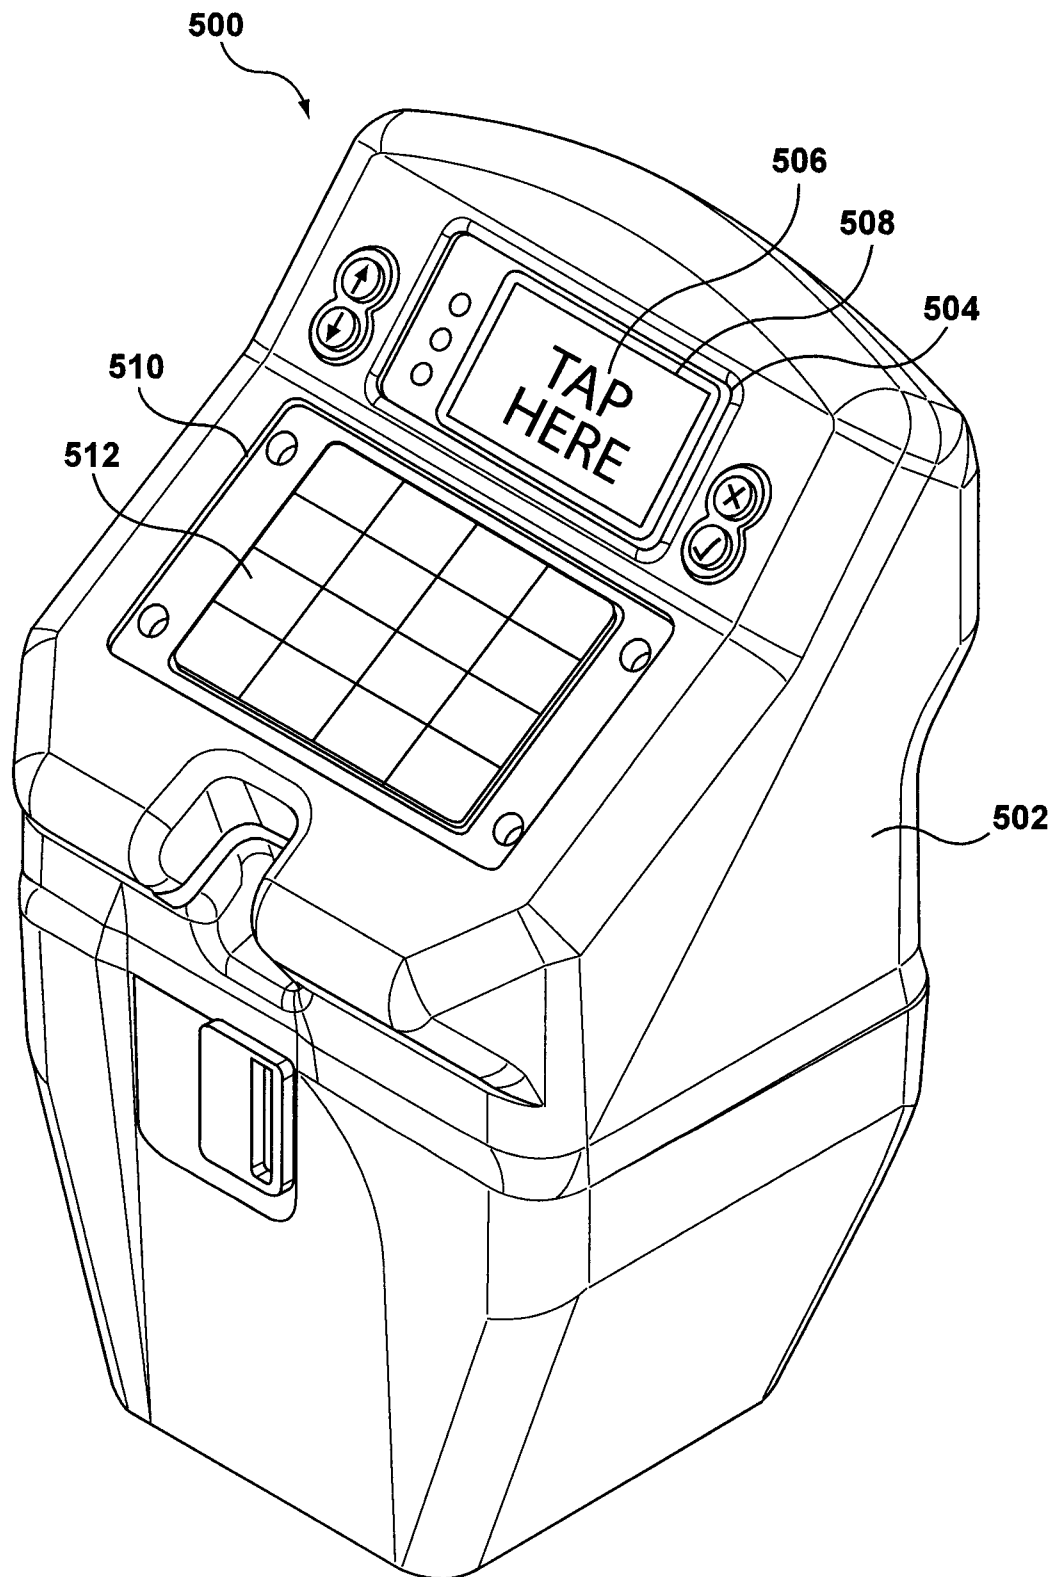


FIG. 5

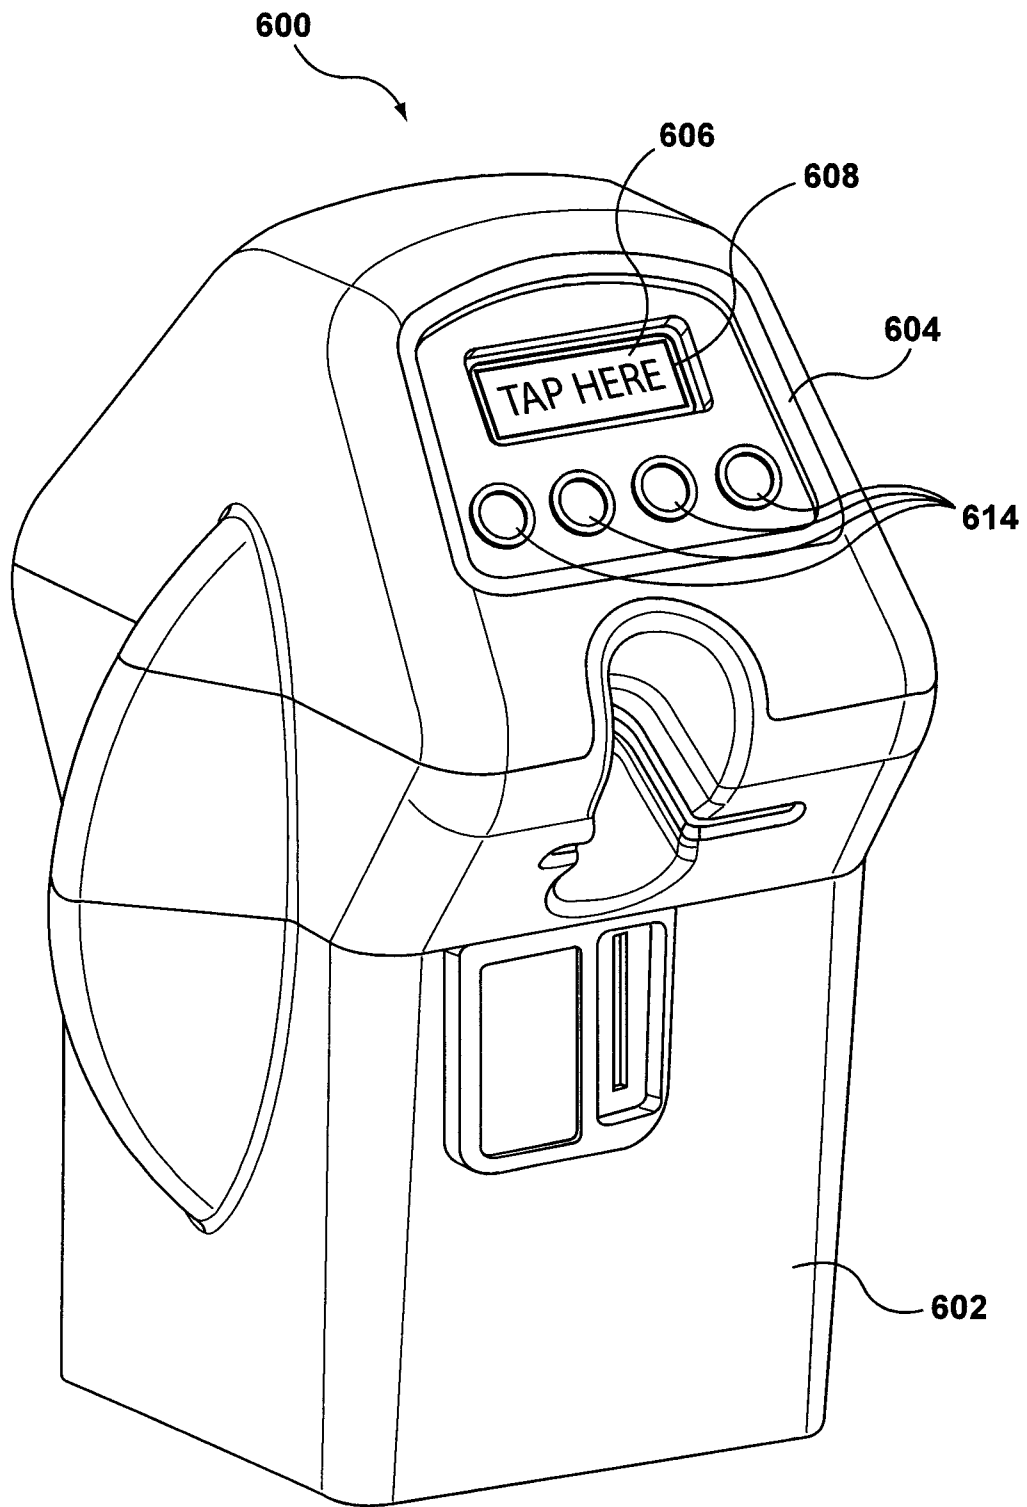


FIG. 6

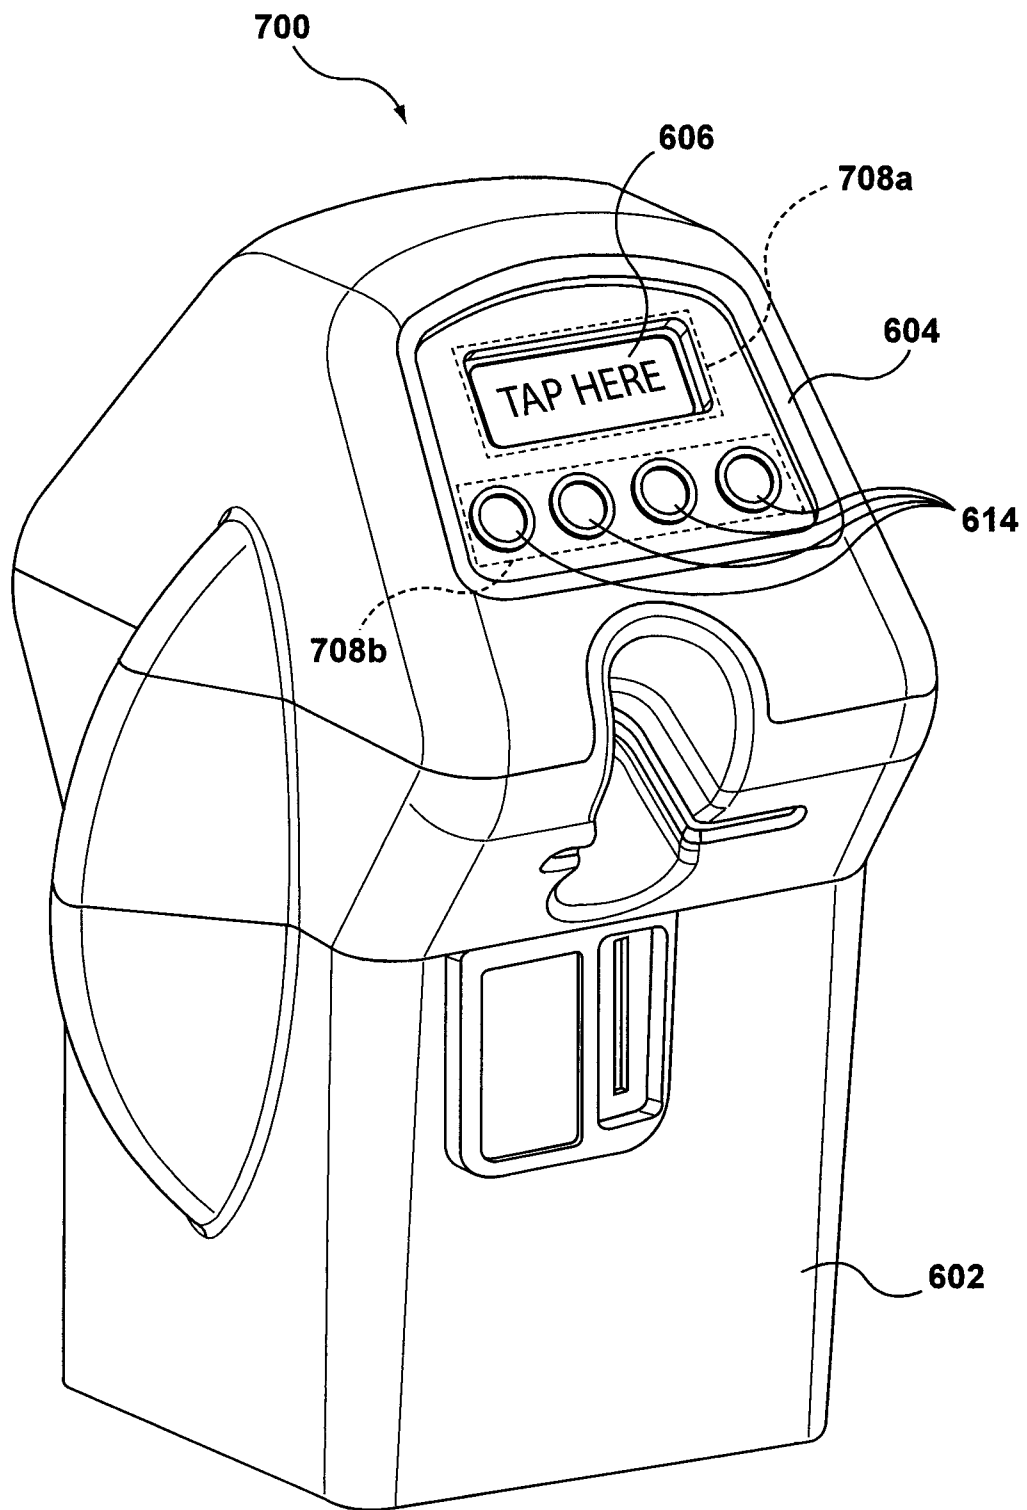
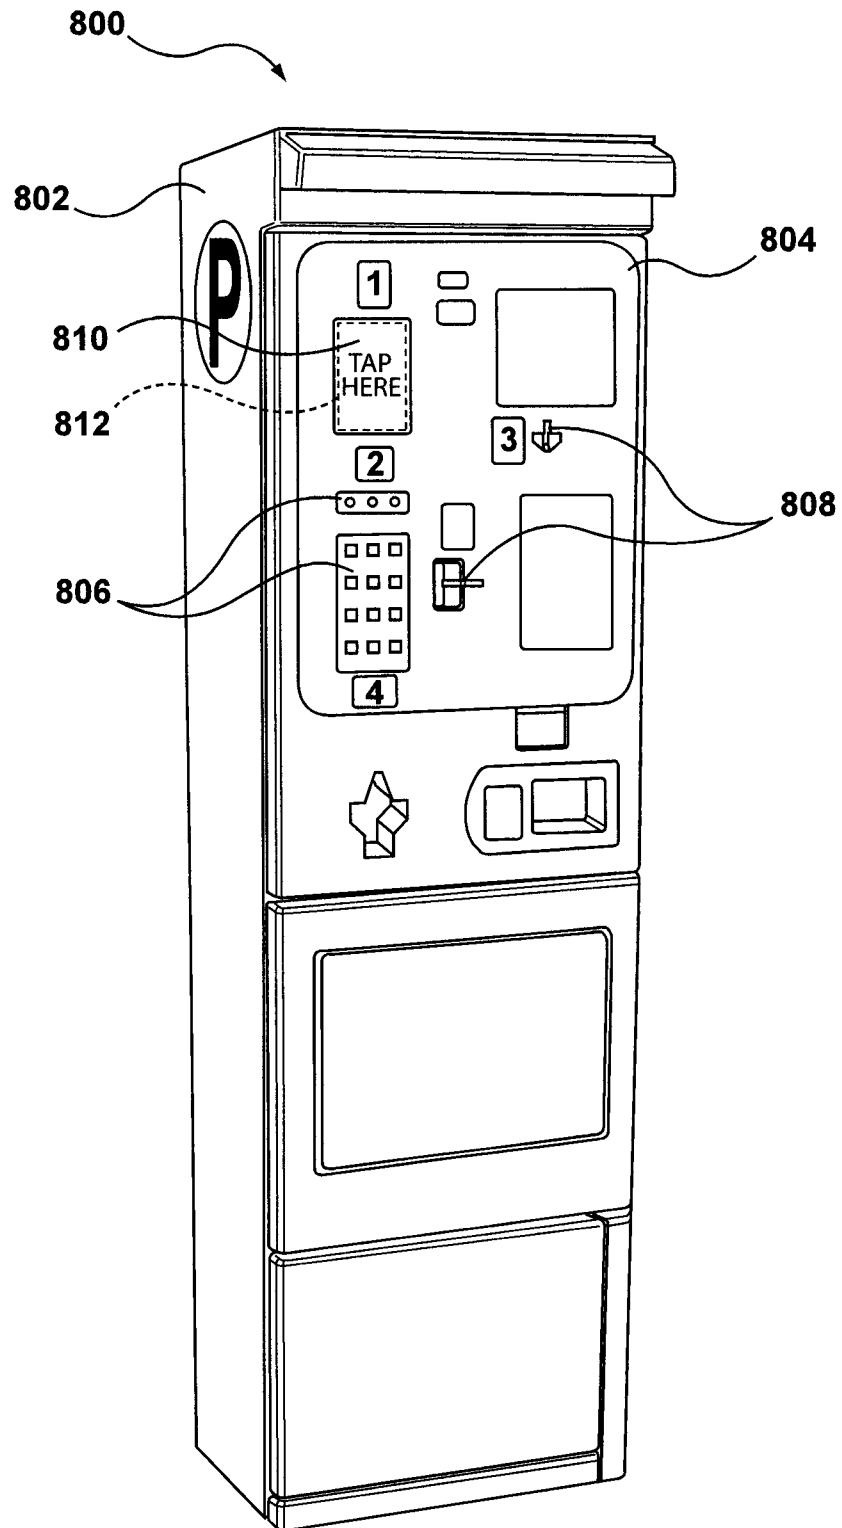


FIG. 7

**FIG. 8**

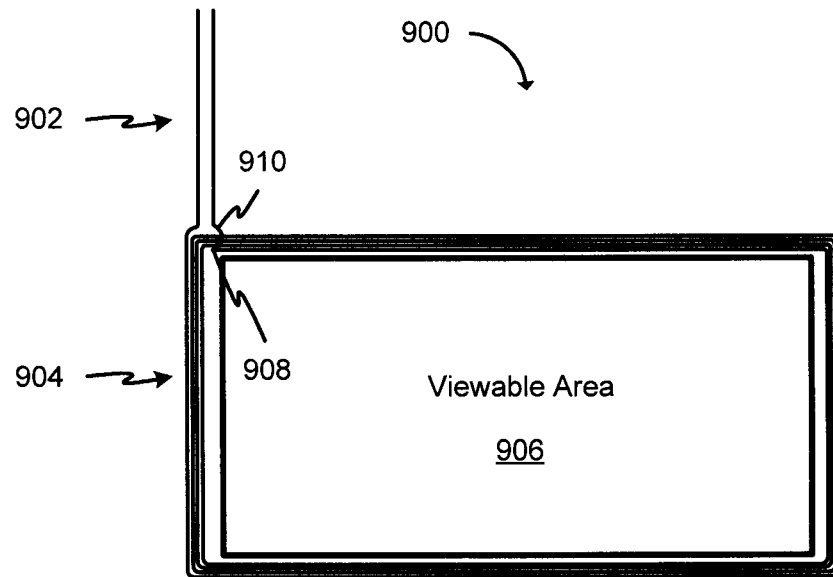


FIG. 9

