(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 769 920 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
17.09.2003 Bulletin 2003/38

(21) Application number: **95925631.4**

(22) Date of filing: **12.07.1995**

(51) Int Cl.[7]: **A46B 7/06**

(86) International application number:
PCT/US95/08740

(87) International publication number:
WO 96/002165 (01.02.1996 Gazette 1996/06)

(54) **RESILIENTLY FLEXIBLE BRISTLE BEARING HEAD TOOTHBRUSH**

ZAHNBÜRSTENKOPF MIT ELASTISCH, FLEXIBLEN BORSTEN

BROSSE A DENTS A TETE SOUPLE, ELASTIQUE, POURVUE DE POILS

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI LU NL PT SE

(30) Priority: **13.07.1994 GB 9414140**

(43) Date of publication of application:
02.05.1997 Bulletin 1997/18

(60) Divisional application:
02028499.8 / 1 300 096
02028766.0

(73) Proprietor: **THE PROCTER & GAMBLE COMPANY**
Cincinnati, Ohio 45202 (US)

(72) Inventors:
- **VAN GELDER, Maria**
  Twickenham, Middlesex TW1 1EF (GB)
- **MORGAN, Kirstie, Jane**
  Twickenham, Middlesex TW1 4LR (GB)

(74) Representative: **Brooks, Maxim Courtney**
Patent Dept.,
Procter & Gamble Technical Centres Limited,
Rusham Park,
Whitehall Lane
Egham TW20 9NW (GB)

(56) References cited:
WO-A-92/17092
WO-A-92/17093
DE-A- 1 657 299
FR-A- 2 040 545
US-A- 914 501
US-A- 2 438 268
US-A- 3 188 672

EP 0 769 920 B1

Printed by Jouve, 75001 PARIS (FR)

Description

Field of the Invention

[0001] The present invention relates to toothbrushes, more particularly to toothbrushes which comprise a flexible brush head with a generally concave bristle surface (i.e. the surface defined by the free ends of the bristles) in order to conform the toothbrush to the curvature of human teeth.

Background of the Invention

[0002] The configuration of human teeth requires that the ideal bristle contour for toothbrushes for brushing the buccal or outside surfaces of teeth be concave and that the ideal bristle contour for brushing the lingual or inside surfaces of teeth be convex. Most brushes have a single piece head which is of comparable thickness to the handle and which, consequently, is relatively rigid and of a fixed curvature or configuration. Some brushes may, however, incorporate a means for allowing the head to flex relative to the handle, as described for example in EP-A-371,293. Even so, such brushes have limited effectiveness. Other brushes are known which are adjustable into several different but fixed configurations. Adjustable toothbrushes are often difficult to manipulate and may be unreliable.

[0003] A further drawback of conventional brushes is that pressing the brush sufficiently hard against the teeth to get good cleaning risks damaging or discomforting the softer, adjacent gums. To a certain extent this can be solved by modifying the configuration of the brush, or by varying bristle hardness or length, though again, a single configuration cannot be optimum for all circumstances.

[0004] US-A-4,712,267, issued to Cheng, discloses a convertible toothbrush comprising an S-shaped elongated handle of shape-retaining material having curved end regions of opposite curvature, a flexible brush block containing bristles, and a means for mounting the flexible brush block on the handle for longitudinal movement along the length of the handle. The curved portions of the handle bend the flexible block and bristles into a concave or convex configuration which corresponds to the curved configuration of the handle.

[0005] EP-A-454,625. assigned to Warner-Lambert Company, describes an adjustable curvature toothbrush whose head is in the form of a loop. A cam or slide mechanism changes the curvature of the head between concave and convex configurations. In an alternative embodiment, the head is an integral part of the handle which is in the form of a compressible closed loop, the bristle surface being in a concave configuration when the handle is in its uncompressed state, becoming convex when the handle is compressed.

[0006] EP-A-577,656, to Lingner & Fischer GmbH, discloses a toothbrush having a handle and at one end thereof a bristle-bearing head, wherein the head is in the form of two or more segments flexibly and resiliently linked to each other and/or to the handle, one or more of the segments being bristle bearing. In one embodiment this is achieved by the use of transverse, and optionally longitudinal, grooves on the opposite face of the head to the bristles. Under application of pressure in use the brush head may adopt a convex configuration. In another embodiment the handle extends into a Frame into whose interior the head is resiliently linked. When pressure is applied to the centre of the brush head it adopts a concave configuration. adopts a concave configuration.

[0007] US-A-2,438,268 describes a toothbrush having a head which is concave on its bristle surface and is made flexible by the provision of resiliently connected segments so that the brush can adapt to the contour of the teeth. The spaces between the segments are not filled with an elastomer.

[0008] DE-A-1,657,299 also describes a toothbrush with a concave head. The brush head described in this document has grooves running transversely across the head which may be over-mouteed with a more flexible material.

[0009] US-A-914,501 discloses a toothbrush with a concave bristle profile and a receptable for a liquid dentifrice.

[0010] US-A, 3,188,672 discloses a plat-headed toothbrush with transverse grooves in upper and lower brush head surfaces. The grooves are not filled.

[0011] While the above toothbrushes provide brush heads with some degree of flexibility, none of them is entirely satisfactory, in particular, they either fail to provide both convex and concave configurations within the one embodiment or they require undue manipulation or skill on behalf of the user.

[0012] It is accordingly an object of this invention to provide a toothbrush with a head which can flexibly conform to either the convex or concave surfaces of the teeth and which provides good cleaning and is easy to manufacture and use.

[0013] It is a further object of the invention to provide a toothbrush which can clean the teeth efficiently with minimal damage to adjacent gum tissue.

Summary of the Invention

[0014] According to the present invention there is provided a toothbrush, according to claim 1.

[0015] The toothbrush head of this invention, being flexible, can flex under the action of toothbrushing so as to accommodate itself to the differing profiles of individual users' teeth. In particular, the flexible head of the toothbrush of the present invention has, in its normal stress-free configuration, a bristle profile adapted to suit the buccal surface of the teeth but, at least in preferred embodiments, can bend continuously through a flat position to a convex configuration to accommodate the lin-

gual surface of the teeth generally better than would be the case with a conventional rigid-headed toothbrush. The head may be adapted in such a way that the outer rows of bristles can flex away from the centre to limit the pressure applied to gums when the brush head is pressed against the teeth. In all cases the head is resilient, so that when an applied force is removed, the brush head returns to its original configuration.

Detailed Description of the Invention

[0016] The toothbrushes of the invention take the form of an elongated handle with, as an essential component, a resiliently flexible bristle-bearing head. At least a first part of the head is formed as an integral extension to the handle. The head comprises transverse grooves, filled with an elastrometric material so that the head will bend under normal brushing forces. The whole head has a conventional, generally flattened shape but remains flexible when compared to that of a conventional brush. By flexible is meant herein that when a normal brushing force (2-4 Newtons) is applied to one end of the head, the other end being held fixed, the end to which the force is applied will deflect through an angle of at least 1 degree (the flex angle). In preferred embodiments the flex angle is at least 5 degrees, more preferably at least 10 degrees and it can be as high as 45 degrees or more. The flex angle is such that the head is able to bend through into a convex configuration. At least one face of the head has bristles attached thereto.

[0017] The handle of the toothbrush of the invention, and that part of the head which is an extension of the handle may be made of materials which are conventional in the manufacture of toothbrushes, especially plastics materials. Suitable plastics materials include, for example, polyamides and polypropylenes. An example of a suitable polypropylene is the material 'Polypropylene PM 1600' (marketed by Shell), having a modulus of elasticity (ISO 178) of 1500 MPa and a hardness (ISO 868) of 75 Shore A. The handle itself is generally rigid and may be of a shape which is conventional in the manufacture of toothbrushes. Optionally, the handle may comprise a neck portion which is more flexible than the rest of the handle, as known in the art, provided that it is sufficiently rigid that, in use, when force is applied to the bead, particularly when brushing the teeth, the head may still flex in the manner and to the extent described above.

[0018] The head has a bristle-bearing face and which preferably forms a generally concave configuration when the brush is in its normal unstressed state. The face of the head may be concave along either or both of the transverse and longitudinal axes of the head. Where the face is concave along the longitudinal axis, the radius of curvature may vary along the length of the head. The radius of curvature is preferably from 10 to 500mm, more preferably from 15 to 250mm, especially from 25 to 150mm.

[0019] The head has a pair of opposing faces with bristles mounted on one of said pair and the same and the opposite face have one or more linear or non-linear transverse grooves therein. The grooves create thin hinges which make the bead flexible, the portions of the head between the grooves preferably being of comparable thickness to a conventional non-flexible head.

[0020] The grooves can follow generally curved or zig-zag paths. grooves may additionally run longitudinally along the head to allow the outer longitudinal rows of bristles to flex away from the inner ones.

[0021] The grooves can be of variable width and depth and the distances between grooves can also be varied. In this manner the flexibility of the head along the length and / or across the breadth of the head can be modified. Preferably only the transverse grooves are varied in this way.

[0022] The grooves are wholly filled with an elastomeric material. In this way too the flexibility and / or resilience of the head may be varied and contamination of the grooves by, for example, toothpaste deposits may be reduced or avoided completely. The colour of the elastomeric material may be the same as that of the material of the head, or it may be different thereby achieving a distinctive striped or otherwise patterned appearance.

[0023] The grooves may be generally straight or they may follow curved or zig-zag paths. Non-linear grooves help to offset compression stress in the elastomeric material filling the grooves as the head bends.

[0024] Suitable elastomeric materials herein are thermoplastic elastomers with a Shore hardness of 30 - 80 such as Santoprene and Thermoflex. A particularly suitable elastomer is 'PTS Thermoflex 75' (marketed by Plastic Technologie Service, Germany), having a modulus of elasticity (ISO 178) of 100 MPa and a hardness (ISO 868) of 80 Shore A. The elastomers may optionally be mixed with a suitable plasticiser or foaming agent to make them more compressible.

[0025] The bristles can be made of any of the materials well known in the art. Suitable bristle materials herein are polyester and nylon, such as Dupont Nylon 612. The bristles are preferably of circular cross-section but can also be of other cross-sections including, but not limited to, rectangular, hexagonal and trilobular. Furthermore, the diameter and length of the bristles can vary within the usual dimensions known by a person skilled in the art, provided that, when the brush is in the unstressed state, the overall objective of having a generally concave bristle surface is still met. The bristles are generally conventionally grouped into tufts and can be attached to the brush head by a variety of processes. Preferred processes herein are stapling and fusion. The bristles can be inserted into either or both of the head extension and the elastomeric material. Cutting and end-rounding of the bristles can be done using any of the methods commonly known in the art.

[0026] In use, the toothbrush of this invention can be used for cleaning the teeth by an entirely conventional

toothbrushing hand action, preferably in a manner recommended by dental health authorities. The toothbrush of the invention can also be used in electrically driven toothbrushes or children's toothbrushes.

[0027] The invention will now be described by way of example only, with reference to the accompanying drawings in which:

Fig 1 is a partial side view of a first embodiment of the invention, depicting a toothbrush head with transverse grooves. Although the head is flat in its unstressed state, the bristles are cut to different lengths so that the bristle surface is concave along the longitudinal direction. The grooves are shown absent the elastomer which fills them.

Fig 2 is a similar view illustrating a toothbrush head where the first part is formed by a single extension integral with the handle and is further surrounded by elastomer. The bead is pre-formed so that it is naturally concave in its unstressed state. This brush head does not form part by the present invention.

Fig 3 is a partial side view of a third embodiment showing a grooved toothbrush head, the face of which is concave in its unstressed configuration and illustrating how the toothbrush head can bend from a concave configuration to a convex one to suit both buccal and lingual surfaces of the teeth (shown in plan).

Fig 4 is a plan view of a toothbrush head which comprises three thin longitudinal extensions surrounded by elastomer. The head is able to bend around both longitudinal and transvepe axes. This brush head does not form part of the present invention.

Fig 5 is a transverse section through the head of Fig. 4 along the line AA'. The bristles are cut so that the bristle surface is naturally concave along the transverse axis.

Fig 6 is a plan view of a fifth embodiment wherein the head has both transverse and longitudinal grooves. The grooves are filled with elastomer.

Fig 7 is a transverse section through a toothbrush head with two longitudinal grooves on each face. The head is pre-formed so that its face is naturally concave along the transverse axis. The grooves are filled with elastomer. This brush head does not form part of the present invention.

Fig 8 shows how the longitudinal outer rows of the brush head of Fig. 7 can flex away from the gums as force is applied when brushing.

Figs 9 and 10 are plan views of heads constituting further embodiments of the invention with chevron-like and waved transverse, elastomer-filled grooves.

Fig 11 is a partial plan view of a still further embodiment whose head has transverse grooves wherein, along the centre line of the head, the grooves are the full depth of the head so that two rows of approximately parallel hinges are created.

Fig 12 is a partial side view of yet another embodiment showing a side view of a head with variable depth grooves, giving greater flexiblility nearer the neck of the brush.

Referring to Fig 1, a toothbrush head (1) is formed integrally at one end of a handle (2). The head (1) has two substantially parallel faces, and in a top face are mounted bristles distributed in a plurality of tufts (3). The upper and lower faces carry a number of generally parallel transverse grooves (4), leaving a thin, flexible hinge of head material (5). The bristles are cut so that the bristle surface (6) is concave when the brush is in its natural unstressed state. The grooves are filled with an elastomeric material (not shown).

[0028] In Fig 2 a first part of the brush head is formed by a single thinned extension (7) of the handle (2). The extension is surrounded by an elastomer (8) so that the whole head is of comparable thickness to a conventional brush. The head is pre-formed into a naturally concave configuration but is sufficiently flexible that, under normal brushing forces the head can be made to bend back into a convex configuration. The bristle tufts (3) in this example are of approximately equal length and are fused into the elastomeric material.

[0029] In Fig 3 the head is pre-formed into a naturally concave configuration (9) ideally suited to clean the buccal surface (10) of teeth . Transverse grooves (4) confer flexibility on the brush head so that under normal brushing forces the head can be made to bend back into a convex configuration (11) more suited to the lingual surface (12) of the teeth. The grooves are filled with an elastomeric material (not shown), optionally of a different colour to the head material to give a distinctive appearance.

[0030] In Figs 4 and 5 the head (1) comprises multiple extensions (13) of the handle, surrounded by elastomer (8) so that the overall shape of the head is conventional, whilst being flexible in both longitudinal and transverse directions. The bristle tufts (3) are shown fused into the elastomer and are cut so that the bristle surface (6) is generally concave.

[0031] In Fig 6, the head (1) carries both transverse (4) and longitudinal (14) grooves. The grooves are filled with elastomer. Holes (15) are drilled into one face of the head in the regions of normal thickness between the

grooves (16) to accommodate bristle tufts by a conventional stapling process.

[0032] In Figs 7 and 8 the head (1) is pre-formed so that it is naturally concave along the transverse axis. Longitudinal grooves (14) on both upper and lower faces of the head confer flexibility. In this way the outer rows of bristles (17) can flex away from the gums (18) as the teeth (19) are brushed, thus avoiding gum damage.

[0033] Figs 9 and 10 show heads with non-linear, transverse, elastomer-filled grooves. The grooves are in the form of chevrons (20) or waves (21). In both cases, the grooves give the brush a distinctive appearance and, further, help to offset compression stress in the elastomeric material within the grooves as the brush bends. The figures show the back of the head, which becomes compressed as the brush head bends towards a convex configuration.

[0034] In Fig 11 the head has transverse elastomer-filled grooves (4). For clarity the elastomer is not shown. Around the centre axis of the brush BB' the grooves pass right through the brush head (22) leaving a row of hinges (5) on each side of the head. The bristle tufts (3) are conventionally stapled into the thicker parts of the head.

[0035] In Fig 12 the depth of the grooves (4) is shown to increase in the direction towards the handle (2), the deepest grooves being closest to the end of the head nearest to the handle. This results in the part of the head closest to the handle (2) being more flexible by virtue of having thinner hinges than the part of the head furthest from the handle. The grooves are filled with elastomer.

Claims

1. A toothbrush, having an elongated handle (2) and a resiliently flexible, plastic, bristle-bearing head (1), the head having a pair of opposing faces with bristles mounted on one of said pair, the same and the opposite face having at least one linear or non-linear transverse groove (4) therein, thereby creating thin hinge(s) (5) which make the head flexible, **characterised in that** the groove(s) are wholly filled with an elastomeric material (8), such that when the toothbrush is in its normal stress-free configuration, the free ends of bristles lying along a longitudinal axis of the brush form a concave profile suited to clean the buccal surface (10) of the teeth and whereby the head can bend through into a convex configuration suited to the lingual surface (12) of the teeth.

2. A toothbrush according to Claim 1 wherein when the toothbrush is in its normal stress-free configuration, the bristle-bearing face, along a longitudinal axis, forms a generally concave profile.

3. A toothbrush according to Claim 1 or Claim 2 wherein the grooves follow generally curved or zig-zag paths.

4. A toothbrush according to any preceding claim wherein, along the centre line of the head (1), the grooves (4) are the full depth of the head so that two rows of approximately parallel hinges (5) are formed.

Patentansprüche

1. Zahnbürste, mit einem verlängerten Griff (2) und einem elastisch flexiblen. aus Kunststoff bestehenden. Borsten tragenden Kopf (1), wobei der Kopf ein Paar sich gegenüberliegender Flächen mit auf einer der Flächen des Paares angebrachten Borsten aufweist, wobei die gleiche und die gegenüberliegende Fläche zumindest eine lineare oder nichtlineare Nut (4) darin aufweisen, wodurch dünne Gelenke (5) erzeugt werden, die den Kopf flexibel machen, **dadurch gekennzeichnet, dass** die Nut(en) vollständig mit einem elastomeren Material (8) gefüllt sind, so dass, wenn die Zahnbürste sich in ihrer normalen, unbelasteten Konfiguration befindet, die freien Enden von entlang einer Längsachse der Bürste liegenden Borsten ein konkaves Profil bilden, das geeignet ist, die bukkale Oberfläche (10) der Zähne zu reinigen, und wobei sich der Kopf in eine konvexe Konfiguration durchbiegen kann, die geeignet ist, die linguale Oberfläche (12) der Zähne zu reinigen.

2. Zahnbürste nach Anspruch 1, wobei, wenn die Zahnbürste sich in ihrer normalen, unbelasteten Konfiguration befindet. die Borsten tragende Fläche, entlang einer Längsachse, ein im Allgemeinen konkaves Profil bildet.

3. Zahnbürste nach Anspruch 1 oder Anspruch 2, wobei die Nuten im Allgemeinen gekrümmten oder zickzackförmigen Wegen folgen.

4. Zahnbürste nach einem vorstehenden Anspruch, wobei, entlang der Mittellinie des Kopfes (1), die Nuten (4) sich über die gesamte Tiefe des Kopfes erstrekken, so dass zwei Reihen von ungefähr parallelen Gelenken (5) gebildet werden.

Revendications

1. Brosse à dents ayant un manche allongé (2) et une tête, portant des poils, en matière plastique et élastiquement flexible (1), la tête ayant une paire de faces opposées avec des poils montés sur une face de ladite paire, la même face et la face opposée ayant au moins une rainure transversale linéaire ou non linéaire (4), en créant ainsi une ou des charnièe-

res minces (5) qui rendent la tête flexible, **caractérisée en ce que** la ou les rainures sont totalement remplies avec une matière élastomère (8), de telle sorte que, lorsque la brosse à dents est dans sa configuration normale sans contrainte, les extrémités libres des poils s'étendant le long de l'axe longitudinal de la brosse forment un profil concave adapté au nettoyage de la surface buccale (10) des dents et de sorte que la tête peut fléchir en passant par une configuration convexe adaptée à la surface linguale (12) des dents.

2. Brosse à dents selon la revendication 1, dans laquelle, lorsque la brosse à dents est dans sa configuration normale sans contrainte, la face portant les poils, le long d'un axe longitudinal, forme un profil globalement concave.

3. Brosse à dents selon la revendication 1 ou la revendication 2, dans laquelle les rainures suivent des passages globalement courbes ou en zigzag.

4. Brosse à dents selon l'une quelconque des revendications précédentes, dans laquelle, le long de l'axe de la tête (1), les rainures (4) sont sur toute la profondeur de la tête de telle sorte que deux rangées de charnières approximativement parallèles (5) sont formées.

Fig.1

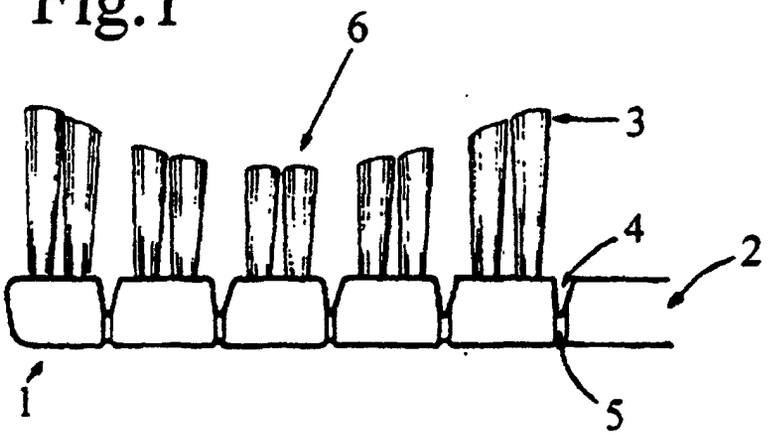

Fig.2

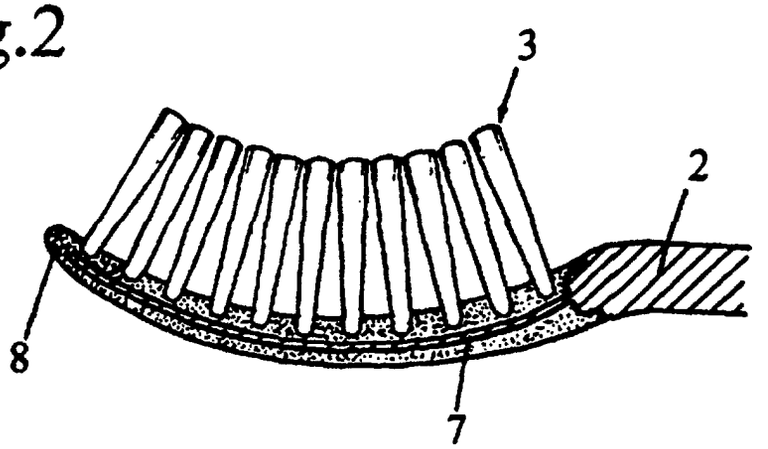

Fig.3

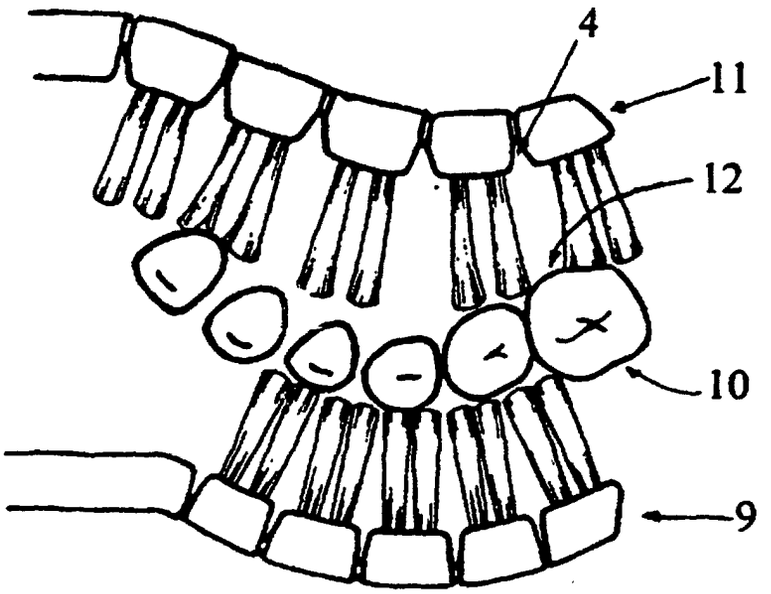

Fig.4

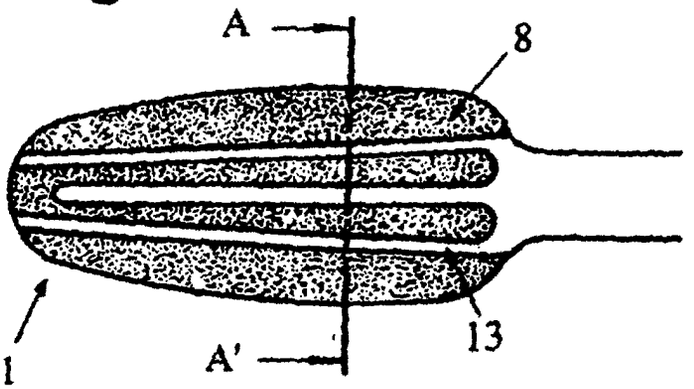

Fig.5

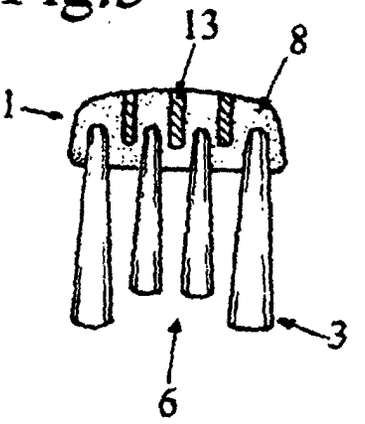

Fig.6

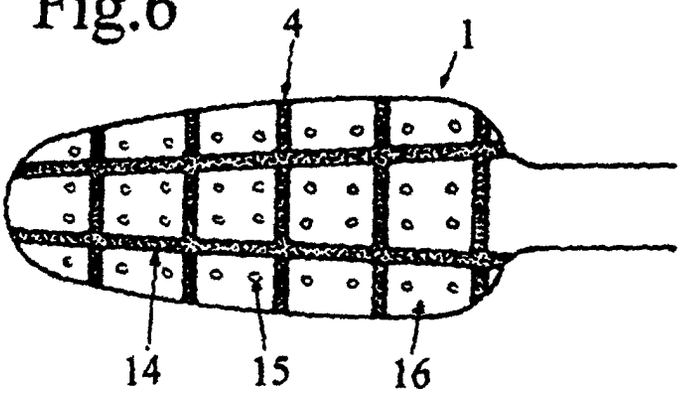

Fig.7

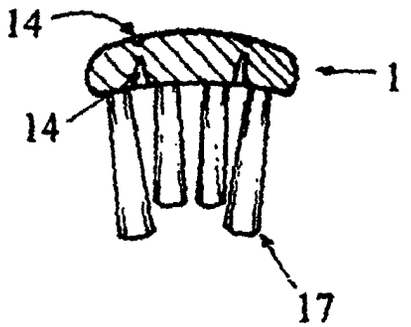

Fig.8

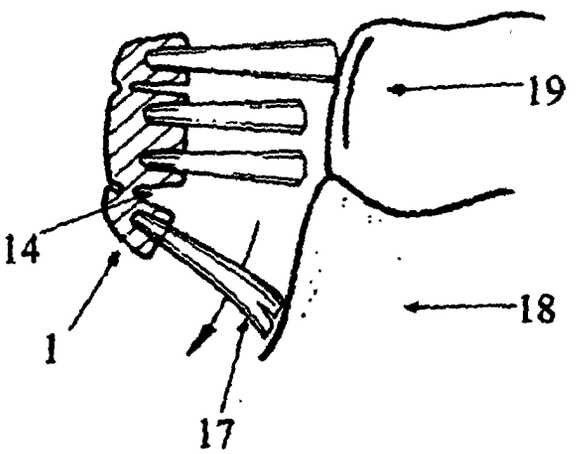

Fig.9

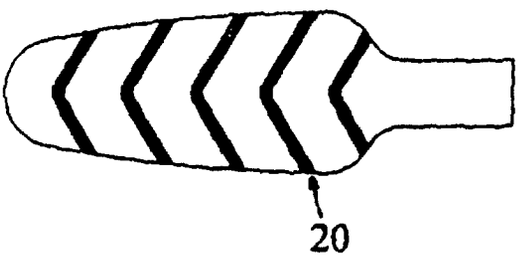

Fig.10

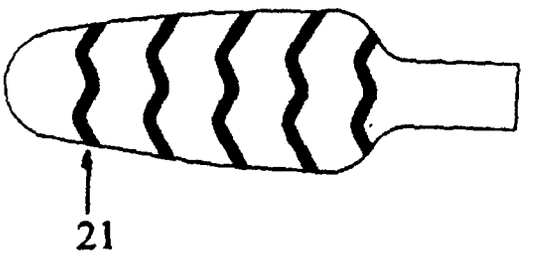

Fig.11

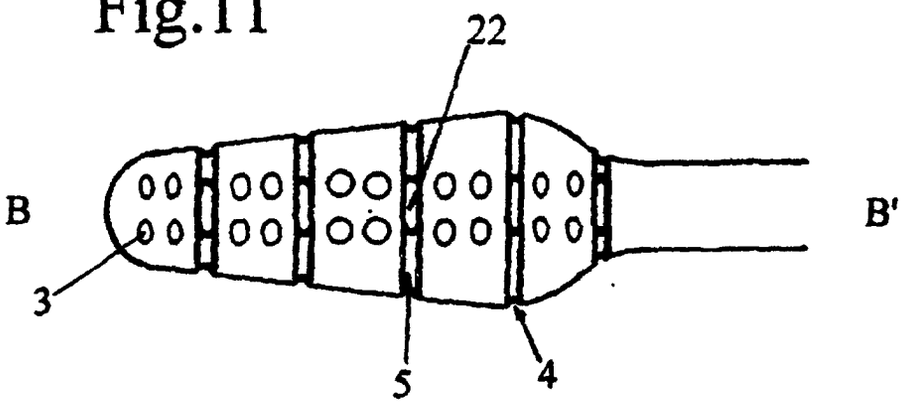

Fig.12