

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 April 2010 (01.04.2010)

(10) International Publication Number
WO 2010/036687 A2

(51) International Patent Classification:
F24C 15/20 (2006.01)

(74) Agent: PEDERSEN, Luke, K.; Baker Botts L.L.P., 2001 Ross Avenue, Suite 600, Dallas, TX 75201 (US).

(21) International Application Number:
PCT/US2009/057994

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
23 September 2009 (23.09.2009)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/099,699 24 September 2008 (24.09.2008) US
12/430,650 27 April 2009 (27.04.2009) US


(71) Applicant (for all designated States except US): CLEAN SYSTEMS LLC [US/US]; 670 Souther Trace Parkway, Shreveport, LA 71106 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ALEXANDER, Glenn, David [NZ/NZ]; 68 Hunt Street, Andersons Bay, Dunedin, 9013 (NZ). SALPIETRA, Joseph, Anthony [US/US]; 670 Southern Trace Parkway, Shreveport, LA 71106 (US).

[Continued on next page]

(54) Title: GREASE REMOVAL APPARATUS, SYSTEMS AND METHODS

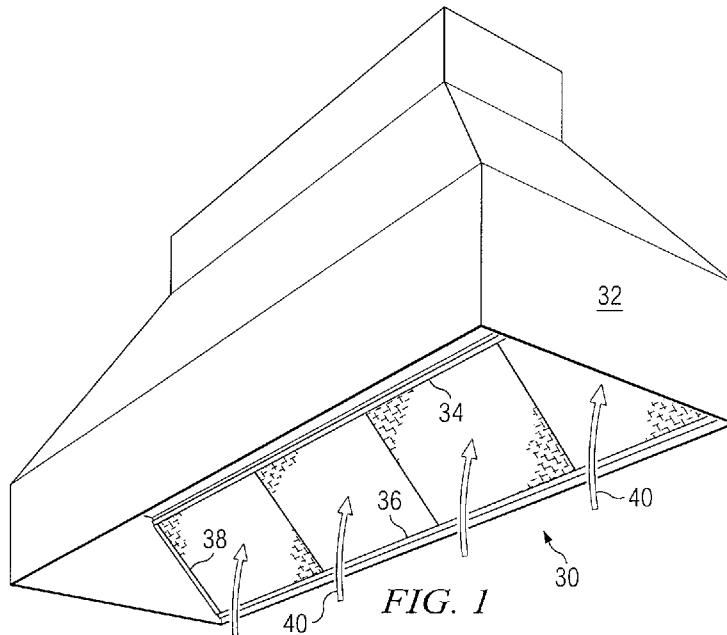

(57) Abstract: A filter assembly includes a filter pad comprising fibers including natural, synthetic and/or hybrid fibers. A stabilizer frame formed of a non-metallic material may be imbedded in the filter pad. The stabilizer frame may be configured to provide support to the filter pad to maintain the filter pad in a generally flat configuration. In accordance with a particular embodiment, the filter pad may be comprised of at least first and second fibrous mats that are coupled together. In this embodiment, the stabilizer frame may be disposed between and coupled with the first and second fibrous mats.



Published:

- *without international search report and to be republished upon receipt of that report (Rule 48.2(g))*

GREASE REMOVAL APPARATUS, SYSTEMS AND METHODS

TECHNICAL FIELD

The teachings of the present disclosure relate to the field of exhaust filtration in ventilation systems and more particularly, to grease removal apparatus, systems and methods.

BACKGROUND

In kitchens, the grease filters and/or grease removal devices are usually installed in exhaust hoods above various types of cooking equipment including deep-fat fryers, grills, griddles and ovens where excess heat and flame can occur. In applications using existing wool or fiber-based filters (see e.g., U.S. 6,293,983) problems may be encountered due to excessive heat or flame. Unless stainless steel heat shields are placed in front of the wool filters, there is the possibility that concentrations of heat (e.g., from exhaust of the cooking equipment) may degrade the wool fibers and cause a hole to form in the filter. Similarly, flames may make holes in the filter if they come in direct contact with the filter which can happen above griddles and grills with a grease flare-up. This is a major draw-back as a hole in the filter renders it ineffective and requires that the filter be replaced.

When selecting the thickness of a wool filter, there is a tradeoff between airflow and grease collection. A thin filter will allow sufficient airflow but will not have a large capacity to collect and store grease. A thicker filter will allow for greater grease collection

but reduce airflow. Existing filters of a thickness selected to allow sufficient airflow may not have a large capacity to catch and store grease. This renders the wool filter expensive to use as it needs to be changed 5 very frequently, and it is also operationally inconvenient to change on a regular basis.

Additionally, existing wool filters often require a separate support frame and frame cover made of metal, which is both costly, heavy for the operator to use and 10 susceptible to damage, often requiring costly replacement. This assembly, and often along with an optional heat shield means the current wool-based system is not only expensive to make but more significantly it can be difficult for the user to operate. As a result, 15 operational use has been limited in the marketplace. There is room for simplification and improvement of this assembly.

The following narrative is provided to give background related to the purpose, theory and operation 20 of kitchen exhaust hoods.

Kitchen Exhaust Hoods

Commercial and institutional cooking establishments typically employ exhaust removal systems to provide ventilation of the workspace, thus supporting the kitchen 25 operation with the removal of heat, grease laden vapor, smoke, contaminants, and cooking by-product. The primary device utilized in the exhaust system for the purpose of capturing the plume produced by the cooking appliances, containing fire, and reducing the contaminants entering 30 the exhaust system is the exhaust hood.

The heating of cooking appliances generally results in a natural upward draft of air, which rises from the

cooking battery. At the point where food is being heated and cooked, the updraft or plume, also known as effluent, becomes entrained into the air stream rising from the cooking surface. This by-product will be produced at 5 varying rates based on the surface temperature of the cooking appliances, and the type of foods being prepared. With cooking processes ranging from low to high temperatures, and vast differences in the grease content of the foods being prepared, the need exists to provide 10 adequate ventilation of the workspace, contaminant removal, and fire prevention based on the severity of the cooking operation.

Non-Grease versus Grease Type Hoods

Two basic types of hoods are commonly utilized for 15 ventilation purposes within commercial and institutional kitchen facilities, with the main factor of their division being whether they are designed to ventilate grease-laden vapor or simply heat and vapor. These are divided into type 1, (commonly referred to as class 1), 20 constructed and designed for the venting of grease laden vapor, and type 2, (or class 2), for the venting of heat, vapor, and odor only.

Since the teachings of the present disclosure includes to the capture of grease particulates from 25 grease laden vapor, further discussion will focus primarily upon Class 1 hoods.

Class 1 Exhaust Hoods

Cooking applications which produce grease-laden vapor typically require the use of class 1 hoods, which 30 will be divided into two main groups; listed exhaust hoods, and unlisted hoods.

Listed exhaust hoods have been tested for performance by a third party Listing Authority, such as Intertek/ETL or Underwriters Laboratories, for their performance in capturing smoke and vapor at varying 5 temperatures, ability to withstand fire conditions, and electrical components survivability in the application.

Grease Removal Devices

Listed and unlisted exhaust hoods, which are used in cooking applications, will include grease removal devices 10 to reduce the grease volume of the exhaust air stream prior to the exhaust air entering the exhaust duct. Grease buildup in the exhaust ductwork is considered a fire hazard since the deposited by-product remains flammable. With the accelerated air velocities within 15 the exhaust ductwork induced by the blower, potential risks escalate with the buildup of flammable byproduct. Failure to remove this byproduct at the source of the grease removal device within the hood may result in migration of the flammable load throughout the exhaust 20 duct system.

Grease removal apparatus and systems are normally located within the exhaust hood, and may be either removable for cleaning, or may be a fixed component within the exhaust hood for automatic wash down, such as 25 a water wash type hood. Removable type filters are normally arranged within a filter rack, are located just below the exhaust duct collar for the hood, and typically have a metal grease collection container, which does not typically exceed one gallon.

Baffle Filters

Most common filter hoods today utilize baffle type filters, which operate based upon the principle of centrifugal grease extraction. These filters are 5 configured with a series of overlapping baffles, which force the grease laden exhaust air to make several changes in direction within the grease filter. The grease is dismissed from the air stream by centrifugal force, held within the filter interior, and accumulation 10 of the grease aerosol particles which begin to liquefy continuously drain from the filter to a grease drip tray, or trough, and then drain into a metal container which does not typically exceed one gallon.

Baffle filters operate with among the lowest 15 resistance offered by any grease removal device, which may be between .50" and .75" static pressure, and the average air velocity at the face of the filter may be between 150 feet per minute, and 400 feet per minute, both depending upon the hood airflow in volume.

20 Baffle filters are listed to Underwriters Laboratories ("UL") Standard 1046, which tests their ability to perform in the application, and in fire conditions. However, UL Standard 1046 does not adequately address the effectiveness of the baffle to 25 actually remove grease from the air flow and prevent it from entering the exhaust duct. As a result, most baffles are very poor at removing grease from the airflow.

Grease in the ducting constitutes a major fire 30 hazard as duct fires are a constant concern in commercial kitchen exhaust systems.

SUMMARY

The teachings of the present disclosure are directed to grease removal apparatus, systems and methods. In accordance with a particular embodiment, the present disclosure provides for a filter assembly that includes a filter pad comprising fibers including natural, synthetic and/or hybrid fibers. A stabilizer frame may be imbedded in the filter pad. In a particular embodiment, the stabilizer frame may be formed of a nonmetallic material. 5 The stabilizer frame is configured to provide support to the filter pad to maintain the filter pad in a generally flat configuration. In accordance with a particular embodiment, the filter pad may be comprised of at least first and second fibrous mats being coupled together, and 10 the stabilizer is disposed between and coupled with the first and second fibrous mats. 15

In accordance with an alternative embodiment of the present disclosure, the filter pad may be formed from a single fibrous mat that is coupled with a stabilizer. In 20 accordance with this embodiment, each of four edges of the mat are lapped over respective edges of the stabilizer frame.

In accordance with yet another embodiment of the present disclosure, the blend of fibers may include 25 synthetic fibers and/or viscose fibers. In some embodiments, at least a portion of the fibers may be treated with a solution that is fire resistant or fire retardant.

A technical advantage of particular embodiments of 30 the present disclosure includes a filter assembly that is effective at removing or reducing grease particulates from grease laden air. Accordingly, baffle filters may

remain cleaner for a longer period of time, thereby being an even more effective fire barrier since the fuel source (e.g., grease particulates) has been decreased from the airflow prior to reaching any baffle filters and/or 5 ductwork.

Another technical advantage of particular embodiments of the present disclosure includes a filter assembly that distributes flame more evenly across a baffle filter, when the filter assembly is located 10 "upstream" from a baffle filter. Accordingly, baffle filters are protected from fire and damage, perform better, and remain cleaner for a longer period of time.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present 15 disclosure and its advantages, reference is now made to the following descriptions, taken in conjunction with the accompanying drawings, in which:

FIGURE 1 illustrates a filter assembly, in accordance with a particular embodiment of the present 20 disclosure, installed within a vent hood;

FIGURE 2 illustrates a disposable grease removal device, in accordance with a particular embodiment of the present disclosure;

FIGURE 3 illustrates a stabilizer that may be a part 25 of the grease removal device of FIGURE 2, in accordance with a particular embodiment of the present disclosure;

FIGURE 4 illustrates an alternative embodiment disposable grease removal device; and

FIGURE 5 illustrates a cross-section of yet another 30 alternative embodiment disposable grease removal device.

DETAILED DESCRIPTION OF THE EMBODIMENTS

The present disclosure is directed to grease removal apparatus, systems and methods. A particular embodiment of the present disclosure includes a filter assembly that 5 may be referred to herein as a Disposable Grease Removal Device ("DGRD"), and may be used in, for example, kitchen exhaust systems. In particular embodiments, the DGRD may be formed of materials such that it is generally "self-supporting", meaning that it does not require metal 10 filter support frames, frame covers or heat shields. The DGRD can be formed in a variety of ways using a variety of materials that may result in a DGRD that is either reusable or disposable. In such embodiments, the DGRD can be easily mounted in the exhaust hoods by simply 15 sliding it into place on brackets or some other similar fastening or support system within the exhaust hood.

FIGURES 1-3 illustrate a particular embodiment DGRD 30, in more detail. DGRD 30 is installed within a vent hood 32. Vent hood 32 is configured and positioned such 20 that air leaving a cooking area will pass through DGRD 30 before being exposed to (i) a baffle filter (not shown in FIGURE 1) that may be positioned behind DGRD 30; and/or (ii) ductwork associated with vent hood 32 that is configured to remove the air from the cooking area (with 25 or without an associated exhaust fan(s)). Vent hood 32 includes top and bottom filter clips 34 and 36, respectively, and side clips 38 that collectively secure a plurality of DGRDs 30 in place, and allow for simplified removal and/or replacement of DGRDs 30. A 30 plurality of direction arrows 40 are provided in FIGURE 1 to illustrate the direction of air flow.

The DGRD 30 includes two primary components, either or both of which may be formed from materials that allow for disposal of the DGRD after a single use: 1) a filter pad 42 that may be referred to herein as a grease 5 collector pad , and 2) an internal stabilizer frame 44.

The grease collector pad 42 is one of the primary mechanisms that will capture and remove the grease particulates from the airflow. The fibers which make up the grease collector pad 42 are capable of collecting and 10 holding grease particulates from the air that travels through the grease collector pad 42. In particular embodiments, the grease collector pad 42 may be formed principally from a mixture of flame resistant viscose fibers and wool fibers that are woven together, and 15 bonded together with a bonding emulsion that may contain additional additives such as fire retardant, fire suppressant, anti-microbial, anti-bacterial, color dyes, etc.

The internal stabilizer frame 44 is designed to add 20 structure and rigidity to the grease removal device. In the embodiment of FIGURE 3, the internal stabilizer frame 44 has four sides 46 (top 46a, bottom 46b, left 46c and right 46d), vertical support 48a, and horizontal support 48b. In a particular embodiment, supports 48a and 48b 25 may be approximately $\frac{3}{4}$ " wide and approximately 0.125" thick. In another embodiment, the internal stabilizer frame 44 may also be made of practically any non-metallic material, for example a natural, bio-degradable material that is lightweight and flame-resistant. The internal 30 stabilizer frame 44 could be made of practically any material that will pass any required regulatory codes. The stabilizer frame may also include any number of

horizontal, vertical and/or diagonal supports of practically any size or configuration. Functionally, it is beneficial for the internal stabilizer frame 44 to add shape and structure to the DGRD with relatively little 5 added weight and/or very little added static pressure.

The DGRD of FIGURE 2 is generally formed by inserting the internal stabilizer frame 44 within or between two grease collector pads 42. In a particular embodiment, the internal stabilizer frame 44 may be 10 coated with glue on both sides, which allows the internal stabilizer frame 44 and the grease collector pad 42 to be merged together into a single DGRD.

The DGRD can be manufactured using a variety of processes and alternative materials. Included herein is 15 a description of various details related to how the two primary components of the DGRD can be produced. The two primary components noted above are the grease collector pad 42 and the internal stabilizer frame 44.

FIGURE 4 illustrates a DGRD 30a, in accordance with 20 another embodiment of the present disclosure. DGRD 30a includes a grease collector pad 42a and an internal stabilizer frame 44a, that are similar to grease collector pad 42 and internal stabilizer frame 44 of FIGURE 2. However, the method for manufacturing DGRD 30a 25 would be slightly different. DGRD 30a is formed using a single grease collector pad 42a that is big enough to overlap internal stabilizer frame 44. Thus, at each edge of the internal stabilizer 44a, the grease collector pad is lapped over the internal stabilizer frame 44a. An 30 optional diagonal support 46e is also included on the internal stabilizer frame.

FIGURE 5 illustrates yet another DGRD 30b, in accordance with yet another embodiment of the present disclosure. DGRD 30b includes a single grease collector pad 42b. An internal stabilizer frame 44b is embedded 5 within grease collector pad 42b, which is simply woven around internal stabilizer frame 44b to manufacture DGRD 30b.

Grease Collector Pad

The grease collector pads of this disclosure can be 10 manufactured using one or more (e.g., a blend) of various fibers. For example, at least three different types of fibers may be used: (i) natural fibers, (ii) synthetic fibers, and/or (iii) hybrid fibers. For the purposes of this disclosure, "natural" fibers generally refers to 15 fibers that are derived from nature and include wool (e.g., sheep's wool or any other animal hair), cotton, linen, hemp, manila, flax, plant fibers, jute sisal, etc. For the purposes of this disclosure, "synthetic" fibers generally refers to fibers that are man-made, and include 20 nylon, polyester, acrylic, polypropylene, polyethylene, polystyrene, flame resistant modified acrylic, etc. For the purposes of this disclosure, "hybrid" fibers generally refers to fibers that are derived from nature but materially modified by man, and include viscose, 25 rayon, PLA, PLA flame resistant polymers, biodegradable flame resistant polymers, flame resistant rayon, synthetic fiber derived from a natural source, fibers that are derived from corn starch, etc. Most of the above referenced fibers may also be used in a flame 30 resistant form in which a flame resistant additive is impregnated into the fibers.

One particular embodiment of the present disclosure is a mixture of wool fibers and flame resistant viscose fibers. The blended fibers may be sprayed with a bonding emulsion that may be selected such that it is 5 biodegradable. In various embodiments, the bonding emulsion may contain fire-resistant, fire-retardant and/or fire-suppressant ingredients, antimicrobial agents and a color dye mixed with it in any combination.

The grease collector pads may also be made using 10 wool and flame resistant viscose blended in any ratio. For example, the ratio could be as much as 95% wool and 5% flame resistant viscose or as much as 95% flame resistant viscose and 5% wool. In general, practically any ratio of the blended flame resistant viscose and wool 15 may be employed, within the teachings of the present disclosure. In other embodiments, the ratio could also be 100% flame resistant viscose or 100% wool fibers.

For example, the following describes blends that may be used in accordance with particular embodiments of the 20 present disclosure:

- 50% wool and 50% 8-9 denier flame resistant viscose bonded with biodegradable flame resistant treated acrylic bonding emulsion (for purposes of this specification, "denier" is a unit of measurement of linear density of textile fiber mass, calculated as one gram per nine-thousand meters).
- 100% 8-9 denier flame resistant viscose bonded with biodegradable flame resistant treated acrylic bonding emulsion.
- 50% wool / 25% 8-9 denier flame resistant viscose / 25% 2 denier flame resistant viscose bonded with

biodegradable flame resistant treated acrylic bonding emulsion.

In other embodiments, the viscose and/or flame resistant viscose may be provided within a range of 2-9 denier, or 5 within a narrower range of 4-8 denier. In particular embodiments, it may be provided at 5 denier.

In addition, the wool or flame resistant viscose could be blended with other fibers that are natural, synthetic and/or hybrid fibers, which can impart flame 10 resistant or structural properties to the resultant apparatus. This could include rayon, flame resistant rayon, flame resistant modified acrylic, PLA flame resistant polymers, biodegradable flame resistant polymers, plant fibers or flame resistant natural fibers 15 derived from plant fibers i.e. jute, flax, hemp, sisal, cotton, manila. In accordance with another embodiment, wool and viscose may be blended in any percentage then treated with a fire retardant that would impart fire retardant properties to the wool and viscose blend. This 20 could also be a blend of any natural or synthetic fibers blended in any percentage which could be treated with a flame resistant compound to make the overall blend flame resistant.

In accordance with a particular embodiment, the 25 wool/flame resistant viscose may be treated with flame retardant and/or flame suppressant compounds to improve the heat and flame resistance of the resulting pad. Alternatively, the process may omit flame resistant and/or flame suppressant treatment as it is determined by 30 testing of the various blends to heat and flame for a particular application.

The flame resistant viscose fiber is relatively heat and flame resistant and will only degrade under extreme conditions of heat and flame. For this reason, flame resistant viscose fibers are used extensively in clothing 5 for firemen, welders, military and others that are exposed to severe heat and/or flame. This may be important given that the DGRD is often installed above deep-fat fryers, grills, griddles and ovens in the kitchen where excess heat and flame can occur. Flame 10 resistant viscose fibers being blended into the grease collector pad 42 may significantly improve heat and flame resistance properties of the DGRD.

While wool is naturally flame resistant, in an open structure the wool fibers may be exposed to higher 15 concentrations of oxygen in certain conditions. For this reason, a flame retardant and/or fire suppressant may be applied in accordance with particular embodiments. However, with the flame resistant viscose or other similar fiber it may not be required, or may be required 20 in smaller concentration, depending on the planned application.

Flame resistant viscose fibers capture grease and contaminants from grease laden vapor. Therefore, when used in combination with wool fibers there is very 25 similar grease capturing ability, but, with the added benefit of more robust performance against heat and flame.

In accordance with particular embodiments of this disclosure, the bonding emulsion may be used to provide a 30 way to apply the fire-retardant/suppressant compounds or any other additives such as color dyes, anti-bacterial, antimicrobials, etc. The bonding emulsion may also be

used to bond the blended fibers together in the desired shape. The bonding emulsion may be designed so that it will break down over time when the DGRD is disposed of after use (i.e., is biodegradable).

5 Wool fibers are bio-degradable and the flame resistant viscose fibers may be made from wood pulp and/or in such a way that it is 100% bio-degradable. Hence, the resulting grease collector pad 42 using this blend of material and bonding emulsion may be fully 10 biodegradable and as such can be easily disposed of without effecting the environment.

The bonding emulsion, in particular embodiments, is made from biodegradable components comprising a blend of acrylic co-polymers. It may also be made with other 15 natural occurring and biodegradable binders such as starch and protein adhesives. Synthetic bonding components which have biodegradable properties including, but not limited to, PLA (Polylactic acid) may also be used. Ultra-sound and/or Hydrogen-bonding may also be a 20 used as a bonding method.

In accordance with a particular embodiment, the grease collector pad 42 may be formed from a 50% blend of fire-resistant 5-denier x 64mm flame resistant viscose and 50% of fibers comprised of 100% lamb's wool. The 25 lamb's wool may be clean, scoured 28 micron wool in 1 to 3 inch lengths. A single grease collector pad 42 in this embodiment may have a weight of approximately 100 grams per square meter and a loft of approximately 8mm.

Following is a discussion of various manufacturing 30 processes that could be used to produce the grease collector pad 42, in accordance with particular embodiments of the present disclosure.

The scoured wool may be "opened" to enable easier processing. The wool may then be blended with the flame resistant viscose or similar fiber as a pre-blend, and transferred to be put through a non-woven carding machine 5 which further opens and generally aligns the blended fibers. The card may be used to make the fiber blend into a fiber web which may then be layered using a cross lapping machine into a blended fiber wadding. If a grid or mesh was to be introduced it would feed into the blend 10 at the cross lapper of a roll. The lapping and carding may be used to ensure the fibers are aligned correctly so that when the fiber wadding is sprayed with binder that the final grease collector pad 42 will have sufficient, predetermined minimum loft.

15 The wool/flame resistant viscose blend may also be needle punched into a non-woven blanket. Other non-woven process such as needling, thermo-bonding, ultra-sound, air laid, spun bond or other non woven technology may be used to form the wadding/blanket.

20 At this stage the bonding emulsion may be applied by spraying the top and the bottom of the wadding with the spray mix. The emulsion is applied in a diluted form to allow penetration through the wadding. Vacuum is applied below the wadding to further assist the penetration of 25 the fiber with the bonding emulsion. The bonding emulsion may be used to apply the other additives such as fire retardants, fire suppressants, anti-microbial agents, anti-bacterial agents, color dyes, etc. so the solution should be applied relatively evenly and in the 30 correct, predetermined proportions.

As the thickness of the wadding and grams per square meter can vary, the amount of bonding emulsion will also

vary, so that it matches what is desired to sufficiently bond the grease collector pad 42 and impart the desired physical and fire resistant properties.

The spray bonded wadding may then be passed through 5 an oven at over 280 F to drive off the water and cure the bonding resins. The resultant wadding may then be rolled into rolls and allowed 24 hours to cure and the binder to be fully effective. During this time the wool absorbs moisture from the atmosphere. The resultant wadding may 10 then be made into rolls cut at specific widths and lengths.

The grease collector pad 42 media could be made as a flat sheet or it could be folded into pleats. The use of 15 pleats may provide additional capture capacity due to the pleats resulting in more surface area for capacity available within the same area.

Internal Stabilizer Frame

One function of the internal stabilizer frame is to provide dimensional structure and rigidity to the DGRD. 20 The internal stabilizer frame, in a particular embodiment, may be made from fire-resistant fiberboard (e.g., that is 0.125" thick) and can be either die-cut or cut into individual strips and assembled into the required shape, and may include any combination of 25 diagonal, vertical or horizontal support members. Alternative materials may also be non-woven 100% flame resistant viscose fibers which have been needle punched so that it has the consistency of thick cardboard and as such can be used to make the internal stabilizer frame. 30 The flame resistant viscose is flame resistant. The non-woven flame resistant viscose could then be cut into strips and assembled or die-cut into the shape required

for each internal stabilizer frame with any combination of vertical, horizontal or diagonal support members.

Other materials that could be used to make the internal stabilizer frame include flame resistant treated 5 jute or Sisal fiber or flame resistant treated plastics and polymers.

Assembly of the DGRD

The DGRD is formed when the grease collector pad and the internal stabilizer frame are merged together to 10 create a single unit. In a particular embodiment the assembly process includes inserting the internal stabilizer frame between two grease collector pads. In particular embodiments, both sides of the internal stabilizer frame may be coated with a glue which results 15 in the components being held firmly together when pressure is applied to the unit to compress the assembly. In the embodiment described above, the DGRD may weigh approximately 250 grams per square meter ("gsm") with a loft of approximately 22-25mm. In other various 20 embodiments, the DGRD can vary in weight from 50gsm to 750gsm. The weight used is a dry mass weight based on the production weight of the grease collector pad when they come off of the production line. The resultant grease collector pad assembly may have a dry loft of 5 mm 25 to 55 mm.

Alternative Embodiments

The DGRD may be made in other shapes and sizes using the same primary ingredients as the embodiments described above. For example, the following is an alternative 30 method of design for the DGRD that may use some or all of the same materials but assembles them with the internal

stabilizer frame disposed upon the exterior of the fiber media.

The internal stabilizer frame cartridge or frame panel may be made by using a fire resistant stiff 5 material and die cutting it into a frame with diagonal and/or horizontal support members. The fiber media comprising the wool/flame resistant viscose blanket may be bonded to the inside perimeter of the external frame using glue providing a continuous and positive seal.

10 The fiber media may be installed as a flat sheet in the enclosure frame or it could be folded into pleats. The pleats may need to be supported with a grid made from any natural or synthetic material which exhibits fire 15 resistant properties. It may also be expanded metal but this has the disadvantage of not being biodegradable. Natural grids or meshes could include flame resistant viscose, flame resistant treated jute or Sisal fiber or flame resistant treated plastics and polymers. The pleats per linear foot would vary depending on the 20 thickness of the fiber media. Alternatively the fiber media could be a flat sheet with no pleats.

Another method to add support to the fiber media would be to include a mesh or grid in the non woven manufacture. The grid or mesh may be inserted in the 25 middle of the wool/flame resistant viscose blend during manufacture. This would mean the fiber blend itself would offer flame resistance and heat protection to any grid or mesh used. So it's possible the grid or mesh used may not need to be flame resistant. The die cut 30 material could be non-woven flame resistant viscose as this has excellent strength and excellent flame and heat resistance. It is also biodegradable. However the die

cut material may also be formed from any natural or synthetic material particularly if they have biodegradability and flame resistant properties. Even flame resistant treated cardboard could possibly be used
5 in the manufacture of the die cut support.

The structure and support need not only be die cut. It could be welded supports, or supports fixed to the fiber media directly or injection molded plastic or extruded plastic profiles or any combination of these
10 construction methods. The fiber media could also be made to be more rigid during the manufacturing process by varying the composition of the fibers and the density, varying the non woven by needling or other non woven process or the application and type of bonding emulsion
15 and varying the curing temperature or any combination of these. This could enable the fiber media to be produced into a pleated pad without the need for additional support with an expanded mesh or grid.

The die-cut external internal stabilizer frame may
20 be made from non woven 100% flame resistant viscose which has been needle punched so that it has the consistency of thick cardboard and as such can be used to make the support frame. The flame resistant viscose is flame resistant. The non-woven flame resistant viscose is die
25 cut into the shape required for each grease collector pad with diagonal and horizontal support members. To complete the cartridge up to 2 die cut frames may be required. Effectively a front and back side of the internal stabilizer frame. The wool/flame resistant
30 viscose media may then be cut into the size required to fit the support frame. If the media is to be pleated it will have to be cut to a larger size to allow for the

additional requirement due to the pleats. This will vary depending on the number of pleats per linear meter and the depth of the internal stabilizer frame. At this stage, if an extra supporting grid or mesh is required it

5 can be adhered to the fiber media by some type of flame resistant adhesive. Alternatively it could be stitched or sewn in place with flame resistant thread. The die cut support frames are then assembled using flame resistant adhesive ready for the fiber media to be added.

10 The fiber media pack comprising the wool/flame resistant viscose, pleated or not (e.g., flat sheet) which is then bonded with a flame resistant glue to the inside perimeter of the enclosure frame, providing a continuous and positive seal.

15 The resulting DGRD cassette is then quality inspected and is ready for installation and use. The DGRD may be supplied as panels and cassettes which are ready to install.

20 The DGRD may then be installed in hoods and exhaust units in kitchens and food preparation areas. The grease collector pad will effectively capture the grease and other contaminants. In some embodiments, the hoods or exhaust hoods will need to have a simple bracket (e.g., Z bracket) or similar installed to support the DGRD.

25 The cassettes are then placed in the brackets in the hoods in front of the flame baffles. A tool with an extension arm may be used to mount or replace DGRD. Sufficient DGRD's should be installed to cover the hood aperture and the DGRD's may be butted up against each

30 other to form an effective seal.

When one or all of the DGRD's is full of grease, it's a simple matter to remove them and install a replacement.

DGRD Performance

5 In particular embodiments, the DGRD may have improved performance relative to existing filter systems, in collecting grease in various particulate sizes as per testing that may be done using the ASTM F-2519A standard.

10 In such embodiments, the DGRD may have larger grease capacity than other fiber filters available and even with the higher grease holding capacity the resulting static pressure increase of the DGRD may be less than other fiber-based filters. This results in kitchen hoods being able to run efficiently without the need to add larger 15 motors. When the DGRD is full it may simply be replaced with a new DGRD and the soiled pad can be disposed of in an environmentally friendly manner. The DGRD may be made in such a way that it can be fully bio-degradable and may breakdown 100% in a landfill in less than 12 months.

20 Mounting Brackets

Mounting brackets may also be provided as part of the DGRD. They can be formed of practically any material that will support the weight of the DGRD and hold the DGRD firmly in place within the exhaust hood. In 25 accordance with a particular embodiment of the present disclosure, to meet various codes and regulations governing exhaust hoods, the mounting brackets may be comprised of Stainless Steel and/or another non-combustible material. The mounting brackets may be 30 designed to practically any shape to hold the DGRD in place and maintain a sufficient seal within the hood

aperture. In particular embodiments of the present disclosure, the mounting brackets may be made of Stainless Steel and formed into the shape of "Z" or "U" to hold the DGRD in place, and allow for simplified 5 removal and/or replacement of DGRDs.

Installation/Removal Tool

An installation/removal tool may also be provided as part of the DGRD System. The installation/removal tool may be used to allow an operator to effectively reach the 10 DGRD when installed within the exhaust hood, without having to climb onto the cooking equipment. The installation/removal tool may be comprised of lightweight aluminum or plastic as the weight of the DGRD does not require a particularly "heavy-duty" material. However, 15 practically any material can be used to make the installation/removal tool that is strong enough to hold the DGRD. The end of the mounting tool includes a plurality of prongs which are used to slightly pierce the front of the DGRD to grab the internal stabilizer frame 20 44 for lifting and inserting the DGRD into the mounting brackets for installation. For DGRD removal, the prongs on the end of the installation/removal tool are used to pierce completely through grease collector pad 42 and 25 simply lift and remove from the mounting brackets.

The present disclosure is generally directed to a removable and/or disposable grease removal device that is placed between the cooking surface and the baffle filters described herein, to capture grease particulates from grease laden vapors prior to entry into, or "upstream" 30 from the baffle filters described herein. It should be noted that existing grease removal devices are typically located "downstream" of baffle filters.

Although an embodiment of the disclosure has been described using specific terms, such description is for illustrative purposes only. The words used are words of description rather than of limitation. It is to be understood that changes in variations may be made by those of ordinary skill in the art without departing from the spirit and scope of the present disclosure, which is set forth in the following claims. Therefore, the spirit and scope of the appended claims should not be limited to the description of the embodiments disclosed therein.

CLAIMS

1. A filter assembly, comprising:
 - a filter pad comprising fibers selected from the group consisting of natural fibers, synthetic fibers and hybrid fibers; and
 - a stabilizer frame embedded in the filter pad, the stabilizer frame being configured to provide support to the filter pad to maintain the filter pad in a generally flat configuration.
2. The filter assembly of Claim 1, wherein the filter pad is comprised of at least first and second fibrous mats being coupled together, and the stabilizer frame is disposed between and coupled with the first and second fibrous mats.
3. The filter assembly of Claim 1, wherein the filter pad is formed from a single fibrous mat that is coupled with the stabilizer frame, and wherein each of four edges of the mat are lapped over respective edges of the stabilizer frame.
4. The filter assembly of Claim 1, wherein the fibers include a blend of wool and synthetic fibers.
5. The filter assembly of Claim 1, wherein the fibers include viscose fibers.
- 30 6. The filter assembly of Claim 1, wherein at least a portion of the fibers are treated with a solution that is fire resistant or fire retardant.

7. The filter assembly of Claim 1, wherein the stabilizer frame is formed of fiber board material.

5 8. The filter assembly of Claim 1, wherein the filter pad includes a bonding emulsion.

9. The filter assembly of Claim 1, wherein the filter assembly has a total dry weight approximately 10 between 210 and 700 grams per square meter.

10. The filter assembly of Claim 1, wherein the filter assembly has a dry loft of approximately between 22mm and 50mm.

15

11. A filter assembly, comprising:

a filter pad comprising a blend of fibers including wool fibers and fire resistant viscose fibers within the range of approximately 4-8 denier, the filter pad further comprising a fire retardant bonding emulsion;

25 a stabilizer frame embedded in the filter pad, the stabilizer frame comprising a fire treated fiber board in a generally rectangular configuration and having supports extending between opposites sides of the stabilizer frame, the stabilizer frame being configured to provide support to the filter pad to maintain the filter pad in a generally flat configuration;

30 wherein the fiber board has a thickness of approximately between 1/16" to 3/4", and the supports are approximately 1/4" to 1.5" wide; and

a flame resistant glue disposed between the stabilizer frame and the filter pad, and coupling the stabilizer frame to the filter pad.

5 12. A method of manufacture, comprising:
coupling a filter pad comprising fibers selected
from the group consisting of natural fibers, synthetic
fibers and hybrid fibers, with a stabilizer frame; and
wherein the stabilizer frame is embedded in the
10 filter pad, the stabilizer frame being configured to
provide support to the filter pad to maintain the filter
pad in a generally flat configuration.

13. The method of Claim 12, wherein the filter pad
15 is comprised of at least first and second fibrous mats
being coupled together, and the stabilizer frame is
disposed between and coupled with the first and second
fibrous mats.

20 14. The method of Claim 12, wherein the filter pad
is formed from a single fibrous mat that is coupled with
the stabilizer frame, and wherein each of four edges of
the mat are lapped over respective edges of the
stabilizer frame.

25

15. The method of Claim 12, wherein the fibers
include a blend of wool and synthetic fibers.

16. The method of Claim 12, wherein the fibers
30 include viscose fibers.

17. The method of Claim 12, wherein at least a portion of the fibers are treated with a solution that is fire resistant or fire retardant.

5 18. The method of Claim 12, wherein the stabilizer frame is formed of fiber board material.

19. A method of manufacture, comprising:
blending wool fibers with flame resistant viscose
10 fibers;
carding the blend into a fiber web;
spraying the fiber web with a binder;
needle punching the fiber web into a non-woven
blanket; and
15 applying a bonding emulsion to the wool fibers.

20. The method of Claim 19, further comprising
applying a vacuum to the non-woven blanket.

20 21. The method of Claim 20, further comprising
passing the non-woven blanket through an oven at over 280
degrees Fahrenheit.

25 22. The method of Claim 21, further comprising
coupling a stabilizer frame with the non-woven blanket.

