



(22) **Date de dépôt/Filing Date:** 2013/02/06

(41) **Mise à la disp. pub./Open to Public Insp.:** 2013/08/16

(45) **Date de délivrance/Issue Date:** 2016/08/16

(30) **Priorités/Priorities:** 2012/02/16 (US61/599,476);
2012/12/17 (US13/717,280)

(51) **Cl.Int./Int.Cl.** *H04L 12/12* (2006.01),
H04L 29/04 (2006.01), *H04W 76/00* (2009.01)


(72) **Inventeurs/Inventors:**
TSE, CHI CHIU, CA;
MAZZUCA, ELLIOTT MICHAEL GUY, CA;
HO, ALAN PAK-LUN, CA

(73) **Propriétaire/Owner:**
BLACKBERRY LIMITED, CA

(74) **Agent:** MOFFAT & CO.

(54) **Titre : PROCEDURE ET APPAREIL POUR PROCEDURE D'ENTREE EN COMMUNICATION AUTOMATIQUE AVEC UN RESEAU
PRIVE VIRTUEL AU MOMENT DE LA SELECTION DE L'INTERFACE**

(54) **Title: METHOD AND APPARATUS FOR AUTOMATIC VPN LOGIN ON INTERFACE SELECTION**

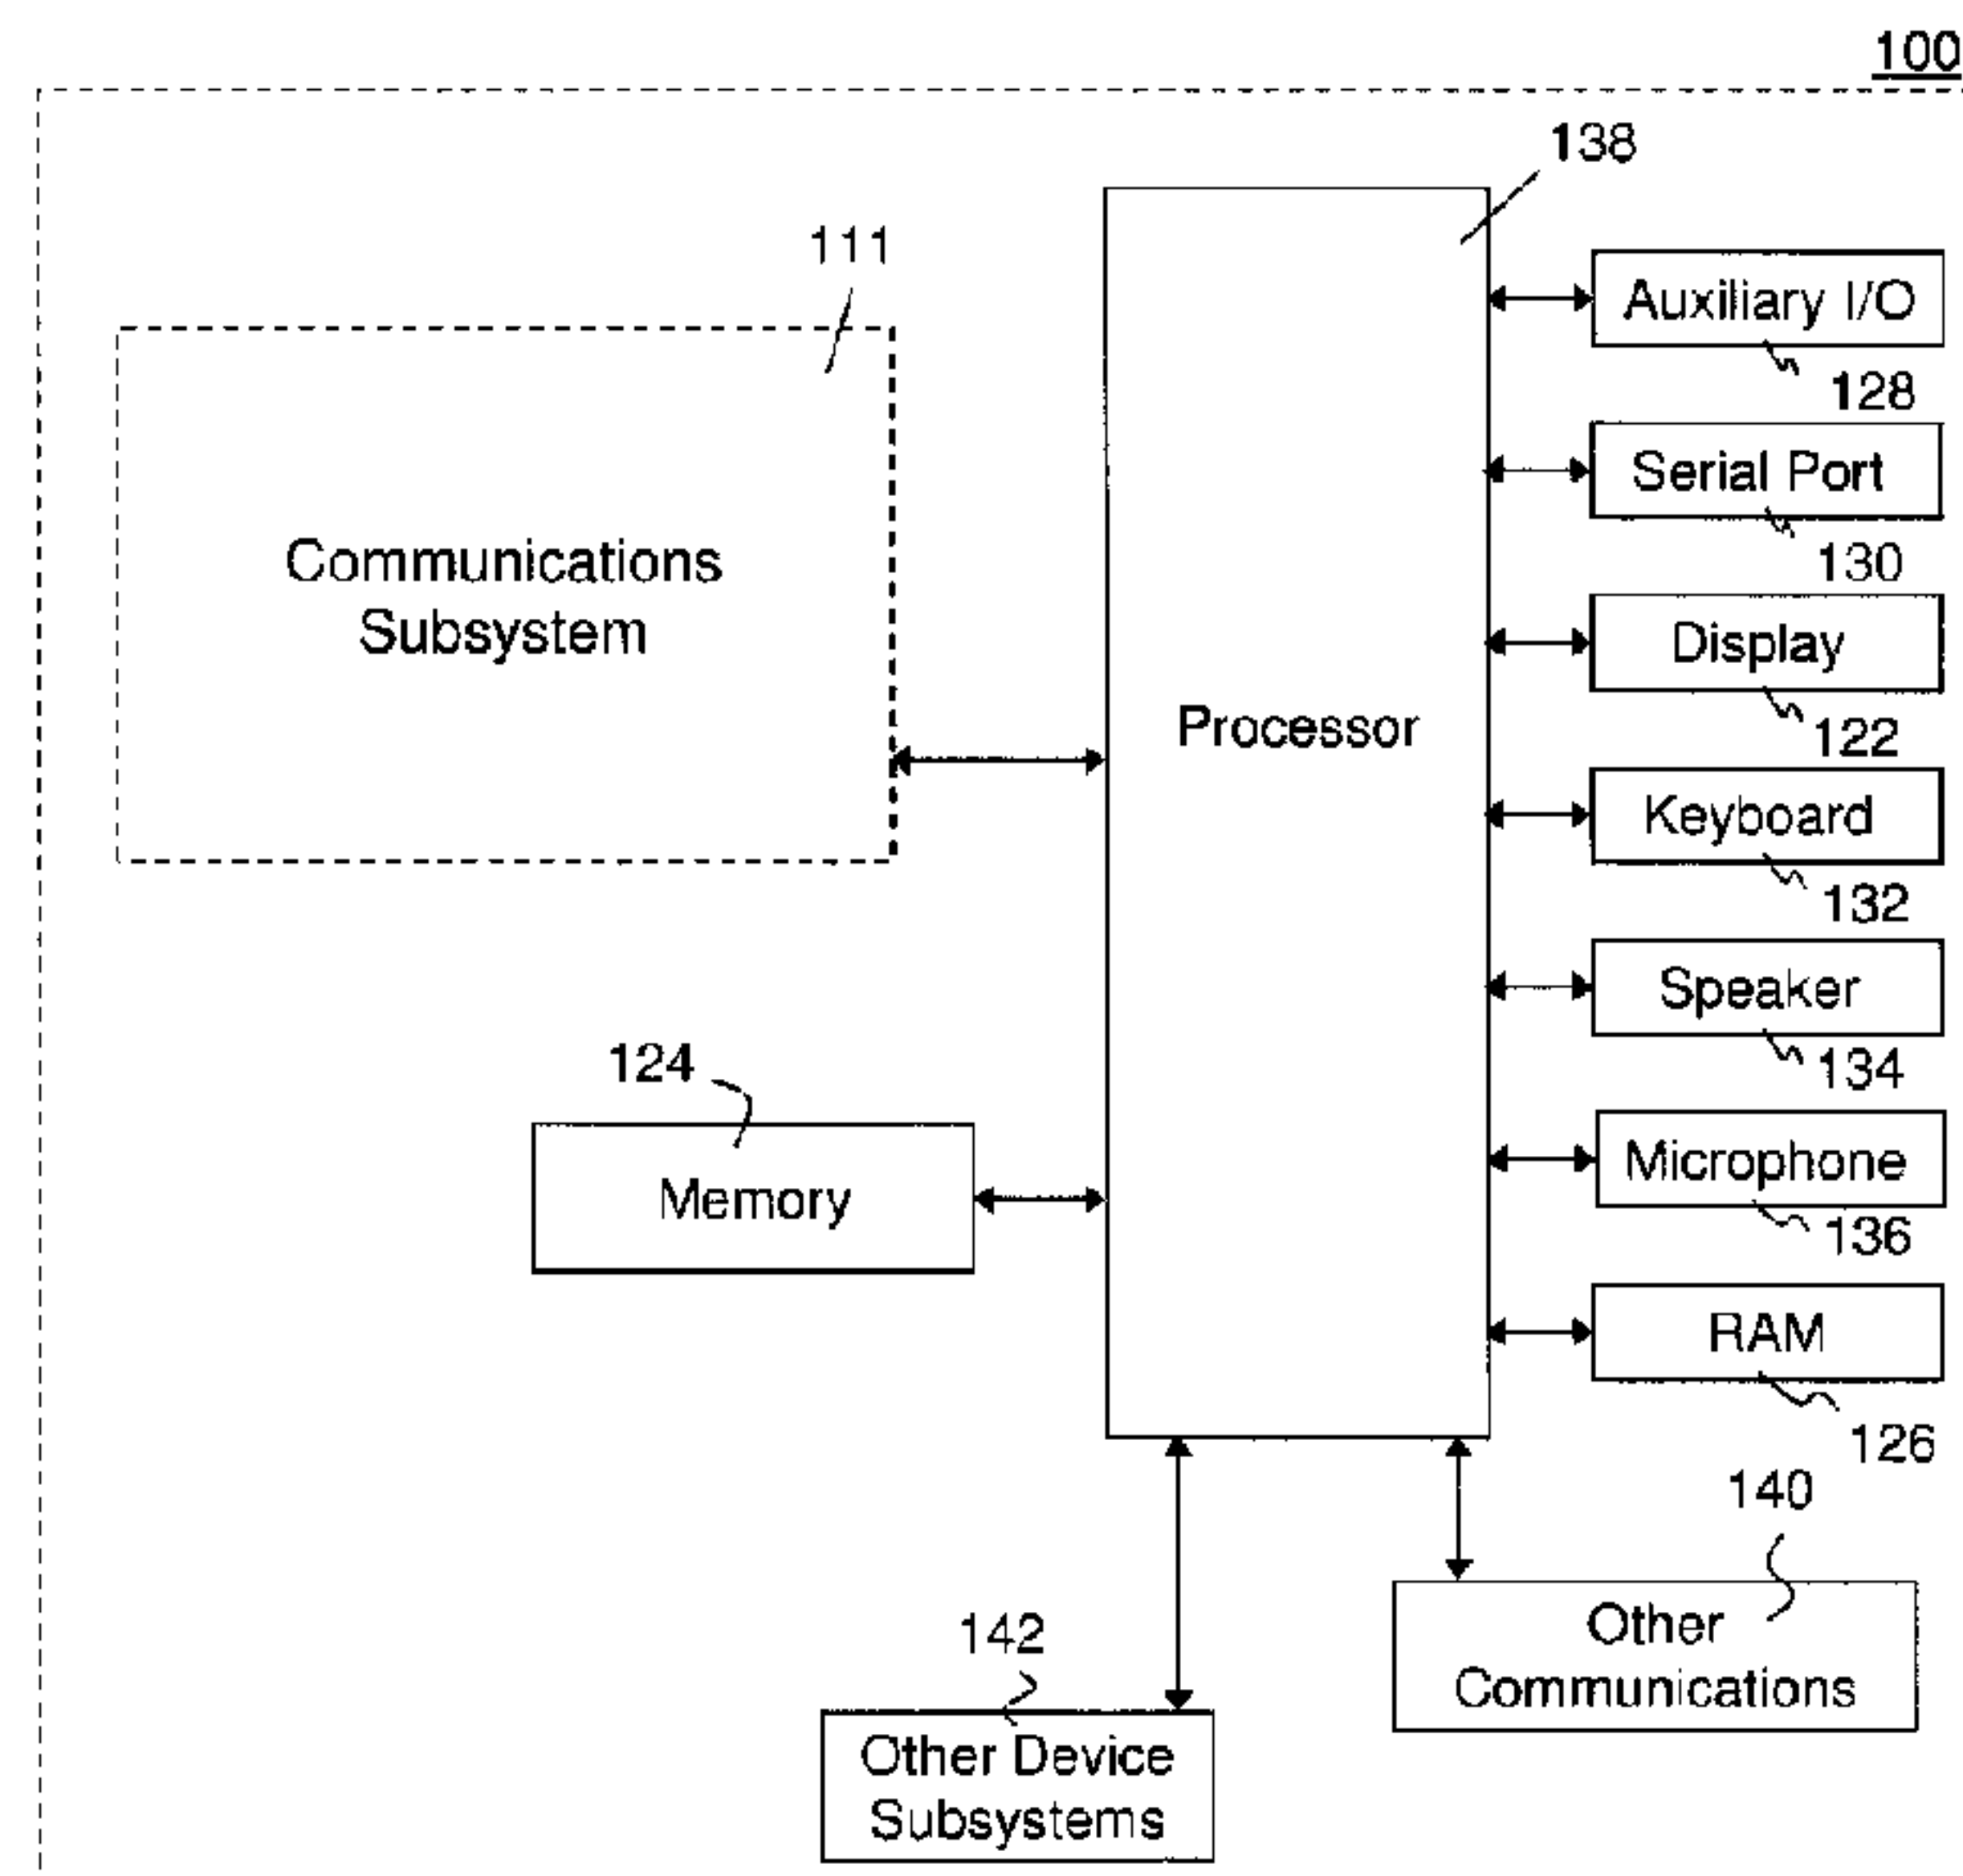

(57) **Abrégé/Abstract:**

A method and device for automatic login of a virtual private network on an interface change, the method: associating a virtual private network profile with a plurality of connection interfaces, each connection interface within the plurality of connection interfaces having a priority; monitoring the plurality of connection interfaces for availability; if a connection interface with a higher priority than the connection interface currently used by the virtual private network becomes available, utilizing the higher priority connection interface for the virtual private network; and if the connection interface currently used by the virtual private network becomes unavailable, transferring the virtual private network to a highest priority available connection interface within the plurality of connection interfaces.

ABSTRACT

A method and device for automatic login of a virtual private network on an interface change, the method: associating a virtual private network profile with a plurality of connection interfaces, each connection interface within the plurality of connection interfaces having a priority; monitoring the plurality of connection interfaces for availability; if a connection interface with a higher priority than the connection interface currently used by the virtual private network becomes available, utilizing the higher priority connection interface for the virtual private network; and if the connection interface currently used by the virtual private network becomes unavailable, transferring the virtual private network to a highest priority available connection interface within the plurality of connection interfaces.

METHOD AND APPARATUS FOR AUTOMATIC VPN LOGIN AND INTERFACE SELECTION

FIELD OF THE DISCLOSURE

[0001] The present disclosure relates to mobile connectivity, and in particular relates to data connection between a device and network.

BACKGROUND

[0002] One or more applications on mobile device may occasionally wish make a network/data connection with a network element in some cases. Such a network connection may include a virtual private network (VPN), where a VPN is a private communications network used to communicate confidentially over a publicly accessible network. VPN message traffic can be carried over a public network infrastructure (e.g. the Internet) on top of standard protocols.

[0003] VPNs are used, for example, to enable employees to connect securely to a corporate network. In other cases the network connection may be a connection to a WiFi network over a WiFi interface.

[0004] Standard routing rules for network connectivity may not be suitable for VPN connections since various network interfaces are incompatible with VPN connectivity. For example, certain cellular networks include non-Internet protocol (IP) interfaces. In other situations, a network interface may be virtual and not usable for VPN connections.

[0005] Further, interfaces may not be permanent for mobile connectivity. In particular, an interface may be added or become unavailable periodically. VPNs connected to interfaces that go down are affected. Also, a new interface may be better for a VPN than a currently used interface.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The present disclosure will be better understood with reference to the drawings, in which:

Figure 1 is an exemplary block diagram showing an example computing device;

Figure 2 is a block diagram showing an example prioritized interface status list;

Figure 3 is a flow diagram showing an example connection of a virtual private network (VPN) over a prioritized connection;

Figure 4 is a flow diagram showing an example of updating of an interface status list;

Figure 5 is a flow diagram showing an example of maintenance of an interface status list;

Figure 6 is a block diagram showing an example of a list associating network connections and VPN connection profiles;

Figure 7 is a block diagram showing an example of a prioritized interface status list also associating network connections and VPN connection profiles;

Figure 8 is a flow diagram showing example maintenance of an interface status list associating VPN profiles;

Figure 9 is a block diagram showing an example application and data memory on a mobile device;

Figure 10 is a block diagram showing an example of the connection of a corporate device to a personal device;

Figure 11 is a block diagram showing an example of connection of applications on a mobile device through a physical layer to a corporate network or the Internet;

Figure 12 is a block diagram showing an example connection of applications on a mobile device through a bridge to a corporate network or the Internet;

Figure 13 is a flow diagram showing example designation of profiles to a perimeter;

Figure 14 is an example system architecture diagram for a mobile device; and

Figure 15 is a block diagram showing an example mobile device capable of being used with the present disclosure.

DETAILED DESCRIPTION

[0007] The present disclosure provides a method at a computing device, the method comprising: maintaining, at the computing device, a prioritized list of connection interfaces available for virtual private network connection; and upon initiation of a virtual private network connection without a specified interface, selecting from the prioritized list of connection interfaces, a highest priority available connection interface.

[0008] The present disclosure further provides a computing device comprising: a processor; and a communications subsystem, wherein the processor and communications subsystem are configured to: maintain a prioritized list of connection interfaces available for virtual private network connection; and upon initiation of a virtual private network connection without a specified interface, select from the prioritized list of connection interfaces, a highest priority available connection interface.

[0009] The present disclosure provides for a mobile device, but is not meant to be limited to any particular mobile device. Examples of mobile devices can include, for example, smart phones, personal digital assistants, data enabled cellular telephones, tablet computers, among others.

[0010] Reference is now made to **Figure 1**, which shows an exemplary simplified diagram of a computing device **100**. Computing device **100** may comprise a tablet, mobile device, personal computer, laptop computer, among others. The embodiment of **Figure 1** is however not meant to be limiting and other devices could be used.

[0011] Computing device **100** generally includes a processor **138**, which controls the overall operation of the device. Processor **138** interacts with device subsystems such as the display **122**, memory **124**, auxiliary input/output (I/O) subsystems **128**, serial port **130**, one or more keyboards or keypads **132**, where keyboard or keypad **132** may comprise a physical keyboard or a virtual keyboard or both, one or more speakers **134**, microphone **136**, other communication subsystem **140** such as a short-range communications subsystem, including Bluetooth and near field communications, and any other device subsystems generally designated as **142**. Serial port **130** could include a USB port or other port.

[0012] Memory **124** may be segregated into various modes of operation, sometimes referred to as perimeters, as described below. Such segregation may be physical or logical. Operating system software used by the processor **138** may be stored in memory **124**. The operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile memory such as RAM **126**.

[0013] Applications may be loaded onto the device and associated with a mode of operation (also called a 'perimeter') in some cases. In some embodiments, such applications and data for the application may be stored in memory and associated with the perimeter. For example, separate areas of memory may be used to store the applications or data for each perimeter in some embodiments. In other embodiments, applications or data may be encrypted with a key associated with a perimeter and applications or data for a plurality of perimeters may be stored together. Other options are possible.

[0014] In some embodiments, computing device **100** may optionally include a communications subsystem **111** capable of communication with a data access point. Such data access point may include a cellular network or Wi-Fi or WiMAX network, among others. In further embodiments, computing device **100** may be capable of voice communications.

[0015] Various embodiments of the present disclosure relate to network connections such as virtual private networks. A network connection, as used herein, is a link between a network element and the mobile device in order to facilitate data exchange between the network element and the mobile device. The link may be over private resources such as within a corporate local area network, or may be over a public network infrastructure. Examples of network connections include VPN connections, WiFi connections over a WiFi interface, among others.

[0016] As indicated above, a VPN is a private communications network used to communicate confidentially over a publicly accessible network. VPN message traffic can be carried over a public network infrastructure (e.g. the Internet) on top of standard protocols. VPNs are used, for example, to enable employees to connect securely to a corporate network. Examples of VPN protocols, for example, may include the Internet Protocol Security (IPSec) standard defined by the Internet Engineering Task Force (IETF), Layer 2 Tunneling Protocol (L2TP) or Secure Sockets Layer (SSL) VPN, Point to Point Tunneling Protocol (PPTP), among others.

[0017] In accordance with one embodiment of the present disclosure, a method and apparatus are provided for an automatic interface selection for network connections such as VPN connections. While the description below may refer specifically to VPN connections, those of skill in the art will understand that other types of network connections are within the scope of the disclosure. As mentioned above, the standard routing rules for network connectivity may be unsuitable for certain network connections such as VPN connections since various network interfaces are incompatible with VPN connectivity. For example, certain cellular networks include non-Internet protocol (IP) interfaces. In other situations, a network interface may be virtual, and it may be undesirable to establish a VPN connection over a virtual network interface

[0018] Further, interfaces may not be permanent for mobile connectivity. In particular, an interface may be added or become unavailable periodically.

[0019] In accordance with some embodiments of the present disclosure, an interface status list is provided. Statuses provided by a core networking component on a device may be read and the VPN usable interfaces may be distinguished from unusable interfaces by a processor on the device. In particular, reference is made to **Table 1** below.

Interface type	Internet Available	Behavior
Virtual	-	Ignore
Physical, not VPN-friendly	-	Ignore
Physical, VPN-friendly	No	Monitor
	Yes	Monitor, available for VPN Login

TABLE 1: Example Interface Status List Criteria

[0020] In the example seen in **Table 1** above, three types of interfaces are provided. For virtual interfaces, since it may be undesirable to establish a VPN over such an interface, the behaviour for the interface for VPN connectivity in this example is to ignore the interface type.

[0021] A second interface type includes a physical, non-VPN friendly interface. As indicated above, this may include a cellular connection with non-IP limitations. This interface type is again ignored in this example.

[0022] A third interface type is a physical, VPN friendly interface. For such interfaces, the interface may or may not be available. If the interface is available, as shown in the second column of **Table 1**, then the device may monitor and may use the interface for VPN log in. Conversely, if the interface is not available, then the mobile device may continue to monitor the interface in case it becomes available for VPN login. An interface is available if a VPN connection can be established over it.

[0023] For each interface available to a device, the interface is classified by interface type and put into an interface status list such as **Table 1** above. Once the interface status list is built, changes to an interface may be monitored to detect when the

interface goes up or down. The interface status list may be used to present the existence or absence of a VPN capable interface. If an interface goes up, it may become a candidate for a VPN connection if the interface type is physical VPN friendly. In this case, automatic selection may occur if a VPN login is requested without an interface being explicitly specified.

[0024] Similarly, if an interface goes down while being used for a VPN session, the detection of the interface going down may be used to clean up the VPN processes' internal state.

[0025] The interfaces available may be sorted based on a priority order. In particular, reference is now made to **Table 2** showing an example of such a priority ordering.

VPN-Friendly Interfaces, by Priority
Wired
Wi-Fi
Cellular (IP-capable interfaces)
BlueTooth™ (tethering)

TABLE 2: Example Interface Priority

[0026] As seen from the exemplary **Table 2** above, the VPN friendly interfaces may be sorted based on whether the interface is wired, Wi-Fi, cellular or Bluetooth. The ordering of **Table 2** is, however, not meant to be limiting, and is only an example. Further, the connection types are not limiting, and other network connection types, such as WiMAX, IrDA, near field communications, among others, are possible.

[0027] From the example of **Table 2**, a wired interface may be considered by a device to be the highest priority since this interface may be the fastest and most reliable. Similarly, a Wi-Fi interface may be more desirable than a cellular interface because more data throughput is possible over the Wi-Fi connection, in some cases.

[0028] Finally a Bluetooth interface may be the lowest priority since the data throughput may be the lowest for such an interface.

[0029] In other embodiments, the interface priority may be determined based on other criteria, including the application requiring the interface, security of the interface, among other factors, as described below.

[0030] In accordance with the above, when a computing device needs to establish a network connection such as a VPN connection, the device may refer to an internal interface status list, which presents a prioritized list of possible interfaces capable of being used to establish a VPN connection. The interface status list may provide a quick reference to determine which interface is capable of providing the VPN connection. The existence of the interface status list may provide for the abstraction of the interface status information from other sources and filters other unneeded interface status information.

[0031] For example, reference is now made to **Figure 2**. **Figure 2** shows an example interface status list in accordance with one embodiment of the present disclosure. In particular, in **Figure 2**, an ordered list **200** is created based on the principles of **Table 1** and **Table 2** above, the ordered list showing which interfaces are currently available in a priority order as well as other interfaces which may not be currently available.

[0032] In **Figure 2**, a first line **210** in the interface list provides a home Wi-Fi interface that is currently available for VPN connection.

[0033] Similarly, line **212** showing a first cellular interface and line **214** showing a second cellular interface, indicate both are accessible from a mobile device and can both be used for VPN connections. Also, the mobile device is currently tethered and the VPN could use the tethered interface as well, as shown by line **216**.

[0034] Based on the above, lines **210**, **212**, **214** and **216** provide for interfaces that are available to a device for a VPN in the example of **Figure 2**, as well as an ordering for the interfaces.

[0035] In some embodiments, the first time a connection is established over an interface, the interface may be added to list **200**. The interface may then be determined

to be available for VPN or not. Thus, for example, a work Wi-Fi line **220** is provided within list **200**. However, the work Wi-Fi interface is not currently available to the mobile device (for example, the mobile device may be out of range of the work Wi-Fi interface), and thus the availability is shown as a “No” in list **200**.

[0036] Similarly, if the user occasionally goes to school and connects to a school Wi-Fi network, the school Wi-Fi network, as shown in line **222** may also be sometimes available for VPN connectivity. Again, this network is not available at the moment in the example of **Figure 2**.

[0037] In some embodiments, interfaces within list **200** will be maintained for a certain time. For example, if the user does not connect to a certain network interface for one month, then the item may be removed from the list of interfaces.

[0038] Thus, in accordance with **Figure 2**, a prioritized list may be maintained by a device for VPN connectivity.

[0039] Reference is now made to **Figure 3**, which shows an exemplary process diagram for a VPN connection. In particular, the process for **Figure 3** starts at block **300** and proceeds to block **310** in which a VPN connection is initiated. The initiation of the VPN connection at block **310** could be done based on a selection of a VPN connection through a user interface or could be automatic, for example when a device boots up, among other initiation times.

[0040] In the initiation at block **310**, it is assumed that no network interface is specified for the VPN connection. In this case the process then proceeds to block **312** in which the device selects the highest priority interface from the available interfaces in the interface selection list **200**.

[0041] The process then proceeds to block **314** in which a VPN connection is established over the interface selected at block **312**. The process then proceeds to block **320** and ends.

[0042] In alternative embodiments, instead of selecting the highest priority interface at block **312**, a user interface could be provided which provides an ordered list of interfaces that could be used for the VPN connection. In this case, a prompt could be provided to a user to select the interface to use, with the highest priority interface being the default interface in one example.

[0043] The interface list of **Figure 2** may be updated by checking whether each interface is VPN friendly. In particular, reference is now made to **Figure 4**.

[0044] The process of **Figure 4** starts at block **400** and proceeds to block **410** in which the next interface is selected. At the first instance of block **410**, a first interface may be selected.

[0045] Once an interface is selected, the process proceeds to block **412** in which a check is made to determine whether the interface is new or has previously been processed. If the interface is not new, the process proceeds back to block **410** to choose the next interface.

[0046] If the interface is new, the process proceeds from block **412** to block **422** in which a check is made to determine whether the interface is VPN friendly. As indicated above, this may involve, for example, ensuring the interface is not virtual and can support IP connectivity.

[0047] If the interface is not VPN friendly, the process proceeds from block **422** back to block **410** to choose the next interface.

[0048] If the interface is VPN friendly, the process proceeds from block **422** to block **424** in which the interface is added to the interface table. The process then proceeds back to block **410**.

[0049] Further, the interface list of **Figure 2** may be kept up to date through the checking of the various interfaces to determine whether the interface has gone up or down or has maintained its availability status. In particular, reference is now made to **Figure 5**.

[0050] The process of **Figure 5** starts at block **500** and proceeds to block **510**. At block **510**, the process selects the next interface on the interface list or table. At the first instance of block **510** a first interface may be selected.

[0051] The process then proceeds to block **512** to determine whether the interface that was selected has become available when compared to the previous status of the interface. If yes, the process then proceeds to block **520** in which the interface is made available for VPN connections.

[0052] From block **512**, if the interface has not recently become available, the process proceeds to block **530** in which a check is made to determine whether or not the interface has gone down. If not, the process proceeds back to block **510** in which the next interface is selected.

[0053] If the interface has gone down, the process proceeds to block **540** in which a check is made to determine whether there was an active VPN connection on that interface. If not, the process proceeds from block **540** to block **544**, in which the interface is made unavailable for VPN connections, and then to block **510** to select the next available interface.

[0054] From block **540**, if a VPN connection is active on the interface that is no longer available, the process proceeds to block **542** in which the VPN status is cleaned up. In this case, the VPN connection may be dropped and an internal VPN state may be adjusted accordingly.

[0055] From block **542** the process proceeds to block **510** in which the next interface is selected.

[0056] At block **510**, if there are no more interfaces available in the table, the process may again select the first interface and process repeats itself.

[0057] Based on the process diagram of **Figures 4 and 5**, the interface status and availability for VPN connections can be maintained for the interface status list.

[0058] In addition to the embodiments of **Figures 2 to 5** above, in some embodiments, a network connection may be associated with a network connection profile. An interface may be associated with one or more network connection profiles. As used herein, a network connection profile defines various parameters that may be used to connect to a network element, and may include, for example, any combination of a connection method, interface, user credentials, network element server names, and other details that allow a mobile device client or application to connect and authenticate with the network element.

[0059] In particular, while the list **200** of **Figure 2** provides for interfaces and whether they are available for VPN connection, a particular network connection profile may limit the type of interface that may be used. For example, a VPN may have a network connection profile which specifies that the connection must be made over a cellular interface. In other examples, the VPN connection may have a network connection profile that indicates that connection can only utilize trusted interfaces and a particular subset of interfaces may be provided that are trusted.

[0060] Reference is now made to **Figure 6**, which shows an exemplary list **600** having interfaces and an indication of network connection profiles that are associated with that interface.

[0061] In particular, in the example of **Figure 6**, three exemplary network connection profiles are provided. A first network connection profile "A" may be utilized to establish a network connection for connecting certain enterprise applications to an enterprise VPN server. A second network connection profile "B" may be used to establish a network connection for connecting to a user's home network VPN server. A network

connection profile “C” may be used to establish a network connection for connecting one or more applications on the mobile device to a different enterprise network VPN server.

[0062] In the example of **Figure 6**, the home Wi-Fi network is only available for network connections associated with network connection profile B, as shown by line **610**. Cell interface 1 is available for network connections associated with network connection profiles A, B or C, as shown by line **612**. Cell interface 2 is available for network connections associated with network connection profiles A or B, as shown by line **614**. The limitation on the interface for network connections associated with a particular profile may be dependent on the nature of the network connection associated with the network connection profile. For example, the home WiFi interface may not be considered secure enough by an enterprise, and thus profiles A and C, which are described above to be used for connecting to enterprise VPN servers, may not be allowed to use the home WiFi interface.

[0063] Further, a tethered interface is available for VPN profile B, as shown by line **616**. A work Wi-Fi interface is available for VPN profiles A and C, as shown by line **618** and a school Wi-Fi network is only available for VPN profile B, as shown by line **620**.

[0064] Thus, for example, when an application attempts to establish a new VPN network connection, the network connection profile for the VPN connection can be established and an appropriate interface can be selected from the prioritized list of interfaces. For example, in one embodiment, an application on the mobile device may be a VPN client, which, when launched, attempts to connect to a network element to establish a VPN connection. The application will have access to a network connection profile which may provide information such as client credentials, the address of the VPN server, interface, among other information, to populate the connection request. Authentication may then occur at the VPN server before data can be passed between the mobile device and network element. The network connection profile may be used to determine an appropriate interface over which to establish the VPN connection.

[0065] The lists of **Figure 2** and **Figure 6** could be used independently to determine an interface to use. In other embodiments, the lists could be combined. Reference is now made to **Figure 7**, which shows an exemplary table including the interface, the VPN profile as well as the availability of the interface. In this case, the list **700** can be ranked in accordance with the interface type and the availability.

[0066] In particular, the combination of **Figures 2** and **6** provides for an interface list **700**, in which line **710** provides that home Wi-Fi network is available but only for network connections associated with network connection profile B. Similarly, line **712** provides that a first cellular network is available for network connections associated with network connection profiles A, B or C. Further, line **714** provides that a second cellular network is available for network connections associated with network connection profiles A or B.

[0067] Line **716** provides that the tethering is available but only for VPN profile B.

[0068] Other networks, such as work Wi-Fi network shown at line **718**, are unavailable at the moment but if it becomes available then network connections associated with network connection profiles A or C could connect over it. Similarly, a school Wi-Fi network as shown at line **720** and is currently unavailable but if it becomes available could be used for network connections associated with network connection profile B.

[0069] Reference is now made to **Figure 8**, which shows an exemplary process for associating a network connection profile with an interface and further shows an exemplary process for connecting to the highest priority interface available in accordance with some embodiments of the present disclosure. In particular the process starts at block **800** and proceeds to block **810** in which an application on the mobile device attempts to establish a network connection. The connection attempt of block **810** may be based on a VPN login attempt from a user interface, an automatic VPN login, for example when a device powers up, among other login requests. The connection attempt is associated with a network connection profile for the network connection, such as a VPN profile.

[0070] From block **810** the process proceeds to block **812** in which a check is made to determine whether the network connection profile associated with the connection attempt specifies an interface. If yes, the process proceeds to block **820** in which the interface and profile association are stored.

[0071] The process then proceeds from block **820** to block **822** in which the highest priority interface with a stored association to the profile is selected. For example, in some embodiments a previous connection may have been made to a higher priority interface using the profile, and the association between that interface and the profile may be stored until the interface becomes unavailable. Thus, regardless of the interface specified at the connection attempt of block **810**, the highest priority interface with a stored association to a network connection profile is selected.

[0072] From block **812**, if the interface is not specified in the profile associated with the connection attempt, the process proceeds to block **830** in which the highest priority available interface is selected for the VPN connection.

[0073] The process then proceeds from blocks **822** or **830** to block **840** in which a check is made to determine whether a network connection already exists for the profile on the selected interface. If yes, no reconnection is required, as shown by block **852**. However, if the connection does not already exist for the profile on the selected interface, the process proceeds to block **850** in which a connection on the interface using the network connection profile is made.

[0074] From blocks **850** and **852** the process proceeds to block **860** and ends.

[0075] Based on the above, a transition of VPN connections between interfaces may be provided, for example, whenever an interface is added or dropped. In some embodiments, stored interface associations may track previous used VPN profiles and a

transition may be triggered on the detection of an interface going up or down. This may provide handoff of VPNs connections to higher priority interfaces and re-establish VPN connections on lower priority interfaces if the higher priority interface drops.

[0076] In some embodiments, if an interface is available and it is unknown whether the interface supports the VPN connection or not, a VPN connection may be attempted over the interface if it is a higher priority interface than the interface currently used for VPN connections. In this way, new, higher priority interfaces may be checked to determine whether or not the VPN connection should be established over those higher priority interfaces.

[0077] In certain situations, a dual or plural mode of operation may exist for a mobile device, where the mobile device may run certain applications and access certain data in one portion that is not accessible or cannot be run in a second portion. Such modes of operation are described as “perimeters” herein. For example, a work perimeter may be used for enterprise applications and data, and a personal perimeter may be used for personal applications and data. The perimeter of the application that wants a network connection may determine which network connection profile and consequently which interface may be used to establish the VPN connection, as described below.

[0078] Reference is now made to **Figure 9**, which shows an exemplary block diagram of the memory **910** of a mobile device. The memory is configured to store applications and application data, such combination of stored applications and data being referred to herein as an application space. The memory **910** is divided, either physically or logically, into two perimeters, which represent a personal perimeter **920** and a corporate perimeter **930** in the example of **Figure 9**.

[0079] Corporate perimeter **930** may comprise a portion of memory on the mobile device segregated for data, applications, or both, which may be considered sensitive to a business, corporation, enterprise, government, non-profit organization, a user of the device or any other entity setting an information technology policy for the computing device.

[0080] Personal perimeter **920** may comprise a portion of memory segregated for personal applications and data, where personal applications or data may be considered outside of or separate from an information technology policy.

[0081] Within personal perimeter **920**, a plurality of applications **922** can communicate with data **924** that is considered to be personal data.

[0082] Similarly, in corporate perimeter **930**, a plurality of corporate applications **932** communicate with corporate data **934**.

[0083] By segregating corporate applications from personal applications and data associated with each, corporate IT policies can be implemented on the device for the corporate data, thereby protecting the data, while still allowing for personal applications and personal data on the device. This may provide for more flexibility for a user and a better user experience.

[0084] Operating system **940** enforces the segregation of the data as described in more detail below.

[0085] The designation of each application as either a personal application or a corporate application may be done in several ways. In one embodiment, a corporate IT policy can be set for the loading of applications onto the device, where certain specified applications are designated by the IT policy to be corporate applications. Other applications that are not within the list of corporate applications could be considered, by default, to be personal applications. In other embodiments, a user, administrator, carrier or other entity can use a configuration program or a navigation entity (application launcher) to designate the various applications on the device as personal or corporate applications. Further, signatures applied to applications could also be used for the designation. Other examples of the designation of applications as corporate and personal would be apparent to those skilled in the art having the benefit of the present disclosure.

[0086] In further embodiments, hybrid applications that might have both personal and corporate uses could be duplicated between the corporate perimeter **930** and the personal perimeter **920**. In this way, if a user wants to use a particular application for personal reasons, the user could open the application **922** in the personal perimeter. Conversely, if the user wants to use the same application for corporate purposes, the user could open the application **932** in corporate perimeter **930**.

[0087] Thus, for example, a Documents To Go™ document editor could be provided for both the personal space and the corporate space, thereby allowing the editing of both personal documents and corporate documents, while maintaining security for corporate data.

[0088] In one embodiment, corporate applications **932** could be provided with additional security over personal applications. For example, before a corporate application **932** could be launched, the user may need to enter a password. Further, inactivity timers could be implemented to lock corporate applications after a period of inactivity while leaving personal applications unlocked. A locked application may require a user to initially enter a password to unlock the application and interact with and access data from the application.

[0089] The designation of the application may further limit what data that application has access to. Thus, for example, corporate applications may run in their own mode where any data that they write can never be accessed by the personal application. The limitation would be that personal applications **922** are not able to read corporate data **934**, nor is a corporate application capable of writing to personal data **924**.

[0090] Similarly, a personal application may not be able to write to corporate data **934**. In some embodiments, corporate applications **932** may not be able to read personal data **924**. In other embodiments, corporate applications **932** may be able to read personal data **924**.

[0091] Corporate data **934** may be encrypted for security. Such encryption and the storing of encryption keys would be known to those in the art having the benefit of the present disclosure.

[0092] Corporate data may also have date of deletion policies in effect on the mobile device. Thus, if corporate data is not accessed within a certain time period, it could be wiped out pursuant to a corporate data reaping timeline. For example, if data is not accessed on the mobile or computing device for seven days, the data may be deleted from the mobile device. The user would then need to download the data again if it was required for the mobile device. This may be implemented through tags or data tables associated with the data.

[0093] The operating system **940** can enforce the above differentiating rules between corporate perimeter **930** and personal perimeter **920**. For example, operating system **940** may implement data access for the various applications **922** and **932**, where each application is given a group permission, similar to UNIX group permissions. In other embodiments, other user permissions or other permission systems may also be used. Data is further designated in files that allow access by certain groups. Thus, operating system **940** may allow corporate data **934** to be accessed only by applications **932** that have group permissions to access such data. Similarly, personal data **924** may be written to or read only by applications **922** based on the group permissions of application **922** with regard to data **924**. Applications **932** however do not have group permissions to write to data **924** in one embodiment, as enforced by operating system **940**.

[0094] Access to the data may be maintained for other data functionalities to prevent corporate data from being accessed in the personal mode. For example, copy or cut functionality may be managed between the personal mode and corporate mode. Potentially, no cutting or copying would be allowed in the corporate mode of operation by corporate applications **932**.

[0095] In other embodiments, cutting and copying may be allowed between corporate applications but may be restricted when trying to paste outside corporate mode. As will be appreciated, this could again be managed by UNIX group permission type model using operating system **940**. When cutting or copying various text or images, or other data, a new data file is created which could have group permissions that would restrict where the pasting of that file is allowed to occur. Thus, when using a personal application, if trying to paste corporate data, an error might be returned, or the paste operation may simply not function.

[0096] In one embodiment, corporate data **934** may be provided to a device based on a secure connection with the corporate network. For example, this may be done through a virtual private network or other secure connection to an enterprise server.

[0097] Further, in one embodiment, the memory **910** may be located on a mobile device. In this case, the mobile device may have a pre-established secure connection with an enterprise server.

[0098] In some embodiments, a particular device may be considered to not be secure, but may be connected to a secure (IT Trusted) device. Reference is now made to **Figure 10**.

[0099] In **Figure 10**, the secure device is mobile device **1005**. However, this is merely an example and other possibilities for secure mobile devices exist.

[00100] The unsecured computing device is computing device **1000**.

[00101] In order to run corporate data on computing device **1000**, a client **1010** may be provided on the computing device **1000**. Client **1010** communicates with a server **1020** on the secure mobile device **1005** to obtain corporate data.

[00102] Further, the computing device **1000** may include memory **1030**, which has a corporate space **1034** for storing corporate applications that may be run on computing

device **1000**. Computing device **1000** may also have a personal perimeter **1032** within memory **1030**.

[00103] As seen in the example of **Figure 10**, the personal perimeter contains applications **1032** which may access data **1036**. However, in some embodiments no similar data exists for corporate applications **1034**.

[00104] In an alternative embodiment, corporate perimeter **1034** could have data **1038** which could be regulated by the same corporate policies as data **1048** on mobile device **1005**. Thus, data **1038** would be subject to access restrictions to corporate applications, garbage collection, restrictions on copying or cutting, among the other restrictions provided above. The client **1010** could provide this functionality.

[00105] On mobile device **1005** the divided modes are similarly provided. In particular, memory **1040** contains personal applications **1042** and corporate applications **1044**. This is similar to the embodiments described above with regard to **Figure 9**.

[00106] Each of personal application perimeter **1032** and corporate application perimeter **1034** has access to a separate data area, namely data **1046** for personal applications **1042** and data **1048** for corporate applications **1044**. In this way, data **1048** cannot be accessed by personal applications **1042**.

[00107] In an alternative embodiment, mobile device **1005** may be considered to be a corporate device. In this case, application perimeter **1040** would only have corporate applications **1044** and corporate data **1048**. Thus, all information stored on mobile device **1005** would be considered to be corporate data, and be accessible only by corporate applications **1034**.

[00108] In order to provide security, a user of computing device **1005** may start an application as a corporate application **1034**. As indicated above, a password may be required to start such applications.

[00109] Client **1010** recognizes that a corporate application **1034** is running and can communicate with server **1020** to indicate that corporate data can be provided. In this way server **1020** can access the corporate data that is either in data storage **1048** or the corporate data can be obtained from an enterprise server.

[00110] Further, corporate applications **1044** do not necessarily have to be the same as corporate applications **1034**. For example, with a larger display, computing device **1054** may be able to run different applications or variations of applications **1044**. The corporate data **1048** may be the same between the two sets of applications, but could be displayed to the user or used by corporate applications **1034** differently than the data **1048** would be used on mobile device **1010**.

[00111] The corporate data may then be provided over a connection **1060** between mobile device **1005** and computing device **1000**. Connection **1060** may comprise any short or long range wired or wireless connection, and examples of such connections include Bluetooth™, USB, Infrared Data Assn (IrDA), Wi-Fi, Radio-frequency identification (RFID), Near Field Communication (NFC) connections, among others.

[00112] Communication over link **1060** can be secure. That is, corporate data that is passed to computing device **1000** or back to mobile device **1005** may be encrypted using a key known to both computing device **1000** and mobile device **1005**.

[00113] Further, in one embodiment any data that is stored is encrypted. In this case, the encryption key for the stored data may be stored on mobile device **1005**, thus necessitating the connection in order to decrypt the data on the computing device **1000**.

[00114] Further, it may be a policy that the data is not stored on computing device **1000**. Thus, except for some possible caching, corporate data will not be stored on device **1000**. Further, client **1010** can ensure that the cache is cleared prior to the corporate application shutting down.

[00115] While the above is described with regard to a corporate (enterprise) and a personal perimeters, the number of modes or spaces for applications can be further refined. For example, a corporation may consider sales and other information to be more sensitive than employee information. In this regard, sales and such information may be given a separate category from employee information and may be provided with different data storage and segregation, different passwords for the applications that run and display sales information, among other factors. In this case, three modes would exist – personal, corporate employees, and corporate sales.

[00116] Further, the above could be expanded to have a plurality of different modes or application spaces with each one being separated and access to each of the plurality of application spaces and the data associated therewith governed by the operating system. The present disclosure is not meant to be limited to any particular number of modes.

[00117] In addition to separating data and applications, in one embodiment of the present disclosure, connection profile data can also be separated. Reference is now made to **Figure 11**.

[00118] **Figure 11** shows a device **1110** having a personal perimeter space **1120** and a work (enterprise) perimeter space **1130**. The example of **Figure 11** is merely meant to be an example and other divisions or different perimeters are possible.

[00119] In personal perimeter **1120**, a personal application **1122** is running. The personal application **1122** may gain access to the Internet through IP stack **1124** utilizing a personal routing domain **1126**.

[00120] A physical interface **1160** is then used in order to access internet **1180**. Physical interface **1160** may be, in accordance with the above, Wi-Fi, cellular network, tethering, among others.

[00121] Similarly, work perimeter **1130** includes the work application **1132** that accesses a corporate network **1170** through one of two routes. In a first route, network

access control may be utilized through a mobile data service **1134**. Mobile data service (MDS) **1134** provides hypertext transfer protocol or hypertext transfer protocol secure (HTTP/HTTPS) connectivity and also provides an open, extensible and secure interface for extending corporate applications and corporate intranet standards.

[00122] MDS **1134**, or alternatively work application **1132**, may access VPN **1136**. VPN uses IP stack **1124**, and in particular work routing domain **1138**, to access the corporate network **1170** utilizing physical interface **1160**.

[00123] In an alternative embodiment, instead of accessing the internet or corporate network indirectly through a physical interface, a bridge may be established between a device and a second device where the second device has access to networks, as described with regard to **Figure 10** above.

[00124] Reference is now made to **Figure 12** in which a device **1210** includes a personal perimeter **1220** and a work perimeter **1230**.

[00125] In personal perimeter **1220**, personal application **1222** accesses an Internet service bridge **1224** to access the internet. In particular, Internet service bridge **1224** provides connectivity through the tethered device to the internet.

[00126] Internet service bridge **1224** communicates through IP stack **1226**, which includes a personal routing domain **1228**. The IP stack utilizes a physical interface **1240** which includes tethering to the device. Tethering can be, for example, through a wired serial connection such as USB or may be through a wireless short range connection such as Bluetooth, Infrared Data Association (IrDa), Near Field Communications (NFC), among others.

[00127] Physical interface **1240** may then be used to access the Internet **1260**.

[00128] Similarly, in work perimeter **1230**, a work application **1232** accesses an enterprise service through a bridge, shown by reference numeral **1234**.

[00129] The enterprise service bridge **1234** accesses the IP stack and specifically a work routing domain **1236** which may then connect through the physical interface **1240** to a corporate network **1270**.

[00130] In accordance with the above, applications and data are separated based on mode of operation (perimeter) type. In this case, the profile data for network connectivity, including Wi-Fi or VPN, may also be handled separately based on mode of operation type.

[00131] In accordance with one embodiment of the present disclosure, various network connections are specified as belonging to a mode of operation, and thus the corresponding profiles for the network connections are stored and protected within the appropriate mode of operation file system location.

[00132] For example, when utilizing the personal versus enterprise mode of operation discussed above with reference to **Figures 11 and 12**, various Wi-Fi or VPN connections may be classified as either personal or corporate Wi-Fi or VPN connections. The designation of the connection may be made at the device. For example, if a user provisions a connection by creating a connection profile, this may be considered to be a personal connection. On the other hand, if a connection is provisioned to the device based on an information technology policy at an enterprise server, for example by providing the device with a connection profile, this may be considered to be an enterprise connection. In some cases, personal connections may be migrated to enterprise connections through communication with the enterprise server. Other ways of designating a connection as personal or enterprise are also possible.

[00133] Once a connection is designated personal or enterprise, data for the connection, including the connection profile, and in some cases credentials or certificates, may be stored in the appropriate file system. Thus, referring to **Figure 9** above, the data portions for an enterprise connection will be stored in data storage **934**. Similarly, data for personal profiles will be stored in data portions **924**.

[00134] The separation of the network connection to personal versus enterprise may be then utilized for data and application access based on the type of data or application. Thus, an enterprise application may run and require connectivity over a connection that is designated as an enterprise connection. This forces work traffic to the highest security setting. Conversely, in some instances personal traffic can utilize personal connections. In some cases, personal traffic may also utilize work connections to access the Internet, since the security is simply higher than is required to be. However, the work applications will typically not access the corporate network through a personal connection since the security may not be at a level required by the work application.

[00135] In a further embodiment, the wiping of the network profile may also be accomplished based on the designation of the network connection. If, for example, an enterprise server bridge **1234**, as seen in **Figure 12**, is lost, the enterprise connections may be wiped from the cache. This may be facilitated based on the location of the storage for the connection profile. Thus, the connection profile would only exist if there is a bridge between the second device and the first device.

[00136] In some situations, the user interface, and particularly a choice of physical interfaces displayed to a user, may be affected by the profile of the network connection. For example, when a user is attempting to establish a VPN connection within the work or enterprise perimeter, the user may be given a choice of physical interfaces in which only enterprise trusted physical interfaces may be displayed. In other examples, various physical interfaces displayed to the user may be grayed out if they are unavailable to the enterprise server. Other possibilities also exist.

[00137] For data associated with a work perimeter, the backup and restore functionality may also be restricted. In particular, the work data may not be backed up or stored in some cases. This may be done for security reasons and thus the classification of a profile as an enterprise connection would prevent the backup or restore from occurring.

[00138] Backup and restore or wiping functionality may be accomplished, for example, based on a file system, wherein profiles for enterprise connections are placed into enterprise subdirectories and profiles for non-enterprise connections are placed into personal directories. When a backup/restore functionality occurs, enterprise designated subdirectories may be skipped in one embodiment.

[00139] Reference is now made to **Figure 13**. The process of **Figure 13** starts at block **1300** and proceeds to block **1310**. At block **1310**, a network connection profile is associated with at least one mode of operation. Thus, for example, a specific VPN profile may be considered to be an enterprise VPN profile, such as VPN profiles “A” and “C” from above, and stored within a work perimeter. Similarly, other profiles may be considered to be personal profiles, such as VPN profile “B” from above, stored in the personal perimeter. Other examples are possible.

[00140] From block **1310** the process proceeds to block **1312** in which access to each network connection is restricted to those of applications with the same mode of operation as the network connection profile associated with the network connection. Therefore, as described above, a work application may only have access to profiles that are trusted by an enterprise in one embodiment. Other examples are possible.

[00141] From block **1312** the process proceeds to block **1320** and ends.

[00142] An example system architecture capable of being used with the above embodiments is shown with regard to **Figure 14**. The architecture of **Figure 14** is however not meant to be limiting and other system architectures are possible.

[00143] Reference is now made to **Figure 14**, which shows a block diagram of an example wireless data network in accordance with the present disclosure and with which the various embodiments of the methods of the instant disclosure may cooperate. **Figure 14** shows a block diagram of a mobile device **1410** and example Code Division

Multiple Access (CDMA) 1x network **1420**, an example Evolution Data Only (EVDO) network **1430**, a public switched telephone network (PSTN) **1435**, a data network **1440**, wireless gateway **1442** and enterprise server **1444**. This is shown merely as an example, and other network architectures, such as Global System for Mobile (GSM), GSM Packet Radio Service (GPRS), Universal Mobile Telecommunications Service (UMTS), Long Term Evolution (LTE), LTE Advanced (LTE-A), High Speed Downlink Packet Access (HSDPA), Wi-Fi, WiMAX, among others, are possible.

[00144] The mobile device **1410** may comprise a two-way communication device having data and voice communication capabilities. **Figure 14** further shows an access point **1470** for use with an alternative data connection such as a Wi-Fi or WiMAX connection.

[00145] CDMA network **1420** is comprised of a base transceiver station (BTS) **1422** and a base station controller (BSC) **1424**. Base station controller **1424** communicates with a mobile switching centre **1426** which, as will be appreciated, is a circuit switched only component communicating with PSTN **1435**. Base station controller **1424** further communicates with a packet data serving node (PDSN) **1428** which is a packet switched only component. PDSN **1428** further communicates with IP network **1440**.

[00146] EVDO network **1430** contains an EVDO sector **1432** which communicates with access node (AN) **1434**. Since the EVDO network **1430** is a data only network, access node **1434** communicates only with PDSN **1428** and not with any circuit switch components.

[00147] An authentication, authorization and accounting node **1436** is associated with AN **1434**, and a similar node **1429** is associated with PDSN **1428**.

[00148] Operationally, mobile device **1410** communicates wirelessly with CDMA network **1420** using BTS **1422** and BSC **1424** to gain access to the CDMA 1x network.

[00149] Mobile device **1410** sends and receives both data and voice services through CDMA network **1420** until an EVDO network connection with established, at which point data can be transmitted over the EVDO network connection.

[00150] Further, mobile device **1410** can be connected to a computing device **1454** such as a tablet for a variety of reasons, some of which are provided above. The connection may be through various means such as a Universal Serial Bus (USB) or other serial port, or by short range wireless communications with a computing device **1454**. Computing device **1454** can then gain access to data network **1440** and to enterprise server **1444** through EVDO network **1430** or CDMA network **1420** using mobile device **1410**. In other embodiments, computing device **1454** may also be capable of accessing networks **1420**, **1430** or **1470** directly.

[00151] Mobile device **1410** may further have capabilities to communicate through access point **1470** using, for example, Wi-Fi. Access point **1470** connects to a data network **1440** and thus access to wireless gateway **1442** and enterprise server **1444** are possible through access point **1470**

[00152] In one embodiment, enterprise server **1444** could provide both the IT policies for the mobile device **1410** and also provide access to a permanent store of the corporate data which can be accessed by mobile device **1410**.

[00153] The embodiment of **Figure 14** is merely an example and other network architectures are possible for mobile device **1410** to connect to enterprise server **1444**. The embodiment of **Figure 14** is not meant to be limiting to any particular network architecture.

[00154] Further, mobile device **1410** may not be a dual mode or multi-mode device that allows connection to Wi-Fi. In this case, the Wi-Fi connection to access point **1470** would be removed from the embodiment of **Figure 14** and all communication may proceed over the cellular network through the base station **1422** or **1432**. In other embodiments, mobile device **1410** may only have access through an access point **1470**

and thus the cellular network would be removed from **Figure 14**. Other possibilities would be apparent to those skilled in the art having the benefit of the present disclosure.

[00155] Computing device **1454**, may, in some embodiments, comprise a personal computing device. For example, computing device **1454** may comprise a tablet computer. The user may further wish to use computing device **1454** for corporate functions. However, for security reasons, the corporate IT department may not consider the computing device **1454** to be a secure destination for data, since it is a personal device.

[00156] The device of **Figure 1** could be a mobile device. One such example mobile device is illustrated below with reference to **Figure 15**. The mobile device of **Figure 15** is however not meant to be limiting and other mobile devices could also be used.

[00157] Mobile device **1500** may comprise a two-way wireless communication device having any of voice capabilities, data communication capabilities, or both. Mobile device **1500** generally has the capability to communicate with other devices or computer systems. Depending on the exact functionality provided, the mobile device may be referred to as a data messaging device, a two-way pager, a wireless e-mail device, a cellular telephone with data messaging capabilities, a wireless Internet appliance, a wireless device, a user equipment, a tablet, or a data communication device, as examples.

[00158] Where mobile device **1500** is enabled for two-way communication, it may incorporate a communication subsystem **1511**, including both a receiver **1512** and a transmitter **1514**, as well as associated components such as one or more antenna elements **1516** and **1518**, local oscillators (LOs) **1513**, and a processing module such as a digital signal processor (DSP) **1520**. As will be apparent to those skilled in the field of communications, the particular design of the communication subsystem **1511** will be dependent upon the communication network in which the device is intended to operate.

[00159] Network access requirements will also vary depending upon the type of network **1519**. In some networks, network access is associated with a subscriber or user of mobile device **1500**. A mobile device may require a removable user identity module (RUIM) or a subscriber identity module (SIM) card in order to operate on the network. The SIM/RUIM interface **1544** may be similar to a card-slot into which a SIM/RUIM card can be inserted and ejected like a diskette or PCMCIA card. The SIM/RUIM card can have memory and hold many key configuration **1551**, and other information **1553** such as identification, and subscriber related information.

[00160] When required network registration or activation procedures have been completed, mobile device **1500** may send and receive communication signals over the network **1519**. As illustrated in **Figure 15**, network **1519** can consist of multiple base stations communicating with the mobile device. For example, in a hybrid CDMA 1x EVDO system, a CDMA base station and an EVDO base station communicate with the mobile station and the mobile device is connected to both simultaneously. In other systems such as Long Term Evolution (LTE) or Long Term Evolution Advanced (LTE-A), multiple base stations may be connected to for increased data throughput. Other systems such as GSM, GPRS, UMTS, HSDPA, among others are possible and the present disclosure is not limited to any particular cellular technology.

[00161] Signals received by antenna **1516** through communication network **1519** are input to receiver **1512**, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering, channel selection and the like, and in the example system shown in **Figure 15**, analog to digital (A/D) conversion. A/D conversion of a received signal allows more complex communication functions such as demodulation and decoding to be performed in the DSP **1520**. In a similar manner, signals to be transmitted are processed, including modulation and encoding for example, by DSP **1520** and input to transmitter **1514** for digital to analog conversion, frequency up conversion, filtering, amplification and transmission over the communication network **1519** via antenna **1518**. DSP **1520** not only processes communication signals, but also provides for receiver and transmitter control. For example, the gains applied to communication signals in receiver **1512** and transmitter

1514 may be adaptively controlled through automatic gain control algorithms implemented in DSP **1520**.

[00162] Mobile device **1500** generally includes a processor **1538** which controls the overall operation of the device. Communication functions, including data and voice communications, are performed through communication subsystem **1511**. Processor **1538** also interacts with further device subsystems such as the display **1522**, flash memory **1524**, random access memory (RAM) **1526**, auxiliary input/output (I/O) subsystems **1528**, serial port **1530**, one or more keyboards or keypads **1532**, speaker **1534**, microphone **1456**, other communication subsystem **1540** such as a short-range communications subsystem and any other device subsystems generally designated as **1542**. Serial port **1530** could include a USB port or other port known to those in the art having the benefit of the present disclosure.

[00163] Some of the subsystems shown in **Figure 15** perform communication-related functions, whereas other subsystems may provide “resident” or on-device functions. Notably, some subsystems, such as keyboard **1532** and display **1522**, for example, may be used for both communication-related functions, such as entering a text message for transmission over a communication network, and device-resident functions such as a calculator or task list, among other applications.

[00164] Operating system software used by the processor **1538** may be stored in a persistent store such as flash memory **1524**, which may instead be a read-only memory (ROM) or similar storage element (not shown). Those skilled in the art will appreciate that the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile memory such as RAM **1526**. Received communication signals may also be stored in RAM **1526**.

[00165] As shown, flash memory **1524** can be segregated into different areas for both computer programs **1558** and program data storage **1550**, **1552**, **1554** and **1556**. These different storage types indicate that each program can allocate a portion of flash memory **1524** for their own data storage requirements. The applications may be

segregated based on the mode or category they fall into. Memory **1524** may further provide security for corporate data and if some applications are locked while others are not.

[00166] Processor **1538**, in addition to its operating system functions, may enable execution of software applications on the mobile device. A predetermined set of applications that control basic operations, including data or voice communication applications for example, as well as a predetermined set of certificates, will normally be installed on mobile device **1500** during manufacturing. Other applications could be installed subsequently or dynamically.

[00167] Applications and software, such as those described above may be stored on any computer readable storage medium. The computer readable storage medium may be a tangible or intransitory/non-transitory medium such as optical (e.g., CD, DVD, etc.), magnetic (e.g., tape) or other memory known in the art.

[00168] One example software application may be a personal information manager (PIM) application having the ability to organize and manage data items relating to the user of the mobile device such as, but not limited to, e-mail, calendar events, voice mails, appointments, and task items. Further applications, including, but not limited to, a media player, camera, messenger, mail, calendar, address book, web browser, social networking, game, electronic book reader, map, or other application may also be loaded onto the mobile device **1500** through the network **1519**, an auxiliary I/O subsystem **1528**, serial port **1530**, short-range communications subsystem **1540** or any other suitable subsystem **1542**, and installed by a user in the RAM **1526** or a non-volatile store (not shown) for execution by the processor **1538**. Such flexibility in application installation increases the functionality of the device and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using the mobile device **1500**.

[00169] In a data communication mode, a received signal such as a text message or web page download will be processed by the communication subsystem **1511** and input to the processor **1538**, which may further process the received signal for output to the display **1522**, or alternatively to an auxiliary I/O device **1528**.

[00170] A user of mobile device **1500** may also compose data items such as email messages for example, using a keyboard **1532**, which may comprise a virtual or physical keyboard or both, and may include a complete alphanumeric keyboard or telephone-type keypad, among others, in conjunction with the display **1522** and possibly an auxiliary I/O device **1528**. Such composed items may then be transmitted over a communication network through the communication subsystem **1511**.

[00171] For voice communications, overall operation of mobile device **1500** is similar, except that received signals would typically be output to one or more speakers **1534** and signals for transmission would be generated by a microphone **1536**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on mobile device **1500**. Although voice or audio signal output may be accomplished primarily through the one or more speakers **1534**, display **1522** may also be used to provide an indication of the identity of a calling party, the duration of a voice call, or other voice call related information for example.

[00172] Serial port **1530** in **Figure 15** would normally be implemented in a personal digital assistant (PDA)-type mobile device for which synchronization with a user's desktop computer (not shown) may be desirable, but is an optional device component. Such a port **1530** would enable a user to set preferences through an external device or software application and would extend the capabilities of mobile device **1500** by providing for information or software downloads to mobile device **1500** other than through a wireless communication network. The alternate download path may for example be used to load an encryption key onto the device through a direct and thus reliable and trusted connection to thereby enable secure device communication. As will be appreciated by those skilled in the art, serial port **1530** can further be used to connect the mobile device to a computer to act as a modem.

[00173] Other communications subsystems **1540**, such as a short-range communications subsystem, are further optional components which may provide for communication between mobile device **1500** and different systems or devices, which need not necessarily be similar devices. For example, the subsystem **1540** may include an infrared device and associated circuits and components, near field communications (NFC) or a Bluetooth™ communication module to provide for communication with similarly enabled systems and devices.

[00174] The embodiments described herein are examples of structures, systems or methods having elements corresponding to elements of the techniques of this application. This written description may enable those skilled in the art to make and use embodiments having alternative elements that likewise correspond to the elements of the techniques of this application. The intended scope of the techniques of this application thus includes other structures, systems or methods that do not differ from the techniques of this application as described herein, and further includes other structures, systems or methods with insubstantial differences from the techniques of this application as described herein.

CLAIMS

1. A method at a computing device, the method comprising:
 - accessing, at the computing device, a prioritized list of connection interfaces available for
5 virtual private network connection;
 - associating, at the computing device, a virtual private network profile with a plurality of
connection interfaces from the prioritized list;
 - upon initiation of a virtual private network connection without a specified interface,
selecting at the computing device from the prioritized list of connection interfaces, a highest
10 priority available connection interface associated to the virtual network profile;
 - monitoring the plurality of connection interfaces for availability;
 - if a connection interface with a higher priority than the connection interface currently
used by the virtual private network becomes available, utilizing the higher priority
connection interface for the virtual private network; and
 - 15 if the connection interface currently used by the virtual private network becomes
unavailable, transferring the virtual private network to a highest priority available connection
interface within the prioritized list.
2. The method of claim 1, wherein the prioritized list of connection interfaces is sorted based on
20 connection type.
3. The method of claim 2, wherein the sorting comprises ranking connections used for virtual
private network interface.
- 25 4. The method of any one of claims 1 to 3, wherein the maintaining comprises checking
whether an interface within the prioritized list of connection interfaces becomes available,
and if yes, adjusting a priority level for the interface.
5. The method of any one of claims 1 to 4, wherein the maintaining filters out connection
30 interfaces unusable for virtual private network connections.

6. The method of any one of claims 1 to 5, wherein the prioritized list of connection interfaces is different from a network routing order.
7. The method of claim 1, wherein the associating is performed based on a successful connection by the virtual private network using a connection interface.
8. The method of claim 7, wherein the associating is further performed based on an unsuccessful connection by the virtual private network using a connection interface.
9. A computing device comprising:
a processor; and
a communications subsystem,
wherein the processor and communications subsystem are configured to:
access a prioritized list of connection interfaces available for virtual private network connection;
associate a virtual private network profile with a plurality of connection interfaces from the prioritized list;
upon initiation of a virtual private network connection without a specified interface, select from the prioritized list of connection interfaces, a highest priority available connection interface associated to the virtual private network profile;
monitor the plurality of connection interfaces for availability;
if a connection interface with a higher priority than the connection interface currently used by the virtual private network becomes available, utilize the higher priority connection interface for the virtual private network; and
if the connection interface currently used by the virtual private network becomes unavailable, transfer the virtual private network to a highest priority available connection interface within the prioritized list.
10. The computing device of claim 9 wherein the prioritized list of connection interfaces is sorted based on connection type.

11. The computing device of claim 10, wherein the sorting comprises ranking connections used for virtual private network interface.

12. The computing device of any one of claims 9 to 11, wherein the processor and communications subsystem are configured to maintain by checking whether an interface within the prioritized list of connection interfaces becomes available, and if yes, adjusting a priority level for the interface.

13. The computing device of any one of claims 9 to 12, wherein the processor and communications subsystem are configured to maintain by filtering out connection interfaces unusable for virtual private network connections.

14. The computing device of any one of claims 9 to 13, wherein the prioritized list of connection interfaces is different from a network routing order.

15. The computing device of claim 9, wherein the processor and communications subsystem are configured to associate based on a successful connection by the virtual private network using a connection interface.

16. The computing device of claim 15, wherein processor and communications subsystem are further configured to the associate based on an unsuccessful connection by the virtual private network using a connection interface.

17. A computer readable medium having stored thereon executable code for execution by a processor of a computing device, the executable code comprising instructions for:

- accessing, at the computing device, a prioritized list of connection interfaces available for virtual private network connection;
- associating, at the computing device, a virtual private network profile with a plurality of connection interfaces from the prioritized list;

upon initiation of a virtual private network connection without a specified interface, selecting at the computing device from the prioritized list of connection interfaces, a highest priority available connection interface associated to the virtual network profile;

monitoring the plurality of connection interfaces for availability;

5 if a connection interface with a higher priority than the connection interface currently used by the virtual private network becomes available, utilizing the higher priority connection interface for the virtual private network; and

if the connection interface currently used by the virtual private network becomes unavailable, transferring the virtual private network to a highest priority available connection
10 interface within the prioritized list.

18. The computer readable medium of claim 17, wherein the prioritized list of connection interfaces is sorted based on connection type.

15 19. The computer readable medium of claim 17, wherein the sorting comprises ranking connections used for virtual private network interface.

20. The computer readable medium of any one of claims 17 to 19, wherein the maintaining comprises checking whether an interface within the prioritized list of connection interfaces
20 becomes available, and if yes, adjusting a priority level for the interface.

21. The computer readable medium of any one of claims 17 to 20, wherein the maintaining filters out connection interfaces unusable for virtual private network connections.

25 22. The computer readable medium of any one of claims 17 to 21, wherein the prioritized list of connection interfaces is different from a network routing order.

23. The computer readable medium of claim 17, wherein the associating is performed based on a successful connection by the virtual private network using a connection interface.

30

24. The computer readable medium of claim 23, wherein the associating is further performed based on an unsuccessful connection by the virtual private network using a connection interface.

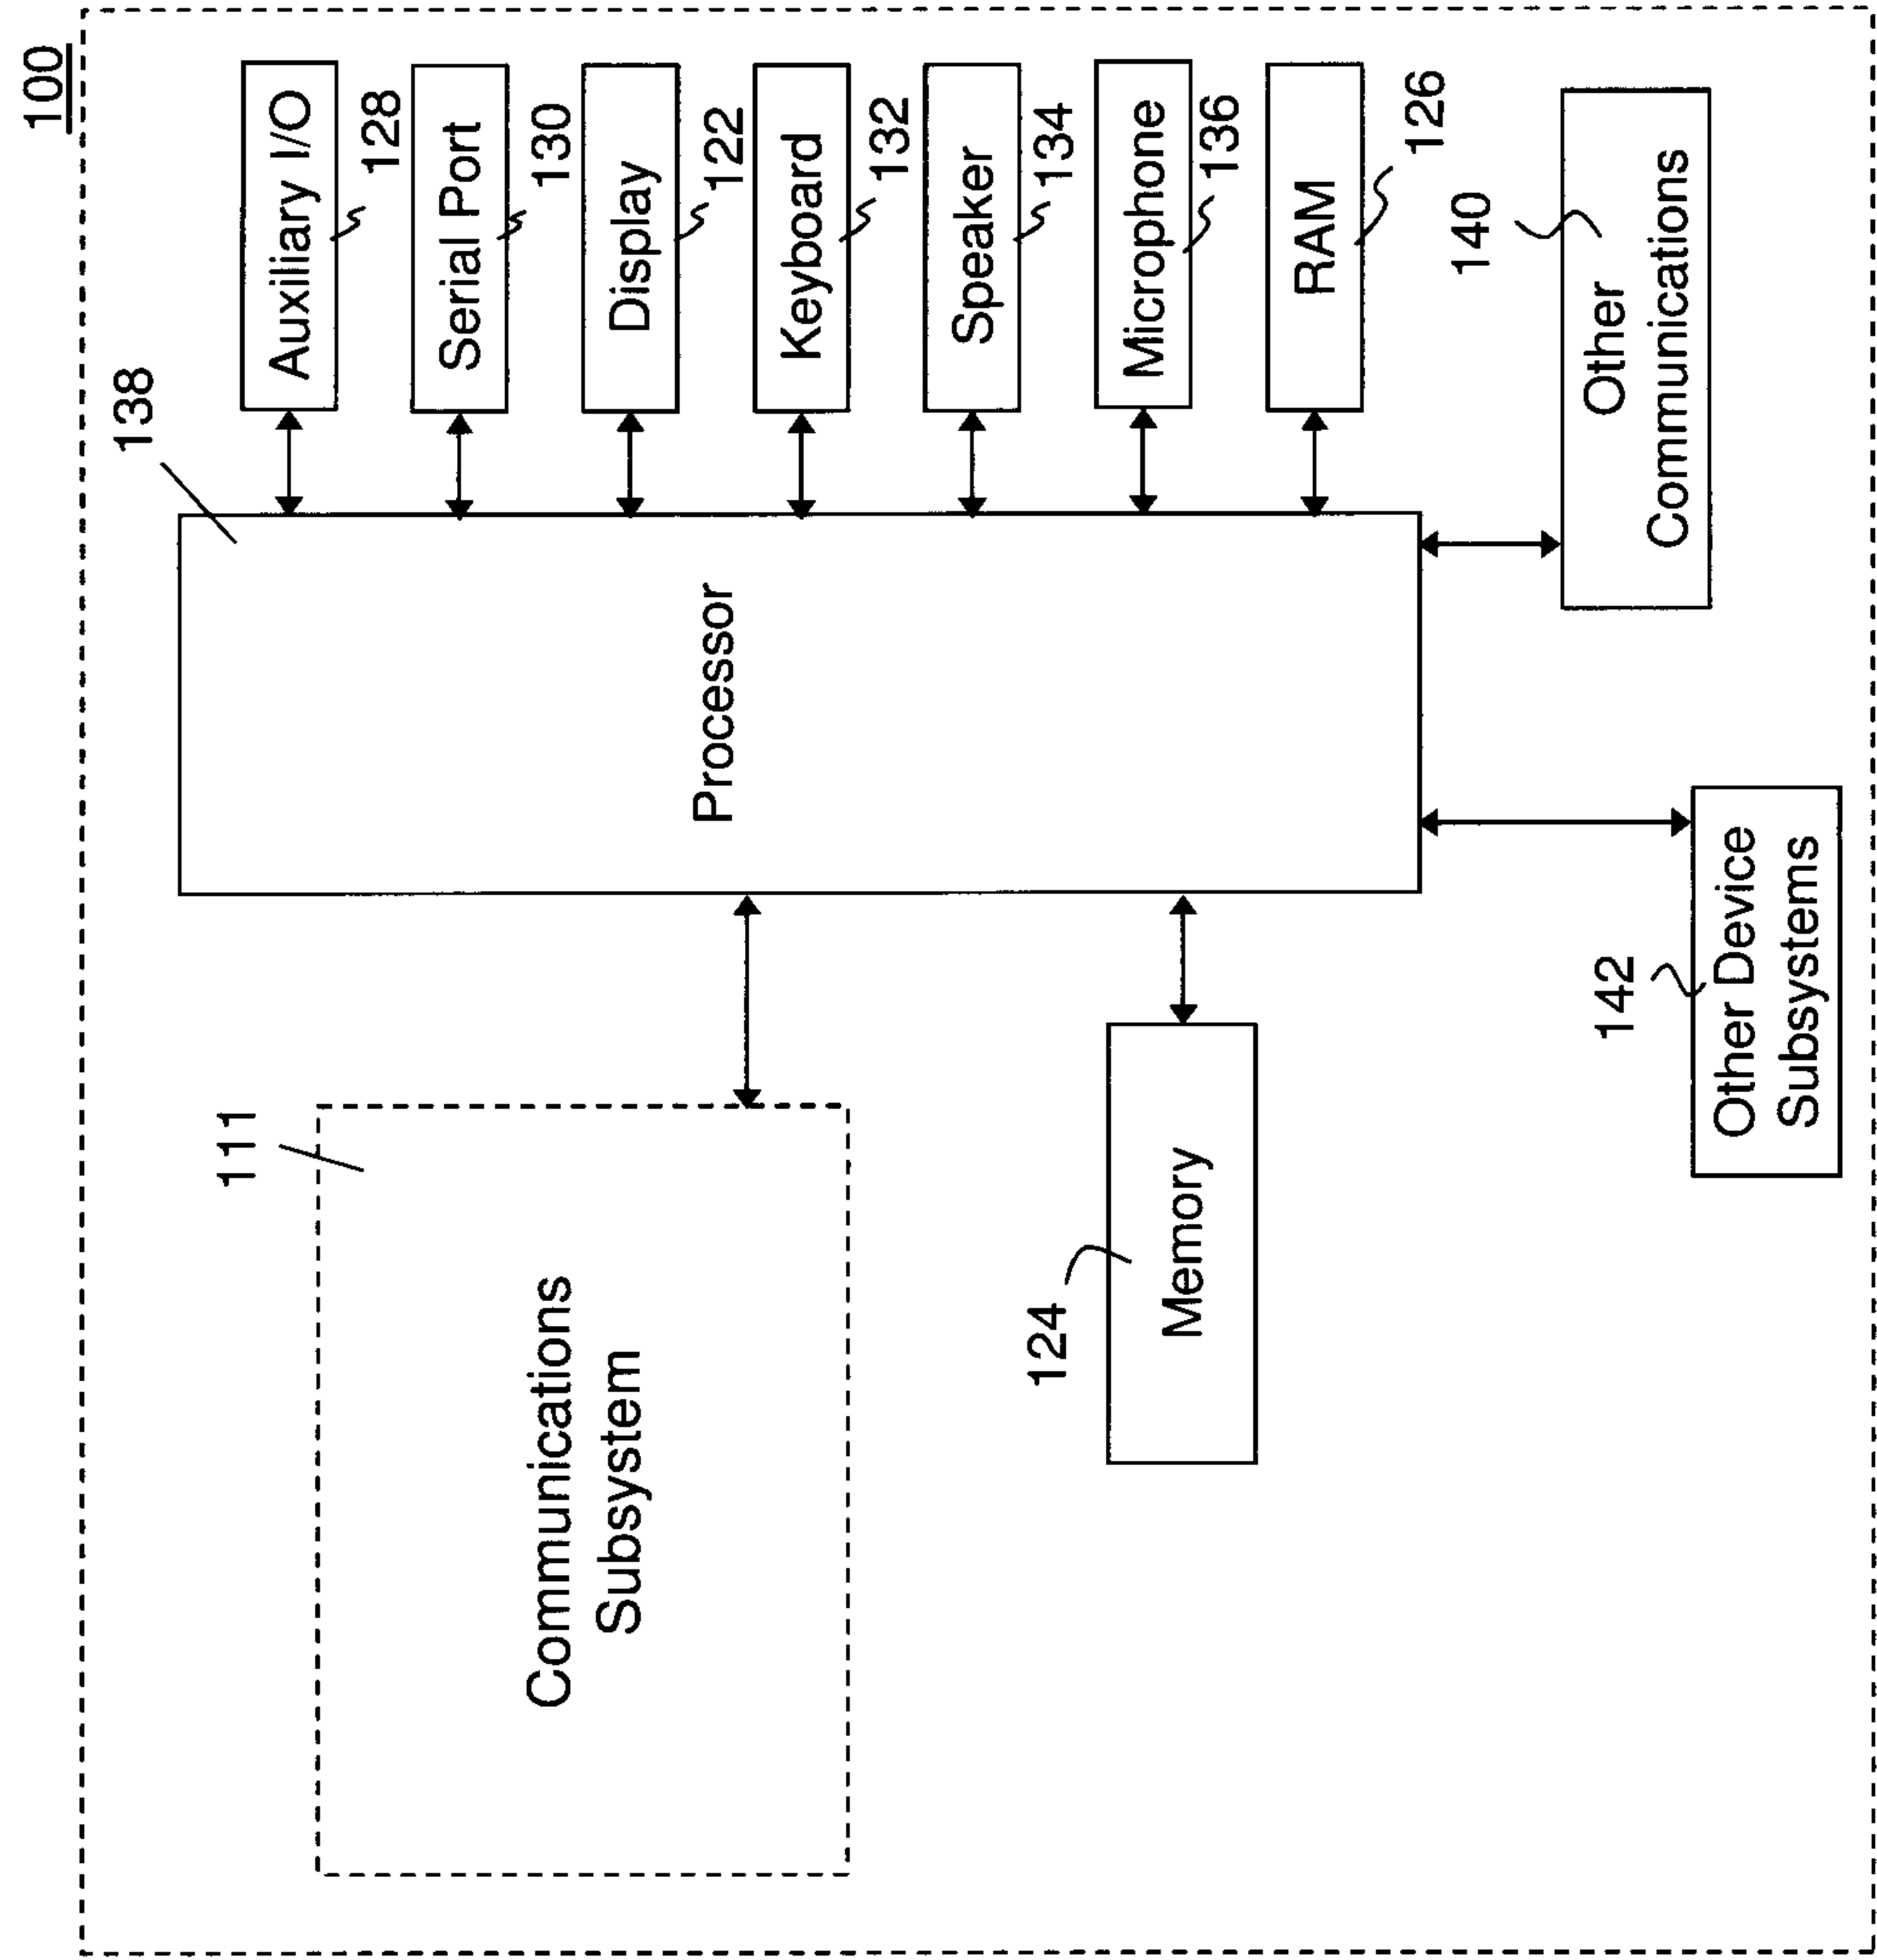


FIG. 1

2/13

200

	Interface List	Available
210	Home WiFi	Yes
212	Cell Interface 1	Yes
214	Cell Interface 2	Yes
216	Tethered Interface (Bluetooth™)	Yes
220	Work WiFi	No
222	School WiFi	No
	⋮	⋮

FIG. 2

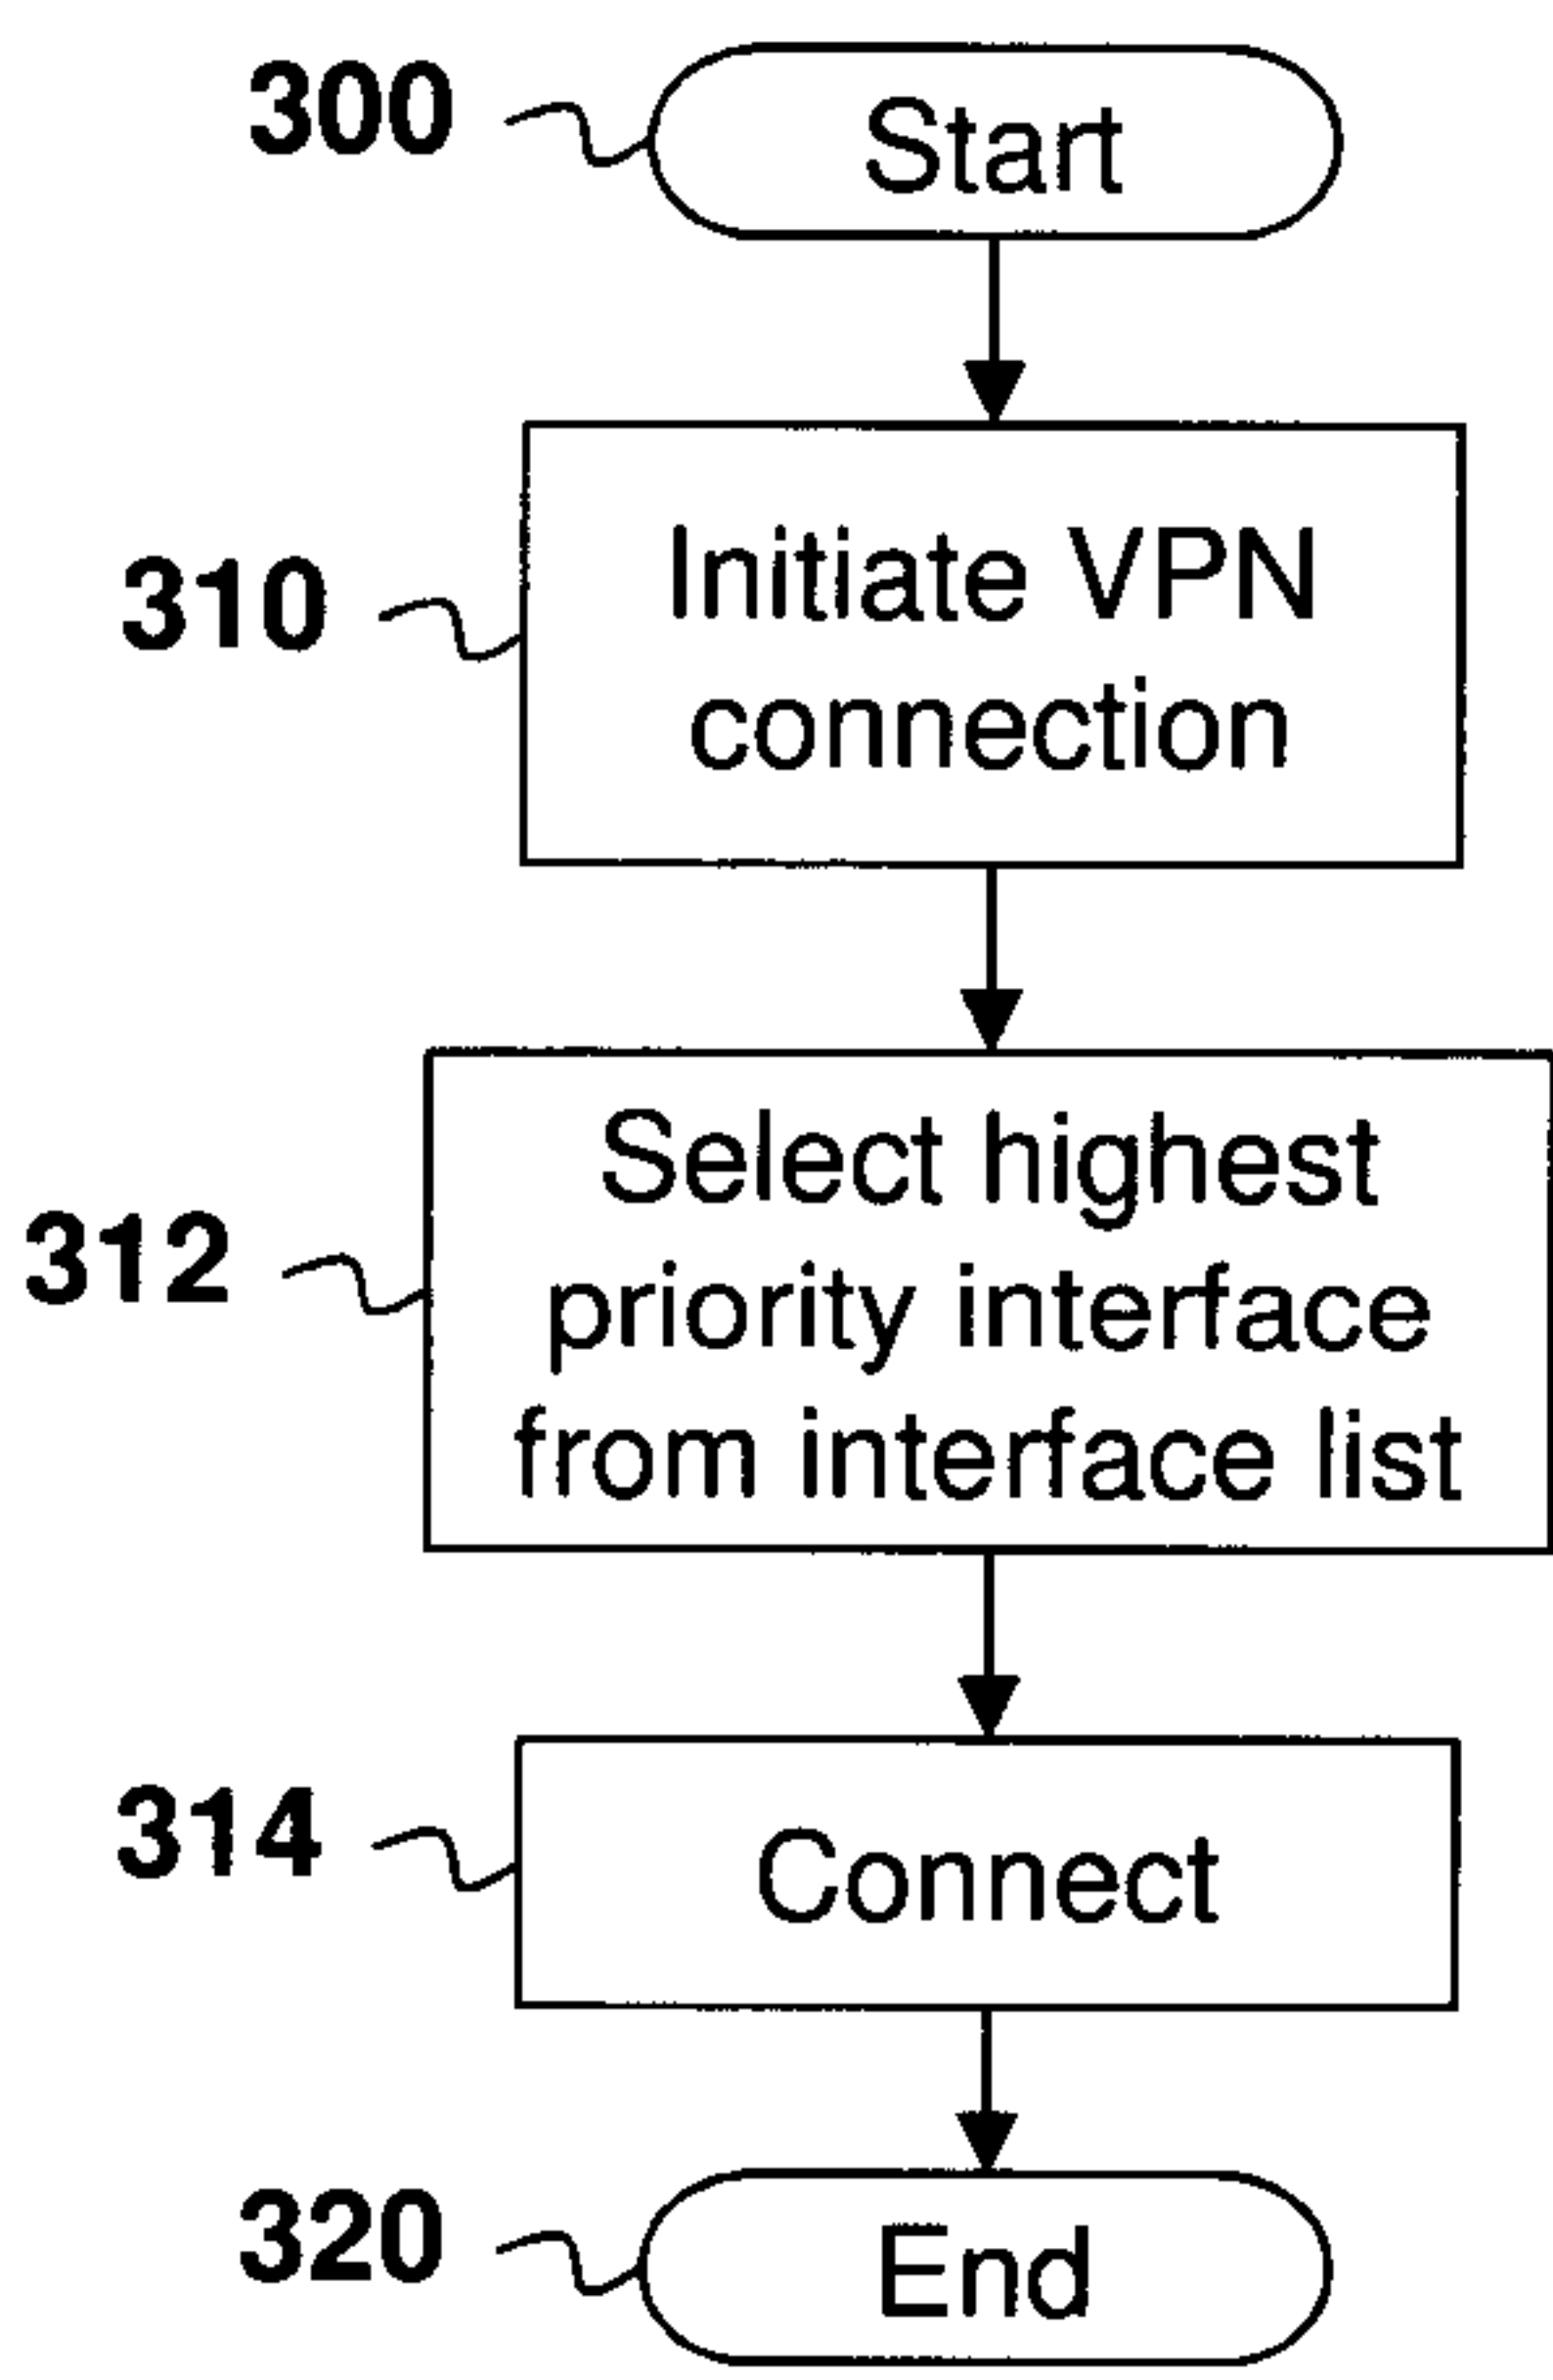


FIG. 3

3/13

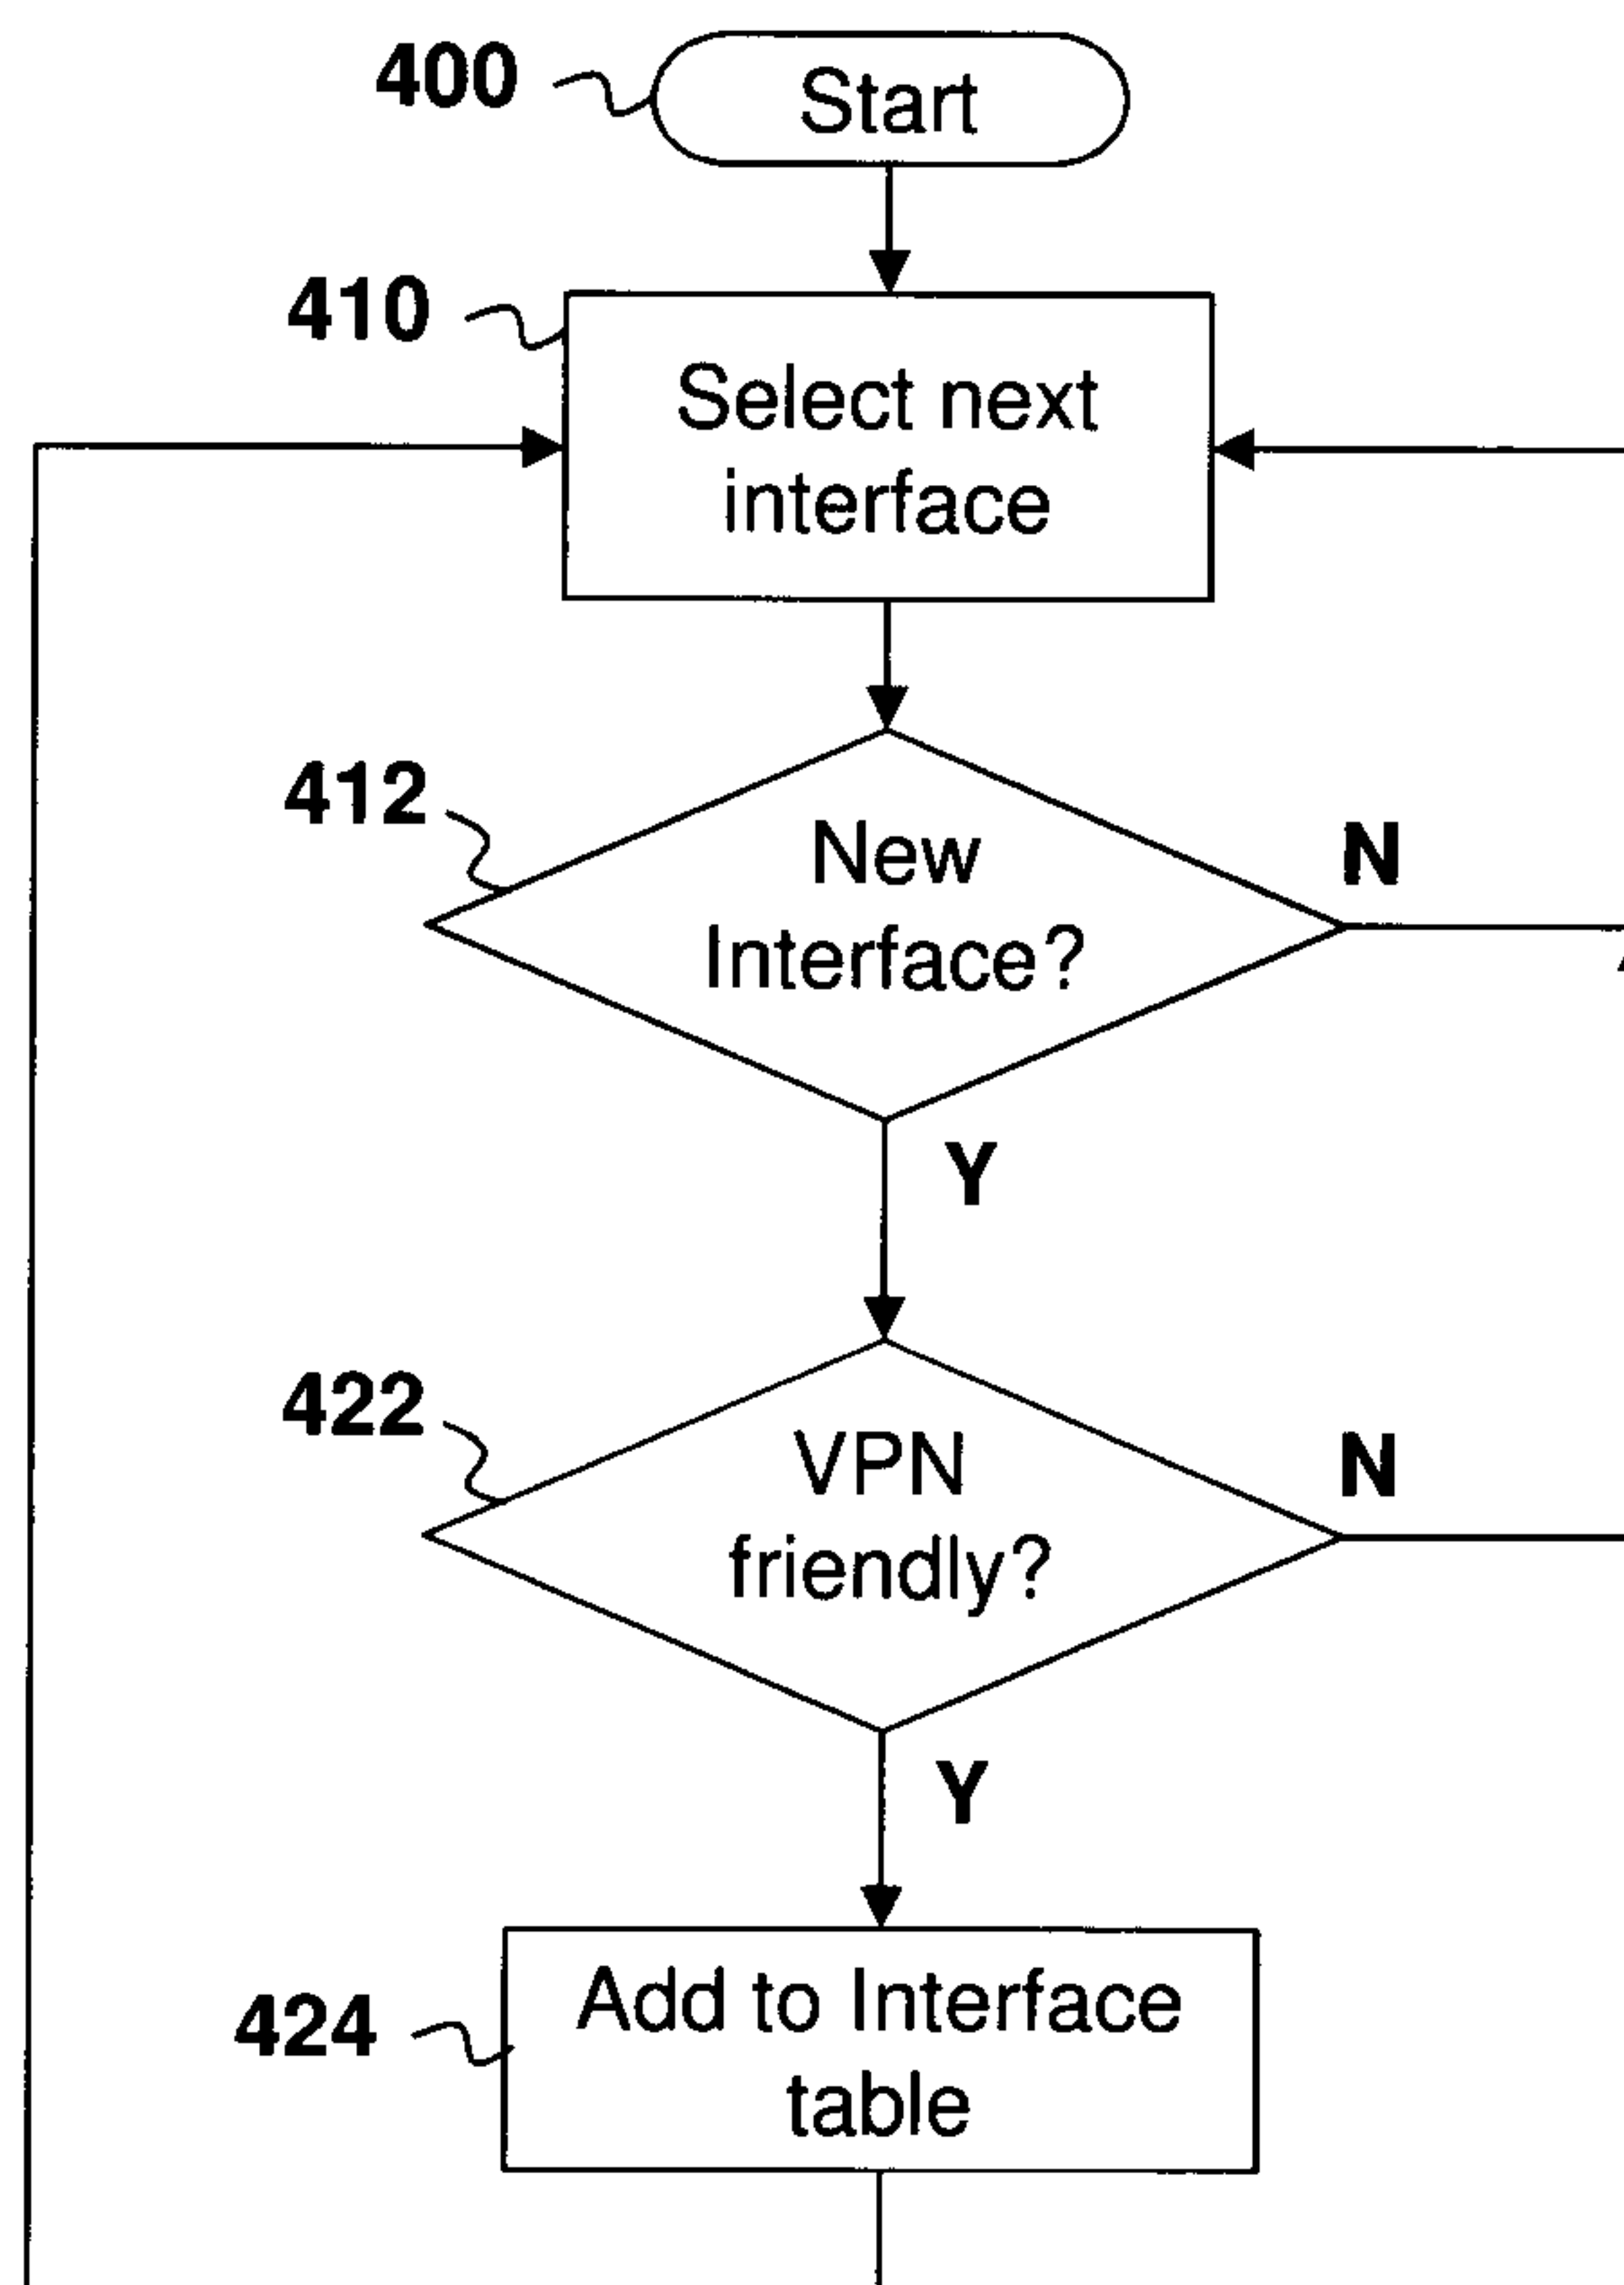


FIG. 4

4/13

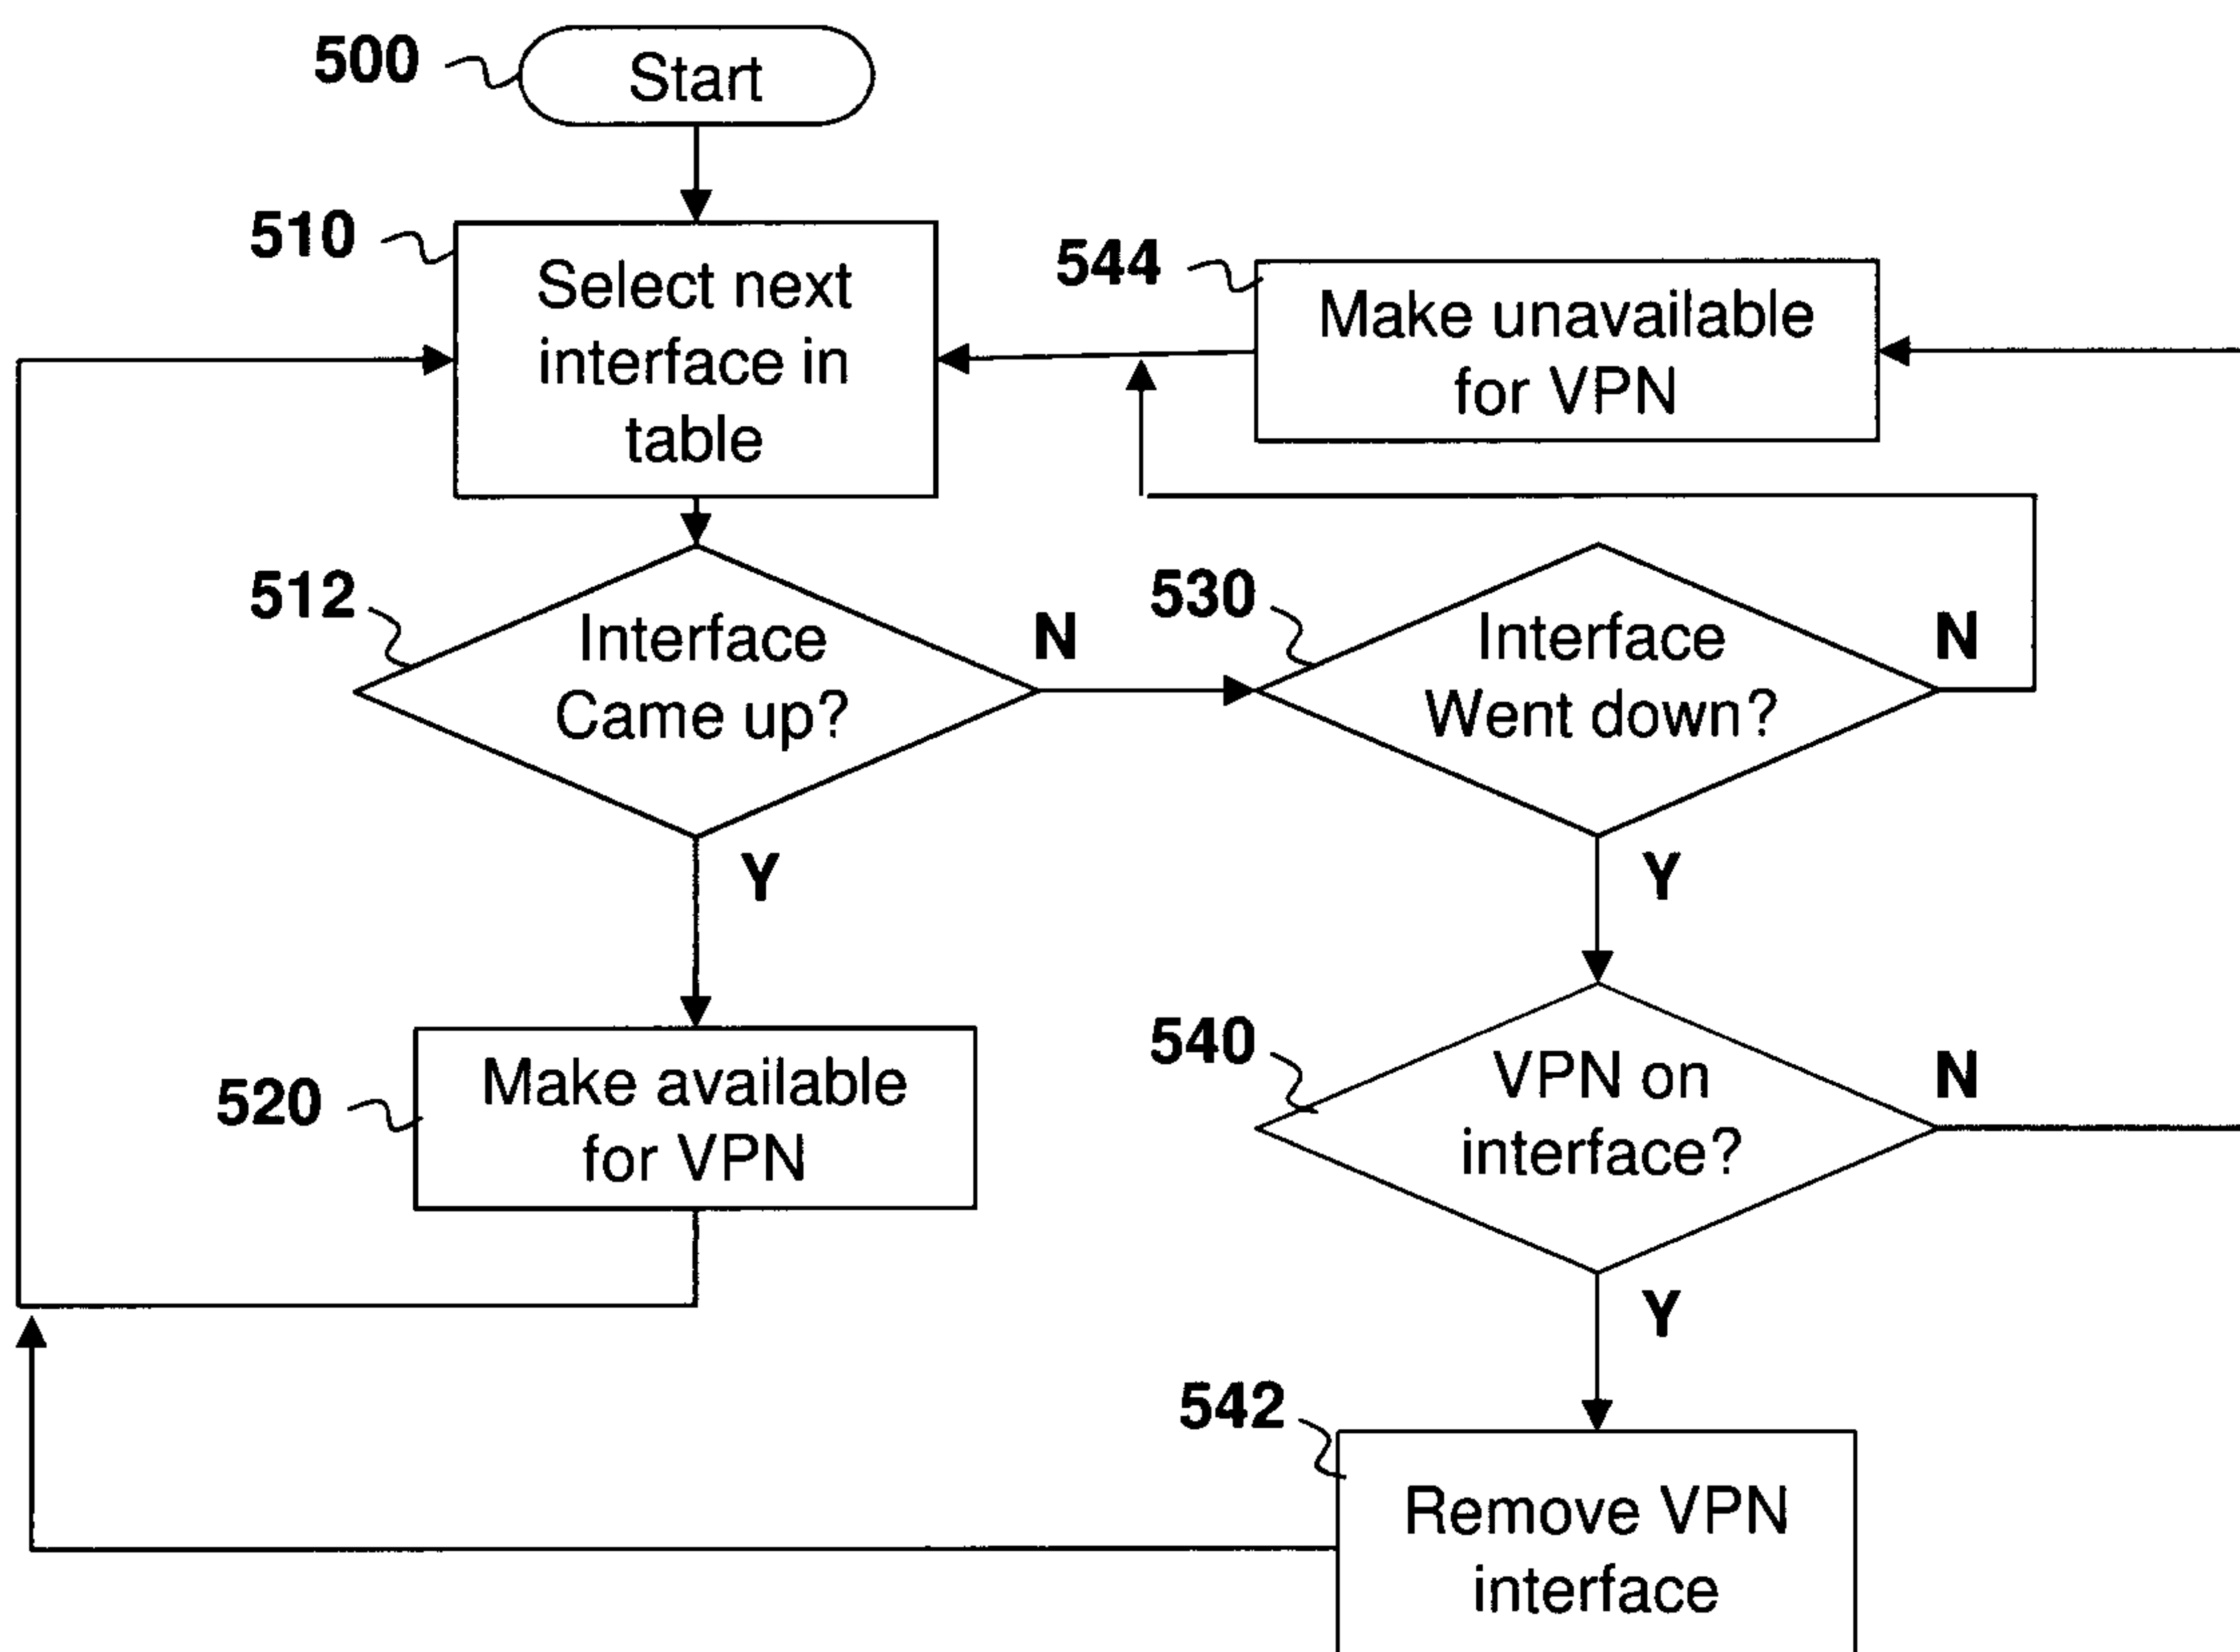


FIG. 5

600

	Interface List	VPN Profiles
610	Home WiFi	B
612	Cell Interface 1	A, B, C
614	Cell Interface 2	A,B
616	Tethered Interface (Bluetooth™)	B
618	Work WiFi	A,C
620	School WiFi	B
	⋮	⋮

FIG. 6

700

	Interface List	Available	VPN Profiles
710	Home WiFi	Yes	B
712	Cell Interface 1	Yes	A, B, C
714	Cell Interface 2	Yes	A,B
716	Tethered Interface (Bluetooth™)	Yes	B
718	Work WiFi	No	A,C
720	School WiFi	No	B
	⋮	⋮	⋮

FIG. 7

6/13

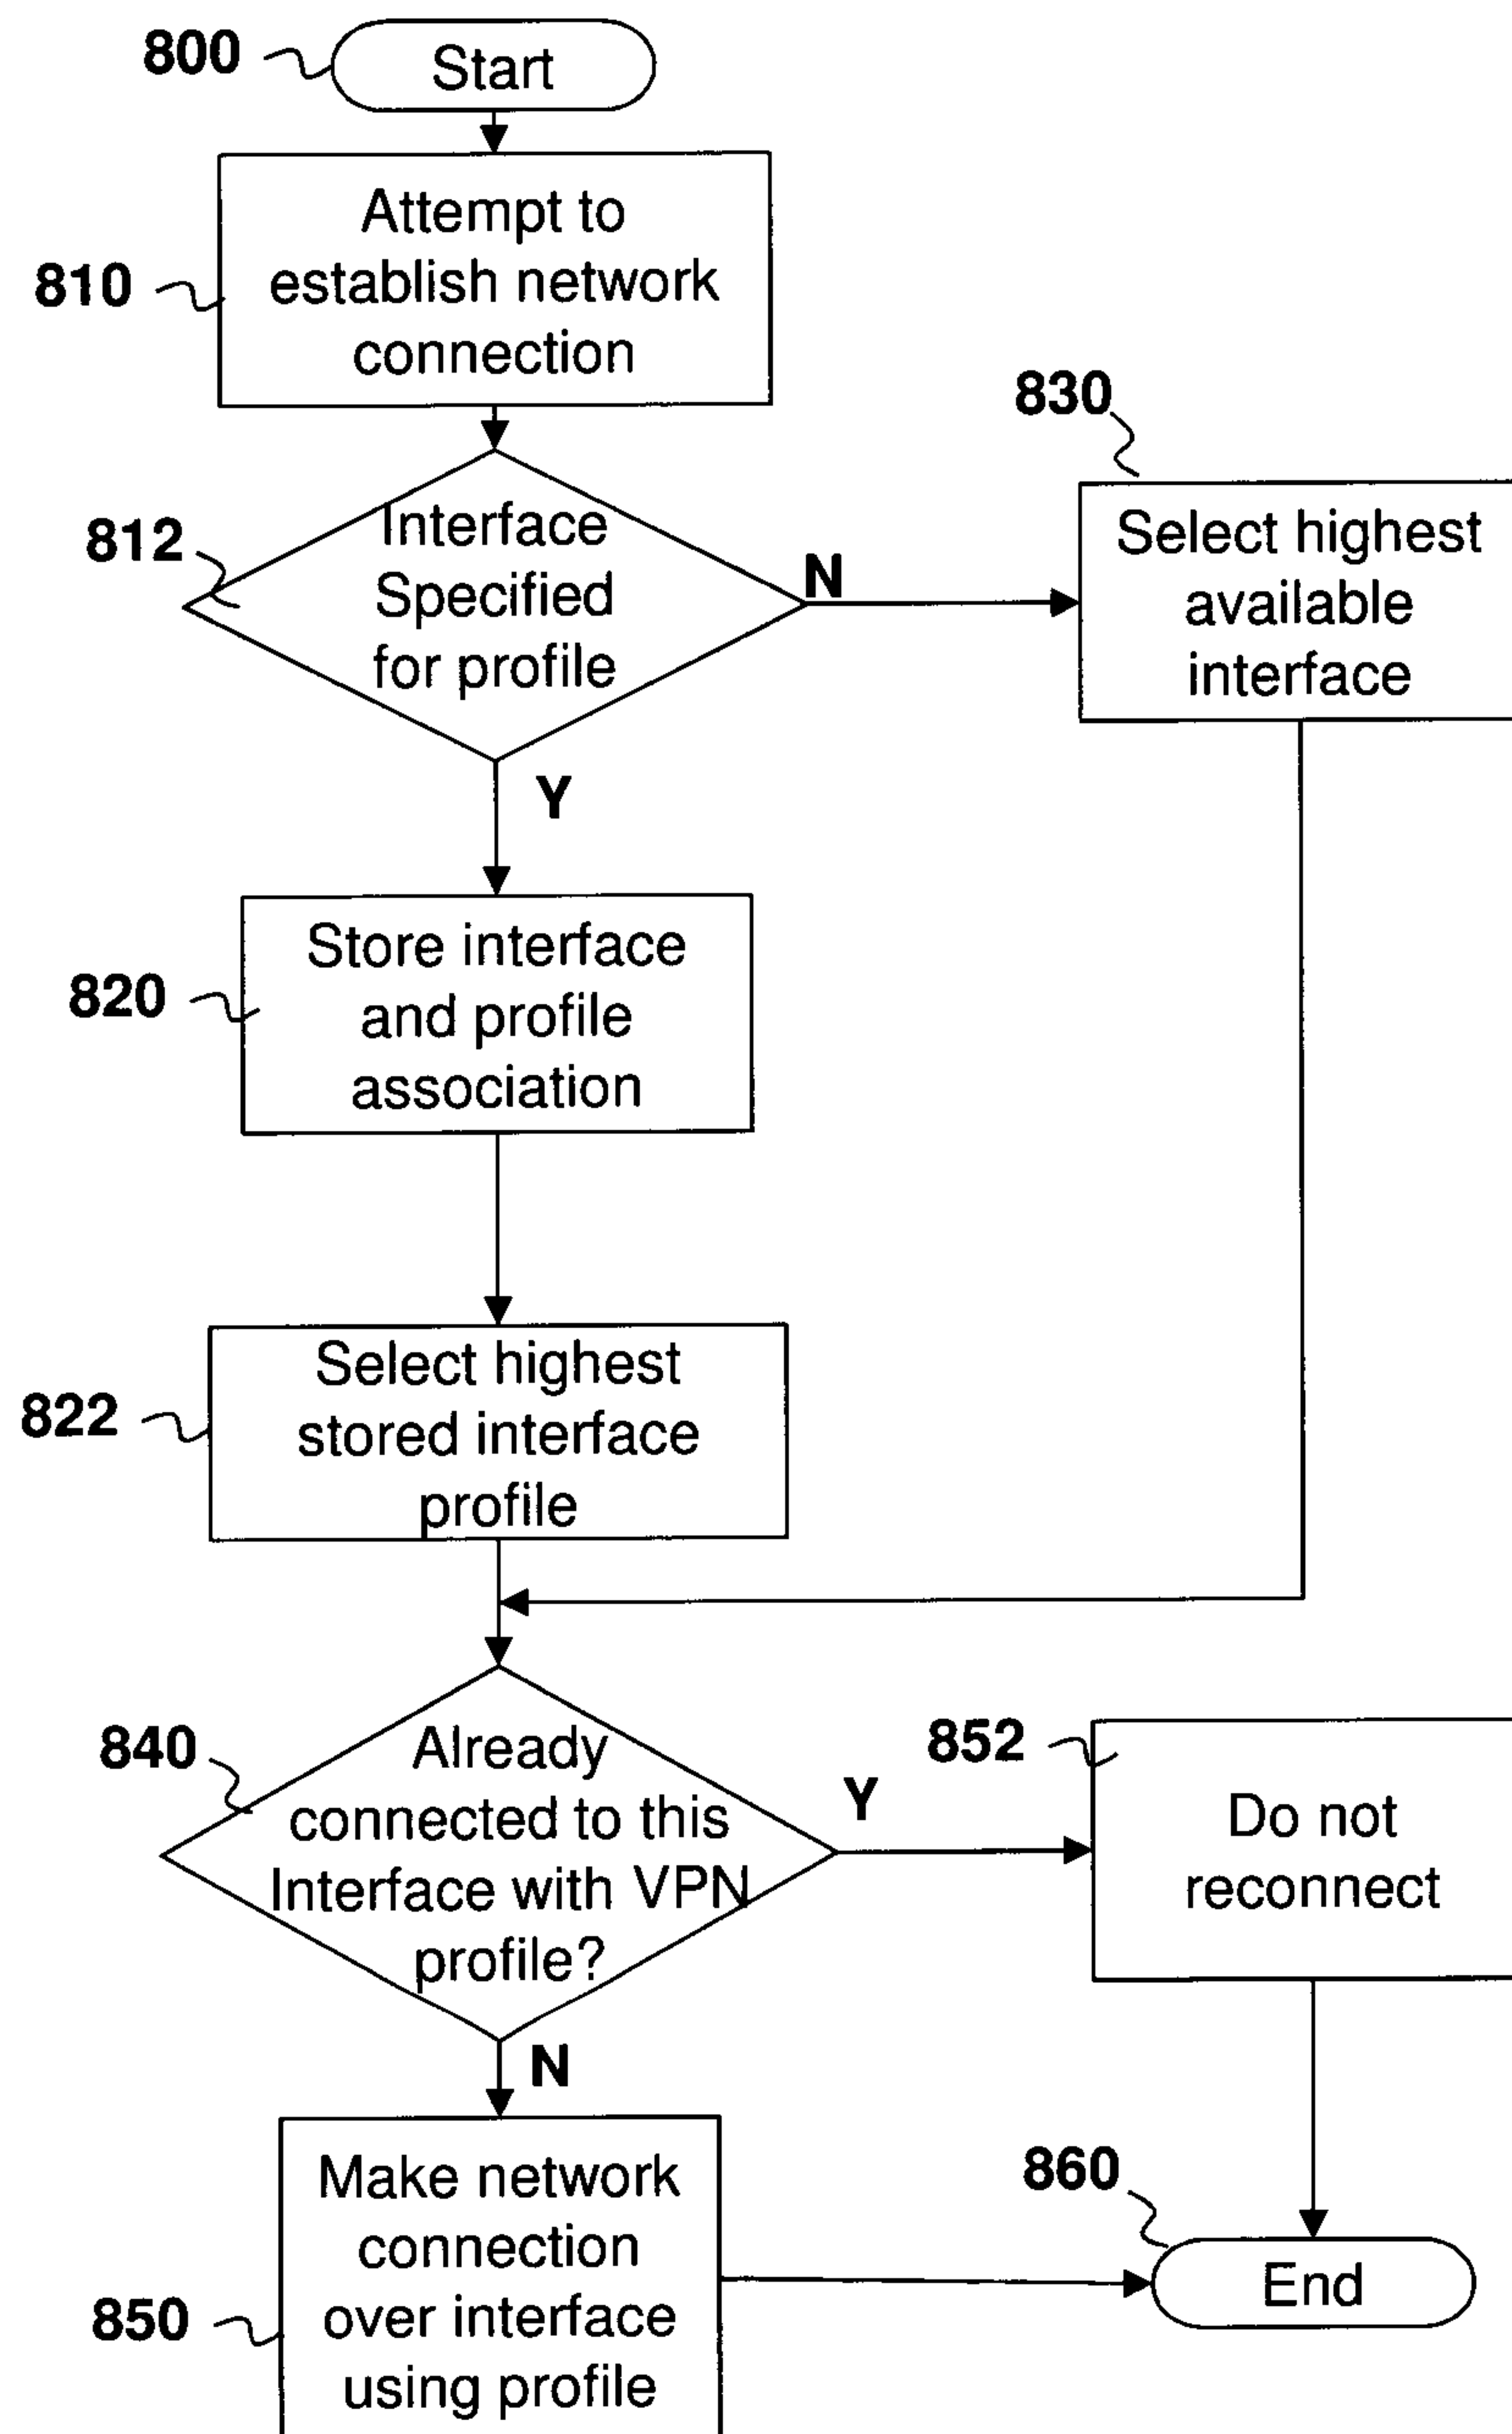


FIG. 8

7/13

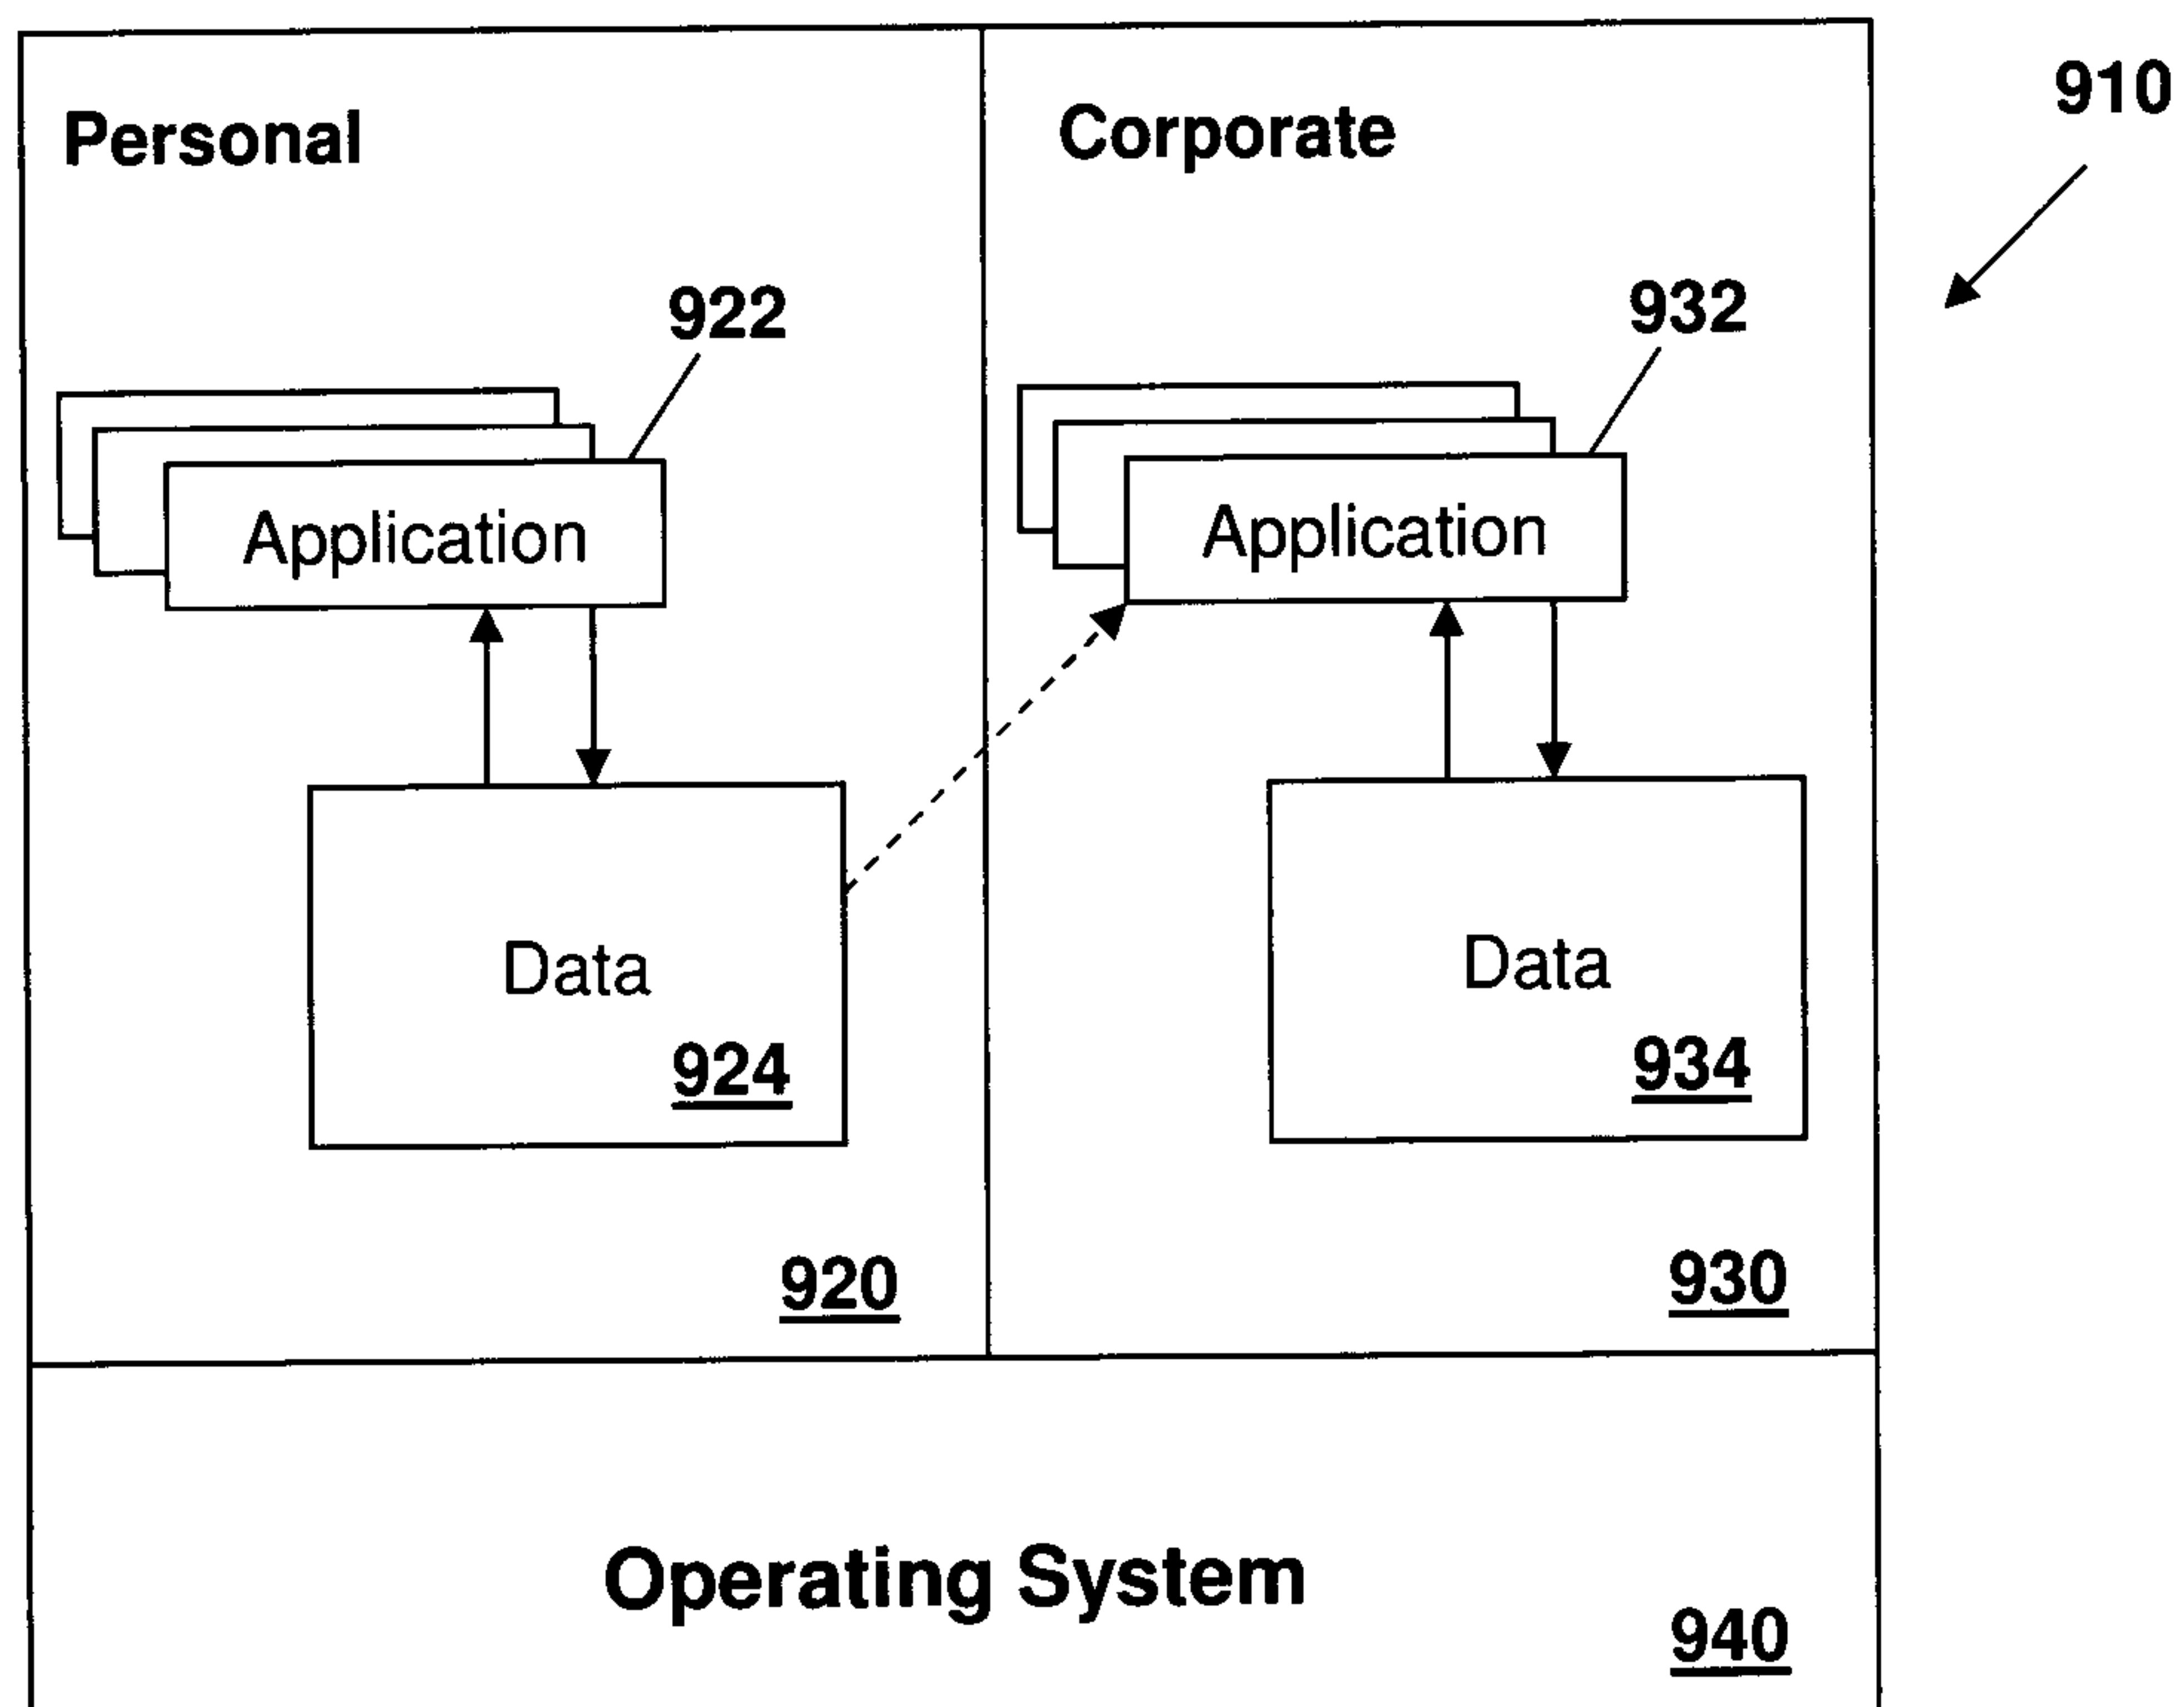


FIG. 9

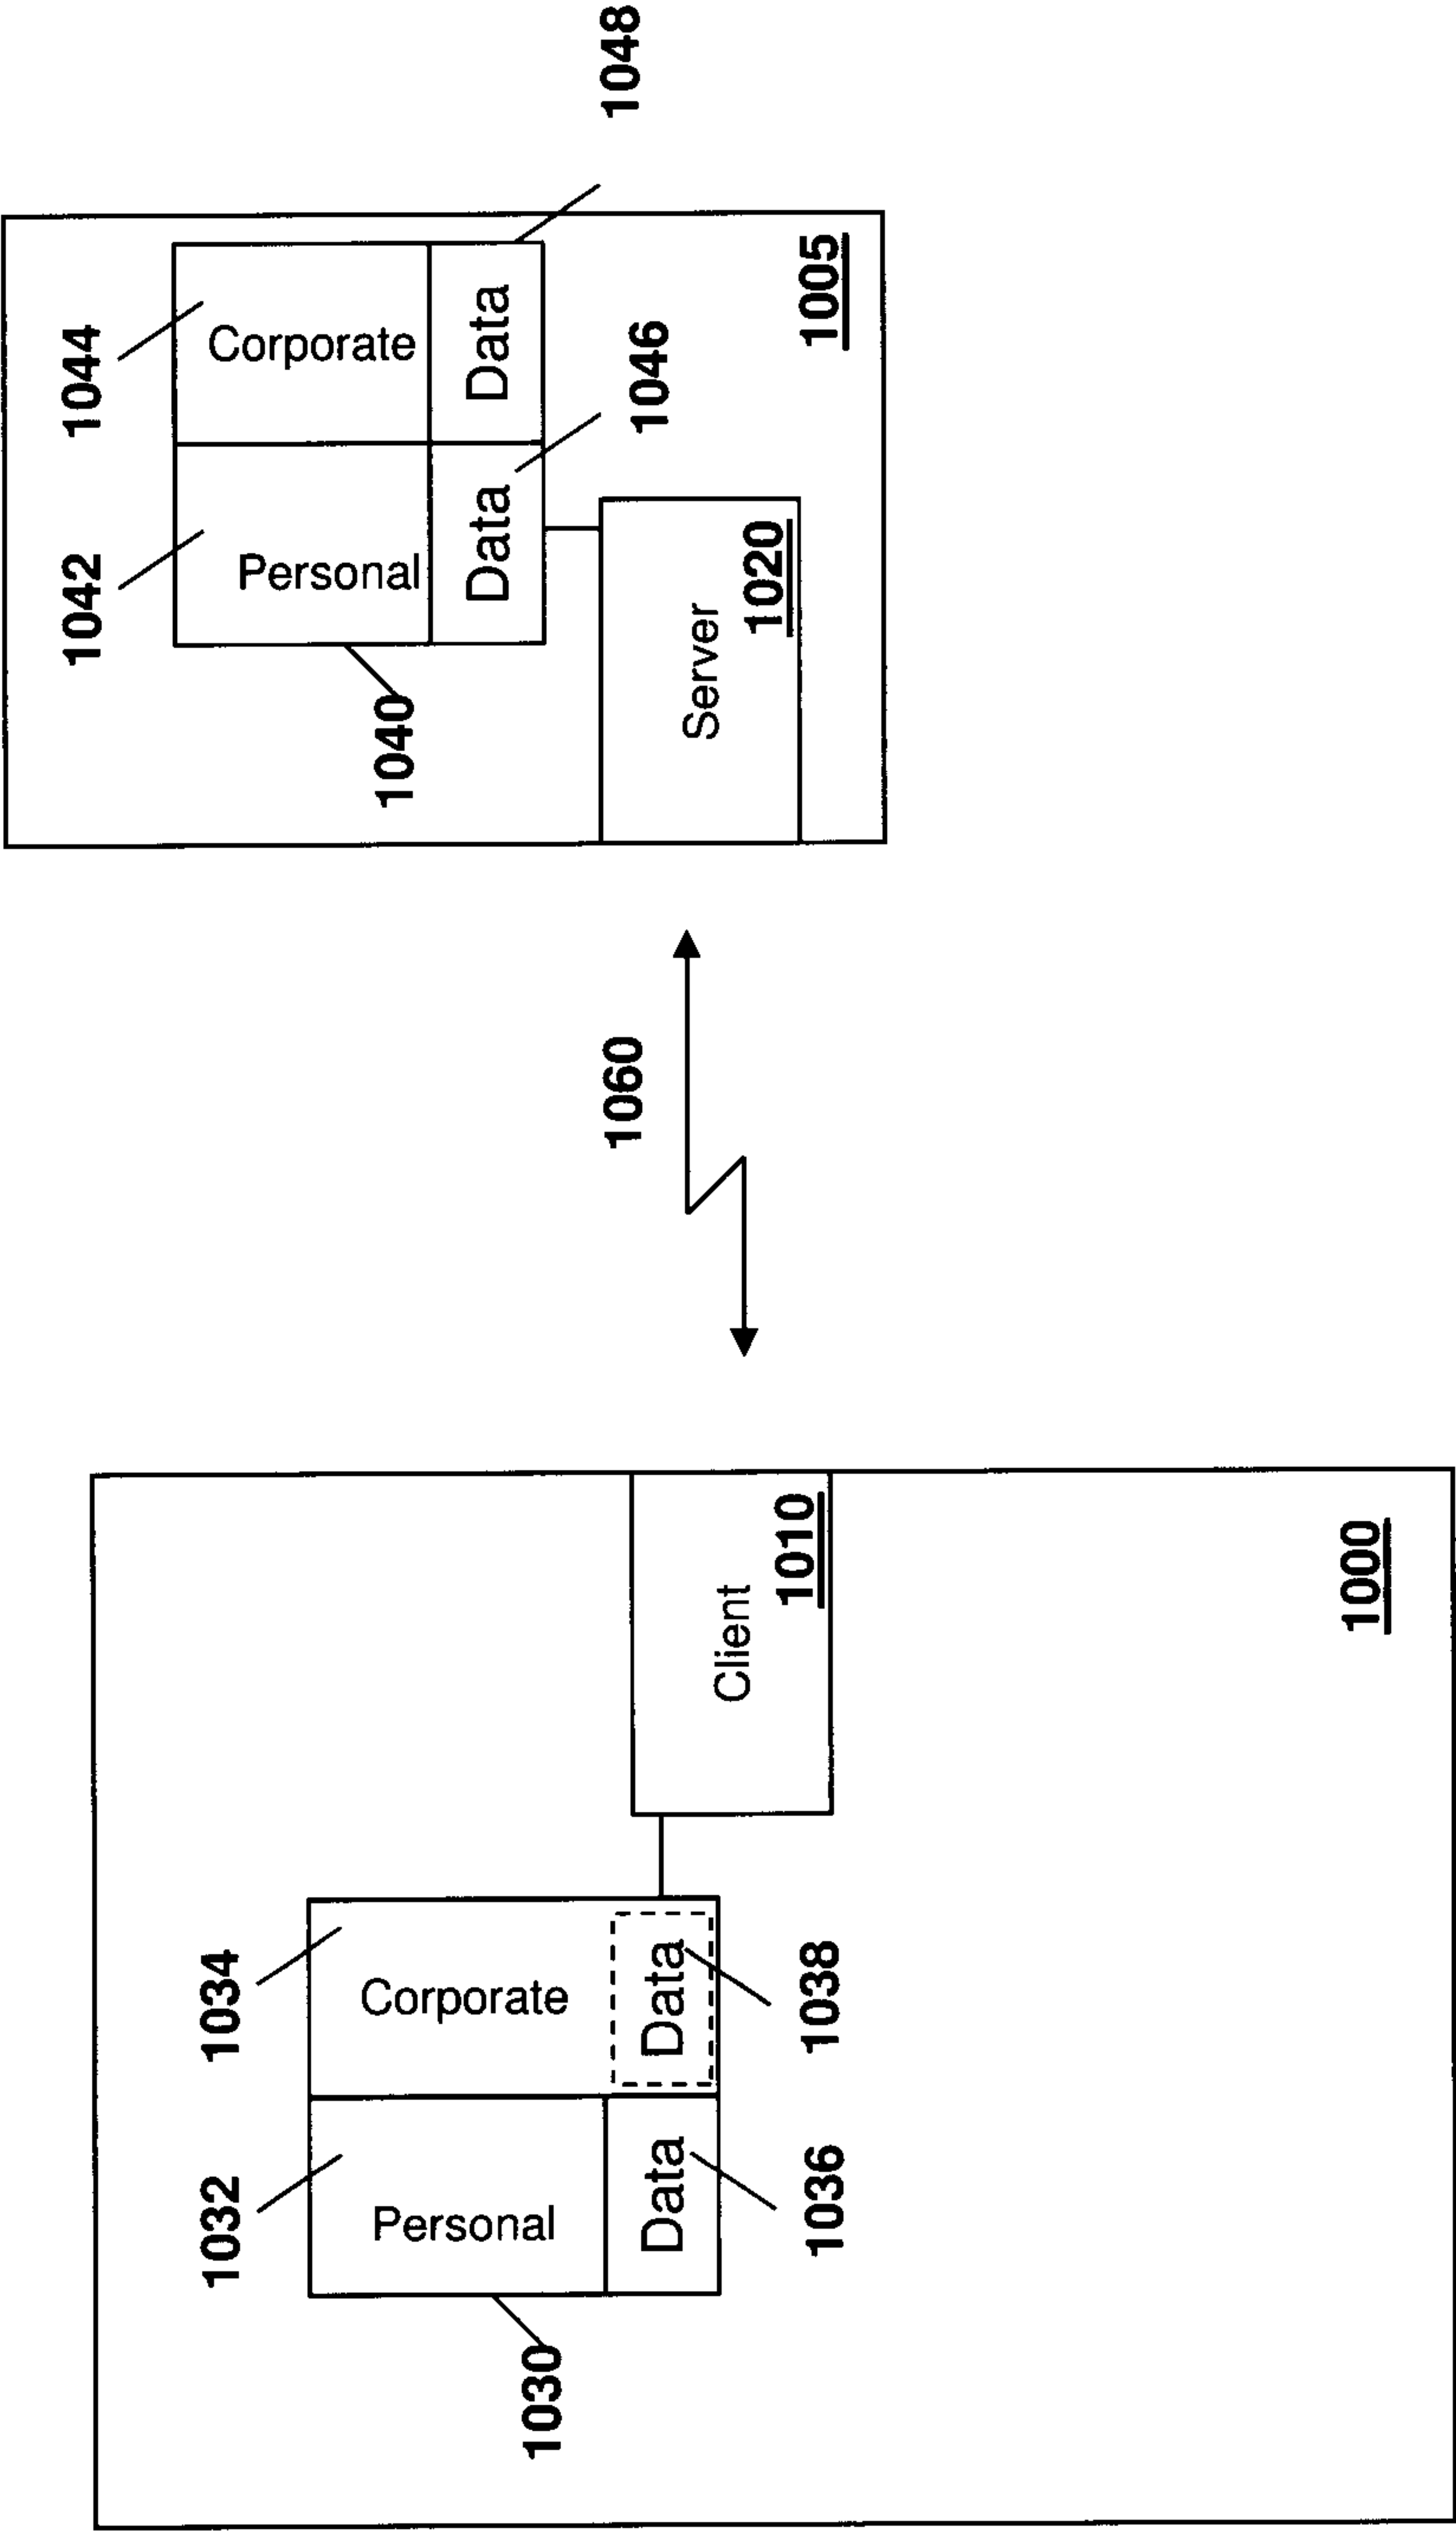


FIG. 10

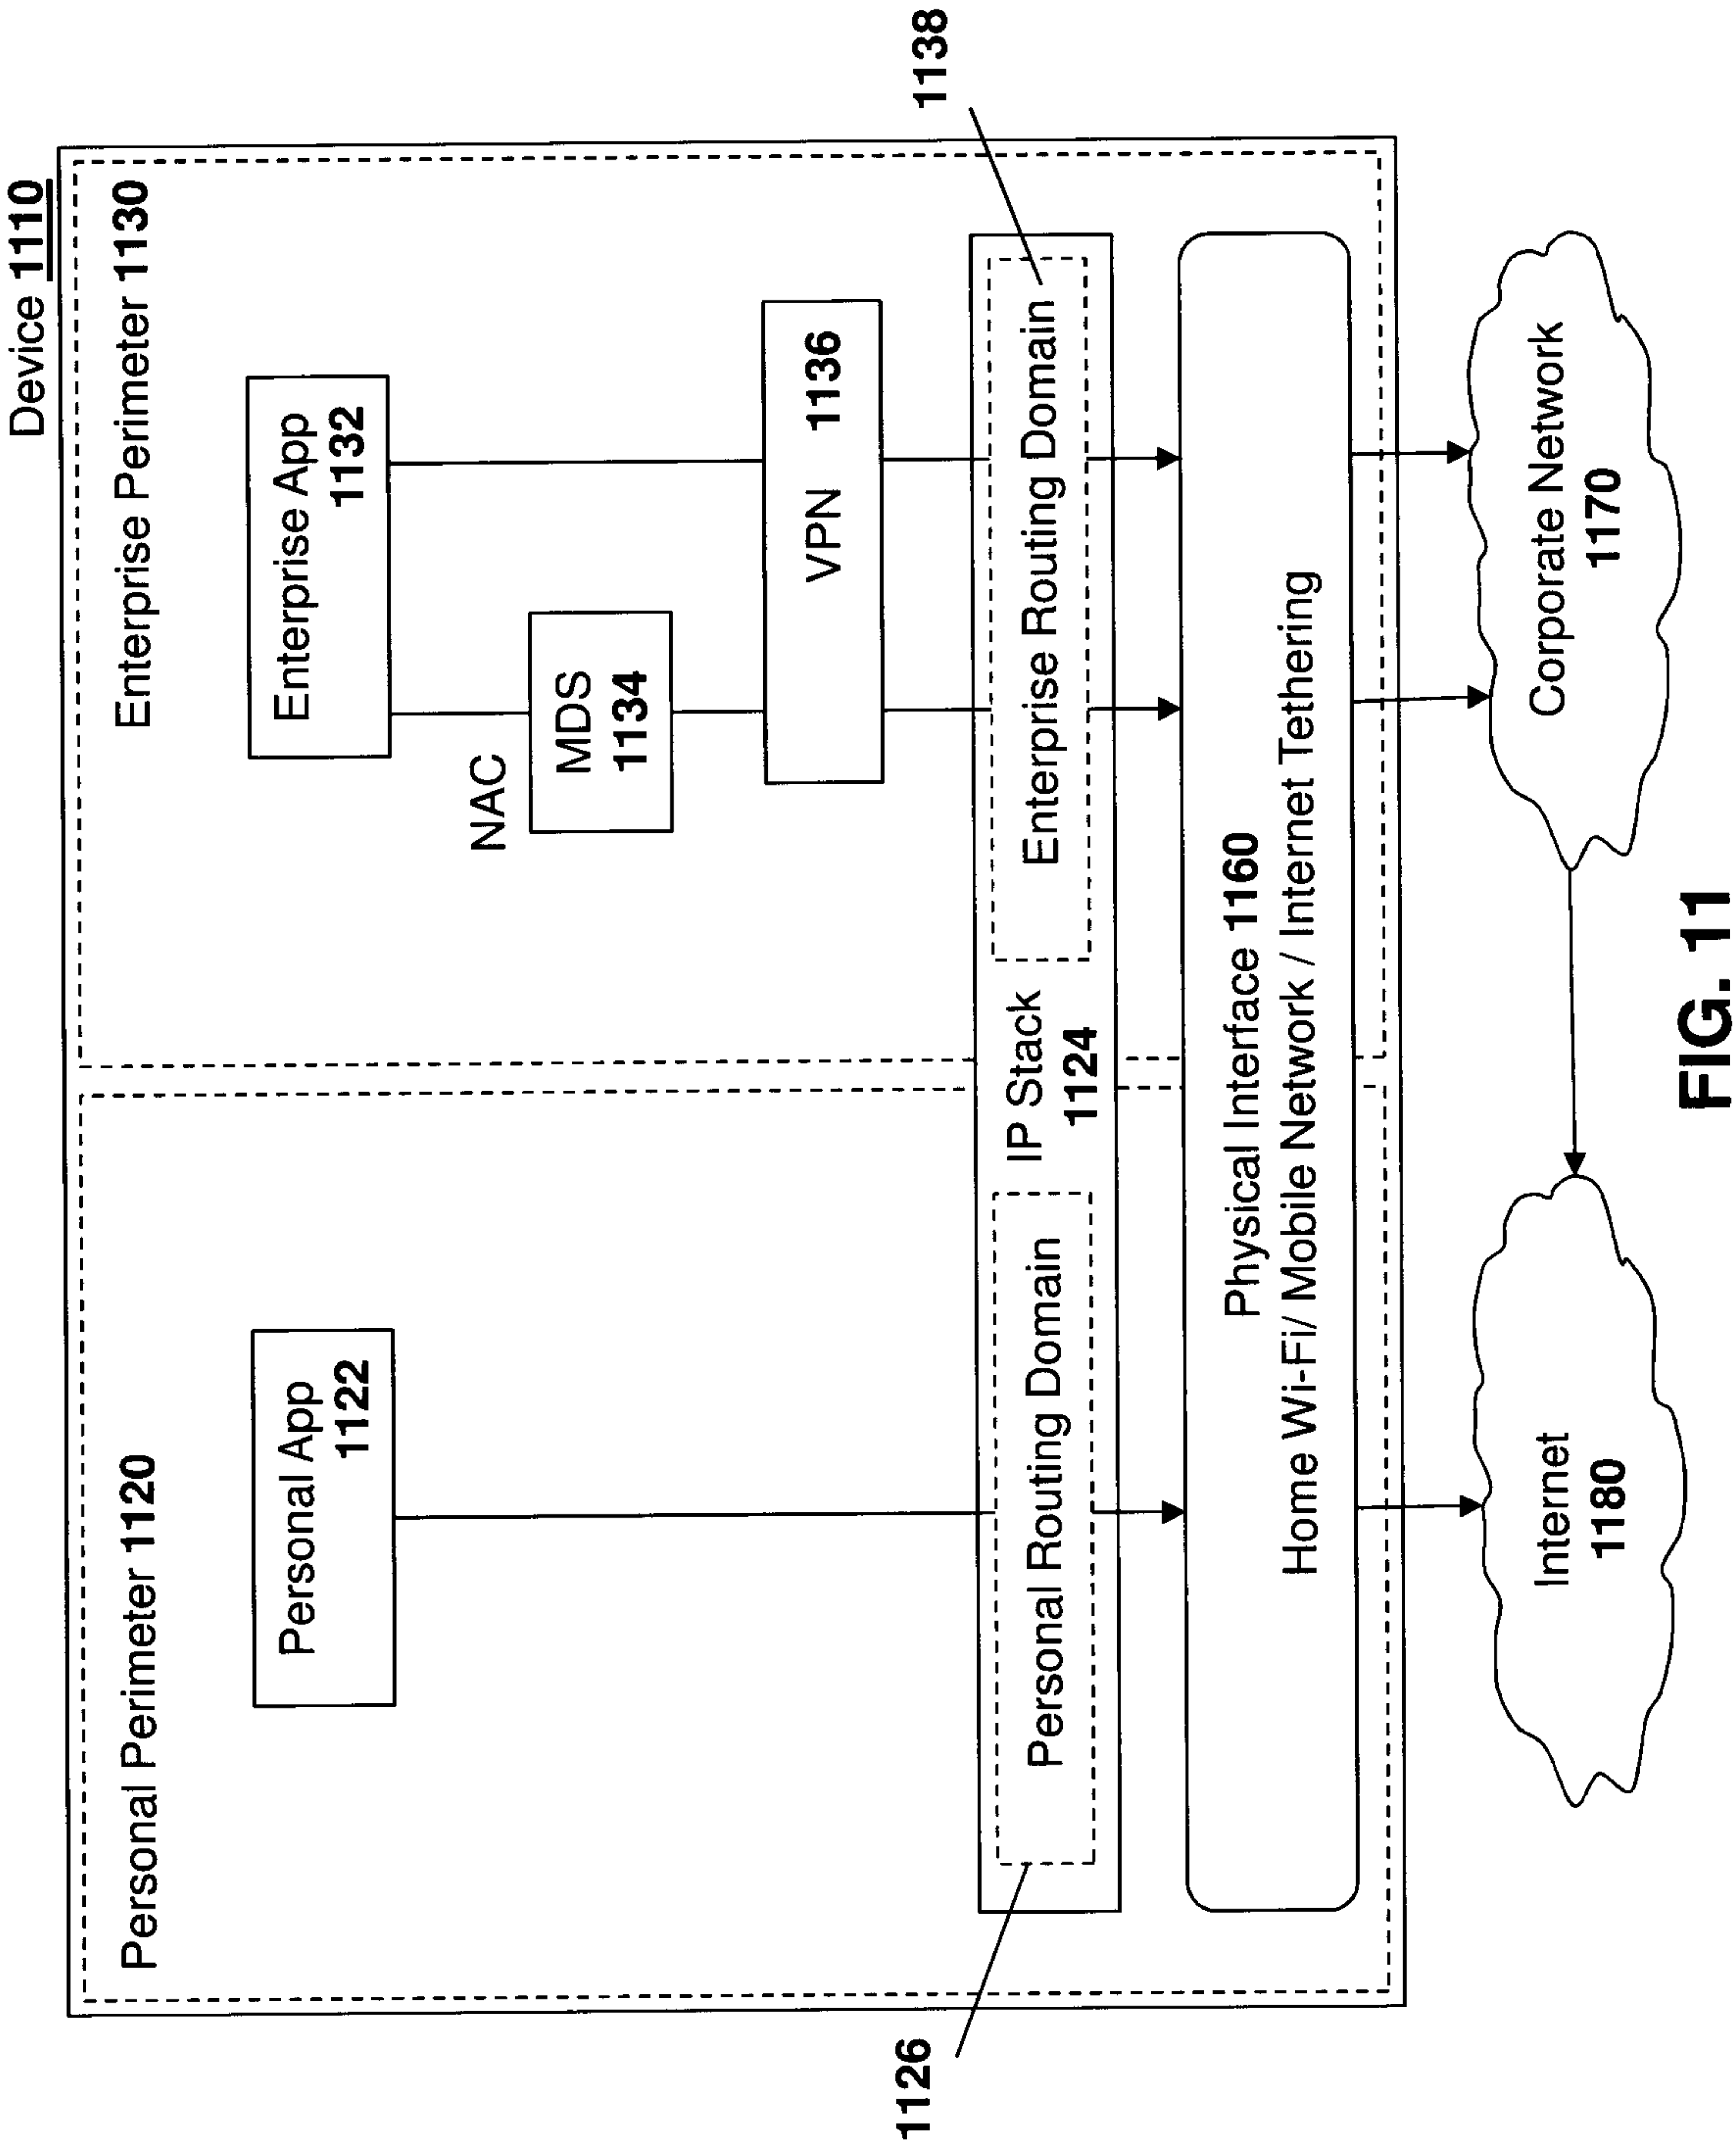


FIG. 11

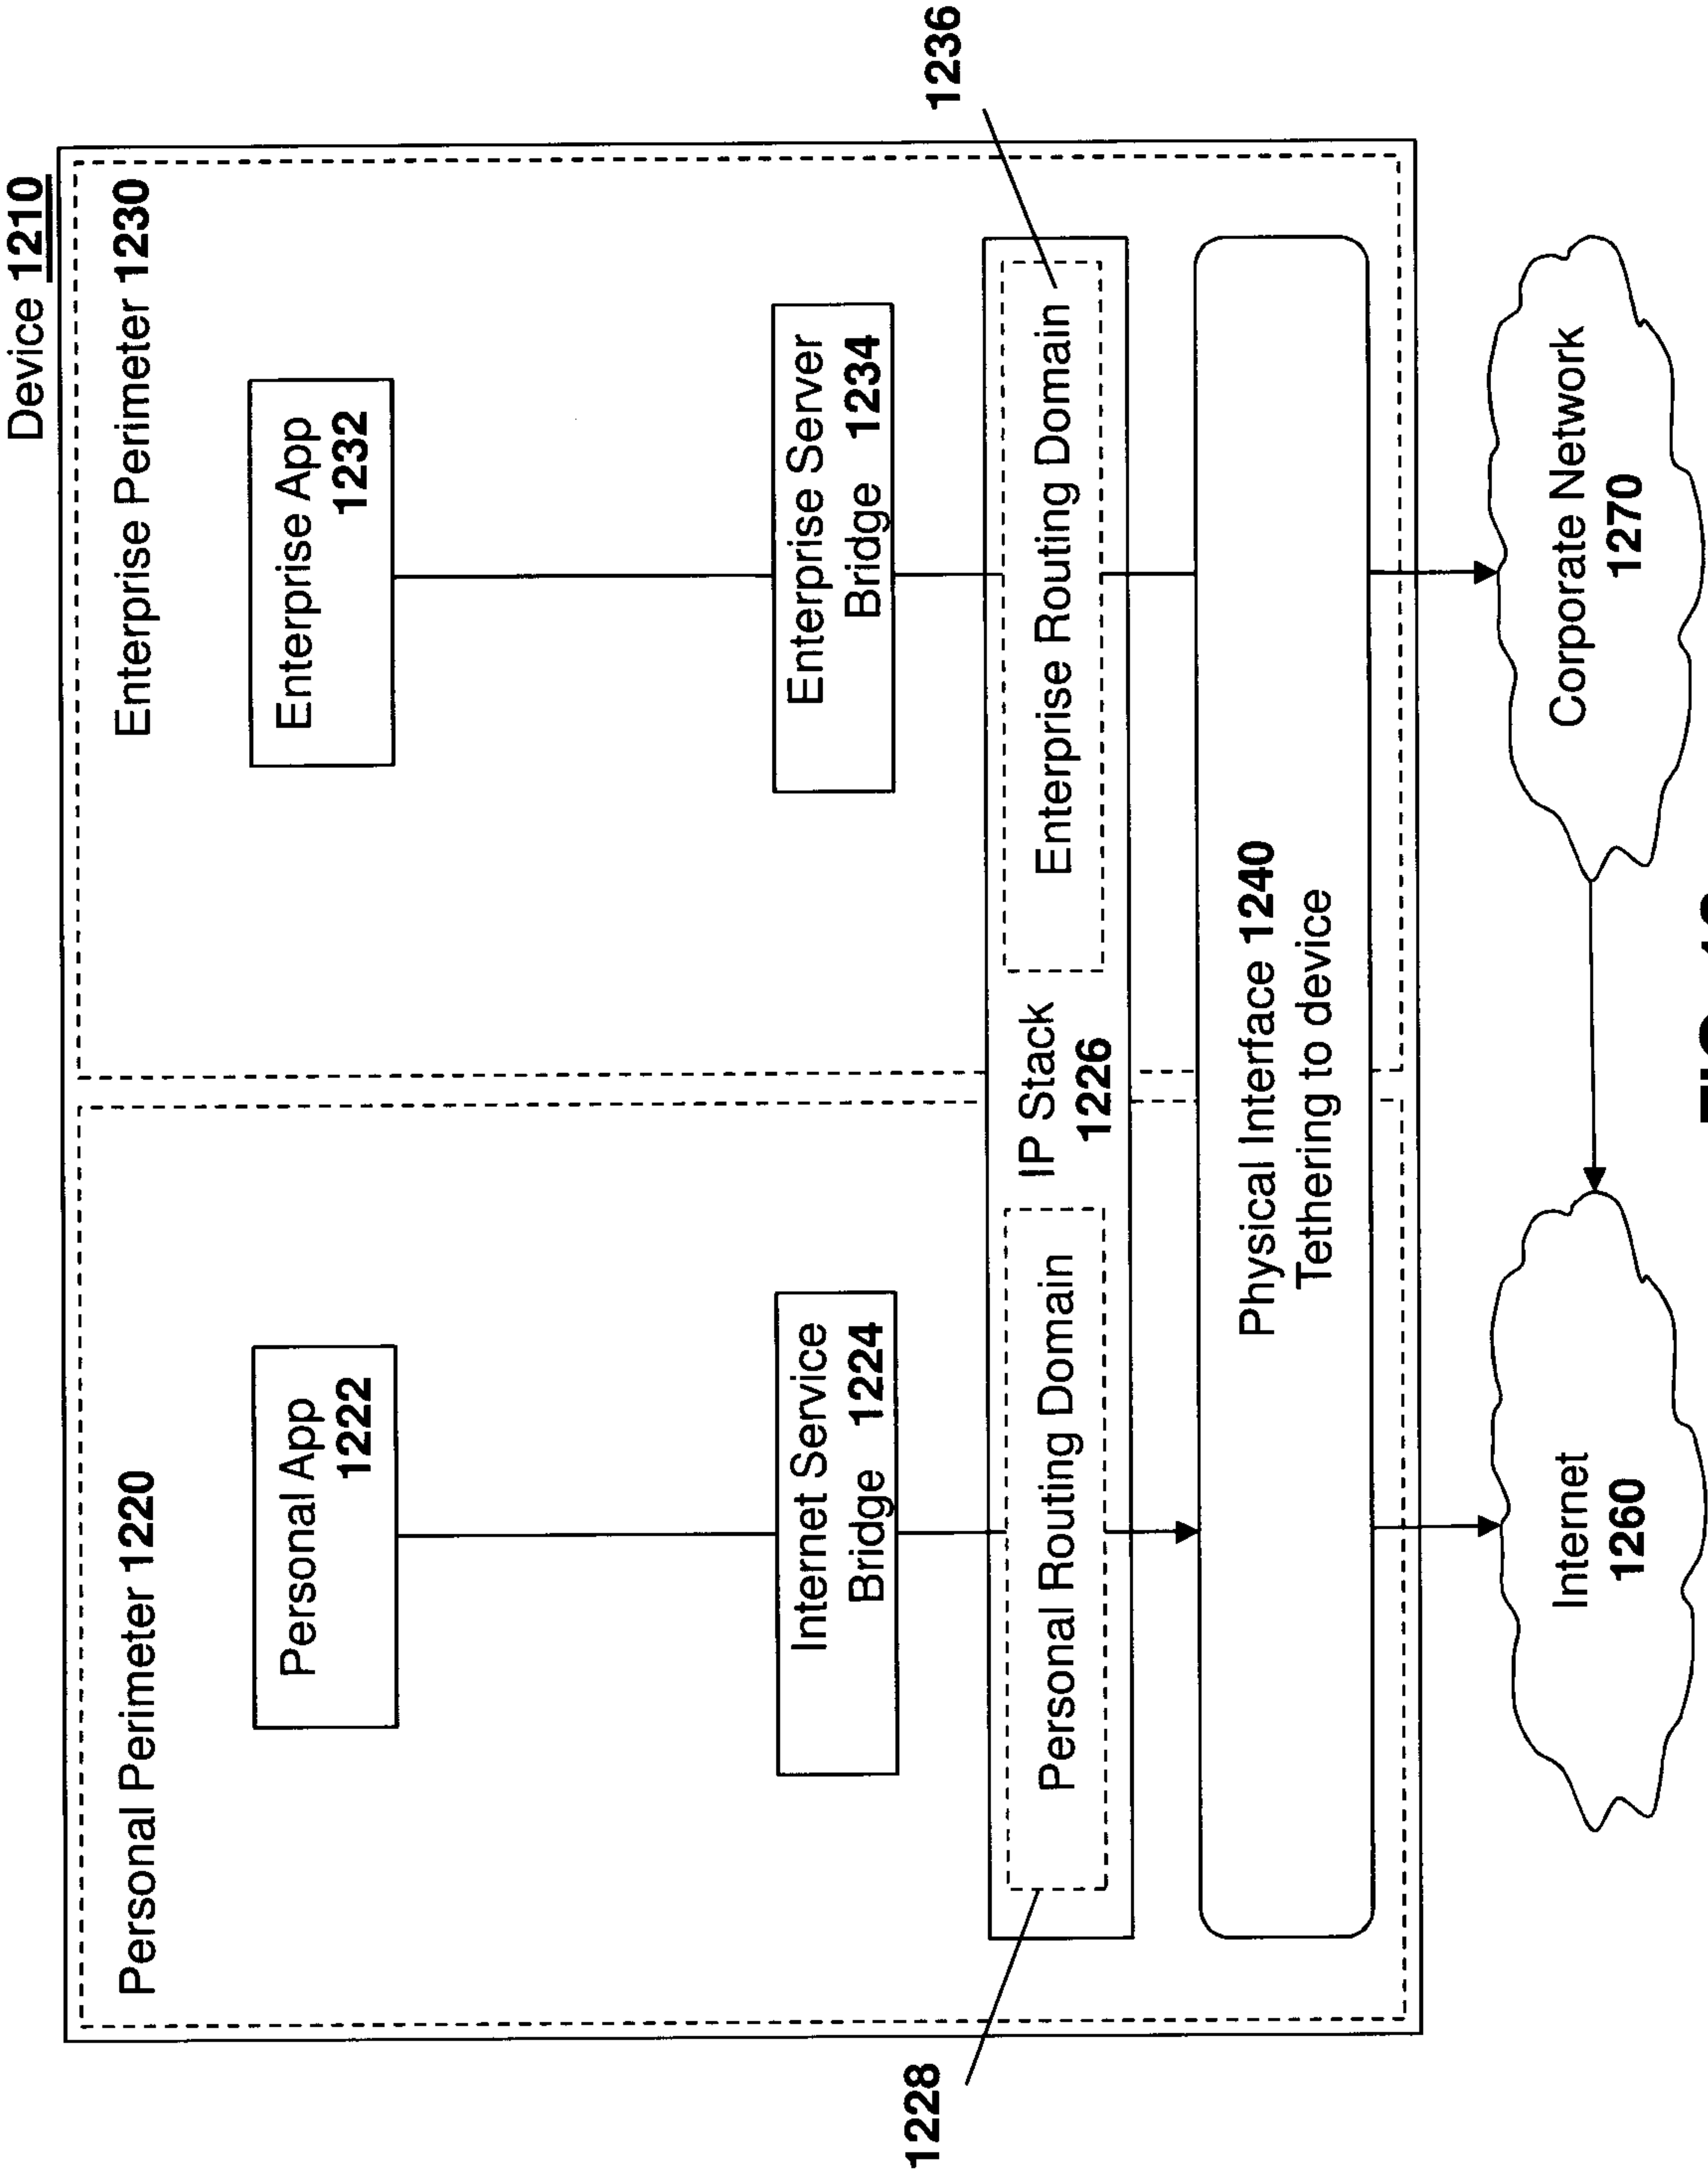


FIG. 12

11/13

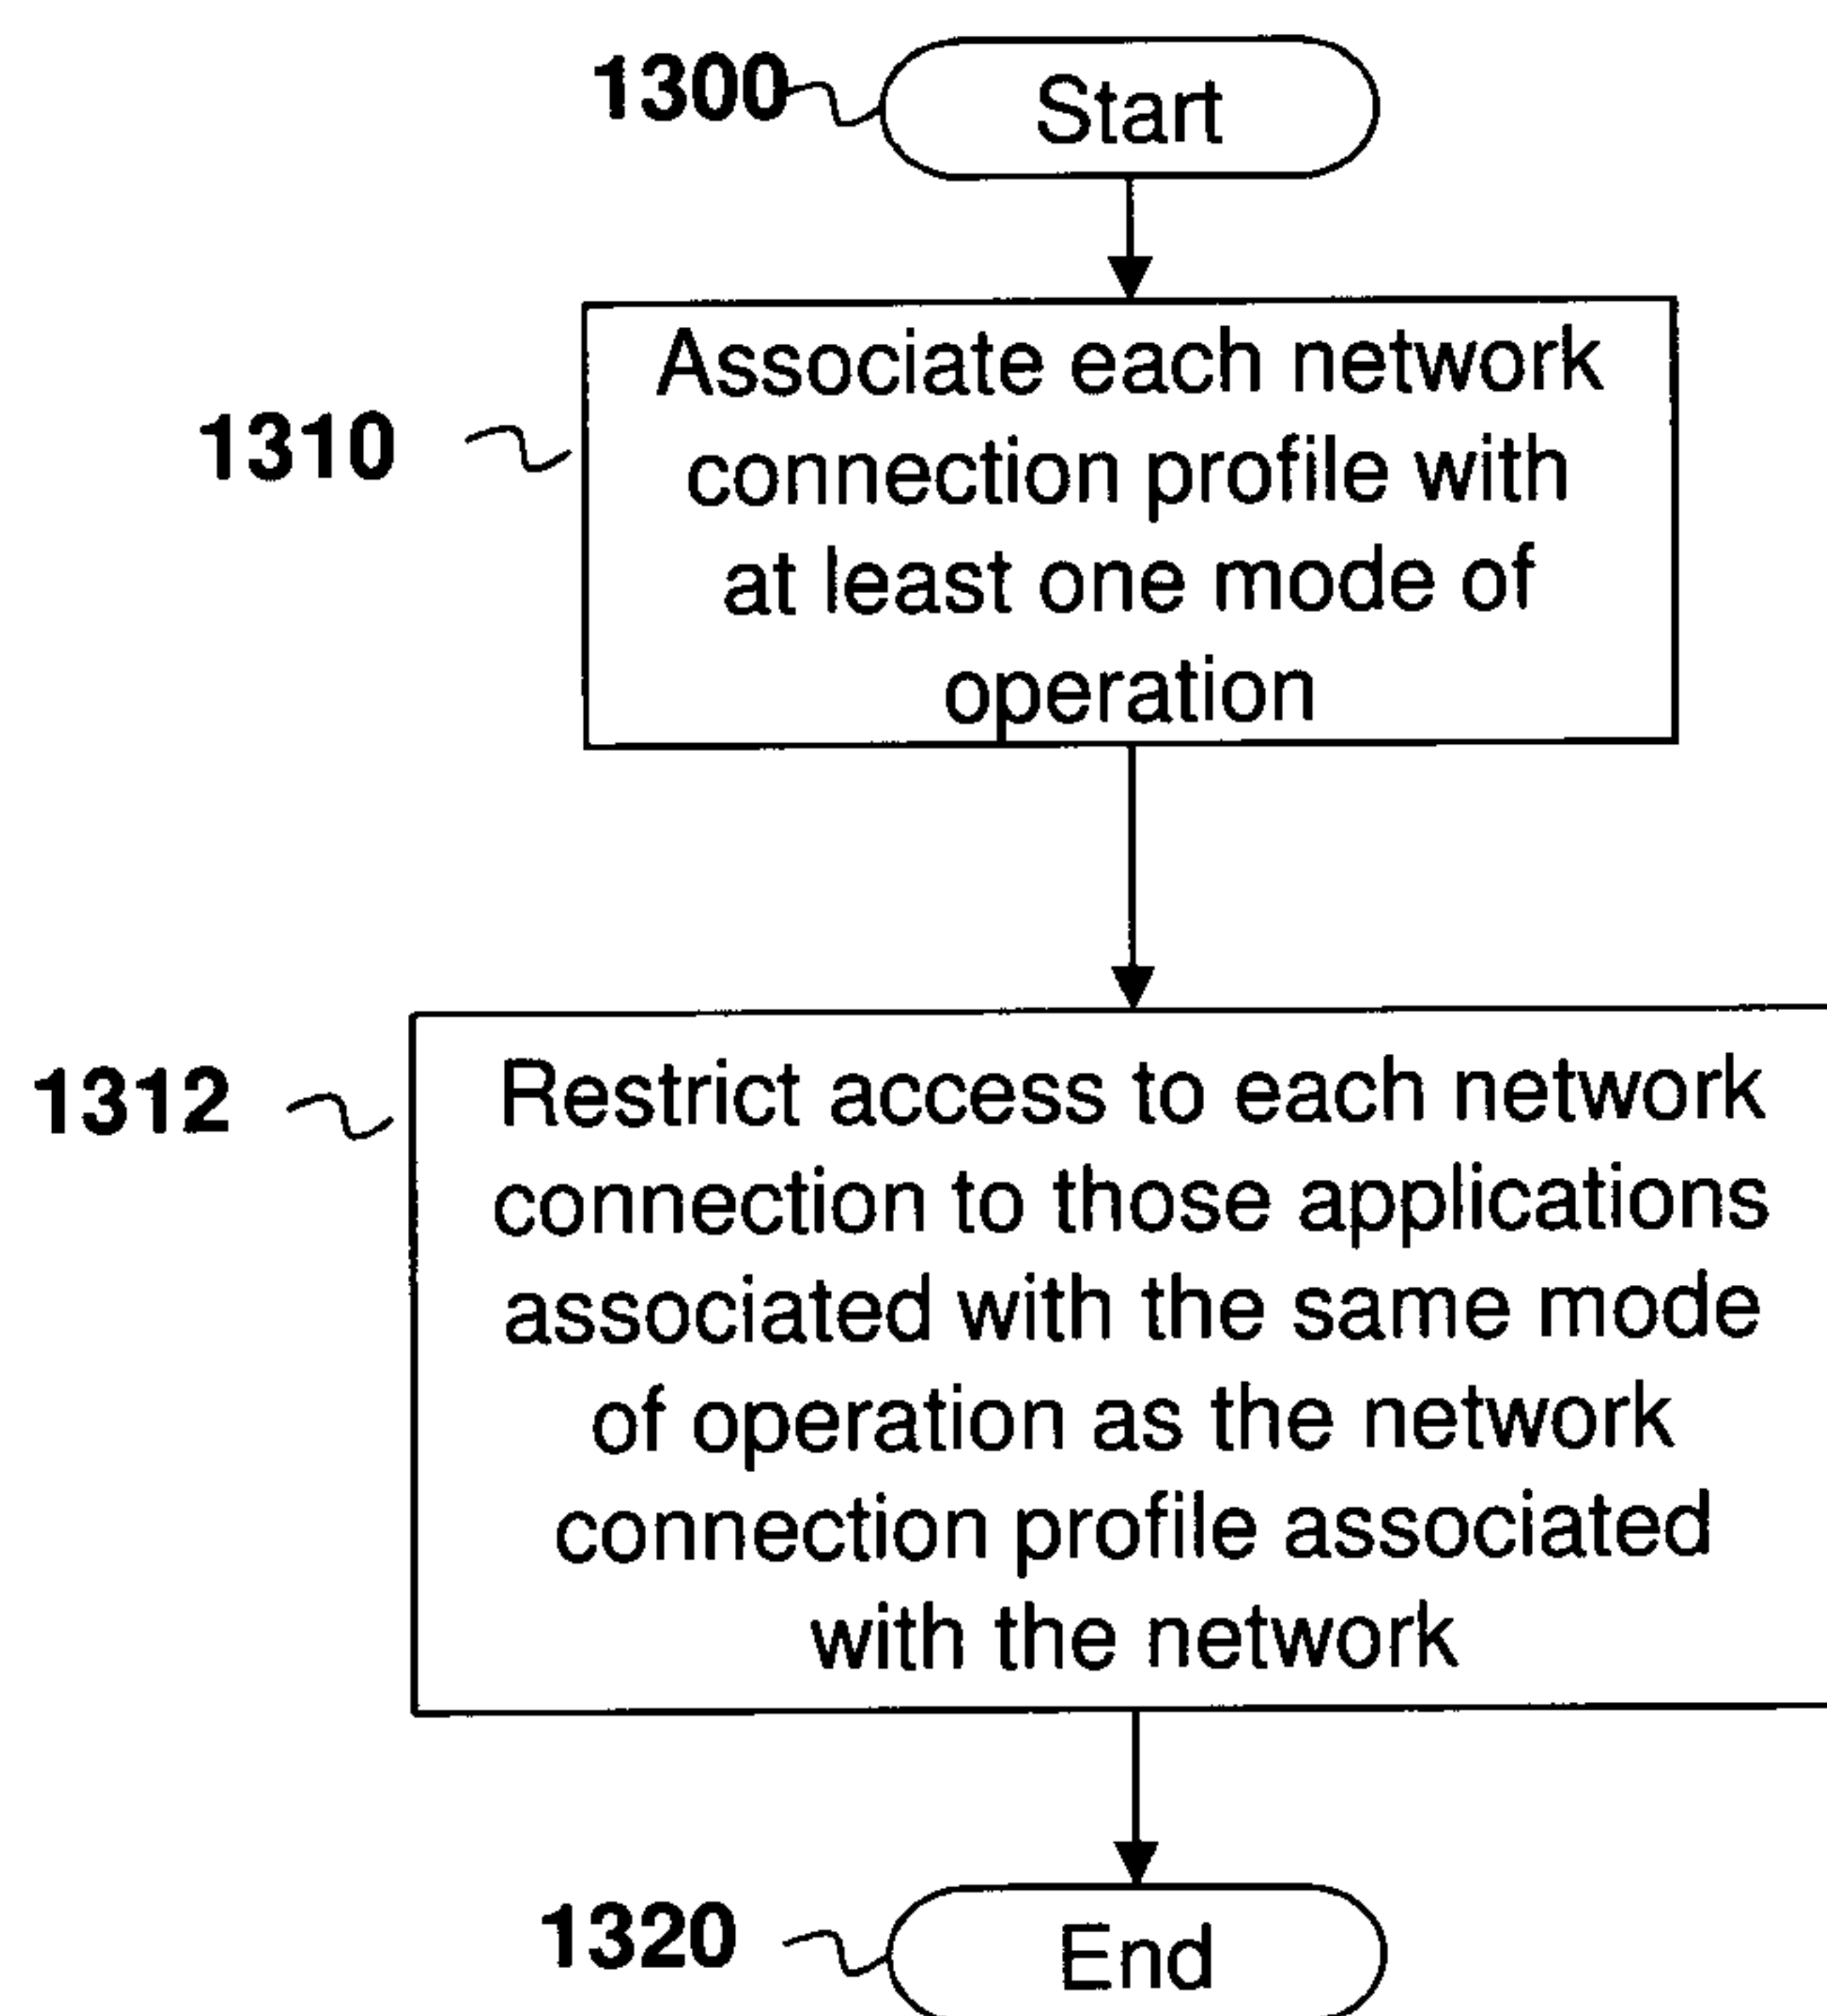


FIG. 13

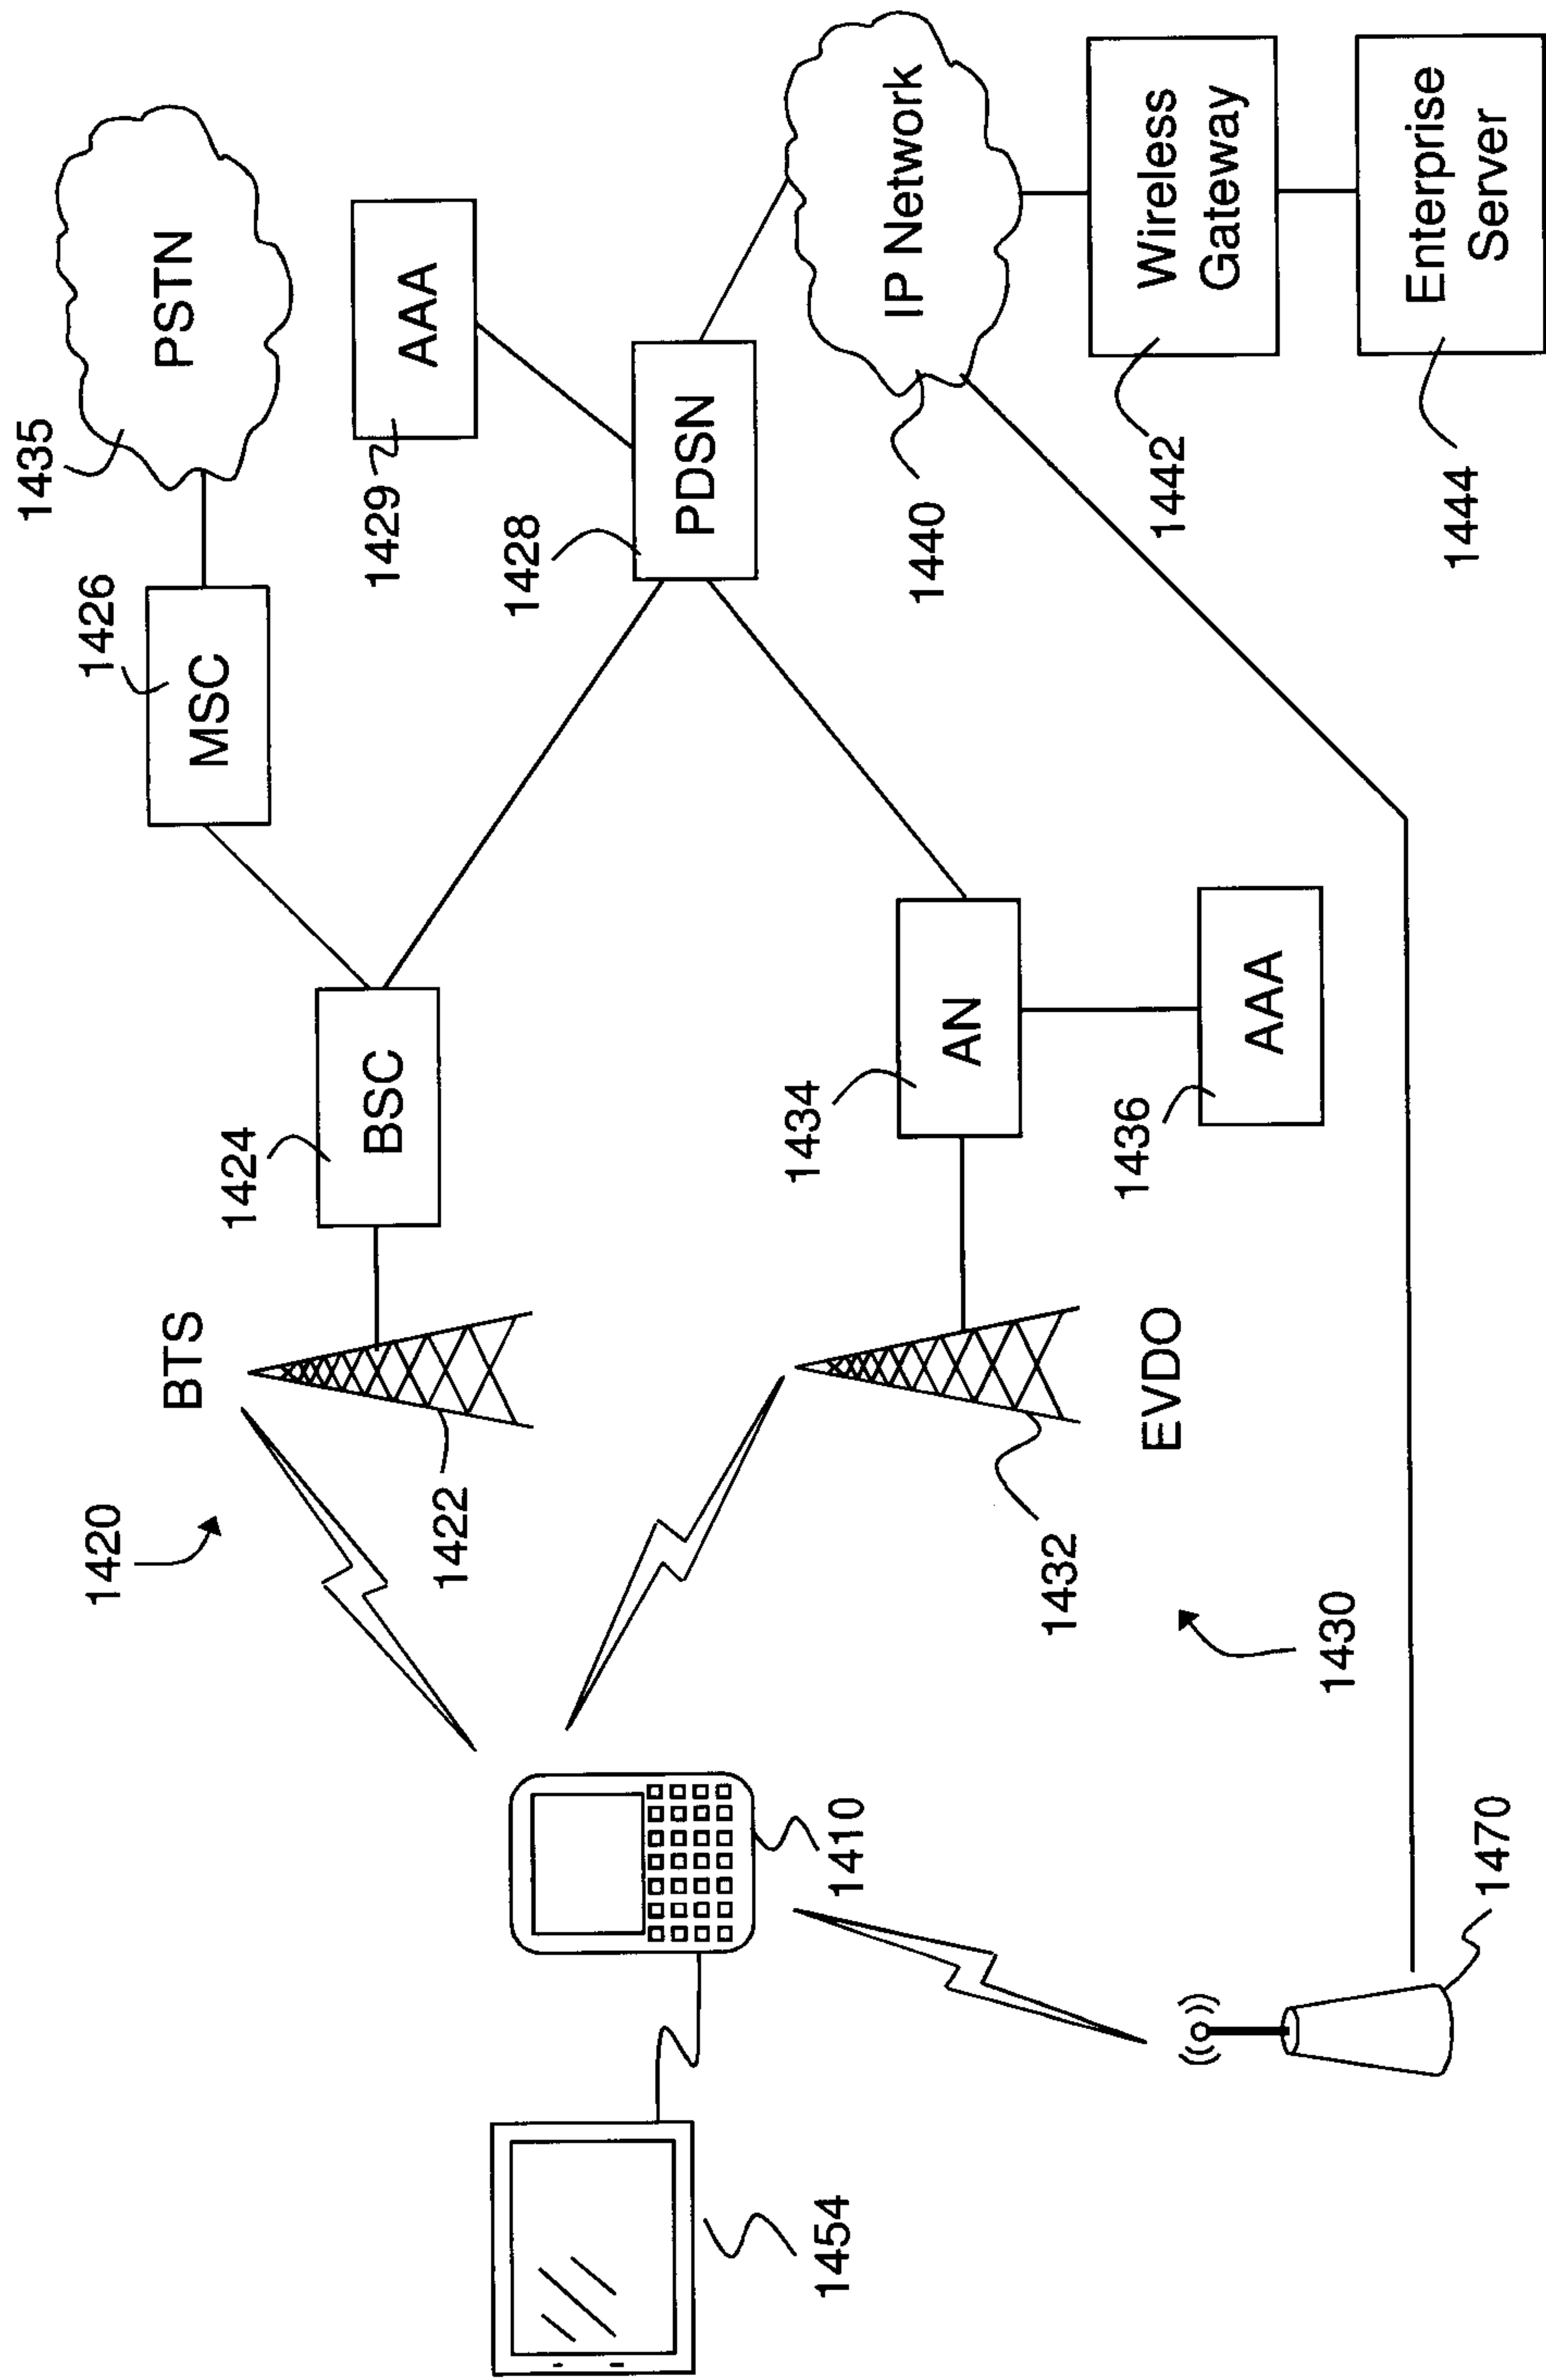


FIG. 14

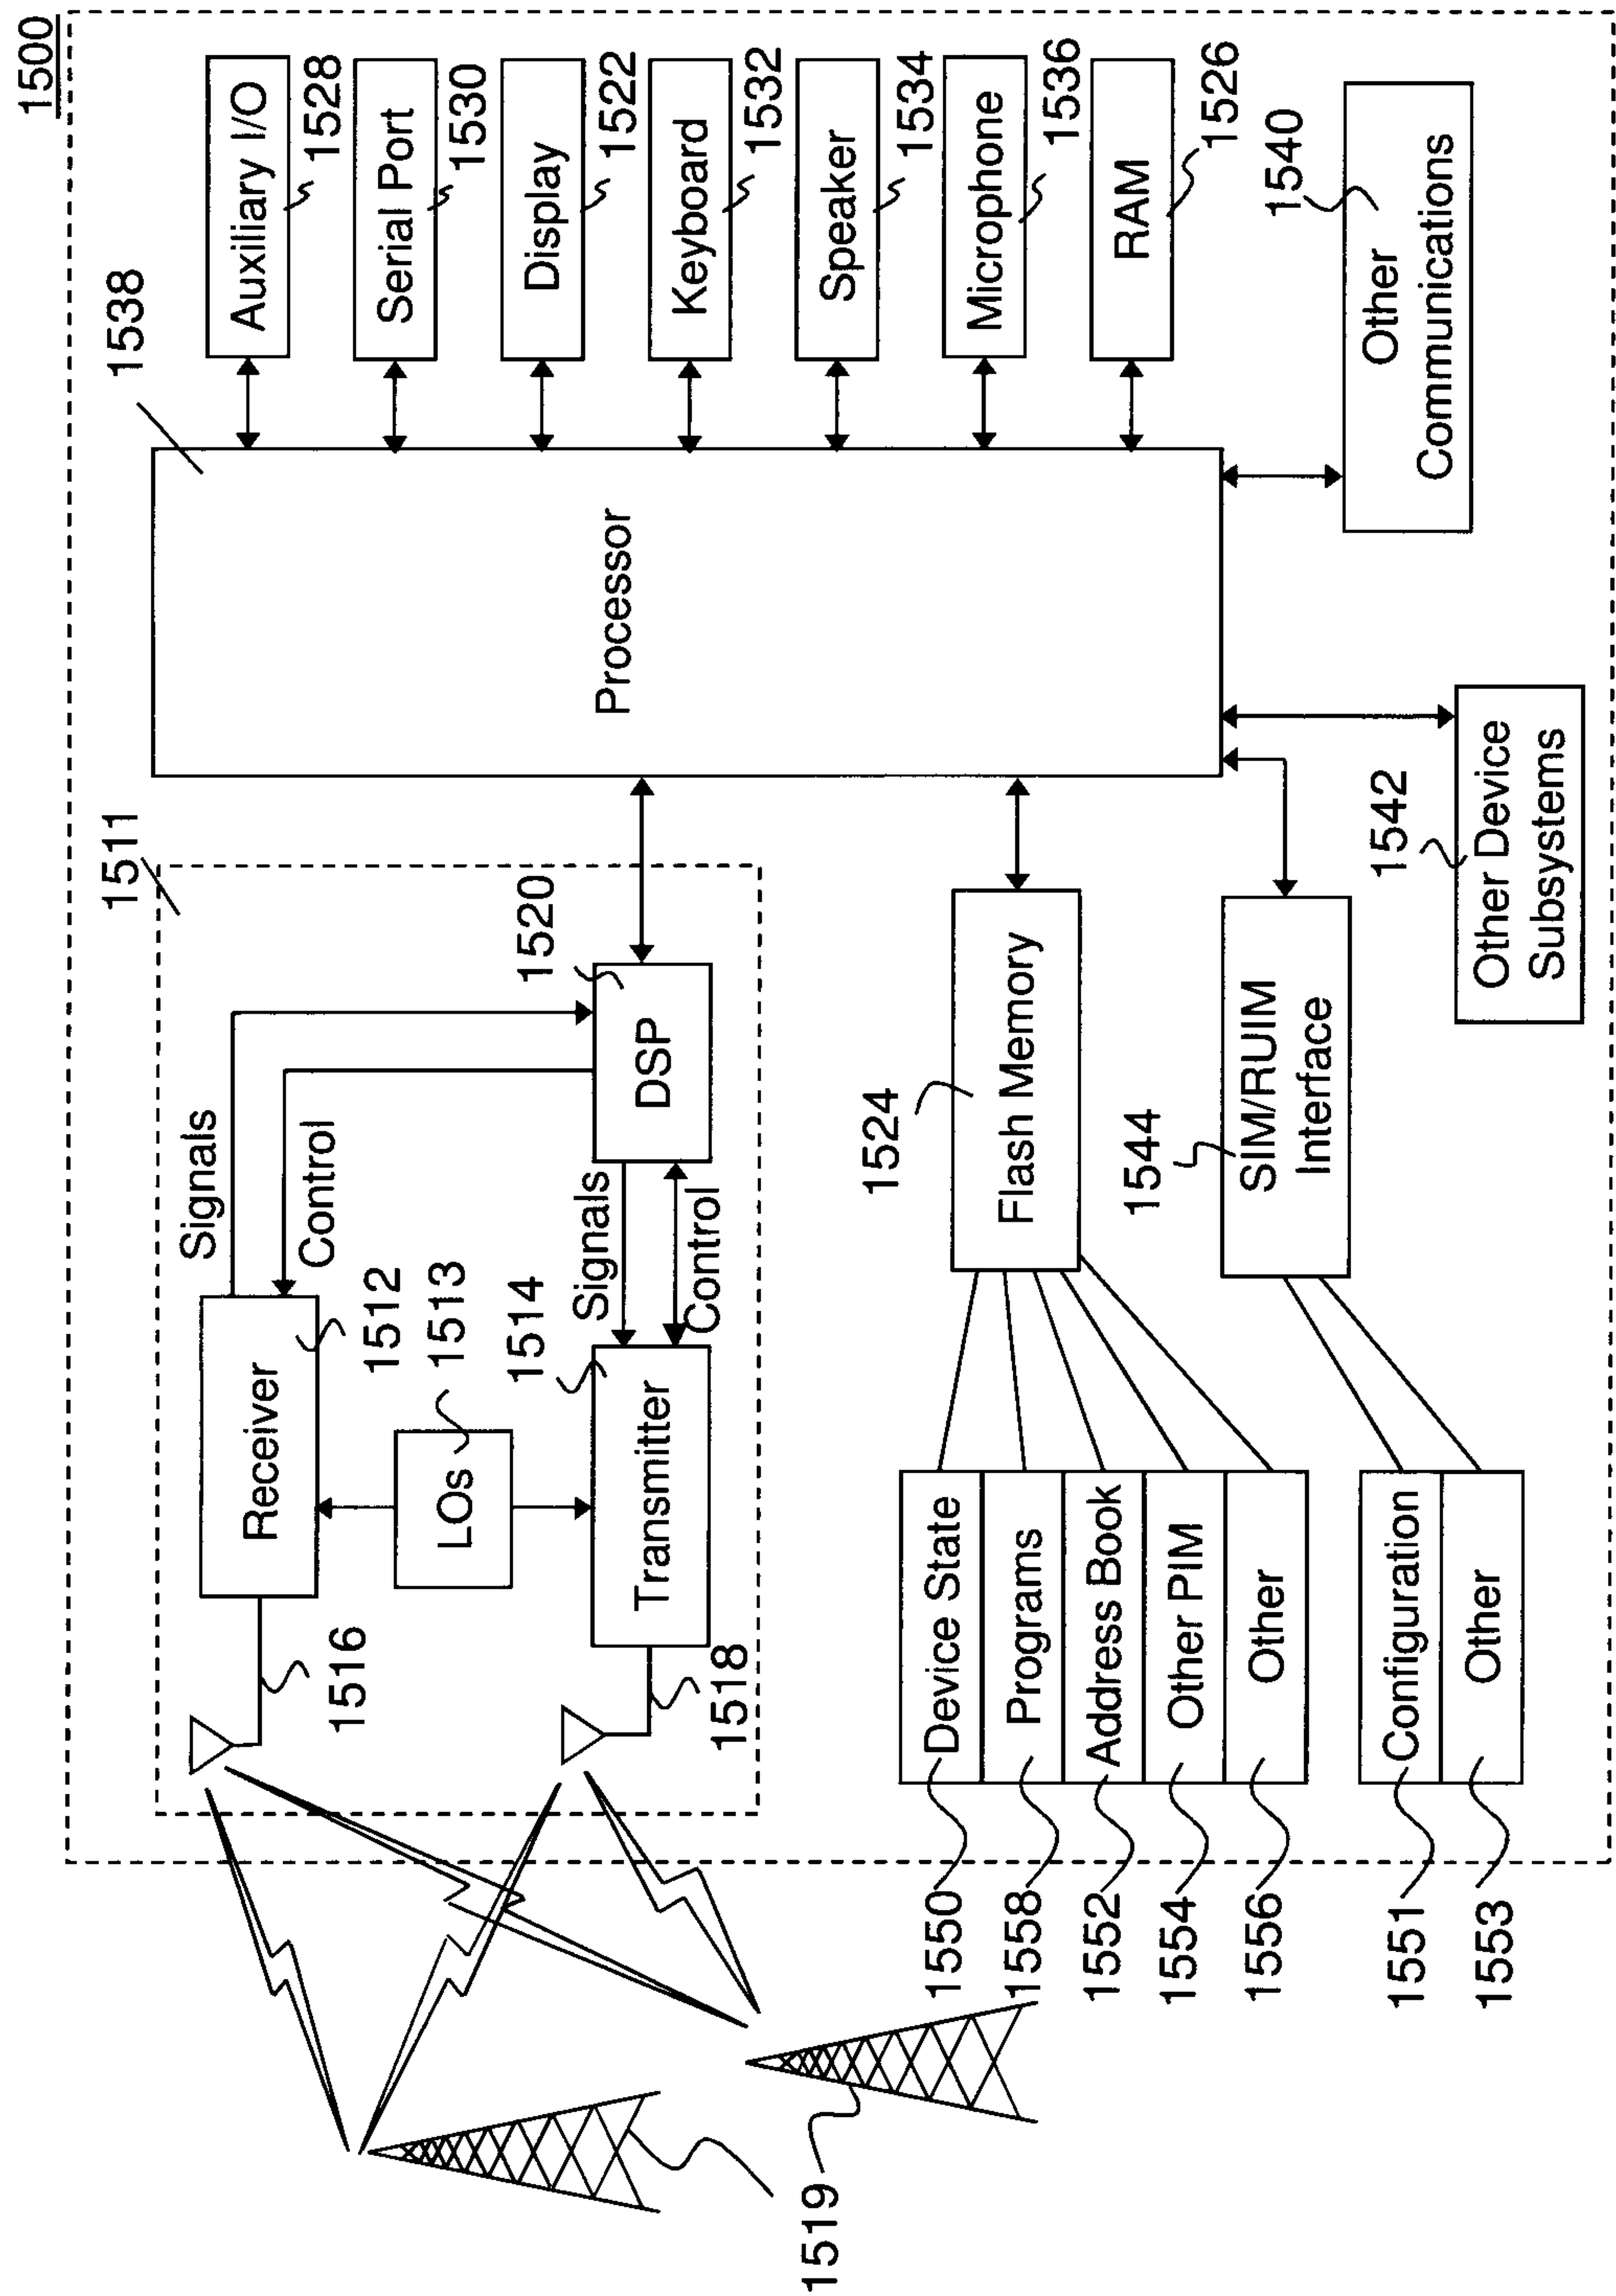


FIG. 15

