



- (51) International Patent Classification:
B62J 17/00 (2006.01) *B62K 5/01* (2013.01)
B62K 5/00 (2013.01) *B62K 5/027* (2013.01)
- (21) International Application Number: PCT/US2017/041135
- (22) International Filing Date: 07 July 2017 (07.07.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 15/205,601 08 July 2016 (08.07.2016) US
- (71) Applicant: POLARIS INDUSTRIES INC. [US/US];
2100 Highway 55, Medina, Minnesota 55340-9770 (US).
- (72) Inventors: LOVOLD, Ryan K.; 1012 6th Street S.E.,
Roseau, Minnesota 56751 (US). FISHER, Cameron; 1035
Magnolia Lane, Plymouth, Minnesota 55441 (US). HANE-
GRAAF, Thomas C.; 18466 Olson Street, Elk River, Min-
nesota 55330 (US).
- (74) Agent: GROEN, Eric J.; Faegre Baker Daniels LLP, 300
N. Meridian Street, Suite 2700, Indianapolis, Indiana 46204
(US).
- (81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: ALL-TERRAIN VEHICLE

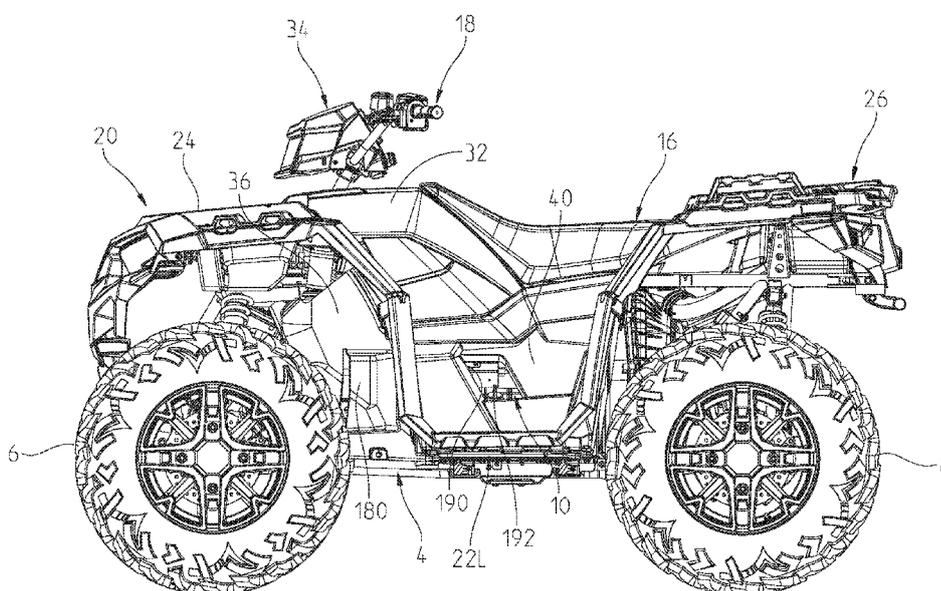


Fig. 3

(57) Abstract: An all-terrain vehicle (ATV) (2) has an air ventilation system positioned adjacent a rearmost point of the front ground engaging members and directing air rearwardly through an engine (200) compartment, wherein the air ventilation system includes at least one air scoop (180, 182) adjacent a front of the vehicle (2) for directing the air. In addition, an ATV (2) is disclosed having a rear rack (26) having an integral storage bin, where the storage bin is one piece with the rear rack (26). The storage bin is sealed.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

ALL-TERRAIN VEHICLE

[0001] The present disclosure generally relates to an all-terrain vehicle (ATV) and, more particularly, to an ATV having improved ergonomics and performance.

[0002] Generally, all-terrain vehicles (ATVs) are used to carry one or two passengers and a small amount of cargo over a variety of terrains. Due to increasing recreational interest in ATVs, specialty ATVs, such as those used for trail riding, racing, and cargo hauling have entered the market place. Most ATVs include an engine including between one and three cylinders. Most ATVs include a straddle or saddle type seat positioned above the engine. Examples of ATVs are disclosed in Patent Application Serial Number 14/208,921 filed on March 13, 2014; and/or in US Patents 8,122,993 and 8,215,694, the subject matter of which is incorporated herein by reference.

[0003] In one aspect, an all-terrain vehicle comprises a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; a transmission drivingly coupled to the engine and drivingly coupled to the front and rear wheels; an exhaust system including an exhaust pipe extending from the engine and rearwardly to a position adjacent a rear of the frame; a foot pedestal positioned on left and right sides of the frame for placement of the rider's feet; a body panel enclosing each lateral side of the frame above the foot pedestal and below the seat; and an air ventilation system positioned adjacent a rearmost point of the front wheel and directing air rearwardly through the engine compartment.

[0004] In another aspect, an all-terrain vehicle comprises a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; a transmission drivingly coupled to the engine and drivingly coupled to the front

and rear ground engaging members; a foot pedestal positioned on left and right sides of the frame for placement of the rider's feet; an air ventilation system positioned adjacent a rearmost point of the front ground engaging members and directing air rearwardly through the engine compartment, wherein the air ventilation system includes at least one air scoop adjacent a front of the vehicle for directing the air.

[0005] In another aspect, an all-terrain vehicle comprises a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; a rear rack positioned rearwardly of the straddle seat; and a storage bin integrally formed with the rear rack.

[0006] In another aspect, an all-terrain vehicle comprises a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; a rear rack positioned rearwardly of the straddle seat; a storage bin positioned within the rear rack; and a cover rotatably positioned over the storage bin, the cover conforming to the top surface of the rear rack and forming a load bearing surface.

[0007] In yet another aspect, an all-terrain vehicle comprises a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; a rear rack positioned rearwardly of the straddle seat; a storage bin positioned within the rear rack, the rear rack including a channel surrounding the storage bin; a seal positioned within the channel and surrounding the storage bin; and a

cover rotatably positioned over the storage bin and contacting the seal when in a closed position, the cover having overstress protection when loaded.

[0008] The invention will now be described with reference to the formal drawing figures, where:

[0009] FIG. 1 is a left front perspective view of the all-terrain vehicle of the present application;

[0010] FIG. 2 is a right rear perspective view of the all-terrain vehicle of FIG. 1;

[0011] FIG. 3 is a left side view of the all-terrain vehicle of FIG. 1;

[0012] FIG. 4 is a right side view of the all-terrain vehicle of FIG. 1;

[0013] FIG. 5 is a top view of the all-terrain vehicle of FIG. 1;

[0014] FIG. 6 is a front view of the all-terrain vehicle of FIG. 1;

[0015] FIG. 7 is a rear view of the all-terrain vehicle of FIG. 1;

[0016] FIG. 8 is a rear perspective view of the rear rack and storage compartment;

[0017] FIG. 9 is a cross-sectional view through lines 9-9 of FIG. 8;

[0018] FIG. 9A is an enlarged portion of FIG. 9;

[0019] FIG. 10 is a view similar to that of FIG. 8 shown in an exploded manner;

[0020] FIG. 11 shows an enlarged view of the hinge shown in FIG. 10;

[0021] FIG. 12 shows an enlarged view of the front of the vehicle with the suspension and front drive mechanism removed for clarity;

[0022] FIG. 13 is a cross-sectional view through lines 13-13 of FIG. 12;

- [0023]** FIG. 14 is a left perspective view of the air ventilation system;
- [0024]** FIG. 15 is a right perspective view of the air ventilation system;
- [0025]** FIG. 16 shows a rear perspective view of a portion of the right side panel;
- [0026]** FIG. 17 is an underside right front perspective view showing the right foot pedestal and side panel in an exploded manner;
- [0027]** FIG. 18 shows a perspective view of the left foot pedestal; and
- [0028]** FIG. 19 shows an exploded view of the tie-downs positioned in the rear rack.
- [0029]** Corresponding reference characters indicate corresponding parts throughout the several views. Unless stated otherwise the drawings are proportional. The embodiments disclosed below are not intended to be exhaustive or to limit the invention to the precise forms disclosed in the following detailed description. Rather, the embodiments are chosen and described so that others skilled in the art may utilize their teachings. While the present disclosure is primarily directed to an ATV, it should be understood that the features disclosed herein may have application to other types of vehicles such as utility vehicles, motorcycles, watercraft, snowmobiles, people movers, and golf carts.
- [0030]** With reference first to FIGS. 1-7, a vehicle 2 is shown as an all-terrain-vehicle (ATV) including a frame 4 (FIG. 3) coupled to and supported by front wheels 6 and rear wheels 8. Front wheels 6 comprise tires 6a and rims 6b. Rear wheels 8 comprise tires 8a and rims 8b. ATV generally includes a power train shown at 10 (FIG. 3), which will be described in further detail herein. Front wheels 6 are coupled to frame 4 by way of a front suspension 12 (FIG. 6), and rear wheels 8 are coupled to frame 4 by way of a rear suspension 14 (FIG. 7). ATV further includes a seat assembly 16, which as shown in FIGS. 1 and 2 is for a single rider, but ATV 2 could be modified to incorporate two riders as described in US Patent 8,678,464 or 8,430,442, the subject

matter of which is incorporated herein by reference. ATV 2 also includes a steering assembly 18 for steering at least the front wheels 6 as is known in the art. Steering assembly 18 could be similar to that described in US Patent 8,122,993, the subject matter of which is incorporated herein by reference.

[0031] ATV 2 also includes an outer body 20, generally formed of a plastic material. Outer body 20 may include at least foot pedestals 22 for placement of a rider's feet while riding, where a left foot pedestal is referred to as 22L and a right foot pedestal is referred to as 22R. A front rack 24 is provided forward of steering assembly 18 and a rear rack 26 is provided rearward of seat 16. It should be appreciated that front rack 24 could include a plurality of tie downs and/or could include a moveable portion such as a hood to expose a storage cavity for storing items while riding.

[0032] It should also be appreciated that rear rack 26 could include integrated tie down portions such as those described in U.S. Patent 8,905,435, the subject matter of which is incorporated herein by reference. Front and or rear rack could also include apertures 28 for receiving an expansion member similar to that shown and/or described in U.S. Patent No. 8,267,034, the subject matter of which is incorporated herein by reference. Outer body 20 may also include front fascia 30, front fairing 32, light pod 34, left inner-panel 36, right inner-panel 38 (FIG. 4), left side-panel 40, right side-panel 42, and fender body panels 44.

[0033] With reference now to FIGS. 8-11, rear rack 26 will be described in greater detail. With reference first to FIG. 8, rear rack 26 includes an integrated storage compartment or bin shown generally at 50 which includes an integral storage well 52 and a rotatable cover 54. As shown best in FIG. 9, well 52 is integrated with the rear rack 26, that is, well 52 is formed from a unitary construction such as from a plastic material integrally molded with the rear rack. As shown, storage compartment 50 is provided such that rear rack 26 defines an

indentation at 56 which defines sidewalls 58 and a lower wall 60. Lower wall 60 is then integral with sidewalls 62 and 64 which merge into sidewalls 66 and 68 and lower surface 70 of well 52. As shown best in FIGS. 8 and 9A, wall 60 includes two ribs 80 and 82 which define a channel 84 which circumscribes the well 52. An O-ring seal 90 is positioned in the channel 84 and surrounds the well 52 as best shown in FIG. 8.

[0034] With reference to FIGS. 8-9A, cover 54 will be described in greater detail. As shown best in FIG. 9, top cover 54 includes a top surface 94 which generally conforms with a top surface 96 of the rear rack 26. Cover 54 includes sidewalls 100 which extend into the indentation 56 such that the cover rotates into the indentation when the cover is closed. Cover 54 rotates about rear rack 26 through a hinge assembly 102 as described in greater detail herein. As shown best in FIG. 8, cover 54 conforms to the indentation 56 and includes wall portions 100, 104, rear wall portions 106, and wall portions 108 and 110 which define an extension at 112. Extension 112 includes a latch component at 114 which corresponds to a latch portion 116 located in the indentation 56.

[0035] It should be appreciated that each of the wall portions 100, 104, 106, 108 and 110 rotate into the indentation 56 upon closure of the cover 54. More particularly, rib 80 defines indentation portions such that cover wall portions rotate into the indentation, namely sidewalls 100 rotate into indentation portion 56a, wall portions 106 rotate into indentation portion 56b, wall portions 104 rotate into indentation portion 56c, and extension 112 rotates into indentation portion 56d.

[0036] As shown best in FIG. 8, an underside of cover 54 includes a plurality of rigidifying ribs, namely an outer rib 120 and an inner rib 122. Outer rib 120 extends in a circular fashion around and inside of cover 54 and inner rib 122 is generally parallel with rib 120 adjacent a perimeter of the cover 54. Cover 54 also includes a plurality of longitudinally extending ribs 126 and a plurality of cross ribs 128 to rigidify cover 54. As shown best in FIG. 9A, outer rib 120 is profiled to be centered on channel 84 and therefore when cover 54 is in a closed position, rib 120 extends downwardly into O-ring

90 forming a sealed connection for the well portion 52. In addition, cover 54 has an overstress protection to prevent damaging hinge 102. That is, walls 100, 104, 108 and 110 include tabs 130 which define standoffs to define a maximum amount of deflection of cover 54 relative to rear rack 26. That is, as cover 54 forms a weight-bearing portion of the rear rack 26, cover 54 is defined with a minimum amount of deflection defined by a distance "Y" as shown in FIG. 9A. That is, cover 54 would deflect downwardly due to weight placed upon the top of the cover 54, under the resilient deflection between rib 120 and O-ring 92, until tab 130 contacts surface 56e of indentation of 56.

[0037] With reference now to FIGS. 10 and 11, hinge 102 will be described in greater detail. As shown, wall 106 of cover 54 includes flanges 150 and post 152 extends upwardly and rearwardly from surface 56e as best shown in FIG. 11. Latch assembly 102 further includes an interference post 154 having a slot 156 having interfering walls 158. Latch assembly 102 further includes an L-shaped pin 160 having a first portion 160a receivable through flanges 150 and post 152 and a second portion 160b which may be moved in the direction of the arrow in FIG. 11 to be received in interference fit with walls 158.

[0038] Finally, a lanyard 170 is provided to define an extreme open position where lanyard 170 may be coupled to a first position 172 within well 52 and a second position 174 on a backside of cover 54. Lanyard may be attached by way of fasteners such as 176.

[0039] From the above disclosure it should be apparent that the storage bin is integrally formed with the rear rack. Also, the cover conforms to the top surface of the rear rack and forms a load bearing surface, that is surface 94 conforms to surface 96, as best shown in FIGS. 9 and 9A. Also, the rear rack 26 includes a channel 84 surrounding the storage bin and a seal is positioned within the channel and surrounds the storage bin. The cover 54 is rotatably positioned over the storage bin and contacting the seal 90 when in a closed position.

[0040] As disclosed herein, the rear rack 26 is formed with an indentation 56 and the cover 54 fits within the indentation. The cover 54 is movable downwardly to a position where a portion of the cover contacts a floor 60 of the indentation. The portion contacting the floor comprises standoff tabs 130.

[0041] With reference now to FIGS. 12-18, an air cooling/ventilation system of the vehicle will be described. With reference first to FIGS. 1 and 4, front panel 36 is shown positioned directly in front of and adjacent a rear wall of left foot-pedestal 22L whereas front panel 38 is shown positioned directly in front of and adjacent a rear wall of right foot-pedestal 22R. As shown, front panel 36 defines an air scoop 180 and front panel 38 defines an air scoop 182. As shown best in FIG. 14, left panel 36 is shown with air scoop 180 facing forwardly where panel 36 is positioned in front of a front wall 186 of left foot-pedestal 22L. Panel 36 is coupled to a lower frame portion 188 and an upper frame portion 190 by way of fasteners 192 as is known in the art. With reference to FIG. 15, panel 38 is shown with air scoop 182 facing forwardly and positioned directly in front of right foot-pedestal 22R. Panel 38 is coupled to the frame portions 188 and 190 by way of fasteners 192.

[0042] As shown in FIGS. 3 and 4, side panels 40 and 42 of foot-pedestals 22L and 22R, respectively are substantially closed off from the engine compartment with the exception of a small trapezoidally-shaped opening 190 in the left panel 40 to provide access to the engine oil dipstick 192 as shown in FIG. 3. As shown in FIG. 4, panel 42 is substantially closed off from the engine. The closing off of the side panels 40 and 42 provides a cleaner atmosphere for the rider such that mud and debris does not kick up from the front tires and land on the foot-pedestals or on to the rider. However the closing off the side panels prevents heat from the engine from dissipating outwardly and thus the air scoops provide a cooling effect for the engine and remaining power training components. As shown best in FIG. 13, the cross-sectional view shows the air flow pattern in greater detail.

[0043] As shown, powertrain 10 includes an engine 200 and a vehicle component 202 positioned forwardly of the engine 200. In the embodiment shown, the vehicle

component 202 is a fuel tank. The location of the fuel tank 202 creates an air dam at the front of the vehicle causing the airflow to be redirected to either a right side or left side of the fuel tank 202. It should be understood that the vehicle component could be other than a fuel tank, for example, the vehicle component could be a storage compartment, and the fuel tank could be placed elsewhere. Air scoops 180 and 182 pickup that airflow and redirect it through air channels into an inside of the engine compartment and on a backside of the side panels 40 and 42 and on either side of the engine 200 as shown in FIG. 13. Engine 200 is coupled to an exhaust system 204 such that the airflow through air scoops 180 and 182 moves rearwardly through the vehicle and also cools the exhaust 204.

[0044] With reference to FIGS. 17 and 18, the foot-pedestals 22R and 22L will be described in greater detail. With reference first to FIG. 17, the panel portion 42 of right pedestal 22R is defined by the rear wall 210 of the foot-pedestal 22R together with panel portions 212 and 214. Panel portion 212 includes lower tabs 216 which couple with a channel 218 in right foot pedestal 22R and by way of fasteners 220. Meanwhile panel portion 214 is coupled to panel portion 212 by way of fasteners 226. The two panel portions 212 and 214 coupled to side wall 210 of foot-pedestal 22R encloses a side of the foot well as shown best in FIG. 16. Foot pedestal 22L is shown in FIG. 18 where aperture 190 is integrally formed in the panel portion 40 of foot-pedestal 22L.

[0045] Thus, from the above disclosure, it should be apparent that the air ventilation system includes at least one air scoop adjacent a front of the vehicle for directing the air rearward to cool the engine compartment. While two air scoops are shown, it is conceivable that the all-terrain vehicle has at least one air scoop. As shown in FIG. 13, the air scoops 180, 182 are longitudinally positioned adjacent a rearwardmost position of the front wheels 6. In addition, the right and left air scoops 180, 182 are positioned laterally inward of an inwardmost position of the front ground engaging members. Furthermore, the frame includes upper and lower frame rails and the right and left air scoops 180, 182 are positioned vertically intermediate the upper and lower frame rails.

Finally, the right and left air scoops 180, 182 are positioned laterally outward of the body panels 40, 42.

[0046] As disclosed, the all-terrain vehicle 2 further includes a vehicle component forward of the engine forming an air dam, where the right and left air scoops 180, 182 are positioned laterally outward of the outward most position of the vehicle component. As disclosed, the vehicle component is a fuel tank 202. Furthermore, the side panels 40, 42 (with air scoops 180, 182) are cooler than when the side panels were left open (with no air scoops). It has been shown that the temperature drop is roughly 15-20% or about 20° F cooler.

[0047] With reference now to FIG. 19, integrated tie-downs will be described, and will be referred to generally as 230. As shown in FIG. 19, a rack frame is shown at 232, coupled to the upper frame rails 234 by way of upstanding gussets 236. Rack frame 232 includes generally longitudinally extending portions 240 (only one of which can be viewed in FIG. 19), and a horizontally extending portion 242. Tie-down bars 250 and 252 are coupled directly to the rack frame 232 such as by welding.

[0048] As shown, fender body panel 44 includes a rear panel 254 having a side wall 256 along a marginal edge of the fender body panel 44. Wall 254 includes upstanding perimetral wall 260 encircling an opening 262. Wall 260 includes a relief portion 264 and wall 256 includes a relief section 266. It should be appreciated that wall 256 sits flush against rear rack frame 232, such that tie-down bars protrude upwardly through the openings 262. As also shown, rear rack 26 includes a side marginal edge 270 having upstanding pockets 272. Pockets 272 define openings 274 and relief areas 276.

[0049] When the rack 26 is positioned over the fender body panel 44, the tie-down bars fit within the pockets 272, adjacent the relief areas 276, so as to not obstruct the openings 274. Thus, a tie-down strap can be positioned through

the opening 274, or through the relief area 276 such that a hook on the tie-down strap catches the tie-down bars 250. In this manner, tension is placed on the frame of the vehicle, not on the plastic body panels such as the fender panel 44 or rack 26.

[0050] In a similar manner, the rear rack 26 includes a rear marginal edge 280 having apertures 282 which overlie the tie-down bars 252 for receiving tie-down straps through apertures 282.

[0051] With reference still to FIG. 19, rack extenders are shown at 290 which couple over the top of the pockets 272, which act to provide additional tie-down points and to provide additional apertures 28, for the purpose discussed previously. Rack extender 290 is coupled to the rear rack 26 by way of fasteners 294 through apertures 296 of rack extenders 290; through apertures 298 of rear rack 26; through apertures 300 of fender body panel 44; and into threaded apertures 302 of rear frame 232. Additional fasteners 310 extend through apertures 312 of fender body panel 44; through apertures 314 and into threaded apertures 316.

[0052] While this invention has been described as having an exemplary design, the present invention may be further modified within the spirit and scope of this disclosure. This application is therefore intended to cover any variations, uses, or adaptations of the invention using its general principles. Further, this application is intended to cover such departures from the present disclosure as come within known or customary practice in the art to which this invention pertains.

CLAIMS

1. An all-terrain vehicle, comprising a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; a transmission drivingly coupled to the engine and drivingly coupled to the front and rear ground engaging members; a foot pedestal positioned on left and right sides of the frame for placement of the rider's feet; characterized in that a body panel substantially encloses each lateral side of the frame above the foot pedestals and below the seat; and in that an air ventilation system is positioned adjacent a rearmost point of the front ground engaging members and directing air rearwardly through the engine compartment and inward of the left and right foot pedestals.
2. The all-terrain vehicle of claim 1, characterized in that at least a portion of the body panels are integrated with the foot pedestals.
3. The all-terrain vehicle of claim 1 or 2, characterized in that the air ventilation system includes at least one air scoop adjacent a front of the vehicle for directing the air.
4. The all-terrain vehicle of any one of claims 1-3, characterized in that the at least one air scoop comprises right and left air scoops positioned adjacent an inwardmost lateral position of the front ground engaging members.
5. The all-terrain vehicle of claim 4, characterized in that the frame includes upper and lower frame rails and the right and left air scoops are positioned vertically intermediate the upper and lower frame rails.
6. The all-terrain vehicle of claim 4 or 5, characterized in that the right and left air scoops are positioned laterally inward of an inwardmost position of the front ground engaging members.

7. The all-terrain vehicle of claim 6, further comprising a vehicle component forward of the engine forming an air dam, the right and left air scoops are positioned laterally outward of the outward most position of the vehicle component.
8. The all-terrain vehicle of claim 7, characterized in that the right and left air scoops are positioned laterally outward of the body panels.
9. The all-terrain vehicle of claim 7 or 8, characterized in that the vehicle component is a fuel tank.
10. The all-terrain vehicle of any one of claims 1-9, further comprising an exhaust system including an exhaust pipe extending from the engine and rearwardly to a position adjacent a rear of the frame.
11. An all-terrain vehicle, comprising a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; a transmission drivingly coupled to the engine and drivingly coupled to the front and rear ground engaging members; a foot pedestal positioned on left and right sides of the frame for placement of the rider's feet; characterized by an air ventilation system positioned adjacent a rearmost point of the front ground engaging members and directing air rearwardly through the engine compartment, wherein the air ventilation system includes at least one air scoop adjacent a front of the vehicle for directing the air.
12. The all-terrain vehicle of claim 11, characterized in that a body panel substantially encloses each lateral side of the frame above the foot pedestals and below the seat.
13. The all-terrain vehicle of claim 12, characterized in that the air ventilation system directs the air inward of the left and right foot pedestals.

14. The all-terrain vehicle of any one of claims 11-13, characterized in that the at least one air scoop comprises right and left air scoops positioned adjacent an inwardmost lateral position of the front ground engaging members.
15. The all-terrain vehicle of any one of claims 11-14, characterized in that the frame includes upper and lower frame rails and the right and left air scoops are positioned vertically intermediate the upper and lower frame rails.
16. The all-terrain vehicle of any one of claims 11-15, characterized in that the right and left air scoops are positioned laterally inward of an inwardmost position of the front ground engaging members.
17. The all-terrain vehicle of any one of claims 11-16, further comprising a vehicle component forward of the engine forming an air dam, the right and left air scoops are positioned laterally outward of the outward most position of the vehicle component.
18. The all-terrain vehicle of claim 17, characterized in that the right and left air scoops are positioned laterally outward of the body panels.
19. The all-terrain vehicle of claim 17 or 18, characterized in that the vehicle component is a fuel tank.
20. The all-terrain vehicle of any one of claims 11-19, further comprising an exhaust system including an exhaust pipe extending from the engine and rearwardly to a position adjacent a rear of the frame.
21. An all-terrain vehicle, comprising a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; and a rear rack positioned rearwardly of the straddle seat; characterized in that a storage bin is integrally formed with the rear rack.
22. The ATV of claim 21, characterized in that the rear rack and storage bin are comprised of a unitary molded piece.

23. The ATV of claim 21 or 22, further comprising a cover rotatably positioned over the storage bin, the cover conforming to a top surface of the rear rack and forming a load bearing surface.
24. The ATV of claim 23, characterized in that the rear rack is formed with an indentation and the cover fits within the indentation.
25. The ATV of claim 24, characterized in that the cover is movable downwardly to a position where a portion of the cover contacts a floor of the indentation.
26. The ATV of claim 25, characterized in that the portion contacting the floor comprises standoff tabs.
27. The ATV of any one of claims 21-26, characterized in that the rear rack including a channel surrounding the storage bin; a seal is positioned within the channel and surrounds the storage bin; and a cover is rotatably positioned over the storage bin and contacts the seal when in a closed position.
28. The ATV of claim 27, characterized in that the cover includes a rib extending downwardly from inside surface of the cover and contacts the seal when in the closed position.
29. The ATV of claim 28, characterized in that the seal is an O-ring seal.
30. An all-terrain vehicle, comprising a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; a rear rack positioned rearwardly of the straddle seat; a storage bin positioned within the rear rack; and a cover rotatably positioned over the storage bin, characterized in that the cover conforms to the top surface of the rear rack and forms a load bearing surface.
31. The ATV of claim 30, characterized in that the rear rack is formed with an indentation and the cover fits within the indentation.

32. The ATV of claim 31, characterized in that the cover is movable downwardly to a position where a portion of the cover contacts a floor of the indentation.

33. The ATV of claim 32, characterized in that the portion contacting the floor comprises standoff tabs.

34. The ATV of claim 32 or 33, characterized in that one of the rear rack and cover includes a channel surrounding the storage bin; a seal is positioned within the channel and surrounds the storage bin; and a cover is rotatably positioned over the storage bin and is movable between an open and a closed position. contacts the seal when

35. The ATV of claim 34, characterized in that the other of the rear rack and cover includes a rib extending in a like profile as the channel and contacts the seal when in the closed position.

36. The ATV of claim 35, characterized in that the rear rack includes the channel and the cover includes the rib extending downwardly therefrom and contacts the seal when in the closed position.

37. The ATV of claim 35 or 36, characterized in that the seal is an O-ring seal.

38. The ATV of any of claims 30-37, characterized in that the rear rack and storage bin are comprised of a unitary molded piece.

39. An all-terrain vehicle, comprising a longitudinally extending frame; front and rear ground engaging members coupled to and supporting the frame; a straddle seat coupled to the frame for supporting at least one rider; an engine positioned under the seat and coupled to the frame; a rear rack positioned rearwardly of the straddle seat; a storage bin positioned within the rear rack; a channel surrounding the storage bin; a seal positioned within the channel and surrounding the storage bin; and a cover rotatably positioned over the storage bin and contacting the seal when in a closed position, characterized in that the cover having overstress protection when loaded.

40. The ATV of claim 39, characterized in that the cover includes a rib extending downwardly from an inside surface of the cover and contacts the seal when in the closed position.

41. The ATV of claim 40, characterized in that the seal is an O-ring seal.

42. The ATV of claim 39 or 40, characterized in that the cover conforms to the top surface of the rear rack and forms a load bearing surface.

43. The ATV of claim 42, characterized in that the rear rack is formed with an indentation and the cover fits within the indentation.

44. The ATV of claim 43, characterized in that the cover, when in a closed position, is movable downwardly to a position where a portion of the cover contacts a floor of the indentation.

45. The ATV of claim 44, characterized in that the overstress protection comprises standoff tabs for contacting the floor.

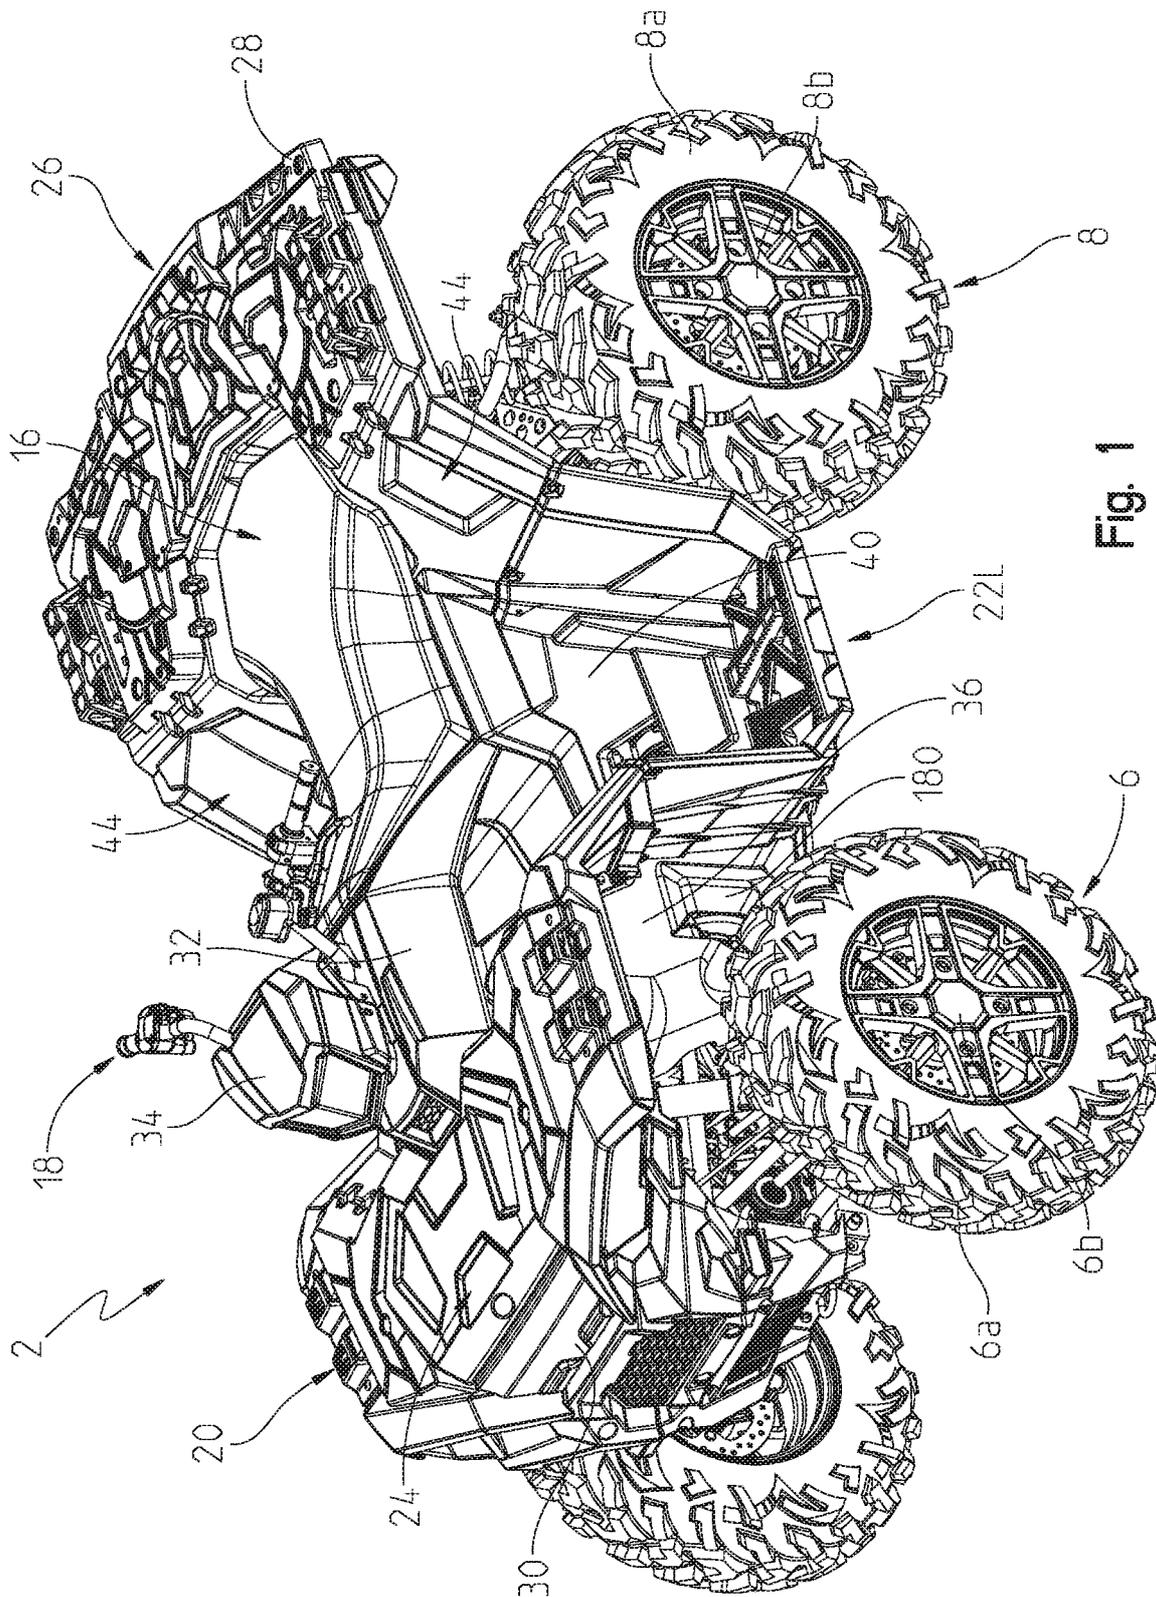


Fig. 1

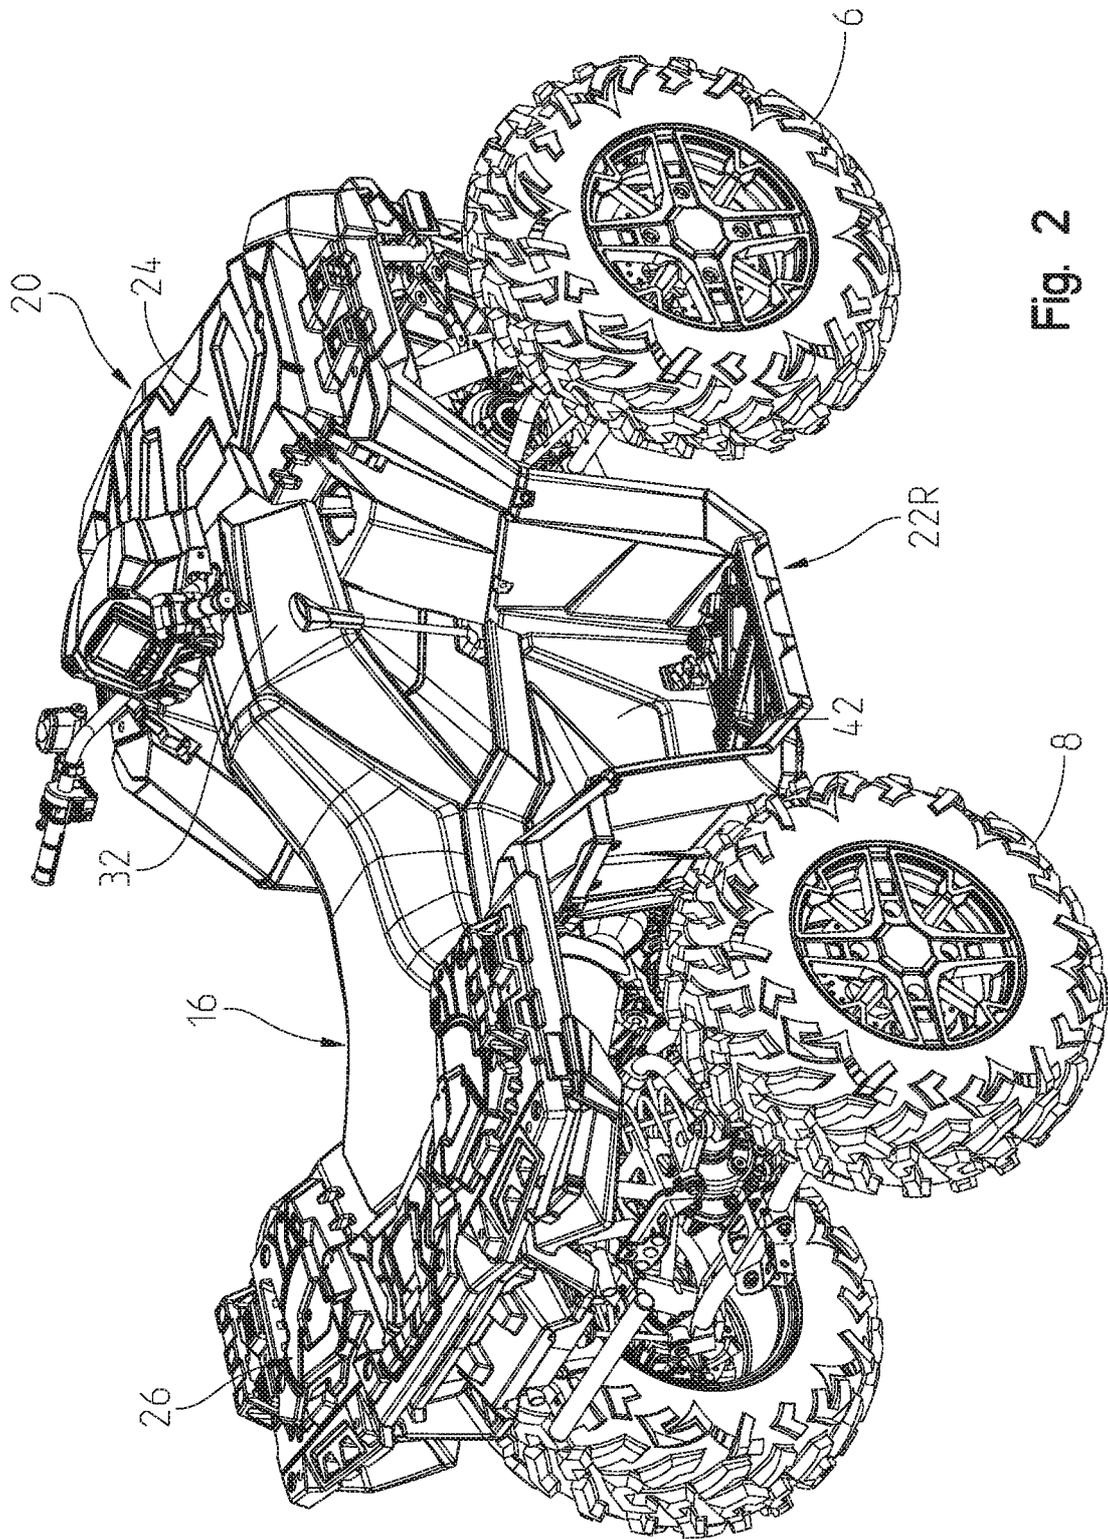


Fig. 2

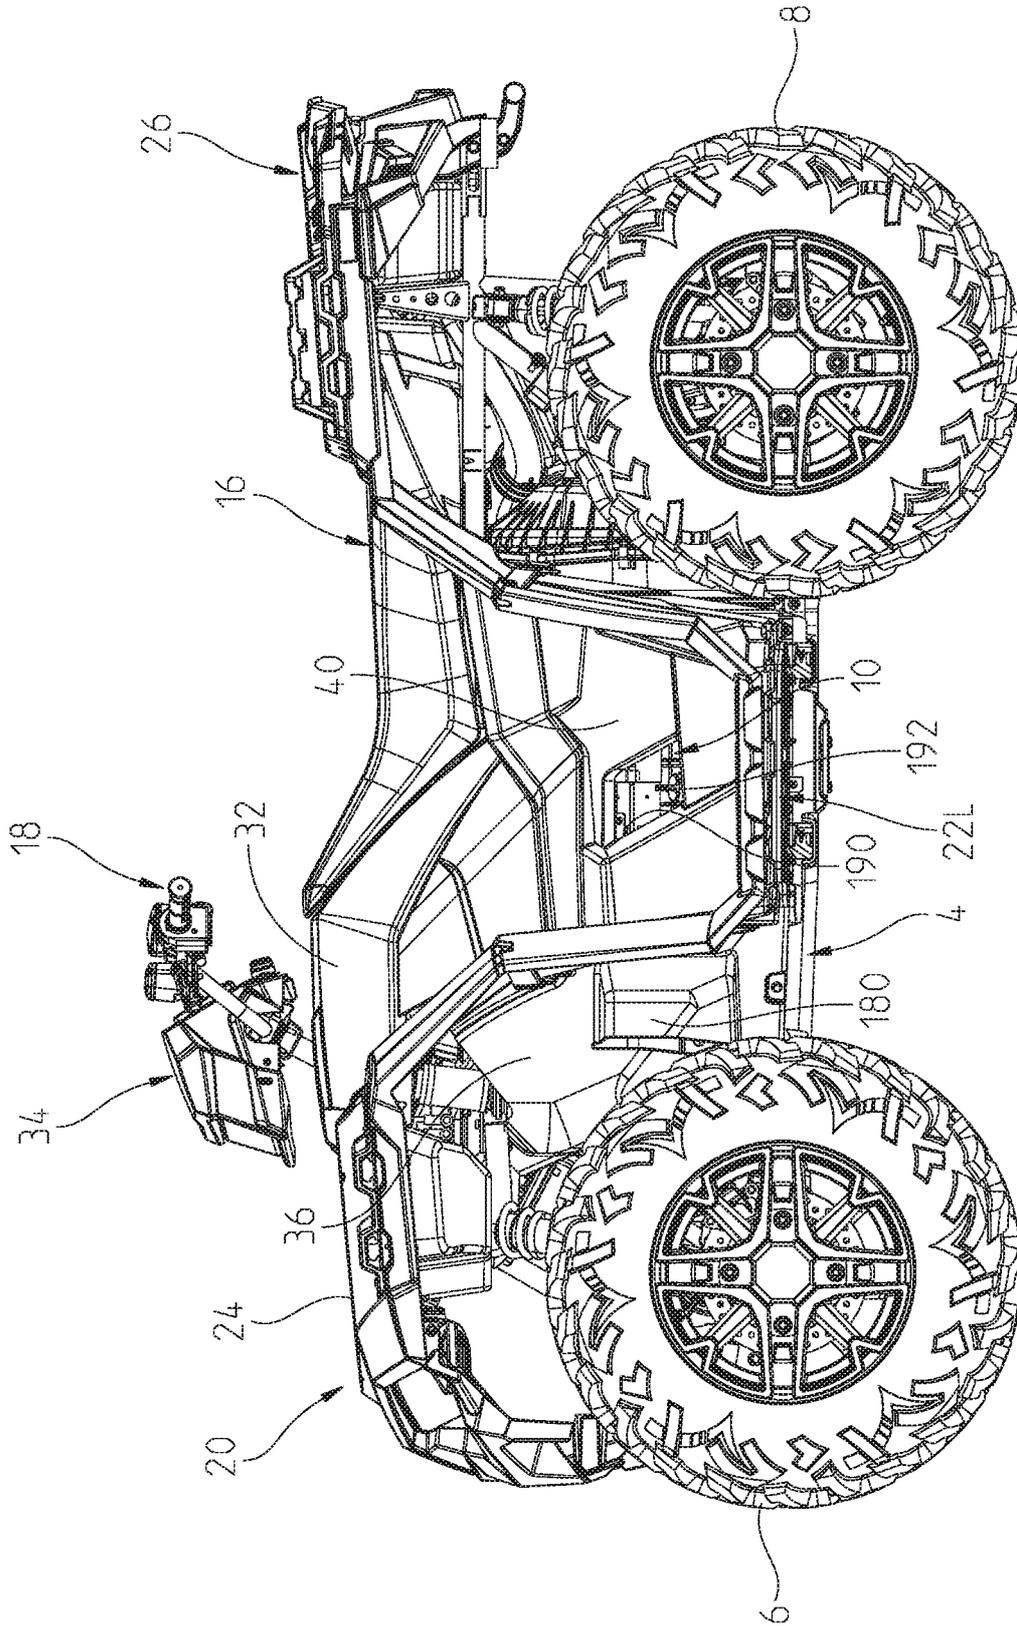


Fig. 3

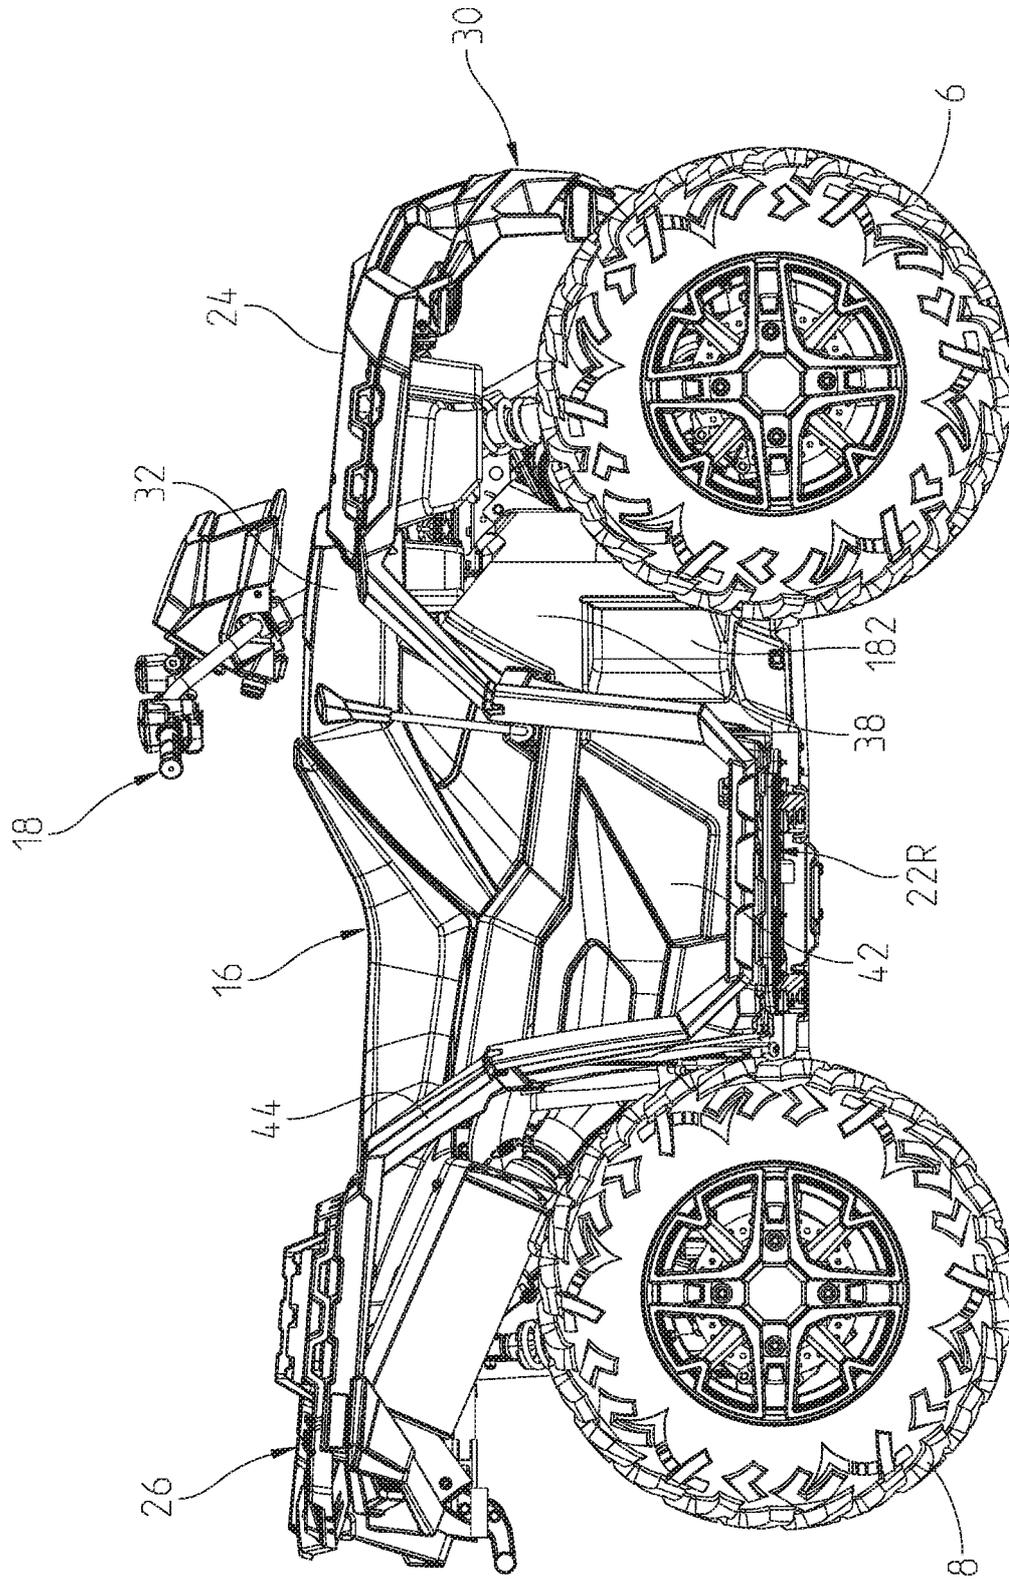


Fig. 4

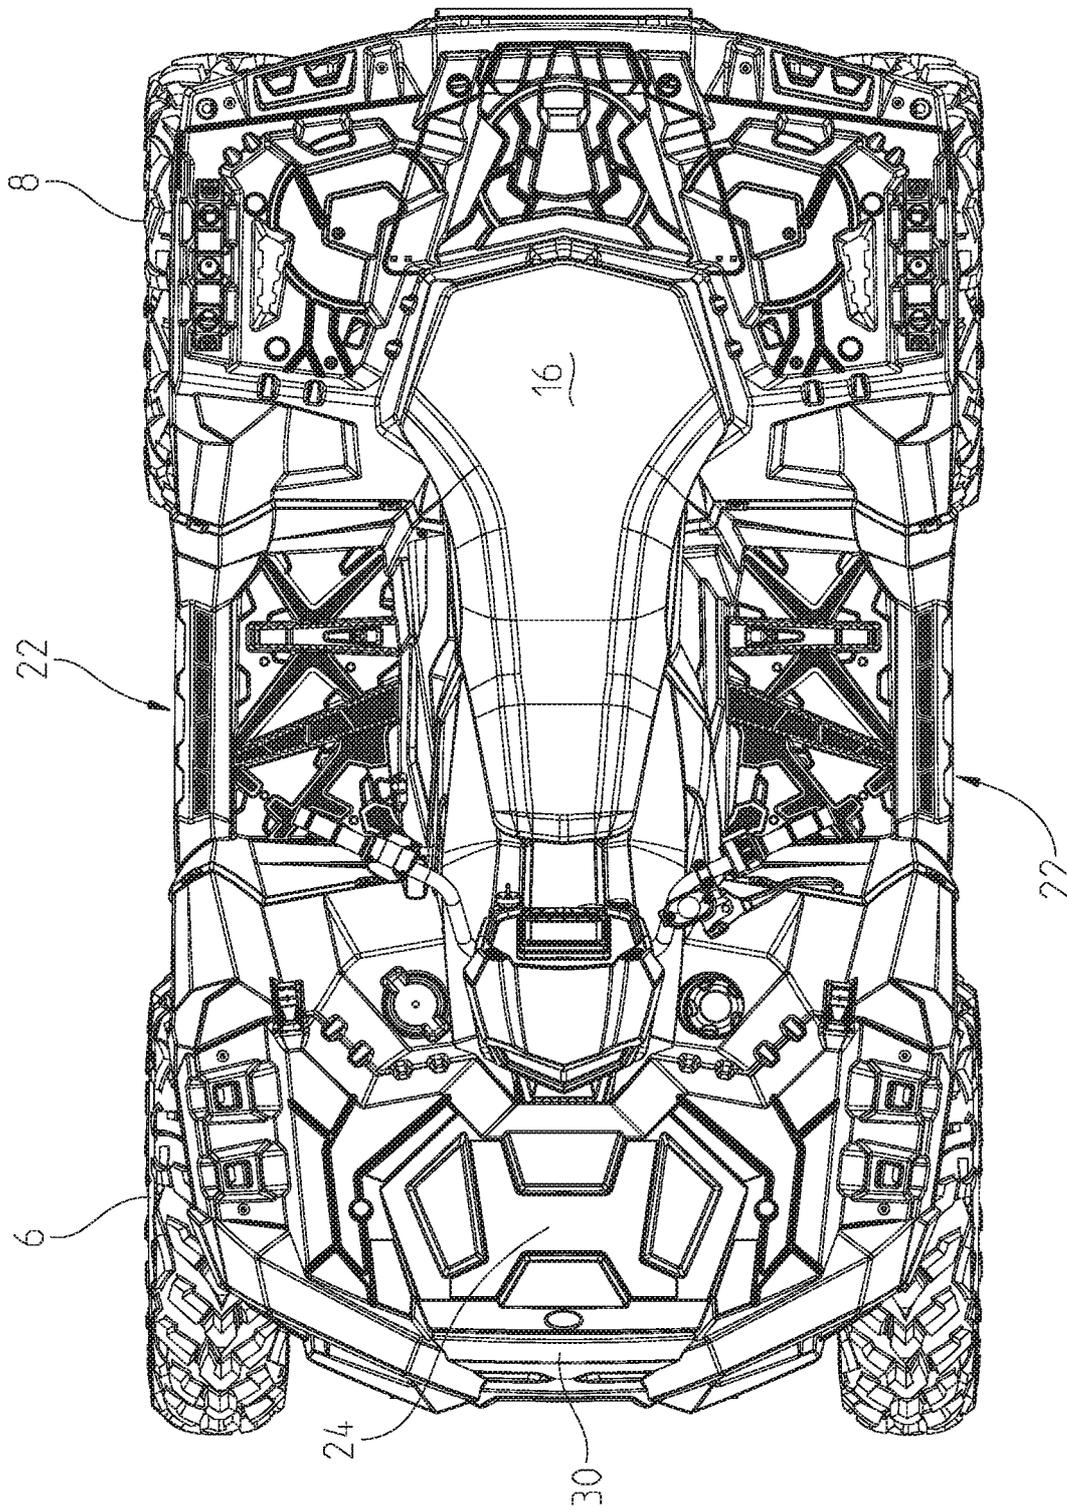


Fig. 5

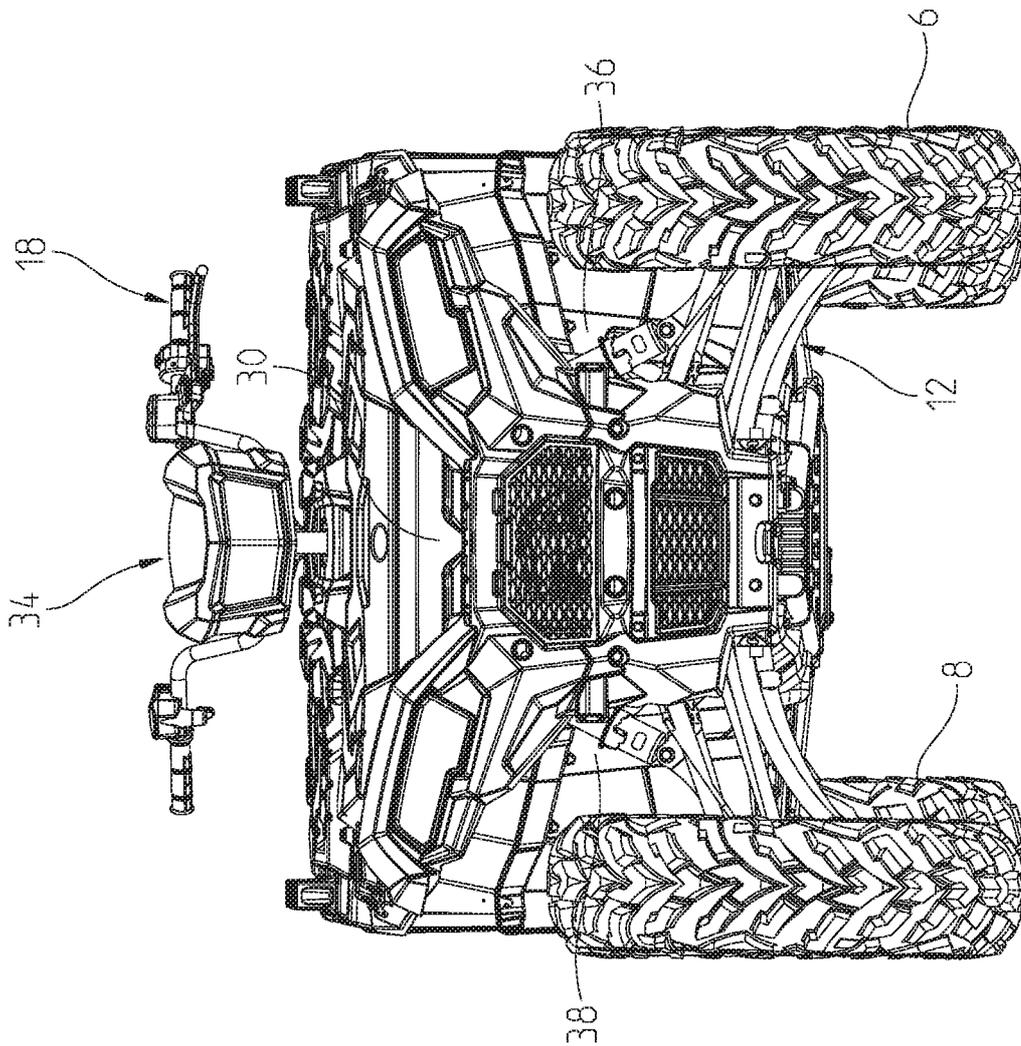


Fig. 6

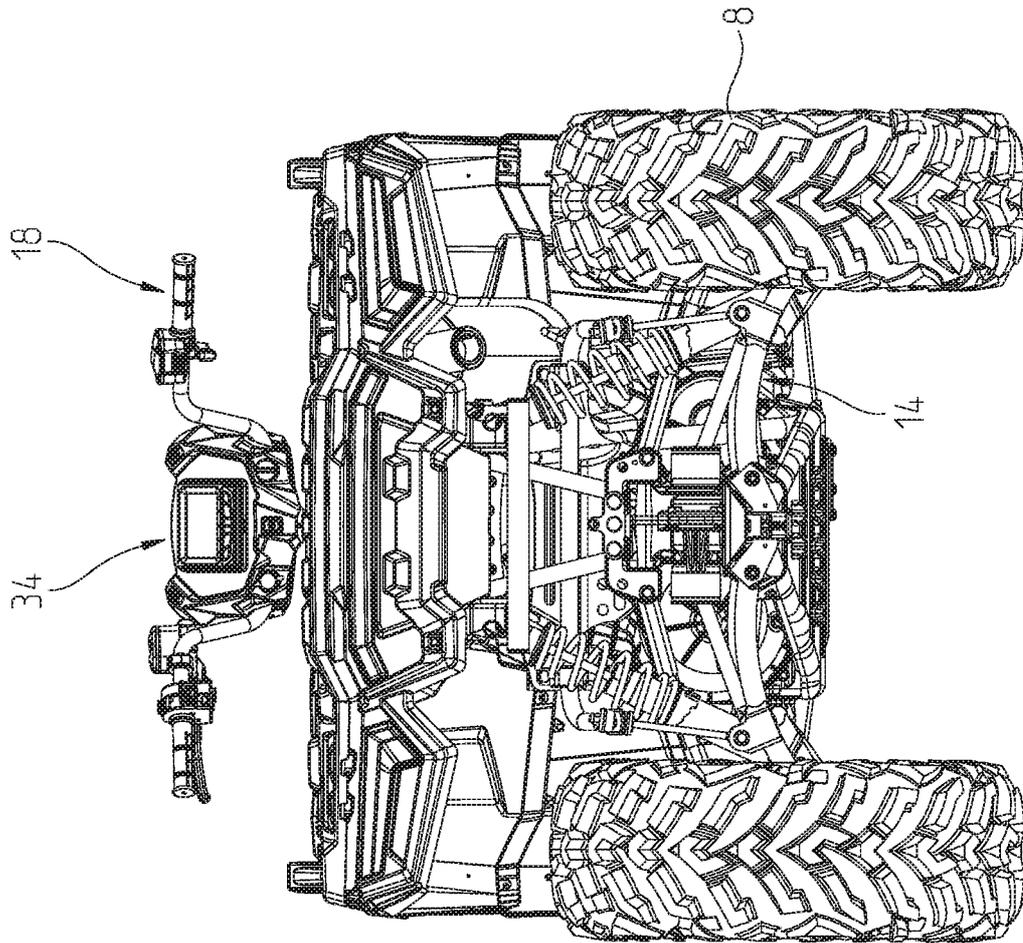


Fig. 7

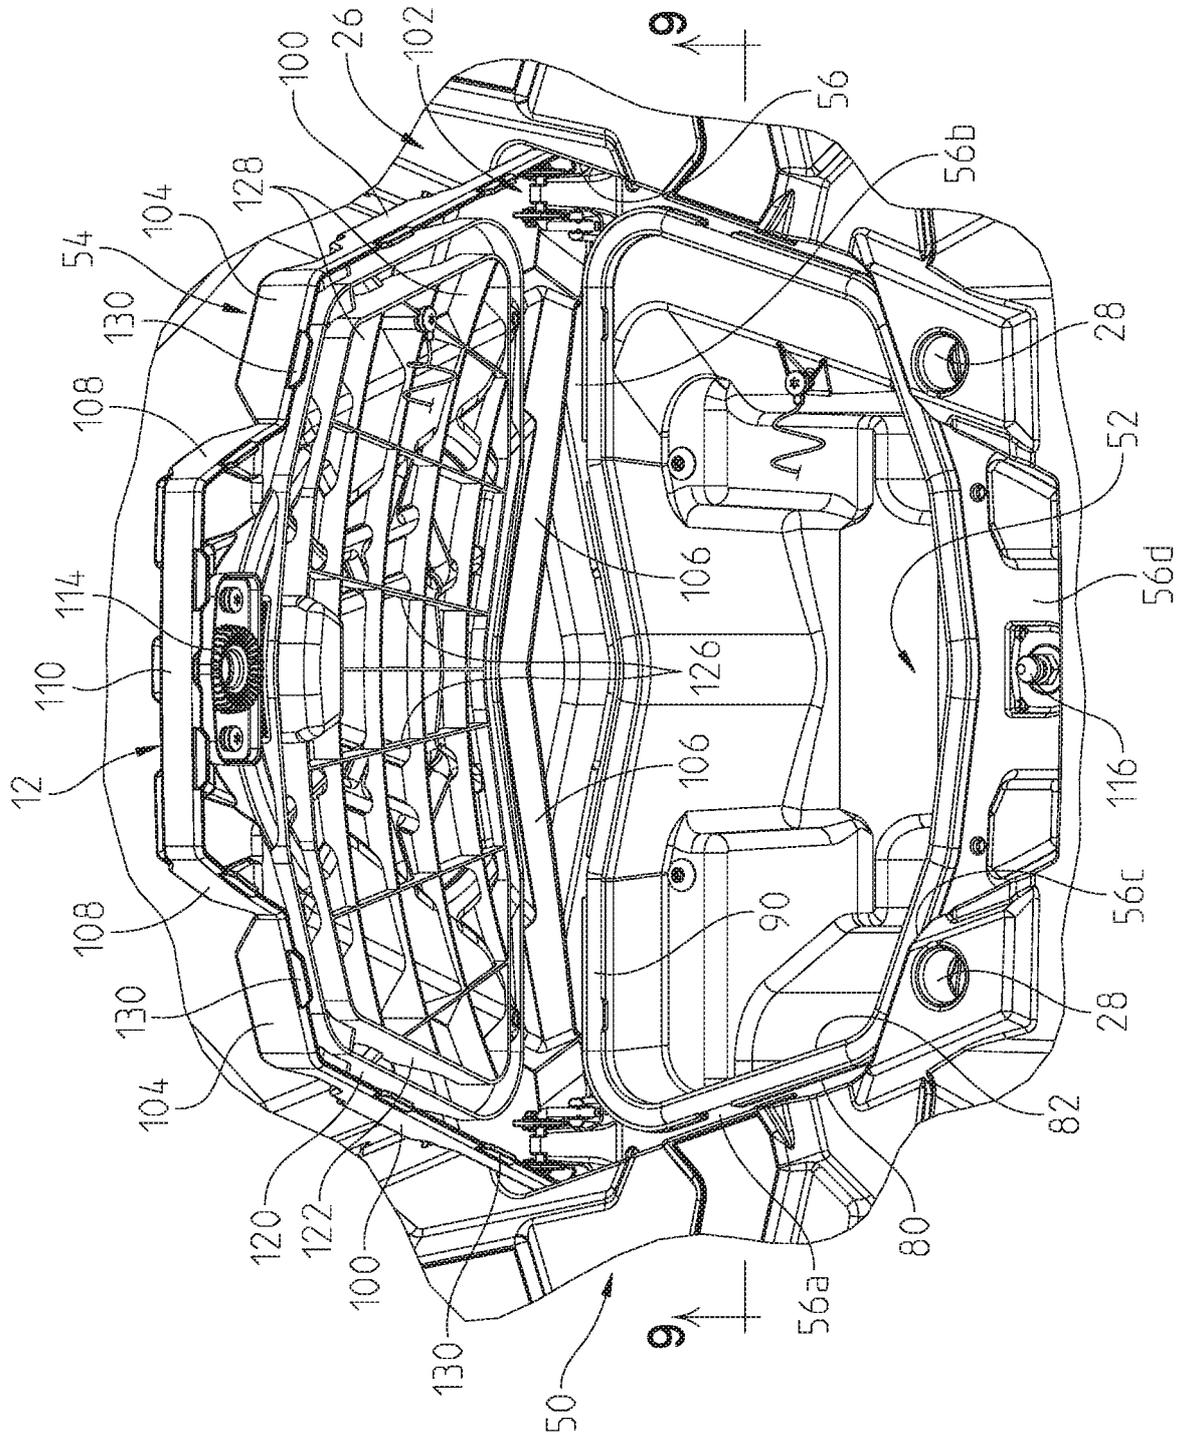


Fig. 8

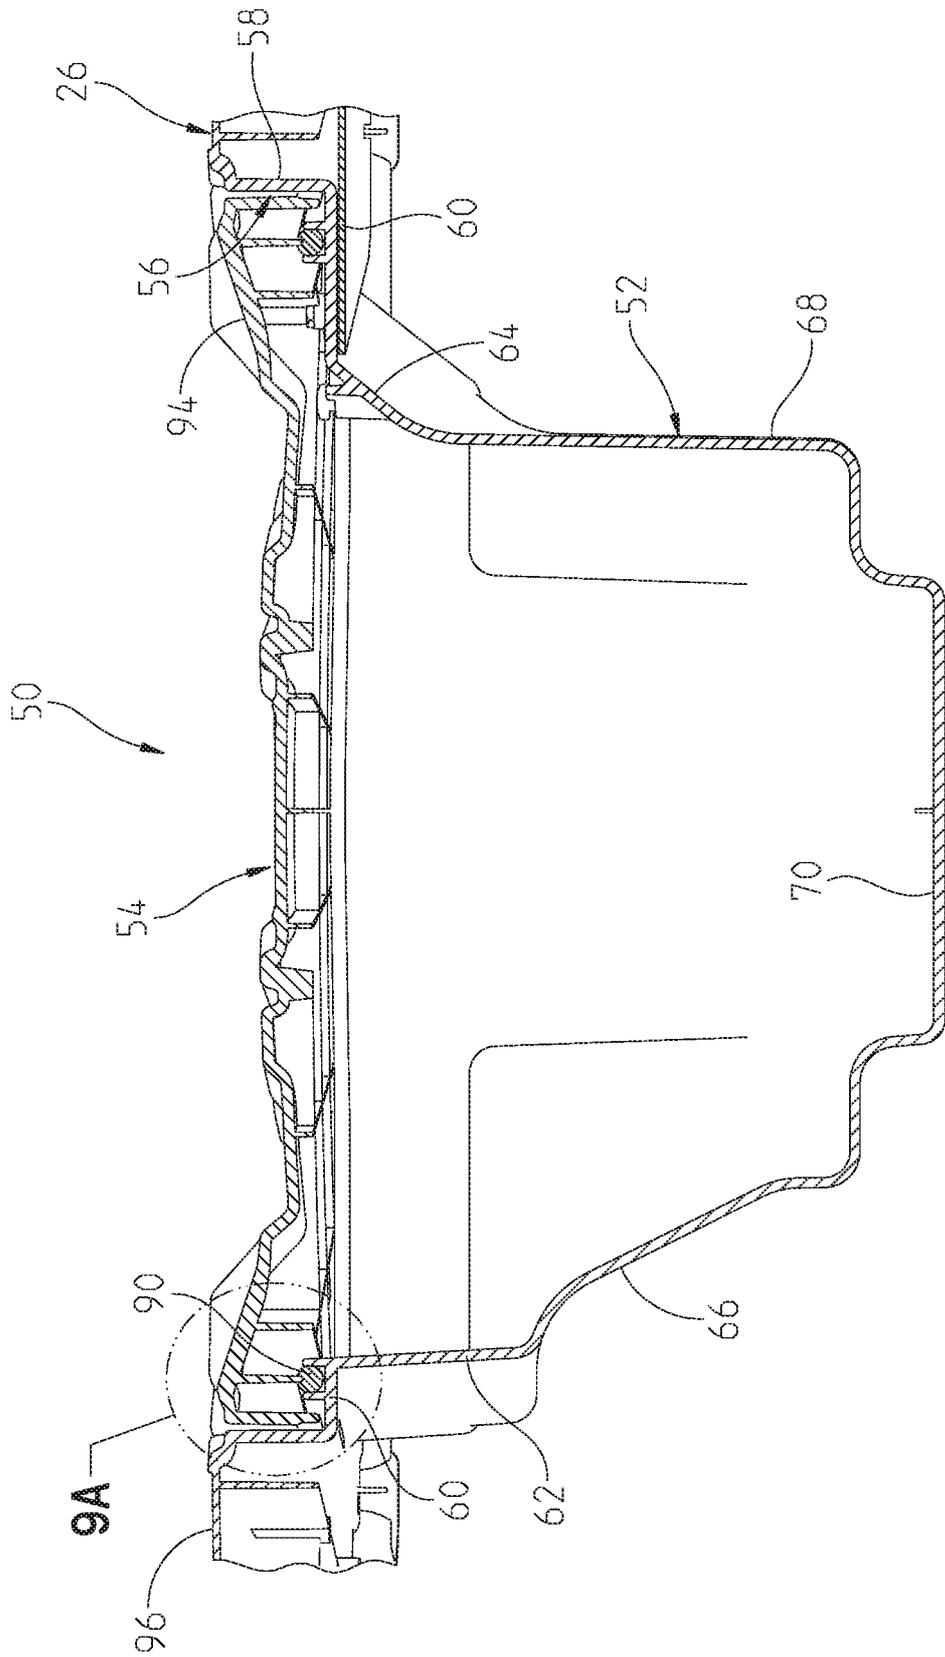


Fig. 9

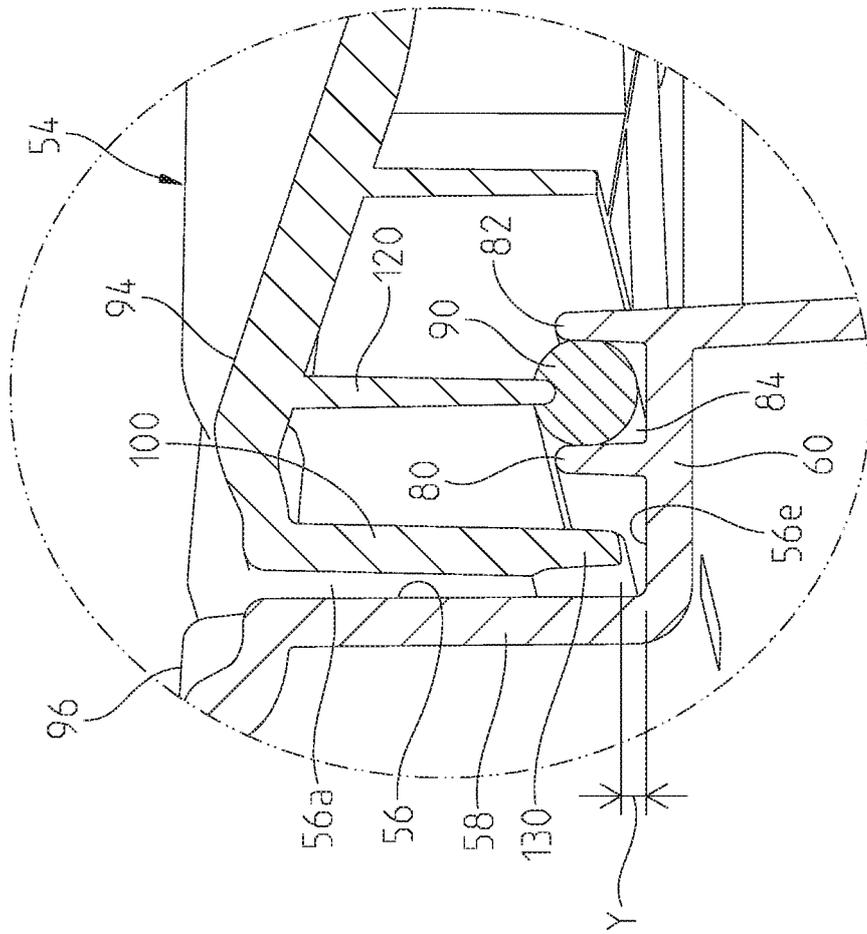


Fig. 9A

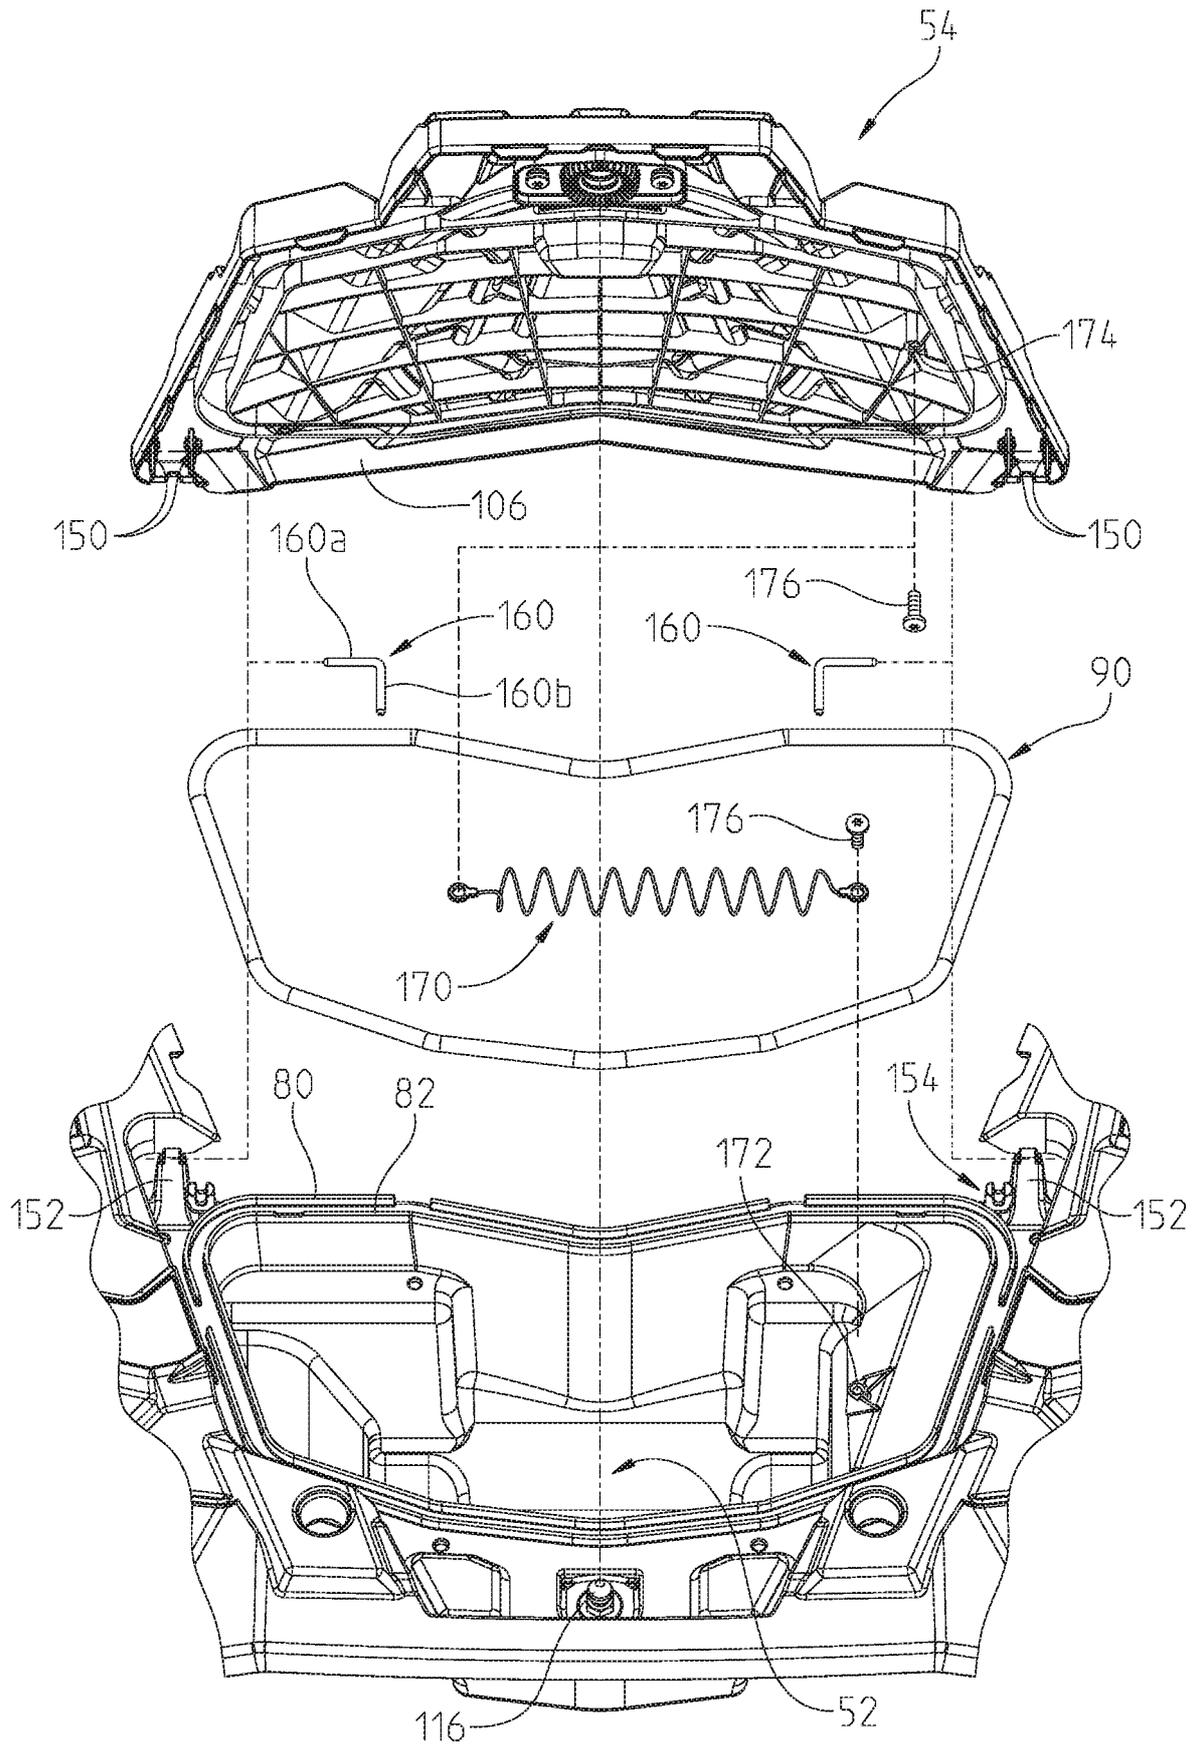


Fig. 10

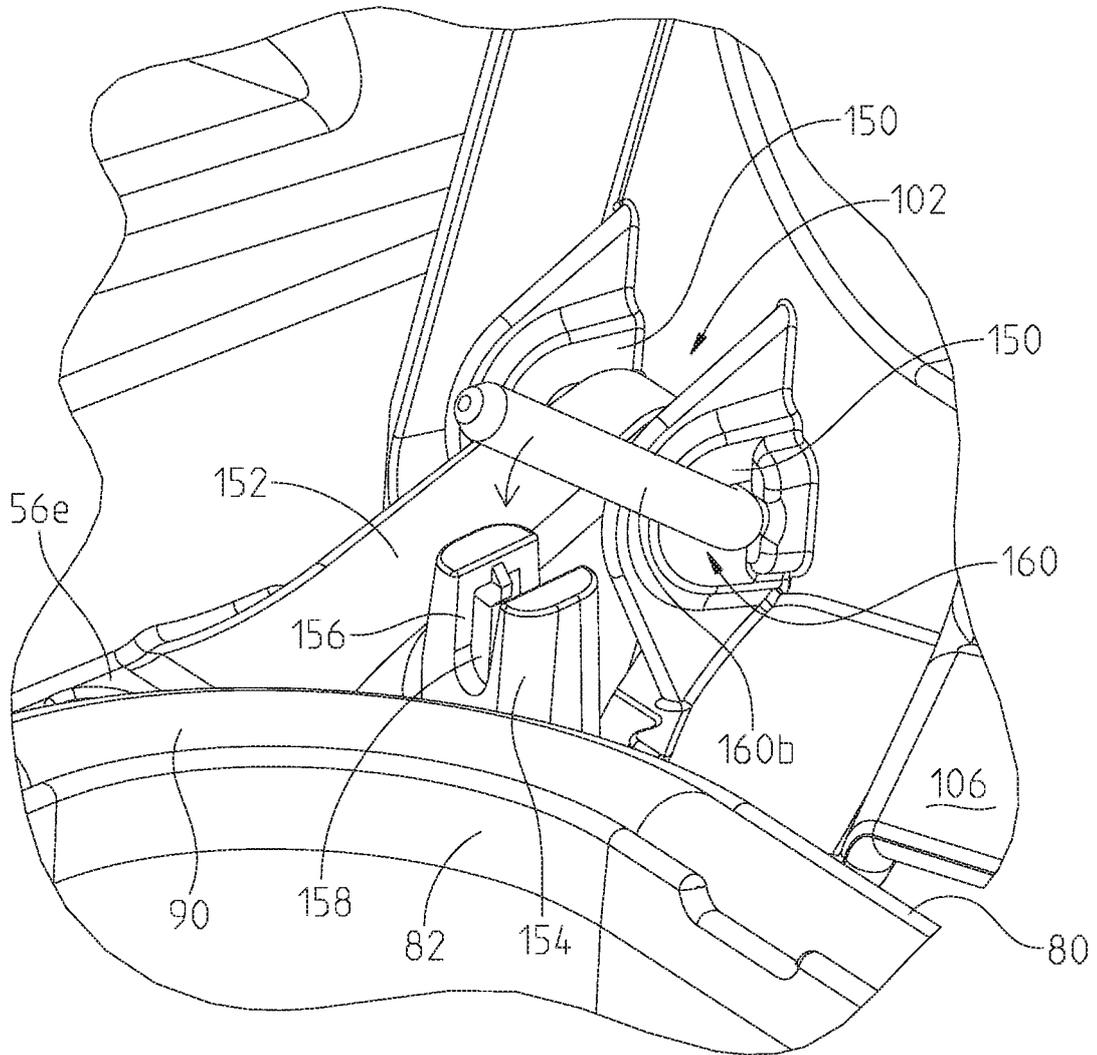


Fig. 11

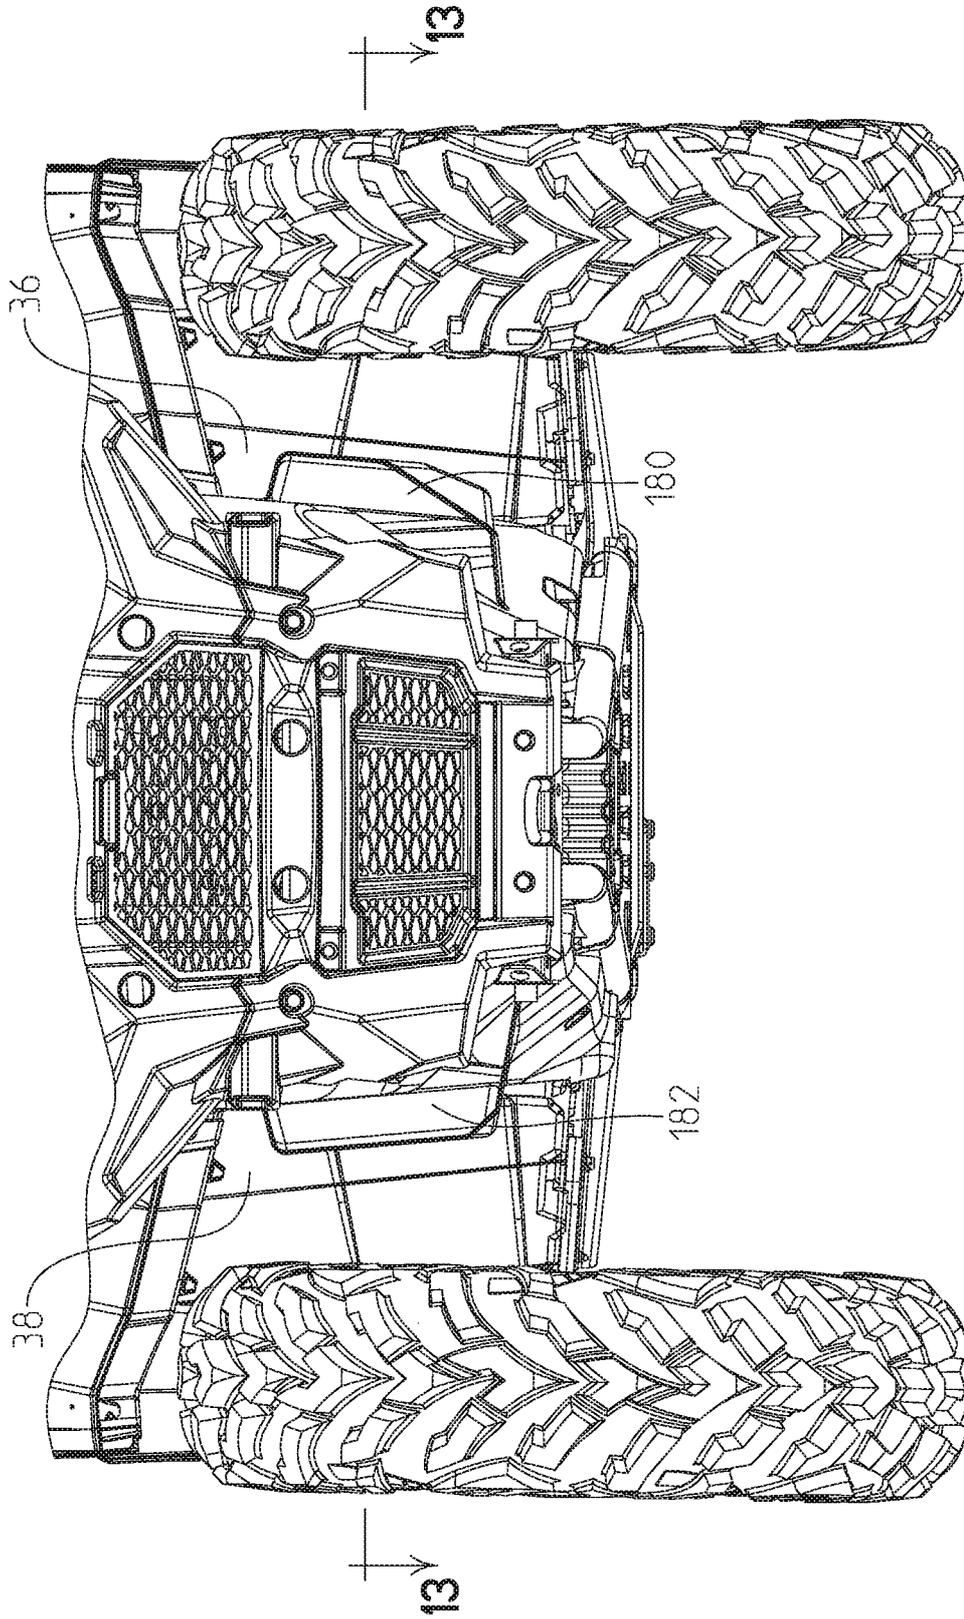


Fig. 12

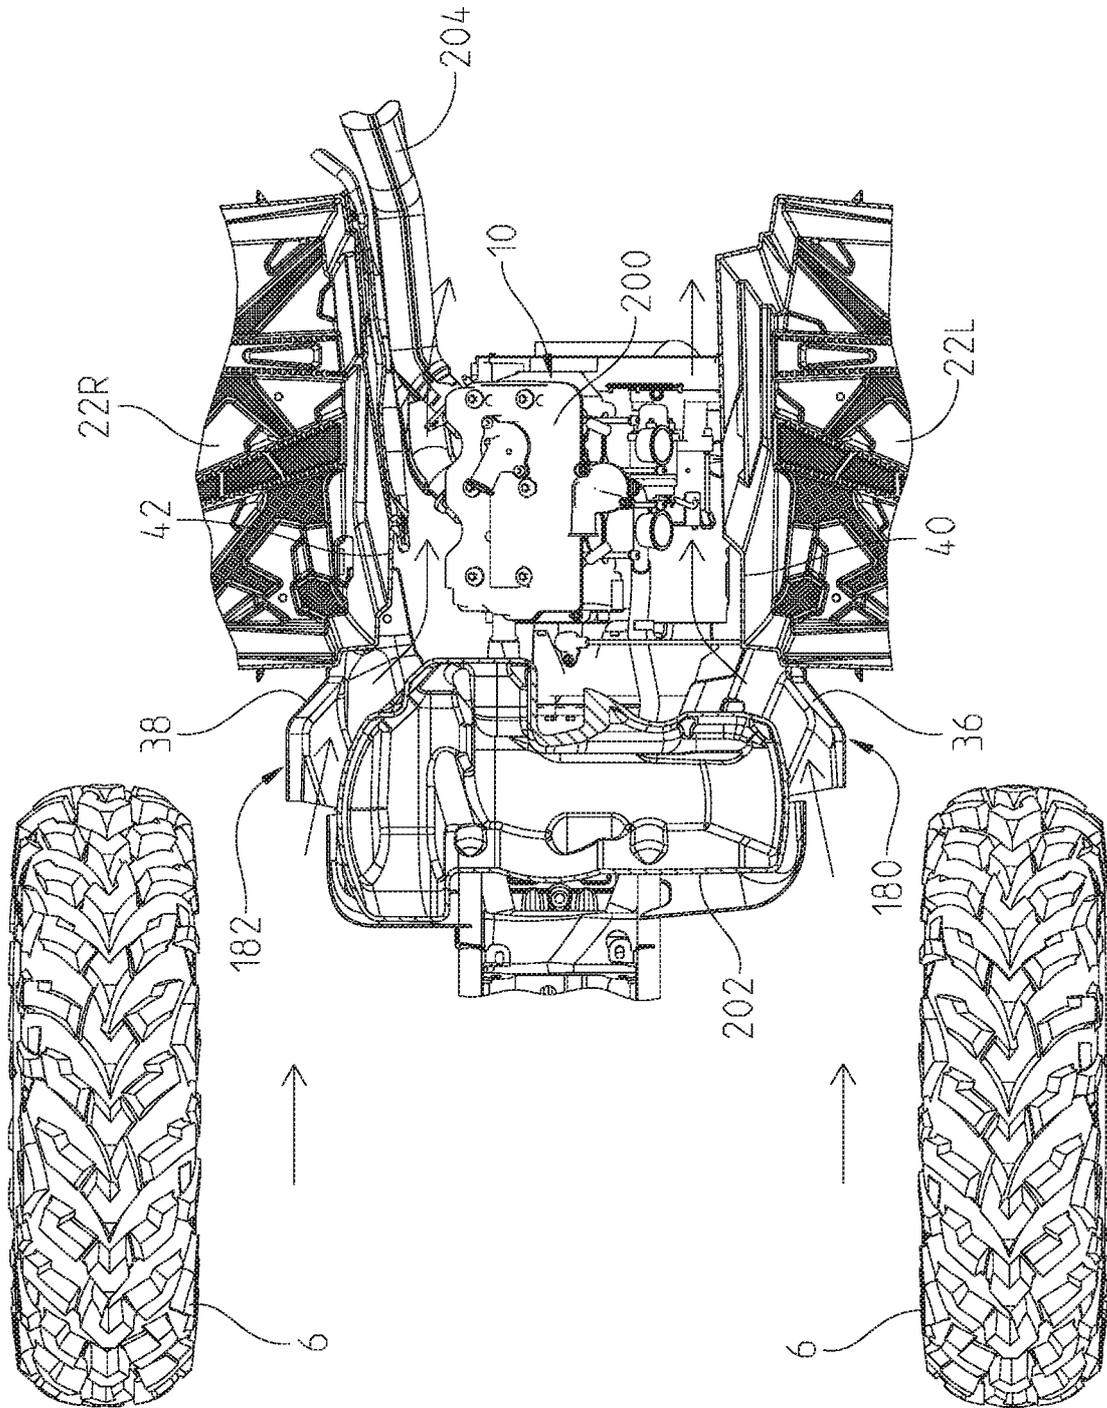


Fig. 13

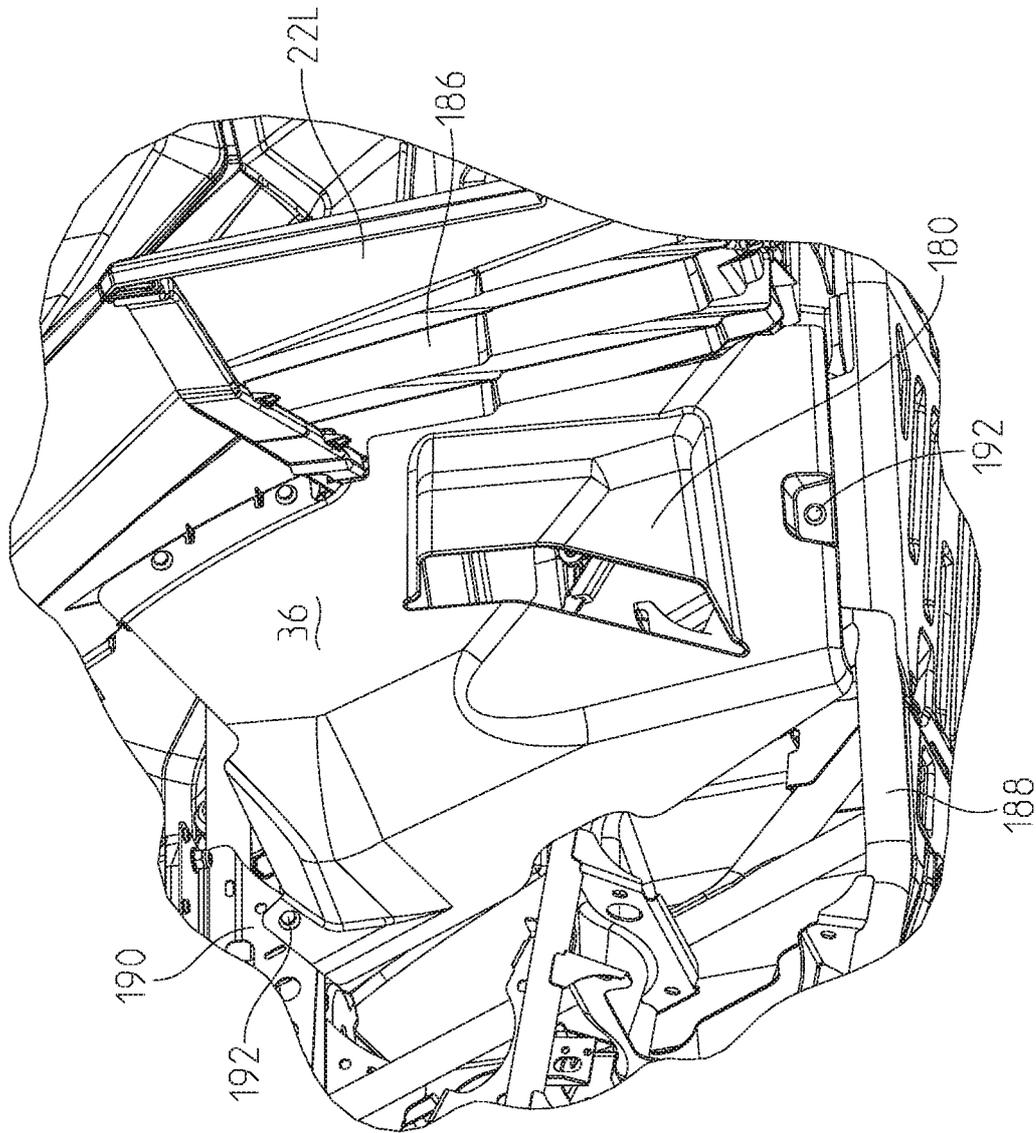


Fig. 14

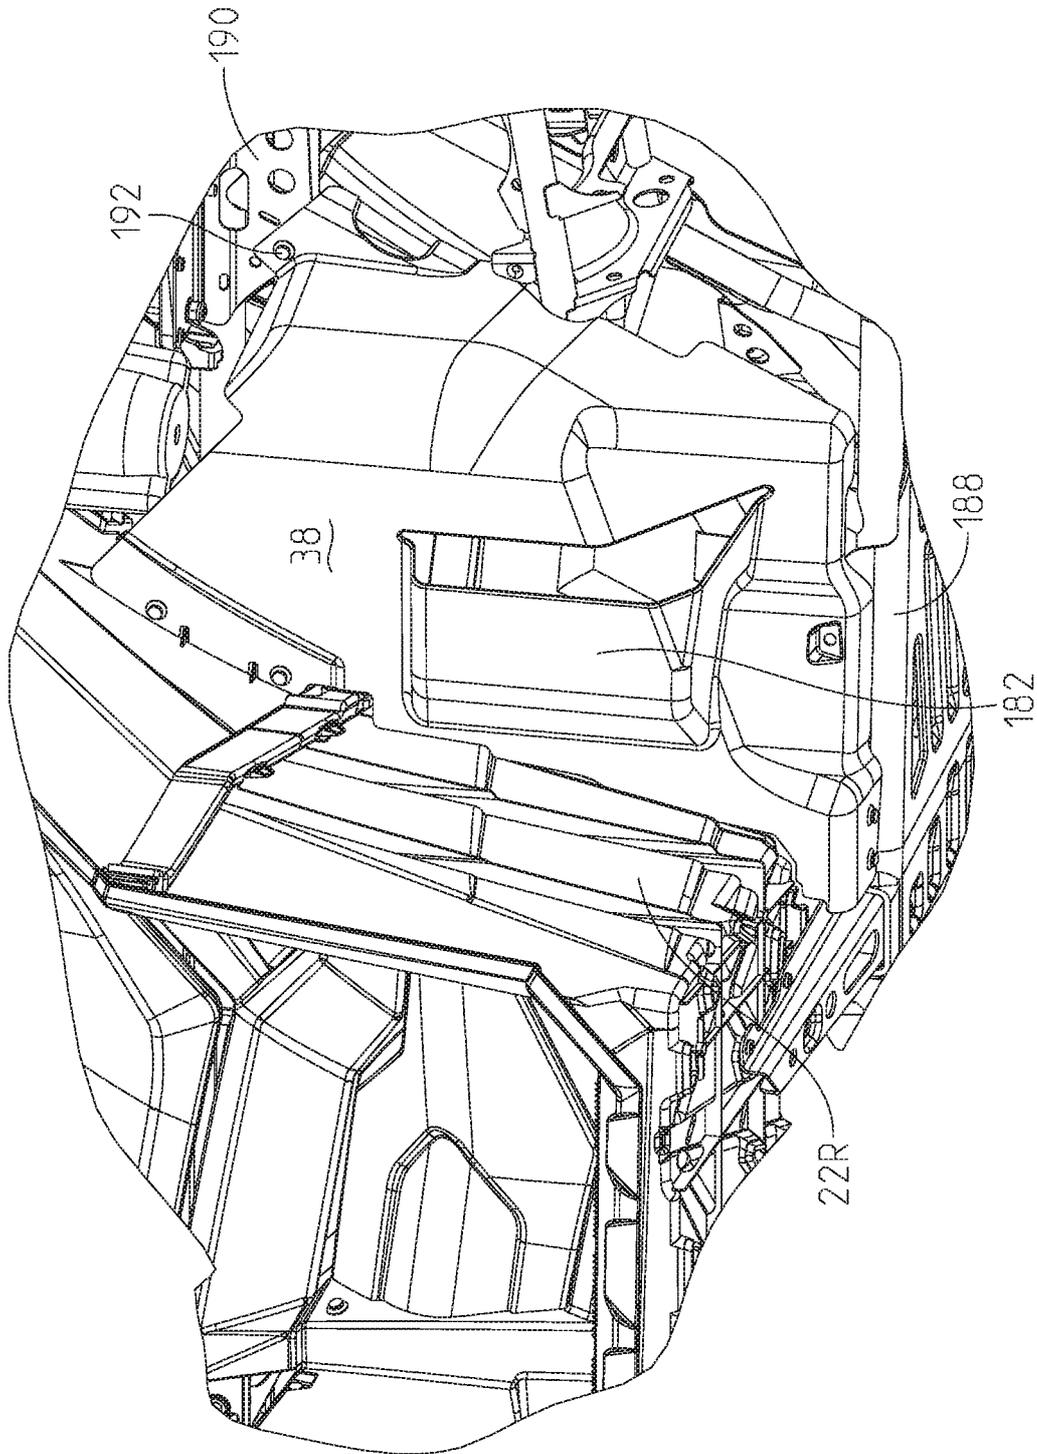


Fig. 15

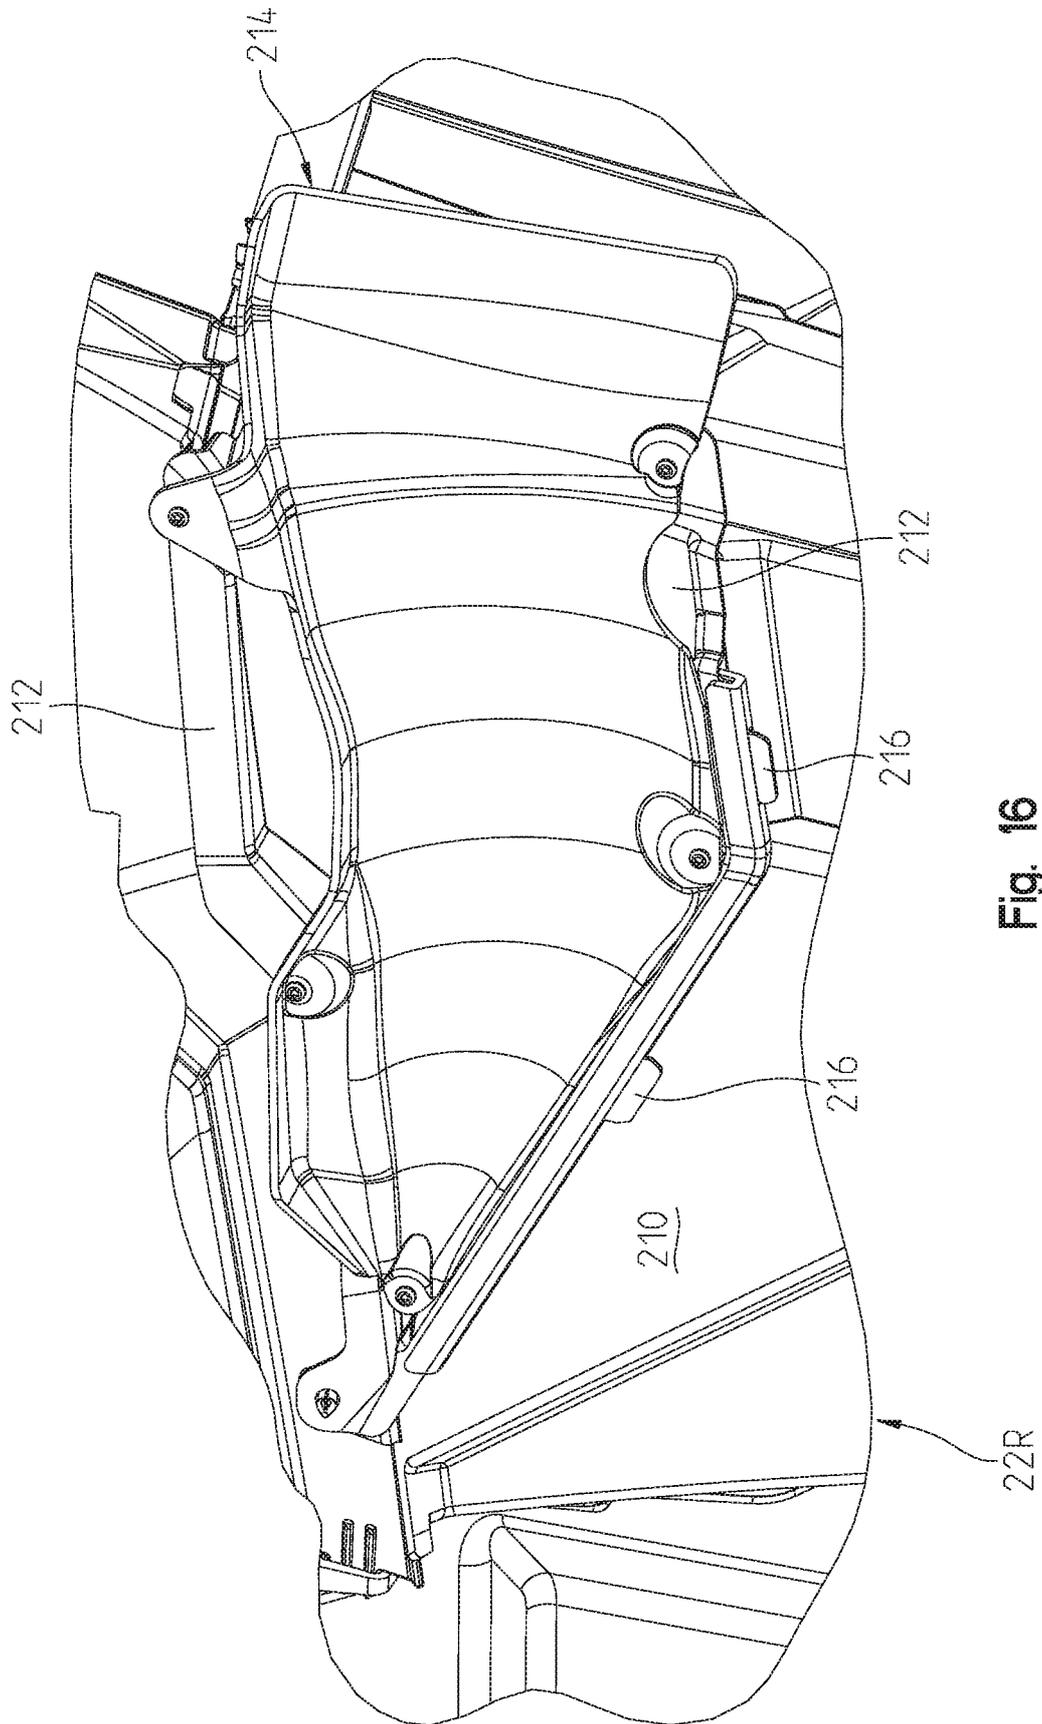


Fig. 16

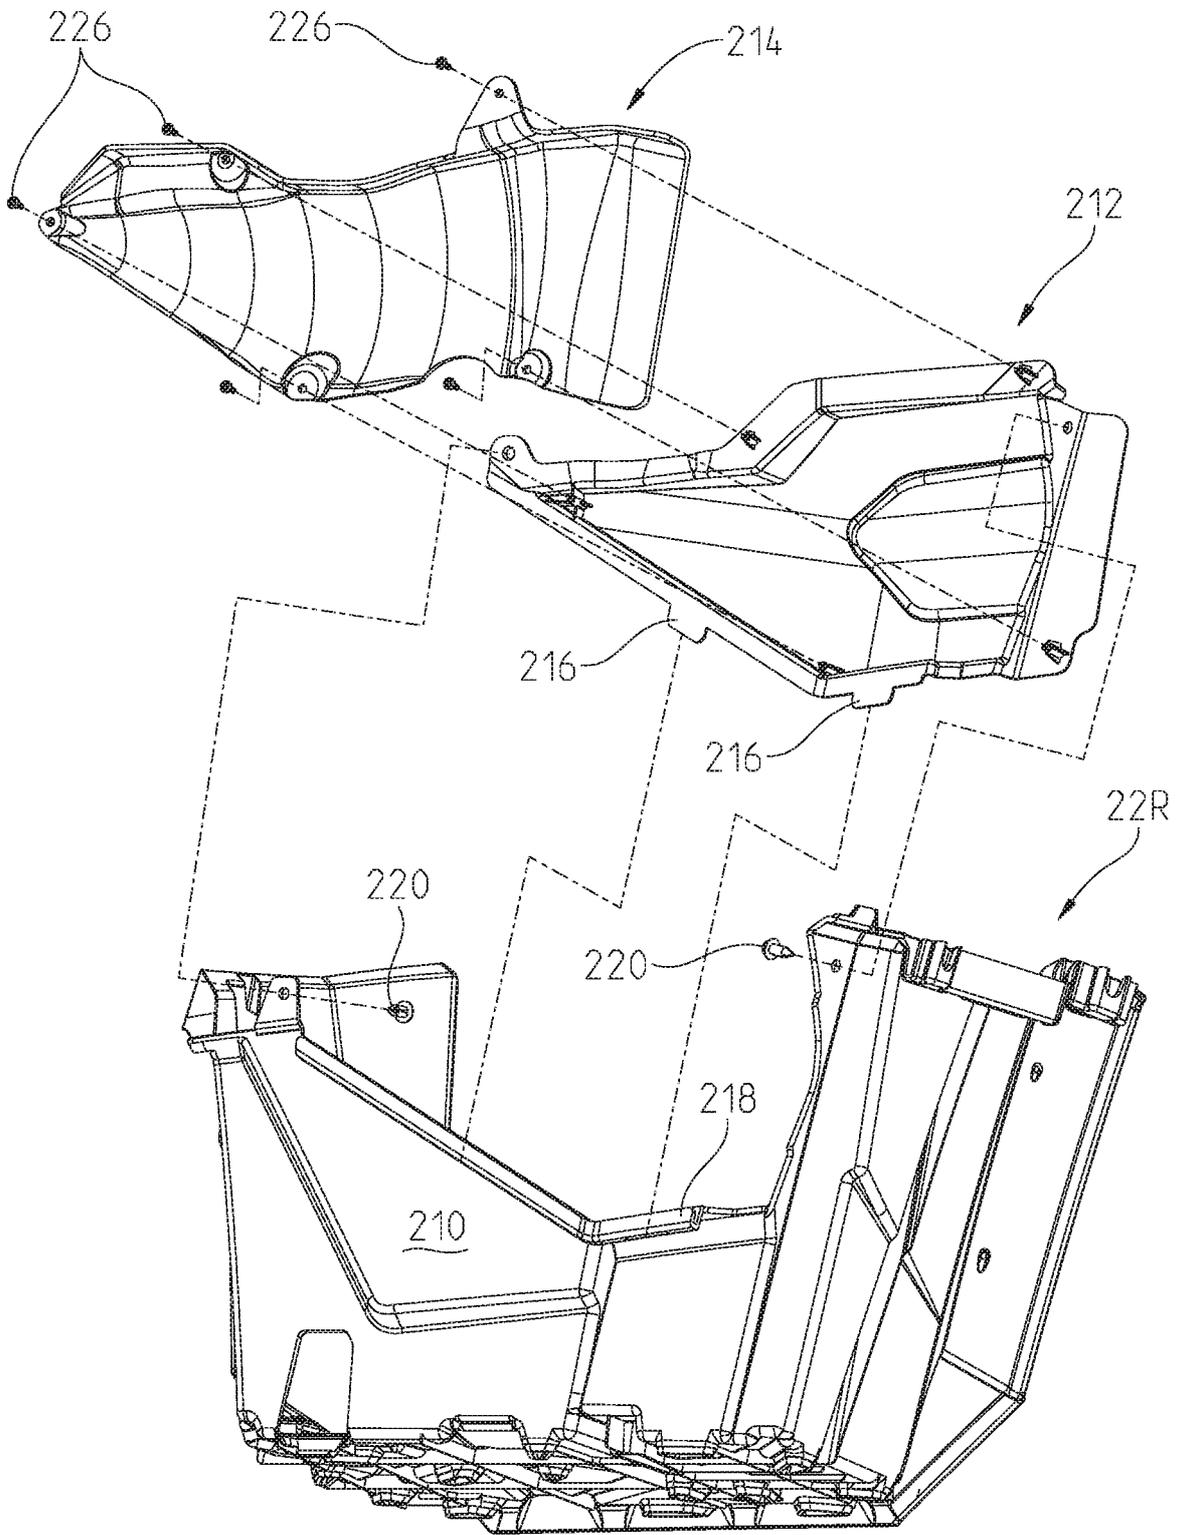


Fig. 17

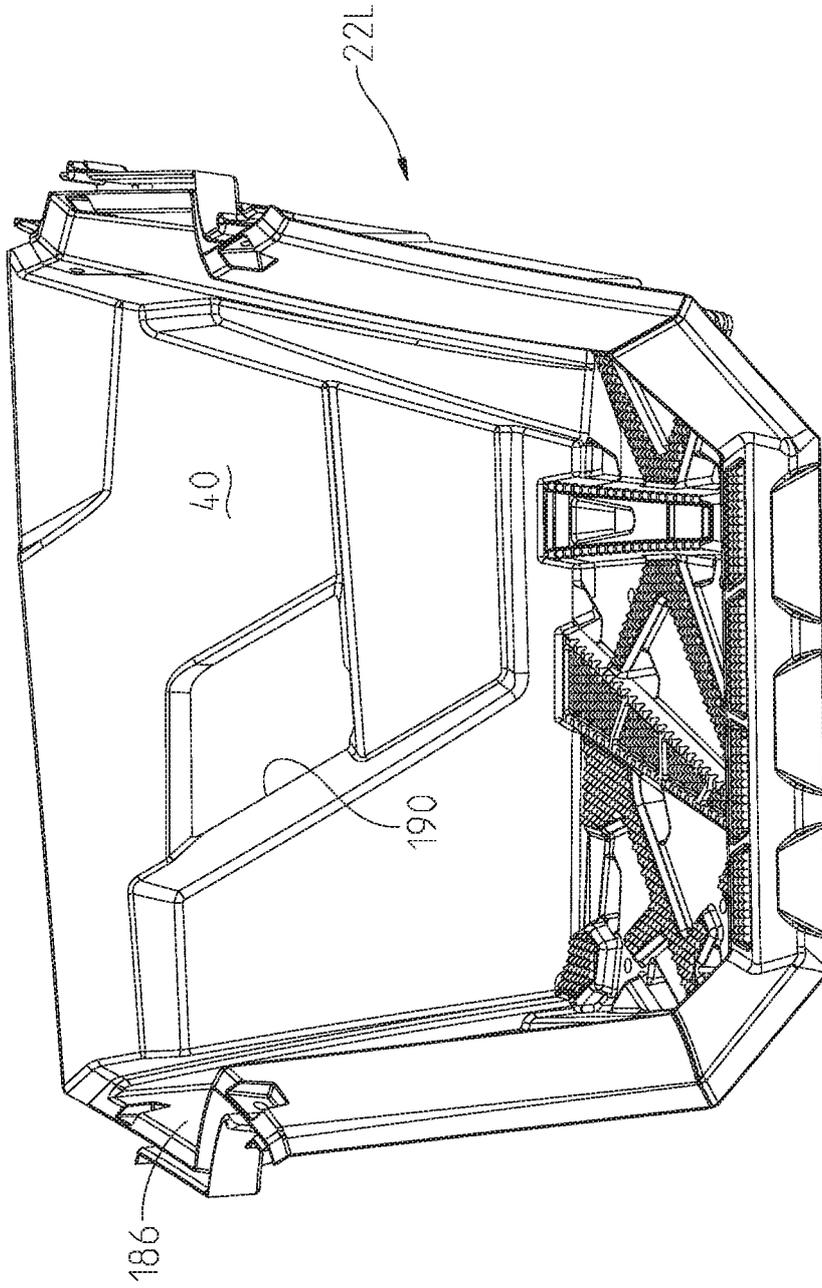


Fig. 18

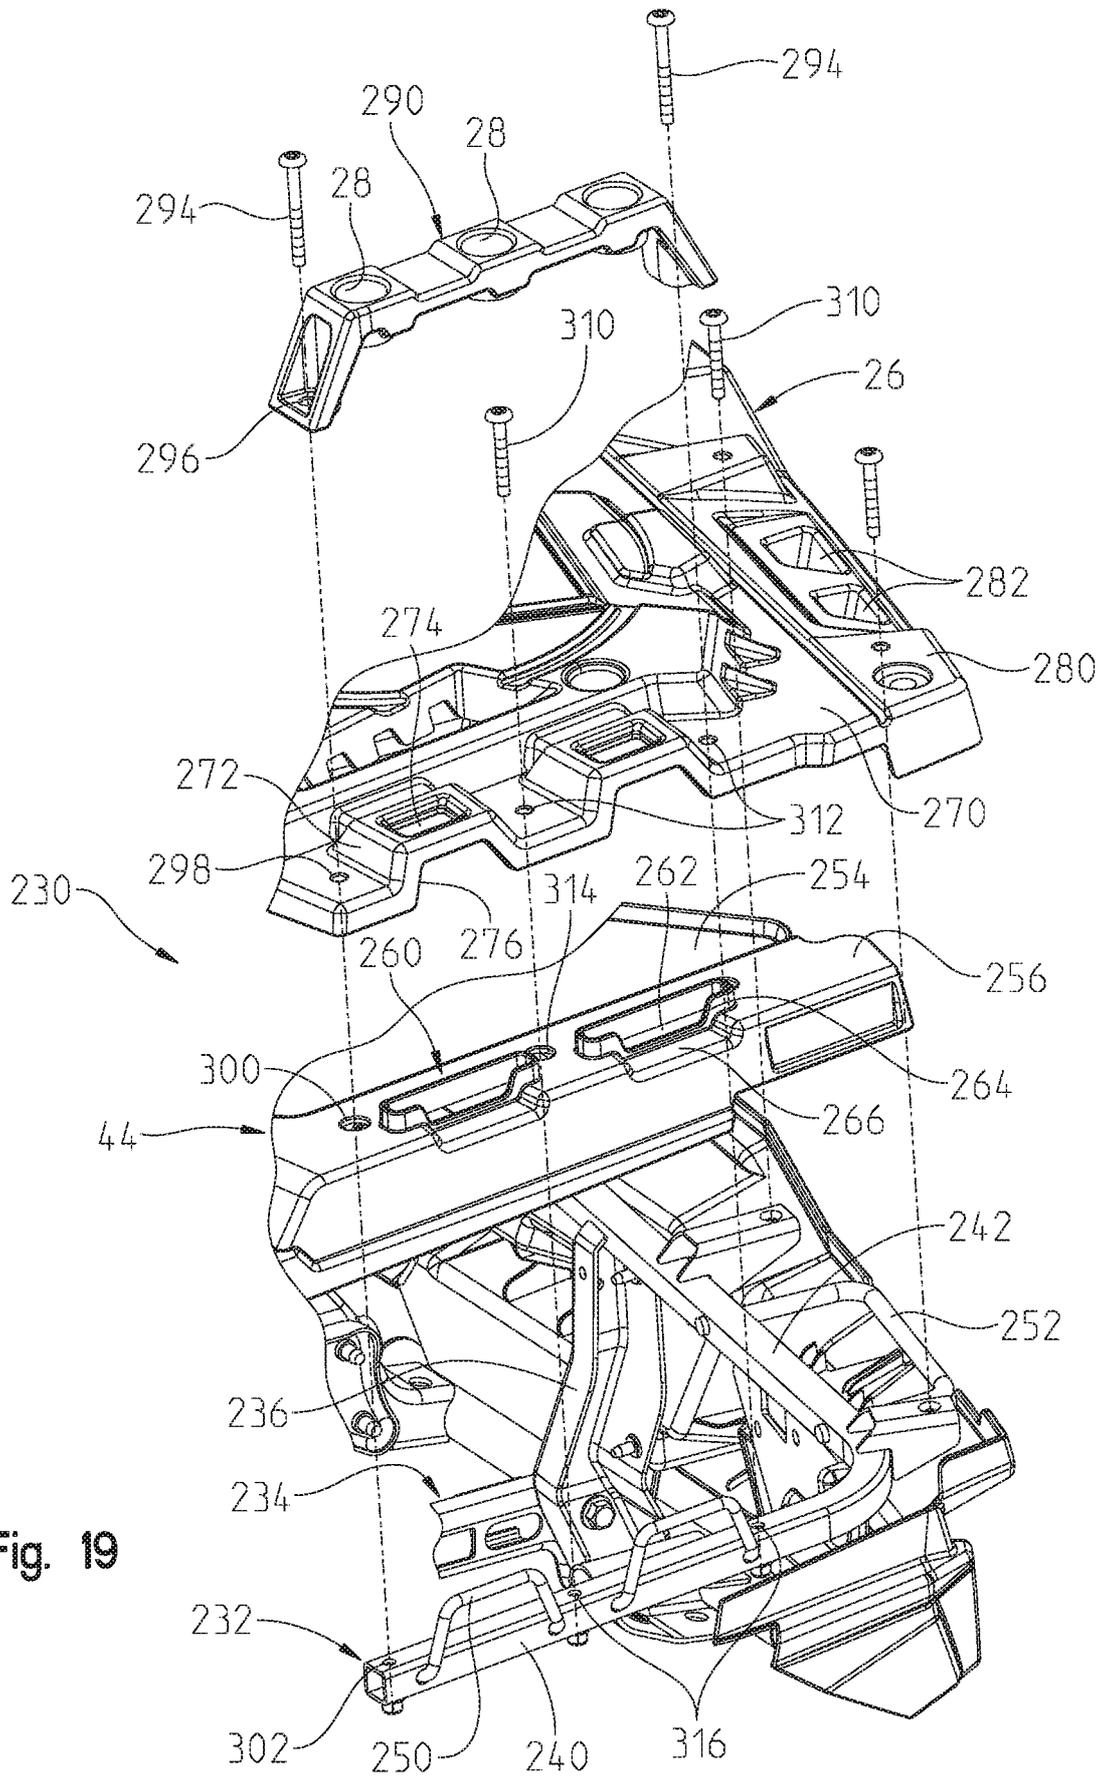


Fig. 19

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/041135

A. CLASSIFICATION OF SUBJECT MATTER

INV. B62J17/00 B62K5/00 B62K5/01 B62K5/027
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B62J B62K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/031291 A1 (OAKES PHILIP A [US]) 10 February 2011 (2011-02-10) figures 1-11	1, 11
X	----- US 2004/112669 A1 (RONDEAU PIERRE [CA] ET AL) 17 June 2004 (2004-06-17) paragraphs [0072], [0102]; figures 1-15	1, 3-6, 8, 10-16, 18, 20
X	----- CN 105 263 794 A (POLARIS INC) 20 January 2016 (2016-01-20) figures 1-39	1-7, 9-17, 19, 20
X	----- JP 2007 191104 A (SUZUKI MOTOR CO) 2 August 2007 (2007-08-02) paragraph [0035] - paragraph [0036]; figures 1-12	1, 3-11, 13-18, 20
	----- -/--	

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
 "&" document member of the same patent family

Date of the actual completion of the international search

27 September 2017

Date of mailing of the international search report

01/12/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Molina Encabo, Aitor

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2017/041135

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011/108349 A1 (MCCLENDON WILLIAM [US] ET AL) 12 May 2011 (2011-05-12) figures 1-13 -----	1-8, 10-18,20
A	EP 1 625 995 A1 (YAMAHA MOTOR CO LTD [JP]) 15 February 2006 (2006-02-15) figures 1-12 -----	1-20
A	EP 1 476 347 A1 (BOMBARDIER INC [CA]) 17 November 2004 (2004-11-17) figures 1-17 -----	1-20
X	US 2002/040822 A1 (GAGNON CLAUDE [CA] ET AL) 11 April 2002 (2002-04-11) figures 2-17 -----	1,3-7, 9-17,19, 20
A	CN 203 172 806 U (HONDA MOTOR CO LTD) 4 September 2013 (2013-09-04) figures 1-10 -----	1-20
A	US 4 744 432 A (SHIBATA HIROTAKA [JP] ET AL) 17 May 1988 (1988-05-17) figures 1-8 -----	1-20

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/041135

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-20

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-20

All terrain vehicle with engine ventilation system

2. claims: 21-29

All terrain vehicle rear rack with integrally formed storage bin

3. claims: 30-38

All terrain vehicle with load bearing storage bin cover that conforms to the top surface of a rear rack

4. claims: 39-45

All terrain vehicle with a covered sealed storage bin, the cover having a hinge overstress protection.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/041135

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2011031291	A1	10-02-2011	NONE	
US 2004112669	A1	17-06-2004	US 2004112668 A1 US 2004112669 A1 US 2004129485 A1	17-06-2004 17-06-2004 08-07-2004
CN 105263794	A	20-01-2016	AU 2014244106 A1 AU 2016231463 A1 CA 2901479 A1 CN 105263794 A EP 2969722 A2 EP 3251929 A2 ES 2622065 T3 US 2014262584 A1 WO 2014160119 A2	24-09-2015 06-10-2016 02-10-2014 20-01-2016 20-01-2016 06-12-2017 05-07-2017 18-09-2014 02-10-2014
JP 2007191104	A	02-08-2007	JP 4802727 B2 JP 2007191104 A	26-10-2011 02-08-2007
US 2011108349	A1	12-05-2011	NONE	
EP 1625995	A1	15-02-2006	BR PI0410292 A CN 1780756 A CN 101353068 A EP 1625995 A1 ES 2423919 T3 JP 2006240315 A US 2005224266 A1 WO 2004103805 A1	16-05-2006 31-05-2006 28-01-2009 15-02-2006 25-09-2013 14-09-2006 13-10-2005 02-12-2004
EP 1476347	A1	17-11-2004	AT 387374 T AU 2002333102 A1 DE 60225343 T2 EP 1476347 A1 US 2005217909 A1 WO 03070547 A1	15-03-2008 09-09-2003 19-02-2009 17-11-2004 06-10-2005 28-08-2003
US 2002040822	A1	11-04-2002	NONE	
CN 203172806	U	04-09-2013	CN 203172806 U CO 7090246 A1 JP 5883716 B2 JP 2013226978 A PE 16182014 A1	04-09-2013 21-10-2014 15-03-2016 07-11-2013 13-11-2014
US 4744432	A	17-05-1988	JP H0825498 B2 JP S61171678 A US 4744432 A	13-03-1996 02-08-1986 17-05-1988