

**(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE**

(11) Application No. AU 2009318772 B2

(54) Title
External stent

(51) International Patent Classification(s)
A61F 2/06 (2013.01) **A61F 2/90** (2013.01)

(21) Application No: **2009318772** (22) Date of Filing: **2009.11.24**

(87) WIPO No: **WO10/058406**

(30) Priority Data

(31) Number 61/186,046	(32) Date 2009.06.11	(33) Country US
61/244,138	2009.09.21	US
61/193,398	2008.11.24	US

(43) Publication Date: **2010.05.27**
(44) Accepted Journal Date: **2016.05.19**

(71) Applicant(s)
Vascular Graft Solutions Ltd.;The Medical Research, Infrastructure, and Health Services Fund of The Tel Aviv Medical Center

(72) Inventor(s)
Orion, Eyal;Bachar, Yehuda;Ben-Gal, Yanai;Rapaport, Avraham;Cibulski, Gilad;Winshtein, Ronny

(74) Agent / Attorney
Cullens Pty Ltd, Level 32 239 George Street, Brisbane, QLD, 4000

(56) Related Art
US 2004/0167605 A1
WO 1997/033532 A2
WO 2001/026707 A2
US 2005/0055082 A1

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
27 May 2010 (27.05.2010)(10) International Publication Number
WO 2010/058406 A1(51) International Patent Classification:
A61F 2/06 (2006.01) A61F 2/90 (2006.01)Moshe, 42810 Doar-Na Lev HaSharon (IL). **WIN-SHTEIN, Ronny** [IL/IL]; 18 Tabenkin Street, 52302 Ramat-Gan (IL).

(21) International Application Number:

PCT/IL2009/001105

(74) Agents: **G.E. EHRLICH (1995) LTD.** et al.; 11 Menachem Begin Street, Ramat Gan 52521 (IL).

(22) International Filing Date:

24 November 2009 (24.11.2009)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BI, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/193,398	24 November 2008 (24.11.2008)	US
61/186,046	11 June 2009 (11.06.2009)	US
61/244,138	21 September 2009 (21.09.2009)	US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: EXTERNAL STENT

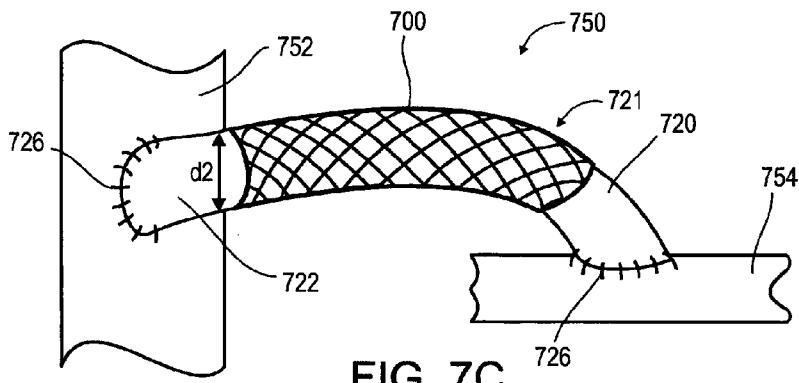


FIG. 7C

(57) Abstract: An external vein support comprising an elongate axial body including an axis, said body is plastically deformable by at least one of stretching, bending, twisting, and any combination thereof, relative to said axis.

1
EXTERNAL STENT

RELATED APPLICATION/S

5

This application is related to U.S. Provisional Patent Application No. 61/193,398 filed Nov. 24, 2008 and entitled "SHAPABLE GRAFT CASTING DEVICE", to U.S. Provisional Patent Application No. 61/186,046 filed 11-Jun-2009 and entitled "METHOD AND APPARATUSES FOR SHAPING BODY CHANNELS", and to U.S. Provisional Patent Application No. 61/244,138 filed 21-Sep-2009 and entitled "EXTERNAL STENT", the disclosures of which are incorporated herein by reference in their entirety. The contents of all of the above documents are incorporated by reference as if fully set forth herein.

15

FIELD AND BACKGROUND OF THE INVENTION

The present invention, in some embodiments thereof, relates to a support for a conduit in a body of a person or an animal, and in particular to a support for a grafted vessel inside a body.

20

Coronary Heart Disease (CHD) is considered one of the leading causes of death in both men and women. The disease pathophysiology involves a buildup of cholesterol plaque in a blood vessel to a point where the vessel may be partially, or wholly, occluded.

25

Two known techniques for treating occluded coronary vessels are Percutaneous Transluminal Coronary Angioplasty (PTCA) for opening the stenotic area with a balloon catheter, usually accompanied by placement of a stent to secure the opening; and Coronary Artery Bypass Graft (CABG) surgery for bypassing an occluded vessel with a graft implant. Several types of (autologous) coronary artery bypass grafts are known, such as internal thoracic grafts, radial and right gastroepiploic artery grafts, and saphenous vein grafts. These grafts generally originate from the aorta or its bifurcations or are constructed grafts. Synthetic grafts are generally considered alternative to autologous grafts, although their overall performance and patency is still investigated.

Blood flow through a grafted vessel may depend on multiple factors such as vessel length, diameter, shape, angles, flow patterns, etc. The graft position in relation

to a target vessel (the vessel to which the graft connects at a distal end) has also an important impact on the flow. For normal blood flow through the bypass to the target vessel, the graft is generally required to be substantially patent, without stenosis or flow disturbances, such as turbulent flow.

5 US Patent No. 4,743,251 "VEIN PROTHESIS AND METHOD FOR PRODUCING SAME", relates to a prosthesis "intended to be implanted in a human patient for forming an aorto-coronary by-pass or another by-pass on other arteries. The prosthesis comprises a normal, unaltered living vein which is taken from the patient himself/herself and which is surrounded by a multiperforated flexible sheath. The inside 10 diameter of the sheath is so chosen that, after implantation, the outside diameter of the vein is maintained by the sheath at a value less than the maximum possible diameter of the vein and that the inside diameter of the vein is suitable for the diameter of the receiver artery."

US Patent No. 5,755,659 "METHOD OF MAKING A VASCULAR 15 PROSTHESIS", relates to "a vascular prosthesis for the replacement of blood vessels in the human or animal body, consisting of a section of a replacement blood vessel (3) which has been taken from a human or animal body and a fibro-elastic tube (2) which is drawn over this vascular section, whose intersecting threads (1) which form the tube wind in spiral form around the longitudinal axis of the tube, wherein the fibro-elastic 20 tube (2) is extended pointwise in the longitudinal direction with alteration of the diameter or is compressed and thereby is caused to contact the replacement vessel evenly over its total area."

US Patent Publication No. 2004/0215309 "COVERING ELEMENT FOR VEINS, METHOD FOR THE PRODUCTION AND USE THEREOF IN SURGERY", 25 relates to "sheathing for reinforcing natural veins for use as surgical implants in the form of textile netting that is configured by forming a seamless, tubular, essentially pile-less, knit fabric and has loops having large, open apertures having essentially polygonal shapes is made available."

US patent Publication 2007/0293932 "COMPLIANT BLOOD VESSEL 30 GRAFT", relates to "stents and methods of using stents are provided. Stents of the invention provide external support structure for a blood vessel segment disposed within, wherein the stents are capable of resilient radial expansion in a manner mimicking the

compliance properties of an artery. The stent may be formed of a knitted or braided mesh formed so as to provide the needed compliance properties. A venous graft with the stent and a vein segment disposed within is provided, wherein graft is capable of mimicking the compliance properties of an artery. Methods of selecting stents for 5 downsizing and methods of using the stents of the invention in downsizing and smoothening are provided. Methods of replacing a section of an artery with a venous graft including a stent of the invention are provided. Methods of reducing intimal hyperplasia in implanted vein segment in a venous graft using stents of the invention are provided."

10 US Patent No. 6,071,306, "EXTERNALLY STENTED VEIN SEGMENT AND ITS USE IN AN ARTERIOVENOUS BYPASS GRAFTING PROCEDURE", relates to "an arteriovenous bypass grafting procedure in which a vein segment is implanted into the arterial circulation of a mammalian subject, wherein a non-restrictive porous stent is provided around the grafted vein."

15

SUMMARY OF THE INVENTION

According to an aspect of some embodiments of the present invention there is provided an external vein support comprising an elongate axial body including an axis, the body comprising axial plasticity so that it is plastically deformable by at least one of 20 stretching, bending, twisting, and any combination thereof, relative to the axis. Optionally, the body is fixedly deformable in diameter at a plurality of points along a length of the body. Optionally, the body is radially elastic in at least one point of the plurality of points fixedly deformed.

According to some embodiments of the present invention, the body comprises a 25 substantially non-uniform diameter. Optionally, the body comprises a plurality of fibers arranged so that at a first average diameter, the springback of said body relative to the axis is substantially greater than at a second average diameter. Optionally, a reduction of the diameter decreases a percentage of the springback. Optionally, the percentage of the springback ranges from 0.5% to 50%.

30 According to some embodiments of the present invention, the axis is a longitudinal axis of the axial body. Optionally, the axis is a transverse axis of the axial

body. Additionally or alternatively, a reduction of the diameter decreases the resilience. Optionally, a reduction of the diameter increases the resilience.

According to some embodiments of the present invention, the body comprises a plurality of fibers arranged so that the support is radially elastic having previously been 5 fixedly deformed. Optionally, the body comprises at least one plastically deformable element. Optionally, the plastically deformable element is a plastically deformable fiber. Additionally or alternatively, the at least one plastically deformable fiber is spirally interlaced along the body.

According to some embodiments of the present invention, the body comprises a 10 plurality of non-plastically deformable elements. Optionally, at least one of the non-plastically deformable elements is an elastic fiber.

According to some embodiments of the present invention, the support further comprises an extension attachable to an end portion of the body. Optionally, the extension comprises a first opening and a second opening, the second opening skewed 15 relative to the first opening and forming an angle ϕ between 20 and 80 degrees relative to said axis. Additionally or alternatively, an end portion of the body is elastically deformable longitudinally along the axis.

According to an aspect of some embodiments of the present invention there is provided a method of mounting a vein, comprising attaching a vein to at least two 20 separate points in a vascular system; allowing blood to flow in and expand the vein; and shaping a vein support element mounted on the vein during the flowing. Optionally, shaping the vein support comprises plastically deforming the body by stretching the support along an axis. Optionally, shaping the vein support comprises plastically deforming the body by compressing the support along the axis. Optionally, 25 shaping the vein support comprises plastically deforming the body by axially bending the support .

According to some embodiments of the present invention, the method comprises including a radially elastic portion along a length of the body. Optionally, the method comprises decreasing springback by reducing the diameter.

30 According to an aspect of some embodiments of the present invention there is provided an extendable stent having at least two plastically deformable elements intersecting to form a braiding angle, wherein a plasticity of the stent in one or more

axes increases as the angle decreases from a larger angle in a stent first less extended position, to a smaller angle in a stent second more extended position. Optionally, the braiding angle is between 30 degrees and 150 degrees, inclusively. Optionally, the axes are one or more of: longitudinal axis, radial axis and transverse axis. Alternatively or 5 additionally, a plasticity of the stent in one or more axes decreases as the angle decreases from a larger angle in a stent first less extended position, to a smaller angle in a stent second more extended position. In an exemplary embodiment, when the stent angle decreases, the stent achieves increased plasticity in its longitudinal and/or transverse axes while lowering its radial plasticity (e.g., becomes more radially elastic).

10 According to an aspect of some embodiments of the present invention there is provided a method of increasing a plasticity of an extendable stent having at least two plastically deformable elements intersecting to form a braiding angle, by decreasing the braiding angle by extending said stent from a first less extended position to a second more extended position.

15 According to an aspect of some embodiments of the present invention there is provided a vein support for mounting on along vein, comprising a body adapted to cover at least partially the vein and elastically resist changes in diameter thereof along the vein, the body including at least one elongate plastically deformable structure which extends along the vein.

20 According to an aspect of some embodiments of the present invention there is provided a tubular implant including a plurality of fibers arranged so that at a first diameter, the elastic deformation of the support causes springback and at a second diameter, the plastic deformation reduces springback.

25 According to an aspect of some embodiments of the present invention there is provided a method of matching a vein support element to a vein diameter, comprising: providing an elongate vein support element; and fixedly deforming the vein support to have at least 2 different diameters therealong. Optionally, the method comprises resiliently resisting changes in diameter of the support, by the support.

30 According to an aspect of some embodiments of the present invention there is provided a method of supporting a vein, comprising mounting a support on a vein; and thereafter matching a length of said support, by non-elastic deforming thereof to at least cover a plurality of anastomosis region on the vein.

According to an aspect of some embodiments of the present invention there is provided a method of supporting a vein, comprising mounting a support on a vein; and thereafter non-elasticly deforming the support to define a layout of the vein independent of any attachment of the support to tissue other than the vein.

5 According to an aspect of some embodiments of the present invention there is provided a method of supporting a vein, comprising mounting a support on a vein; and thereafter deforming the support diameter to match the vein. Optionally, deforming comprises providing different diameters along the support.

According to an aspect of some embodiments of the present invention there is 10 provided a vein support for mounting on along vein, comprising a body adapted to cover at least partially the vein and elastically resist changes in diameter thereof along the vein, the body including at least one elongate plastically deformable structure which extends along the vein.

According to an aspect of some embodiments of the present invention there is 15 provided a method of adapting a vein support to a vein, comprising mounting at least a part of a vein support on a vein; adjusting a diameter of the portion; and repeating the adjustment for consecutive axial portions of the vein support. Optionally, adjusting comprises modifying a diameter by changing an axial length of the portion.

According to an aspect of some embodiments of the present invention there is 20 provided a method and device for providing a desired blood flow between a first point in a vascular system of a patient and a second point in the vascular system. A “desired blood flow” may be achieved by avoiding graft radial and/or axial and/or transverse deformation, or any other type of deformation or any combination thereof. Such deformations may be caused by vein graft inflation under arterial pressures, diameter 25 mismatches between a vein graft and host artery, and/or intimal/medial hyperplasia. The method comprising positioning a vein within a lumen of a vein support, attaching a first end of the vein to the first point in the vascular system with a first anastomosis so as to incorporate the vein into the vascular system, and deforming the vein support in response to the vascular system so that a lumen of the vein is selectively reshaped to 30 provide the desired bloodflow. “In response to vascular system” may mean, for example, in response to measured arterial pressure after connecting the bypass, and allowing blood flow therein, the surgeon can determine more accurately the diameter,

length and overall shape of the graft and derive the specific pre-deformation and/or post-deformation properties of the graft/vein support. Optionally, the vein support is deformed by manipulating the vein support sufficiently to impose a plastic deformation of the vein support that alters a length of the vein support from a pre-deformation 5 relaxed length to a post-deformation relaxed length different than the pre-deformation relaxed length, and wherein the manipulation of the vein support is performed while the vein is disposed in the vein support. Optionally, the length of the vein support is coupled to a cross-sectional diameter of the vein support so that the plastic deformation alters the diameter from a pre-deformation relaxed diameter to a post-deformation 10 relaxed diameter different than the pre-deformation relaxed diameter, and wherein the post-deformation diameter is selected in response to a diameter of the vein. Additionally or alternatively, the vein has the vein diameter at a first axial location of 15 the vein and another vein diameter at a second axial location of the vein, wherein the manipulation of the vein support is performed so that the vein support has the vein support diameter adjacent the first axial location and a second vein support diameter corresponding to the second vein diameter adjacent the second axial location.

According to some embodiments of the present invention, the vein support is deformed by manipulating the vein support sufficiently to impose a plastic deformation of the vein support that alters a path of the lumen between the first point and the second 20 point from a first relaxed axial path to a second relaxed axial path, the second path defining a different angle relative to the adjacent vascular system at the first point than the first path so that laminar flow through the vein is promoted by the manipulation of the vein support, and wherein the manipulation of the vein support is performed while the vein is disposed in the vein support.

25 According to some embodiments of the present invention, the vein support responds elastically to physiological stress associated with the bloodflow, and wherein the vein support responds plastically to manually imposed stress associated with the deforming of the vein support, the response of the vein support differing significantly from a compliance of natural arteries of the vascular system.

30 According to an aspect of some embodiments of the present invention there is provided a vein support for use with a vein to help provide a desired blood flow between a first point in a vascular system of a patient and a second point in the vascular

system by incorporation of the vein into the vascular system, the vein support comprising an elongate body having a first end and a second end with a channel therebetween, the elongate body having a relaxed pre-deformation configuration, the channel sized to freely receive the vein when the body is in the pre-deformation configuration so that an axis of the channel extends along an axis of the vein; and the body being manually manipulatable from the pre-deformation configuration to a relaxed post-deformation configuration selected in response to the vascular system, the channel in the post-deformation configuration supporting receiving the vein therein so as to inhibit tissue-response induced occlusion of the desired flow.

10 According to some embodiments of the present invention, the axial body is manipulatable from a pre-deformation relaxed length to a post-deformation relaxed length different than the pre-deformation relaxed length. Optionally, the post-deformation relaxed length is substantially greater than the pre-deformation relaxed length. Optionally, the post-deformation relaxed length is substantially smaller than the pre-deformation relaxed length. Additionally or alternatively, the post-deformation relaxed length is substantially equal to the length of the graft. Optionally, the graft is a saphenous vein graft. Optionally, the axial body is substantially tubular when in the pre-deformation relaxed length. Optionally, the axial body is substantially conical when in the post-deformation relaxed length. Additionally or alternatively, the axial body is substantially tubular when in the post-deformation relaxed length.

15 According to some embodiments of the present invention, manipulating the axial body to the post-deformation relaxed length allows natural cell growths through a periphery of the axial body, thereby naturally producing a composite graft. Optionally, the composite graft is substantially rigid. Optionally, the composite graft substantially differs from a native human coronary artery in at least one mechanical property. Additionally or alternatively, the composite graft substantially mimics a native human coronary artery in at least one mechanical property. Optionally, the mechanical property is radial compliance. Optionally, the composite graft length is substantially the same as the post-deformation relaxed length.

20 According to some embodiments of the present invention, the external vein support is configured to form the composite graft using natural cell growth through a periphery of the axial body when in the post-deformation relaxed length. Optionally,

the vein support is capable of resilient radial expansion in a manner providing compliance in the range of 3 – 30%/100 mm Hg. Optionally, the vein support is capable of resilient radial expansion in a manner providing compliance less than 5%/100 mm Hg.

According to some embodiments of the present invention, the axial body is further manipulatable to a chosen substantially non-linear contoured path. Optionally, the composite graft contour is substantially the same as the chosen substantially nonlinear contoured path.

Definitions of specific embodiments of the invention as claimed herein follow.

According to a first embodiment of the invention, there is provided an external vein support comprising an elongate axial body including a longitudinal axis, said body being plastically deformable by at least one of: stretching, bending, twisting and any combination thereof, relative to said longitudinal axis,

wherein said body has a first relaxed pre-deformation configuration, whereupon deformation thereof said body has a second relaxed post-deformation configuration different to said first relaxed pre-deformation configuration, and wherein said body maintains said second relaxed post-deformation configuration relative to said longitudinal axis in a manner suitable for the vein support to be attached to and support a vein in a vascular system of a patient, and wherein said body comprises at least one plastically deformable element.

According to a second embodiment of the invention, there is provided a method of supporting a vein, the method comprising:

connecting a first end of the vein to a first point in a vascular system of a patient with a first anastomosis so as to incorporate the vein into said vascular system;

mounting a vein support around the vein; and

plastically deforming said vein support relative to a longitudinal axis of said vein support, while said vein support is mounted on the vein, such that following said plastically deforming, said vein support substantially maintains a new shape relative to said longitudinal axis.

According to a third embodiment of the invention, there is provided a method of supporting a vein, the method comprising:

mounting a vein support around the vein; and

deforming said vein support, while said vein support is mounted on the vein, sufficiently to impose thereupon a plastic deformation that alters a length of said vein support from a pre-deformation relaxed length to a post-deformation relaxed length different to said pre-deformation relaxed length.

According to a fourth embodiment of the invention, there is provided a method of supporting a vein, the method comprising:

mounting a vein support around the vein; and

5 plastically deforming said vein support relative to a longitudinal axis of said vein support, while said vein support is mounted on the vein, such that following said plastically deforming, said vein support substantially maintains a new shape relative to said axis,

wherein said plastically deforming comprises deforming said vein support along said axis whereby springback of said vein support relative to said axis decreases.

0 Unless otherwise defined, all technical and/or scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which the invention pertains. Although methods and materials similar or equivalent to those described herein can be used in the practice or testing of embodiments of the invention, exemplary methods and/or materials are described below. In case of conflict, the patent specification, including definitions, will control. In addition, the materials, methods, and examples are illustrative only and are not intended to be necessarily limiting.

BRIEF DESCRIPTION OF THE DRAWINGS

Some embodiments of the invention are herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, 0 it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of embodiments of the invention. In this regard, the description taken with the drawings makes apparent to those skilled in the art how embodiments of the invention may be practiced.

In the drawings:

25 FIG. 1A schematically illustrates an isometric view of an exemplary vein support, in accordance with an embodiment of the present invention;

FIG. 1B schematically illustrates an enlarged view of a braided plastically deformable fiber and a plurality of deformable fibers in the vein support of FIG. 1A, in accordance with an embodiment of the present invention;

30 FIG. 2 schematically illustrates an exemplary vein support, in accordance with some embodiments of the present invention;

[Text continues on page 10]

10

FIG. 3 schematically illustrates an exemplary vein support, in accordance with some embodiments of the present invention;

FIG. 4 schematically illustrates an exemplary vein support, in accordance with some embodiments of the present invention;

5 FIG. 5A schematically illustrates an exemplary formable stent, in accordance with some embodiments of the present invention;

FIG. 5B schematically illustrates an enlarged view of a section of the stent of FIG. 5A, in accordance with some embodiments of the present invention;

10 FIG. 6 schematically illustrates a formable bellows cover support having a plurality of rings, in accordance with some embodiments of the present invention;

FIGs. 7A - 7C schematically illustrate a method of using a vein support in a vein-based bypass operation, in accordance with an embodiment of the present invention;

15 FIGs. 8A - 8C schematically illustrate side views of different supporting patterns for several exemplary graft segments, using a vein support, in accordance with some embodiments of the present invention;

FIG. 9A schematically illustrates an exemplary loose bodily vessel having a first free end and a second end connected to an artery of an internal organ, in accordance with some embodiments of the present invention;

20 FIG. 9B schematically illustrates a modular vein support, in accordance with some embodiments of the present invention;

FIGs. 10A - 10C schematically illustrate exemplary coverings and/or sleeves applied to an end portion of a vein support, in accordance with some embodiments of the present invention;

25 FIGs. 11A - 11C schematically illustrate exemplary end portions of plastically deformable fibers with welded ends, in accordance with some embodiments of the present invention;

FIG. 11D schematically illustrates an exemplary support with the end portions of the fibers shown in Fig. 11A - 11C welded in a connection, in accordance with some embodiments of the present invention;

30 FIG. 12A and 12B schematically illustrate exemplary end portions of a plurality of plastically deformable fibers looped together at a looping point and forming an end to a vein support, in accordance with an embodiment of the present invention;

FIGs. 13A – 13C schematically illustrate an insert for attaching a vein support to an anastomosis on a body organ, in accordance with an embodiment of the present invention;

5 FIGs. 14A – 14C schematically illustrate exemplary end portions a vein support for attaching over a distal anastomosis and over a proximal anastomosis, respectively, in accordance with some embodiments of the present invention;

FIG. 15A schematically illustrates an exemplary graft casting support in accordance with an embodiment of the present invention;

10 FIG. 15B schematically illustrates a portion of a heart to which a coronary artery is grafted, and a method to support the artery with a support, in accordance with some embodiments of the present invention;

FIGs. 16A and 16B schematically illustrate a graft casting support, in accordance with some embodiments of the present invention;

15 FIGs. 17A and 17B depict photographs of a portion of an extended support substantially resembling that used in a CABG procedure, and an enlarged view of a section of the support, respectively, in accordance with some embodiments of the present invention; and

20 FIGs. 18A – 18F schematically illustrate a typical support implantation procedure as followed by a surgeon performing a CABG procedure, in accordance with some embodiments of the present invention.

DESCRIPTION OF EMBODIMENTS OF THE INVENTION

The present invention, in some embodiments thereof, relates to a support for a 25 conduit in a body of a person or an animal, and in particular to a support for a grafted vessel inside a body.

An aspect of some embodiments of the present invention relates to a vein support for supporting body vessels such as, for example, blood vessels, wherein the support may be fixedly displaced relative to a longitudinal axis of the support by 30 plastically deforming the support relative to the axis. Plastically deforming the support relative to its longitudinal axis includes plastically stretching the support along the axis and/or plastically bending the support in a direction transversally to the axis, with

minimal (elastic) springback in the support (minimal elasticity such that the support substantially maintains its new shape relative to the axis from a perspective of an operator attaching the support). Optionally, the support may be plastically deformed to a plurality of points along the axis. Optionally, the support may be plastically reversely compressed in a direction along the axis.

In some embodiments of the present invention, the support, which may be tubular in shape, may include a diameter which may be fixedly deformed along a plurality of points of the longitudinal axis. This allows different portions (segments) of the support to have different diameters, optionally facilitating uniform support of a vessel with a varying cross-sectional diameter along its length, as for example in cases where the supported vessel is of non-uniform cross-section. Optionally, the support may include a radially elastic portion along a length of the support. Radial elasticity allows the segment to regain its fixedly deformed diameter despite application of a compressive force at one or more points along a circumference of the segment (once the compressive force is removed, the segment returns to the fixedly deformed diameter and does not remain deformed due to the applied force). A potential benefit of radial elasticity is that the vessel may return to its original shape once the compressive force is removed, and does not remain "pinched" by a permanent deformation of the support. In some embodiments, the radial elasticity is substantially maintained or increases as the diameter of the segment decreases and a length of the support increases. Alternatively, the radial elasticity decreases in such circumstances.

In some embodiments of the present invention, the support includes a meshed surface having at least one plastically deformable element. The mesh may be of any woven or non-woven type/design, including but not limited to: knitting, braiding, felting, crocheting, weaving and/or needling of a textile. Optionally, the support further includes at least one elastic member. In some embodiments of the present invention, the support includes a braid comprising at least one plastically deformable element. Optionally, the braid includes a plurality of deformable elements, some of which may be elastically deformable. Optionally, the plastically deformable element and/or the elastically deformable element include fibers. Optionally, the fibers are made of a biocompatible material and/or are treated and/or covered with a biocompatible material. Optionally, at least one fiber is biodegradable, and may degrade and/or be absorbed in

body for example between 3 to 18 months from day of treatment. Optionally, the support or at least one of its fibers includes drug eluting capabilities. A drug may be administered in a gradual manner towards the supported vessel outer surface (i.e., adventitia) and may permeate into vessel wall and/or inner volume thereof.

5 In some embodiments of the present invention, an end portion in the plastically deformable elements (in an end portion of the support) is substantially blunted, for example through a heat treatment which may include laser heating (for example laser welding or soldering), so as to reduce a possibility of injury to a vessel, or optionally a body organ, due to prickling or piercing by the end portion. Optionally, the end portion 10 in the plastically deformable element may be looped together with an end portion of a second plastically deformable element, and the end portions attached to the support (for example, by welding) so that they do not protrude outwards. Optionally, the end portions of the first element and the second element are connected together by the heat treatment, with the connection formed into a rounded shape. Optionally, a plastic 15 deformable element is looped around at the end portion of the support and is used to form a second plastic deformable element. Additionally or alternatively, the element is repeatedly looped around at the ends of the support to form a plurality of plastically deformable elements. Optionally, the end portion in the plastically deformable element is formed into a circular loop at the end portion of the support. Optionally, a sleeve may 20 be fitted over the end portion of the support for covering the end portion of the plastically deformable element.

In some embodiments of the present invention, the end portion of the support is configured at an angle for fitting over a proximal and/or a distal anastomosis. The angle θ may range from 20 – 80 degrees relative to the axis, for example from 20 – 40 degrees, from 20 – 55 degrees, from 20 – 65 degrees, and may optionally be 60 degrees. 25 Optionally, an angular fitting with two openings, one on each end, is configured such that one opening is shaped at an angle for fitting over a proximal anastomosis, and the second end is shaped to be attached to the end portion of the support. Additionally or alternatively, an end portion of the support includes only elastically deformable 30 elements which may be configured for fitting over the proximal anastomosis. The elastically deformable elements may be configured at an angle α which may range from 20 – 160 degrees relative to the longitudinal axis, for example from 20 – 60 degrees,

from 60 – 90 degrees, from 90 – 120 degrees, from 120 – 150 degrees, and may optionally be 150 degrees.

According to an aspect of some embodiments of the present invention, there is provided a formable (shapeable) tubular support for longitudinal bodily vessels (e.g., blood vessels) that is capable of shaping and/or casting and/or contouring a vessel segment to an operator selected, or optionally predetermined, shape and/or course (direction). The term "tubular support" and "formable tubular support" may be used hereinafter interchangeably with "support", "vein support", and "shapeable support". The tubular support may optionally be used intraluminally (e.g., as an expandable stent) and may be provided in a vessel segment and once deployed, may be set to change current route and/or impose a specific chosen route. Alternatively or additionally, the intraluminal support can be selectively set to a different length and/or diameter, e.g., according sclerosis plaque length and/or target vessel diameter. In an exemplary embodiment of the present invention, the formable tubular support is an external stent or sheath that is first deployed to envelope the target vessel segment prior to optionally setting a desired course.

In some embodiments of the present invention, the shaping is accomplished by differentially and/or gradually pressing and/or securing a segmented vessel according to an operator determined fashion. Alternatively or additionally, the formable tubular support provides a substantially spacious frame that is malleable and/or plastically formable to a requested shape by the operator, into which a live tissue may grow until utilization of a framed space, while taking the general shape of the frame.

In some embodiments of the present invention, the formable tubular support is applied to support and/or optionally treat a locally damaged and/or diseased vessel (e.g., an occluded/stenotic blood vessel). In a second exemplary embodiment, the formable tubular support is used for supporting and/or optionally improving mechanical properties of a grafted vessel, harvested or synthetic.

The vessel segment may optionally be at least a small portion of the total vessel length, or may substantially encompass a full length of a vessel. In an exemplary embodiment of the present invention, the formable tubular support can be fitted to different lengths, either predeterminedly or in-situ, and for example be cut-to-fit to the requested length and/or may be adjustably stretched accordingly.

In some embodiments of the present invention, the formable tubular support is capable of shaping and/or taking a shape in at least one dimension. Optionally, the formable tubular support is capable of maintaining a requested bent formation, alternatively or additionally a twisted formation, alternatively or additionally a curved formation of any kind. Optionally, the formable tubular support may be set to different three dimensional (3D) shapes. Optionally, the formable tubular support can be stretched to a requested length and substantially maintain it after removal of an elongating force. Optionally, the operator may adjust a chosen diameter and/or a peripheral shape of a specific vessel segment. Optionally, different shapes and/or diameters can be set along the vessel axis in contact with the formable tubular support.

In some embodiments of the present invention, the vein support is for protecting grafts from deformation such as kinking and for reducing or preventing restriction of blood flow in the graft. At least a portion of the support is made from a plastically deformable material so that the support may be shaped into a desired shape in which the support is stable in the body. The support may be used to impose a path on a grafted vein or artery in order to prevent or reduce deformation of the graft which might lead to kinking or folding and occlusion of the graft.

In some embodiments of the present invention, the vein support is deployed to support an anastomotic region, as for example in bypass surgeries. Optionally, the vein support supports at least part of a graft and at least one of its connection regions to a local bodily vessel. Optionally, the vein support includes a formable segment and a non-formable segment along its length. Optionally, at least part of the non-formable segment encircles the anastomosis region.

In some embodiments of the present invention, the plastically deformable material includes or is made of metallic material (e.g., stainless steel, Cobalt Chrome alloy, Aluminum, Titanium, etc.), optionally a polymer having plastic properties, optionally a putty-like modeling material, optionally a composite element that includes a plastically deformable matrix and/or binder materials. The material may include a combination of brittle and/or solid elements glued together by elastic fastening means. The material may include a non-setting adhesive or cement, optionally porous, which may optionally be applied in-situ (e.g., by spraying or other covering means).

In some embodiments of the present invention, the formable tubular support is provided as a spine-like element comprising a plastically deformable spine portion and a plurality of spaced apart extensions that are substantially tubular or can take a substantially tubular fashion in order to support a tubular bodily vessel. Optionally, at 5 least one of the extensions is plastically deformable. Alternatively or additionally, at least one of the extensions is elastic (i.e., may substantially resume a former shape and/or diameter once an external unyielding force is removed).

In some embodiments of the present invention, the formable tubular support is provided as a mesh that includes at least one plastically deformable thread. The mesh 10 may be braided, woven, knitted, pressed and/or in any other known construction and/or any combination thereof. The at least one thread may be a wire, a yarn, a filament a fiber, a rod, a stripe or any other longitudinal element having a relatively large length-to-diameter/width ratio; and may be made of any plastically deformable material, including but not limited to metal, polymers, composites, glued bundles, or any 15 combination thereof.

In some embodiments of the present invention, the formable meshed support further includes at least one elastic member (either a thread or any other structural element) that provides elastic properties in at least one dimension. Optionally, the meshed support is plastically bendable and/or stretchable while maintaining elastic 20 properties in at least a portion of its peripheral along its length (e.g., when compressed it will substantially resume its original peripheral shape, once the compressive force is removed). Optionally, the meshed support is a braided tubular support with at least one plastically deformable thread braided with at one elastically deformable thread.

In some embodiments of the present invention, the braided support is deployable 25 as an external support to a blood vessel and/or a graft, and may be selectively transformed from a first compressed mode characterized by a large diameter, to a second stretched mode characterized by a smaller diameter, and vice versa. Optionally, while stretched or compressed, the braided support substantially preserves same or similar diameter-length ratio. Alternatively, there is no ratio and/or a fixed ratio 30 between braid support's length and diameter, and any of these parameters may be set substantially independently. Optionally, the braided support can be stretched over at least part of the vessel/graft length until reaching a required diameter and/or length. In

an exemplary embodiment, once stretched, the braided support substantially maintains its new length with minimal to no springback. Optionally, the braided support or a segment thereof can be substantially formable only after being set to a nominal stretched position. Optionally, the nominal stretched position is linked to a specific 5 allowed/chosen springback value and/or to such a springback value. Optionally, the nominal stretched position is characterized by a braid angle of 0-180 degrees, optionally 10-100 degrees, optionally 25-60 degrees, or greater or lesser, or in-between.

In some embodiments of the present invention, at least one plastically deformable thread is interbraided in a tubular braided pattern further comprising at least 10 one non-plastically deformable thread. Alternatively or additionally, at least one plastically deformable thread is wrapped around and over the tubular braided pattern. Optionally all plastically deformable threads are wrapped and/or interbraided in a single direction (“coiled formation”). Alternatively, at least two plastically deformable threads are wound and/or interbraided in opposite directions (“braid formation”).

15 In some embodiments of the present invention, the operator may choose to allow non-restrictive vessel/graft support by setting the second stretched mode to a diameter larger than vessel/graft outer diameter. Alternatively, the operator may choose to constrict or mechanically resist a possible expansion of the vessel/graft by choosing a diameter that is equal or smaller than vessel/graft outer diameter. According to design, 20 the braided support can be fully restrictive (i.e., having solid properties not allowing radial expansion of the braid) or partially restrictive (i.e., having specific elastic/compliance properties,). The braided support may include any combination of the above at different locations along its length. Optionally, the operator can now manipulate the braided support to a requested route that can be curved, bent, twisted or 25 in any other variation.

In some embodiments of the present invention, specific braid pattern and/or threads parameters are chosen for a tubular blood vessel support to allow at least one of the following end points:

30 (1) in-situ formability of at least one support segment to a chosen fixed tubular and/or coaxial shape;

(2) in-situ formability of at least one support segment to a chosen fixed length;

- (3) in-situ formability of at least one support segment to a chosen fixed diameter and/or a chosen fixed diameter slope;
- (4) in-situ formability of at least one support segment to a chosen fixed course, while maintaining a substantially rounded contour;
- 5 (5) maintaining radial elasticity of at least one support tubular segment.

In some embodiments of the present invention, the formable tubular support is provided as a radially-collapsible support that can be sleeved over a vessel/graft while in expanded mode and then be set to a selected second collapsed mode (or alternatively may self-collapse to the second mode once a collapsing-resisting force is removed).
10 Optionally, the support is set to be locked in the second mode formation. Optionally the support is so design to be selectively stretched up to a maximal length, with or without altering the support diameter. Additionally or alternatively, the support is shapeable and can be set to take specific form(s) as selected by operator. Optionally, the support includes at least one pre-set form that the operator can choose to set into. Alternatively
15 or additionally, the support may be at least partially malleable and optionally may take complex forms chosen in-situ by the operator.

In some embodiments of the present invention, the formable tubular support is provided as a generally non-rigid tubular element with at least one plastically deformable joint, capable of bending and/or twisting. Optionally, the non-rigid element
20 includes textile fibers (including but not limited to aramid/Dacron® fibers), optionally soft plastic/rubber, optionally nylon, optionally silicone. Optionally, at least one plastically deformable joint is fastened to a specific location along the tubular element periphery. Alternatively or additionally, at least one plastically deformable joint can be set to different positions along the tubular element by the operator. Optionally, at least
25 one plastically deformable joint is a ring- or a bracelet-like element covering a portion of the non-rigid tubular element, which can set to move along the tubular element, optionally in a corresponding slot. Accordingly, the operator may cover a bodily vessel/graft with the formable tubular support and then place the at least one joint at a chosen location and bend it to a certain degree while altering the route of the non-rigid element and encompassed vessel/graf.
30

In some embodiments of the present invention, the formable support is provided as a tube and can only be pulled over (or under) the tubular bodily vessel or graft having

at least one free end (i.e., prior to anastomosing). Alternatively, the formable support is opened along its length and can be closed over the bodily vessel/graft (e.g., similarly to a bracelet-cuff) using closing means, such as clips, hooks, adhesives, sewing means, zipping means, and/or may be deformably closed by applying enough force.

5 In some embodiments of the present invention, the formable tubular support is provided as plurality of coupling members or “building blocks” to modularly form a shaped tubular implant in-situ. Preferably, the coupling members are provided in different shapes, e.g., bent, curved and/or maintain any other non-tubular shapes, some may vary in diameter. Optionally, the operator may couple at least two coupling members over a target vessel/graft periphery and may choose specific shaped coupling members in order to set a specific chosen course. In this case, some or any of the coupling members may be rigid, elastic and/or plastic but may not be bounded to include plastically deformable members as previously described.

10

In some embodiments of the present invention, the formable tubular support includes at least one biodegradable and/or bioabsorbable element, e.g., magnesium, magnesium oxide, Polyglycolide (PGA), Polylactide (PLA), Poly(ϵ -caprolactone), Poly(dioxanone), Poly(lactide-co-glycolide), polyhydroxybutyrate (PHB) and polyhydroxyvalerate (PHV), etc.

15 In some embodiments of the present invention, the formable tubular support may be used in all types of bypass surgeries including cardiac and peripheral bypass procedures; as well as all kinds of surgical procedures that contain vascular anastomosis and/or reconstructions such as hepatic, renal, cardiac, pulmonary, intestinal transplantations and all kinds of vascular reconstruction procedures in which a portion of a vessel, or vessel anastomosis might be in jeopardy due to the reasons mentioned 20 above. The vein support may also be beneficial in other vascular surgical procedures, and limb reconstructions or transplantations.

25 In some embodiments of the present invention, the formable tubular support comprises a sleeve having a lumen adapted to receive a vascular graft. Optionally, the support includes a spine and a plurality of looped extensions extending from the spine. 30 Optionally, the support includes a braided or woven sleeve. Optionally, the support further includes a conical termination adapted for attachment to a body tissue.

Optionally, the support is made from a biodegradable material, optionally configured to elute or contain a pharmacological substance.

In some embodiments of the present invention, the formable tubular support includes:

- 5 (a) a first substantially tubular segment in contact with the bodily vessel and having a first longitudinal axis;
- (b) a second substantially tubular segment in contact with the bodily vessel and having a second longitudinal axis positioned in a first angle to the first longitudinal axis; and
- 10 (c) at least one plastically deformable member engaged with the first and second substantially tubular segments, thereby allowing to selectively set a second angle between the first and second longitudinal axes.

Optionally, the selective setting changes the shape of the support and/or the shape of the bodily vessel. Optionally, the bodily vessel is an artery, a vein, or a graft. Optionally, 15 the support is a stent, a meshed sleeve element, a spine-like element or a sheath element.

In some embodiments of the present invention, the formable tubular support externally supports the bodily vessel. Alternatively, the support internally supports the bodily vessel. Optionally, the first and second substantially tubular segments are 20 interconnected. Optionally, the support includes a braided material with at least one plastically deformable thread. Optionally, the support further includes a plurality of elastic interlaced threads. Optionally, at least one thread is made from a biocompatible metal selected from the group consisting of Cobalt-Chrome alloy, Nitinol alloy, magnesium, magnesium alloy, tantalum and multiphase alloy. Alternatively or 25 additionally, at least one thread is made from a biocompatible polymeric material selected from the group consisting of silicone, nylon, polyethylene, polyamide, aramid, polypropylene, PTFE and PET. Alternatively or additionally, at least one thread is made from a biodegradable material selected from the group consisting of magnesium oxide, Polyglycolide, Polylactide, Poly(ϵ -caprolactone), Poly(dioxanone), Poly(lactide-co-glycolide), polyhydroxybutyrate and polyhydroxyvalerate. Optionally, the support 30 further includes at least one elastic member engaged with the first and second substantially tubular segments.

In some embodiments of the present invention, the formable tubular support is shaped as a curved tunnel, and/or as a straight tunnel and/or in a gradual decreasing diameter tunnel. Optionally, the support is plastically stretchable to a chosen length. Optionally, stretching the support will cause a decrease of an inner diameter thereof.

5 Optionally, at least one of the substantially tubular segments is plastically stretchable. Optionally, stretching of one of the substantially tubular segments will cause a decrease of an inner diameter thereof.

In some embodiments of the present invention, the formable tubular support includes a plastically deformable member that is coiled over the substantially tubular segments. Optionally, the plastically deformable member is interbraidedly coiled around said substantially tubular segments. Alternatively or additionally, at least two plastically deformable members are coiled around the substantially tubular segments in opposite directions. Optionally, the plastically deformable member extends substantially along the support. Alternatively, the plastically deformable member extends along a portion of the support.

In some embodiments of the present invention, at least a portion of the support maintains radial elasticity. Optionally, at least a portion of the support resumes a substantially cylindrical shape after a non-circumferential external force is removed from its periphery. Optionally, the support substantially restricts radial expansion of at least a portion of the bodily vessel. Optionally, the support allows a radial expansion of at least a portion of the bodily vessel to a predetermined maximal diameter. Optionally, the support changes radial compliance of at least a portion of the bodily vessel, for example by substantially mimicking a predetermined value.

In some embodiments of the present invention a braided external support, 25 includes:

- (a) a lumen adapted to receive a bodily vessel;
- (b) a plurality of interbraided elastic threads wounded around the lumen; and
- (c) at least one plastically deformable thread further interbraided with the elastic threads;

30 wherein the braided external support is adapted to reform into different substantially stable shapes.

In some embodiments of the present invention, a method of supporting a bodily vessel includes:

- 5 (a) providing a support around the bodily vessel;
- (b) stretching the support over a portion of the bodily vessel; and
- (c) manipulating the support to alter the bodily vessel shape.

Optionally, the stretching is accomplished by applying opposite forces between two points along the support; wherein the stretching promotes a decrease of an inner diameter of the support between the two points. Optionally, the support is provided adjacent to anastomosed region of the bodily vessel. Optionally, the support is shaped as a curved tunnel and/or a straight tunnel and/or a gradually decreasing diameter tunnel. 10 Optionally, step (a) further includes determining a course to the bodily vessel. Optionally, the shape substantially simulates said determined course.

In some embodiments of the present invention, the method of supporting a bodily vessel includes:

- 15 (a) providing a first external sleeve around a first portion of the bodily vessel;
- (b) providing a second external sleeve around a second portion of the bodily vessel adjacent to the first portion; and
- (c) circumferentially attaching in-situ the first and second external sleeves;

wherein the first and second external sleeves differs in shape.

20 The inventors conducted a feasibility study including a CABG procedure on a sheep to evaluate the formable tubular support's positioning procedure; to evaluate safety of the support; and to evaluate the support's initial performance. The sheep was selected as its cardiovascular system is similar to that of humans; the sheep's growth rate is low comparing to other applicable models (e.g. swine model), allowing for a relatively long follow up period without substantial change in the size of organs; and the vein harvesting procedure is relatively easier and efficient compared to other applicable models. The support used was a cobalt chrome, biocompatible, braided support comprising 38 elastically deformable chrome wires of diameter 43 microns, and 4 annealed plastically deformable cobalt chrome wires of diameter 150 microns; the wires intertwined symmetrically into a braid structure. After a three month period 25 following the CABG procedure involving the placement of the support, the sheep was scarified and the grafts and the heart harvested. Macroscopically, no damage to the heart 30

was seen and the graft+ support system composite, like the rest of the operational field, was embedded in connective tissue and fat. The external support was fixed to the vein graft and was located exactly where it was positioned at the end of the surgery, with the same length and diameter.

5 The inventors further conducted testing to corroborate the length/diameter stability of the support and its capability to maintain a desired shape after being exposed to high pressure/high pulse physiological conditions. The testing included in vitro testing using plastic tubes through which water flowed to simulate arteries/veins with blood flow through them. Two different supports were tested, a first support comprising 38 cobalt chrome elastically deformable wires (50 microns diameter each) and 4 annealed plastically deformable cobalt chrome wires (150 microns diameter each); and a second support comprising 36 cobalt chrome elastically deformable wires (50 microns diameter each) and 6 annealed plastically deformable cobalt chrome wires (150 microns diameter each). The result of the in vitro tests showed no difference between the initial and final 10 length of each support; that the supports can maintain their length/diameter and shape in relatively extreme physiological conditions; and that 4 annealed plastically deformable cobalt chrome wires may be used in lieu of 6 annealed plastically deformable cobalt chrome wires. Based on the results of the in vitro testing, the inventors have 15 additionally determined that other suitable braided configurations for the support, which will provide higher radial compliance, may include a braid comprising 40 elastically deformable cobalt chrome wires of diameter 43 microns and 2 annealed plastically deformable cobalt chrome wires of diameter 150 microns, and a braid with the same 20 number of wires as the first braid tested but with 4 annealed plastically deformable cobalt chrome wires of diameter 100 – 125 microns. Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not 25 necessarily limited in its application to the details of construction and the arrangement of the components and/or methods set forth in the following description and/or illustrated in the drawings and/or the Examples. The invention is capable of other embodiments or of being practiced or carried out in various ways.

30 Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not necessarily limited in its application to the details set

forth in the following description or exemplified by the Examples. The invention is capable of other embodiments or of being practiced or carried out in various ways.

Exemplary plastically deformable vessel supports

Referring now to the drawings, Figure 1A schematically illustrates an isometric view of an exemplary vein support 100, in accordance with an embodiment of the present invention. Reference is also made to Fig. 1B which schematically illustrates an enlarged view of a braided (interlaced/ interwoven) plastically deformable fiber 102 and a plurality of deformable fibers 104 in support 100, in accordance with an embodiment of the present invention. Vein support 100 supports body vessels such as, for example 10 blood vessels (not shown), wherein the support may be fixedly displaced relative to an axis 108 by plastic deformation of the support relative to the axis. Support 100 may be plastically stretched along axis 108, and may be additionally compressed along the axis, with minimal or optionally, no springback. Optionally, support 100 may be axially bent (by applying a force with a component perpendicular to axis 108) and/or may be twisted 15 about the axis, with minimal or optionally no springback. That is, elastic forces acting on support 100 to return it to its previous shape (prior to stretching, compressing, bending, or twisting, or any combination thereof) are minimal and the support substantially maintains the new shape.

In some embodiments of the present invention, vein support 100 includes a 20 diameter **d** which may be variable and fixedly deformed along axis 108. Optionally, different segments of the support may be manipulated to have different diameters. Fixedly deforming diameter **d** along axis 108 allows for an operator to adjust different segments, points or sections of the support to a varying cross-sectional diameter of the vessel, thereby providing a more uniform support and sheathing of substantially 25 uniform as well as substantially non-uniform vessels.

Optionally, support 100 may include a radially elastic portion along a length of support 100. Radial elasticity allows the segment to regain its fixedly deformed diameter despite application of a compressive force at one or more points along a circumference of the segment (once the compressive force is removed, the segment 30 returns to the fixedly deformed diameter and does not remain deformed due to the applied force). A potential benefit of radial elasticity is that the vessel may return to its original shape once the compressive force is removed, and does not remain "pinched"

by a permanent deformation of support **100**. In some embodiments, the radial elasticity may decrease as the diameter of the segment decreases and a length of support **100** increases. Optionally, an elasticity of the portion increases as the support increases in length and diameter **d** decreases.

5 Support **100** may be a braided tubular body having a lumen **106** extending from a proximal end to a distal end (also from distal end to proximal end), and includes at least one plastically deformable element which may be, for example, plastic deformable fiber **102**. As shown in the figure, support **100** includes a plurality of fibers **102**, which are shown helically (spirally) wound along the length of the support, some in a 10 clockwise direction, and others in a counterclockwise. Optionally, fiber **102** may helically wind along the length of support **100** from one direction, clockwise or counterclockwise. Support **100** may include a plurality of deformable elements such as, for example elastic fibers **104**, which may be interlaced with plastic deformable fiber **102**. Optionally, fibers **102** may be interlaced with other plastic deformable fibers.

15 Fiber **102** may be made from any plastically deformable material including but not limited to metal, stainless steel or plastic. Fiber **104** may be plastically deformable, elastically deformable, super-elastically deformable, or may posses any other non-rigid property. Optionally, fibers **102** and **104** are made from a same material but posses different mechanical properties (e.g., plastic vs. elastic properties) due to different 20 material preparations. For example, in some embodiments, fiber **102** may be an annealed metallic fiber and fiber **104** may be a cold-worked metallic fiber. Optionally, fiber **102** and/or **104** may include biocompatible metals, e.g., biocompatible super alloys, and/or are selected from a group consisting of Cobalt-Chrome alloy, Nitinol alloy, magnesium, magnesium alloy, tantalum, multiphase alloy (e.g., MP35N), or any 25 combination thereof. Optionally, fiber **102** and/or **104** may include biocompatible polymeric materials and/or are selected from a group consisting of silicone, nylon, polyethylene (e.g., dyneema® or Spectra®), polyamide/aramid (e.g., Kevlar®), polypropylene, polytetrafluoroethylen (PTFE), Polyethylene terephthalate (PET), or any combination thereof. Optionally, fiber **102** and/or **104** are biodegradable and/or 30 bioabsorbable materials, and/or are selected from a group consisting of magnesium oxide, Polyglycolide (PGA), Polylactide (PLA), Poly(ε-caprolactone), Poly(dioxanone),

Poly(lactide-co-glycolide), polyhydroxybutyrate (PHB), polyhydroxyvalerate (PHV), or any combination thereof..

In some embodiments of the present invention, support **100** may externally cover and support a body vessel, which may be a graft, while maintaining its shape.

5 Optionally, support **100** may be used as a sheath to wholly, or optionally partly, constrict a radial expansion in the vessel. Optionally, the radial expansion is limited to a predetermined maximum diameter. Additionally or alternatively, support **100** may be used to wholly, or optionally partly, restrict kinking in the vessel. Optionally, support **100** may be used to add to the vessel's radial compliance, which is given by a ratio of a

10 diameter change of a vessel as it expands in a radial direction in response to a given change in vessel pressure. Additionally or alternatively, support **100** may support the vessel under systolic and/or diastolic and/or under peak and/or pulsative pressures of 400mmHg or less, optionally 200mmHg or less.

In some embodiments of the present invention, plastically deformable fiber **102** is configured to enable support **100** to be plastically deformed by the operator and manipulated into a required fixed shape. Optionally, support **100** may be manipulated by the operator to accommodate for a vessel to follow over a specific path inside a body (not shown) to a target vessel (that to which a distal end of a vessel is being attached by anastomosis), and/or to accommodate to a shape of the target vessel. Optionally, the operator may stretch support **100** before or after covering the target vessel until reaching a required length and/or a maximal allowed length. Optionally, stretched support **100** substantially maintains a stretched length under similar pressure regimes as described above. Optionally, when longitudinally stretching support **100** between two particular points along axis **108**, a diameter **d** of the segment of the support between the points decreases. Optionally, when compressing support **100** longitudinally between two points along axis **108**, diameter **d** increases in the segment between the two points.

In some embodiments of the present invention, plastic deformation of support **100** is determined by a braiding angle formed by a diagonal intersection of a first and second plastically deformable fibers **102** (e.g., angle **θ** shown in Fig. 11D), the braiding angle associated with a nominal length of the support. As support **100** is stretched braiding angle **θ** decreases, increasing the axial plasticity of the support, and optional its radial elasticity , That is, for a braiding angle greater than a maximal braiding angle,

for example 150 degrees when an average diameter **d** in support **100** is approximately 8mm (the angle may also be indicative of the support being below the nominal length), the support is acted upon by elastic forces preventing the support from being fixedly displaced relative to axis **108** (the support does not necessarily maintain the shape). For 5 a braiding angle lesser than a minimal braiding angle, for example 71.4 degrees where diameter **d** in support **100** is reduced to below 5 mm, (see Table-1 further on below in section Examples) (the angle may also be indicative of the support being above the nominal length), the plastically deformable fibers **102** are much more dominant in the longitudinal length, resulting in an overall greater plasticity of support **100** relative to its 10 axis **108**, as previously described. Optionally, the nominal length is characterized by a braid angle ranging between 0 – 180 degrees, for example, 10 degrees, 30 degrees, 45 degrees, 60 degrees, 90 degrees, 120 degrees, 150 degrees.

A principle of the design is to have a good tradeoff between minimal 15 determination, selecting a combination of plastic fibers and elastic members having a defined number of fibers, a defined diameter, heat treatment conditions, interlacing combination, among other characteristics as described below. For example, as previously described, the fibers may be from cobalt-chrome. Plastically deformable fiber **102** may then be annealed so as to give the fibers their plastic deformable characteristics. Non-plastically deformable fiber **104** may be cold worked so as to give 20 the fibers their elastic characteristics.

In some embodiments of the invention, springback from stretching support **100** may range from 0.5% - 50%, for example, 0.5% - 5%, 2% - 10%, 2% - 20%, 2% - 30%, 2% - 40%, Optionally, springback in radial elasticity may range from 2% to 50%, for example, 2% - 5%, 2% - 10%, 2% - 20%, 2% - 30%, 2% - 40%,

25 In some embodiments of the present invention, plastically deformable fiber **102** may have an average diameter in the range of 20 to 1,000 μm , optionally between 50 to 200 μm , optionally approximately 75 μm , optionally approximately 150 μm . Optionally, fibers **104** are elastic and have an average diameter in the range of 10 to 500 μm , optionally between 20 to 100 μm , optionally approximately 43 μm .
30 In some embodiments of the present invention, support **100** includes at least 4 fibers, optionally 10 – 20 fibers, optionally 20 – 50 fibers, optionally 50 - 100 fibers, optionally 100 – 200 fibers, optionally more than 200 fibers. Optionally, support **100** includes less

than 4 fibers. Optionally, support **100** includes one or more fibers **102**, for example 1 – 10 fibers, 1 – 20 fibers, 1 – 50 fibers, 1 – 100 fibers, or more. Optionally, support **100** includes at least one fiber **102**, for example 1 – 10 fibers, 1 – 20 fibers, 1 – 50 fibers, 1 – 100 fibers, 1 – 500 fibers, or more.

5 In some embodiments of the present invention, support **100** may include 36, 42 or 48 fibers, out of which 4, 6 or 8 are plastically deformable fibers **102** having a diameter in a range of 75-150 μ m, and the remaining fibers are fibers **104** having a diameter in a range of 25-75 μ m. Optionally fibers **102** and/or **104** have a relatively circular cross section, optionally polygonal, optionally flat, or any combination thereof.

10 In some embodiments of the present invention, support **100** includes a pre-stretched (prior to plastic deformation along axis **108**) length in a range of 5 to 1,000mm, optionally 30 to 500mm, optionally 50 to 100mm. Optionally, support **100** includes a pre-stretched length less than 10 mm. Optionally, a pre-stretched diameter **d** may be in a range between 1 to 80mm, for example 4 to 30mm, 5 to 10mm, and may be 15 constant along the pre-stretched length of the support. Optionally, diameter **d** decreases in relation to the braid angle. Optionally support **100** may be stretched (plastically deformed) until reaching a minimal diameter of 1 to 40mm, optionally 1 to 5mm, optionally 3-4mm. Optionally, in the pre-stretch length, the braid angle may range from 50 to 200 degrees, optionally 120 to 180 degrees, or higher or lesser or intermediate. 20 Optionally, support **100** may be stretched until the diameter **d** averagely decreases to between 1 mm – 15mm, for example, 8mm, 6mm, 4mm, or 2mm.

25 In some embodiment of the present invention, support **100** may be configured for use in peripheral vein grafts, which may substantially differ from coronary vein grafts with increased length and diameter and more significant diameter change along its length. Optionally, Support **100**, at stretched out length, may range from 10 mm to 2,000 mm, for example, 50 mm – 1,500 mm, 100 mm – 1,000 mm, 300 mm – 800 mm, 400 mm – 600 mm. In peripheral vein grafts, support **100** may include a diameter which, following stretching out of the support, may range from 3 mm – 12 mm, for example 5 mm – 9 mm. Optionally, support **100** may be tapered so that a proximal end 30 has a larger diameter than a distal end following stretching out. Optionally, the distal end may have a greater diameter than the proximal end.

In some embodiments of the present invention, an axial stiffness and/or radial force of support **100** varies when stretched or compressed. Optionally, axial stiffness at different stretching positions is in the range of 0.1 to 30 N/m, optionally between 0.3 to 20 N/m. Optionally, the axial stiffness is 0.4-1 N/m, optionally about 0.6 N/m, when support **100** is fully compressed and/or its diameter is 5 to 10mm, optionally about 8mm. Optionally, the axial stiffness is 10-20 N/m, optionally about 15 N/m, when support **100** is fully mode and/or its diameter is 1 to 5mm, optionally about 3mm.

Shown below in Examples is Table-1 which shows calculated diameters, lengths, braid angles and axial stiffness properties, at different stretching positions, for a support comprising 38 elastic fibers of 0.05mm in diameter, braided on an 8mm mandrel and using 150° braiding angle, in accordance with an embodiment of the present invention.

Reference is now made to Figs. 2, 3 and 4 which schematically illustrate exemplary vein supports **200**, **300** and **400** respectively, in accordance with some embodiments of the present invention. Supports **200**, **300**, and **400** are similar to support **100** shown in Fig. 1, with a difference that a tubular body of each support includes a different braiding pattern.

As shown in Fig. 2, support **200** includes a plurality of plastically deformable fibers **202** helically winding in a counterclockwise direction along the length of the support, in a general direction parallel to axis **208**. Optionally, fiber **202** may helically wind in a clockwise direction along the length of support **200**. Support **200** includes a plurality of non-plastic deformable elements such as, for example deformable fibers **204**, interlaced with plastic deformable fiber **202** to form the braided tubular body. Optionally, fiber **202** may be interlaced with other plastic deformable fibers. Fiber **202** and fiber **204** may be substantially the same as fiber **102** and fiber **104** shown in Fig. 1.

As shown in Fig. 3, support **300** includes a single plastically deformable fiber **302** extending along the length of the support parallel to axis **308**. Optionally, support **300** may include a plurality of fibers **302** extending along the length of the support parallel to axis **308**. Support **300** includes a plurality of non-plastic deformable elements such as, for example deformable fibers **304**, interlaced with plastic deformable fiber **302** to form the braided tubular body. Fiber **302** and fiber **304** may be substantially the same as fiber **102** and fiber **104** shown in Fig. 1.

As shown in Fig. 4, support 400 includes a plurality of plastically deformable fibers 402, some helically winding in a counterclockwise direction and some in a clockwise direction, along the length of the support, in a general direction parallel to axis 408. Support 400 includes a plurality of non-plastic deformable elements such as, 5 for example deformable fibers 404, interlaced with plastic deformable fiber 402 to form the braided tubular body. Optionally, fiber 402 may be interlaced with other plastic deformable fibers. Fiber 402 and fiber 404 may be substantially the same as fiber 102 and fiber 104 shown in Fig. 1.

Reference is now made to Fig. 5A which schematically illustrates an exemplary 10 formable support 500, and to Fig. 5B which schematically illustrates an enlarged view of a section of the support, all in accordance with some embodiments of the present invention. Support 500 may be any metal or polymeric support that can be shaped in at least one axis, including but not limited to an axis 508, radial axis or any combination thereof, and/or may be curved and/or bent and/or twisted and/or be selectively locked, at 15 least partially, in a specific form chosen by an operator. Optionally, Support 500 is an intraluminally radially-expandable support and/or an extraluminally radially-collapsible support. Optionally, a diameter (not shown) of support 500 may be selectively varied by the operator, optionally gradually. Optionally, support 500 is self-expandable (held compressed and expands when released) or collapsible after deployment. Optionally, 20 support 500 may be manually expandable and/or balloon expandable. Optionally, support 500 may be plastically deformed to a required length. Optionally, support 500 includes a diameter which decreases when the support stretches along/relative to axis 508.

In some embodiments of the present invention, support 500 may be a braided 25 support including at least one plastically deformable strut 502. Optionally, struts 502 may define openings 506 that can be of any shape, including but not limited to polygonal shapes, optionally quadrangular. Optionally, struts 502 may include similar plastically deformable characteristics to those of fiber 102 shown in Fig. 1. Additionally or alternatively, support 500 may include any other type of support, 30 including but not limited to bare metal/polymeric support, drug eluting support that may or may not be produced by one of more of the followings methods; laser cutting, EDM, chemical etching, micromachining, photo-etching and water-jet laser cutting.

Reference is now made to Fig. 6 which schematically illustrates a formable bellows cover support **600** having a plurality of rings **607**, in accordance with some embodiments of the present invention. Optionally, bellows **600** are plastically deformable and can maintain any curved and/or bent shape as described in this disclosure. Optionally, bellows **600** are stretchable and can maintain a chosen length along axis **608**.

Exemplary method of treatment

Reference is now made to Figs. 7A - 7C which schematically illustrate a method of using a vein support **700** in a vein-based bypass operation, in accordance with an embodiment of the present invention. It should be evident to an ordinary person skilled in the art that the method described is not intended to be limiting in any way, and that there are many other ways of implementing the method. Furthermore, the vein-based bypass operation may refer to any type of operation comprising a vascular graft. Vein support **700** may be the same as vein support **100** shown in Fig. 1. Optionally, vein support **700** may be the same as that shown in Figs. 2, 3, 4, 5A, or 6 at **200**, **300**, **400**, **500**, or **600**, respectively.

In general, deployment of support **700** may be performed in-situ during a bypass surgery, such a CABG surgery, or in any other surgical intervention. Optionally, support **700** may be deployed in an open surgery with or without a heart-lung machine. Alternatively, support **700** may be deployed minimally invasively and/or percutaneously. Optionally, a special delivery device (not shown) may be used to introduce support **700** into a body and/or to deploy the support over a target graft or vessel segment and/or to stretch at least part of the supporting element to a chosen length, and/or to shape, contour and/or cast the graft/vessel in a required shape by altering the support. Alternatively or additionally, support **700** may be introduced manually, for example in an open surgery. Optionally, support **700** may be sleeved over a vessel while in a first larger minimal diameter later to be optionally set to a second smaller minimal diameter. Optionally, the supporting element may include a distal end that is wider than the average diameter of the supporting element, which may serve as a leading edge for sleeving over a vessel.

Graft 721 includes a graft body 720 having a first end 724, a second end 722 and a lumen 728. Optionally, graft 721 is a bypassing channel being anastomosed during a bypass surgery to internal organs 750 that include first and second bodily vessels 752 and 754. Optionally, the bypass surgery is a CABG surgery. Optionally, graft 721 is a 5 saphenous vein graft although it can be any type of autologous or donor or synthetic graft. Optionally, the first and second vessels 752 and 754 are arteries, or alternatively veins.

Fig. 7A shows a first step of placing support 700 over graft 721, wherein the support is compressed (pre-stretched) and/or provided compressed with a diameter $d1$ 10 that is substantially larger than the grafts outer diameter. Optionally, diameter $d1$ is over 3mm, optionally over 7mm, or higher or lower or intermediate. Preferably, support 700 is deployed after one end of graft 721 (e.g., first end 724) is connected to one bodily vessel (e.g., first vessel 754) via a first anastomosis 726.

Fig. 7B shows a second step, in which a second end 722 of graft 721 is 15 connected to second bodily vessel 752 via anastomosis 726, thereby connecting the interiors of bodily vessels 752 and 754 through graft lumen 728. Optionally, graft 721 is in an undefined contour that can optionally be determined according to blood pressure and flow regimes, properties of graft 721 that may include its mechanical properties, dimensional properties and weight, and/or other parameters.

Fig. 7C shows a third step, in which support 700 is in stretched mode and having 20 a second diameter $d2$, which is optionally different to diameter $d1$. Adjusting a shape of support 700 to support and accommodate graft 721 is optionally done following restoration of blood flow through the graft. Optionally, diameter $d2$ is smaller than 8mm, optionally smaller than 5mm. Optionally, support 700 is stretched to substantially 25 contact graft 721 along at least part of its length. Optionally, support 700 or a segment of it is further stretched to further decrease a smaller diameter, thereby constricting the graft 721 segment in contact. Alternatively or additionally, at least one segment along support 700 is set to have a diameter that is larger than its corresponding enveloped 30 graft 721 segment, thereby allowing it to expand (if in a cyclic expansion pattern and/or in a progressed expansive remodeling). Optionally, at least one of the anastomosed ends and/or its close-by surroundings are covered and/or supported by at least part of support 700 (not shown). Optionally, once deployed, support 700 can then be manipulated to

adjust a chosen contour to at least part of the covered segment of graft 721. Optionally, support 700 fully stretched is firm enough to substantially maintain the applied contour either permanently or for a prolonged period of time after end of the surgical procedure, optionally over 1 week, optionally over 1 month, optionally over 1 year, optionally over 5 10 years, or higher or lesser or intermediate.

Figs. 8A - 8C schematically illustrate side views of different supporting patterns for exemplary graft segments 820, 830 and 840, respectively, using a vein support 800, in accordance with some embodiments of the present invention. Vein support 800 may be the same as vein support 100 shown in Fig. 1. Optionally, vein support 700 may be 10 the same as that shown in Figs. 2, 3, 4, 5A, or 6 at 200, 300, 400, 500, or 600, respectively. It should be evident to an ordinary person skilled in the art that the exemplary graft segments shown are not intended to be limiting in any way, and that there are many other types of graft segments and ways in which support 800 may be to support the segment.

15 In Fig. 8A, support 800 is used to straighten an undefined contour of graft segment 820, support plastically deformed along an axis 808 of the support. In Fig. 8B, support 800 is used to apply a selected curvature to a straight graft segment 830, the support plastically deformed in a direction transversally to the axis 808. In Fig. 8C, support 800 is used to support graft segment 840 without significantly altering its 20 direction and/or shape. As illustrated, graft segment 840 includes two opposite ends 842 and 844 substantially differentiated in diameter. Optionally, graft segment 840 is conically shaped wherein a diameter of end 842 diameter is substantially larger than a diameter of opposite end 844. Optionally, graft segment 840 includes at least one collateral 846. In order to provide support along most or all of graft segment 840 length, 25 support 800 is stretched in a gradual manner along axis 808 to produce a corresponding conically pattern over the graft segment, with optional bumps for covering collaterals 846.

Exemplary in-situ assembly of a modular vessel support

30 Reference is now made to Fig. 9A which schematically illustrates an exemplary loose bodily vessel 920 having a first free end and a second end connected to an artery 952 of an internal organ 950, and to Fig. 9B which schematically illustrate a modular

vessel support **900**, all in accordance with some embodiments of the present invention. Optionally, vessel **920** is connected to artery **952** with an anastomosis **926**.

In accordance with some embodiments of the present invention, a support link **900a** included in modular support **900** is secured over a segment of vessel **920**, as illustrated in the figure. Optionally, support link **900a** is a tubular braided body similar to any one of the supports previously described, for example support **100**, support **200**, support **300**, or support **400**. Optionally, support link **900a** is a support element as exemplary support **500** shown in Fig. 5, or optionally exemplary bellow **600** shown in Fig. 6. Optionally, support link **900a** is a spinal support as an exemplary graft casting device described further on below, or any other support or sheath type or generally tubular member. Optionally, support link **900** is plastically deformable, or is elastic, or includes any variation thereof. Optionally, support link **900a** is substantially rigid. Support link **900a** is secured to vessel **920** either by reshaping it to coincidentally cover and/or constrict a segment of vessel **920**, or by any other connecting means and/or adhesive materials.

In some embodiments of the present invention, support link **900a** is a section of modular support **900** which may be assembled in-situ over vessel **920**. Alternatively, a part of modular support **900** may be assembled outside a body prior to implantation. As shown in Fig. 9A, a second support link **900b** is advanced over vessel **920** towards link **900a**, illustrating an optional step in assembling modular support **900** in-situ.

Modular support **900** includes a plurality of interconnected links such as **900a**, **900b**, **900c**, **900d** and **900e**. Optionally, modular support **900** is a part of a larger modular support containing more support links (not shown). In an exemplary embodiment, at least two links are provided in different tubular shapes. For illustrative purposes only, links **900a**, **900b** and **900d** can be provided substantially cylindrical, whereas link **900c** is provided as curved or bent tube and link **900e** is provided as a converging (e.g., bell-shaped) tube. Optionally, at least one link is substantially rigid and maintains its provided shape under reasonable applied forces. Alternatively or additionally, at least one link is substantially elastic and/or resiliently flexible and is capable of regaining, spontaneously or with moderate urging, to its nominal (e.g., provided) shape. Alternatively or additionally, at least one link is at least partially plastically deformable in at least one axis. Optionally, at least one link includes a

tubular braid body and includes at least one plastically deformable wire and/or at least one elastic or resiliently flexible wire. In an exemplary embodiment of the present invention, an operator is provided with a kit containing plurality of links that can be assembled to a modular support, such as modular support **900**, in a one of several 5 possible shapes and/or contours and/or courses chosen by the operator.

Exemplary end portions of a vessel support

Reference is made to Figure 10A, 10B and 10C which schematically illustrate exemplary coverings and/or sleeves applied to an end portion of a vein support **1000** 10 optionally intended for covering an anastomosed area, in accordance with some embodiments of the present invention. It is suggested that special attention should be made to support end portions design, since that the intersection between a graft vessel and its anastomosed counterpart is occasionally angular and/or irregular. Vein support **1000** may be the same as vein support **100** shown in Fig. 1. Optionally, vein support 15 **1000** may be the same as that shown in Figs. 2, 3, 4, 5A, 7A, 8A, or 9B at **200, 300, 400, 500, 700, 800 or 900**, respectively.

In some embodiments, support end portion is plastically deformable relative to an axis and/or includes at least one plastically deformable member (e.g., a thread). Alternatively, support end portion is substantially elastic as to allow a relatively "soft" 20 covering while excluding the need to cast a requested shape. Occasionally, plastically deformable fibers, such as that shown in the figures at **1002**, may include end portions which protrude from an end portion of support **1000** and impose a degree of overall plasticity to its corresponding support segment. Alternatively or additionally, such protruding fiber end portions may pose a potential risk of injury to a body organ or a 25 vessel due to prickling or piercing. Optionally, a sleeve or a cover may be used at the end portion of the support to cover protruding fibers and thereby substantially prevent possible injury.

Fig. 10A shows a sleeve **1011** which may be attached through a first opening **1017** to the end portion of support **1000** and through an opposing second opening **1015** 30 to an anastomosed area. Opening **1017** may be of an internal diameter **d1**, for example 8mm, suitable for fitting the end portion of support **1000** (in an optional pre-stretched form) along a distance **L1**, which may range, for example between 2 and 5mm, inside

the sleeve. Opening **1015** may be of a diameter **d3** suitable for fitting the anastomosis up to a distance **L3**, for example 10mm, into the sleeve, depending on a diameter of the anastomosis. Optionally, if a diameter of the anastomosis is less than a diameter **d2** which may be, for example 5mm, separating opening **1015** from opening **1017**, the anastomosis may be inserted an additional distance **L2**, which may be for example 10 mm, until an edge of the end portion (although very close to the edge may result in injury from fiber **1002**). Sleeve **1018** may be made from a smooth, flexible material, such as, for example, silicon. Figure 10B is an alternative exemplary embodiment showing an end portion of support **1000** with a covering **1010** including a coating of a flexible material, for example silicon, which may cover the end portions of fibers **1002** so as to substantially prevent possible injury, and sufficiently elastic to allow movement of the coated fibers. Optionally, the coating may have a thickness ranging from 10 – 100 microns, and may extend along a length **L4** of the end portion, optionally from 2 to 5 mm.

Fig. 10C is yet another exemplary embodiment showing a sleeve **1012** similar to sleeve **1017** in Fig. 10A with a difference that sleeve **1012** may be configured to attach to a relatively smaller diameter anastomosis through a second opening **1016** which may have a diameter **d2** similar to diameter **d2** in sleeve **1011**. Sleeve **1012** may attach to the end portion of support **1000** by a first opening **1018** which may have a diameter **d1** similar to **d1** in sleeve **1011**. Lengths **L1** and **L2** may be similar to that in sleeve **1011**.

Reference is made to Figure 11A, 11B, 11C and 11D showing exemplary end portion designs of a vein support **1000** optionally intended for covering an anastomosed area, in accordance with some embodiments of the present invention. Vein support **1100** may be the same as vein support **100** shown in Fig. 1. Optionally, vein support **1100** may be the same as that shown in Figs. 2, 3, 4, 5A, 7A, 8A, or 9B at **200, 300, 400, 500, 700, 800 or 900**, respectively.

In some embodiments of the present invention, in addition to, or as an alternative to, using a cover and/or a sleeve as previously described for support **1000** shown in Fig. 10A – 10C, the end portions of plastically deformable fibers **1102** may be subject to a heat treatment and/or soldering, which may include laser heating. The heat treatment may be used, as seen in Figs. 11A and 11B, for welding together in a single connection **1122** the ends of two, or optionally more, fibers **1122** so that the ends are

not exposed, and thereby reducing a risk of injury to a body organ or a vessel due to pricking or piercing. Optionally, the tip of each fiber **1122** may be shaped into a rounded and/or blunted shaped as shown at **1121** in Fig. 11C.

In some embodiments of the present invention, the end portions of fibers **1122** 5 may be welded together to form an end portion in support **1100** including an opening **1123** forming an angle ϕ with axis **1108**. The end portion with angled opening **1123** may be fitted over an anastomosed area as shown further on below in Fig. 13C. The angle ϕ may range from 20 – 80 degrees relative to axis **1108**, for example from 20 – 40 degrees, from 20 – 55 degrees, from 20 – 65 degrees, and may optionally be 60 degrees.

10 Reference is made to Fig. 12A and 12B which schematically illustrate exemplary end portions of a plurality of plastically deformable fibers **1202** looped together at a looping point **1220** and forming an end to a vein support **1200**, in accordance with an embodiment of the present invention. Looping the end points of fibers **1202**, which may include two or more fibers, may substantially prevent the ends 15 from being exposed, and may as a result reduce a risk of injury to a body organ or a vessel due to pricking or piercing. Vein support **1200** may be the same as vein support **100** shown in Fig. 1. Optionally, vein support **1200** may be the same as that shown in Figs. 2, 3, 4, 5A, 7A, 8A, or 9B at **200, 300, 400, 500, 700, 800** or **900**, respectively.

In some embodiments of the present invention, the ends of looped fibers **1202** 20 may be attached to support **1200** by welding or some other means which may include any of those previously described, or any combination thereof, so as to prevent their protruding from the end portion. Optionally, plastic deformable fiber **1202** is looped around at the end portion of support **1200** and is used to form a second plastic deformable fiber. Additionally or alternatively, fiber **1202** is repeatedly looped around 25 at the ends of support **1200** to form a plurality of plastically deformable fibers.

Reference is made to Figs. 13A – 13C which schematically illustrate an extension **1301** for attaching a vein support **1300** including a graft vessel **1353**, optionally mounted on the graft optionally sleeved thereon, to a side of a body organ **1352**, in accordance with an embodiment of the present invention. Vein support **1300** 30 may be the same as vein support **100** shown in Fig. 1. Optionally, vein support **1300** may be the same as that shown in Figs. 2, 3, 4, 5A, 7A, 8A, or 9B at **200, 300, 400, 500, 700, 800** or **900**, respectively.

Occasionally, an end portion of graft vessel **1353** is angled so as to allow for the connection of the graft to a side portion of a target vessel, for example body organ **1352**. Additionally, in some circumstances, a second end of the graft is may also be angled for connection to a second vessel which is not parallel to the target vessel. If support **1300** 5 does not include an angled opening, for example angled opening **1123** as previously shown in Fig. 11D, an operator may encounter difficulties covering the angled end portion of the graft with a corresponding end portion of the support.

In some embodiments of the present invention, extension **1301** is added to support **1300** as an elastic end portion specifically designed to fit over anastomosis area. 10 Extension **1301** is optionally connected to an end portion of support **1300** only after the latter has been mounted and/or stretched and/or shaped to fit a target vessel. Extension **1301** may be made from a flat mesh including elastic fibers **1304** as shown in Fig. 13A which is cut at one end so that, when the mesh is rolled to form the extension, on angled opening **1301B** includes the angle θ relative to an axis **1308** of the support. The angle θ 15 may range from 20 – 80 degrees relative to axis **1308**, for example from 20 – 40 degrees, from 20 – 55 degrees, from 20 – 65 degrees, and may optionally be 60 degrees. Optionally, extension **1301** may include plastically deformable fibers which may be the same as fibers **102** in support **100**.

In some embodiments of the present invention, the mesh may be cut on an 20 opposing end to that which will be used to form the angled opening, to a width **d4** for forming a second opening **1301A** when the mesh is rolled. The width **d4** may be such that extension **1301** may be accommodated a certain distance inside a lumen **1306** of support **1300**, for example **d4** may be between 4 to 6 mm

Reference is made to Figs. 14A – 14C which schematically illustrate exemplary 25 end portions **1400A** and **1400B** of a vein support **1400** for attaching angled ends of a graft vessel **1453** to a distal vessel (Fig. 14A) and to a proximal vessel (Figs. 14B and 14C), respectively, in accordance with some embodiments of the present invention. Vein support **1400** may be the same as vein support **100** shown in Fig. 1. Optionally, vein support **1400** may be the same as that shown in Figs. 2, 3, 4, 5A, 7A, 8A, or 9B at 30 **200, 300, 400, 500, 700, 800 or 900**, respectively.

End portion **1400A** may include one or more circular loops **1402A** formed from one or more plastically deformable fibers **1402** the circular loops formed by welding or

some other means which may include any of those previously described, or any combination thereof, so as to prevent their protruding from the end portion. Circular loops **1402A** may be optionally formed so that end portion **1400A** includes an opening **1423A**, which includes an angle, for example angle ϕ relative to an axis **1408** of support **1400**, for attaching graft vessel **1453** to the side of the distal vessel (not shown). The angle ϕ may range from 20 – 80 degrees relative to axis **1408**, for example from 20 – 40 degrees, from 20 – 55 degrees, from 20 – 65 degrees, and may optionally be 60 degrees. Circular loops **1402A** may be optionally covered by elastic fibers such as for example fiber **1404A** so as to prevent possible causing of injury to the target vessel due to protruding ends from fibers **1402**.

End portion **1400B** may include a plurality of non-plastic deformable fibers configured to form an angular flexible connector **1404B** including an opening **1423B** which includes an angle, for example angle α relative to axis **1408** of support **1400**, for attaching graft vessel **1453** to the side of proximal vessel **1452**. Angle α may range from 20 – 160 degrees relative to axis **1408**, for example from 20 – 60 degrees, from 60 – 90 degrees, from 90 – 120 degrees, from 120 – 150 degrees, and may optionally be 150 degrees.

Exemplary “spine”-type external support

Reference is made to Fig. 15A which schematically illustrates an exemplary graft casting support **1500** in accordance with an embodiment of the present invention. Support **1500** comprises a spine portion **1502** from which extend a plurality of rounded fasteners **1506** defining a lumen **1508** for securing the graft inside. A length of support **1500** may be selected to be slightly less than a length of a grafted artery, and a diameter of the lumen **6** may be selected to accommodate the grafted artery inside. Fasteners **1506** may be made from a resiliently flexible or plastically deformable material, while spine **1502** may be made from a plastically deformable material which enables an operator to bend and/or twist the support. Each fastener **1506** may be opened to admit a portion of the grafted artery into lumen **1508**, as described further on below. If fastener **1506** is elastic, after inserting a portion of a vein or arterial graft into lumen **1508**, the fastener will elastically recover its rounded shape securing the graft. If fastener **1506** is

plastically deformable, the fastener may be deformed manually into the rounded shape securing the graft.

Reference is made to Figure 15B which schematically illustrates a portion of a heart **1552** to which a coronary artery **1520** has been grafted, and a method to support 5 the artery with support **1500**, in accordance with some embodiments of the present invention. Optionally, before, during or after performing an anastomosis to the aorta or coronary artery, the vein graft or arterial graft **1520** may be inserted into lumen **1508** of support **1500**.

Shown in the figure is a segment of graft **1520** which has been inserted into 10 lumen **1508** defined by first five fasteners **1504a** to **1504e**. A next step in the process is to insert an additional segment of graft **1520** into lumen **1508** of fastener **1504f**. Fastener **1504f** is first straightened, as shown in the figure, and is then tucked under artery **1520**. Optionally, due to a resiliently flexible nature of fastener **1504**, after being tucked under graft **1520**, fastener **4f** elastically, optionally with assistance from the 15 operator, regains its rounded shape securing the graft. This process is then repeated with each subsequent fastener **1504g**, **1504h**, and so on, until all fasteners **1504** secure graft **1520**.

In some embodiments of the present invention, spine **1502** may be made from a 20 material with sufficient plastic deformability to allow the operator to fixedly deform the support, and hence the arterial or vein graft **1520** secured by the support, into a desired shape. Optionally, the material of support **1500** may be further selected so as to withstand deformation forces applied to it by adjacent anatomical structures or surgical materials. Thus, the supported arterial or vein graft is protected by support **1500** from 25 kinking and/or collapsing and/or deviating direction, allowing a patency and a desired path of the graft to be maintained. Optionally, spine **1502** and/or fasteners **1504** may be made, for example, from stainless steel or other metals, some plastic derivatives, Teflon®, reinforced Dacron® or other suitable materials. Support **1500** may be 30 optionally made from a biodegradable material such as vicril or other suitable materials, to allow the sleeve to be absorbed after a predetermined period of time, such as a few weeks, after the scar tissue has stabilized. Spine **1502** and/or the fasteners **1504** may elute a pharmacological substance, such as vasodilators (such as slow releasing nitroglycerin or a nitric oxide (NO) releasing substances), anti-platelet agents (such as

aspirin, clopidogrel) immunosuppressant drugs (such as tacrolimus, sirolimus), an anticoagulant drug (such as heparin, low molecular heparins, hirudin derivatives) for prevention of blood clotting, in order to reduce graft thrombosis and improvement of the graft or vessel patency, and any other pharmacologic substance. Support 1500 and/or fasteners 1504 may include radio-opaque markers so as to allow it to be observed by imaging procedures such as radiography, CT, or angiography, without a need for contrast material. This may facilitate monitoring of the graft after surgery and planning of a re-operation without a need for cardiac gated multi detector CT or the use of contrast material, and protection of the graft while performing a "re-do" cardiac or thoracic procedure. Radio-opaque markers may also facilitate engagement of the graft by a catheter during coronary angiography.

Reference is made to Figs. 16A and 16B which schematically illustrate a graft casting support 1600, in accordance with some embodiments of the present invention. Support 1600 comprises a cylindrical shaft portion 1631 having a lumen 1632 formed by a coiled or braided wire. Shaft portion 1631 may be plastically deformable so as to allow an operator to provide it with a shape in which it remains in a body. One or both ends of shaft portion 1631 may include a conical termination 1630 which is shown enlarged in Fig 16B. Conical termination 1630 may be left freely or substantially unsecured preferably over the anastomosis, or may serve for attachment of an end of support 1600 to a tissue surface to which an end of the grafted artery may be attached. Attachment of conical termination 1630 may be by gluing, hooking or sewing the conical termination to the tissue surface. The length of support 1600 may be selected to be the same as, or slightly less than, a length of the graft, while a diameter of lumen 1632 is selected to accommodate a vein or an arterial graft. The length of support 1600 may be cut to a desired length prior to, during, or optionally after deployment. Alternatively, support 1600 may be stretchable to a desired length and attached at the ends to maintain the desired length. This avoids a need to cut the support during insertion. When stretchable, support 1600 may accommodate a range of lengths, so that a set of supports wherein each support accommodates a different range of lengths may accommodate a very broad range of lengths. Support 1600 may store or elute a pharmacological substance as described previously and may also be partially or fully radio opaque or biodegradable.

42
EXAMPLES

Reference is now made to the following examples, which together with the above descriptions; illustrate some embodiments of the invention in a non limiting fashion.

5 **Table-1:** Calculated mechanical properties of an optional example for a support with 38 elastic wires of 0.05mm in diameter, braided on 8mm mandrel and using 150° braiding angle

Device Diameter [mm]	Braid Angle [deg]	Device Length [mm]	Axial Stiffness [N/m]
8.00	140.68	78.00	0.59
7.50	123.79	109.21	0.75
7.00	110.67	131.86	0.96
6.50	99.43	149.89	1.23
6.00	89.38	164.81	1.61
5.50	80.13	177.42	2.14
5.00	71.47	188.18	2.91
4.50	63.26	197.39	4.07
4.00	55.39	205.26	5.91
3.50	47.80	211.94	8.98
3.00	40.43	217.54	14.56

10

**EXEMPLARY SHAPEABLE EXTERNAL VEIN SUPPORT AND METHOD OF
PRODUCTION THEREOF**

Photographs have been included as Fig. 17A and Fig. 17B depicting a portion of an exemplary extended support and an enlarged view of a section of support, respectively, in accordance with some embodiments of the present invention.

15 The support includes 42 cobalt chrome wires in a braided tubular configuration affording radial elasticity and axial plasticity, comprising 38 elastically deformable

wires of a first type (43 microns diameter each) and 4 annealed plastically deformable wires of a second type (150 microns diameter each), the wires intertwined symmetrically in the braid.

The support may be supplied compressed in various lengths and internal 5 diameters in order to provide more flexibility to the surgeon in addressing different situations. The inner diameter of the device, in its compressed form, is chosen so as to allow a substantially comfortable overlaying the device over the bypass graft after completion of distal anastomosis.

Accordingly, the support may be manufactured in optionally 4 initial 10 configurations, each having a different range of inner diameters pre- and post-extension:

- 8 mm (compressed) → 5mm (extended to the desired length),
- 7 mm (compressed) → 4mm (extended to the desired length),
- and 6 mm (compressed) → 3mm (extended to the desired length).

15 The support may be additionally manufactured in 6 - 8 different final lengths ranging from 2 cm – 35 cm (post-extension) to allow adequate matching between the support and the vein graft along its length.

The support is optionally configured as substantially kink-resistant and axially 20 symmetric in 0 to 180 degrees of bending. In a compressed form, the support shows relative radial plasticity and axial elasticity, whereas when extended, it possesses relative axial plasticity (low springback) and radial elasticity (crush resistance) throughout its length.

25 The support braiding can be performed using a 42 carrier braiding machine on a 304/316 SS mandrel cleaned with isopropyl alcohol. The mandrel diameter may be for example 8, 7, or 6 mm depending on the extended (maximally-allowed stretched) length of the support. The braiding angle may be approximately 150 degrees.

In order to prevent damage to the heart/vascular tissue, the annealed wires may 30 be looped (on each other) and welded with laser at a distance of approximately 5 mm from the proximal end of the support. An annealed distal end of the support may end in a 30-to-60 angle, the annealed wires looped and welded at a distance of approximately mm from the end, which enables the surgeon to match it and cover the distal anastomosis.

Several weeks after implantation, fibrotic tissue grows into the device, covering and affixing the vein graft and the support together. Accordingly, the annealed wires may be at least partially radio opaque to enable imagery during a Percutaneous Coronary Intervention (PCI).

5 Following implantation, the resulting graft-support has a limited radial elasticity with substantially resilient properties so that, if the support is crushed, it returns to its substantially pre-crushed diameter allowing the graft to also return to its normal diameter. Furthermore, the radial compliance is substantially small so that the radial movements (such as in pulse movements) are much smaller compared to that of natural 10 arteries. For example, the radial compliance in supports similar to that shown in Fig. 17A, or for variations of that shown in the figure, the variation being in the number of wires, types of wires, or diameter of wires, or any combination thereof, is typically in one of the ranges of 0-10 %/mm Hg; 0-5 %/mm Hg; less than 3%/mm Hg (together with the vein graft). In some variations, the radial compliance may also be in the range 15 similar to that of a native artery, for example, 3-30%/mm Hg (but will display other properties than that of the native artery due to the vein support).

EXEMPLARY CABG PROCEDURE INCORPORATING EXEMPLARY SHAPEABLE VEIN SUPPORT

20 Reference is made to Figs. 18A – 18F which schematically illustrate a typical implantation procedure of the support shown in Fig. 17A, as may be followed by a surgeon performing a CABG procedure, in accordance with some embodiments of the present invention.

25 Shown in Fig. 18A is a schematic illustration of the aorta 1852 and a coronary artery 1854 which is to be bypassed by a graft. After harvesting the vein grafts, and clamping the collaterals on the grafts, the surgeon measures their length and diameter.

Only after performing a 1st anastomosis, the surgeon has a final reliable judgment regarding the length of the graft. Fig. 18B schematically illustrates a graft 30 1821 attached at a distal end to artery 1854 in the 1st anastomosis. Graft 1821 is shown with a plurality of collaterals 1846, and has a reduced diameter D1 as there is no blood flow through the graft.

5 Figs. 18B and 18C schematically illustrate the next phase of the support implantation procedure following described. After choosing a 2nd anastomosis site on aorta 1852, the surgeon measures the exact length and/or diameter(s) of graft 1821 and chooses the right support 1800. Optionally, the surgeon can choose the right support from a support implantation table, such as the following exemplary table:

Bypass graft outer diameter	3mm	4mm	5mm	6mm
A	10.7cm	10.0cm	9.2cm	8.0cm
B	13.3cm	12.5cm	11.4cm	9.8cm
C	16.2cm	15.0cm	13.8cm	11.9cm
D	18.8cm	17.5cm	16.0cm	13.8cm
E	21.2cm	20.0cm	18.1cm	15.7cm
F	24.0cm	22.5cm	20.6cm	17.8cm

The surgeon may then gently thread support 1800 over graft 1821 and completes the 2nd anastomosis.

10 Figs. 18D and 18E schematically illustrate the next phase of the support implantation procedure following described. Following recovery of blood flow 1822 in graft 1821 and after assessing the vein graft flow and checking it for leaks at collaterals 1846 and at the anastomosis site, the surgeon opens support 1800 to the desired length while he fully controls the opening of the support with its wide part in a distal section 15 (in order to avoid damage to the clips on the collaterals). The diameter of graft 1821 increases from diameter D1 to a new diameter D2 as a result of blood flow 1822 in the graft, diameter D2 is substantially greater than, optionally about three times, D1.

20 Fig. 18F schematically illustrates the last phase of the procedure. The surgeon gently covers the proximal and distal anastomosis and shapes support 1800 and support-covered graft 1821 according to the desired path in the chest from artery 1854 to aorta 1852. At the end of the procedure, support 1800 covers relatively tightly substantially

the whole length of graft 1821, including collaterals 1846. Support 1800 maintains its shape, length and diameter, and enables the surgeon to safely terminate the procedure.

5

TESTS AND OBSERVATIONS

Reference is now made to the following tests and observations, which together with the above descriptions; illustrate some embodiments of the invention in a non-limiting fashion.

The inventors conducted a feasibility study including a CABG procedure on a sheep to evaluate the formable tubular support's positioning procedure; to evaluate safety of the support; and to evaluate the support's initial performance. The sheep was selected as its cardiovascular system is similar to that of humans; the sheep's growth rate is low comparing to other applicable models (e.g. swine model), allowing for a relatively long follow up period without substantial change in the size of organs; and the vein harvesting procedure is relatively easier and efficient compared to other applicable models. The support, which is substantially similar to the support shown in Fig. 17A, was placed over a vessel as part of the CABG procedure.

For the CABG procedure a domestic sheep, female, aged 12 months, weight 76 kg was used. The sheep was handled according to the international guidelines for care and use of laboratory animals, with food and water made available regularly on a daily basis, and the room where the sheep was kept cleaned daily using a commercial disinfecting detergent.

The CABG operation performed was an off pump procedure. In the operation, the saphenous veins were harvested from both legs and two bypass grafts were constructed. The sheep's arteries to which the vein grafts were anastomosed were the left anterior descending (LAD) artery and the circumflex artery (1st marginal). The experimental graft, with the external support, was the bypass vein graft to the LAD. The control graft was bypassed to the marginal artery. After the completion of the experimental graft's first anastomosis, the surgeon measured again the graft's length and diameter and chose the right external support (the length of the experimental graft was 15cm and its diameter was 6.5 mm), optionally from a support implantation table. The length of the control graft was 12 cm and its average diameter was 6.7 mm).

Afterwards, the external support, in its compressed form, was threaded over the graft and the second anastomosis was performed. After assessing both grafts flow and after completing the final checkup of the vein grafts, their collaterals, and the anastomosis site, both native arteries were ligated proximally to the distal anastomosis site.

5 After recovery of blood flow into the graft, the surgeon opened the support to the desired length and shaped its path within the chest. The support was opened to a length which covered entirely and gently the anastomosis site. At the end of the procedure, after closing the chest, the sheep underwent angiography which demonstrated that both grafts were open with good flow.

10 At the end of a follow up period of 3 months, the sheep underwent a second coronary angiography to assess the graft's patency and its intimal and medial hyperplasia rates (lumen's internal diameter and inner walls contour). The experimental graft was seen to be entirely open, with excellent laminar flow. The vein graft internal diameter was the same as in the implantation day and its internal walls were uniform.

15 Following angiography, the animal was sacrificed and the grafts and the heart were harvested. The grafts and heart were washed with 0.9% NaCl and immersed in 4% formaldehyde for 24 hours. Macroscopically, no damage to the heart was viewed and the graft and support, similarly to the rest of the operational field, was embedded in connective tissue and fat. The external support was fixed to the vein graft and was 20 located where it was positioned at the end of the surgery, and was of the same length and diameter.

EXEMPLARY IN-VITRO TESTING OF AN EXEMPLARY SHAPEABLE VEIN SUPPORT

25 An In vitro testing for long axis stability was conducted to collect data regarding the length/diameter stability of the support and its capability to maintain a desired shape after being deployed in high pressure/high pulse physiological conditions resembling that of the human body. Physiological conditions simulated included those associated with body temperature control (37°C), pressure control (systolic and diastolic pressure) and pulse control. The experimental setup consisted of plastic tubes simulating arteries/veins in which fluid flows (distilled water simulating blood) in a closed loop by using a peristaltic pump simulating the heart. The entire system data and parameters

monitored were controlled and collected by data acquisition software. Use of a high quality PC camera in real time during the testing allowed an accurate measurement of support length/diameter at any given time.

The long axis stability of the support system was tested according to the 5 following table:

Device Code	Pulse	Systolic pressure (mmHg)	Temp. (Celsius) inside the vessel	Temp. (Celsius) inside the bath	Experiment time (minutes)
	120	120	36-38	36-38	10
	120	220	36-38	36-38	10
	120	120	36-38	36-38	60
	120	220	36-38	36-38	60

Two different supports were tested, a first support comprising 38 cobalt chrome 10 elastically deformable wires (50 microns diameter each) and 4 annealed plastically deformable cobalt chrome wires (150 microns diameter each); and a second support comprising 36 cobalt chrome elastically deformable wires (50 microns diameter each) and 6 annealed plastically deformable cobalt chrome wires (150 microns diameter each). The result of the in vitro tests showed no difference between the initial and final 15 length of each support; that the supports can maintain their length/diameter and shape in relatively extreme physiological conditions; and that 4 annealed plastically deformable cobalt chrome wires may be used in lieu of 6 annealed plastically deformable cobalt chrome wires. Based on the results of the in vitro testing, the inventors have 20 additionally determined that other suitable braided configurations for the support with higher radial compliance (as previously stated), may include a braid comprising 40 elastically deformable cobalt chrome wires of diameter 43 microns and 2 annealed plastically deformable cobalt chrome wires of diameter 150 microns, and a braid with the same number of wires as the first braid tested but with 4 annealed plastically deformable cobalt chrome wires of diameter 100 – 125 microns.

GENERAL COMMENTS

Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all 5 such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims.

All publications, patents and patent applications mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same extent as if each individual publication, patent or patent application was specifically and 10 individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present invention. To the extent that section headings are used, they should not be construed as necessarily limiting.

15 The terms "comprises", "comprising", "includes", "including", "having" and their conjugates mean "including but not limited to". This term encompasses the terms "consisting of" and "consisting essentially of".

20 The phrase "consisting essentially of" means that the composition or method may include additional ingredients and/or steps, but only if the additional ingredients and/or steps do not materially alter the basic and novel characteristics of the claimed composition or method.

As used herein, the singular form "a", "an" and "the" include plural references unless the context clearly dictates otherwise. For example, the term "a compound" or "at least one compound" may include a plurality of compounds, including mixtures thereof.

25 The word "exemplary" is used herein to mean "serving as an example, instance or illustration". Any embodiment described as "exemplary" is not necessarily to be construed as preferred or advantageous over other embodiments and/or to exclude the incorporation of features from other embodiments.

30 The word "optionally" is used herein to mean "is provided in some embodiments and not provided in other embodiments". Any particular embodiment of the invention may include a plurality of "optional" features unless such features conflict.

Throughout this application, various embodiments of this invention may be presented in a range format. It should be understood that the description in range format is merely for convenience and brevity and should not be construed as an inflexible limitation on the scope of the invention. Accordingly, the description of a range should be considered to have specifically disclosed all the possible subranges as well as individual numerical values within that range. For example, description of a range such as from 1 to 6 should be considered to have specifically disclosed subranges such as from 1 to 3, from 1 to 4, from 1 to 5, from 2 to 4, from 2 to 6, from 3 to 6 etc., as well as individual numbers within that range, for example, 1, 2, 3, 4, 5, and 6. This applies regardless of the breadth of the range.

Whenever a numerical range is indicated herein, it is meant to include any cited numeral (fractional or integral) within the indicated range. The phrases "ranging/ranges between" a first indicate number and a second indicate number and "ranging/ranges from" a first indicate number "to" a second indicate number are used herein interchangeably and are meant to include the first and second indicated numbers and all the fractional and integral numerals therebetween.

As used herein the term "method" refers to manners, means, techniques and procedures for accomplishing a given task including, but not limited to, those manners, means, techniques and procedures either known to, or readily developed from known manners, means, techniques and procedures by practitioners of the chemical, pharmacological, biological, biochemical and medical arts.

As used herein, the term "treating" includes abrogating, substantially inhibiting, slowing or reversing the progression of a condition, substantially ameliorating clinical or aesthetical symptoms of a condition or substantially preventing the appearance of clinical or aesthetical symptoms of a condition.

It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable subcombination or as suitable in any other described embodiment of the invention. Certain features described in the context of various

51

embodiments are not to be considered essential features of those embodiments, unless the embodiment is inoperative without those elements.

Various embodiments and aspects of the present invention as delineated hereinabove and as claimed in the claims section below find analytical support in the

5 following examples.

CLAIMS

1. An external vein support comprising an elongate axial body including a longitudinal axis, said body being plastically deformable by at least one of: stretching, bending, twisting and any combination thereof, relative to said longitudinal axis,

wherein said body has a first relaxed pre-deformation configuration, whereupon deformation thereof said body has a second relaxed post-deformation configuration different to said first relaxed pre-deformation configuration, and wherein said body maintains said second relaxed post-deformation configuration relative to said longitudinal axis in a manner suitable for the vein support to be attached to and support a vein in a vascular system of a patient, and

wherein said body comprises at least one plastically deformable element.

2. The external vein support according to claim 1, wherein said body is fixedly deformable in diameter at a plurality of points along a length of the body.

3. The external vein support according to claim 2, wherein said body is radially elastic at at least one of the plurality of points fixedly deformed.

4. The external vein support according to any one of claims 1 to 3, wherein said body comprises a plurality of fibers arranged so that at a first average diameter the resilience of said body relative to an axis is substantially greater than at a second average diameter.

5. The external vein support according to any one of claims 1 to 4, wherein said body comprises a plurality of non-plastically deformable elements.

6. The external vein support according to any one of claims 1 to 5, wherein said body is further manipulatable to a chosen substantially non-linear contoured path.

7. The external vein support according to any one of claims 1 to 6, wherein said body includes at least two plastically deformable elements intersecting to form a braiding angle, wherein the plasticity of said support increases along said longitudinal axis as said angle decreases from a larger angle when the support is in a first less extended position to a smaller angle when the support is in a second more extended position.

8. The external vein support according to any one of claims 1 to 7, wherein said body has a first end and a second end with a channel therebetween, wherein, in the first relaxed pre-deformation configuration, the channel is sized to freely receive the vein such that a

longitudinal axis of the channel extends along a longitudinal axis of the vein, and wherein, in the second relaxed post-deformation configuration, the channel, supporting the vein received therein, inhibits tissue-response induced occlusion of a desired blood flow within the vein.

9. The external vein support according to any one of claims 1 to 8, said external vein support being suitable to support a bodily vessel under pressures of 200 mmHg or less.

10. A method of supporting a vein, the method comprising:

connecting a first end of the vein to a first point in a vascular system of a patient with a first anastomosis so as to incorporate the vein into said vascular system;

mounting a vein support around the vein; and

plastically deforming said vein support relative to a longitudinal axis of said vein support, while said vein support is mounted on the vein, such that following said plastically deforming, said vein support substantially maintains a new shape relative to said longitudinal axis.

11. The method according to claim 10, wherein said plastically deforming said vein support includes stretching said vein support along said longitudinal axis.

12. The method according to claim 10 or claim 11, wherein said plastically deforming said vein support includes bending said vein support in a direction transverse to said longitudinal axis.

13. The method according to any one of claims 10 to 12, wherein said plastically deforming comprises deforming said vein support along said longitudinal axis such that springback of said vein support relative to said longitudinal axis decreases.



14. The method according to any one of claims 10 to 13, wherein said plastically deforming defines a layout of the vein independent of any attachment of said vein support to tissue other than the vein.

15. The method according to claim 10, wherein said plastically deforming of said vein support is performed after said connecting of said first end of the vein to said vascular system.

16. The method according to any one of claims 10 to 15, further comprising connecting a second end of the vein to a second point in said vascular system with a second anastomosis.

17. The method according to any one of claims 10 to 16, further comprising:
attaching the vein to at least two separate points in a vascular system of a patient;
allowing blood to flow within and expand the vein; and
shaping said vein support mounted on the vein while said blood flows within the vein.
18. A method of supporting a vein, the method comprising:
mounting a vein support around the vein; and
deforming said vein support, while said vein support is mounted on the vein, sufficiently to impose thereupon a plastic deformation that alters a length of said vein support from a pre-deformation relaxed length to a post-deformation relaxed length different to said pre-deformation relaxed length.
19. The method according to claim 18, wherein said length of said vein support is coupled to a cross-sectional diameter of said vein support so that said deforming alters said diameter from a pre-deformation relaxed diameter to a post-deformation relaxed diameter different to said pre-deformation relaxed diameter and wherein said post-deformation diameter is selected in response to a diameter of the vein.
20. The method according to claim 18 or claim 19, wherein said deforming is performed *in-situ* during open surgery with or without a heart-lung machine.
21. A method of supporting a vein, the method comprising:
mounting a vein support around the vein; and
plastically deforming said vein support relative to a longitudinal axis of said vein support, while said vein support is mounted on the vein, such that following said plastically deforming, said vein support substantially maintains a new shape relative to said axis,
wherein said plastically deforming comprises deforming said vein support along said axis whereby springback of said vein support relative to said axis decreases.

Date: 8 April 2016

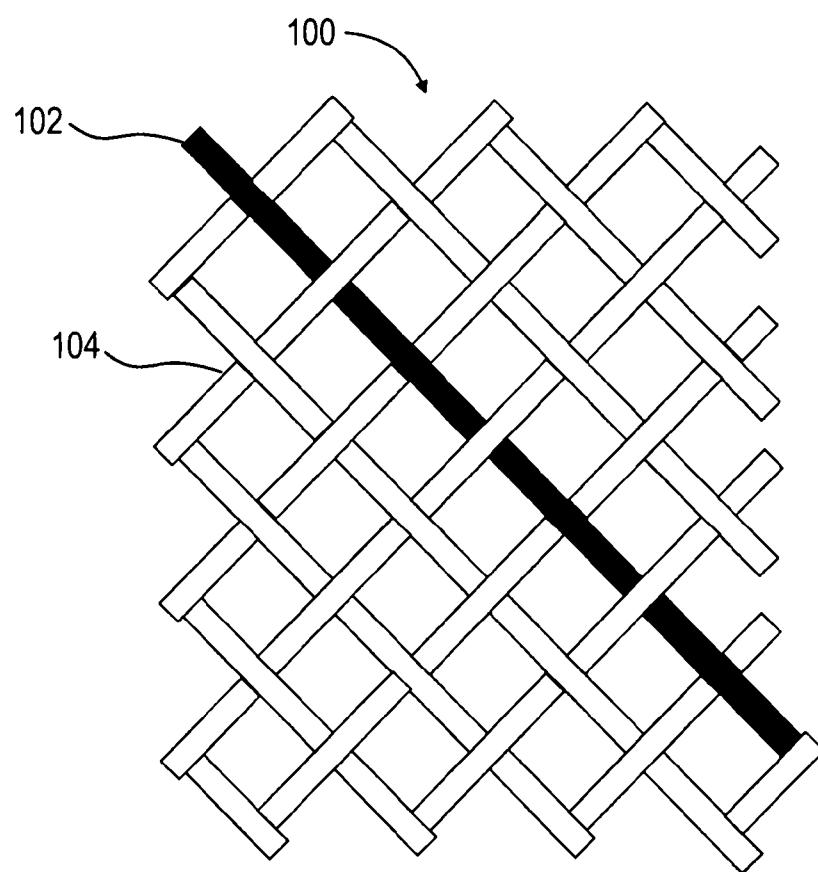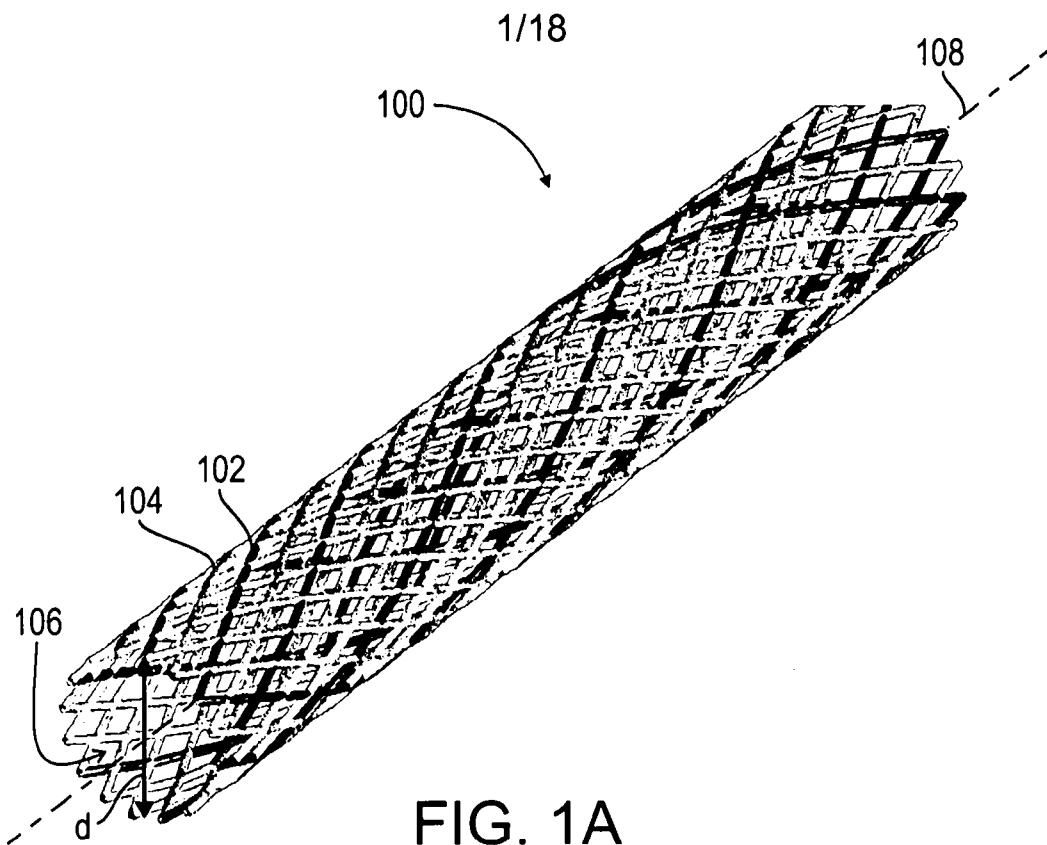

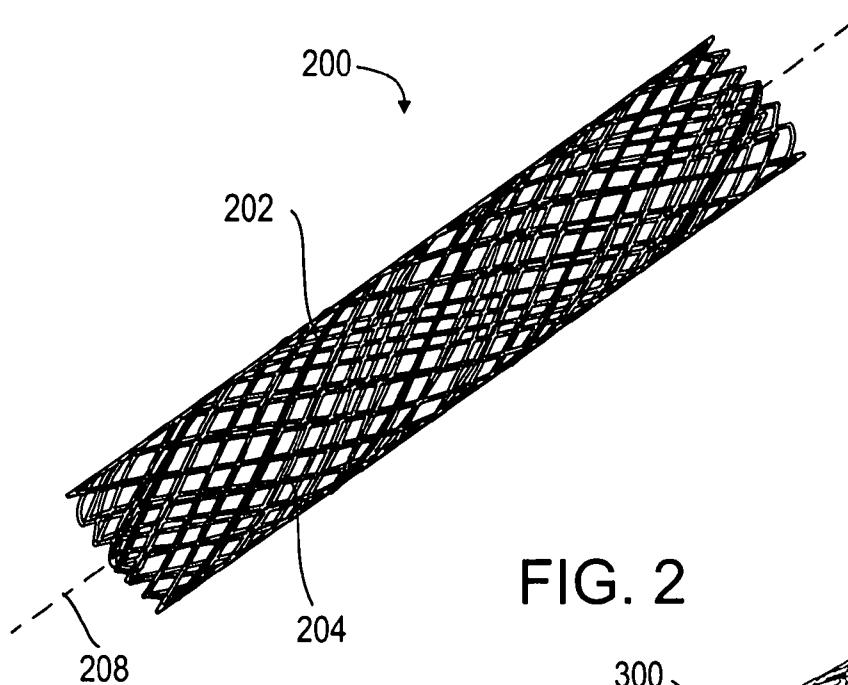


FIG. 2

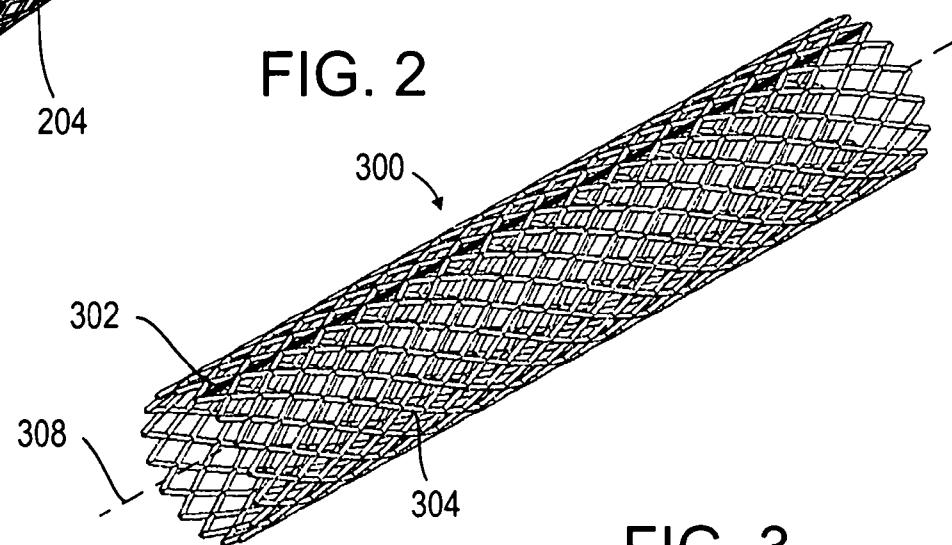


FIG. 3

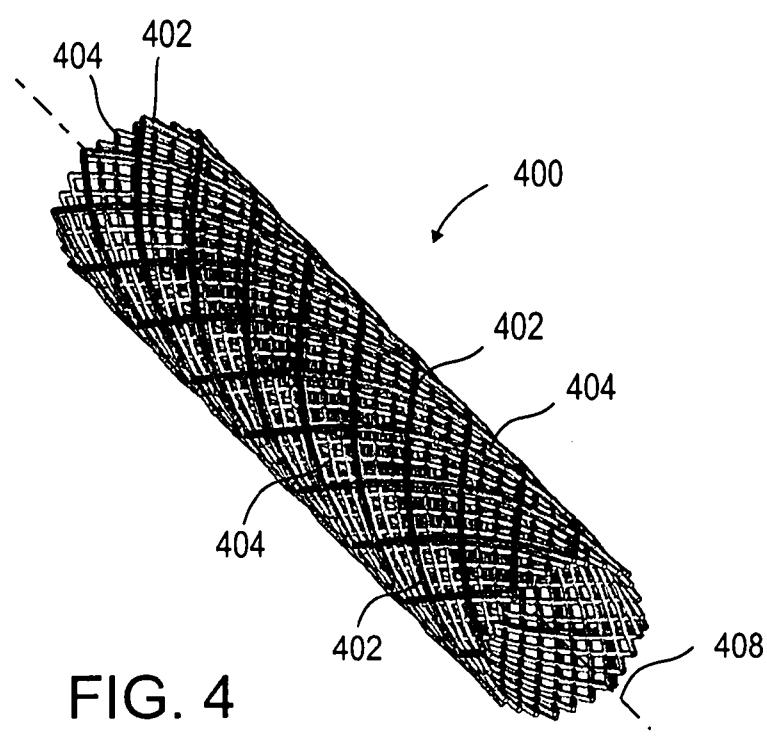


FIG. 4

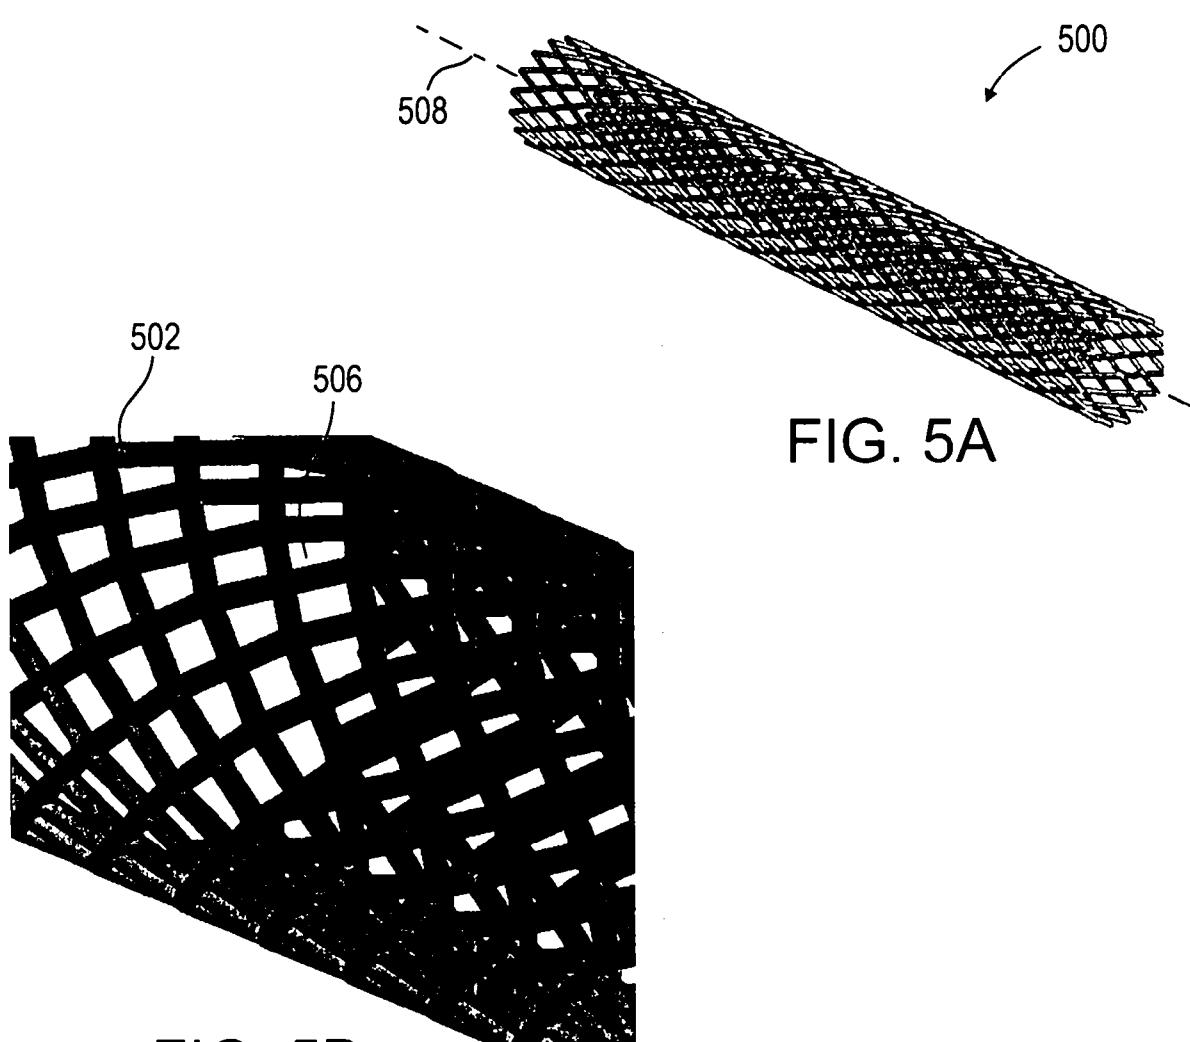


FIG. 5B

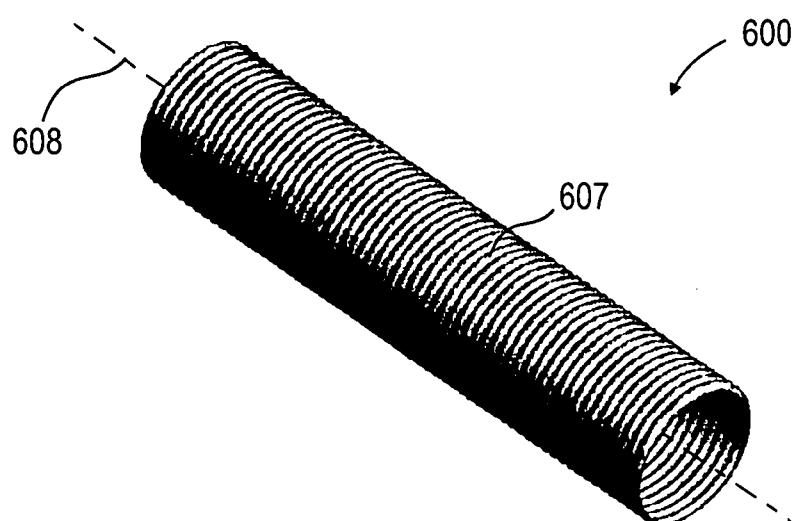


FIG. 6

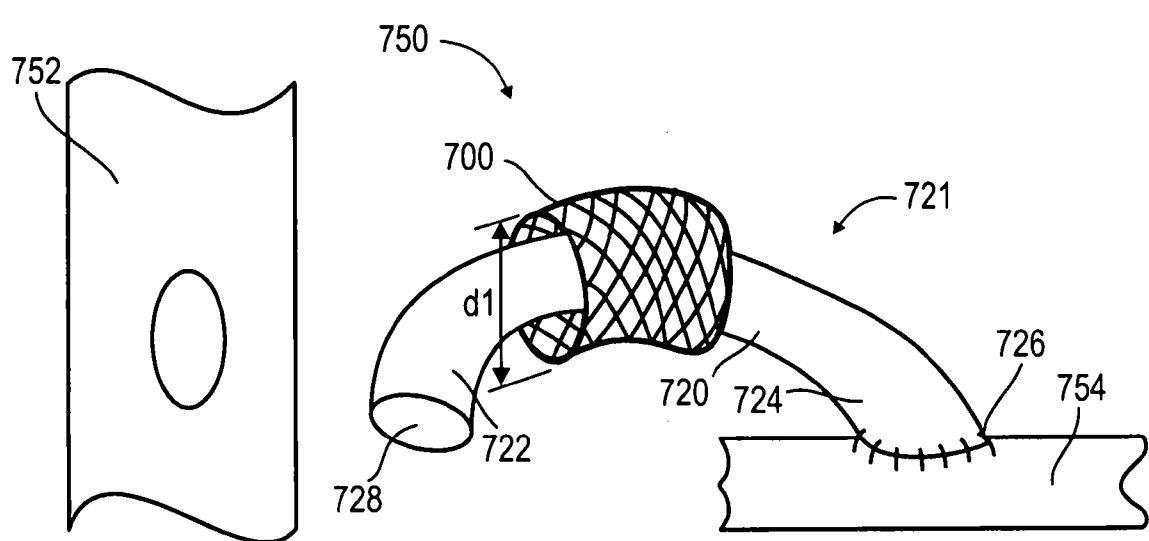


FIG. 7A

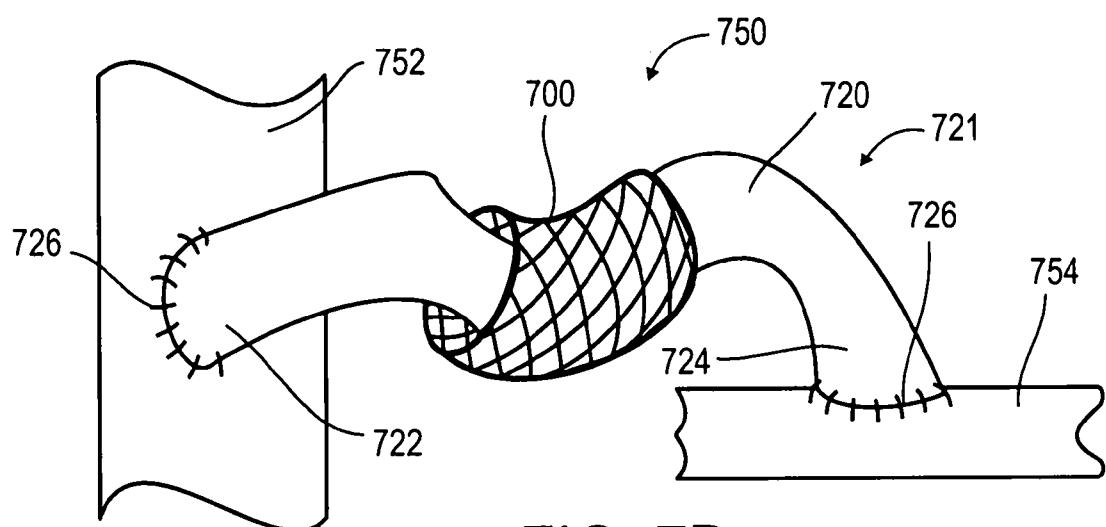


FIG. 7B






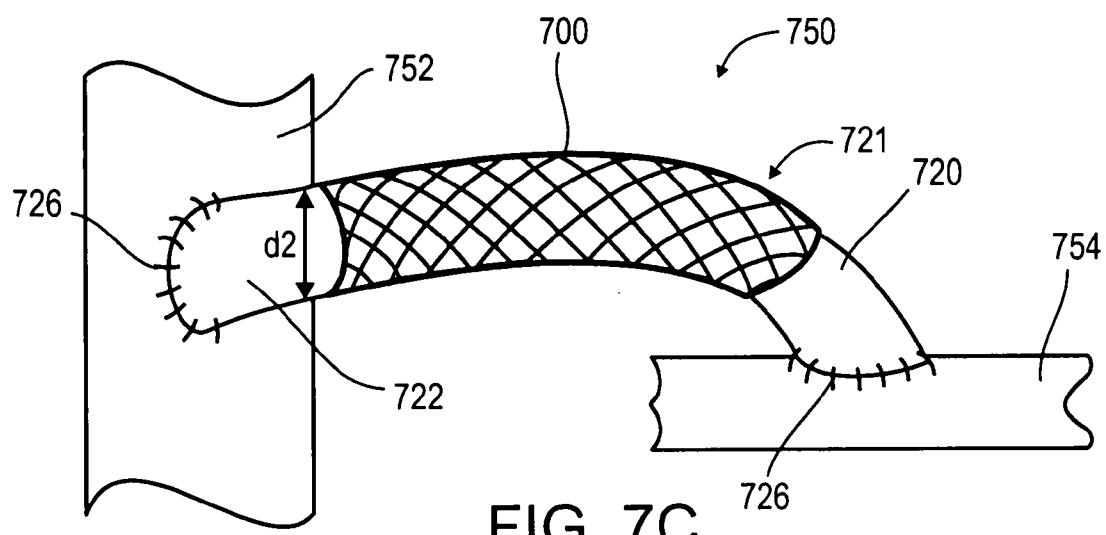





FIG. 7C

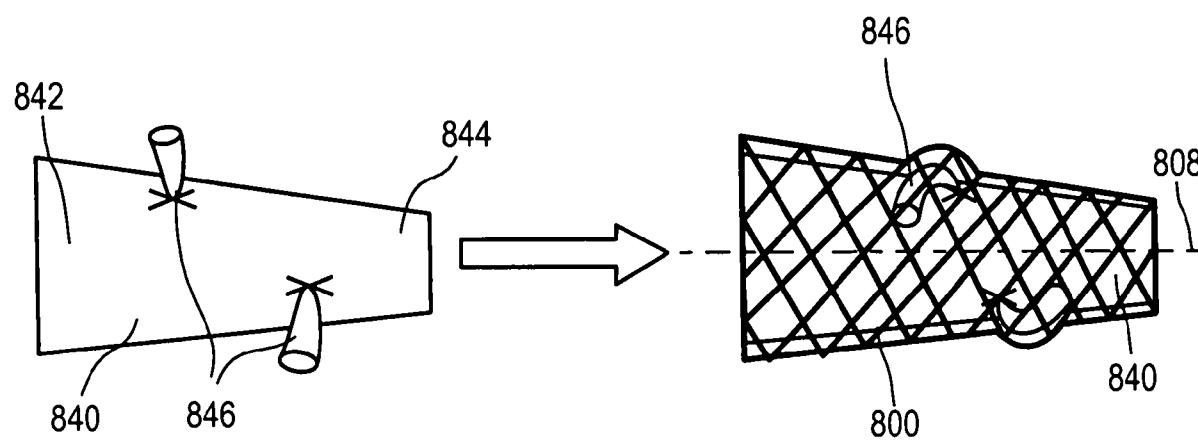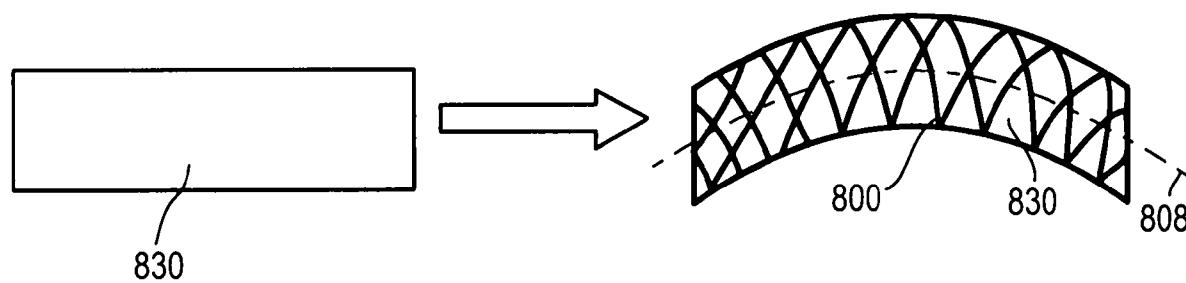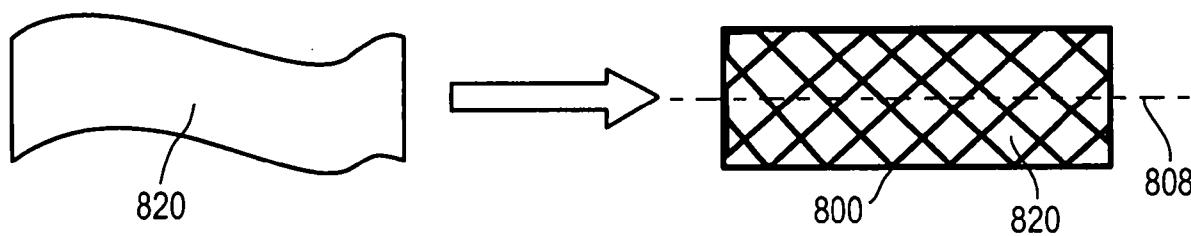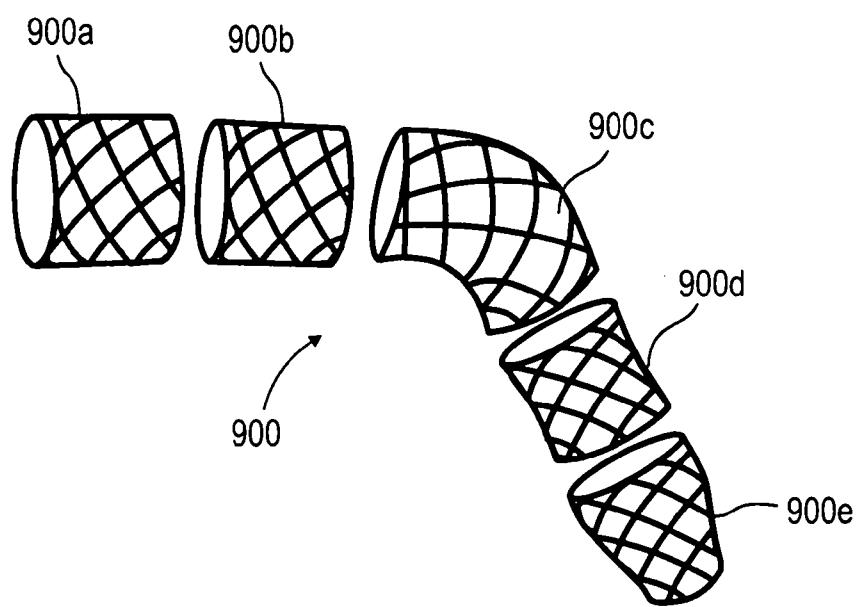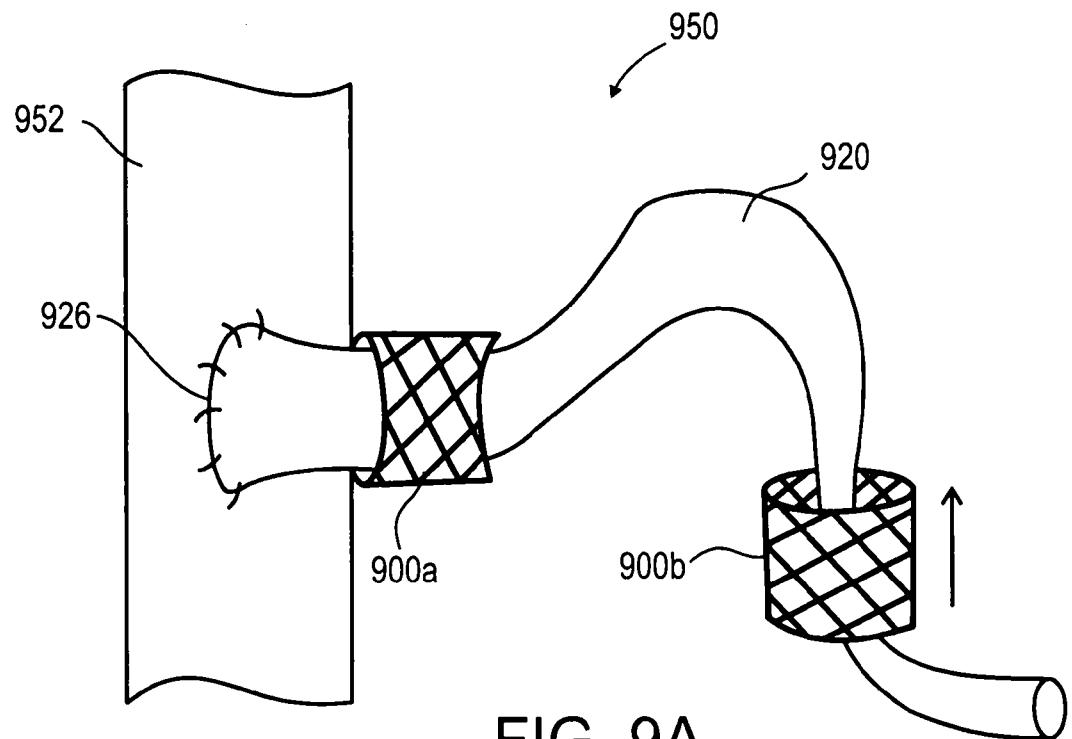

2009318772 27 May 2011

6/18



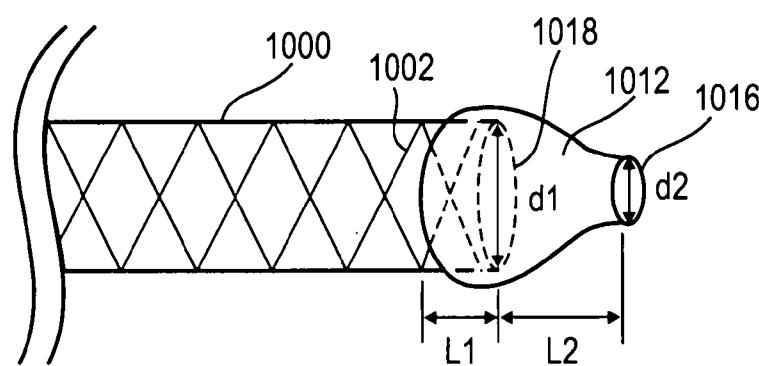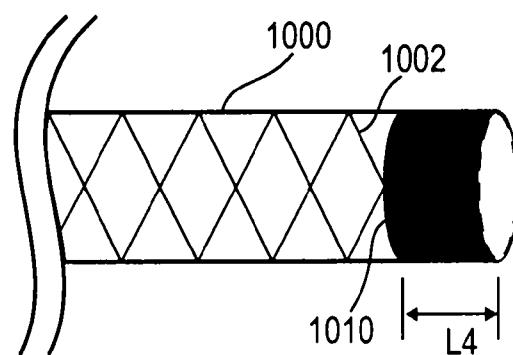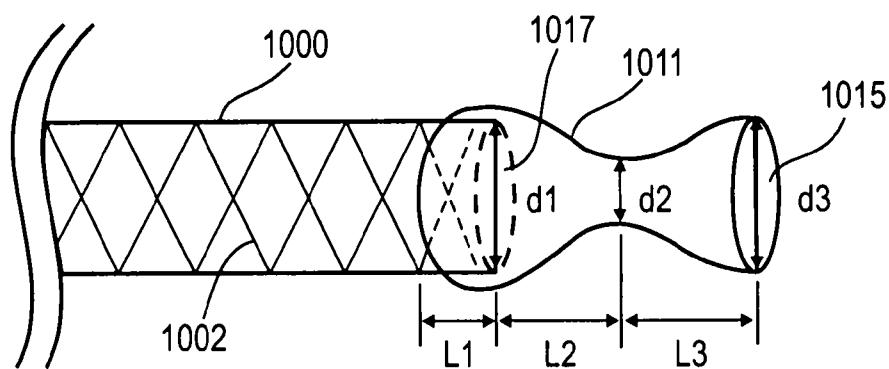

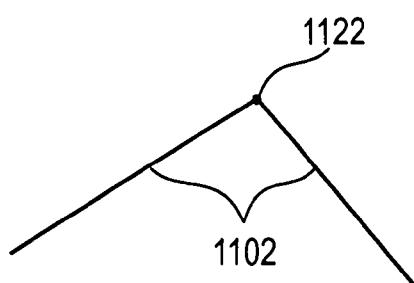


FIG. 11A

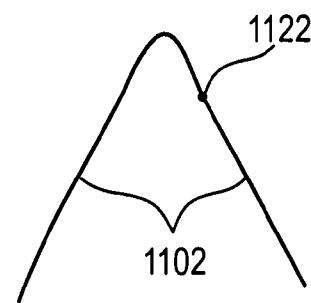


FIG. 11B

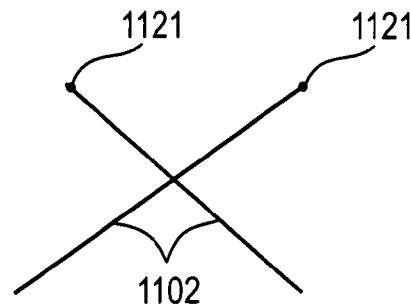


FIG. 11C

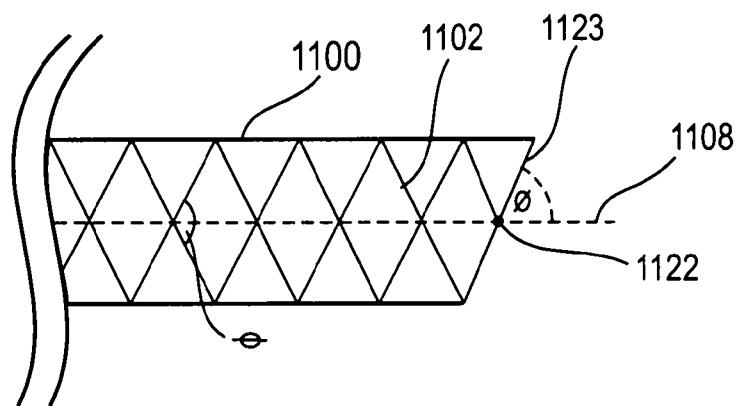


FIG. 11D

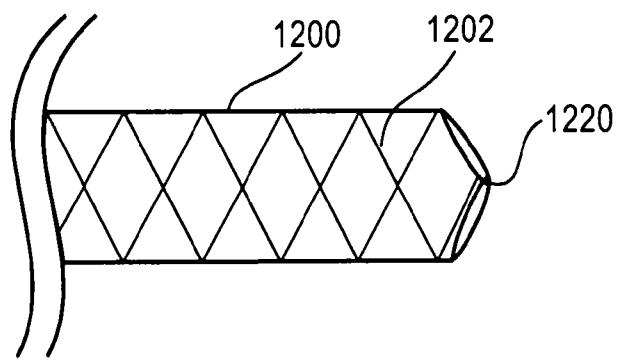


FIG. 12A

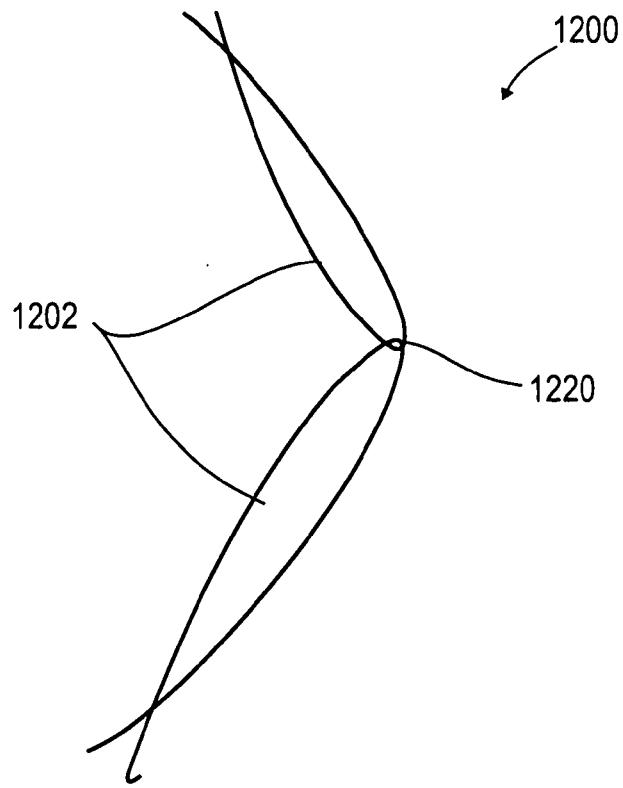


FIG. 12B

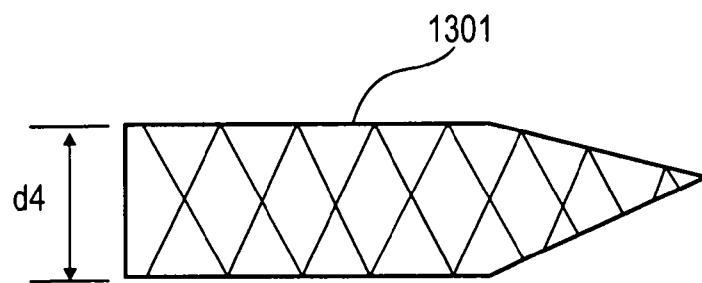


FIG. 13A

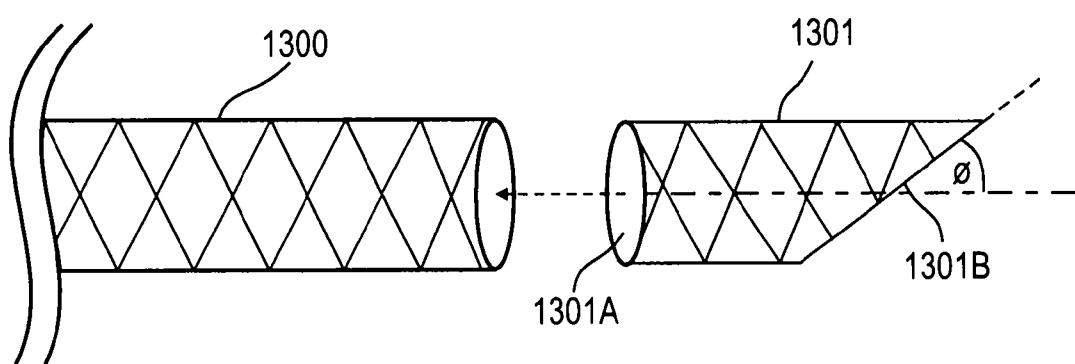


FIG. 13B

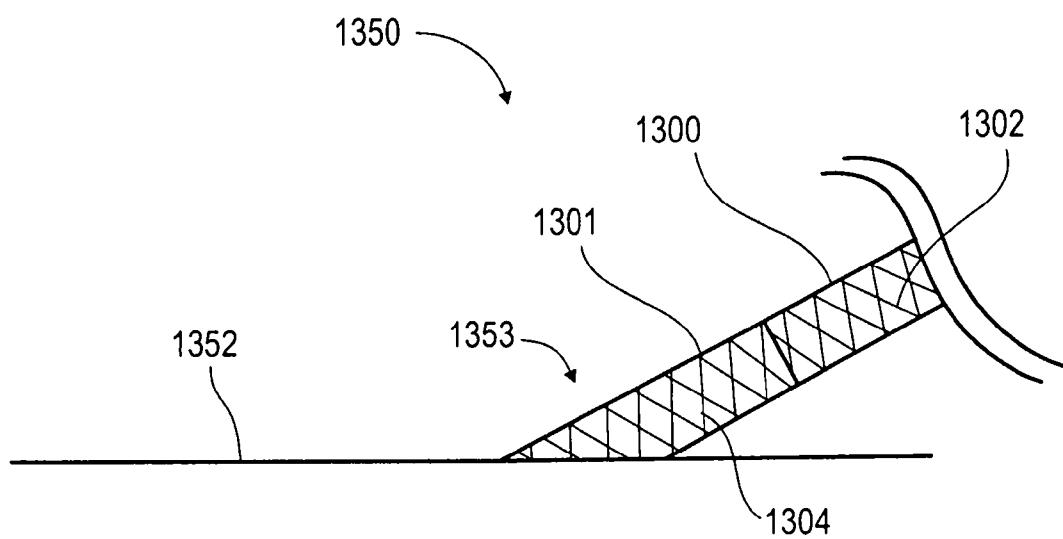
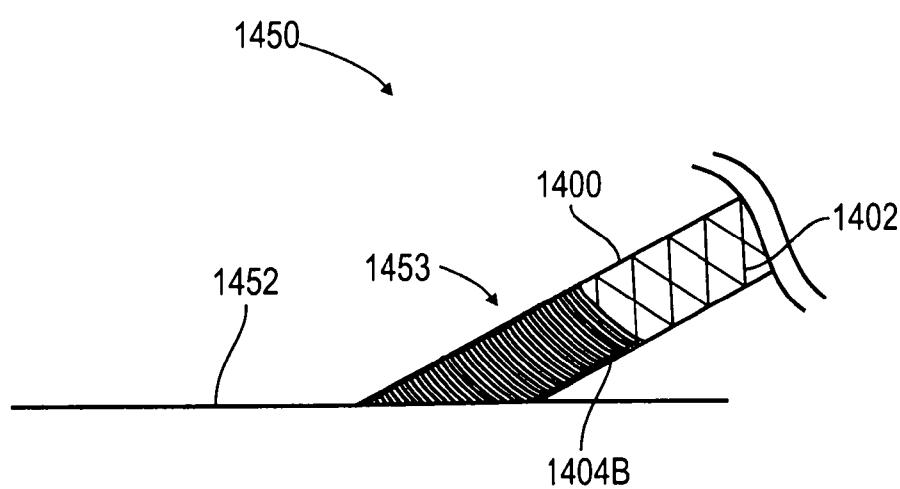
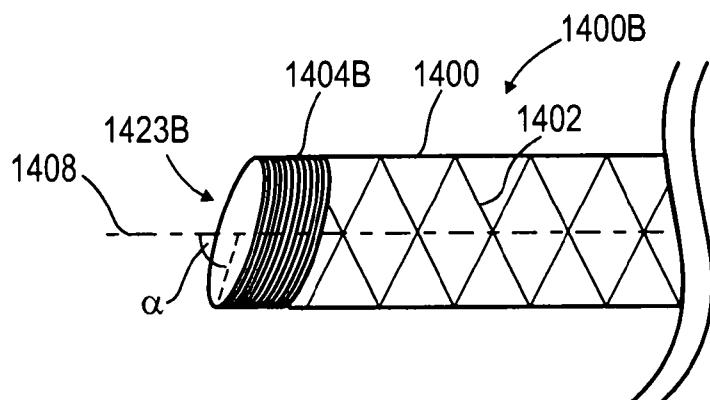
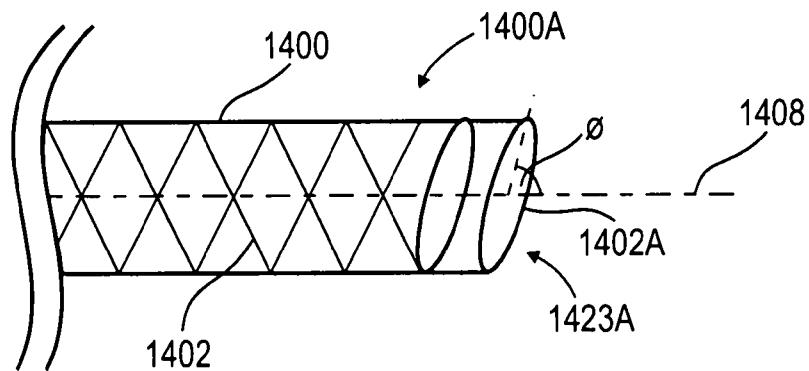


FIG. 13C



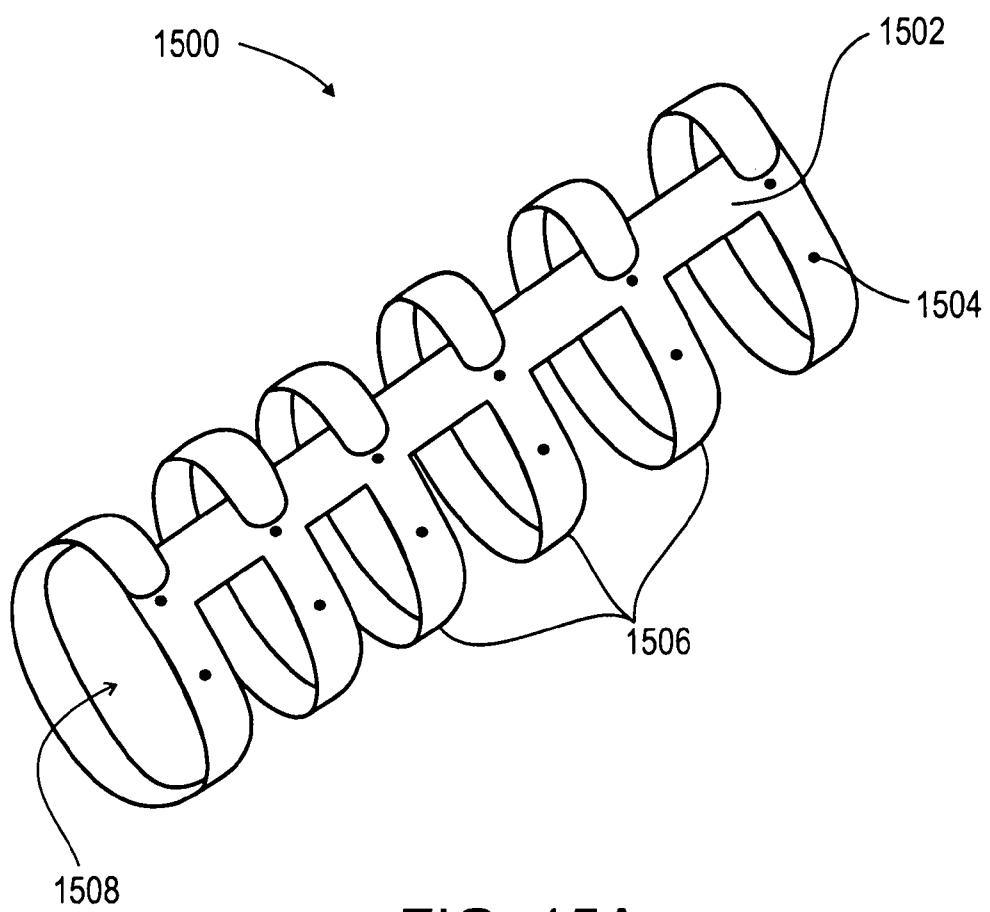


FIG. 15A

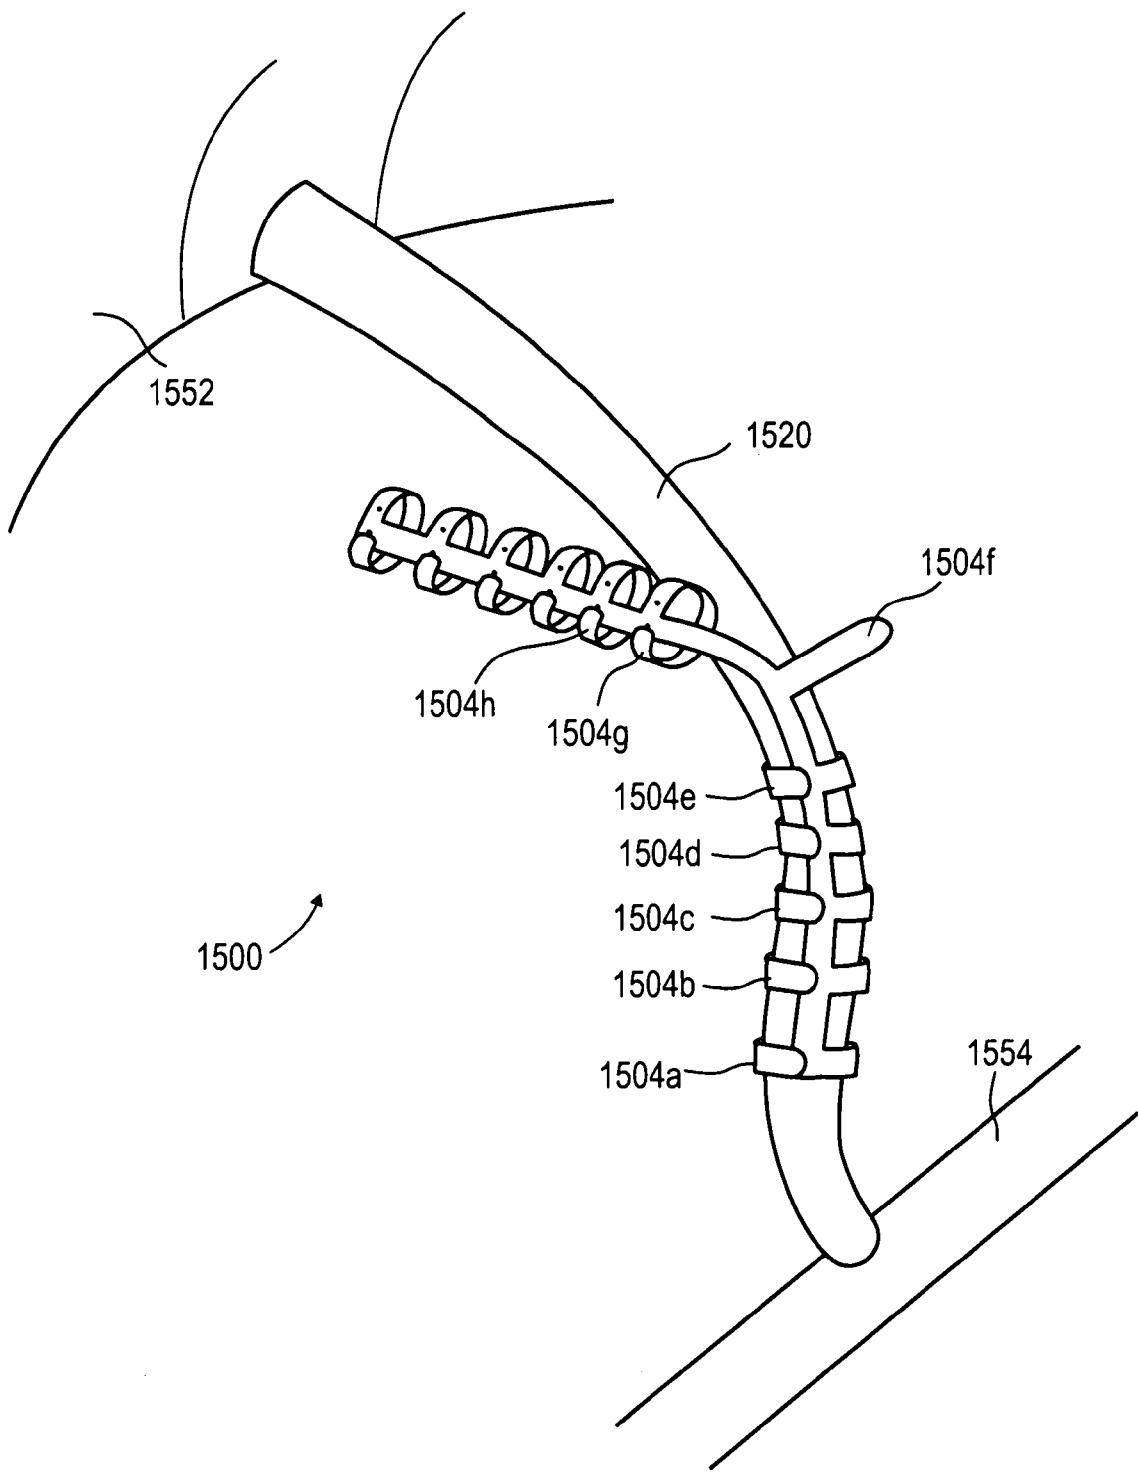


FIG. 15B

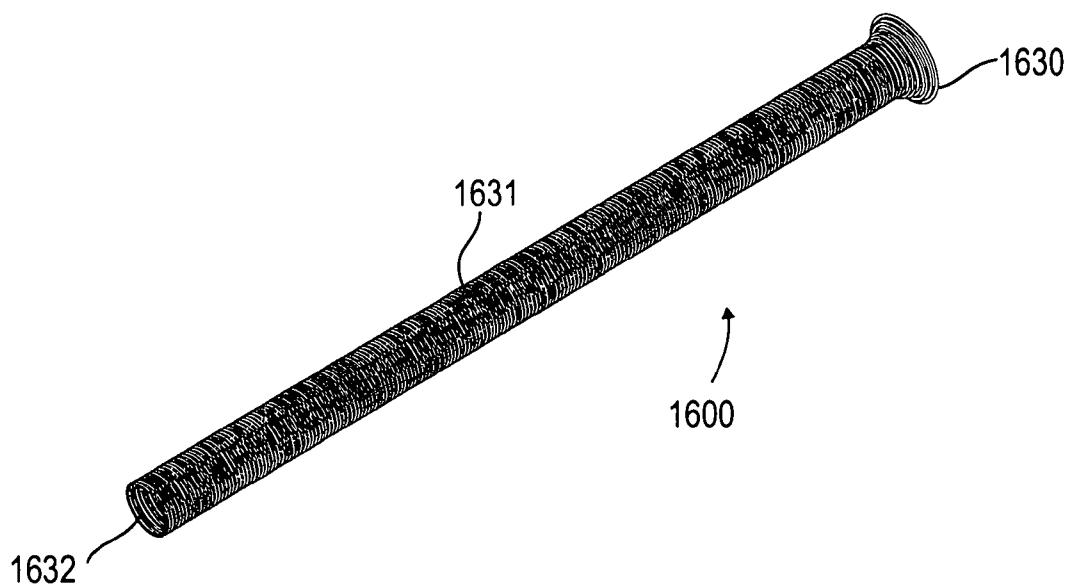


FIG. 16A

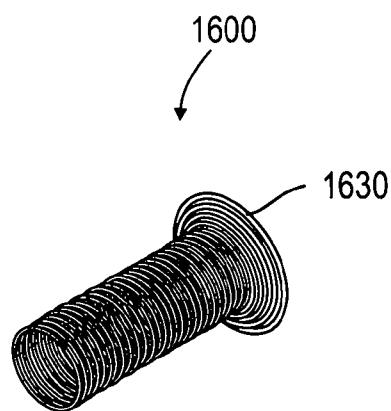


FIG. 16B

2009318772 27 May 2011

15/18

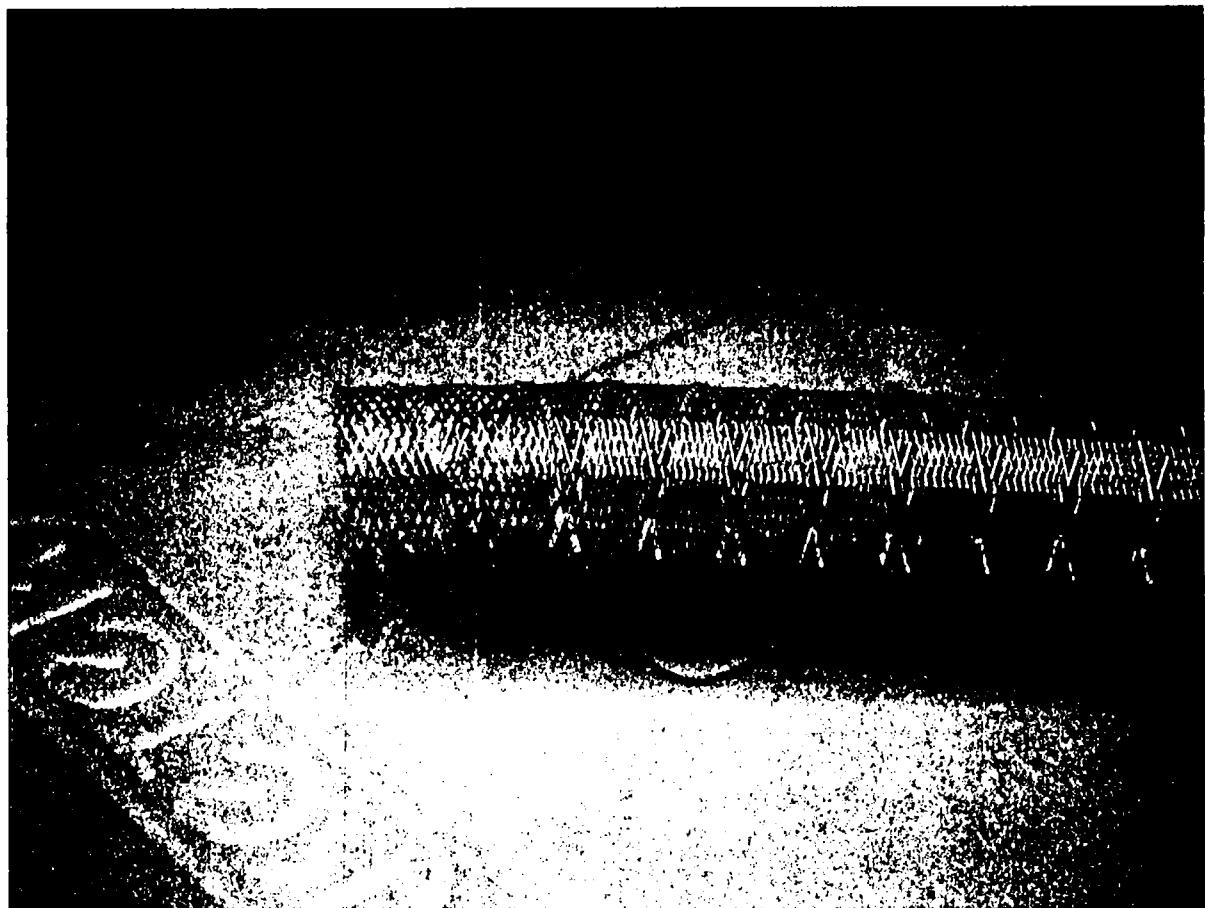


FIG. 17A

2009318772 27 May 2011

16/18

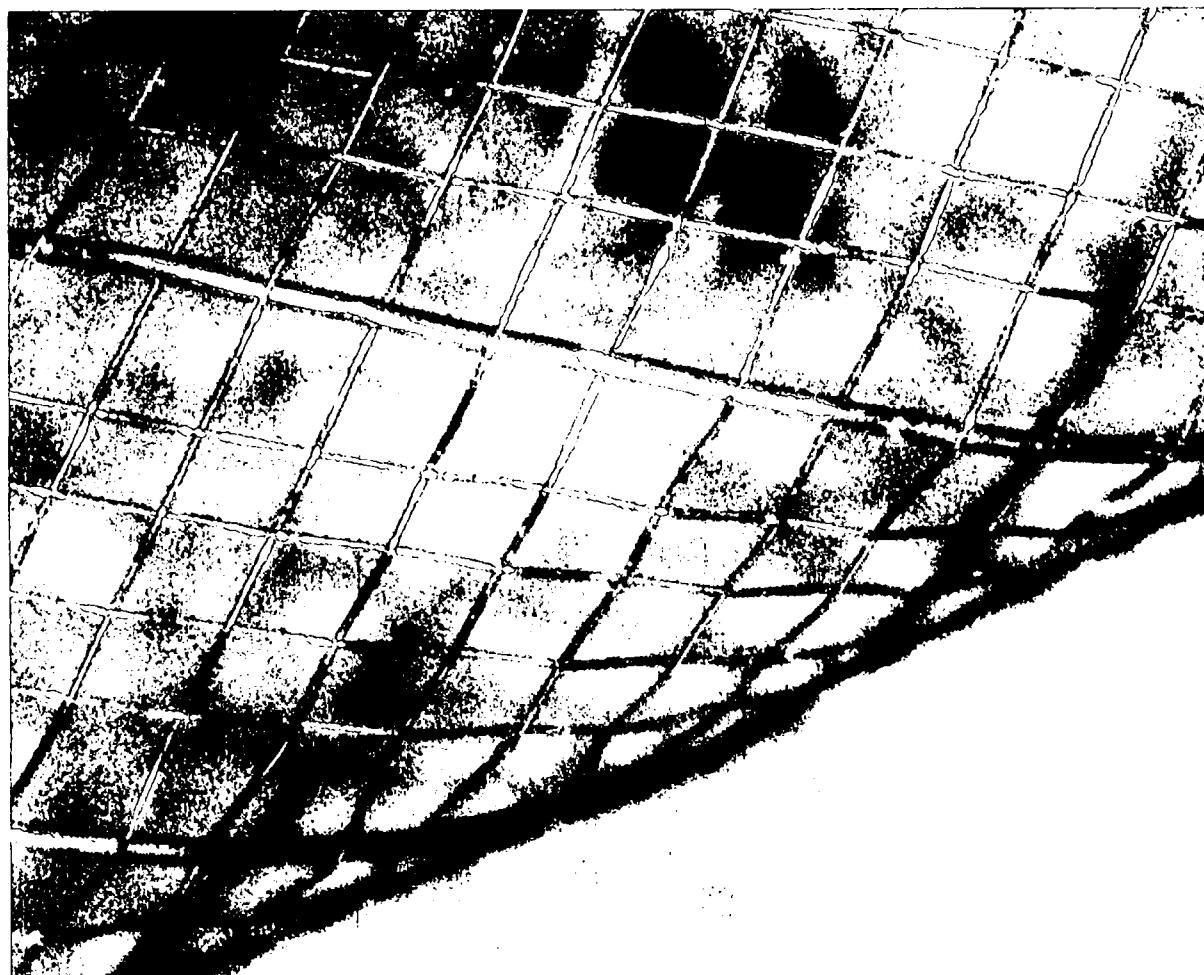


FIG. 17B

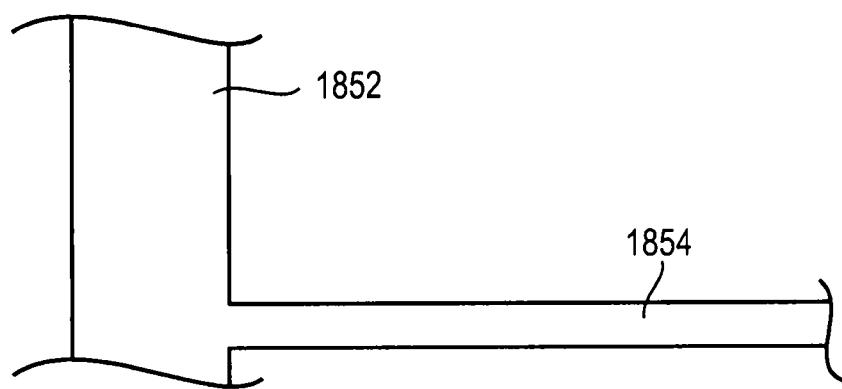


FIG. 18A

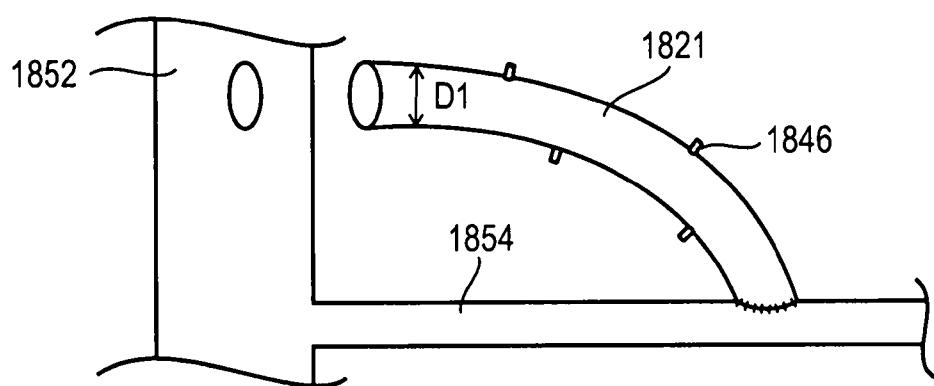


FIG. 18B

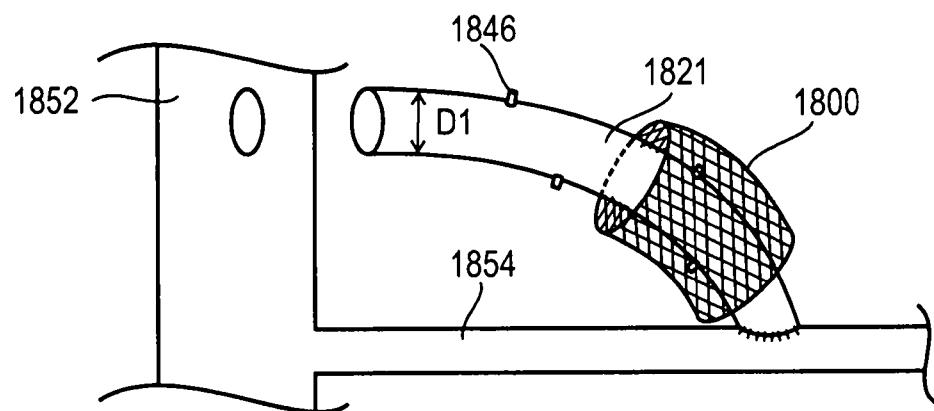


FIG. 18C

18/18

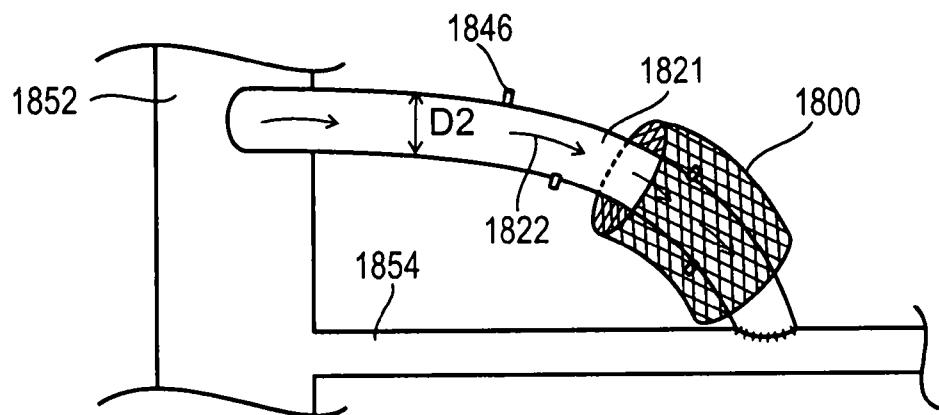


FIG. 18D

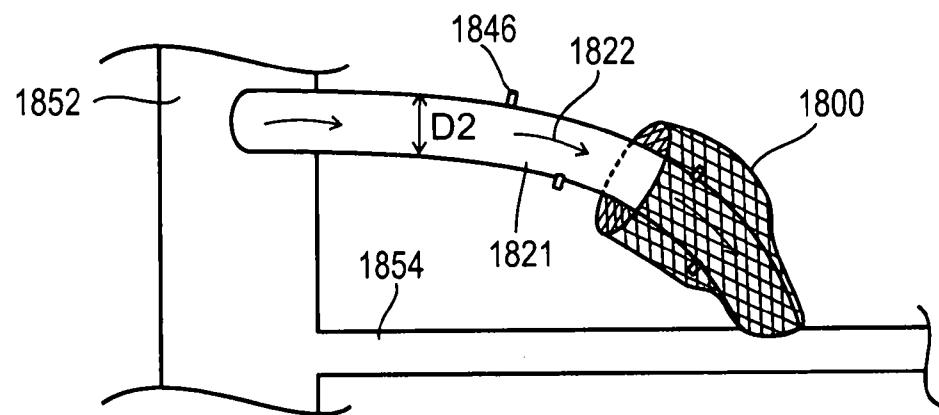


FIG. 18E

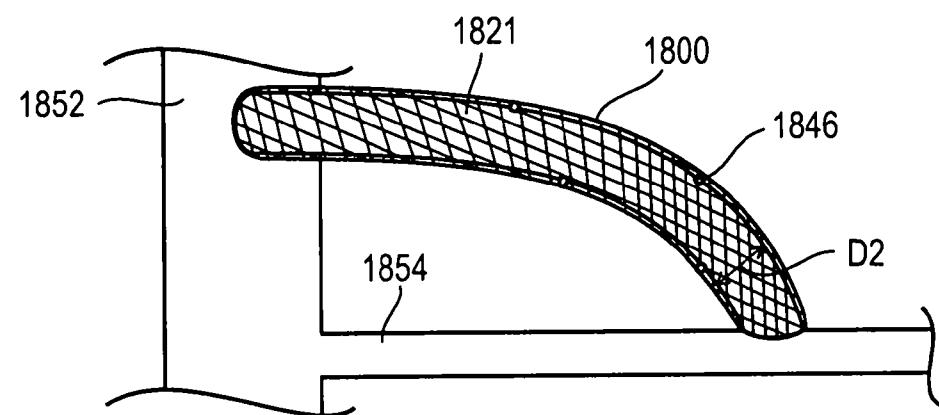


FIG. 18F