



(51) International Patent Classification:
H04W 28/00 (2009.01)

(21) International Application Number:
PCT/CN2016/104871

(22) International Filing Date:
7 November 2016 (07.11.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/252,037 6 November 2015 (06.11.2015) US
15/140,044 27 April 2016 (27.04.2016) US

(71) Applicant: **HUAWEI TECHNOLOGIES CO., LTD.**
[CN/CN]; Huawei Administration Building, Bantian,
Longgang District, Shenzhen, Guangdong 518129 (CN).

(72) Inventors: **MA, Jianglei**; 3 Bon Echo Crescent, Ottawa,
Ontario K2M 2W5 (CA). **RONG, Lu**; 1940 Xinzha Road,
Rm 205, Unit 10, Shanghai 201206 (CN). **AU, Kelvin Kar
Kin**; 233 Tandalee Cres., Kanata, Ontario K2M 0A2 (CA).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SYSTEMS AND METHODS FOR SELF-CONTAINED AIR INTERFACE PARTITIONS

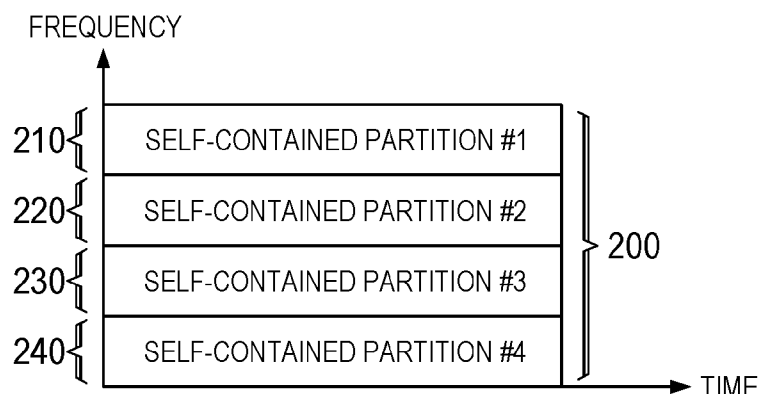


FIG. 2

(57) Abstract: Signal processing complexity in fifth generation (5G) networks can be reduced by communicating wireless signals over self-contained partitions of a carrier such that the wireless transmission communicated over each self-contained partition of the carrier includes all physical control channel signaling required to decode data carried in a physical data channel of the partition. The control signaling may include resource assignment within the partition, modulation and coding scheme indication, reference signal configuration and retransmission information. In some embodiments, an anchor partition of a carrier is used to communicate initial access information for self-contained partitions of the carrier. The initial access information may include center-frequencies, bandwidths, and/or air interface configurations of the self-contained partitions. The anchor partition may also carry load indications associated with the self-contained partitions.

Systems and Methods for Self-Contained Air Interface Partitions

[0001] This patent application claims priority to U.S. Patent Application No. 15/140,044, filed on April 27, 2016 and entitled “Systems and Methods for Self-Contained Air Interface Partitions”, which claims priority to U.S. Provisional Application No. 62/252,037, filed on
5 November 6, 2015 and entitled “Systems and Methods for Self-Contained Air Interface Partitions”, the contents of all of which are hereby incorporated by reference herein as if reproduced in their entirety.

TECHNICAL FIELD

[0002] The present invention relates to wireless communications, and, in particular
10 embodiments, to systems and methods for self-contained air interface partitions.

BACKGROUND

[0003] In conventional wireless networks, resources of a carrier may be divided into different partitions, and each partition may be assigned to carry data for a different mobile device or group of mobile devices. Control signaling associated with the data may typically
15 be carried in a common control channel, such that mobile devices transmit and/or receive data in different partitions of a carrier according to control signaling in a common control channel of the carrier. Devices accessing the carrier need to support a wide frequency range so that they are able to transmit and receive data in a frequency partition that could potentially be spaced apart in frequency from the control channel, resulting in an increase in
20 cost and complexity.

SUMMARY OF THE INVENTION

[0004] Technical advantages are generally achieved by embodiments of this disclosure which describe systems and methods for self-contained air interface partitions.

25 [0005] Methods and devices are described in which a frequency partition within a carrier contains control information pertaining to the data transmitted within that frequency partition. In some embodiments, a mobile device accesses the partition and performs uplink or downlink transmissions without accessing the frequencies within the carrier that are outside the frequency partition.

[0006] Methods and devices are described in which a base station communicates with a first mobile device by sending or receiving first data and first control signaling within a first frequency partition. The base station communicates with a second mobile device by sending or receiving second data and second control signaling within a second frequency partition.

5 **[0007]** In accordance with an embodiment, a method for wireless communication includes:

communicating, by a base station, a first wireless transmission over a first partition of a carrier supporting a first air interface configuration, the first wireless transmission over the first partition of the carrier including a first physical data channel and
10 first physical control channel carrying first control signaling for data transmission in the first physical data channel; and

communicating, by the base station, a second wireless transmission over a second partition of the carrier supporting a second air interface configuration, the second wireless transmission over the second partition of the carrier including a second physical data channel
15 and second physical control channel carrying second control signaling for data transmission in the second physical data channel.

[0008] In a further embodiment, the first control signaling is first dedicated control signaling, and wherein the second control signaling is second dedicated control signaling.

[0009] In a further embodiment, the first wireless transmission further includes
20 transmission of control signaling for establishing initial access to the first partition of the carrier, and the second wireless transmission further includes transmission of control signaling for establishing initial access to the second partition of the carrier.

[0010] In a further embodiment, the first partition of the carrier does not share a common control channel with the second partition of the carrier.

25 **[0011]** In a further embodiment, the first partition and second partition are established over different sub-carriers in the carrier.

[0012] In a further embodiment, the first partition and the second partition are established over different logical sub-bands, the different logical sub-bands being mapped to different resource blocks on the carrier.

30 **[0013]** In a further embodiment, the different logical sub-bands have different hopping periods than one another.

[0014] In a further embodiment, the different logical sub-bands have different frequency hopping patterns than one another.

[0015] In a further embodiment, the method further includes:

transmitting air interface configuration information over a third partition of the carrier, the air interface configuration information specifying parameters of a first air interface configuration used to communicate the first wireless transmissions over the first partition and parameters of a second air interface configuration used to communicate the second wireless transmissions over the second partition.

[0016] In a further embodiment, the method further includes:

transmitting air interface configuration information over the first partition of the carrier, the air interface configuration information specifying parameters of the second air interface configuration used to communicate the second wireless transmissions over the second partition.

[0017] In a further embodiment, the air interface configuration information specifies different sub-carrier spacings, symbol durations, cyclic prefix (CP) lengths, transport block durations, subframe length or bandwidths for the first air interface configuration and the second air interface configuration.

[0018] In a further embodiment, the air interface configuration information specifies different waveforms for the first partition and the second partition on the carrier.

[0019] In a further embodiment, the air interface configuration information specifies different access schemes for the first partition and the second partition on the carrier.

[0020] In a further embodiment, the method further includes:

transmitting load indicators over a third partition of the carrier, the load indicators indicating an amount of traffic or congestion on the first partition and second partition of the carrier.

[0021] In a further embodiment, the load indicators are used by user equipments (UEs) to determine access probabilities for the first partition and the second partition of the carrier.

[0022] In a further embodiment, the same air interface configuration is used to communicate the first wireless transmission over the first partition and the second wireless transmission over the second partition.

[0023] In a further embodiment, the method further includes receiving first Hybrid Automatic Retransmission reQuest (HARQ) signaling associated with data transmitted over the first partition of the carrier, and receiving second HARQ signaling associated with data transmitted over the second partition of the carrier.

[0024] In a further embodiment, the first wireless transmission and the second wireless transmission have different subcarrier spacings.

[0025] According to an additional embodiment, a base station includes:

a processor; and

a non-transitory computer readable storage medium storing programming for execution by the processor, the programming including instructions to:

5 transmit a first wireless transmission over a first partition of a carrier, the first wireless transmission over the first partition of the carrier including a first physical data channel and all physical control signaling for decoding data carried in the first physical data channel at a receiver of the first wireless transmission; and

10 transmit a second wireless transmission over a second partition of the carrier, the second wireless transmission over the second partition of the carrier including a second physical data channel and all physical control signaling for decoding data carried in the second physical data channel at a receiver of the second wireless transmission.

[0026] According to an additional embodiment, a method for wireless communication includes :

15 receiving, by a user equipment (UE), initial access information over an anchor partition of a carrier, the initial access information for initial access in self-contained partitions of the carrier;

selecting, by the UE, one of the self-contained partition from multi self-contained partitions of the carrier, wherein the self-contained partition including a first physical data channel and a physical control channel for data transmission in the first physical data channel; and

20 communicating, by the UE, using at least one self-contained partition of the carrier in accordance with the initial access information received over the anchor partition of the carrier.

25 **[0027]** In a further embodiment, selecting one of the self-contained partitions of the carrier comprises:

selecting one of the self-contained partitions of the carrier in accordance with load indicators communicated over the anchor partition.

[0028] According to an additional embodiment, a user equipment includes:

30 a processor; and

a non-transitory computer readable storage medium storing programming for execution by the processor, the programming including instructions to:

receive initial access information over an anchor partition of a carrier, the initial access information for accessing self-contained partitions of the carrier;

select one of the self-contained partitions of the carrier; and
access the selected self-contained partition of the carrier in accordance with the
initial access information received over the anchor partition of the carrier.

[0029] In a further embodiment, the instructions to select one of the self-contained
5 partitions of the carrier include instructions to:

select one of the self-contained partitions of the carrier in accordance with load
indicators communicated over the anchor partition.

[0030] According to an additional embodiment, a method for wireless communication
includes:

10 receiving, by a mobile device, scheduling information over resources within a
first partition of a carrier, the carrier having a plurality of partitions;

communicating, by the mobile device, a data transmission over resources within
the first partition according to the scheduling signaling; and

communicating, by the mobile device, an acknowledgement (ACK) over
15 resources within the first partition, the ACK being responsive to the data transmission.

[0031] In a further embodiment, the plurality of partitions are a plurality of non-
overlapping partitions.

[0032] In a further embodiment:

communicating a data transmission comprises transmitting a data transmission;

20 and

communicating an ACK comprises receiving an ACK.

[0033] In a further embodiment,:

communicating a data transmission comprises receiving a data transmission; and

communicating an ACK comprises transmitting an ACK.

25 **[0034]** According to an additional embodiment, a method for wireless communication
includes:

transmitting, by a base station, a first dedicated control signaling in a first
physical control channel over a first partition of a carrier supporting a first air interface
configuration;

30 communicating, by the base station, a first wireless transmission over the first
partition, the first wireless transmission over the first partition of the carrier in accordance
with the first dedicated control signaling;

transmitting, by the base station, second dedicated control signaling in a second
physical control channel over a second partition of a carrier supporting a second air interface

configuration; and

communicating, by the base station, a second wireless transmission over a second partition of the carrier supporting a second air interface configuration in accordance with the second dedicated physical control channel signaling.

5 [0035] In a further embodiment, the first dedicated control channel signaling includes signaling for establishing initial access to the first partition of the carrier, and the second dedicated control channel signaling includes signaling for establishing initial access to the second partition of the carrier.

[0036] In a further embodiment, the first partition of the carrier does not share a
10 common control channel with the second partition of the carrier.

[0037] In a further embodiment, the first partition and second partition are established over different sub-carrier frequencies of the carrier.

[0038] In a further embodiment, the first partition and the second partition are established over different logical sub-bands, the different logical sub-bands being mapped to
15 different resource blocks on the carrier.

[0039] In a further embodiment, the different logical sub-bands have different hopping periods than one another.

[0040] In a further embodiment, the different logical sub-bands have different frequency hopping patterns than one another.

20 [0041] In a further embodiment, the method further includes:
transmitting air interface configuration information over a third partition of the carrier, the air interface configuration information specifying parameters of a first air interface configuration used to communicate the first wireless transmission over the first partition and parameters of a second air interface configuration used to communicate the
25 second wireless transmission over the second partition.

[0042] In a further embodiment, the air interface configuration information specifies different sub-carrier spacings, symbol durations, cyclic prefix (CP) lengths, transport block durations, subframe length or bandwidths for the first air interface configuration and the second air interface configuration.

30 [0043] In a further embodiment, the air interface configuration information specifies different center frequencies for the first partition and the second partition on the carrier.

[0044] In a further embodiment, the air interface configuration information specifies different waveforms for the first partition and the second partition on the carrier.

[0045] In a further embodiment, the air interface configuration information specifies different access schemes for the first partition and the second partition on the carrier.

[0046] In a further embodiment, the method further includes:

transmitting load indicators over a third partition of the carrier, the load
5 indicators indicating an amount of traffic or congestion on the first partition and second partition of the carrier.

[0047] In a further embodiment, the load indicators are used by user equipments (UEs) to determine access probabilities for the first partition and the second partition of the carrier.

[0048] In a further embodiment, the same air interface configuration is used to
10 communicate the first wireless transmission over the first partition and the second wireless transmission over the second partition.

[0049] In a further embodiment, the first wireless transmission further carries Hybrid Automatic Retransmission reQuest (HARQ) signaling associated with data transmitted over the first partition of the carrier, and the second wireless transmission further carries HARQ
15 signaling associated with data transmitted over the second partition of the carrier.

BRIEF DESCRIPTION OF THE DRAWINGS

[0050] For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following description taken in conjunction with the accompanying drawings, in which:

20 [0051] FIG. 1 is a diagram of an embodiment wireless network;

[0052] FIG. 2 is a diagram of a carrier that includes self-contained partitions;

[0053] FIG. 3 is a diagram of a carrier that includes an anchor partition and self-contained partitions;

[0054] FIG. 4 is a diagram of an embodiment load indicator communicated in an anchor
25 partition;

[0055] FIG. 5 is a diagram of a carrier that includes physical and logical self-contained logical partitions;

[0056] FIG. 6 is a diagram of a logical partition configuration indication;

[0057] FIG. 7 is a flowchart of an embodiment method for communicating wireless
30 transmissions over self-contained partitions of a carrier;

[0058] FIG. 8 is a flowchart of an embodiment method for facilitating access to self-contained partitions of a carrier using an anchor partition of the carrier;

[0059] FIG. 9 is a flowchart of an embodiment method for accessing self-contained partitions of a carrier;

[0060] FIG. 10 is a diagram of an embodiment processing system; and

[0061] FIG. 11 is a diagram of an embodiment transceiver.

- 5 [0062] Corresponding numerals and symbols in the different figures generally refer to corresponding parts unless otherwise indicated. The figures are drawn to clearly illustrate the relevant aspects of the embodiments and are not necessarily drawn to scale.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

10 [0063] The making and using of embodiments of this disclosure are discussed in detail below. It should be appreciated, however, that the present invention provides many applicable inventive concepts that can be embodied in a wide variety of specific contexts. The specific embodiments discussed are merely illustrative of specific ways to make and use the invention, and do not limit the scope of the invention.

15 [0064] As mentioned above, conventional wireless networks may use a common control channel to carry control signaling for different partitions of a carrier. Accordingly, a mobile device may need to monitor both the resource partition assigned to the mobile device and the common control channel. Next generation wireless networks may have much wider carrier bands than conventional wireless networks, and as a result, there may be relatively wide frequency spacings between resource partitions and a common control channel in a carrier.

20 Monitoring a resource partition and a common control channel that are separated by a wide frequency spacing may be complex from the perspective of the mobile device, particularly when different air interface configurations are used to communicate signaling over the control channel and resource partition.

25 [0065] Aspects of this disclosure communicate wireless signals over multiple self-contained partitions in a carrier such that each partition of the carrier includes all physical control channel signaling required to decode data carried in a physical data channel of the partition. The control signaling may include resource assignment within the partition, modulation and coding scheme indication, reference signal configuration and retransmission information. A downlink transmission over a self-contained carrier partition may also include

30 physical control channel signaling for communicating wireless signals in the uplink direction, such as over uplink physical data and control channels. An uplink transmission over the self-contained partition may include various control signaling related to the downlink transmission, such as channel state information (CSI) reports (e.g., modulation coding

scheme (MCS) selection, etc.) and Hybrid Automatic Repeat reQuest (HARQ) signaling (e.g., ACK, NACK, etc.). In an embodiment, a wireless transmission over a partition of a carrier carries HARQ signaling associated with data transmitted over the partition of the carrier. In another embodiment, a HARQ retransmission mode is disabled in a partition, and the partition excludes HARQ signaling. The uplink transmission may also include an uplink data transmission and uplink control signaling related to the uplink data transmission. The uplink transmission may further include scheduling/resource requests for uplink and/or downlink resources. In some embodiments, physical control channel signaling in a partition may exclude initial access information, and the initial access information may be communicated in an Anchor partition. In other embodiments, physical control channel signaling in a partition includes initial access information.

[0066] In some embodiments, an anchor partition of a carrier is used to communicate initial access information for self-contained partitions of the carrier. The initial access information may include center-frequencies, bandwidths, and/or air interface configurations of the self-contained partitions. The anchor partition may also carry load indications associated with the self-contained partitions. The load indications may allow mobile devices to identify and/or estimate congestion and/or access probabilities associated with the self-contained partitions. These and other inventive aspects are described in greater detail below.

[0067] FIG. 1 is a diagram of a wireless network 100 for communicating data. The wireless network 100 includes a base station 110 having a coverage area 101, a plurality of mobile devices 120, and a backhaul network 130. As shown, the base station 110 establishes uplink (dashed line) and/or downlink (dotted line) connections with the mobile devices 120, which serve to carry data from the mobile devices 120 to the base station 110 and vice-versa. Data carried over the uplink/downlink connections may include data communicated between the mobile devices 120, as well as data communicated to/from a remote-end (not shown) by way of the backhaul network 130. As used herein, the term “base station” refers to any component (or collection of components) configured to provide wireless access to a network, such as an evolved NodeB (eNB), a macro-cell, a femtocell, a Wi-Fi access point (AP), a transmit/receive point (TRP), or other wirelessly enabled devices. Base stations may provide wireless access in accordance with one or more wireless communication protocols, e.g., long term evolution (LTE), LTE advanced (LTE-A), High Speed Packet Access (HSPA), Wi-Fi 802.11a/b/g/n/ac. As used herein, the term “mobile device” refers to any component (or collection of components) capable of establishing a wireless connection with a base station. The terms “mobile device,” “user equipment (UE),” and “mobile station (STA)” are used

interchangeably throughout this disclosure. In some embodiments, the network 100 may comprise various other wireless devices, such as relays.

[0068] Self-contained partitions include sufficient physical control channel signaling for

decoding data in a physical data channel of the self-contained partition. The control channel

5 signaling within a self-contained partition includes scheduling signaling if the self-contained

partition is being used for grant-based access. The control channel signaling within a self-

contained partition includes HARQ feedback signaling, such as acknowledgement (ACK)

and negative ACK (NACK) transmissions, if HARQ signaling is being used for the

communications in the self-contained partition. In some embodiments, a self-contained

10 partition includes all physical control channel signaling pertaining to the data transmissions in

the self-contained partition. Control information for data transmitted outside the self-

contained frequency partition is communicated outside the self-contained frequency partition.

In this sense, the control signaling within the self-contained partition is dedicated signaling

for the data transmissions in the self-contained partition. The self-contained partition includes

15 at least some resources reserved for downlink transmissions so that the base station can send

control signaling to the mobile devices. The self-contained partition additionally includes at

least some resources reserved for data transmissions in one or both of the uplink or the

downlink directions, and in some embodiments includes at least some resources reserved for

HARQ feedback in the direction opposite the data transmissions. It is contemplated that some

20 other signaling may optionally occur outside the self-contained partition, such as reference or

measurement signals, or synchronization signals. A mobile device may be configured to be

capable of communicating only in one self-contained partition, and to not be capable of

communicating in resources outside the self-contained partition, e.g. the mobile device may

be capable of communicating only at frequencies within the self-contained partition. In some

25 embodiments, self-contained carrier partitions are positioned in different frequency sub-bands

of a carrier. FIG. 2 is a diagram of a carrier 200 that includes a plurality of self-contained

partitions 210, 220, 230, 240. Each of the self-contained partitions 210, 220, 230, 240 carries

a physical data channel as well as all the physical control channel signaling required to

decode data in the corresponding physical data channel. In some embodiments, the physical

30 control channel signaling includes initial access information. The initial access information

may be included in a broadcast channel communicated over the self-contained partition. In

other embodiments, the initial access information is a priori information of the mobile

devices, or is derived from some other source, e.g., an anchor partition that will be described

below. Each of the self-contained partitions 210, 220, 230, 240 are communicated over different, non-overlapping, frequency sub-bands of the carrier 200.

[0069] The self-contained partitions 210-240 of the carrier 200 may be assigned different air interface configurations. As used herein, the term air interface configuration collectively refers to the subset of parameters used to communicate a signal over an air interface, which may include a subset of physical layer parameters (e.g., sub-carrier spacing, transmission time interval (TTI), transport block duration, subframe length, cyclic prefix (CP) length) used to communicate the signal over the air interface, a waveform used to communicate the signal over the air interface, a transmission mode used to transmit the signal over the air interface, an access scheme used to access resources over which the signal is transmitted, a re-transmission scheme used to verify that the signal communicated over the air interface was successfully received, or a combination thereof. As used herein, the term “transport block” refers to entity occupying a duration in time. Given that context, “transport block duration” refers to the duration in time occupied by the transport block.

[0070] Because the self-contained partitions 210-240 carry sufficient physical control channel signaling to decode data in the physical data channel, it may be unnecessary for mobile devices receiving data over different ones of the self-contained partitions 210-240 to monitor a common control channel. This may be advantageous in networks that use different air interface configurations for the different self-contained partitions 210-240, because it allows each mobile device to maintain a single air interface configuration for its assigned self-contained partition 210-240 without having to maintain a second air interface configuration for the common control channel. In some embodiments, a single mobile device may access multiple self-contained partitions with the same or different air interface configurations, e.g. two self-contained partitions with different subcarrier spacings. In some embodiments, signals in different self-contained partitions may be communicated using the same air interface configuration.

[0071] One example way to configure self-contained partitions is to configure multiple different partitions with parameters, such as physical layer parameters, suitable for particular types of wireless services. In this manner, a UE accessing the network for each of a plurality of services could be allocated the appropriate self-contained partition. An embodiment configuration of self-contained partitions is shown below in Table 1:

Self-contained	SCS	CP length	Slot duration	Access Scheme	Retransmission Scheme	Wireless Resource

Partition						
#1	Large	Small	Normal	Scheduled	HARQ+ARQ	BW1
#2	Normal	Large	Small	Grant-Free / Scheduled	HARQ(a few times)+ARQ	BW3
#3	Small	Large	Large	Grant-Free / SPS	ARQ	BW2

Self- contained Partition	Waveform	Frame structure	Channel Coding	MCS	Protocol Stack	State Machine
#1	OFDMA & SCMA	FS type 1	LDPC & Polar Codes	High data rate	Full	without ECO
#2	SC-FDMA	FS type 1 / type 2	Polar Codes / CC	Low data rate	Normal	with / without ECO
#3	SCMA	FS type 2	Polar Codes	Low data rate	Simple	with ECO

Table 1

[0072] In this example, partition 1 is suitable for enhanced mobile broadband (eMBB) communication, partition 2 is suitable for ultra-reliable low-latency communication (URLLC), and partition 3 is suitable for massive machine-type communication (mMTC). Additional parameters can also be configured for each partition, such as the scheduling interval (sometimes also known as subframe duration, slot duration, mini-slot duration, scheduling unit, or transmission duration). Additional self-contained partitions can be established, or sub-partitions with different parameters configured within self-contained partitions, for additional service types, such as Video, Voice, Gaming, Emergency, or delay sensitive high data rate (HDR), as well as for more specialized service sub-types, such as URLLC-HDR, URLLC-LDR, mMTC-downlink (DL), mMTC-uplink (UL). It is further contemplated that multiple partitions having the same or similar parameters could be configured in either contiguous or non-contiguous resources, to support the same or similar service types.

Alternatively, parameters could be determined for self-contained partitions assigned to particular traffic or service types, and one or more self-contained partitions intended to support a particular traffic or service type could be configured with the parameters associated with that traffic or service type. In addition, one or more parameters of a partition could be configurable either dynamically or semi-statically, to adapt to changing needs or conditions.

[0073] Other aspects of individual partitions could be adapted or modified to better support the desired service. For example, a partition for use by eMBB traffic could be configured in a higher-frequency band, to have access to more bandwidth. The high frequency band may require the use of smaller cells to access the network, and larger subcarrier spacings could be used to mitigate interference. A shorter cyclic prefix (CP) may be used to limit CP overhead, due to the short delay spread associated with small cells. Different waveforms could also be used, such as orthogonal frequency-division multiple access (OFDMA) for scheduled communications and sparse code multiple access (SCMA) for grant-free communications. Different channel coding schemes could also be used, such as low-density parity-check (LDPC) codes, convolutional codes, polar codes, or turbo codes, depending on the code length. A partition for use by URLLC traffic might be configured in a lower-frequency band for increased reliability, and could primarily use macro cells to minimize backhaul latency. Low data rates could be used to increase reliability and minimize the need for retransmissions that could increase latency. Grant-free access could be used to avoid the latency associated with scheduling signaling, particularly in uplink. Non-orthogonal access schemes could be used to maximize connectivity while minimizing resource collisions. A partition for use by mMTC traffic could primarily be configured in a low frequency band to increase coverage area, and support lower-power UEs. Grant-free access or semi-persistent scheduling could be used to reduce signaling overhead. Large transmission slots and low coding rates could be used to improve link budget. Simple retransmission schemes could be used to reduce the complexity of the UEs.

[0074] Different self-contained partitions could have different frame structures. Each self-contained partition could be configurable to have one of multiple available frame structures, and some of the available frame structures could be common to more than one self-contained partition.

[0075] Multiple numerologies could be predefined or specified by signaling, and one or more numerologies could be commonly available for use in more than one partition. Of the available numerologies in a particular partition or carrier frequency range, one numerology

could be predefined as a default numerology. Table 2 shows an example set of numerologies for two different carrier frequency ranges.

Carrier Frequency	0.6 ~ 3 GHz		3 ~ 6 GHz		
Numerology Index	0	1	0	1	2
SC Spacing (kHz)	7.5	15	15	30	60
RB Size (kHz)	90	180	180	360	720
Number of Symbols per Subframe (1ms)	7 (2/5)	14(2/12)	14(2/12)	28(2/26)	56 (2/54)
Symbol Duration w/o CP (μs)	133.333	66.667	66.667	33.333	16.667
CP length (samples)	$304/288 * 2^{-m}$	$160/144 * 2^{-m}$	$160/144 * 2^{-m}$	$80/72 * 2^{-m}$	$52/36 * 2^{-m}$
CP length (μs)	9.896/9.375	5.208/4.687	5.208/4.687	2.604/2.344	1.302/1.172

Table 2

Alternatively, multiple numerologies could be defined, and subsets of the defined numerologies could be made available in different carrier frequency ranges, as shown in Tables 3 and 4 below. Numerology Index	0	1	2	3
SC Spacing (kHz)	7.5	15	30	60
RB Size (kHz)	90	180	360	720

Number of Symbols per Subframe (1ms)	7 (2/5)	14(2/12)	28(2/26)	56 (2/54)
Symbol Duration w/o CP (μs)	133.333	66.667	33.333	16.667
CP length (samples)	304/288 *2 ^{-m}	160/144 *2 ^{-m}	80/72 *2 ^{-m}	52/36 *2 ^{-m}
CP length (μs)	9.896/9.375	5.208/4.687	2.604/2.344	1.302/1.172

Table 3

Carrier Frequency	0.6 ~ 3 GHz		3 ~ 6 GHz			Over 6 GHz	
Numerology Index	0	1	1	2	3	2	3

Table 4

[0076] A numerology may be selected for use from the available options based on any suitable factor, such as service type, or UE capability. The network and the UEs may communicate the selected numerology by signaling.

[0077] A network device may be capable of defining new partitions with new configurations, and signal the necessary parameters to the UEs, for example to support a different level of device connectivity, a new service type, or a new service requirement (e.g., quality of service (QoS) level). This may be done by signaling one of a small number of predetermined configurations and then indicating any modification to one or more parameters of the predetermined configuration, or by explicitly signaling (e.g., broadcasting) the necessary parameters.

[0078] In some embodiments, an anchor partition may be used to provide initial access information to mobile devices entering a network or coverage area. FIG. 3 is a diagram of a carrier 300 that includes an anchor partition 350 and a plurality of self-contained partitions 310, 320, 330. In some embodiments, parameters of the anchor partition 350 are a priori information to mobile devices accessing the network, which allows the mobile devices to access the anchor partition 350 upon entering a network or coverage area associated with the carrier 300. In other embodiments, parameters of the anchor partition 350 are included in a broadcast channel (BCH) indicator 315 communicated in the anchor partition 350.

[0079] Initial access information of the self-contained partitions 310, 320, 330 may be communicated in the anchor partition 350. Initial access information communicated in the anchor partition 350 may identify the center frequencies and/or bandwidths of the self-contained partitions 310, 320, 330, as well as air interface configuration parameters of the

self-contained partitions 310, 320, 330. In some embodiments, initial access information communicated in the anchor partition 350 may identify a subset of the air interface configuration parameters of one or more of the self-contained partitions 310, 320, 330. In such embodiments, air interface configuration parameters of the self-contained partitions 310, 320, 330 that are not communicated over the anchor partition 350 may be determined by the mobile devices upon accessing the respective self-contained partitions 310, 320, 330, e.g., in a broadcast channel of the self-contained partitions 310, 320, 330.

[0080] The anchor partition 350 may also support direct initial access for time-sensitive traffic, and may therefore itself be a self-contained partition in that data can be communicated over a physical data channel in the anchor partition 350 based entirely on physical control channel signaling communicated over the anchor partition 350. In an embodiment, resources of a physical data channel communicated over the anchor partition 350 are accessed in a contention-based manner. In another embodiment, resources of a physical data channel communicated over the anchor partition 350 are accessed in a scheduling-based manner. In yet another embodiment, the anchor partition includes multiple physical data channels, at least one of which includes resources accessed in a contention based manner, and at least another of which includes resources accessed in a scheduling-based manner.

[0081] In some embodiments, the anchor partition 350 carries load indicators or access probability indicators associated with the self-contained partitions 310, 320, 330. The load indicators may allow the mobile devices to predict, or otherwise determine, the availability of resources in the self-contained partitions 310, 320, 330. For example, the load indicators may indicate, or otherwise allow the mobile devices to predict, a level of congestion in the self-contained partitions 310, 320, 330. In one embodiment, resources in one or more of the self-contained partitions 310, 320, 330 are accessed in a contention-based manner, and the load indicators specify a parameter (e.g., back-off value, collision probability) that allows a mobile device to estimate an access probability associated with the corresponding partition. In another embodiment, resources in one or more of the self-contained partitions 310, 320, 330 are accessed in a scheduling-based manner, and the load indicators specify an amount, or percentage, of resources that are unoccupied or otherwise available for allocation to the mobile device.

[0082] FIG. 4 is a diagram of an embodiment load indicator 400 communicated in an anchor partition of a carrier. As shown, the load indicator 400 includes a plurality of load indicators 410, 420, 430 for each of the self-contained partitions of the carrier. Each load indicator indicates a traffic load associated with a partition. In one embodiment, each load

indicator is two bits, and indicates one of four load situations. For example, a two-bit load indicator may indicate that current load is less than thirty percent of maximum capacity, between thirty and fifty-five percent of maximum capacity, between fifty-five and eighty percent of maximum capacity, or over eighty percent of maximum capacity. Other

thresholds/ranges are also possible. In another embodiment, access probability information is sent to the wireless devices to inform them of a projected access probability in one or more partitions. The load indicators and/or access probability information may be unicast to one or more wireless devices. Alternatively, the load indicators and/or access probability information may be multicast or broadcast to multiple wireless devices.

[0083] In some embodiments, a mobile device may select a self-contained partition based on the following inequality: $\sum_{j=1}^{k-1} A_j \leq r < \sum_{j=1}^k A_j$, where j is an index associated with a given self-contained partition, k is the total number of self-contained partitions, r is a random variable generated in the mobile device, and A_j is an access probability parameter for a j th self-contained partition. In an embodiment, the random variable r is used to help decide which partition to use. The access probability parameter is a function of the load indicator or the access probability indicator. For example, the load indicator of 00, 01, 10, 11 may be mapped to access probability of 1.0, 0.7, 0.4, 0.1. For another example, an access probability indicator B_j may be mapped to access probability of 2^{B_j} . The access probabilities indicated may further be normalized. For example, when three access probabilities of 1, 2 and 2 are indicated for three partitions, they may be normalized to $1/(1+2+2)=0.2$, $2/(1+2+2)=0.4$ and $2/(1+2+2)=0.4$, respectively. In some embodiments, the mobile device calculates r based on the following equation: $r = \sum_{j=1}^k A_j \times rand()$, where $rand()$ is a function to generate a random variable uniformly distributed on the interval $[0.0, 1.0]$.

[0084] One or more self-contained carrier partitions may be logical partitions that map to physical resources of the carrier based on different hopping periods and/or hopping patterns. FIG. 5 is a diagram of a carrier 500 includes physical self-contained partitions 510, 520 and logical self-contained partitions 530-580. The physical self-contained partitions 510, 520 map directly to frequency sub-bands of the carrier 500, and the logical self-contained partitions 530-580 are indirectly mapped to sets of physical resources of the carrier 500 based on hopping periods and/or hopping patterns. The logical self-contained partitions 530-580 may be associated with different bandwidths, hopping periods, and/or hopping patterns. The sets of physical resources mapped to each of the self-contained partitions 530-580 may be orthogonal to one another in the time-frequency domain. FIG. 6 is a diagram of a logical

partition configuration indication that may be broadcast in a partition. In this example, multiple physical channels are multiplexed into a single partition.

[0085] FIG. 7 is a flowchart of an embodiment method 700 for communicating wireless transmissions over self-contained partitions of a carrier, as may be performed by a base station. At step 710, the base station communicates a wireless transmission over a first self-contained partition of the carrier in accordance with a first air interface configuration. The wireless transmission communicated over the first self-contained partition includes a physical data channel and all the physical control channel signaling used to decode data in the physical data channel communicated over the first self-contained partition.

[0086] At step 720, the base station communicates a wireless transmission over a second self-contained partition of the carrier in accordance with a second air interface configuration. The wireless transmission communicated over the first self-contained partition includes a physical data channel and all the physical control channels used to decode data in the physical data channel communicated over the second self-contained partition.

[0087] In one embodiment, the first self-contained partition and the second self-contained partition are physical partitions mapped to different frequency sub-bands of the carrier. In another embodiment, the first self-contained partition and the second self-contained partition are logical partitions mapped to sets of resources in the carrier that are orthogonal in the time-frequency domain. In yet another embodiment, the first self-contained partition is a physical partition, and the second self-contained partition is a logical partition.

[0088] FIG. 8 is a flowchart of an embodiment method 800 for facilitating access to self-contained partitions of a carrier using an anchor partition of the carrier, as may be performed by a base station. At step 810, the base station communicates initial access information for the self-contained partitions of the carrier over the anchor partition. The initial access information may identify center frequencies, bandwidths, and/or air interface configurations of the self-contained partitions. In some embodiments, the base station also communicates load indications for the self-contained partitions over the anchor partition. At step 820, the base station communicates wireless signals over the self-contained partitions of the carrier in accordance with the initial access information sent over the anchor partition of the carrier. The wireless transmissions communicated over each of the self-contained partitions includes a physical data channel and all the physical control channel signaling used to decode data in the physical data channel communicated over the corresponding self-contained partition.

[0089] FIG. 9 is a flowchart of an embodiment method 900 for accessing self-contained partitions of a carrier, as may be performed by a mobile device. At step 910, the mobile device receives initial access information for the self-contained partitions of the carrier over an anchor partition of the carrier. At step 920, the mobile device selects one of the self-contained partitions of the carrier. In some embodiments, the mobile device selects one of the self-contained partitions based on initial access information and/or load indicators received over the anchor partition. At step 930, the mobile device communicates wireless signals over the selected self-contained partition in accordance with the initial access information received over the anchor partition of the carrier.

[0090] FIG. 10 is a block diagram of an embodiment processing system 1000 for performing methods described herein, which may be installed in a host device. As shown, the processing system 1000 includes a processor 1004, a memory 1006, and interfaces 1010-1014, which may (or may not) be arranged as shown in FIG. 10. The processor 1004 may be any component or collection of components adapted to perform computations and/or other processing related tasks, and the memory 1006 may be any component or collection of components adapted to store programming and/or instructions for execution by the processor 1004. In an embodiment, the memory 1006 includes a non-transitory computer readable medium. The interfaces 1010, 1012, 1014 may be any component or collection of components that allow the processing system 1000 to communicate with other devices/components and/or a user. For example, one or more of the interfaces 1010, 1012, 1014 may be adapted to communicate data, control, or management messages from the processor 1004 to applications installed on the host device and/or a remote device. As another example, one or more of the interfaces 1010, 1012, 1014 may be adapted to allow a user or user device (e.g., personal computer (PC), etc.) to interact/communicate with the processing system 1000. The processing system 1000 may include additional components not depicted in FIG. 10, such as long term storage (e.g., non-volatile memory, etc.).

[0091] In some embodiments, the processing system 1000 is included in a network device that is accessing, or part otherwise of, a telecommunications network. In one example, the processing system 1000 is in a network-side device in a wireless or wireline telecommunications network, such as a base station, a relay station, a scheduler, a controller, a gateway, a router, an applications server, or any other device in the telecommunications network. In other embodiments, the processing system 1000 is in a user-side device accessing a wireless or wireline telecommunications network, such as a mobile station, a user

equipment (UE), a personal computer (PC), a tablet, a wearable communications device (e.g., a smartwatch, etc.), or any other device adapted to access a telecommunications network.

[0092] In some embodiments, one or more of the interfaces 1010, 1012, 1014 connects the processing system 1000 to a transceiver adapted to transmit and receive signaling over the

5 telecommunications network. FIG. 11 is a block diagram of a transceiver 1100 adapted to transmit and receive signaling over a telecommunications network. The transceiver 1100 may be installed in a host device. As shown, the transceiver 1100 comprises a network-side interface 1102, a coupler 1104, a transmitter 1106, a receiver 1108, a signal processor 1110, and a device-side interface 1112. The network-side interface 1102 may include any

10 component or collection of components adapted to transmit or receive signaling over a wireless or wireline telecommunications network. The coupler 1104 may include any component or collection of components adapted to facilitate bi-directional communication over the network-side interface 1102. The transmitter 1106 may include any component or collection of components (e.g., up-converter, power amplifier, etc.) adapted to convert a

15 baseband signal into a modulated carrier signal suitable for transmission over the network-side interface 1102. The receiver 1108 may include any component or collection of components (e.g., down-converter, low noise amplifier, etc.) adapted to convert a carrier signal received over the network-side interface 1102 into a baseband signal. The signal processor 1110 may include any component or collection of components adapted to convert a

20 baseband signal into a data signal suitable for communication over the device-side interface(s) 1112, or vice-versa. The device-side interface(s) 1112 may include any component or collection of components adapted to communicate data-signals between the signal processor 1110 and components within the host device (e.g., the processing system 1000, local area network (LAN) ports, etc.).

25 **[0093]** The transceiver 1100 may transmit and receive signaling over any type of communications medium. In some embodiments, the transceiver 1100 transmits and receives signaling over a wireless medium. For example, the transceiver 1100 may be a wireless transceiver adapted to communicate in accordance with a wireless telecommunications protocol, such as a cellular protocol (e.g., long-term evolution (LTE), etc.), a wireless local area network (WLAN) protocol (e.g., Wi-Fi, etc.), or any other type of wireless protocol (e.g., Bluetooth, near field communication (NFC), etc.). In such embodiments, the network-side interface 1102 comprises one or more antenna/radiating elements. For example, the network-side interface 1102 may include a single antenna, multiple separate antennas, or a multi-antenna array configured for multi-layer communication, e.g., single input multiple output

30

(SIMO), multiple input single output (MISO), multiple input multiple output (MIMO), etc. In other embodiments, the transceiver 1100 transmits and receives signaling over a wireline medium, e.g., twisted-pair cable, coaxial cable, optical fiber, etc. Specific processing systems and/or transceivers may utilize all of the components shown, or only a subset of the

5 components, and levels of integration may vary from device to device.

[0094] It should be appreciated that one or more steps of the embodiment methods provided herein may be performed by corresponding units or modules. For example, a signal may be transmitted by a transmitting unit or a transmitting module. A signal may be received by a receiving unit or a receiving module. A signal may be processed by a processing unit or
10 a processing module. Other steps may be performed by a sending unit/module, a selecting unit/module, an assigning unit/module, an incrementing unit/module, a decrementing unit/module, and/or an accessing unit/module. The respective units/modules may be hardware, software, or a combination thereof. For instance, one or more of the units/modules may be an integrated circuit, such as field programmable gate arrays (FPGAs) or application-specific
15 integrated circuits (ASICs).

[0095] Although this invention has been described with reference to illustrative embodiments, this description is not intended to be construed in a limiting sense. Various modifications and combinations of the illustrative embodiments, as well as other embodiments of the invention, will be apparent to persons skilled in the art upon reference to
20 the description. It is therefore intended that the appended claims encompass any such modifications or embodiments.

WHAT IS CLAIMED IS:

1. A method for wireless communication, the method comprising:
communicating, by a base station, a first wireless transmission over a first partition of a carrier supporting a first air interface configuration, the first wireless transmission over the first partition of the carrier including a first physical data channel and first physical control channel carrying first control signaling for data transmission in the first physical data channel; and
communicating, by the base station, a second wireless transmission over a second partition of the carrier supporting a second air interface configuration, the second wireless transmission over the second partition of the carrier including a second physical data channel and second physical control channel carrying second control signaling for data transmission in the second physical data channel.
2. The method of claim 1, wherein the first control signaling is first dedicated control signaling, and wherein the second control signaling is second dedicated control signaling.
3. The method of any of claims 1 to 2, wherein the first wireless transmission further includes transmission of control signaling for establishing initial access to the first partition of the carrier, and the second wireless transmission further includes transmission of control signaling for establishing initial access to the second partition of the carrier.
4. The method of any of claims 1 to 3, wherein the first partition of the carrier does not share a common control channel with the second partition of the carrier.
5. The method of any of claims 1 to 4, wherein the first partition and second partition are established over different sub-carriers in the carrier.
6. The method of any of claims 1 to 5, wherein the first partition and the second partition are established over different logical sub-bands, the different logical sub-bands being mapped to different resource blocks on the carrier.
7. The method of claim 6, wherein the different logical sub-bands have different hopping periods than one another.

8. The method of claim 6, wherein the different logical sub-bands have different frequency hopping patterns than one another.
9. The method of any of claims 1 to 8, further comprising:
transmitting air interface configuration information over a third partition of the carrier, the air interface configuration information specifying parameters of a first air interface configuration used to communicate the first wireless transmissions over the first partition and parameters of a second air interface configuration used to communicate the second wireless transmissions over the second partition.
10. The method of any of claims 1 to 8, further comprising:
transmitting air interface configuration information over the first partition of the carrier, the air interface configuration information specifying parameters of the second air interface configuration used to communicate the second wireless transmissions over the second partition.
11. The method of claim 9, wherein the air interface configuration information specifies different sub-carrier spacings, symbol durations, cyclic prefix (CP) lengths, transport block durations, subframe length or bandwidths for the first air interface configuration and the second air interface configuration.
12. The method of claim 9, wherein the air interface configuration information specifies different waveforms for the first partition and the second partition on the carrier.
13. The method of claim 9, wherein the air interface configuration information specifies different access schemes for the first partition and the second partition on the carrier.
14. The method of any of claims 1 to 13, further comprising:
transmitting load indicators over a third partition of the carrier, the load indicators indicating an amount of traffic or congestion on the first partition and second partition of the carrier.

15. The method of claim 14, wherein the load indicators are used by user equipments (UEs) to determine access probabilities for the first partition and the second partition of the carrier.

16. The method of any of claims 1 to 15, wherein the same air interface configuration is used to communicate the first wireless transmission over the first partition and the second wireless transmission over the second partition.

17. The method of any of claims 1 to 16, further comprising receiving first Hybrid Automatic Retransmission reQuest (HARQ) signaling associated with data transmitted over the first partition of the carrier, and receiving second HARQ signaling associated with data transmitted over the second partition of the carrier.

18. The method of any of claims 1 to 17, wherein the first wireless transmission and the second wireless transmission have different subcarrier spacings.

19. A base station comprising:

a processor; and

a non-transitory computer readable storage medium storing programming for execution by the processor, the programming including instructions to:

transmit a first wireless transmission over a first partition of a carrier, the first wireless transmission over the first partition of the carrier including a first physical data channel and all physical control signaling for decoding data carried in the first physical data channel at a receiver of the first wireless transmission; and

transmit a second wireless transmission over a second partition of the carrier, the second wireless transmission over the second partition of the carrier including a second physical data channel and all physical control signaling for decoding data carried in the second physical data channel at a receiver of the second wireless transmission.

20. A method for wireless communication, the method comprising:

receiving, by a user equipment (UE), initial access information over an anchor partition of a carrier, the initial access information for initial access in self-contained partitions of the carrier;

selecting, by the UE, one of the self-contained partition from multi self-contained

partitions of the carrier, wherein the self-contained partition including a first physical data channel and a physical control channel for data transmission in the first physical data channel; and

communicating, by the UE, using at least one self-contained partition of the carrier in accordance with the initial access information received over the anchor partition of the carrier.

21. The method of claim 18, wherein selecting one of the self-contained partitions of the carrier comprises:

selecting one of the self-contained partitions of the carrier in accordance with load indicators communicated over the anchor partition.

22. A user equipment comprising:

a processor; and

a non-transitory computer readable storage medium storing programming for execution by the processor, the programming including instructions to:

receive initial access information over an anchor partition of a carrier, the initial access information for accessing self-contained partitions of the carrier;

select one of the self-contained partitions of the carrier; and

access the selected self-contained partition of the carrier in accordance with the initial access information received over the anchor partition of the carrier.

23. The method of claim 20, wherein the instructions to select one of the self-contained partitions of the carrier include instructions to:

select one of the self-contained partitions of the carrier in accordance with load indicators communicated over the anchor partition.

24. A method for wireless communication, the method comprising:

receiving, by a mobile device, scheduling information over resources within a first partition of a carrier, the carrier having a plurality of partitions;

communicating, by the mobile device, a data transmission over resources within the first partition according to the scheduling signaling; and

communicating, by the mobile device, an acknowledgement (ACK) over resources within the first partition, the ACK being responsive to the data transmission.

25. The method of claim 24, wherein the plurality of partitions are a plurality of non-overlapping partitions.
26. The method of claim 24, wherein:
communicating a data transmission comprises transmitting a data transmission; and
communicating an ACK comprises receiving an ACK.
27. The method of claim 24, wherein:
communicating a data transmission comprises receiving a data transmission; and
communicating an ACK comprises transmitting an ACK.
28. A method for wireless communication, the method comprising:
transmitting, by a base station, a first dedicated control signaling in a first physical control channel over a first partition of a carrier supporting a first air interface configuration;
communicating, by the base station, a first wireless transmission over the first partition, the first wireless transmission over the first partition of the carrier in accordance with the first dedicated control signaling;
transmitting, by the base station, second dedicated control signaling in a second physical control channel over a second partition of a carrier supporting a second air interface configuration; and
communicating, by the base station, a second wireless transmission over a second partition of the carrier supporting a second air interface configuration in accordance with the second dedicated physical control channel signaling.
29. The method of claim 28, wherein the first dedicated control channel signaling includes signaling for establishing initial access to the first partition of the carrier, and the second dedicated control channel signaling includes signaling for establishing initial access to the second partition of the carrier.
30. The method of claim 28, wherein the first partition of the carrier does not share a common control channel with the second partition of the carrier.
31. The method of claim 28, wherein the first partition and second partition are established over different sub-carrier frequencies of the carrier.

32. The method of claim 28, wherein the first partition and the second partition are established over different logical sub-bands, the different logical sub-bands being mapped to different resource blocks on the carrier.

33. The method of claim 32, wherein the different logical sub-bands have different hopping periods than one another.

34. The method of claim 32, wherein the different logical sub-bands have different frequency hopping patterns than one another.

35. The method of claim 28, further comprising:

transmitting air interface configuration information over a third partition of the carrier, the air interface configuration information specifying parameters of a first air interface configuration used to communicate the first wireless transmission over the first partition and parameters of a second air interface configuration used to communicate the second wireless transmission over the second partition.

36. The method of claim 35, wherein the air interface configuration information specifies different sub-carrier spacings, symbol durations, cyclic prefix (CP) lengths, transport block durations, subframe length or bandwidths for the first air interface configuration and the second air interface configuration.

37. The method of claim 35, wherein the air interface configuration information specifies different center frequencies for the first partition and the second partition on the carrier.

38. The method of claim 35, wherein the air interface configuration information specifies different waveforms for the first partition and the second partition on the carrier.

39. The method of claim 35, wherein the air interface configuration information specifies different access schemes for the first partition and the second partition on the carrier.

40. The method of claim 28, further comprising:

transmitting load indicators over a third partition of the carrier, the load indicators indicating an amount of traffic or congestion on the first partition and second partition of the carrier.

41. The method of claim 40, wherein the load indicators are used by user equipments (UEs) to determine access probabilities for the first partition and the second partition of the carrier.

42. The method of claim 28, wherein the same air interface configuration is used to communicate the first wireless transmission over the first partition and the second wireless transmission over the second partition.

43. The method of claim 28, wherein the first wireless transmission further carries Hybrid Automatic Retransmission reQuest (HARQ) signaling associated with data transmitted over the first partition of the carrier, and the second wireless transmission further carries HARQ signaling associated with data transmitted over the second partition of the carrier.

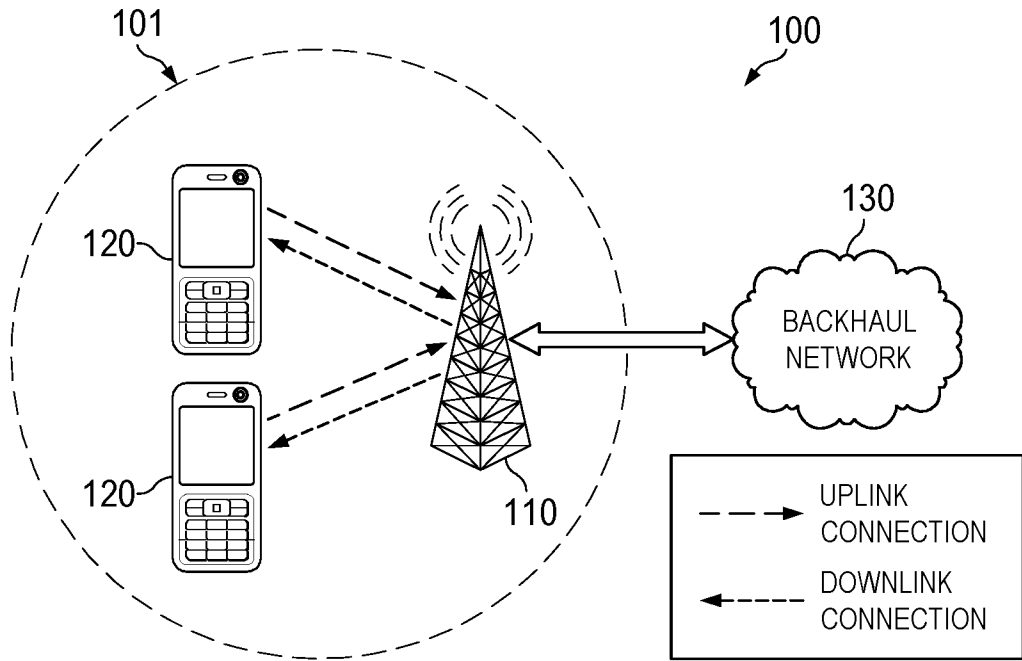


FIG. 1

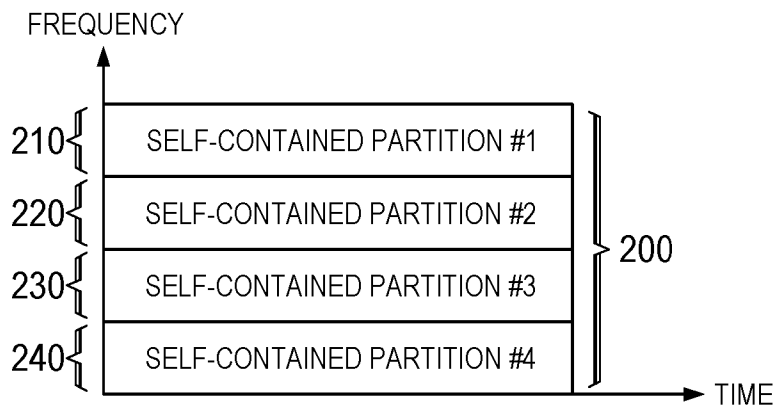


FIG. 2

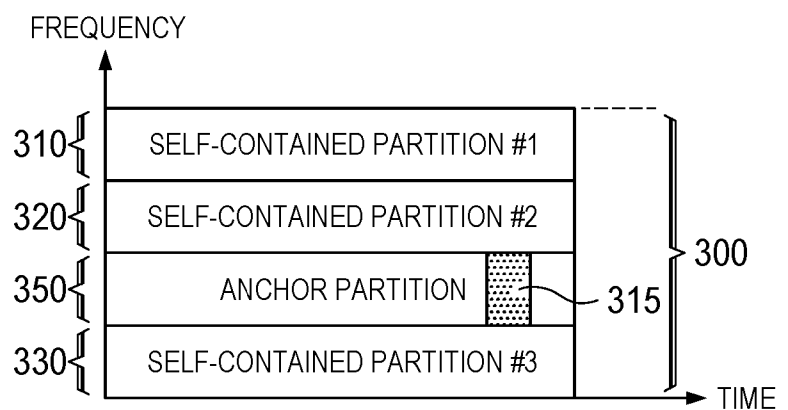


FIG. 3

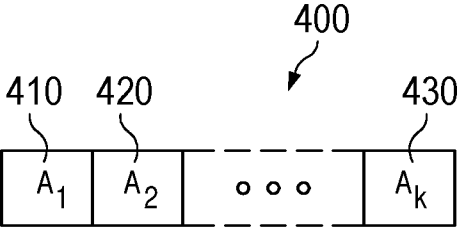


FIG. 4

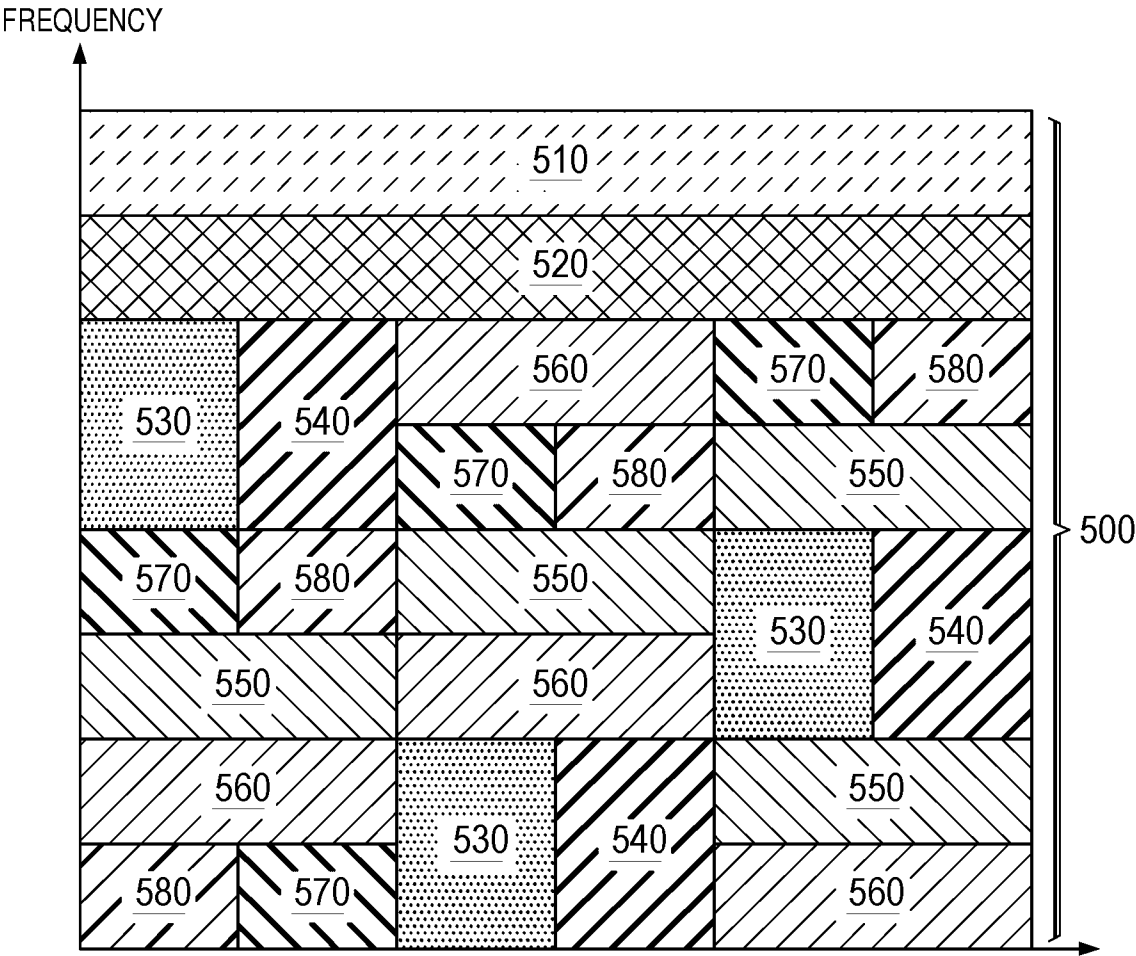


FIG. 5




FIG. 6

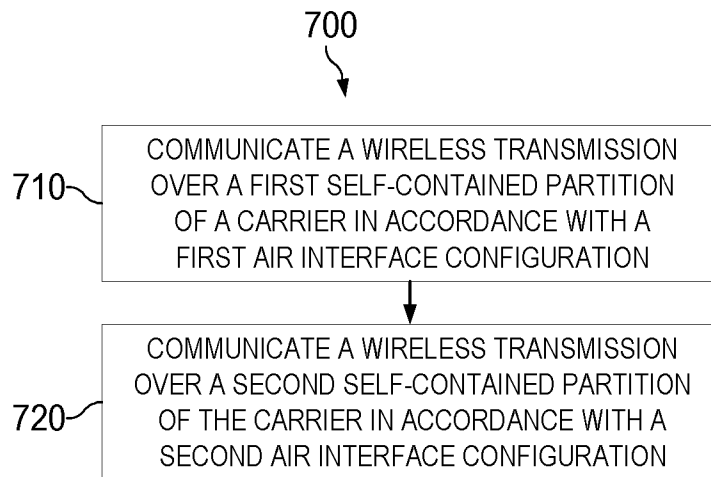


FIG. 7

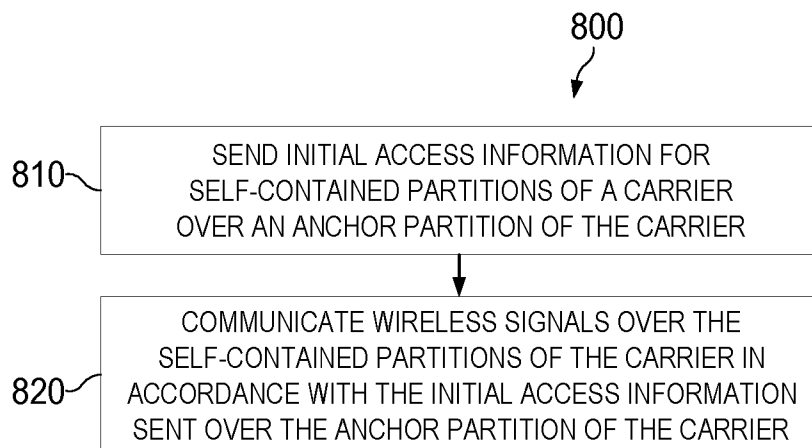


FIG. 8

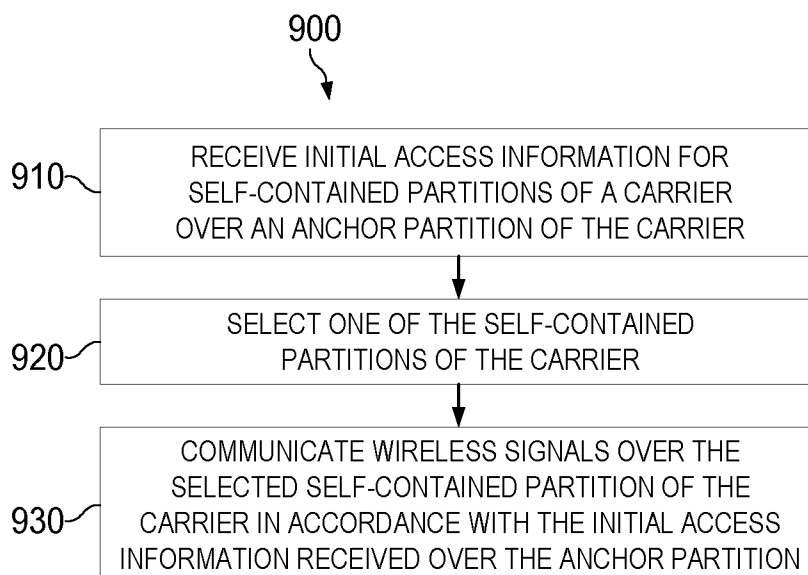


FIG. 9


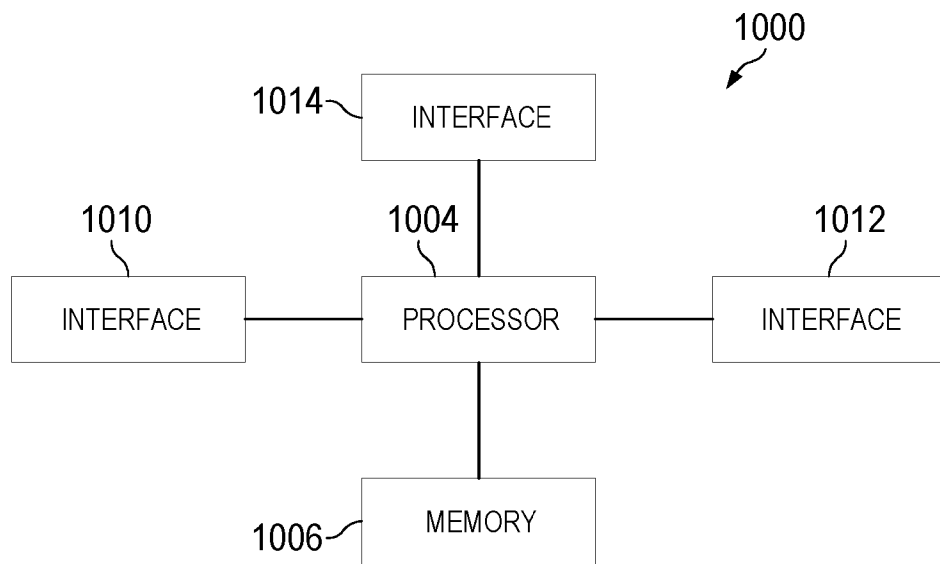


FIG. 10

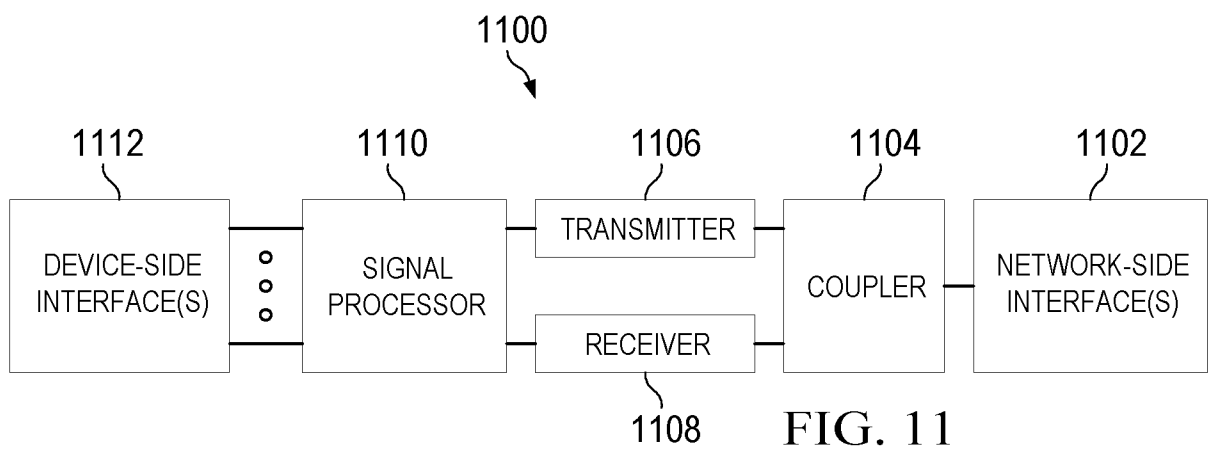

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/104871

A. CLASSIFICATION OF SUBJECT MATTER

H04W 28/00(2009.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W; H04Q; H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNKI,CNPAT,WPI,EPODOC,IEEE:carrier, air w interface, partition, channel, frequency, self w contained, anchor, configuration, specifics, access

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009129332 A1 (QUALCOMM INCORPORATED) 21 May 2009 (2009-05-21) description, paragraphs [0048]-[0064], and figures 3-5	1, 3-23
Y	US 2009129332 A1 (QUALCOMM INCORPORATED) 21 May 2009 (2009-05-21) description, paragraphs [0048]-[0064], and figures 3-5	2, 24-43
Y	US 2014133370 A1 (QUALCOMM INCORPORATED) 15 May 2014 (2014-05-15) description, paragraphs [0067]-[0080], and figures 6-7	2, 24-43
A	CN 101944971 A (NORTELNETWORKS LIMITED) 12 January 2011 (2011-01-12) the whole document	1-43
A	CN 104685821 A (TELEFONAKTIEBOLAGET L M ERICSSON PUBL) 03 June 2015 (2015-06-03) the whole document	1-43

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

06 January 2017

Date of mailing of the international search report

24 January 2017

Name and mailing address of the ISA/CN

**STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA**
**6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088**
China

Facsimile No. (86-10)62019451

Authorized officer

LIU,Jiong

Telephone No. (86-10)61648261

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2016/104871

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2009129332	A1	21 May 2009	WO	2009067389	A1	28 May 2009
				EP	2215750	A1	11 August 2010
				MX	2010005365	A	27 May 2010
				KR	20100090789	A	17 August 2010
				CN	101868926	A	20 October 2010
				JP	2013240065	A	28 November 2013
				EP	2315372	A1	27 April 2011
				TW	200939670	A	16 September 2009
				AU	2008326549	A1	28 May 2009
				UA	96680	C2	25 November 2011
				JP	2011504068	A	27 January 2011
				CA	2703899	A1	28 May 2009
				RU	2010125152	A	27 December 2011
				IN	CHENP201002614	E	29 October 2010
				VN	23960	A	27 September 2010
				PH	12010500908	A	28 May 2009
				HK	1149981	A0	21 October 2011
				SG	161336	A1	29 June 2010
				IL	205532	A	29 November 2012
US	2014133370	A1	15 May 2014	CN	104782207	A	15 July 2015
				KR	20150084973	A	22 July 2015
				WO	2014077996	A1	22 May 2014
				JP	2016501461	A	18 January 2016
				EP	2921014	A1	23 September 2015
CN	101944971	A	12 January 2011	EP	2271004	A2	05 January 2011
				US	2010278123	A1	04 November 2010
				JP	2011019220	A	27 January 2011
				KR	20110003286	A	11 January 2011
CN	104685821	A	03 June 2015	US	2014078980	A1	20 March 2014
				WO	2014021754	A1	06 February 2014
				JP	2015531201	A	29 October 2015
				EP	2880803	A1	10 June 2015
				KR	20150040979	A	15 April 2015
				VN	42322	A	25 May 2015
				SG	11201500766	A1	27 February 2015