



(11) **EP 1 146 331 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
10.09.2008 Bulletin 2008/37

(51) Int Cl.:
G01N 27/30 (2006.01) **G01N 27/416** (2006.01)
G01N 33/53 (2006.01) **G01N 33/566** (2006.01)

(21) Application number: **00969958.8**

(86) International application number:
PCT/JP2000/007342

(22) Date of filing: **20.10.2000**

(87) International publication number:
WO 2001/029550 (26.04.2001 Gazette 2001/17)

(54) **GENE DETECTING CHIP, DETECTOR, AND DETECTING METHOD**

GEN-DETEKTIONSCHIP, SENSOR UND NACHWEISVERFAHREN

PUCE DETECTRICE POUR GENES, CAPTEUR ET METHODE DE DETECTION

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **20.10.1999 JP 29891799**

(43) Date of publication of application:
17.10.2001 Bulletin 2001/42

(73) Proprietors:
• **Takenaka, Shigeori**
Koga-shi,
Fukuoka 811-3114 (JP)
• **Uchida, Kazuhiko**
Tsukuba-shi,
Ibaraki 305-0035 (JP)
• **Toppan Printing Co., Ltd.**
Tokyo 110-8560 (JP)

(72) Inventors:
• **Takenaka, Shigeori**
Koga-shi, Fukuoka 811-3114 (JP)
• **Uchida, Kazuhiko**
Ibaraki 305-0035 (JP)
• **Miyahara, Takatoshi**
Chiba-shi, Chiba 261-0003 (JP)

(74) Representative: **Grünecker, Kinkeldey,**
Stockmair & Schwanhäusser
Anwaltssozietät
Leopoldstrasse 4
80802 München (DE)

(56) References cited:
EP-A- 1 120 646 **EP-A1- 0 882 981**
WO-A-98/01221 **WO-A2-93/22678**
US-A- 5 605 662 **US-A- 5 776 672**

• **SINCLAIR B: "Everything's Great When It Sits on
a Chip" THE SCIENTIST, vol. 13, no. 11, 24 May
1999 (1999-05-24), pages 18-20, XP009069261**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 146 331 B1

Description

TECHNICAL FIELD

[0001] This invention relates to a gene detecting chip, detection apparatus, and detection method for gene diagnostic use.

BACKGROUND ART

[0002] Single base substitution SNP refers to a single base change in the base sequence in human DNA said to occur once in from 1000 bp to 2000 bp. It is estimated that adult humans, whether healthy or sick, have from 100,000 to several million SNPs.

[0003] Plural base substitution refers to a change in a number of bases in the base sequence of a gene.

[0004] Point mutation refers to a single-base change in the base sequence in an already known gene. It is by this that functional anomalies in translated protein are seen, and [this] sometimes becomes a cause of disease.

[0005] Gene translocation refers to the partial reversal of the order in a base sequence, which sometimes becomes a cause of disease.

[0006] Gene loss refers to a partial deficiency in a base sequence, which sometimes becomes a cause of disease.

[0007] Gene amplification refers to the multiplication of a portion of a base sequence, which sometimes becomes a cause of disease.

[0008] Triplet repeat refers to three base pairs repeating and growing, which sometimes becomes a cause of disease.

[0009] Means for detecting and analyzing differences in the base sequences in genetic DNA include DNA sequencing (base sequence determination method), the PCR-SSCP (polymerase chain reaction - single stranded polymorphism) method, the allele-specific hybridization method, the DNA chip method, and etc.

[0010] In DNA sequencing, there is the Maxam-Gilbert method and the Sanger (dideoxy) method, with the latter being principally used today. After amplifying the region of the human gene to be analyzed by the PCR (polymerase chain reaction) method, sequencing is performed using either the primer used in the PCR method or a primer set inside the amplified DNA, and the nucleotide sequence inside that region is determined.

[0011] With the PCR-SSCP (polymerase chain reaction - single stranded polymorphism) method, after using the PCR method to amplify the region of the human gene to be analyzed, this is made into single strand by thermal denaturation, and, by performing electrophoresis thereon in a non-denaturing polyacrylamide gel, a two-dimensional structure is formed (by intramolecular hydrogen bonds) in each strand of the two-strand DNA amplified by the PCR method. Because the two-dimensional structures will differ due to differences in the sequences, single base substitution SNPs and point mutations and the like

are detected by differences in electrophoretic distance.

[0012] With the allele-specific hybridization method, oligonucleotide probes or PCR products of 20 bases or so are immobilized to a region of a membrane (nylon filter), and after amplifying the region to be analyzed by the PCR method, this sample DNA is labeled with the radioactive isotope ³²P and hybridized. By adjusting the hybridization conditions such as temperature and the like at this time, SNPs and point mutations are detected by differences in the strength of the radioactive isotope.

[0013] With the DNA chip method, although in principle this is roughly the same as the allele-specific hybridization method, the oligonucleotide probes or PCR products for 20 bases or so are aligned in a stationary phase (on a substrate), and there the fluorescence labeled sample DNA is hybridized. By adjusting the hybridization conditions such as temperature and the like, the SNPs and the like in human genes are detected by differences in the intensity of fluorescence.

[0014] In the case of hybridization in the allele-specific hybridization method, because DNA is labeled with a radioactive isotope, the enormous cost involved in handling and controlling the radioactive isotopes becomes a problem. In the case of the DNA chip method, when labeling is done with a fluorescent radical, fluorescence is not incorporated into the DNA with adequate frequency due to the large molecular structure of the fluorescent radical, wherefore the fluorescent strength of the fluorescence labeled probe is not high, and other problems are encountered, namely fluorescence fading and the fluorescence exhibited by the glass or other platform (background fluorescence).

[0015] In order to resolve problems as these, as methods for detecting DNA hybrid formation and detecting two-strand DNA that are simple but exhibit outstanding sensitivity, methods have been disclosed wherewith the probe DNA is fixed to an electrode, that probe DNA is caused to react with sample DNA, two-strand DNA is detected in the presence of an intercalator, and the detection of the hybrid formation is performed electrochemically (cf. Japanese Patent Application Laid-Open No. H9-288080/1997 (published) and Dai 57 kai bunseki kagaku toronkai yokoshu [57th analytical chemistry debate manuscript collection], pp 137 and 138, 1996).

[0016] However, the number of gene single base substitution SNPs and gene mutations and the like are enormous. In the case of humans, for example, in order to produce a single base substitution SNP map with a 15 KB density (resolution), at least 2 million single base substitution SNPs must be identified. The number of gene mutations involved in known diseases is also extremely large. It is virtually impossible, realistically, to comprehensively analyze single base substitutions and point mutations with the conventional methods.

[0017] EP 1 120 646 A (being a prior art document according to Rule 54(3) EPC) discloses a method for detecting single nucleotide polymorphism and point mutation in gene by means of a gene detection chip com-

prising electrodes to which oligonucleotides are attached. A voltage is applied between the electrodes and a common electrode and current is measured for the measurement of a DNA.

[0018] US 5,605,662 A discloses electronic devices for molecular biological analysis and diagnostics that is configured to control the transport and attachment of specific binding entities such as nucleic acids or polypeptides by means of electrodes. The device provides stringency control of DNA hybridization reactions.

[0019] US 5,776,672 A discloses a gene detection method comprising immobilization of a single stranded acid probe on an electrode for hybridization with a gene.

[0020] The International Patent Application WO 98/01221 teaches a synthesis method for the preparation of sequences of separate polymers by means of electrodes that are in contact with a buffering solution to prevent chemical crosstalk between the electrodes due to diffusion of electrochemically generated agents.

[0021] The European Patent Application EP 0 882 981 A1 discloses a microsystem for the analysis of a liquid and a detecting chip comprising analysis electrodes and a common counter electrode. According to the teaching of this European Patent Application a current can be selectively measured between the counter electrode and the individual analysis electrodes.

[0022] An object of the present invention is to resolve the problems with the prior art noted in the foregoing. To that end, the present invention provides a gene identification apparatus capable of detecting and analyzing large volumes of genes, for a plurality of sample DNA, that is, a gene identification apparatus capable of high throughput (fast and high volume) processing, and also capable of performing high-sensitivity detection and analysis. In fine, the present invention seeks to realize a high-volume, high-sensitivity gene detection and analysis apparatus that is based on the principle of electrochemically performing two-strand DNA detection and hybrid formation detection described in Japanese Patent Application Laid-Open No. H9-288080/1997 (published).

[0023] The present invention also seeks to realize a gene detection method, detection apparatus, and detecting chip that, in actual operations involving detection and the like, feature ease of handling and good workability.

DISCLOSURE OF THE INVENTION

[0024] The present invention provides a gene detecting chip according to claim 1. The chip has a plurality of pin electrodes that are measurement poles, in that a voltage is applied between the pin electrodes and a common electrode that is a counter electrode to the pin electrodes, and it is capable of detecting electric currents.

[0025] With the present invention, because a plurality of pin electrodes arranged in an array is used, a large volume of genes can be analyzed simultaneously.

[0026] There are also advantages in that genes can be immobilized to the pin tip parts and side surface parts,

and that the area for immobilization can be made large.

[0027] There is another advantage in that, compared to cases where genes are dispensed on a flat electrode, where uniform immobilization cannot be done when the surface of the flat electrode is uneven, immobilization is performed by inserting the pin electrodes into a solution containing the genes, so that certain volumes of genes can be immobilized evenly even when the surfaces of the pin electrodes are uneven. By being able to immobilize a certain volume of genes, precision and sensitivity are enhanced in quantitative analysis.

[0028] Furthermore, with the present invention, there is no need for an operation to dispense the liquid containing the genes, simplifying the operation.

[0029] With the present invention, after detection has been done by hybridization between sample DNA and probe genes immobilized to the pin electrodes, the sample DNA can be removed, and a different sample DNA can then be hybridized, allowing the chip to be used over and over. Alternatively, a process for removing the probe genes can be performed, and different probe genes are then immobilized to the pin electrodes, allowing the chip to be used repeatedly in different detection applications.

[0030] The detecting chip in the present invention also has a common electrode deployed so that it is a counter electrode to the pin electrodes but does not contact those pin electrodes.

[0031] The detecting chip in the present invention has a recess therein capable of accepting the pins and capable of being filled with sample DNA.

[0032] It is also permissible for genes having different nucleotide sequences to be immobilized to the pin electrodes.

[0033] A plurality of PCR products, oligonucleotides, mRNA, cDNA, PNA (peptidic nucleic acid), or LNA (locked nucleic acid), having a different nucleotide sequence may also be immobilized to the pin electrodes.

[0034] Another detecting chip relating to the present invention may have genes having the same nucleotide sequences immobilized respectively to the pin electrodes.

[0035] PCR products, oligonucleotides, mRNA, cDNA, PNA (peptidic nucleic acid), or LNA (locked nucleic acid; Proglio, trademark of LLC) may also be immobilized to the pin electrodes.

[0036] This detecting chip may be made so that it has a plurality of recesses capable of accepting the pin electrodes and of being filled with sample DNA, so that the plurality of recesses can be filled, respectively, with different sample DNA.

[0037] The gene detecting chips described in the foregoing are useful for gene diagnostic methods.

[0038] The surfaces of the pin electrodes may be plated with gold.

[0039] The surfaces of the pin electrodes may be partially coated with a resin.

[0040] That resin may be a PEEK (polyether ether ketone) or PTFE (polytetrafluoroethylene).

[0041] The gene detecting chips described in the foregoing may be made so as to have a supporting member for supporting the pin electrodes, and to have the pin electrodes erected in that supporting member.

[0042] Here, "erected" is meant that the pin electrodes are deployed with the supporting member at the foundation such that they protrude from the supporting member.

[0043] The pin electrodes may be erected on the supporting member through spot electrodes.

[0044] "Spot electrode" is an electrode that is deployed on a spot on a supporting member.

[0045] The gene detecting chips may be made so that they also have a supporting member for supporting the pin electrodes, with one end of [each of] the pin electrodes implanted in that supporting member.

[0046] Here, "Implanting" is meant that one end of a pin electrode is fit into a concavity provided in the supporting member, and the pin electrode is deployed so that it protrudes from the supporting member.

[0047] The supporting member noted above may be a circuit board.

[0048] The pin electrodes may be fixed onto the supporting member with the ends that contact or are implanted in the supporting member enclosed in an epoxy resin or PTFE.

[0049] In the pin electrodes, genes may be immobilized only to the ends on the opposite end from the ends contacting or implanted on the supporting member, or, alternatively, genes may be immobilized to all of the pin electrodes.

[0050] A provision may also be made so that, by implementing resin coating in prescribed locations on the surfaces of the pin electrodes, genes are fixed only to the parts that are exposed without being coated.

[0051] The gene detecting chip may have a gap in the interior thereof, with the pin electrodes deployed on the supporting member so that they protrude into that gap, with a portion or the entirety of the common electrode exposed inside that gap.

[0052] The chip may be provided with an injection port that communicates to the inside of the gap, so that sample genes and electrolyte and the like can be injected into and evacuated from the interior of that gap.

[0053] The gene detecting chip has a main body part and a frame part capable of coupling with that main body part, with the main body part having the pin electrodes on the inside surface thereof, and the frame part having a recess on the inner surface thereof capable of accepting the pin electrodes and of being filled with sample DNA when coupled with the main body part.

[0054] The main body part and the frame part may be freely attachable and detachable.

[0055] For a configuration that couples the main body part and the frame part so that they are freely attachable and detachable, a known method may be suitably employed, such as a configuration wherein a convex part or parts are provided in one of either the main body part or frame part, a concave part or parts are provided in the

other part, and those convex and concave parts are engaged. Another configuration is to fasten the two [members] with clips or clamps. Further configurations are to fit one to the other by sliding, or to draw both together by a magnet, etc.

[0056] In order to resolve the problems noted earlier, the present invention provides a chip for gene diagnostic methods having a main body part and a frame part that are mutually attachable and detachable, the main body part whereof has a plurality of pin electrodes that are measurement electrodes that are arranged and made to protrude in a matrix on the inner surface thereof, the frame part whereof has a recess in the inner surface thereof that can accept the plurality of pin electrodes and can be filled with sample DNA when the main body part is mounted, having a common electrode that is a counter electrode deployed in the recess so that it does not contact the pin electrodes, the pin electrodes have oligonucleotides or PCR products made up of different nucleotide sequences immobilized thereto, wherewith it is possible to have a voltage applied across the common electrode and the pin electrodes and to detect currents.

[0057] Moreover, "matrix pattern" in the present invention, is meant to be a condition wherein multiple pin electrodes are deployed so that they protrude from a prescribed surface and so that they are mutually parallel.

[0058] The pin electrodes may be plurally arranged in individual matrix patterns, such that, by inserting them, individually, into receptacles for accommodating oligonucleotides or PCR products consisting of different nucleotide sequences, the oligonucleotides or PCR products consisting of different nucleotide sequences are immobilized.

[0059] The detecting chip may be for genetic diagnostics. By performing genetic diagnostics, it is possible to examine so as to determine whether or not the patient possess genes related to single gene diseases such as muscular dystrophy, hemophilia, or phenyl ketone urinary disease, etc., or to multiple factor genetic diseases as sugar diabetes, cancer, high blood pressure, myocardial infarction, and obesity, etc., to diagnose genes prior to the onset of disease, and to obtain decision-making materials for selecting suitable treatment methods and drugs.

[0060] In order to resolve the problems noted earlier, the present invention moreover provides a gene detecting chip, and a gene detection apparatus having a measurement apparatus capable of having that detecting chip loaded therein and unloaded therefrom.

[0061] In this detecting apparatus, a Peltier element may be used, as temperature control means, to make the temperature controllable.

[0062] In order to resolve the problems noted earlier, the present invention still further provides a detection method that uses the gene detecting chip noted earlier, which is a detection method wherewith the interior of the recess is loaded with sample DNA or DNA that has been gene-amplified from sample DNA, hybridization is per-

formed and a double-strand nucleic acid is formed, after which the remaining sample DNA or the DNA gene-amplified from sample DNA is removed from the recess and washed, after which the interior of the recess is filled with an electrolyte containing electrochemically active molecules, the electrochemically active molecules are bonded to the double-strand, a voltage is applied across the common electrode and the pin electrodes, and the values of the currents that flow are detected.

[0063] Alternatively, a detection method is provided that uses the gene detecting chip noted earlier, where-with the interior of the recess is filled with sample DNA or DNA gene-amplified from sample DNA, together with electrolyte containing electrochemically active molecules, hybridization is performed and, while forming the double-strand, the electrochemically active molecules are bonded to the double-strand, a voltage is applied across the common electrode and the pin electrodes, and the values of the currents that flow are detected.

[0064] It is thus possible to analyze a large volume of genes simultaneously, with extremely high precision and high sensitivity, in an extremely simple operation, by causing electrochemically active molecules to bond after hybridization, or, alternately, by performing hybridization in the presence of electrochemically active molecules, using the chip described earlier.

[0065] In the detection method described earlier, a provision may be made so that the electrochemically active molecules are bonded to the double-strand while controlling the temperature.

[0066] The electrolyte containing the electrochemically active molecule may be an electrolyte having ferrocene, catecholamine, metal bipyridine complex, metal phenanthrene complex, viologen, or a threading intercalator that has inducted those compounds as its effective component. The ferrocene threading intercalator is particularly desirable.

[0067] For the electrolyte containing the electrochemically active molecules, in addition to those [electrolytes] noted above, [those] having ethidium, ethidium bromide, acridine, aminoacridine, acridine orange, proflavine, ellipticine, actinomycin D, donomycin, mitomycin, tris(phenanthroline) zinc complex, tris(phenanthroline) ruthenium complex, tris(phenanthroline) cobalt complex, di(phenanthroline) zinc complex, di(phenanthroline) ruthenium complex, di(phenanthroline) cobalt complex, bipyridine platinum complex, terpyridine platinum complex, phenanthroline platinum complex, tris(pyridyl) cobalt complex, di(bipyridyl) zinc complex, di(bipyridyl) ruthenium complex, or di(bipyridyl) cobalt complex as the effective component are permissible.

BRIEF DESCRIPTION OF THE DRAWINGS

[0068]

Fig. 1 is a diagonal view for describing the overall configuration of a gene detection apparatus relating

to the present invention;

Fig. 2 is a diagonal view for describing the overall configuration of a gene detecting chip relating to the present invention;

Fig. 3(a) is the A-A section of [the chip diagrammed in] Fig. 2(c), Fig. 3(b) is an enlarged view of the main parts of [the chip diagrammed in] Fig. 3(a), and Fig. 3(c) - 3(e) are diagrams of various configurations for deploying pin electrodes on a circuit board;

Fig. 4 provides diagrams for describing the configuration of electrodes and interconnecting lines in a gene detection apparatus and detecting chip relating to the present invention;

Fig. 5 provides a cross-sectional view and enlarged view of the main parts of the detecting chip diagrammed in Fig. 2;

Fig. 6 provides diagonal views for describing how a gene detecting chip relating to the present invention is used;

Fig. 7 is [a graphical representation of] the experimental example 3 measurement results; and

Fig. 8 is [a graphical representation of] the experimental example 4 measurement results.

BEST MODE FOR CARRYING OUT THE INVENTION

[0069] Aspects of the gene detection method, detection apparatus, and detecting chip relating to the present invention are described below with reference to the drawings. The drawings represent nothing more than one embodiment of the present invention, and [the invention] is not limited thereto or thereby.

[0070] In Fig. 1, a gene detection apparatus 1 relating to the present invention is configured by a measurement apparatus 3 that has a detecting chip 2 and a loading slot 29 into which the detecting chip 2 can be plugged, that is capable of detecting and analyzing two-strand DNA produced by hybridization, and a personal computer 35.

[0071] Fig. 2 is a diagram representing the configuration of the detecting chip 2. Fig. 2(a) provides an overall diagonal view of the detecting chip 2, which is formed in the shape of a card or cassette. As diagrammed in the exploded diagonal view given in Fig. 2(b), the detecting chip 2 is configured by a frame 4 formed of a ceramic or synthetic resin material or the like, and a main body part 5 mounted on the frame 4 so that it can be attached and detached.

[0072] The configuration for coupling the main body unit 5 to the frame 4 so that it can be freely attached and detached can be effected by, for example, forming a concavity and convexity that elastically mates together at the contacting surfaces, respectively, of the frame 4 and main body unit 5. In this example, as diagrammed in Fig. 2(b), 2(c), 3(a), and 5(a), the attaching and detaching capability is effected by providing convex parts 6 and concave parts 7 in locations that avoid the pin electrode arrangement in the main body unit 5 and frame 4.

[0073] For the configuration for coupling the frame 4

and main body unit 5 together so that they can be freely attached and detached, a known method may be suitably adopted that fastens the two members together by clips or clamps, or causes them to be drawn together by a magnet, etc.

[0074] A rectangular recess 8 is formed roughly in the middle of the frame 4. A seal 9 is deployed about the periphery of this recess 8. This recess 8 is capable of being filled by a solution (sample DNA, threading intercalator, washing solution, etc.), and is sealed by mounting the main body unit 5 to the frame 4. By removing the main body unit 5 from the frame 4, the solution inside the recess 8 can quickly be replaced or mixed, or [the interior of the recess 8] washed.

[0075] On the other hand, in the main body unit 5 as shown in Fig. 2(c), in a region corresponding to the recess 8 of the frame 4, many pin electrodes 10 are erected uniformly. The protruding length of these pin electrodes 10 is a length that is accommodated inside the recess 8 when the main body unit 5 is mounted on the frame 4.

[0076] Fig. 3(a) shows the A-A section of [the main body unit 5 diagrammed in] Fig. 2(c), which represents the configuration of the main body unit 5 and the condition wherein the pin electrodes 10 are erected. The main body unit 5 is configured with a circuit board 13 provided between the inner wall 11 and outer wall 12 thereof. The end of the circuit board 13 is exposed, and terminals 20 for the pin electrodes and a terminal (designated by 27 in Fig. 4) for the common electrode are provided in that exposed portion. And in the circuit board 13 circuitry inclusive of interconnecting lines is formed (indicated by 21, 22, and 23 in Fig. 4), etc.

[0077] As diagrammed in Fig. 3(a) and 3(b), the pin electrodes 10 are configured so that they pass from the circuit board 13 through the inner wall 11 and protrude.

[0078] The pin electrodes 10, as diagrammed in Fig. 3(c), may also be configured so that they pass from the outer wall 12 through the circuit board 13 and the inner wall 11 and protrude.

[0079] The pin electrodes 10, as diagrammed in Fig. 3(d), may also be configured so that, with the main body unit 5 [configured so that] the circuit board 13 is deployed on a base 14, the pin electrodes 10 are erected on top thereof.

[0080] Alternatively, as diagrammed in Fig. 3(e), many spot electrodes 15 may be vapor-deposited onto the circuit board 13 beforehand in order to form many spot electrodes 15, and the pin electrodes 10 erected on those spot electrodes 15 such that they are in electrical contact therewith.

[0081] As diagrammed in the enlarged view given thereof in Fig. 6(b), PCR product, SH-ized oligonucleotides 16 wherein thiol (SH) groups have been introduced to the 5' end of the oligonucleotides, are immobilized to the surfaces of the pin electrodes 10. The PCR product is a double-strand DNA, but one of the strands wherewith an SH group has been introduced to the 5' end, have a length that includes 20 to 50 bases, and is immobilized

onto the pin electrodes 10 through the thiol group introduced to the base end thereof.

[0082] As diagrammed in Fig. 6(a), by inserting the pin electrodes 10 into receptacles 18 in a microplate 17 having DNA receptacles 18 arranged in the same pitch as the pin electrodes 10, it is possible to simultaneously immobilize DNA of different types. The surfaces of the pin electrodes 10 are plated with gold, and the procedure for fixing the SH-ized oligonucleotides 16 through the SH group to the gold is commonly known.

[0083] SH-gold bonding and preprocessing methods performed prior to immobilization of the oligonucleotides on the surfaces of the gold pin electrodes are described by C. D. Bain in J. Am. Chem. Soc. No. 111, pp 321 and following, 1989, and by J. J. Gooding in Anal. Chem. No. 70, pp 2396 and following, 1998. The removal of probe genes is performed by a method such as that described by C. D. Bain in J. Am. Chem. Soc. No. 111, pp 321 and following, 1989.

[0084] The multiple pin electrodes 10 are deployed on the circuit board 13, and configured such that, electrically, they form part of the circuit board. Also, as diagrammed in Fig. 2(c), the terminals 20 and 27 are deployed in parallel in the forward end part of the main body unit 5.

[0085] As diagrammed in Fig. 4(a), 3(a), and 3(b), the pin electrodes 10 are respectively connected to the interconnecting lines 21 on the circuit board, while the other ends of those interconnecting lines 21 are connected independently to the respective terminals 20.

[0086] Fig. 4 diagrams a gene electrical detection circuit. As diagrammed in Fig. 4(a), the interconnecting lines 21 for the pin electrodes 10 may be connected one by one, correspondingly, to the pin electrodes 10, respectively, and connected, respectively, to the terminals 20. However, the configuration may also be made such that, as diagrammed in Fig. 4(b), the pin electrodes 10 are connected individually to matrix interconnecting line leads 22 and 23 through FETs (field effect transistors) 24 at the intersections of matrix interconnecting lines comprising multiple vertical and horizontal leads 22 and 23, as in a matrix electrode such as an active matrix type TFT liquid crystal display device wherein switching elements comprising TFTs are provided. When the configuration is made in that way, the vertical and horizontal leads 22 and 23 are scanned, selected TFTs are turned on, and specific pin electrodes are electrically connected to the terminals.

[0087] In this example, there is a common electrode 25 diagrammed in Fig. 4. The common electrode indicated in Fig. 4 is simply represented in model form for the purpose of describing the circuit configuration and, in actuality, should be deployed in the recess 8. The common electrode 25, for example, is deployed, as diagrammed in Fig. 5(a), on a portion (such as the periphery, etc.), or on the entire surface, of the bottom surface of the recess 8, or, alternatively, on the inner circumferential side surface or the like near the bottom surface of the recess 8, as a counter electrode to the pin electrodes 10. Also, the

common electrode 25 is deployed in a position where it does not contact the pin electrodes 10. The common electrode 25 is configured so that, when the main body unit 5 is mounted to the frame 4, contact is made with the terminal 26 for the common electrode of the main body unit 5, as diagrammed in the enlarged view in Fig. 5(b). The terminal 26 for this common electrode is connected via an interconnecting line 28 to the terminal 27 for the common electrode.

[0088] The configuration may also be such that values of the currents between the respective pin electrodes 10 and the common electrode 25 that is the counter electrode are measured with reference to a reference electrode (not shown) wired so as to make contact with an electrolyte solution (described subsequently) when that electrolyte solution is filled into the space inside the recess 8, so that accurate current values are obtained with each measurement.

[0089] In the interior of the detecting chip loading slot (item 29 in Fig. 1) in the measurement apparatus, as diagrammed in Fig. 4(c), a circuit 30 is deployed for connecting the terminal 27 for the common electrode and the terminals 20 for the pin electrodes, and applying voltages between the terminal 27 for the common electrode and the terminals 20 for the pin electrodes.

[0090] The configuration is made such that, when a voltage E is applied across the terminal 27 for the common electrode and the terminals 20 for the pin electrodes, the currents that flow between the common electrode 25 and the pin electrodes 10 can be detected and measured by a detector 31 deployed in the circuit 30.

[0091] Furthermore, in order to selectively connect the terminals 20 of the pin electrodes 10, the measurement apparatus 3 is provided with receiving terminals 32 which are connected to the terminals 20 for the pin electrodes when the detecting chip 2 is plugged in through the loading slot 29, and with a scanning terminal 33 for selectively connecting the receiving terminals 32 to the circuit 30.

[0092] The measurement data based on these detected currents are digitized by an A-D converter 34 connecting to the detector 31, and used as processing data by the personal computer 35 for analyzing and identifying and otherwise processing the sample DNA.

[0093] Moreover, the measurement apparatus 3 is equipped with a temperature controller (not shown) having a Peltier element. The temperature conditions of the hybridization described subsequently can be controlled by this temperature controller.

[0094] The operation of the detection apparatus 1 relating to the present invention and comprising the configuration described in the foregoing will now be described. In Fig. 6(a) shows a microplate where on receptacles 18 are arranged in an array with the same pitch as the pin electrodes 10. Inside the receptacles 18 of this microplate 17, DNA of the same or different types are accommodated.

[0095] As diagrammed in Fig. 6(a), the multiple pin electrodes 10 in the main body unit 5 of the detecting

chip 2 are inserted respectively into the receptacles 18. Thus, as diagrammed in the partial enlarged view thereof in Fig. 6(b), DNA of the same or differing types can be immobilized on the pin electrodes 10.

[0096] Meanwhile, sample DNA solution is injected to fill the interior of the recess 8 in the frame 4. Then, the main body unit 5 is mounted to the frame 4, engaging the convex parts and concave parts, so that the multiple pin electrodes 10 adorned by the DNA are inserted into the recess 8. Thereupon, the interior of the recess 8 is sealed by the seal 9, and the common electrode 25 makes contact with the terminal 26 for the common electrode of the main body unit 5.

[0097] For the sample DNA, DNA extracted from biological material that has been processed with a DNA cleavage enzyme or ultrasonic process, or DNA amplified by PCR (polymerase chain reaction method) from specific genes is used. These sample DNAs are denatured ahead of time by heat treatment immediately prior to hybridization.

[0098] When the sample DNA (in a single strand state) is added to the PCR product or oligonucleotide DNA (in a single strand state) immobilized to the pin electrodes, hybridization is effected with the sample DNA and the oligonucleotide DNA or PCR product having mutually complementary base sequences.

[0099] During this hybridization, the detecting chip 2 is plugged into the loading slot 29 and loaded into the measurement apparatus 3, and the temperature conditions of the hybridization are controlled by the temperature controller having the Peltier element provided inside the measurement apparatus 3.

[0100] After this hybridization has been completed, the detecting chip 2 is pulled out of the measurement apparatus 3, and the main body unit 5 is removed from the frame 4. The sample DNA solution is removed from the interior of the recess 8, the interior of the recess 8 is flushed with washing liquid, and washing, which washes away the unhybridized sample DNA, is done.

[0101] After this washing, the interior of the recess 8 is filled with an electrolyte solution containing electrochemically active molecules and the main body unit 5 is mounted on the frame 4. The electrochemically active molecules exhibit the function of changing the resistance value and other electrical properties of the double-strand DNA produced by hybridization. This point is explained in detail in Japanese Patent Application Laid-Open No. H9-288080/1997 (published).

[0102] The detecting chip 2 on which such processing has been done is reloaded into the measurement apparatus 3, the terminal 27 for the common electrode and the terminals 20 for the pin electrodes of the detecting chip 2 are connected to the receiving terminals 32 of the measurement apparatus, connected to a voltage circuit 30 through a selector switch, and a weak voltage is applied across the common electrode 25 and the pin electrodes 10, whereupon a very weak current flows through the voltage circuit 30 and the common electrode 25 to

the pin electrodes 10 connected to the double-strand DNA produced by hybridization. The temperature is controlled by the Peltier element mounted inside the measurement apparatus 3, and current values are measured at different temperatures.

[0103] In the measurement apparatus 3, as diagrammed in Fig. 4(c), the scanning element 33 is switched relative to the terminals 20 for the pin electrodes and the receiving terminals 32 (It being possible to perform that switching either automatically or manually. Further description whereof is omitted here, however, because the configuration thereof is not important to this description), whereby currents flow sequentially to the double-strand DNA after hybridization, which are detected by the detector 31.

[0104] These detection results are converted to digital data by the A-D converter 34, and stored in a memory or the like as measurement data by the personal computer 35. Sample DNA is identified and analyzed according to those measurement data. By comparing [those data] with various types of pre-stored DNA data and the like, for example, it is possible to analyze and identify sample DNA.

[0105] Examples of experiments of a gene electrochemical detection apparatus relating to the present invention will now be described.

(Experimental Example 1)

[0106] An experimental example for the detection of a single-base substitution SNP in the 72nd codon of the gene p53 is represented. Oligonucleotides having base sequences corresponding to the two types of polymorphism (genetic polymorphism) were immobilized by spotting respectively to the pin electrodes 10.

p53Pro (72nd codon whereof is Pro)

p53Arg (72nd codon whereof is Arg)

[0107] To this, DNA was taken from the peripheral blood of a healthy human wherein the 72nd codon of p53 is Pro and PCR amplified product, wherein the region containing codon 72 exists in the exon 4 of p53 from that DNA, was thermally denatured and then subjected to a hybridization reaction. The variation in the current value before and after hybridization at 470 mV (Ag/AgCl reference electrode standard) at 20 degrees Celsius in the measurement electrolyte solution (0.1M AcOH-AcOK (pH 5.6), 0.1M KCl, 0.05 mM NfC) was measured.

DNA taken from peripheral blood

[0108]

p53Pro current variation (%) 52%

p53Arg current variation (%) 15%

PCR Product

[0109]

5 p53Pro current variation (%) 65%
p53Arg current variation (%) 13%

[0110] Further, the DNA taken from the peripheral blood of a healthy human wherein the 72nd codon in p53 is Arg and the PCR amplified product, wherein the region containing codon 72 exists in the exon 4 of p53 from that DNA, was subjected similarly to hybridization.

15 DNA taken from peripheral blood

[0111]

20 p53Pro current variation (%) 46%
p53Arg current variation (%) 17%

PCR Product

[0112]

25 p53Pro current variation (%) 53%
p53Arg current variation (%) 11%

30 **[0113]** These current variations exhibited clear differences in cases where the base sequences matched perfectly and in cases of mismatch.

(Experimental Example 2)

35 **[0114]** The measured current value differs depending on the number of base substitutions, and an experimental example is described that shows that the mismatch volume can be measured thereby. Seven types of oligonucleotides, namely dT20, dT10dAdT9, dT8dA4dT8, dAdT19, dA3dT17, dT19dA, and dT17dA3, were immobilized by spotting respectively to the pin electrodes 10. As the hybridization counterpart, dA20 was subjected to hybridization reaction.

45 **[0115]** The variation in the current values before and after hybridization was measured at 470 mV (Ag/AgCl reference electrode standard) at 20 degrees Celsius in the measurement electrolyte solution (0.1M AcOH-AcOK (pH 5.6), 0.1M KCl, 0.05 mM NfC).

50 **[0116]** The measurement results are indicated in Table 1

Table 1

Current variation (%)

Tm (degrees)

55 **[0117]** The current variation in Table 1 is roughly dependent on the number of mismatched bases. In cases where mismatches exist in the end parts, in particular, variation larger than the Tm value was observed. With

conventional SSCP, such systems could not be detected; they became clear for the first time with this procedure.

(Experimental Example 3)

[0118] An experimental example for the quantitative measurement of mRNA expression quantities is represented. That wherein a thiol group (HS) was introduced to the end of an oligonucleotide 5' of a unique sequence 40-mer existing on an LacZ gene on the E. coli lactose operon and this oligonucleotide was immobilized respectively to the pin electrodes 10 (HS-m1: 60 fmol).

[0119] Also, mRNA liquid extract from E. coli containing mRNA of a different expression levels was placed in (a) different well(s) on a titer plate. The previously prepared pin electrodes 10 were immersed into the wells of this titer plate, and a hybridization reaction was conducted under conditions of 2 x SSC, room temperature, and 1 hour. [For] this, the variation in the current value before and after hybridization at 470 mV (Ag/AgCl reference electrode standard) at 20 degrees in the measurement electrolyte solution (0.1M AcOH-AcOK (pH 5.6), 0.1M KCl, 0.05 mM NfC) was measured.

[0120] The measurement results obtained are indicated in Fig. 7. As may be seen from Fig. 7, the current variation Δi (%) increased linearly in conjunction with the increase in the mRNA quantity up to an mRNA quantity of 60 fmol.

[0121] It is thus seen that, in this example, the mRNA expression amount can be quantitatively determined at the fmol level.

(Experimental Example 4)

[0122] An experimental example concerning gene detection is represented. A DNA probe (5'-HS-AAGGTT-GATTACTGGAATGGGGACCTGTTA-3') for detecting genes in cytochrome C from African clawed frog (*Xenopus* sp.) egg cells was fixed to the pin electrodes 10, respectively. Solutions containing the target gene (DNA complementary to probe oligonucleotide) of different DNA concentrations were placed in (a) different well(s) on the titer plate. The previously prepared pin electrodes 10 were immersed into the wells of this titer plate, and a hybridization reaction was conducted under conditions of 2 x SSC, room temperature, and for 1 hour. [For] this, the variation in the current value before and after hybridization at 470 mV (Ag/AgCl reference electrode standard) at 20 degrees in the measurement electrolyte solution (0.1M AcOH-AcOK (pH 5.6), 0.1M KCl, 0.05 mM NfC) was measured.

[0123] The measurement results obtained are indicated in Fig. 8. As may be seen from Fig. 8, from several tens to several hundreds of fmol of the target gene could be detected. On the other hand, almost no variation in current for the DNA sample not containing the cytochrome C was observed.

[0124] The gene detection method, detection apparatus,

and detecting chip relating to the present invention have been described in the foregoing in terms of examples thereof, but the present invention is not limited to or by those examples. Needless to say, there are various embodiments within the scope of the technical provisions of the claims.

INDUSTRIAL APPLICABILITY

[0125] The gene detection method, detection apparatus, and detecting chip relating to the present invention, being configured as described in the foregoing, can detect and analyze genes with high sensitivity, at high speed and high volume, simply and conveniently.

[0126] Thus the detection apparatus relating to the present invention that is capable of high-sensitivity, high-throughput (high speed, large volume) processing provides effective means for the correlative analysis of genes and expression phenotypes in the fields of biology and medicine. By analyzing drug metabolizing enzymes and specific genes such as cancer inhibitor genes using the detecting and analyzing apparatus for gene base sequences, single base substitution SNPs, plural base substitutions, point mutations, translocations, losses, amplifications, and triplet repeats. The invention can also be used in genetic diagnosis.

[0127] With the detection apparatus relating to the present invention, for example, it is possible to effect high-sensitivity, high-throughput (high speed, large volume) processing, wherefore [that apparatus] can be used to good effect in collecting data relating to Japanese human genes, identifying genes connected with the onset of disease, and predicting and preventing future disease occurrence.

[0128] Moreover, by diagnosing genes, [the invention] can be used to good effect in selecting suitable treatment methods and selecting drugs having few side effects.

[0129] Furthermore, using the results of disease gene analysis, new drugs can be developed without repeating clinical experiments and the like.

[0130] With the present invention, a detecting chip is configured of a main body part and a frame part that can be freely attached together and detached, and a recess, formed in the frame part that can be filled with sample DNA solution or the like. Therefore solutions of sample DNA and threading intercalator and the like can be loaded and extracted by extremely simple operations, and the interior of the recess can be easily washed with a washing liquid.

[0131] With the present invention, as measurement poles in the detecting chip, pin electrodes are provided such that they are erected in a matrix arrangement inside the main body unit. Therefore, by inserting the pin electrodes into the receptacles of microplates accommodating different DNA, DNA of different types can simultaneously be immobilized at one time.

Claims

1. A gene detecting chip (2) comprising
a plurality of pin electrodes (10) that are measurement poles;
a recess (8) capable of accommodating said pin electrodes (10) and capable of being filled with sample DNA and electrolyte containing electrochemically active molecules;
a common electrode that is a counter electrode for said pin electrodes (10);
means for applying a voltage between said pin electrodes (10) and said common electrode;
means configured both to detect currents between said pin electrodes (10) and said common electrode and to determine a variation of currents detected before and after hybridization of the DNA sample to oligonucleotides having the same or different nucleotide sequences that are immobilized to said pin electrodes (10) has occurred; and
a main body part (5) and a frame part (4) that can be coupled with said main body part (5),
characterized in that
said main body part (5) has said pin electrodes (10) on the inner surface thereof; and
said recess (8), when said frame part (4) is coupled with said main body part (5), is able to accept said pin electrodes (10).
2. The gene detecting chip (2) according to claim 1, wherein the common electrode is not in contact with said pin electrodes (10).
3. The gene detecting chip (2) according to claim 1 or 2, wherein a plurality of PCR products, oligonucleotides, mRNA, cDNA, peptidic nucleic acid, or locked nucleic acid, having different nucleotide sequences is immobilized to said pin electrodes (10).
4. The gene detecting chip (2) according to claim 1 or 2, wherein PCR products, oligonucleotides, mRNA, cDNA, peptidic nucleic acid, or locked nucleic acid, having the same nucleotide sequence are immobilized to said pin electrodes (10).
5. The gene detecting chip (2) according to claim 3 or 4, further having a plurality of recesses (8) capable of accepting said pin electrodes (10) and capable of being filled with sample DNA, so that said plurality of recesses (8) can be filled with different sample DNAs, respectively.
6. The gene detecting chip (2) according to any one of claims 1 to 5, wherein the surfaces of said pin electrodes (10) are plated with gold.
7. The gene detecting chip (2) according to any one of claims 1 to 6, wherein the surfaces of said pin electrodes (10) are partially coated with a resin.
8. The gene detecting chip (2) according to claim 7, wherein said resin is PEEK or PTFE.
9. The gene detecting chip (2) according to any one of claims 1 to 8, wherein a supporting member, in particular, a circuit board (13), is further provided for supporting said pin electrodes (10), and said pin electrodes (10) are erected on said supporting member.
10. The gene detecting chip (2) according to claim 9, wherein said pin electrodes (10) are erected on said supporting member with spot electrodes interposed therebetween.
11. The gene detecting chip (2) according to claim 9, wherein one end of each of said pin electrodes (10) is implanted on said supporting member.
12. The gene detecting chip (2) according to any one of claims 9 to 11, wherein said supporting member is a circuit board (13).
13. The gene detecting chip (2) according to any one of claims 9 to 12, wherein the ends of said pin electrodes (10), that are in contact with or implanted on said supporting member, are enclosed by an epoxy resin or PTFE and thereby secured on said supporting member.
14. The gene detecting chip (2) according to any one of claims 9 to 13, wherein the oligonucleotides are immobilized only to ends of said pin electrodes (10) that are not the ends in contact with or implanted on said supporting member.
15. The gene detecting chip (2) according to any one of claims 1 to 13, wherein the oligonucleotides are fixed over the entirety of said pin electrodes (10).
16. The gene detecting chip (2) according to claim 1, wherein said main body part (5) and said frame part (4) are freely attachable to and detachable from each other.
17. The gene detecting chip (2) according to claim 1, wherein said pin electrodes (10) are arranged in a multiplicity in matrices, and, by inserting the pin electrodes (10) into each of receptacles (18) accommodating PCR products or oligonucleotides having different nucleotide sequences, said PCR products or oligonucleotides having different nucleotide sequences are immobilized thereto.
18. Use of the gene detecting chip (2) according to any one of claims 1 to 17 for gene diagnostic use.

19. A gene detection apparatus comprising the gene detecting chip (2) described in any one of claims 1 to 17, and a measurement apparatus which said detecting chip (2) can be loaded into and removed from.

20. The gene detection apparatus according to claim 19, wherein the temperature of said gene detecting chip (2) can be controlled using a Peltier element.

21. A detection method using the gene detecting chip (2) described in any one of claims 1 to 18, comprising the steps of:

filling said recess (8) with sample DNA or DNA gene-amplified from said sample DNA and electrolyte containing electrochemically active molecules,
performing hybridization to oligonucleotides having the same or different nucleotide sequences that are immobilized to pin electrodes (10) to form double-strand nucleic acid, while said electrochemically active molecules are bonded to said double-strand;
applying voltages between said common electrode and said pin electrodes (10);

characterized by

detecting values of currents flowing between said common electrode and said pin electrodes (10) before and after the hybridization;
determining variations between values of the currents flowing between said common electrode and said pin electrodes (10) before and after the hybridization.

22. The detection method according to claim 21, wherein electrochemically active molecules are bonded to said double-strand while controlling temperature.

23. The detection method according to claim 21 or 22, wherein said electrolyte containing said electrochemically active molecules has as its effective component, ferrocene, catecholamine, metal bipyridine complex, metal phenanthrene complex, viologen, or a threading intercalator in which those compounds are incorporated.

24. A gene diagnostic method wherein the gene detecting chip (2) described in any one of claims 1 to 17 is used.

Patentansprüche

1. Ein Gen-Detektions-Chip (2), der umfasst eine Mehrzahl von Stiftelektroden (10), die Messpole darstellen;
eine Aussparung (8), die dazu ausgebildet ist, die

genannten Stiftelektroden (10) aufzunehmen, und die dazu ausgebildet ist, mit einer Proben-DNA und einem Elektrolyt, das elektrochemisch aktive Moleküle enthält, gefüllt zu werden;

eine gemeinsame Elektrode, die für die genannten Stiftelektroden (10) eine Gegenelektrode darstellt; Mittel zum Anlegen einer Spannung zwischen den genannten Stiftelektroden (10) und der genannten gemeinsamen Elektrode;

Mittel, die sowohl dazu ausgebildet sind, Ströme zwischen den genannten Stiftelektroden (10) und der genannten gemeinsamen Elektrode zu detektieren als auch eine Änderung der Ströme zu bestimmen, die vor und nachdem eine Hybridisierung der DNA-Probe zu Oligonukleiden, die dieselbe oder unterschiedliche Nukleotidsequenzen aufweisen, die an den genannten Stiftelektroden (10) immobilisiert sind, aufgetreten ist, detektiert werden; und ein Hauptteil (5) und ein Rahmenteil (4), das mit dem genannten Hauptteil (5) verbunden werden kann, **dadurch gekennzeichnet, dass**

das genannte Hauptteil (5) die genannten Stiftelektroden (10) auf der inneren Oberfläche desselben aufweist; und

die genannte Aussparung (8) dann, wenn das genannte Rahmenteil (4) mit dem genannten Hauptteil (5) verbunden ist, dazu ausgebildet ist, die genannten Stiftelektroden (10) aufzunehmen.

2. Der Gen-Detektions-Chip (2) gemäß Anspruch 1, in dem sich die gemeinsame Elektrode nicht im Kontakt mit den genannten Stiftelektroden (10) befindet.

3. Der Gen-Detektions-Chip (2) gemäß Anspruch 1 oder 2, in dem eine Mehrzahl von PCR-Produkten, Oligonukleiden, mRNA, cDNA, Peptidnukleinsäure oder verbrückten Nukleinsäure, die unterschiedliche Nukleotidsequenzen aufweisen, an den genannten Stiftelektroden (10) immobilisiert sind.

4. Der Gen-Detektions-Chip (2) gemäß Anspruch 1 oder 2, in dem PCR-Produkte, Oligonukleide, mRNA, cDNA, Peptidnukleinsäure oder verbrückten Nukleinsäure, die dieselbe Nukleotidsequenz aufweisen, an den genannten Stiftelektroden (10) immobilisiert sind.

5. Der Gen-Detektions-Chip (2) gemäß Anspruch 3 oder 4, der weiterhin eine Mehrzahl von Aussparungen (8) aufweist, die dazu ausgebildet sind, die genannten Stiftelektroden (10) aufzunehmen, und die dazu ausgebildet sind, mit einer Proben-DNA gefüllt zu werden, so dass die genannte Mehrzahl von Aussparungen (8) jeweils mit verschiedenen DNAs gefüllt werden kann.

6. Der Gen-Detektions-Chip (2) gemäß einem der Ansprüche 1 bis 5, in dem die Oberflächen der genannten

- ten Stiftelektroden (10) mit Gold plattiert sind.
7. Der Gen-Detektions-Chip (2) gemäß einem der Ansprüche 1 bis 6, in dem die Oberflächen der genannten Stiftelektroden (10) teilweise mit einem Kunstharz beschichtet sind. 5
 8. Der Gen-Detektions-Chip (2) gemäß Anspruch 7, in dem der genannte Kunstharz PEEK oder PTFE ist.
 9. Der Gen-Detektions-Chip (2) gemäß einem der Ansprüche 1 bis 8, in dem weiterhin ein Trageelement, insbesondere eine Leiterplatine (13), zum Tragen der genannten Stiftelektroden (10) zur Verfügung gestellt wird, und die genannten Stiftelektroden (10) auf dem genannten Trageelement aufgestellt sind. 10
 10. Der Gen-Detektions-Chip (2) gemäß Anspruch 9, in dem die genannten Stiftelektroden (10) auf dem genannten Trageelement aufgestellt sind, wobei Punktelektroden dazwischen angeordnet sind. 15
 11. Der Gen-Detektions-Chip (2) gemäß Anspruch 9, in dem ein Ende von jeder der genannten Stiftelektroden (10) auf dem genannten Trageelement implantiert ist. 20
 12. Der Gen-Detektions-Chip (2) gemäß einem der Ansprüche 9 bis 11, in dem das genannte Trageelement eine Leiterplatine (13) ist. 25
 13. Der Gen-Detektions-Chip (2) gemäß einem der Ansprüche 9 bis 12, in dem die Enden der genannten Stiftelektroden (10), die im Kontakt mit oder implantiert auf dem genannten Trageelement sind, von einem Epoxy-Kunstharz oder PTFE umgeben sind und **dadurch** auf dem genannten Trageelement befestigt sind. 30
 14. Der Gen-Detektions-Chip (2) gemäß einem der Ansprüche 9 bis 13, in dem die Oligonukleide nur an Enden der genannten Stiftelektroden (10) immobilisiert sind, die nicht die Enden sind, die im Kontakt mit oder implantiert auf dem genannten Trageelement sind. 35
 15. Der Gen-Detektions-Chip (2) gemäß einem der Ansprüche 9 bis 13, in dem die Oligonukleide über die Gesamtheit der genannten Stiftelektroden (10) fixiert sind. 40
 16. Der Gen-Detektions-Chip (2) gemäß Anspruch 1, in dem das genannte Hauptteil (5) und das genannte Rahmenteil (4) frei aneinander anbringbar und voneinander abnehmbar sind. 45
 17. Der Gen-Detektions-Chip (2) gemäß Anspruch 1, in dem die genannten Stiftelektroden (10) in einer Mehrzahl in Matrizen angeordnet sind, und die genannten PCR-Produkte oder Oligonukleide, die unterschiedliche Nukleotidsequenzen aufweisen, durch Einsetzen der genannten Stiftelektroden (10) in jede der Aufnahmen (18), die PCR-Produkte oder Oligonukleide, die unterschiedliche Nukleotidsequenzen aufweisen, aufnehmen, daran immobilisiert werden. 50
 18. Verwendung des Gen-Detektions-Chip (2) gemäß einem der Ansprüche 1 bis 17 zur gendiagnostischen Verwendung. 55
 19. Eine Gendetektionsvorrichtung, die den Gen-Detektions-Chip (2), der in den Ansprüchen 1 bis 17 beschrieben ist, und eine Messvorrichtung umfasst, in die der genannte Detektionschip geladen oder von der er entnommen werden kann.
 20. Die Gendetektionsvorrichtung gemäß Anspruch 19, in der die Temperatur des genannten Gen-Detektions-Chips (2) unter Verwendung eines Peltier-Elements kontrolliert werden kann.
 21. Ein Detektionsverfahren, das den Gen-Detektions-Chip (2) verwendet, der in den Ansprüchen 1 bis 18 beschrieben wird, das die Schritte umfasst:
 Füllen der genannten Aussparung (8) mit einer Proben-DNA oder einer genverstärkten DNA von der genannten Proben-DNA und mit einem Elektrolyt, das elektrochemisch aktive Moleküle enthält,
 Ausführen einer Hybridisierung der Oligonukleide, die dieselben oder unterschiedliche Nukleotidsequenzen aufweisen, die an den Stiftelektroden (10) immobilisiert sind, um doppelsträngige Nukeinsäure zu bilden, während die genannten elektrochemisch aktiven Moleküle an dem genannten Doppelstrang gebunden sind;
 Anlegen von Spannungen zwischen der gemeinsamen Elektrode und den genannten Stiftelektroden (10);
gekennzeichnet durch
 Detektieren von Werten von Strömen, die zwischen der genannten gemeinsamen Elektrode und den genannten Stiftelektroden (10) fließen, vor und nach der Hybridisierung;
 Bestimmen von Änderungen von Werten der Ströme, die zwischen der genannten gemeinsamen Elektrode und den genannten Stiftelektroden (10) vor und nach der Hybridisierung fließen. 60
 22. Das Detektionsverfahren gemäß Anspruch 21, in dem elektrochemisch aktive Moleküle an dem genannten Doppelstrang während des Kontrollierens der Temperatur gebunden werden. 65

23. Das Detektionsverfahren gemäß Anspruch 21 oder 22, in dem das genannte Elektrolyt, das die genannten elektrochemisch aktiven Moleküle enthält, als seine wirksame Komponente Ferrocen, Catecholamin, einen Metall-Bipyridin-Komplex, einen Metall-Phenanthren-Komplex, Viologen oder einen gewundenen Interkalator in dem die genannten Komponenten enthalten sind, aufweist.

24. Ein Gendiagnoseverfahren, in dem der Gen-Detektions-Chip (2), der in den Ansprüchen 1 bis 17 beschrieben wird, verwendet wird.

Revendications

1. Puce de détection de gènes (2) comprenant une pluralité d'électrodes à broche (10) qui sont des pôles de mesure ;
un évidement (8) pouvant loger lesdites électrodes à broche (10) et pouvant être rempli d'un échantillon d'ADN et d'un électrolyte contenant des molécules actives de façon électrochimique ;
une électrode commune qui est une contre-électrode pour lesdites électrodes à broche (10) ;
un moyen destiné à appliquer une tension entre lesdites électrodes à broche (10) et ladite électrode commune ;
un moyen configuré à la fois pour détecter des courants entre lesdites électrodes à broche (10) et ladite électrode commune et pour déterminer une variation de courants détectés avant et une fois que l'hybridation de l'échantillon d'ADN sur des oligonucléotides ayant des séquences de nucléotides identiques ou différentes qui sont immobilisées sur lesdites électrodes à broche (10) s'est produite ; et
une partie de corps principale (5) et une partie de cadre (4) qui peut être couplée avec ladite partie de corps principale (5),
caractérisée en ce que
ladite partie de corps principale (5) comporte lesdites électrodes à broche (10) sur la surface intérieure de celle-ci ; et
ledit évidement (8), lorsque ladite partie de cadre (4) est couplée à ladite partie de corps principale (5), est capable d'accepter lesdites électrodes à broche (10).
2. Puce de détection de gènes (2) selon la revendication 1, dans laquelle l'électrode commune n'est pas en contact avec lesdites électrodes à broche (10).
3. Puce de détection de gènes (2) selon la revendication 1 ou 2, dans laquelle une pluralité de produits PCR, d'oligonucléotides, d'ARN messenger, d'ADN complémentaire, d'acide nucléique peptidique ou d'acide nucléique verrouillé, ayant des séquences de nucléotides différentes sont immobilisés sur les-

des électrodes à broche (10).

4. Puce de détection de gènes (2) selon la revendication 1 ou 2, dans laquelle des produits PCR, des oligonucléotides, de l'ARN messenger, de l'ADN complémentaire, de l'acide nucléique peptidique ou de l'acide nucléique verrouillé, ayant la même séquence de nucléotides sont immobilisés sur lesdites électrodes à broche (10).
5. Puce de détection de gènes (2) selon la revendication 3 ou 4, comprenant en outre une pluralité d'évidements (8) pouvant accepter lesdites électrodes à broche (10) et pouvant être remplis d'un échantillon d'ADN, si bien que ladite pluralité d'évidements (8) peuvent être remplis respectivement de différents échantillons d'ADN.
6. Puce de détection de gènes (2) selon l'une quelconque des revendications 1 à 5, dans laquelle les surfaces desdites électrodes à broche (10) sont plaquées d'or.
7. Puce de détection de gènes (2) selon l'une quelconque des revendications 1 à 6, dans laquelle les surfaces desdites électrodes à broche (10) sont partiellement recouvertes d'une résine.
8. Puce de détection de gènes (2) selon la revendication 7, dans laquelle ladite résine est du PEEK (polyétheréthercétone) ou du PTFE (polytétrafluoroéthylène).
9. Puce de détection de gènes (2) selon l'une quelconque des revendications 1 à 8, dans laquelle un élément de support, en particulier, une carte de circuit imprimé (13), est en outre prévu pour supporter lesdites électrodes à broche (10), et lesdites électrodes à broche (10) se dressent sur ledit élément de support.
10. Puce de détection de gènes (2) selon la revendication 9, dans laquelle lesdites électrodes à broche (10) se dressent sur ledit élément de support, des électrodes à point s'interposant entre celles-ci.
11. Puce de détection de gènes (2) selon la revendication 9, dans laquelle une extrémité de chacune desdites électrodes à broche (10) est implantée sur ledit élément de support.
12. Puce de détection de gènes (2) selon l'une quelconque des revendications 9 à 11, dans laquelle ledit élément de support est une carte de circuit imprimé (13).
13. Puce de détection de gènes (2) selon l'une quelconque des revendications 9 à 12, dans laquelle les ex-

trémities desdites électrodes à broche (10), qui sont en contact avec ledit élément de support ou implantées sur ce dernier, sont entourées d'une résine époxy ou de PTFE et sont ainsi fixées sur ledit élément de support.

5

14. Puce de détection de gènes (2) selon l'une quelconque des revendications 9 à 13, dans laquelle les oligonucléotides sont immobilisés uniquement sur les extrémités desdites électrodes à broche (10) qui ne sont pas les extrémités en contact avec ledit élément de support ou implantées sur ce dernier.

10

15. Puce de détection de gènes (2) selon l'une quelconque des revendications 1 à 13, dans laquelle les oligonucléotides sont fixés sur la totalité desdites électrodes à broche (10).

15

16. Puce de détection de gènes (2) selon la revendication 1, dans laquelle ladite partie de corps principale (5) et ladite partie de cadre (4) peuvent être librement attachées l'une à l'autre et détachées l'une de l'autre.

20

17. Puce de détection de gènes (2) selon la revendication 1, dans laquelle lesdites électrodes à broche (10) sont agencées dans une multiplicité de matrices, et, en insérant les électrodes à broche (10) dans chacun des réceptacles (18) logeant des produits PCR ou oligonucléotides ayant des séquences de nucléotides différentes, lesdits produits PCR ou oligonucléotides ayant des séquences de nucléotides différentes y sont immobilisés.

25

30

18. Utilisation de la puce de détection de gènes (2) selon l'une quelconque des revendications 1 à 17 pour une utilisation de diagnostic de gènes.

35

19. Appareil de détection de gènes comprenant la puce de détection de gènes (2) décrite dans l'une quelconque des revendications 1 à 17, et appareil de mesure dans lequel et duquel ladite puce de détection (2) peut être chargée et déchargée.

40

20. Appareil de détection de gènes selon la revendication 19, dans lequel la température de ladite puce de détection de gènes (2) peut être commandée en utilisant un élément Peltier.

45

21. Procédé de détection utilisant la puce de détection de gènes (2) décrite dans l'une quelconque des revendications 1 à 18, comprenant les étapes consistant à :

50

remplir ledit évidement (8) avec un échantillon d'ADN ou d'ARN à amplification provenant dudit échantillon d'ADN et avec un électrolyte contenant des molécules actives de façon électrochimique,

55

réaliser une hybridation sur des oligonucléotides ayant des séquences de nucléotides identiques ou différentes qui sont immobilisées sur les électrodes à broche (10) afin de former un acide nucléique à double brin, tandis que lesdites molécules actives de façon électrochimique sont liées audit double brin ;
appliquer des tensions entre ladite électrode commune et lesdites électrodes à broche (10) ;

caractérisé par

la détection de valeurs de courants circulant entre ladite électrode commune et lesdites électrodes à broche (10) avant et après l'hybridation ;
la détermination de variations entre les valeurs des courants circulant entre ladite électrode commune et lesdites électrodes à broche (10) avant et après l'hybridation.

22. Procédé de détection selon la revendication 21, dans lequel des molécules actives de façon électrochimique sont liées audit double brin pendant la commande de la température.

23. Procédé de détection selon la revendication 21 ou 22, dans lequel ledit électrolyte contenant lesdites molécules actives de façon électrochimique comporte, comme composant efficace, du ferrocène, de la catécholamine, un complexe de bipyridine de métal, un complexe de phénanthrène de métal, du viologène ou un intercalateur d'introduction dans lequel ces composés sont incorporés.

24. Procédé de diagnostic de gènes dans lequel la puce de détection de gène (2) décrite dans l'une quelconque des revendications 1 à 17 est utilisée.

Fig. 1

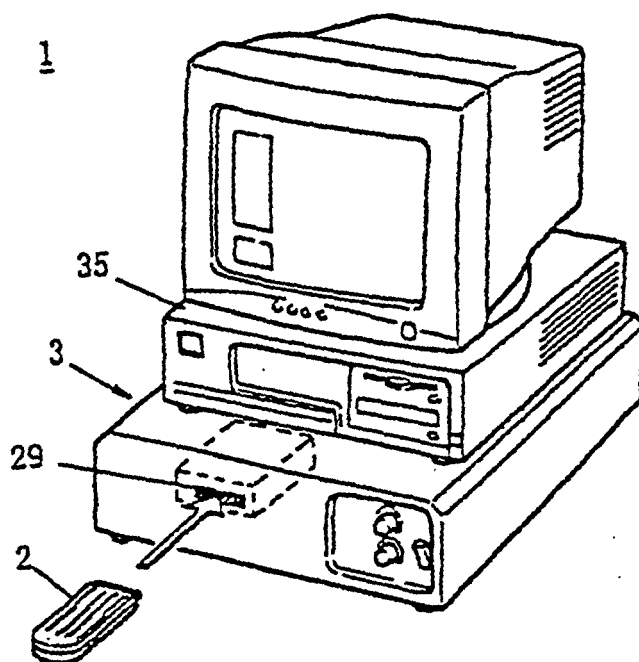


Fig. 2

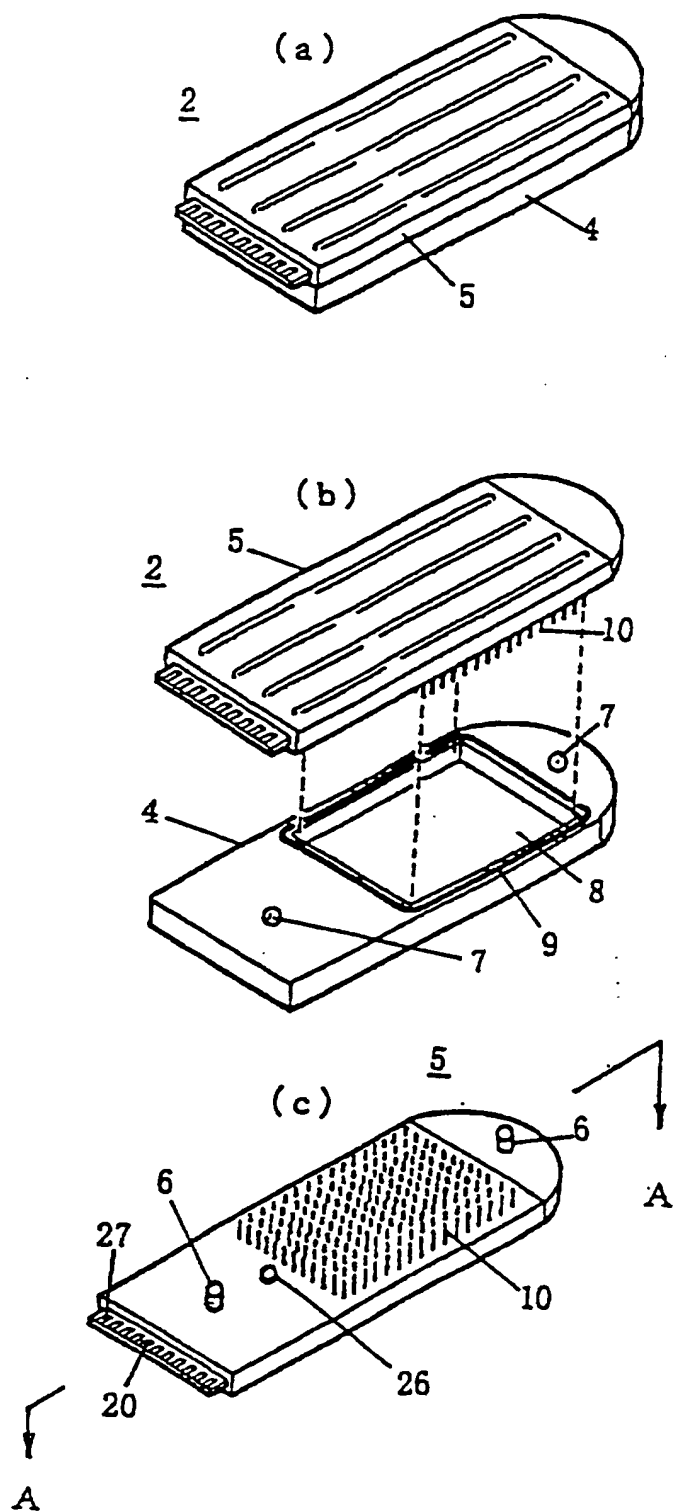


Fig. 3

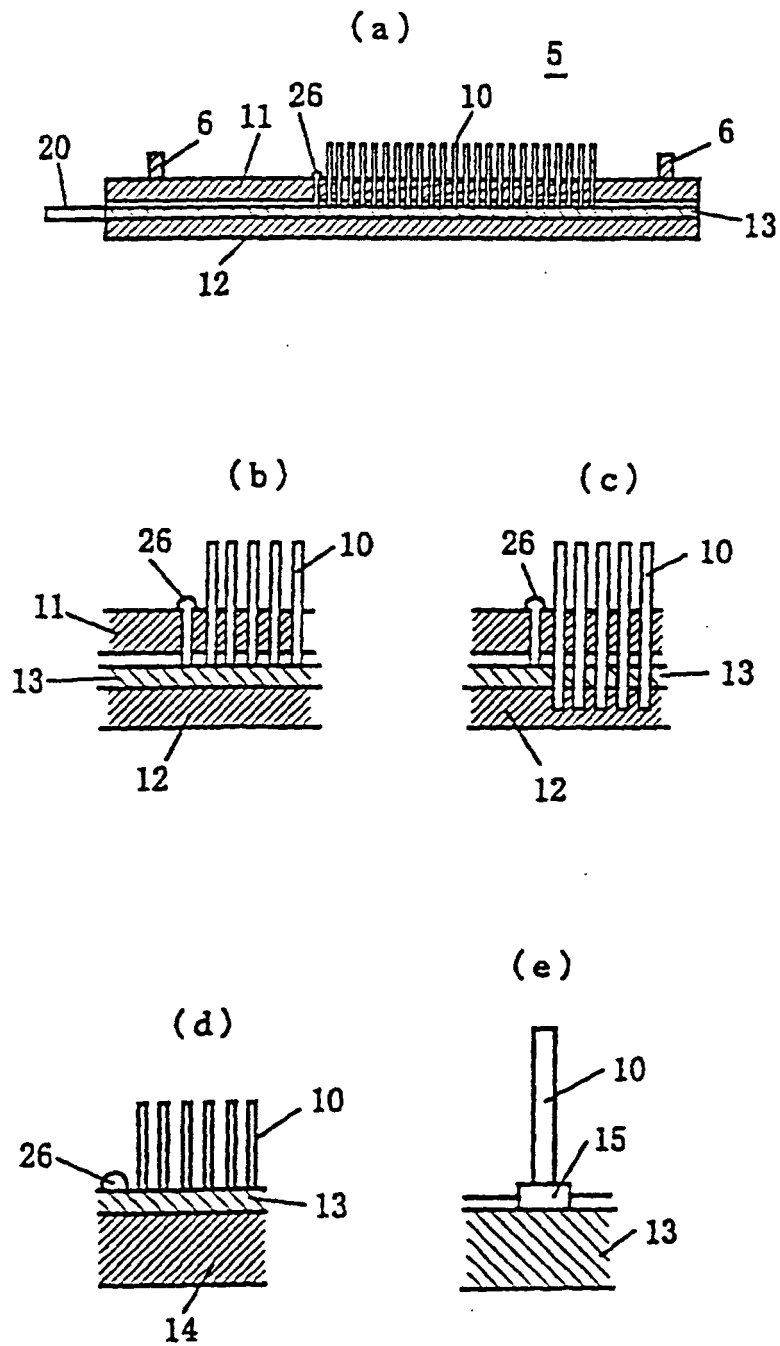


Fig. 4

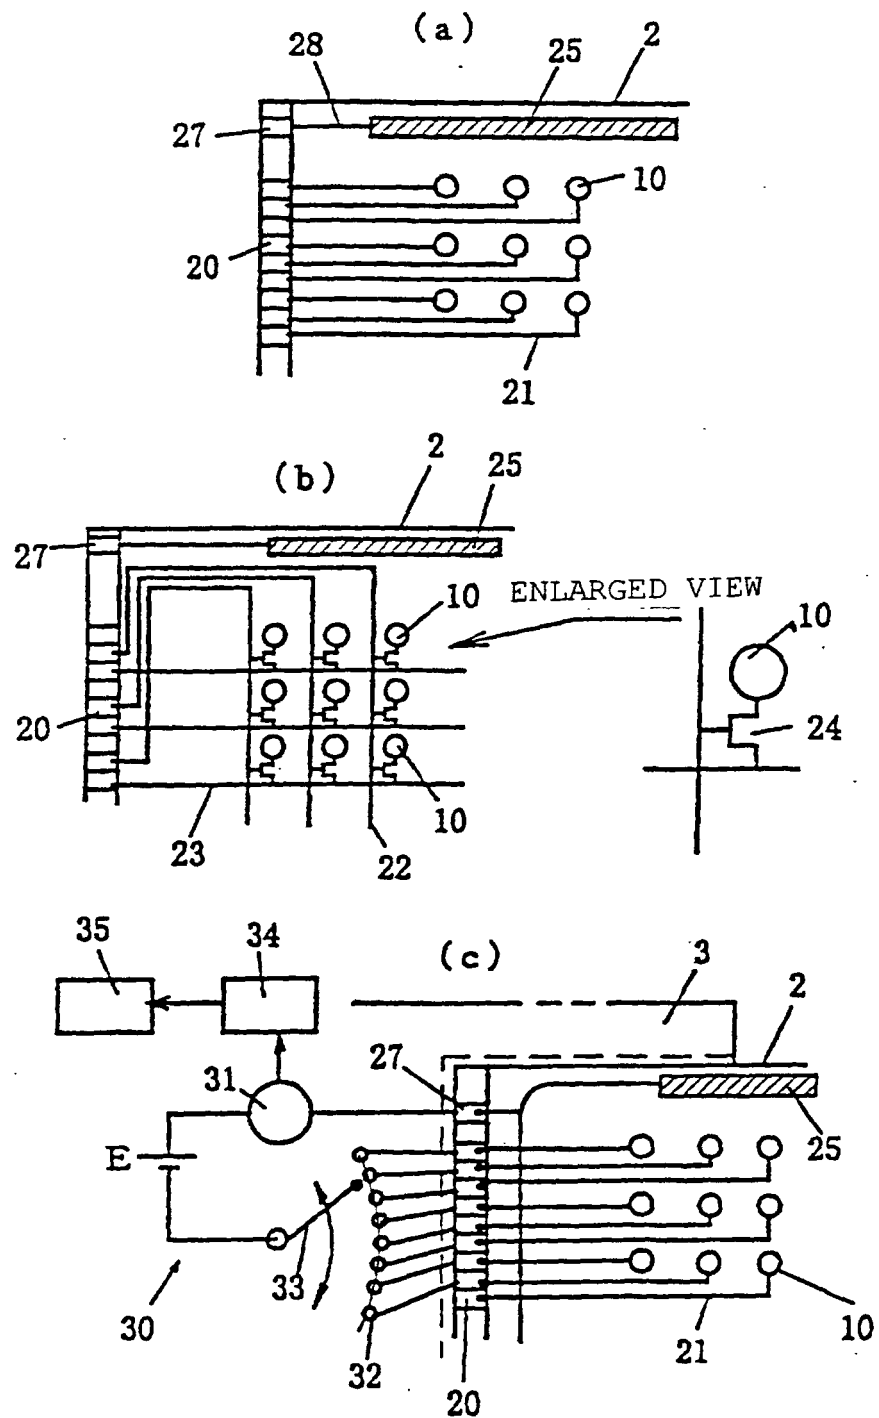


Fig. 5

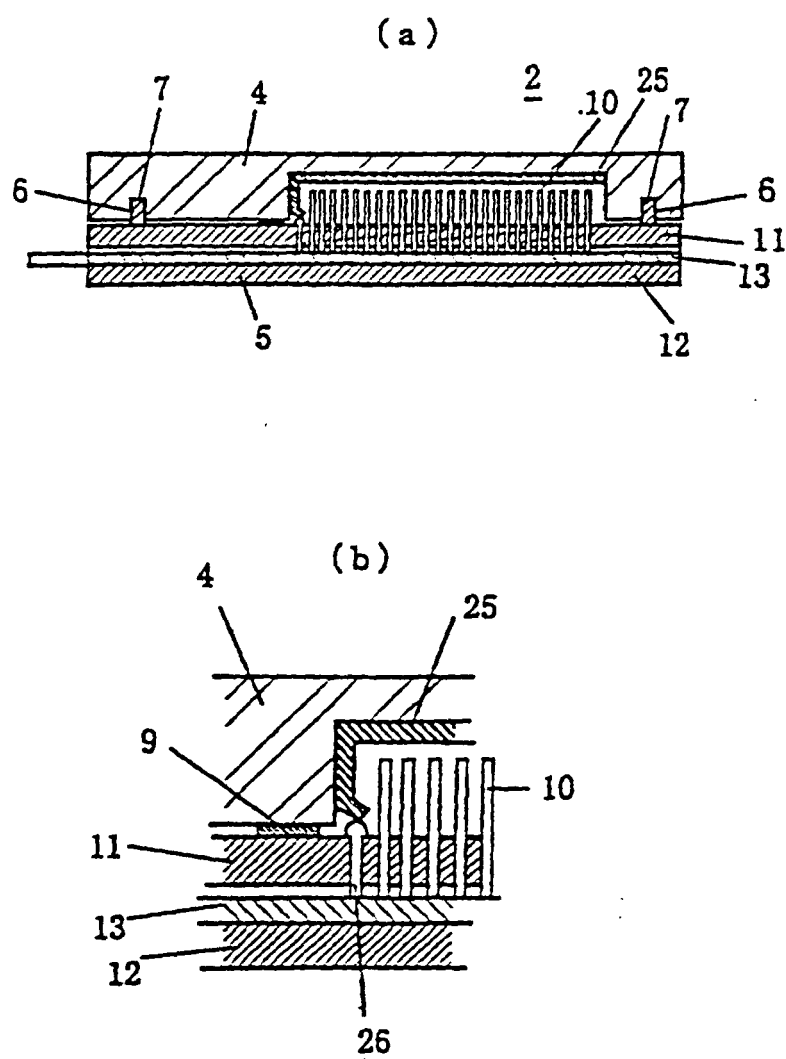


Fig. 6

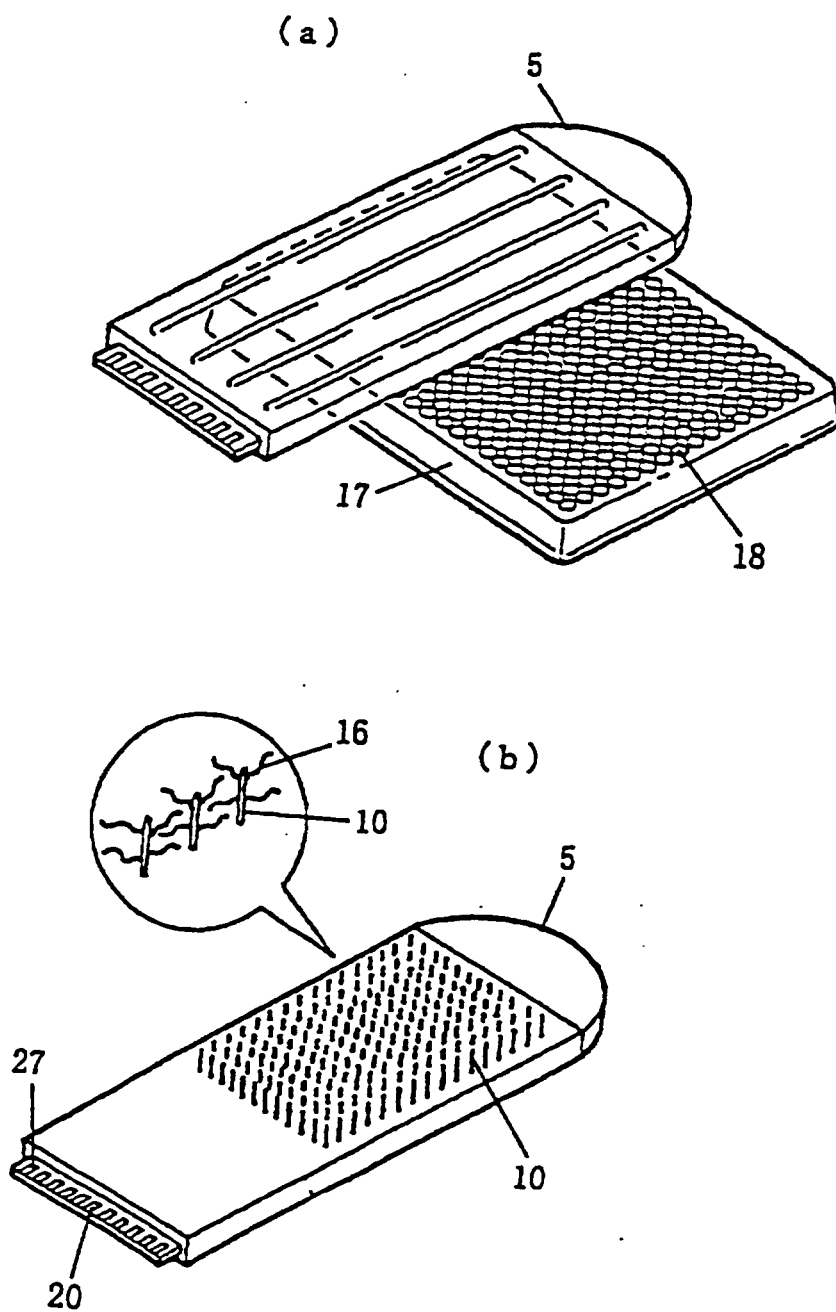


Fig. 7


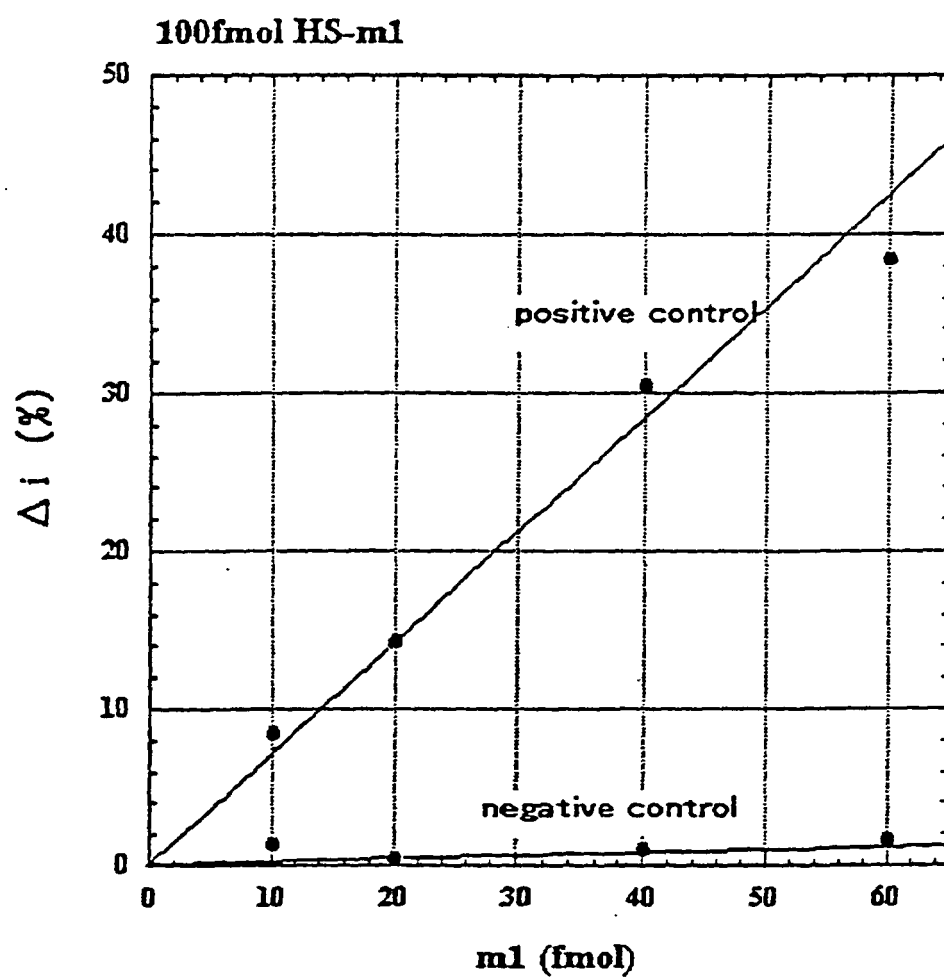


Fig. 8

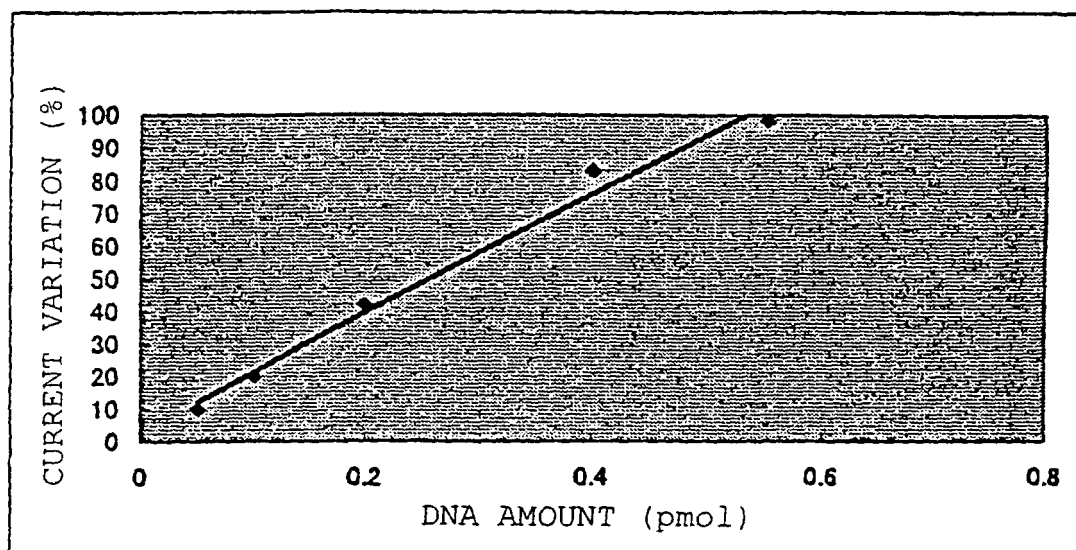

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP H92880801997 B [0015] [0022] [0101]
- EP 1120646 A [0017]
- US 5605662 A [0018]
- US 5776672 A [0019]
- WO 9801221 A [0020]
- EP 0882981 A1 [0021]

Non-patent literature cited in the description

- *Dai 57 kai bunseki kagaku toronkai yokoshu*, 1996, 137-138 [0015]
- **C. D. BAIN.** *J. Am. Chem. Soc.*, 1989, 321 [0083]
- **J. J. GOODING.** *Anal. Chem.*, 1998, 2396 [0083]