



(51) International Patent Classification:

H01M 4/86 (2006.01) H01M 4/88 (2006.01)
H01M 8/10 (2016.01)

(21) International Application Number:

PCT/US2017/049610

(22) International Filing Date:

31 August 2017 (31.08.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/381,765 31 August 2016 (31.08.2016) US

(71) Applicant: ONE SCIENTIFIC, INC. [US/US]; 2109 W. Market Street, Suite 151, Johnson City, TN 37604 (US).

(72) Inventor: REDWINE, Michael, A.; c/o One Scientific, Inc., 2109 W. Market Street, Suite 151, Johnson City, TN 37604 (US).

(74) Agent: HAEDI, Selene; Olive Law Group, PLLC, 125 Edinburgh South Drive, Suite 220, Cary, NC 27511 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: SYSTEMS, APPARATUSES, AND METHODS FOR GENERATING ELECTRIC POWER VIA CONVERSION OF WATER TO HYDROGEN AND OXYGEN

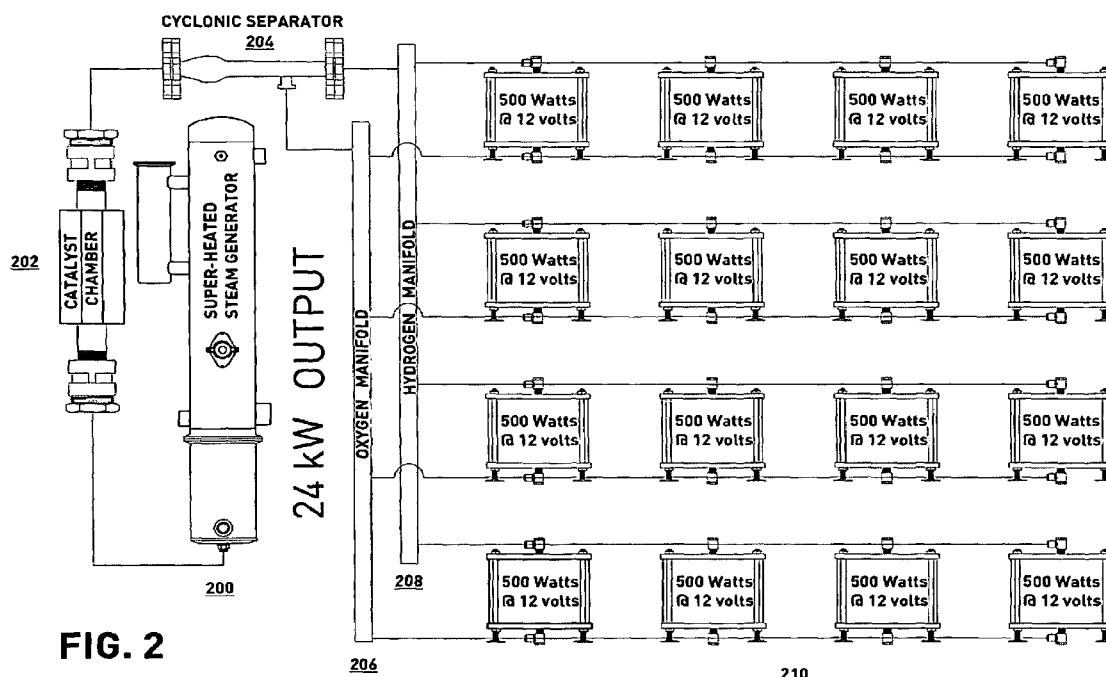


FIG. 2

(57) Abstract: Systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen. According to an aspect, a method includes applying super-heated steam across a catalyst surface within a catalyst chamber to generate ionized steam plasma. The method further includes forming an anode and a cathode between molecules of the ionized steam plasma. The method also includes using the anode and the cathode to generate electricity.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

SYSTEMS, APPARATUSES, AND METHODS FOR GENERATING ELECTRIC POWER
VIA CONVERSION OF WATER TO HYDROGEN AND OXYGEN

DESCRIPTION

CROSS REFERENCE

[0001] This application claims the benefit of the U.S. Provisional Application Serial No. 62/381,765 filed on August 31, 2016 and titled SYSTEMS, APPARATUSES, AND METHODS FOR GENERATING ELECTRIC POWER BY CONVERTING WATER TO HYDROGEN AND OXYGEN, the disclosure of which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] The presently disclosed subject matter relates to power generation. More particularly, the presently disclosed subject matter relates to systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen.

BACKGROUND

[0003] As the world's population expands, so too does its need for energy. Increased energy consumption is needed to power mobile devices, vehicles and electronics, as well as to power the various industrial, commercial, transportation, and residential sectors. Indeed, the Global Energy Statistical Yearbook provided by Enerdata shows that the U.S. alone consumed 2,204 Mtoe of energy in 2016, while China consumed 3,123 Mtoe of energy. Yet the world's energy sources such as coal, oil and gas, to name a few, are finite. Furthermore, the increased use of these energy sources results in an increased production of noxious gases that contribute to global warming and adversely affect the environment. As such, renewable energy sources are needed.

[0004] Hydrogen (H₂) is one such renewable energy source because hydrogen is abundantly available. There are several known methods for producing hydrogen. Some examples of these known methods include coal gasification, partial oxidation of oil, reformation of methane steam, and biomass gasification, to name a few. Although these methods can generate hydrogen, a significant disadvantage and limitation of each of these methods is the co-

production of carbon dioxide, which is a regulated emission.

[0005] A more efficient method of generating hydrogen without also creating carbon dioxide is through the electrolysis of water. This method allows for the production of carbon free hydrogen and oxygen molecules. Electrolysis uses a direct electric current to drive an otherwise non-spontaneous chemical reaction. The voltage needed for electrolysis to occur is called the decomposition potential.

[0006] Current methods used to separate water into hydrogen and oxygen come with strong safety concerns. In at least one implementation, a mixture of hydrogen and oxygen remains present inside a catalyst chamber and throughout the system's tubing until the mixture is delivered to the point of combustion. This can result in dangerous ignitions inside the catalyst chamber.

[0007] Accordingly, there is a need for improved systems and techniques for separating the gaseous hydrogen and oxygen mixture.

SUMMARY

[0008] This Summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used to limit the scope of the claimed subject matter.

[0009] Disclosed herein are systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen. According to an aspect, a method includes applying super-heated steam across a catalyst surface within a catalyst chamber to generate ionized steam plasma. The method further includes forming an anode and a cathode between molecules of the ionized steam plasma. The method also includes using the anode and the cathode to generate electricity.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The foregoing summary, as well as the following detailed description of various embodiments, is better understood when read in conjunction with the appended drawings. For the purposes of illustration, there is shown in the drawings exemplary embodiments; however, the presently disclosed subject matter is not limited to the specific

methods and instrumentalities disclosed. In the drawings:

[0011] FIG. 1A, 1B, 1C, 1D, and 1E depict an example system for systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen in accordance with embodiments of the present disclosure;

[0012] FIG. 2 depicts another example system in accordance with embodiments of the present disclosure;

[0013] FIG 3 shows the super-heated steam generator that can be used in the system depicted in FIG. 2 in accordance with embodiments of the present disclosure;

[0014] FIG 4 shows the magnetic catalyst chamber that can be used in the system depicted in FIG. 2 in accordance with embodiments of the present disclosure;

[0015] FIG 5 shows the cyclonic separator that can be used in the system depicted in FIG. 2 in accordance with embodiments of the present disclosure;

[0016] FIG 6 shows the fuel cell that can be used in the system depicted in FIG. 2 in accordance with embodiments of the present disclosure;

[0017] FIG. 7 is a flowchart of an example method for systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen in accordance with embodiments of the present disclosure; and

[0018] FIG. 8 is a block diagram of an example monitor and control system for systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen in accordance with embodiments of the present disclosure.

DETAILED DESCRIPTION

[0019] The presently disclosed subject matter is described with specificity to meet statutory requirements. However, the description itself is not intended to limit the scope of this patent. Rather, the inventors have contemplated that the claimed subject matter might also be embodied in other ways, to include different steps or elements similar to the ones described in this document, in conjunction with other present or future technologies.

[0020] As the world's population and corresponding energy needs continue to expand, it becomes readily apparent that current finite energy sources will not be able to keep pace with these demands. Indeed, energy resources from fossil fuels like coal, oil and gas, to name a few, are expected to be depleted within the next few decades. This is quite alarming. As

such, there is a strong need for renewable energy sources.

[0021] Electrolysis stands as a viable means from which renewable electricity can be generated without adversely affecting the environment. However, current electrolysis methods raise safety concerns since hydrogen gas is a product of electrolysis and it is toxic. In addition, current electrolysis techniques require the use of an external current source, which can be cumbersome and add to the safety concerns. Therefore, it is desirable to create a new apparatus and method to enable safer and more efficient electrolysis of water into hydrogen and oxygen molecules for use in fuel cells to generate direct current electricity, wherein the current source is internally generated and the fuel cell is efficient at generating electricity.

[0022] As referred to herein, the term “computing device” should be broadly construed. It can include any type of device including hardware, software, firmware, the like, and combinations thereof. A computing device may include one or more processors and memory or other suitable non-transitory, computer readable storage medium having computer readable program code for implementing methods in accordance with embodiments of the present disclosure. A computing device may be, for example, a server. In another example, a computing device may be any type of conventional computer, such as a laptop computer or a tablet computer or a desktop computer. In another example, the computing device may be a type of network device such as a router or a switch. In another example, the computing device may be a programmable logic controller. In another example, the computing device may be a battery powered Internet of Things (IoT) device. In another example, the computing device may be a microcontroller. In another example, a computing device may be a mobile computing device such as, for example, but not limited to, a smart phone, a cell phone, a pager, a personal digital assistant (PDA), a mobile computer with a smart phone client, or the like. A typical mobile computing device is a wireless data access-enabled device (e.g., an iPhone[®] smart phone, a BlackBerry[®] smart phone, a NEXUS ONE[™] smart phone, an iPad[®] device, or the like) that is capable of sending and receiving data in a wireless manner using protocols like the Internet Protocol, or IP, and the wireless application protocol, or WAP. This allows users to access information via wireless devices, such as smart phones, mobile phones, pagers, two-way radios, communicators, and the like. Wireless data access is supported by many wireless networks, including, but not limited to, CDPD, CDMA, GSM, PDC, PHS, TDMA, FLEX, ReFLEX, iDEN, TETRA, DECT, DataTAC, Mobitex, EDGE and other 2G, 3G, 4G and LTE

technologies, and it operates with many handheld device operating systems, such as PalmOS, EPOC, Windows CE, FLEXOS, OS/9, JavaOS, iOS and Android. Typically, these devices use graphical displays and can access the Internet (or other communications network) on so-called mini- or micro-browsers, which are web browsers with small file sizes that can accommodate the reduced memory constraints of wireless networks. In a representative embodiment, the mobile device is a cellular telephone or smart phone that operates over GPRS (General Packet Radio Services), which is a data technology for GSM networks. In addition to voice communication, a given mobile device can communicate with another such device via many different types of message transfer techniques, including SMS (short message service), enhanced SMS (EMS), multi-media message (MMS), email WAP, paging, or other known or later-developed wireless data formats. Although many of the examples provided herein are implemented on servers in a datacenter, the examples may similarly be implemented on any suitable computing device or computing devices.

[0023] In accordance with the embodiments, the present disclosure provides systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen. For instance, FIG. 1A to 1E illustrate an example system for systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen. Referring to FIG. 1A, the system includes a deionized water reservoir **100** that may act as the water source for the steam plasma electrolysis. The system also includes a lobular pump **102** that may act to pump the water from the water reservoir **100** into, in an example, the class 400 boiler **106**, which then boils the water to create steam. In another example, a two-zone steam generator and steam super-heater may be employed to produce the super-heated steam. From there, the steam travels into the magnetic catalyst chamber **110**. Next, condensates are trapped via the condensate trap **112** that then gets pumped back **104** into the water reservoir **100** using, in an example, a non-electric condensate pump **108**. Steam that is not caught by the condensate trap **112** proceed to the rechargeable catalytic hydrogen fuel cell (RCHFC) **116** in a controlled manner, as monitored and controlled by the hydrogen sensor and control valve **114**. The rechargeable catalytic hydrogen fuel cell **116** contains a cellular fluidized bed **118** for reduction of, in an example, alumina in order to recharge the aluminum gallium alloy catalyst in this example.

[0024] FIG. 1B shows the magnetic catalyst chamber **110**, the condensate trap **112**,

the hydrogen sensor and control valve **114**, the rechargeable catalytic hydrogen fuel cell **116**, and the cellular fluidized bed **118** in more detail. The magnetic catalyst chamber **110** receives the dry steam from the class 400 boiler **106** prior to converting that dry steam into hydrogen gas and oxygen gas within the magnetic catalyst chamber **110**. In an example, the rechargeable catalytic hydrogen fuel cell **116** is constructed in a cellular fashion using a mesh material. In an example, the mesh material can be a Dynapore® mesh material. Each rechargeable catalytic hydrogen fuel cell **116** can be preloaded with, in an example, an aluminum/gallium alloy that releases hydrogen when water is added due to a resulting oxidation of the alloy. The rechargeable catalytic hydrogen fuel cell **116** is recharged using the hydrogen and oxygen gases from the magnetic catalyst chamber **110**. That is, the hydrogen from the magnetic catalyst chamber **110** can be used by the rechargeable catalytic hydrogen fuel cell **116** to recharge the oxidized aluminum/gallium alloy back to a metallic state, thus enabling the release of water vapor, i.e. steam. This steam can also then be caught by the condensate trap **112** for recycling back into the system.

[0025] FIG. 1C shows the magnetic catalyst chamber **110** in more detail. In an example, the catalyst surface within the magnetic catalyst chamber **110** is formed into a sintered metal plug shape that contains straight tubular paths for the steam to proceed through the chamber **110**. The magnetic catalyst chamber **110** may be constructed using, in an example, an aluminum tube and brass adapter end caps that adapts from 1/4" NPT (national pipe thread) to 2" NPT diameter on one end of the aluminum tube and 2" NPT to 1/8" NPT on the other end of the aluminum tube. Inside both of the brass adapter fittings may be a fluidizing media, such as a Dynapore® fluidizing media, wherein the media is a screen-like material that provides an even flow through the catalyst surface residing inside the magnetic catalyst chamber **110**. In an example, the catalyst surface can be granular.

[0026] FIG. 1D shows the magnets within the magnetic catalyst chamber **110** in more detail. In an example, the magnets are rare earth permanent magnets such as high energy, anisotropic N42SH Neodymium magnets. These powerful magnets can be arranged around the circumference of the magnetic catalyst chamber **110** wherein the chamber can be, for instance, constructed of a non-magnetic material. An example of the non-magnetic material was previously described in FIG. 1C.

[0027] FIG. 1E shows an enlarged image of the rechargeable catalytic hydrogen fuel

cell **116** that can be used in the system shown in FIG. 1A.

[0028] Examples that can embody the presently disclosed subject matter are now described in more detail.


[0029] FIG. 2 depicts another example system in accordance with embodiments of the present disclosure. The steam plasma electrolysis process begins with a generation of steam in the super-heated steam generator **200**. In an example, the steam can be created by conventional methods such as heating a pressure vessel using electricity, using a heat exchanger, and/or using combustion technologies in order to raise the steam to a temperature of about 350°C to about 450°C. Likewise, energy sources for this system can be harvested from wind, solar, waste reclamation, and “off peak” grid electrical sources. Returning now to the generated steam, the steam then travels from the steam generator **200** to the catalyst chamber **202**, i.e. the magnetic catalyst chamber **202**, via, in an example, a stainless-steel tube. The catalyst chamber **202** can be comprised of a large aluminum tube with two opposing ends, wherein each end comprises a stainless-steel wire mesh pressed together to cause an even flow of the super-heated steam. In an example, the stainless-steel wire mesh is a type of fluidizing media, such as a Dynapore® fluidizing media.

[0030] Still referring to FIG. 2, the catalyst chamber **202** comprises a catalyst surface upon which a reaction with the generated steam takes place. The catalyst surface comprises one of multi-walled carbon nanotubes, aluminum-gallium alloys, chromium and chromium-rare earth alloys, cobalt, cobalt samarium alloys, manganese, molybdenum, nickel, niobium, zirconium, palladium, and germanium. The generated steam gets applied across the catalyst surface within the catalyst chamber **202** to generate ionized steam plasma, which is also known as steam plasma. The catalyst chamber **202** contains one or more of the catalyst surface, wherein the catalyst surface is arranged so that it would allow for an even flow of the steam through the catalyst chamber **202**. To do so, the catalyst surface must be configured so that its shape and particle size allows for optimum even steady flow within the catalyst chamber **202**. Some examples of possible shapes and configurations include at least one of a sintered plug, a nanotube, a microtube, and a granular shape.

[0031] Still referring to FIG. 2, the catalyst chamber **202** can be surrounded by an array of, in an example, high energy anisotropic magnets. The magnets can be, for example, high energy anisotropic N42SH Neodymium magnets having an energy density of at least 1.3

Tesla. The magnets are positioned in a configuration to achieve a predetermined density of magnetic flux within the catalyst chamber **202** in order to create a magnetic field within the catalyst chamber **202**. Specifically, the magnets are arranged so that they cover at least 80% of a length of the catalyst chamber **202** and are substantially, linearly centered within the catalyst chamber **202**. This is done to ensure that a maximum density of magnetic flux is achieved within the catalyst chamber **202**. FIG. 4, as is subsequently described, shows the catalyst chamber **202** and its processes in more detail.

[0032] Still referring to FIG. 2, as the ionized steam plasma moves through the magnetic field within the catalyst chamber **202**, it acts as an electrical conductor, thereby creating an electrical current. Thus, an electromotive force is created by the movement of the ionized steam plasma through the magnetic field within the catalyst chamber **202**. Unlike other electrolysis processes which rely upon an external current source, the electrical current in the present disclosure is generated internally within the catalyst chamber **202** via the movement of the ionized steam plasma through the magnetic field. Furthermore, the creation of the electromotive force causes electrolysis of the ionized steam plasma, leading to a formation of an anode and a cathode between the two ionized steam plasma molecules. This unique manner of electrolysis, i.e. steam plasma electrolysis, subsequently causes a molecular dissociation of hydrogen molecules from oxygen molecules, as depicted by the following chemical reaction:



After the steam plasma electrolysis, the resulting mixture of hydrogen gas, oxygen gas, and a small amount of water vapor then exits the catalyst chamber **202**.

[0033] Still referring to FIG. 2, this mixture of hydrogen gas, oxygen gas, and the small amount of water vapor then proceeds to the cyclonic separator **204** for separation. The cyclonic separator **204** is comprised of an inner and outer body. The outer body has a venturi configuration, while the inner body has a configuration that comprises fins and egg-shaped projections. This configuration enables heavier gases, like oxygen and water vapor, to spin towards the outside of the cyclonic separator **204** and to exit in a perpendicular manner to the cyclonic separator **204**. That is, the oxygen gas and the water vapor exit via an outlet positioned in a substantially perpendicular manner to the cyclonic separator **204**. Meanwhile, the lighter hydrogen gas goes straight through the cyclonic separator **204**. FIG. 5, as is subsequently

described, shows the cyclonic separator **204** and its processes in more detail.

[0034] Still referring to FIG. 2, the separated gases now move to their respective manifolds: the heavier gases oxygen and water vapor go to the oxygen manifold **206**, while the lighter hydrogen gas goes to the hydrogen manifold **208**. In an example experiment, an analysis of the hydrogen gas shows a 99% purity level.

[0035] Still referring to FIG. 2, a user can engage an automated selector valve that is part of this system in order to either compress and store the gases or to use them in the at least one fuel cells **210** to generate electricity. If a selection for compression is made, then a conventional compressor can be used to, for instance, refuel a hydrogen vehicle or for some other hydrogen demands. In contrast, if a selection is made to generate electricity, then the gases will be sent to the at least one fuel cells **210** to generate the direct current electricity. Each fuel cell **210** has anode terminal and cathode terminal connections attached thereto. The fuel cell **210** receives the hydrogen gas in the anode terminal, while it receives the oxygen gas in the cathode terminal. FIG. 6, as is subsequently described, shows the fuel cell **210** and its processes in more detail. The electricity generated by each fuel cell **210** is, in an example, at least 500W at 12V.

[0036] Still referring to FIG. 2, in an example, the system shown in FIG. 2 comprises an array of 48 to 64 fuel cells **210** that are arranged and plumbed so that the oxygen and hydrogen gases may be evenly distributed to these fuel cells **210**. Continuing this example, the fuel cells **210** can be in sets of 12 fuel cells **210** arranged in a series configuration, and then also arranged in a parallel configuration. This unit of fuel cells **210** can then be wired to an inverter to provide alternating current power. A direct current power outlet may also be provided. Multiple units of fuel cells **210**, configured as described above, can be joined together to provide larger amounts of current, if so desired.

[0037] FIG. 3 shows an enlarged image of the super-heated steam generator **200, 300** that can be used in the system shown in FIG. 2 in accordance with embodiments of the present disclosure.

[0038] FIG. 4 shows an enlarged image of the magnetic catalyst chamber **202, 400** that can be used in the system depicted in FIG. 2 in accordance with embodiments of the present disclosure. The catalyst chamber **202, 400** receives the dry hot steam **402**, i.e. the generated steam, that originates from the super-heated steam generator **200, 300**. As was previously described above, the dry hot steam **402** is eventually dissociated via the unique method of steam

plasma electrolysis that stems from the creation of an electromotive force and an internal current generation.

[0039] Still referring to FIG. 4, an example configuration for the catalyst surface is shown. Specifically, the catalyst surface has been formed into a sintered plug configuration **404**, which enables straight tubular paths for the dry hot steam **402** to proceed through the catalyst chamber **202, 400**. In addition, powerful magnets are arranged around the circumference of the catalyst chamber **202, 400**, which itself comprises a non-magnetic material **406**. In an example, the magnets are high energy anisotropic N42SH Neodymium magnets with an energy density of at least 1.3 Tesla.

[0040] Still referring to FIG. 4, upon steam plasma electrolysis, the dissociated hydrogen gas **410**, oxygen gas **408**, and a small amount of water vapor then exit the magnetic catalyst chamber **202, 400**. This mixture then goes to the cyclonic separator **204**, which is described in FIG. 5 below.

[0041] FIG. 5 shows an enlarged image of the cyclonic separator **204, 500** that can be used in the system depicted in FIG. 2 in accordance with embodiments of the present disclosure. A cut away view of the cyclonic separator **204, 500** is given in order to show its distinctive shape. The cyclonic separator **204, 500** has two bulbous shapes at its opposing ends, wherein the bulbous shapes have tapered ends where they connect to each other via a singular tube. As was previously mentioned, the cyclonic separator **204, 500** has an outer body with a venturi configuration, while the inner body has a configuration that comprises fins and egg-shaped projections. Indeed, this configuration can be seen here in the cut away view.

[0042] Still referring to FIG. 5, the dissociated hydrogen gas **410**, oxygen gas **408**, and a small amount of water vapor that exited the catalyst chamber **202, 400** now enter the cyclonic separator **204, 500** for separation. The dissociated hydrogen gas **410** and oxygen gas **408** are conveyed **502** via, in an example, stainless-steel tubing into the cyclonic separator **204, 500** whose distinctive shape is designed to separate the dissociated hydrogen gas **410** and oxygen gas **408**. As was previously mentioned, this shape allows heavier gases, like oxygen gas **408** and water vapor, to spin towards the outside of the cyclonic separator **204, 500** and to exit in a perpendicular manner **504** from the cyclonic separator **204, 500**. Meanwhile, the lighter hydrogen gas **410** goes straight through **506** the cyclonic separator **204, 500**.

[0043] FIG. 6 shows an enlarged image of the at least one fuel cell **210, 600** that can

be used in the system depicted in FIG. 2 in accordance with embodiments of the present disclosure. The plurality of fuel cells **210, 600** can be wired in series or in parallel depending on whether an increase in voltage or an increase in current is desired. If an increase in voltage is desired, then the fuel cells **210, 600** are wired in series, while an increase in current is achieved by a parallel wiring of the fuel cells **210, 600**. As previously mentioned, the oxygen from the oxygen manifold **206** is conveyed **602** to the cathode side of the fuel cell **210, 600**, while the hydrogen from the hydrogen manifold **208** is conveyed **604** to the anode side of the fuel cell **210, 600**.

[0044] Still referring to FIG. 6, the fuel cell **210, 600** shows components that are radially dispersed from a central circular core. The radial components are the plurality of substrate loops that are attached to a central circular core comprising a central hydrogen fuel tube. The central hydrogen fuel tube comprises a cylindrical tube that extends the height of the fuel cell **210, 600** with perforations throughout the height to route gases to the plurality of substrate loops that radiates out from the central hydrogen fuel tube. The substrate loops comprise an interior that serves as an anode and an exterior that serves as a cathode. That is, the inner substrate loop serves as an anode for receiving hydrogen gas **604**, while the outer substrate loop serves as a cathode for receiving oxygen gas **602**. The substrate loops comprise, in an example, a semi-permeable polytetrafluoroethylene (PTFE) with a thickness range of about 0.2 mm to about 0.5 mm thick, wherein the anode and cathode sides are each sputtered to a thickness of about 20 to 200 Angstroms on opposing sides of the substrate loop. In an example, each fuel cell **210, 600** has 18 such substrate loops which are attached radially to the central hydrogen fuel tube. The central hydrogen fuel tube and the plurality of substrate loops are placed in a sealed cylindrical housing. This enables the oxygen gas **602** to be routed to the outside of the substrate loop, i.e. to the cathode side of the substrate loop.

[0045] Still referring to FIG. 6, the anode is created, in an example, by applying a gradient mix of anode materials and sputtering or air brushing the anode materials onto one side of the substrate. In this example, the following anode materials can be applied in the order listed, although other suitable materials and order can be used: (1) indium tin oxide; (2) lanthanum nickel aluminum alloy; (3) nickel cobalt oxide nano-powder suspended in a thin adhesive carrier; and (4) palladium doped with yttrium suspended in a thin adhesive carrier. Here, the nickel cobalt oxide is applied by air brushing. Essentially, ultra-thin layers of the anode materials can

be sputtered or air brushed onto the substrate until the anode materials reach a thickness of between 20 Angstroms to 200 Angstroms. Likewise, the cathode materials can be sputtered or air brushed onto the opposing side of the substrate to a thickness of between 20 Angstroms to 200 Angstroms. In this example, the following cathode materials can be applied in the order listed, although other suitable materials and order can be used: (1) graphene or carbon nanotube; (2) cerium oxide suspended in a thin adhesive carrier; and (3) strontium ferrite powder suspended in a thin adhesive carrier. Here, the cerium oxide and strontium ferrite are applied by air brushing. Thus, the anode and cathode are created by applying ultra-thin layers of a gradient mix of materials, as previously described, to opposing sides of the substrate via sputtering or thin film air brushing techniques.

[0046] Still referring to FIG. 6, the fuel cell **210, 600** contains electrodes **608** on top of the fuel cell **210, 600**. The electrodes **608** serve as an outlet for outputting the generated direct current electricity. That is, these electrodes are for the direct current electricity generated from the fuel cell **210, 600**. The electrodes **608** are comprised of, in an example, brass metal rods that extend from making contact with the substrates to the outside of the fuel cell **210, 600**. One electrode is the anode electrode because it makes contact with the anode side of the substrates inside the fuel cell **210, 600**. Likewise, the other electrode is the cathode electrode because it makes contact with the cathode side of the substrate.

[0047] Still referring to FIG. 6, the fuel cell **210, 600** is also encased within a fuel cell housing **606** that houses the central hydrogen fuel tube and the substrate loops. In an example, the fuel cell housing **606** comprises non-electrically conductive materials, such as clear acrylic tube and plates. In another example, the non-electrically conductive material may be a ceramic type material or a fluoro-plastic material. A terminal **610** for receiving the hydrogen gas from the hydrogen manifold **208** is located on top of the fuel cell **210, 600**, while a terminal **612** for receiving the oxygen gas from the oxygen manifold **206** is located on the bottom of the fuel cell **210, 600**. In an example, the terminal **610** for receiving the hydrogen gas is denoted the anode terminal. Likewise, the terminal **612** for receiving the oxygen gas is denoted the cathode terminal. Each fuel cell **210, 600** can produce, in an example, about 500W of direct current electricity at 12V. The direct current electricity is generated within the fuel cell **210, 600** by a reaction of the hydrogen gas with the oxygen gas to produce water vapor, heat, and the direct current electricity. Water vapor and condensed water resulting from this reaction is removed via

a bottom side port of the fuel cell **210, 600**.

[0048] FIG. 7 illustrates a flowchart of an example method for systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen in accordance with embodiments of the present disclosure. The method of FIG. 7 is described by example as being implemented by the systems shown in FIG. 1 and FIG. 2, although it should be understood that the method may be implemented by any suitable system(s).

[0049] Still referring to FIG. 7, the method includes applying **700** super-heated steam across a catalyst surface within a catalyst chamber **202, 400** to generate ionized steam plasma. The method also includes forming **702** an anode and a cathode between molecules of the ionized steam plasma. The method further includes using **704** the anode and cathode to generate electricity. In an example, the electricity is direct current electricity and the generation is performed using fuel cells **210, 600**. The method steps of FIG. 7 have previously been described in further detail in relation to the other figures.

[0050] FIG. 8 illustrates a block diagram of an example monitor and control system **800** for systems, apparatuses, and methods for generating electric power via conversion of water to hydrogen and oxygen in accordance with embodiments of the present disclosure. The monitor and control system **800** comprises a housing unit **802** that houses the computing device **804** and the internal controller **806**. The monitor and control system **800** also comprises an external controller **810** and a receiver **808** for the external controller **810**. The computing device **804** comprises the internal controller **806** which comprises, in an example, a data logger and a plurality of sensors to monitor data characteristics. The data characteristics comprises at least one of a temperature, a pressure, an electrical power usage, a gas flow, a gas analysis, an electrical power generation, an output voltage from at least one of a fuel cell, and an input current characteristic. That is, the plurality of sensors can monitor these data statistics and provide it to the data logger for cataloging. This information then becomes available to the internal controller **806** in order to monitor the conditions for generating electricity, including the output conditions. That is, the internal controller **806** can be used to monitor the health of the system for, in an example, preventative health maintenance purposes. In another example, the internal controller **806** may comprise a programmable logic controller, as is subsequently described.

[0051] Still referring to FIG. 8, the computing device **804** comprises an external

controller **810** to manage operating parameters and report data characteristics upon a user request. The computing device **804** may also change the operating parameters when directed to do so by the external controller **810**, as is subsequently described. In an example, the operating parameters comprise at least one of a gas flow, a temperature in a steam generation system, and a shutdown of operation. The user request can be done via a user interface, wherein the user interface and the computing device **804** can be implemented by hardware, software, firmware, or combinations thereof. The computing device **804** may include a user interface, such as a display (for e.g., touchscreen display), a touchpad, and/or the like. The computing device **804** may be any suitable computer such as a laptop computer, a tablet computer, or a desktop computer. In another example, the computing device **804** may be a mobile computing device. In yet another example, the computing device **804** may be a battery powered Internet of Things (IoT) device. In another example, the computing device **804** may be a programmable logic controller, wherein the programmable logic controller acts as an internal controller of the computing device **804**. In the latter example, the programmable logic controller can comprise a supervisory control and data acquisition program that enables it to communicate wirelessly with the computing device **804** and the external controller **810**. An example of one such supervisory control and data acquisition program is the Invensys Wonderware & Foxboro Evo™ Integration program by Schneider Electric. The wireless communication can be done, in an example, via photo-optical coupling of the programmable logic controller to a wireless transmitter operating on a spread spectrum of frequencies in order to encrypt the communications.

[0052] Still referring to FIG. 8, the external controller **810** of the computing device **804** comprises a master control program with signals that operate via a triple encryption spread over a spectrum in an upper radio bandwidth. In an example, the upper radio bandwidth comprises a bandwidth in the 30 or 300 mHz band. The spread spectrum denotes a change in frequency as data is being transmitted so that only a receiver **808** on the same frequency can receive the data. In an example, the external controller **810** can be a master control that can be used to command the computing device **804** to change operating parameters, as well as to report operating conditions on demand. In an example, the operating conditions reported on demand can be temperature, pressure, flow in different locations of the system, output voltage from each of the fuel cells, and input current into the super-heated steam generator **200, 300**.

[0053] Still referring to FIG. 8, the computing device **804** and the internal controller

806 are encapsulated within the housing unit **802** in order to isolate the internal controller **806** and the computing device **804** from external interference. External interference can adversely affect the computing device's **804** ability to monitor, manage, and change the operating parameters. In an example, the housing unit **802** is comprised of stainless-steel.

[0054] Still referring to FIG. 8, the receiver **808** provides a communication mechanism for the external controller **810** to command the computing device **804**. In an example, the receiver **808** is positioned on an exterior of the housing unit **802** and is optically coupled to the internal controller **806**. That is, the receiver **808** is placed outside of the signal blocking enclosure, i.e. the housing unit **802**, in order to avoid interference issues. The internal controller **806** can communicate with the receiver **808** since the receiver **808** is optically coupled with the computing device **804**.

[0055] Still referring to FIG. 8, the computing device **804**, internal controller **806**, and external controller **810** may, in an example, include implementations via a computer readable storage medium (or media) having computer readable program instructions. Possible implementations of which are described subsequently.

[0056] The present subject matter may be a system, a method, and/or include an implementation by a computer program product. The computer program product may include a computer readable storage medium (or media) having computer readable program instructions thereon for causing a processor to carry out aspects of the present subject matter.

[0057] The computer readable storage medium can be a tangible device that can retain and store instructions for use by an instruction execution device. The computer readable storage medium may be, for example, but is not limited to, an electronic storage device, a magnetic storage device, an optical storage device, an electromagnetic storage device, a semiconductor storage device, or any suitable combination of the foregoing. A non-exhaustive list of more specific examples of the computer readable storage medium includes the following: a portable computer diskette, a hard disk, a random access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or Flash memory), a static random access memory (SRAM), a portable compact disc read-only memory (CD-ROM), a digital versatile disk (DVD), a memory stick, a floppy disk, a mechanically encoded device such as punch-cards or raised structures in a groove having instructions recorded thereon, and any suitable combination of the foregoing. A computer readable storage medium, as used herein, is

not to be construed as being transitory signals *per se*, such as radio waves or other freely propagating electromagnetic waves, electromagnetic waves propagating through a waveguide or other transmission media (e.g., light pulses passing through a fiber-optic cable), or electrical signals transmitted through a wire.

[0058] Computer readable program instructions described herein can be downloaded to respective computing/processing devices from a computer readable storage medium or to an external computer or external storage device via a network, for example, the Internet, a local area network, a wide area network and/or a wireless network. The network may comprise copper transmission cables, optical transmission fibers, wireless transmission, routers, firewalls, switches, gateway computers and/or edge servers. A network adapter card or network interface in each computing/processing device receives computer readable program instructions from the network and forwards the computer readable program instructions for storage in a computer readable storage medium within the respective computing/processing device.

[0059] Computer readable program instructions for carrying out operations of the present subject matter may be assembler instructions, instruction-set-architecture (ISA) instructions, machine instructions, machine dependent instructions, microcode, firmware instructions, state-setting data, or either source code or object code written in any combination of one or more programming languages, including an object oriented programming language such as Java, Smalltalk, C++ or the like, and conventional procedural programming languages, such as the "C" programming language or similar programming languages. The computer readable program instructions may execute entirely on the user's computer, partly on the user's computer, as a stand-alone software package, partly on the user's computer and partly on a remote computer or entirely on the remote computer or server. In the latter scenario, the remote computer may be connected to the user's computer through any type of network, including a local area network (LAN) or a wide area network (WAN), or the connection may be made to an external computer (for example, through the Internet using an Internet Service Provider). In some embodiments, electronic circuitry including, for example, programmable logic circuitry, field-programmable gate arrays (FPGA), or programmable logic arrays (PLA) may execute the computer readable program instructions by utilizing state information of the computer readable program instructions to personalize the electronic circuitry, in order to perform aspects of the present subject matter.

[0060] Aspects of the present subject matter are described herein with reference to

flowchart illustrations and/or block diagrams of methods, apparatus (systems), and computer program products according to embodiments of the subject matter. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer readable program instructions, where applicable.

[0061] These computer readable program instructions may be provided to a processor of a general-purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions, which execute via the processor of the computer or other programmable data processing apparatus, create means for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks. These computer readable program instructions may also be stored in a computer readable storage medium that can direct a computer, a programmable data processing apparatus, and/or other devices to function in a particular manner, such that the computer readable storage medium having instructions stored therein comprises an article of manufacture including instructions which implement aspects of the function/act specified in the flowchart and/or block diagram block or blocks.

[0062] The computer readable program instructions may also be loaded onto a computer, other programmable data processing apparatus, or other device to cause a series of operational steps to be performed on the computer, other programmable apparatus or other device to produce a computer implemented process, such that the instructions which execute on the computer, other programmable apparatus, or other device implement the functions/acts specified in the flowchart and/or block diagram block or blocks.

[0063] The flowchart and block diagrams in the Figures illustrate the architecture, functionality, and operation of possible implementations of systems, methods, and/or computer program products according to various embodiments of the present subject matter. In this regard, each block in the flowchart or block diagrams may represent a module, segment, or portion of instructions, which comprises one or more executable instructions for implementing the present disclosure. In some alternative implementations, the functions noted in the block may occur out of the order noted in the figures. For example, two blocks shown in succession may, in fact, be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved. It will also be noted that each

block of the block diagrams and/or flowchart illustration, and combinations of blocks in the block diagrams and/or flowchart illustration, can be implemented by special purpose hardware-based systems that perform the specified functions or acts or carry out combinations of special purpose hardware and computer instructions, where applicable.

[0064] While the embodiments have been described in connection with the various embodiments of the various figures, it is to be understood that other similar embodiments may be used or modifications and additions may be made to the described embodiment for performing the same function without deviating therefrom. Therefore, the disclosed embodiments should not be limited to any single embodiment, but rather should be construed in breadth and scope in accordance with the appended claims.

CLAIMS

What is claimed:

1. A method comprising:
applying super-heated steam across a catalyst surface within a catalyst chamber to generate ionized steam plasma;
forming an anode and a cathode between molecules of the ionized steam plasma; and
using the anode and the cathode to generate electricity.
2. The method of claim 1, wherein the super-heated steam has a temperature between about 350°C and about 450°C.
3. The method of claim 1, wherein the catalyst surface comprises one of multi-walled carbon nanotubes, aluminum-gallium alloys, chromium and chromium-rare earth alloys, cobalt, cobalt samarium alloys, manganese, molybdenum, nickel, niobium, zirconium, palladium, and germanium.
4. The method of claim 1, wherein the catalyst surface has a configuration that comprises at least one of a sintered plug, a nanotube, a microtube, and a granular shape.
5. The method of claim 1, wherein applying super-heated steam comprises routing the super-heated steam through a stainless-steel tube to an end of a large aluminum tube of the catalyst chamber.
6. The method of claim 1, wherein the catalyst chamber has two opposing ends that each comprises a stainless-steel wire mesh for causing an even flow of the super-heated steam.
7. The method of claim 6, wherein the stainless-steel wire mesh comprises a fluidizing media.
8. The method of claim 1, wherein using the anode and the cathode to generate electricity comprises molecularly dissociating hydrogen molecules from oxygen molecules via steam plasma electrolysis.

9. The method of claim 1, further comprising:
arranging high energy anisotropic magnets around the catalyst chamber to achieve a predetermined density of magnetic flux within the catalyst chamber;
creating a magnetic field within the catalyst chamber;
passing the ionized steam plasma through the magnetic field; and
generating an electric current internally within the catalyst chamber resulting from the passage of the ionized steam plasma through the magnetic field.
10. The method of claim 9, wherein the high energy anisotropic magnets comprise N42SH Neodymium magnets having an energy density of at least 1.3 Tesla.
11. The method of claim 9, wherein arranging high energy anisotropic magnets comprises positioning the magnets in a configuration to cover at least 80% of a length of the catalyst chamber and such that the magnets are substantially, linearly centered within the catalyst chamber.
12. The method of claim 9, wherein generating an electric current occurs via creating an electromotive force.
13. A system comprising:
a catalyst chamber that applies a super-heated steam across a catalyst surface to generate ionized steam plasma;
a cyclonic separator comprising an outer body and an inner body, wherein the cyclonic separator separates a hydrogen gas, an oxygen gas, and a water vapor derived from the ionized steam plasma;
at least one manifold that receives the separated hydrogen gas, oxygen gas, and water vapor; and
at least one fuel cell comprising an anode terminal and a cathode terminal, wherein the at least one fuel cell:
receives the oxygen gas and the hydrogen gas; and

generates a direct current electricity from the received oxygen gas and hydrogen gas.

14. The system of claim 13, wherein the catalyst surface comprises one of multi-walled carbon nanotubes, aluminum-gallium alloys, chromium and chromium-rare earth alloys, cobalt, cobalt samarium alloys, manganese, molybdenum, nickel, niobium, zirconium, palladium, and germanium.

15. The system of claim 13, wherein the outer body has a venturi configuration and the inner body has a configuration that comprises fins and egg-shaped projections.

16. The system of claim 13, wherein the cyclonic separator:
directly throughputs the hydrogen gas through the cyclonic separator;
spins the oxygen gas and the water vapor towards the outside of the cyclonic separator;
and
exits the oxygen gas and the water vapor via an outlet positioned in a substantially perpendicular manner to the cyclonic separator.

17. The system of claim 13, wherein the at least one manifold comprises a hydrogen manifold and an oxygen manifold.

18. The system of claim 17, wherein the hydrogen manifold receives the hydrogen gas and the oxygen manifold receives the oxygen gas and the water vapor.

19. The system of claim 13, wherein the at least one fuel cell further comprises electrodes that serve as an output for the generated direct current electricity.

20. The system of claim 13, wherein the at least one fuel cell receives the hydrogen gas in the anode terminal.

21. The system of claim 13, wherein the at least one fuel cell receives the oxygen gas in the cathode terminal.

22. The system of claim 13, wherein the at least one fuel cell comprises a plurality of substrate loops that are attached to a central hydrogen fuel tube in a radial manner.

23. The system of claim 22, wherein the central hydrogen fuel tube comprises a cylindrical tube that extends the height of the fuel cell with perforations throughout the height to route gases to the plurality of substrate loops with the plurality of substrate loops comprising:

an interior that serves as an anode; and

an exterior that serves as a cathode.

24. The system of claim 23, wherein the central hydrogen fuel tube routes the hydrogen gas to the interior of the plurality of substrate loops and routes the oxygen gas to the exterior of the plurality of substrate loops.

25. The system of claim 23, wherein the anode comprises anode materials on one side of a semi-permeable polytetrafluoroethylene (PTFE) substrate with a substrate thickness ranging from about 0.2 millimeters to about 0.5 millimeters, and wherein the cathode comprises cathode materials on an opposing side of the substrate.

26. The system of claim 23, wherein the central hydrogen fuel tube and the plurality of substrate loops are placed in a sealed cylindrical housing.

27. The system of claim 13, wherein the at least one fuel cell generates the direct current electricity comprises:

a reaction of the hydrogen gas with the oxygen gas within the at least one fuel cell to produce a water vapor, a heat, and the direct current electricity; and

a bottom side port of the at least one fuel cell to remove the water vapor and a condensed water.

28. The system of claim 13, wherein each of the at least one fuel cell generates at least 500W of the direct current electricity at 12V.

29. The system of claim 13, further comprising:
an automated selector valve to enable a selection of at least one of:
a transmittal of the hydrogen gas and the oxygen gas to at least one of the fuel cell for production of direct current electricity; and
a transmittal of the hydrogen gas and the oxygen gas to a compressor to refuel a hydrogen vehicle.
30. A monitor and control system comprising:
a computing device comprising an internal controller and an external controller, wherein the computing device:
manages operating parameters; and
reports data characteristics upon a user request;
a receiver for the external controller to command the computing device; and
a housing unit that isolates the internal controller and the computing device from external interference.
31. The system of claim 30, wherein the housing unit comprises stainless-steel.
32. The system of claim 30, wherein the internal controller comprises:
a programmable logic controller comprising a supervisory control and data acquisition program that communicates wirelessly with the programmable logic controller;
a data logger; and
a plurality of sensors to monitor data characteristics.
33. The system of claim 32, wherein data characteristics comprise at least one of a temperature, a pressure, an electrical power usage, a gas flow, a gas analysis, an electrical power generation, an output voltage from at least one of a fuel cell, and an input current characteristic.
34. The system of claim 30, wherein the operating parameters comprise at least one of a gas flow, a temperature in a steam generation system, and a shutdown of operation.

35. The system of claim 30, wherein the external controller comprises a master control program with signals that operate via a triple encryption spread over a spectrum in an upper radio bandwidth, wherein the upper radio bandwidth comprises at least one of a 30 mHz band and a 300 mHz band.
36. The system of claim 30, wherein the receiver is positioned on an exterior of the housing unit and is optically coupled to the internal controller.

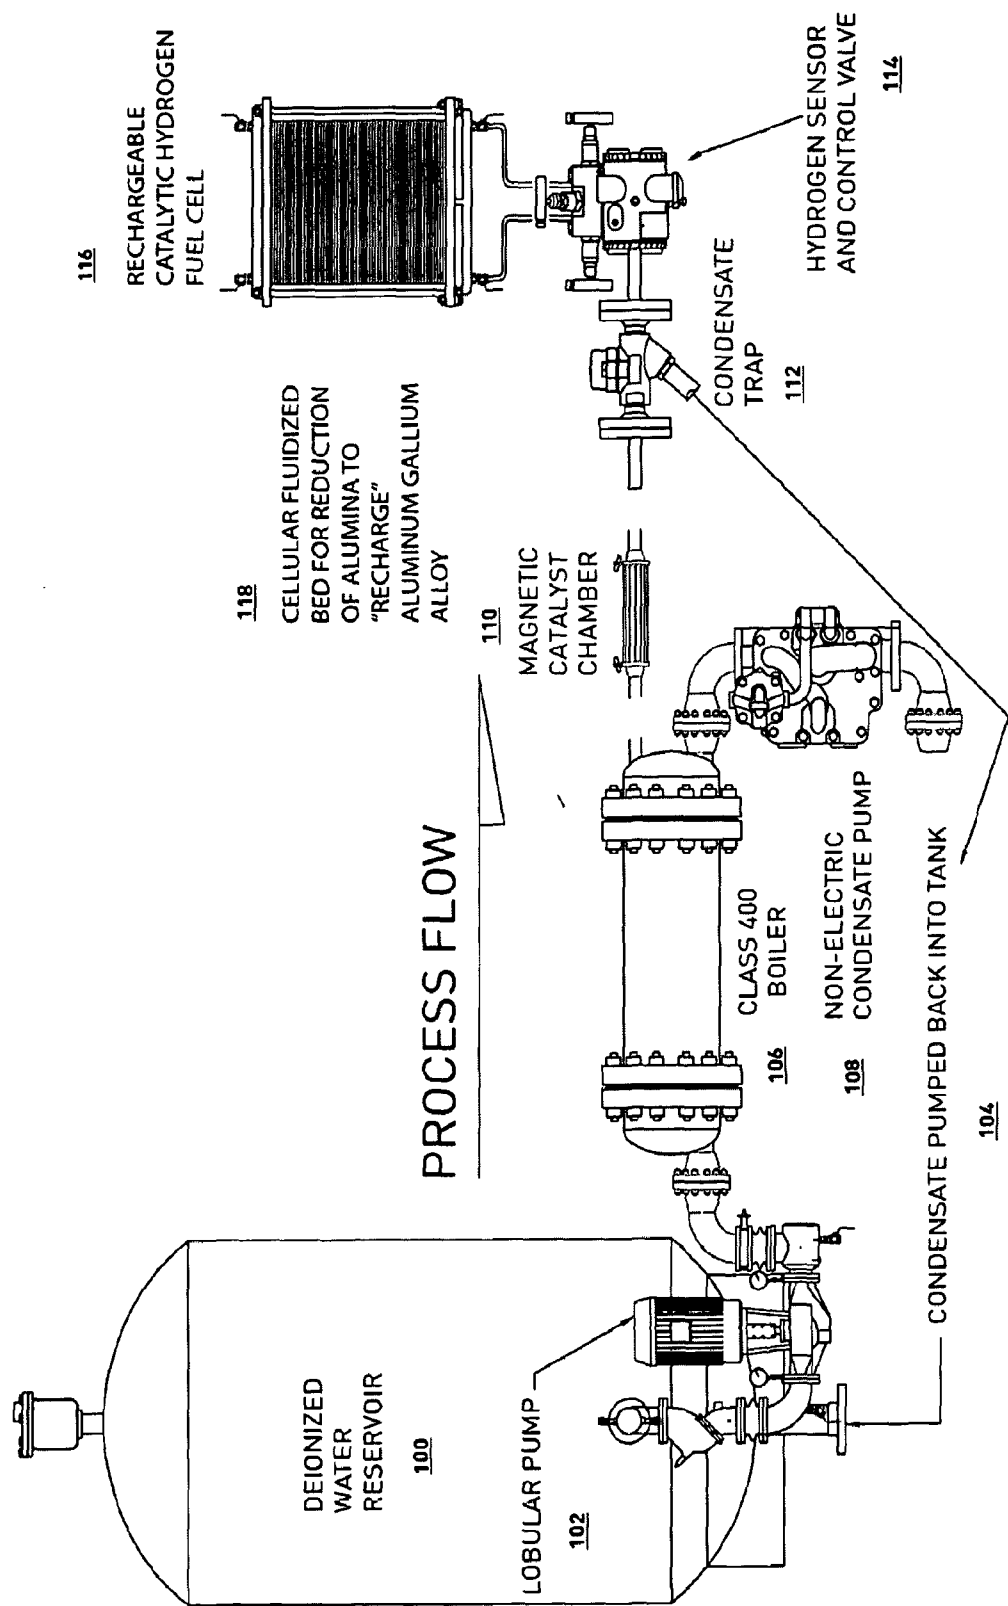


FIG. 1A



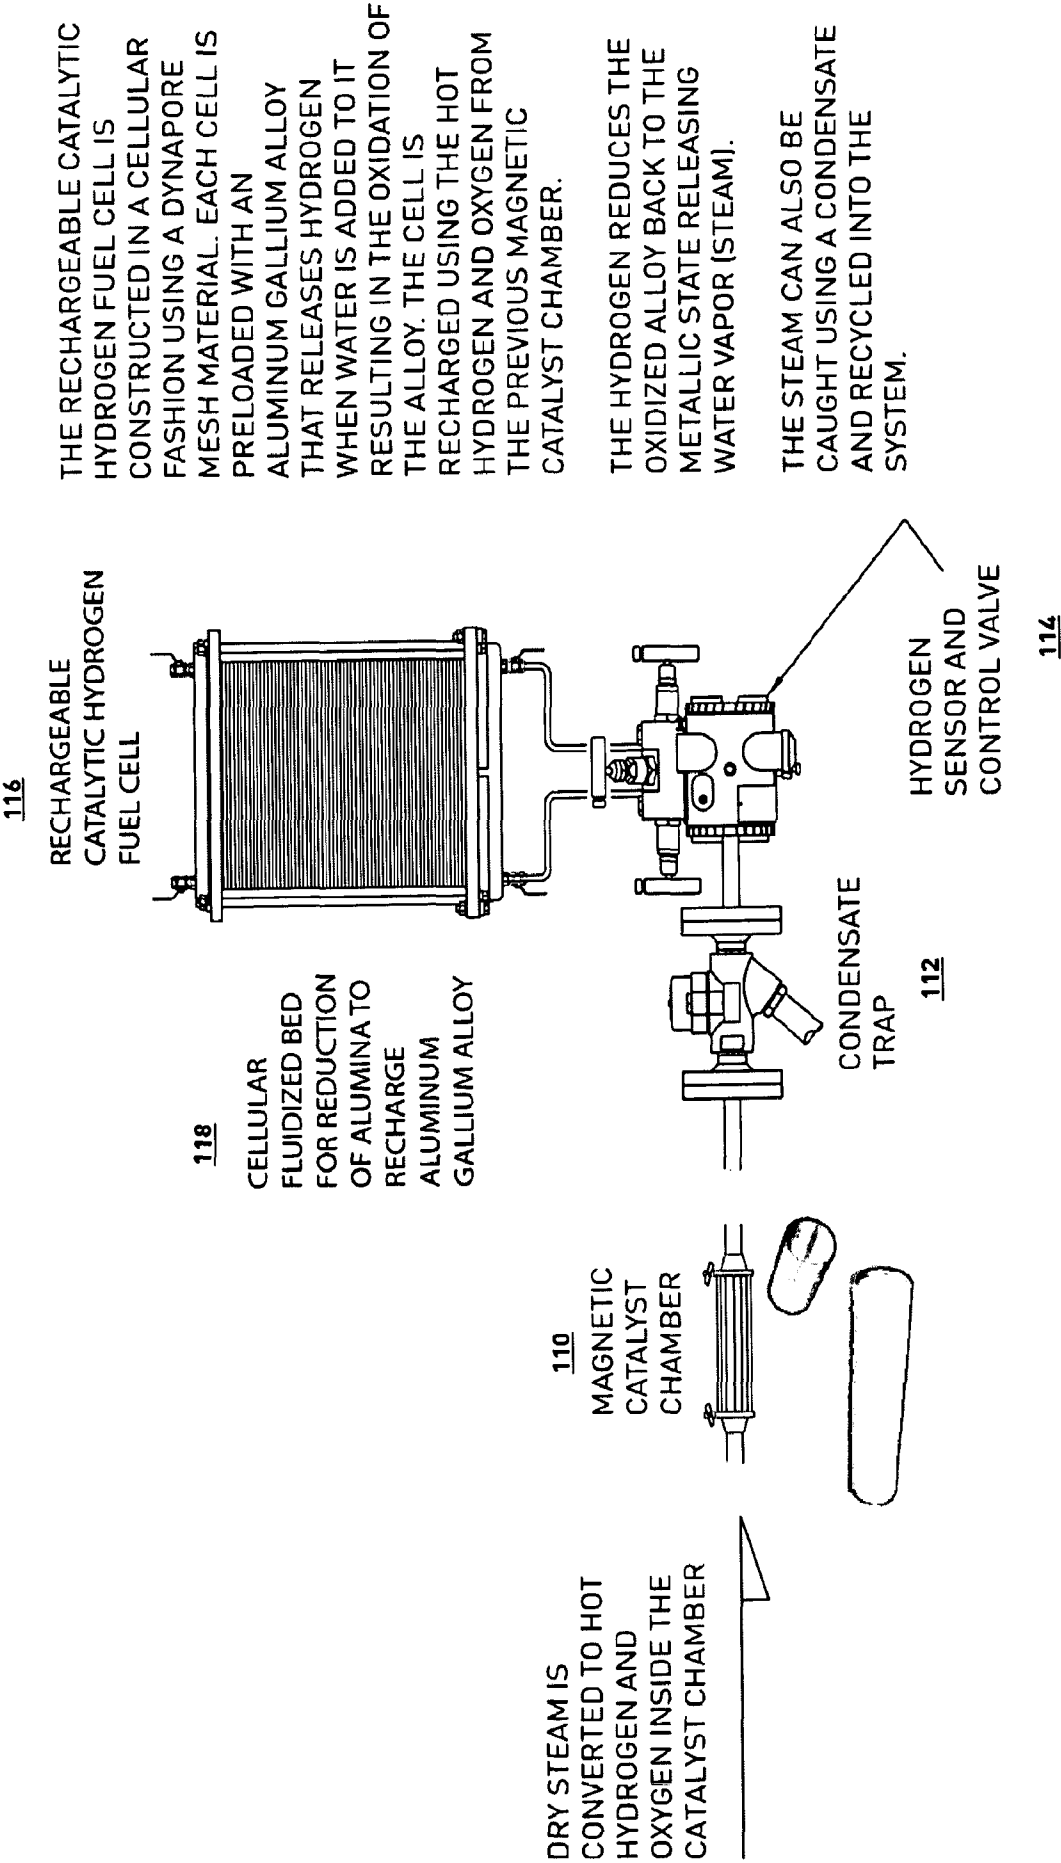


FIG. 1B

110 **MAGNETIC CATALYST CHAMBER**

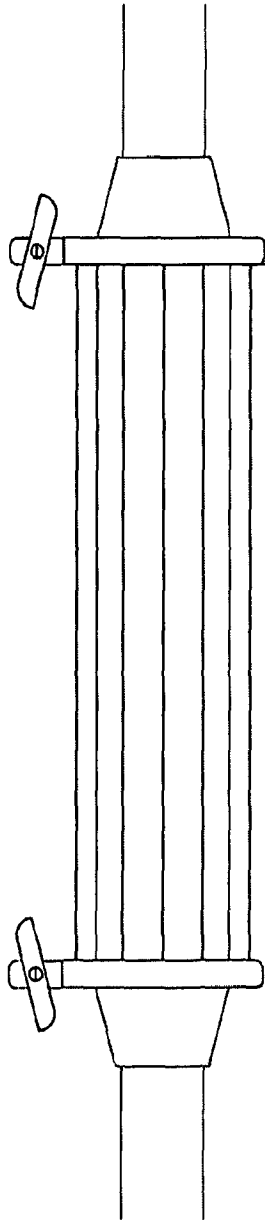

POWERFUL MAGNETS ARE ARRANGED AROUND THE CIRCUMFERENCE OF THE CHAMBER, AS SHOWN. IT IS CONSTRUCTED OF A NON-MAGNETIC MATERIAL

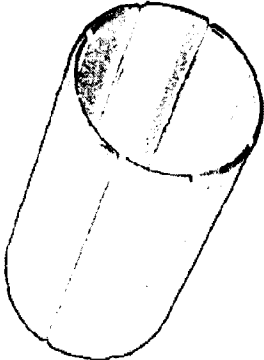

CATALYST FORMED INTO A SINTERED METAL PLUG HAVING STRAIGHT TUBULAR PATHS FOR THE STEAM TO TRAVEL.


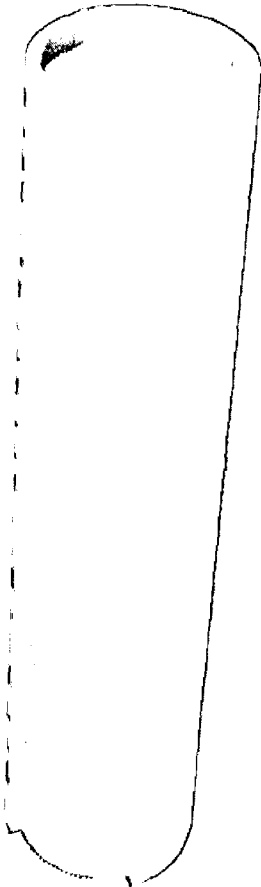


FIG. 1C


MAGNETIC CATALYST CHAMBER

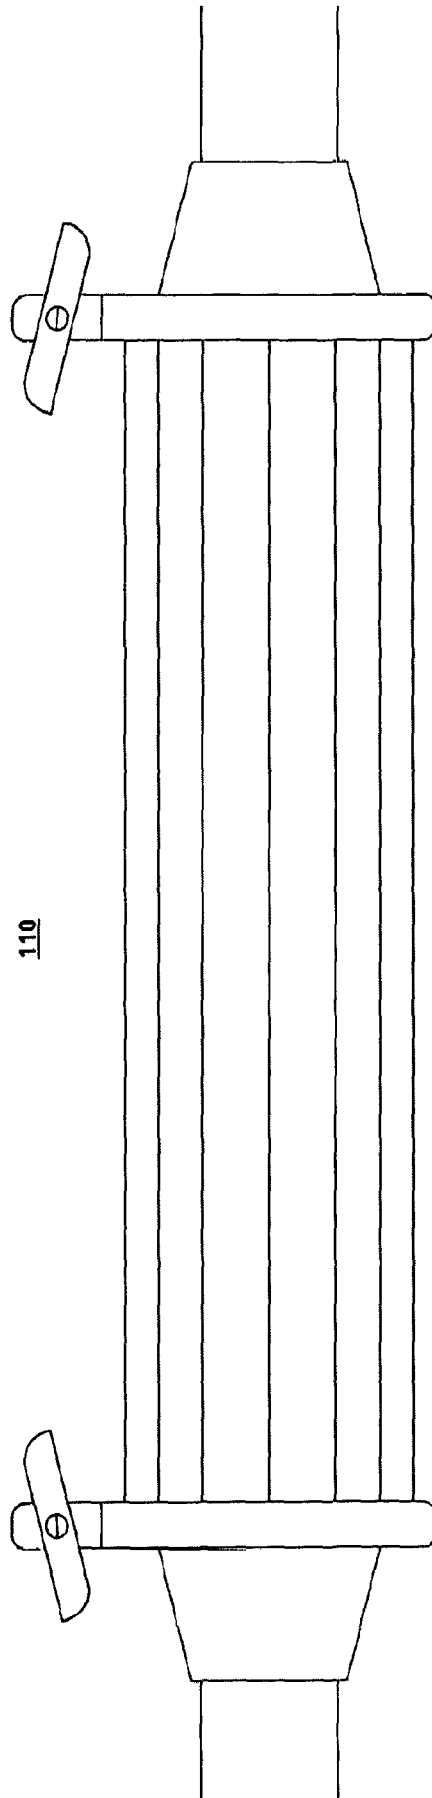

POWERFUL MAGNETS ARE ARRANGED AROUND THE CIRCUMFERENCE OF THE CHAMBER, AS SHOWN. IT IS CONSTRUCTED OF A NON-MAGNETIC MATERIAL.

FIG. 1D

RECHARGEABLE CATALYTIC HYDROGEN FUEL CELL

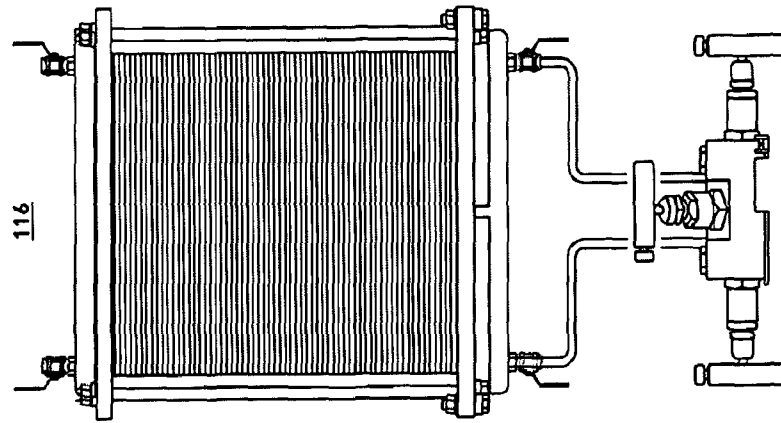

THE RECHARGEABLE CATALYTIC HYDROGEN FUEL CELL IS CONSTRUCTED IN A CELLULAR FASHION USING A DYNAPORE MESH MATERIAL. EACH CELL IS PRELOADED WITH AN ALUMINUM GALLIUM ALLOY THAT RELEASES HYDROGEN WHEN WATER IS ADDED TO IT RESULTING IN THE OXIDATION OF THE ALLOY. THE CELL IS RECHARGED USING THE HOT HYDROGEN AND OXYGEN FROM THE PREVIOUS MAGNETIC CATALYST CHAMBER.

THE HYDROGEN REDUCES THE OXIDIZED ALLOY BACK TO THE METALLIC STATE RELEASING WATER VAPOR (STEAM).

THE STEAM CAN ALSO BE CAUGHT USING A CONDENSATE AND RECYCLED INTO THE SYSTEM

FIG. 1E

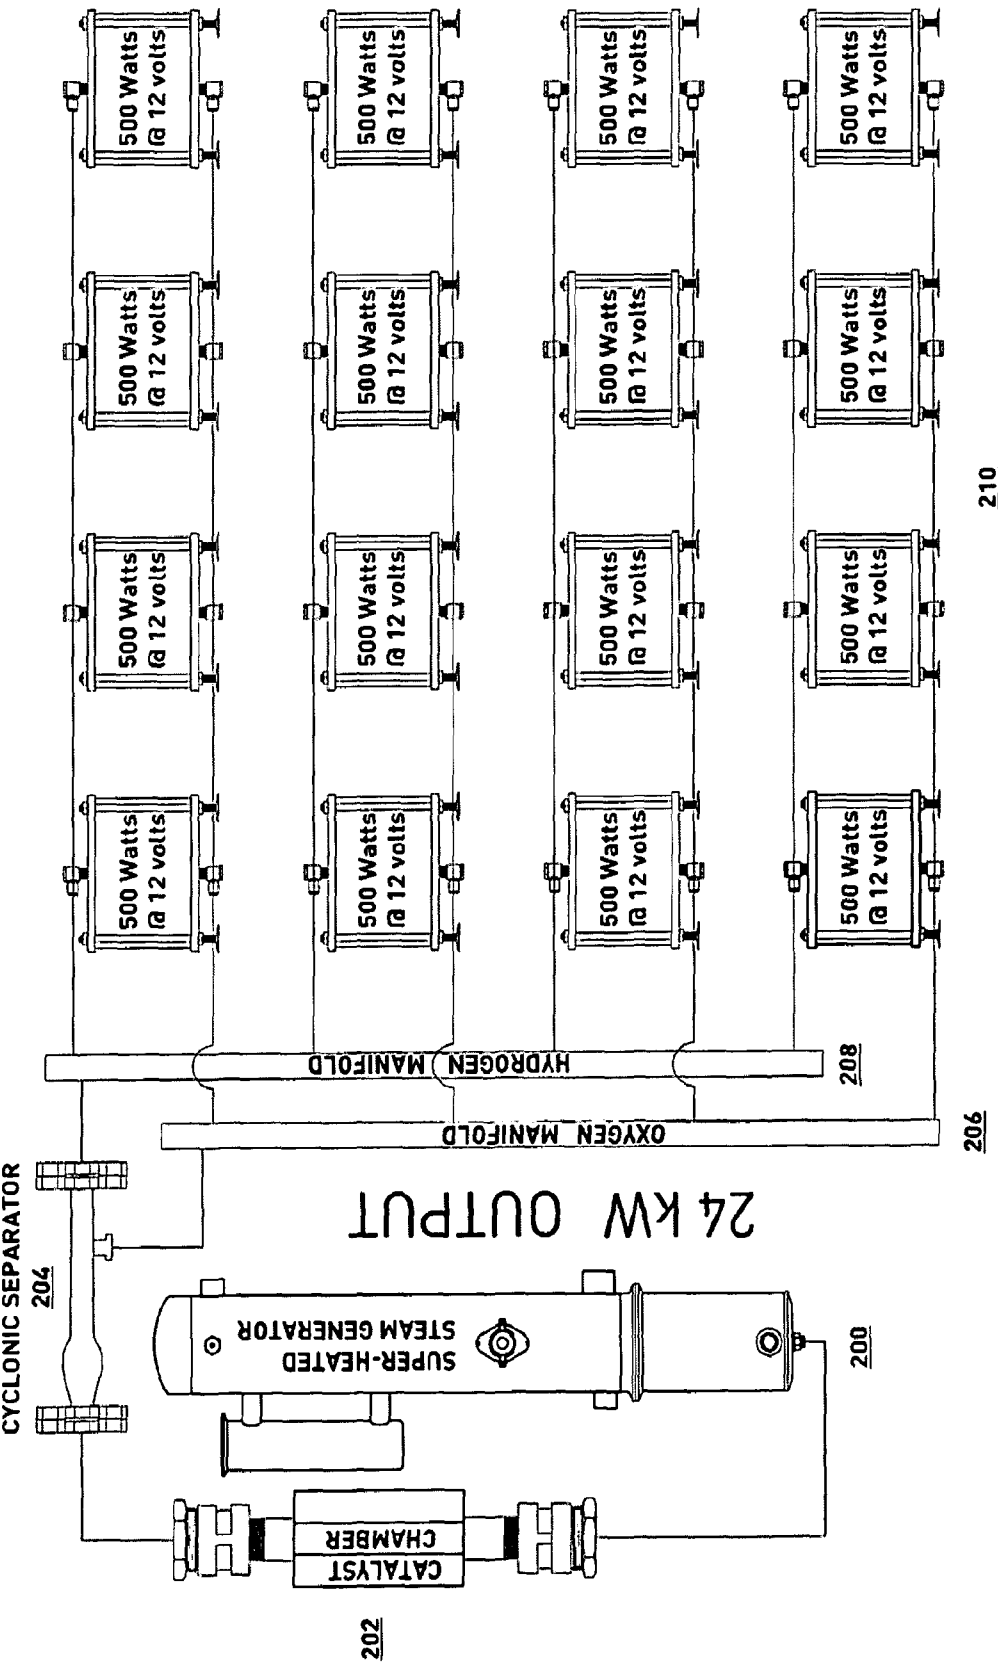


FIG. 2

SUPER-HEATED STEAM GENERATOR

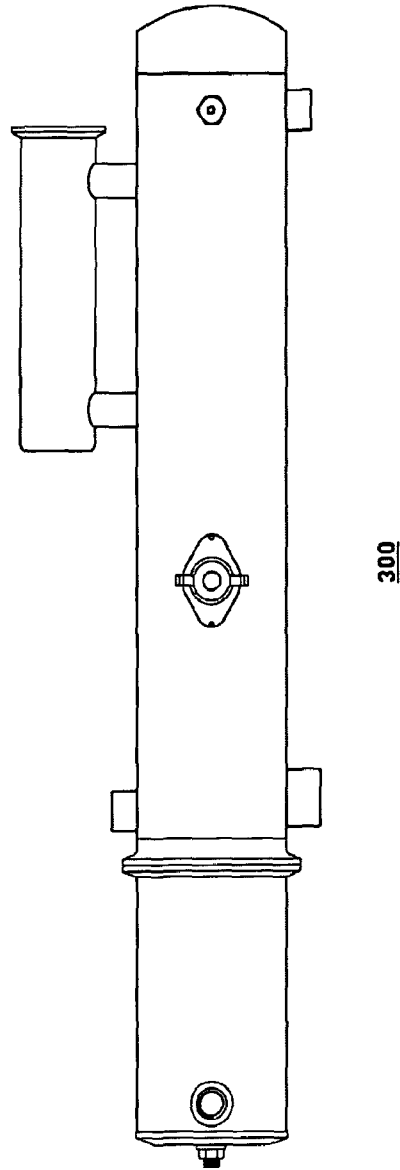


FIG. 3

MAGNETIC CATALYST CHAMBER

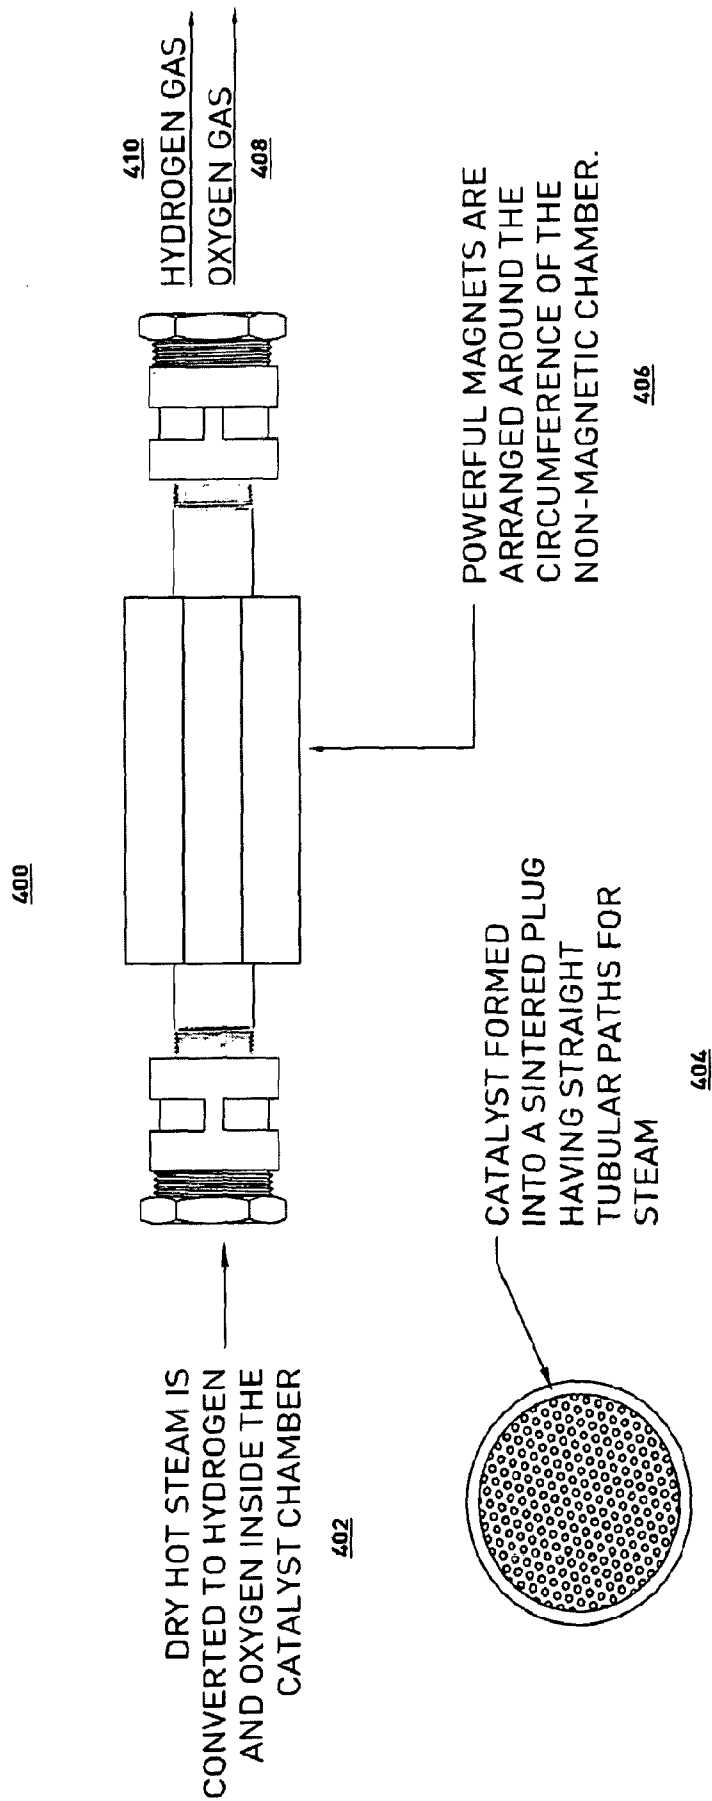


FIG. 4

CYCLONIC SEPARATOR

500

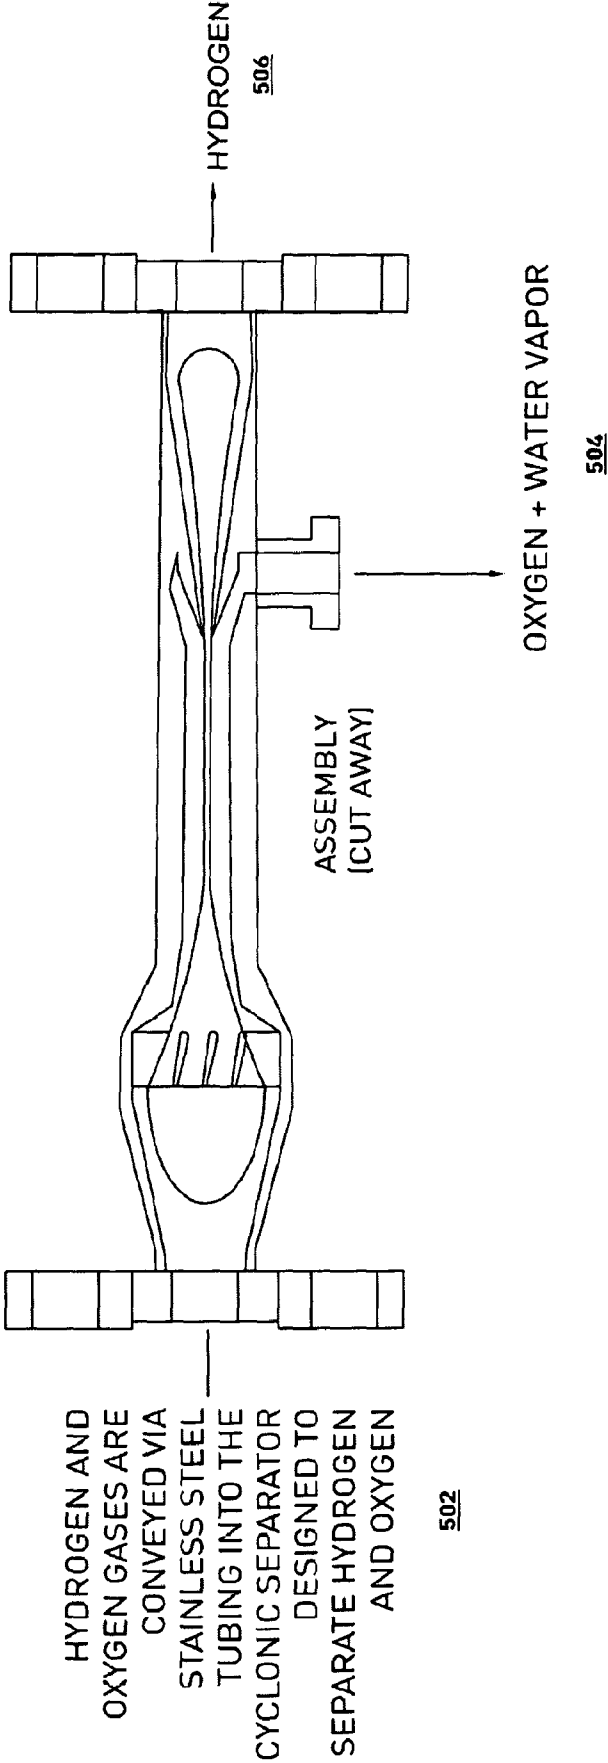


FIG. 5

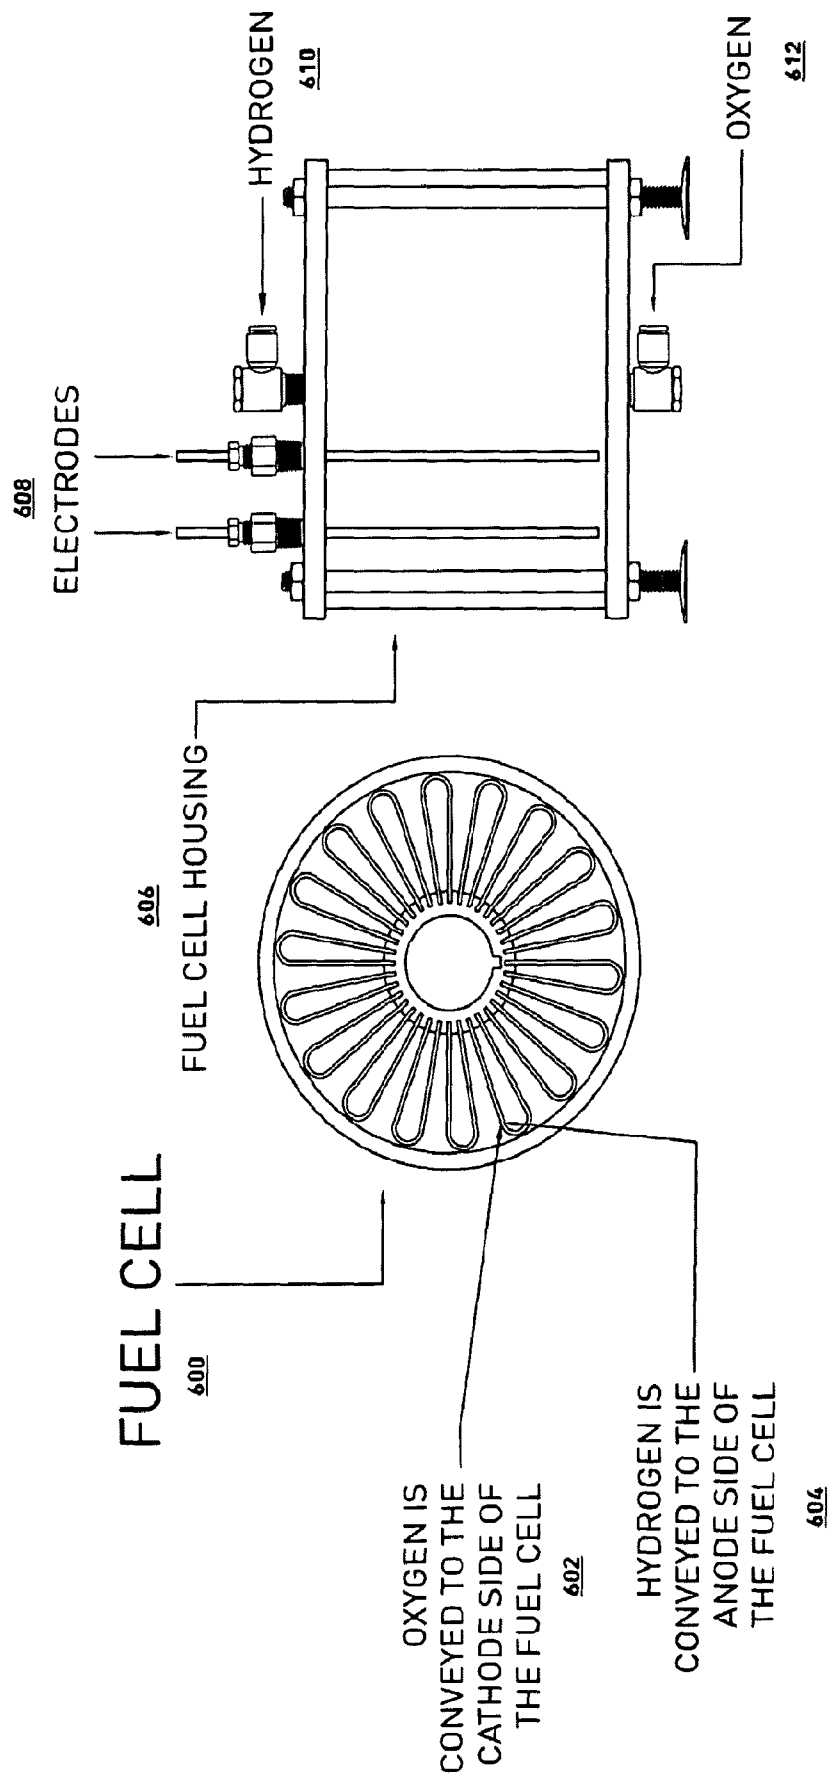
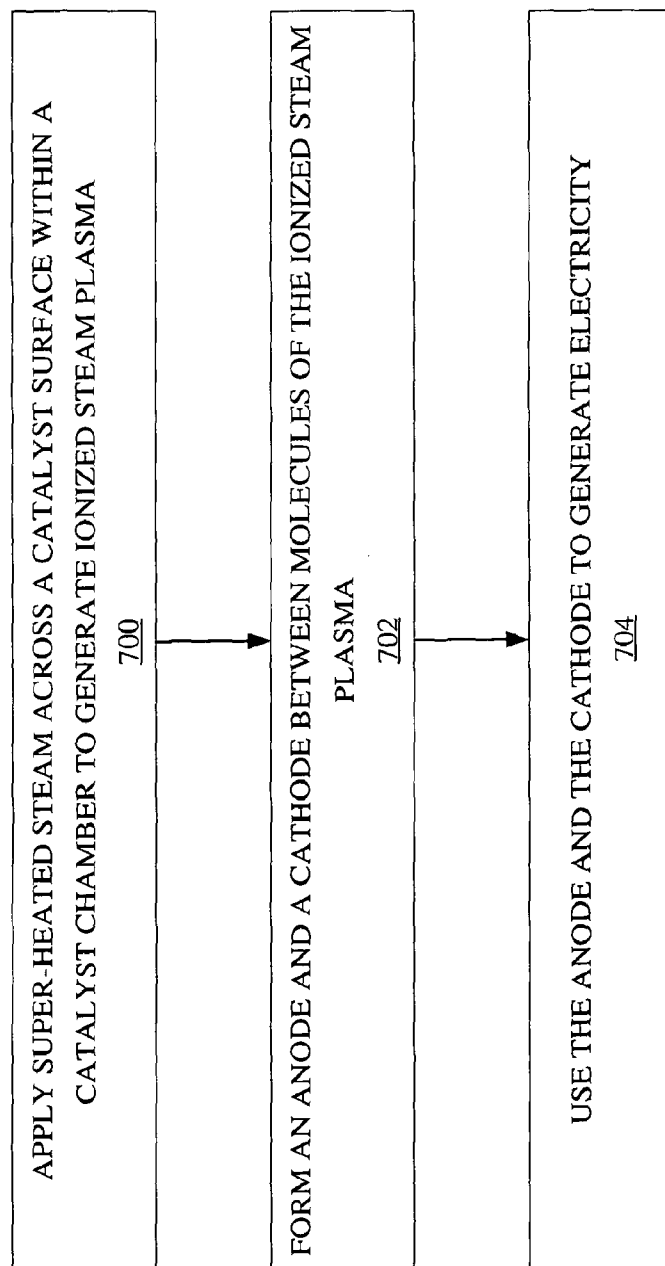
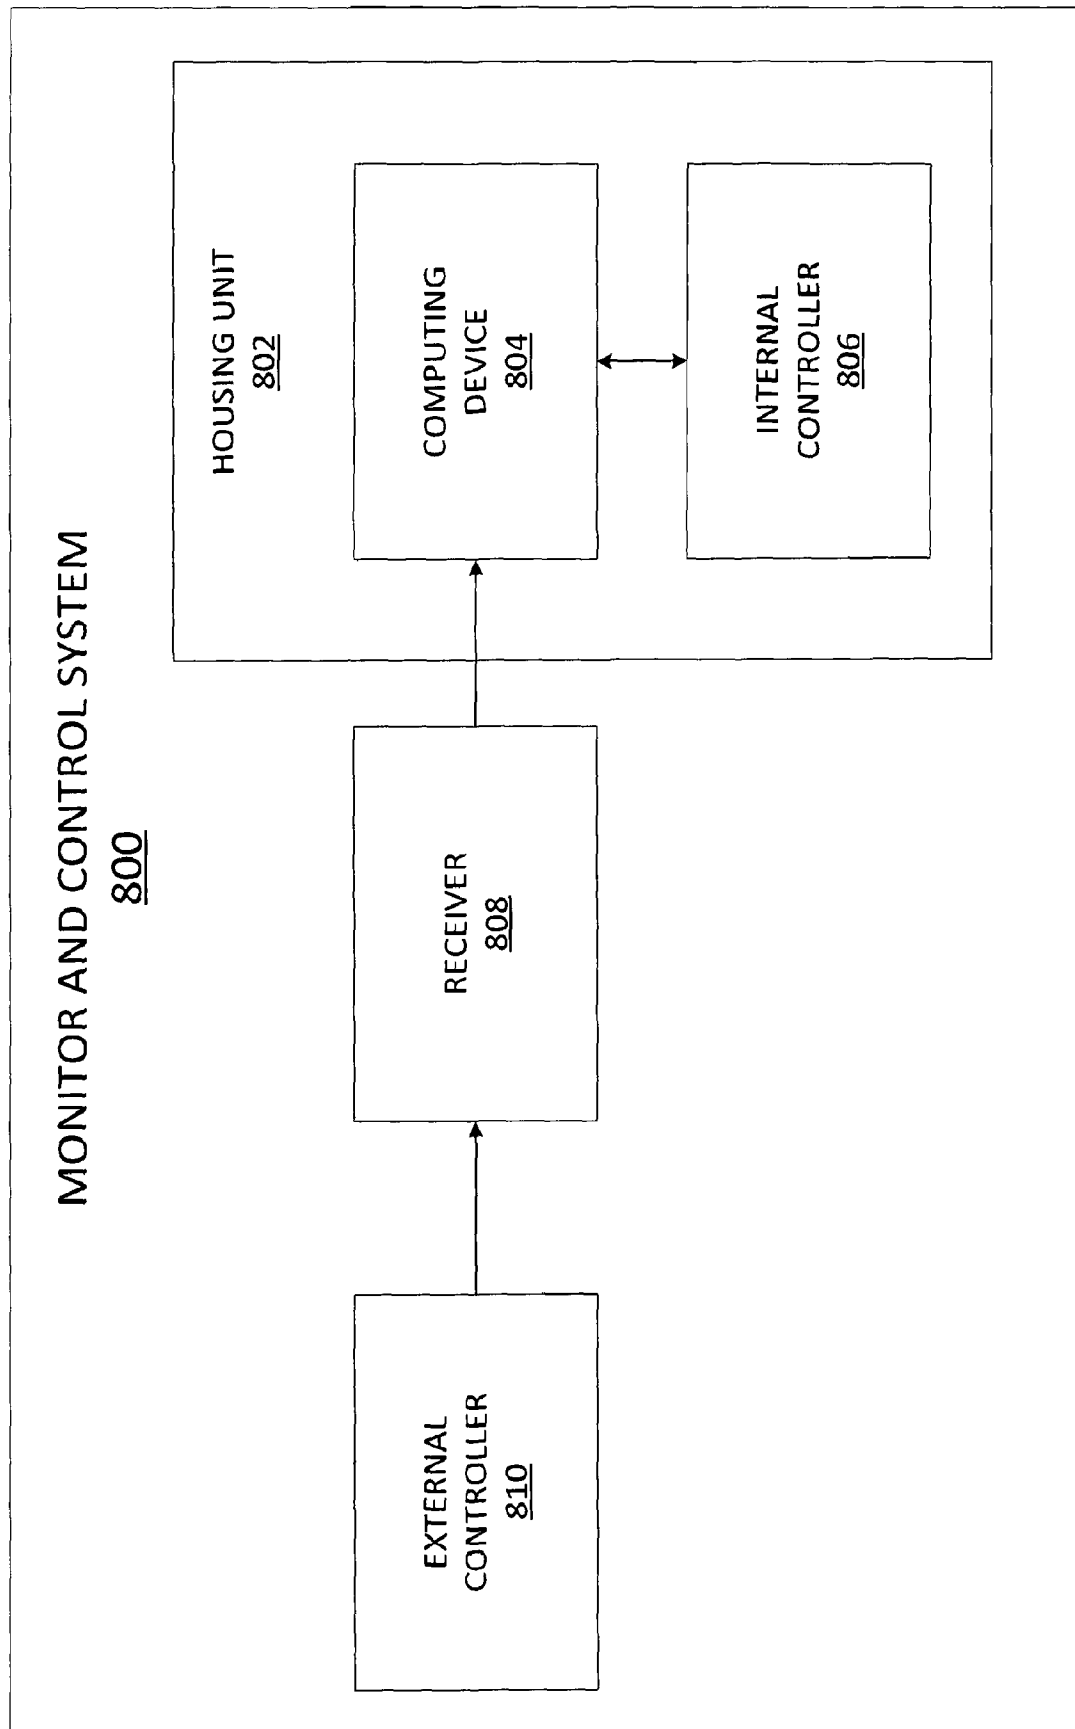


FIG. 6

**FIG. 7**

**FIG. 8**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 17/49610

A. CLASSIFICATION OF SUBJECT MATTER
 IPC(8) - H01M 4/86, H01M 8/10, H01M 4/88 (2017.01)
 CPC - H01M 4/88, H01M 8/1018, H01M 4/8657

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History Document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History Document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History Document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2014/0072836 A1 (MILLS) 13 March 2014 (13.03.2014); entire document	1-29
A	US 2008/0241614 A1 (MCCANNEY) 02 October 2008 (02.10.2008); entire document	1-29
A	US 2013/0084474 A1 (MILLS) 04 April 2013 (04.04.2013); entire document	1-29
A	US 2004/0095705 A1 (MILLS et al.) 20 May 2004 (20.05.2004); entire document	1-29
A	US 2015/0171455 A1 (BLACKLIGHT POWER INC.) 18 June 2015 (18.06.2015); entire document	1-29

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 October 2017

Date of mailing of the international search report

27 DEC 2017

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
 P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
 PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 17/49610

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

---please see supplemental box ---

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-29

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

Box III: lack of unity

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Group I: claims 1-29 directed to method and system comprising: applying super-heated steam across a catalyst surface within a catalyst chamber to generate ionized steam plasma; forming an anode and a cathode between molecules of the ionized steam plasma; and using the anode and the cathode to generate electricity.

Group II: claims 30-36 directed to monitor and control system comprising: a computing device comprising an internal controller and an external controller, wherein the computing device: manages operating parameters; and reports data characteristics upon a user request; a receiver for the external controller to command the computing device; and a housing unit that isolates the internal controller and the computing device from external interference.

The inventions listed as Groups I-II do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons:

Special technical features:

Group II requires a monitor and control system comprising: a computing device comprising an internal controller and an external controller, wherein the computing device: manages operating parameters; and reports data characteristics upon a user request; a receiver for the external controller to command the computing device; and a housing unit that isolates the internal controller and the computing device from external interference, not required by group I.

Group I requires a method and system comprising: applying super-heated steam across a catalyst surface within a catalyst chamber to generate ionized steam plasma; forming an anode and a cathode between molecules of the ionized steam plasma; and using the anode and the cathode to generate electricity, not required by group II

Common technical features:

There is no shared technical feature between groups I and II.

Groups I-II therefore, lack unity under PCT Rule 13 because they do not share common technical features.