

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2017254146 B2**

(54) Title
Electrically conductive fiber structure, electrode member, and method for manufacturing electrically conductive fiber structure

(51) International Patent Classification(s)
D06M 15/63 (2006.01) **D06M 15/233** (2006.01)
A61B 5/0408 (2006.01) **D06M 23/08** (2006.01)
A61B 5/0478 (2006.01) **H01B 1/12** (2006.01)
D06M 15/227 (2006.01) **H01B 1/20** (2006.01)

(21) Application No: **2017254146** (22) Date of Filing: **2017.03.30**

(87) WIPO No: **WO17/183463**

(30) Priority Data

(31)	Number	(32)	Date	(33)	Country
	2016-083183		2016.04.18		JP

(43) Publication Date: **2017.10.26**

(44) Accepted Journal Date: **2020.04.30**

(71) Applicant(s)
Toray Industries, Inc.;Nagase ChemteX Corporation

(72) Inventor(s)
Nagai, Noriko;Takeda, Keiji;Kawakami, Jun;Nagata, Hiroshi;Ohori, Tatsuya

(74) Agent / Attorney
Davies Collison Cave Pty Ltd, Level 15 1 Nicholson Street, MELBOURNE, VIC, 3000, AU

(56) Related Art
WO 2015/115440 A1
JP 2015-140493 A

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局

(43) 国際公開日
2017年10月26日(26.10.2017)



(10) 国際公開番号

WO 2017/183463 A1

(51) 国際特許分類:

D06M 15/63 (2006.01) *D06M 15/233* (2006.01)
A61B 5/0408 (2006.01) *D06M 23/08* (2006.01)
A61B 5/0478 (2006.01) *H01B 1/12* (2006.01)
D06M 15/227 (2006.01) *H01B 1/20* (2006.01)

(21) 国際出願番号: PCT/JP2017/014300

(22) 国際出願日: 2017年3月30日(30.03.2017)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:
特願 2016-083183 2016年4月18日(18.04.2016) JP

(71) 出願人: 東レ株式会社 (TORAY INDUSTRIES, INC.) [JP/JP]; 〒1038666 東京都中央区日本橋室町2丁目1番1号 Tokyo (JP). ナガセケムテックス株式会社 (NAGASE CHEMTEX CORPORATION) [JP/JP]; 〒5508668 大阪府大阪市西区新町1丁目1-17 Osaka (JP).

(72) 発明者: 長井 典子 (NAGAI, Noriko); 〒5202141 滋賀県大津市大江1丁目1番1号 東レ株式会社 瀬田工場内 Shiga (JP). 竹田 恵司 (TAKEDA, Keiji); 〒5202141 滋賀県大津市大江1丁目1番1号 東レ株式会社 瀬田工場内 Shiga (JP). 川上 潤 (KAWAKAMI, Jun); 〒5202141 滋賀県大津市大江1丁目1番1号 東レ株式会社 瀬田工場内 Shiga (JP). 永田 裕 (NAGATA, Hiroshi); 〒6794124 兵庫県たつの市龍野町中井23

6 ナガセケムテックス株式会社内 Hyogo (JP). 大堀 達也 (OHORI, Tatsuya); 〒6794124 兵庫県たつの市龍野町中井236 ナガセケムテックス株式会社内 Hyogo (JP).

(74) 代理人: 特許業務法人酒井国際特許事務所 (SAKAI INTERNATIONAL PATENT OFFICE); 1000013 東京都千代田区霞が関3丁目8番1号 虎の門三井ビルディング Tokyo (JP).

(81) 指定国(表示のない限り、全ての種類の国内保護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) 指定国(表示のない限り、全ての種類の広域保護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), ユーラシア (AM, AZ, BY, KG, KZ, RU, TJ, TM), ヨーロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT,

(54) Title: ELECTRICALLY CONDUCTIVE FIBER STRUCTURE, ELECTRODE MEMBER, AND METHOD FOR MANUFACTURING ELECTRICALLY CONDUCTIVE FIBER STRUCTURE

(54) 発明の名称: 導電性繊維構造物、電極部材および導電性繊維構造物の製造方法

(57) Abstract: Provided is an electrically conductive fiber structure that is capable of maintaining high electric conductivity even after repeated laundering and can be used for biosignal-acquiring electrodes. This electrically conductive fiber structure is configured from a woven or knitted fabric, etc. comprising an electrically conductive polymer. The electrically conductive fiber structure is characterized in that an electrically conductive resin comprising the electrically conductive polymer is loaded in gaps between single fibers configuring the fiber structure and when a thickness direction cross-section of the fiber structure is examined, the area ratio of the electrically conductive resin present in the region that is 15-30 μm from the surface layer is at least 15%.

(57) 要約: 繰り返し洗濯後も高い導電性を保持でき、生体信号取得電極にも適用が可能な導電性繊維構造物を提供する。本発明の導電性繊維構造物は、導電性高分子を含む織編物等から構成される。前記導電性繊維構造物は、前記導電性高分子を含む導電性樹脂が繊維構造物を構成する単繊維と単繊維との間隙に担持され、前記繊維構造物の厚み方向の断面を観察したときに、表層から15～30 μmの領域に存在する前記導電性樹脂の面積比率が15%以上であることを特徴とする。

LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS,
SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

添付公開書類：

- 一 国際調査報告（条約第21条(3)）

Technical Field

[0001] The present invention relates to an electric conductive fiber structure in which a fiber structure
5 contains an electric conductive resin containing electric conductive polymer(s). Specifically, the present invention relates to an electric conductive fiber structure that can maintain high electric conductivity even after repeated washing and can even be used for bioelectrodes, an
10 electrode member, and a method for producing an electric conductive fiber structure.

Background

[0002] Electric conductive fibers have conventionally been known such as fiber of which surfaces coated with
15 metals such as copper, fibers which carbon or metallic thin wires is woven in, and electric conductive fibers obtained by shaping an electric conductive polymer in string form. These electric conductive fibers are used as various types of bioelectrodes used for measuring bioelectric signals
20 such as brain waves, electrocardiograms, and electromyograms of humans and animals.

[0003] Electric conductive materials such as metals and carbon used in conventional technologies are hydrophobic and hard and thus have a problem in that they are low in
25 adaptability to a use in contact with body surfaces of living bodies which are rich in water and flexible. When bioelectrodes are installed on a body surface, some bioelectrodes formed of a hard, hydrophobic material have difficulty in being brought into intimate contact with the
30 body surface to obtain direct continuity, and therefore electric conductive paste (jelly) that electrically connecting the bioelectrodes and the body surface is required to be used, for example.

[0004] It is considered that textile-shaped electrodes having electric conductivity are effective as electrodes to be directly attached to body surfaces of living bodies without using any electric conductive paste or the like,
5 and there have been various developments concerned with textile-shaped electrodes. A development is improving electric conductivity by combining a fabric electrode and a water impermeable electric conductive material to reduce the evaporation of water from the fabric electrode.

10 [0005] Other developments are producing electric conductive polymer fibers by impregnating and/or attaching an aqueous solution of (3,4-ethylenedioxythiophene)-poly(styrene sulfonic acid) (PEDOT-PSS) as an electric conductive polymer particularly excellent in electric
15 conductivity and hydrophilicity as a material having good adaptability to living bodies into/to fibers and using these electric conductive polymer fibers as bioelectrodes and intracorporeal embedded type electrodes.

[0006] To create practical electrodes using a textile
20 base, further developments are related to electrode member and a device that can maintain high electric conductivity even after repeated washing and can even be used for bioelectrodes.

[0007] However, the electrode part of some fabric
25 electrodes is silicone rubber blended with carbon black or silver powder as an electric conductive material and has a problem in that when it is brought into intimate contact with a body surface for a long time, swelling, rashes, or the like occur in living bodies, and it cannot be worn
30 comfortably.

The technique of producing electric conductive polymer fibers by impregnating and/or attaching an aqueous solution of PEDOT-PSS has a problem in that it is poor in practical

durability such as washing durability as textile electrodes.

The technique of an electrode member and a device that can maintain high electric conductivity even after repeated washing does not take anything about the particle diameter of the used electric conductive polymer such as PEDOT-PSS into consideration, and PEDOT-PSS having a large particle diameter is filled in gaps between single fibers of nanofibers in a small amount and is supported on the surface of single fibers in a large amount. Consequently, the technique cannot sufficiently use the characteristics of the gaps between single fibers of the nanofibers and is insufficient in practical durability such as washing durability as textile electrodes.

[0008] It is desired to address or ameliorate one or more disadvantages or limitations associated with the prior art, or at least to provide a useful alternative.

Summary

[0009] An electric conductive fiber structure according to at least some embodiments of the present invention includes an electric conductive resin containing an electric conductive polymer, the electric conductive resin being filled in gaps between single fibers included in a fiber structure, the electric conductive fiber structure having 15% or more area ratio of the electric conductive resin existence in an area of 15 to 30 μm from a surface when a cross section in a thickness direction of the fiber structure is observed.

[0010] In the electric conductive fiber structure according to at least some embodiments of the present invention, the electric conductive resin further contains binder resin(s).

In the electric conductive fiber structure according to at least some embodiments of the present invention, the binder resin is an olefinic resin(s).

5 In the electric conductive fiber structure according to at least some embodiments of the present invention, main components of the electric conductive polymer are poly(3,4-ethylenedioxythiophene) and polystyrene sulfonic acid.

[0011] The electric conductive fiber structure according to at least some embodiments of the present invention has
10 antibacterial activity.

The electric conductive fiber structure according to at least some embodiments of the present invention has an antibacterial activity value of 3 or more by JIS L 1902 (2015 Edition) Bacterial liquid absorption method.

15 [0012] The electric conductive fiber structure according to at least some embodiments of the present invention includes single fiber(s) of which diameter(s) is/are 10 nm or more and 5,000 nm or less in a part or all.

[0013] The electric conductive fiber structure according to at least some embodiments of the present invention has a
20 surface resistance of $1 \times 10^4 \Omega$ or less after repeating washing 30 times by JIS L 0217 (1995 Edition) 103 method.

[0014] An electrode member according to at least some embodiments of the present invention includes any one of
25 the above-described electric conductive fiber structures for use in acquisition of a biosignal.

A method for producing an electric conductive fiber structure according to at least some embodiments of the present invention includes a process that an electric
30 conductive resin containing an electric conductive polymer and having a dispersion particle diameter of less than 200 nm is filled in gaps between single fibers included in a fiber structure.

In the method for producing an electric conductive fiber structure according to at least some embodiments of the present invention, the electric conductive resin contains a mixture of the electric conductive polymer(s) and binder resin(s) as a main component.

[0015] A method for producing an electric conductive fiber structure according to at least some embodiments of the present invention includes a process that an electric conductive resin containing an electric conductive polymer and having an average particle diameter of 20 nm or less is filled in gaps between single fibers included in a fiber structure.

In the method for producing an electric conductive fiber structure according to at least some embodiments of the present invention, the electric conductive resin contains a mixture of the electric conductive polymer(s) and binder resin(s) as a main component.

Advantageous Effects

[0016] At least some embodiments of the present invention can achieve an electric conductive fiber structure that has high performance electric conductivity and flexibility using a textile base and is excellent in washing durability and can thus be used suitably as a textile electrode member acquiring biosignals that is difficult to be developed by conventional electrodes.

[0016a] Some embodiments of the present invention may provide an electric conductive fiber structure that has electric conductivity with high practical characteristics, maintains high washing durability and high electric conductivity, and can thus even be used for bioelectrodes by a combination of a fiber structure and an electric conductive resin, an electrode member, and a method for producing an electric conductive fiber structure.

Brief Description of Drawings

[0017] Preferred embodiments of the present invention are hereinafter described, by way of example only, with reference to the accompanying drawings, in which:

- 5 [0017a] FIG. 1 is a photograph of an electric conductive fiber structure of an embodiment of the present invention observed with a scanning probe microscope.

Detailed Description

- 10 [0018] The following describes an embodiment of an electric conductive fiber structure according to the present invention in detail. This embodiment does not limit the present invention.

[0019] <<Electric Conductive Fiber Structure>>

- 15 The electric conductive fiber structure of an embodiment of the present invention is containing an electric conductive resin containing (A) electric conductive polymer filled in gaps between single fibers included in a fiber structure and has an area ratio of the electric conductive resin existence in an area of 15 to 30
- 20 μm from a surface of 15% or more when a cross section in a thickness direction of the fiber structure is observed in view of electric conductivity, flexibility, and high washing durability. In other words, in embodiments of the present invention, in which the electric conductive resin
- 25 is filled in gaps between single fibers, the electric conductive resin is caused to be impregnated into a deep part, whereby an electric conductive fiber structure having high-performance electric conductivity and flexibility and excellent in washing durability can be obtained. More
- 30 preferred is that the area ratio is 20% or more, thereby giving excellent durability against repeated washing. The upper limit of the area ratio is preferably 30% in view of flexibility.

[0020] <(A) Electric Conductive Polymer>

(A) electric conductive polymer is a blend for imparting electric conductivity to the electric conductive fiber structure.

5 (A) electric conductive polymer is not limited to a particular polymer, and known electric conductive polymers can be used; specific examples thereof include polythiophene, polypyrrole, polyaniline, polyacetylene, polyphenylenevinylene, polynaphthalene, and derivatives
10 thereof. These may be used alone, or two or more of them may be used in combination. Among them, preferred is an electric conductive polymer containing at least one thiophene ring within the molecule in view of the easiness of forming a highly electric conductive molecule by
15 containing a thiophene ring within the molecule. (A) electric conductive polymer may form a complex with a dopant such as a polyanion.

[0021] Among the electric conductive polymer containing at least one thiophene ring within the molecule, poly(3,4-
20 disubstituted thiophene) is more preferred in view of its extreme excellence in electric conductivity and chemical stability. Further, poly(3,4-disubstituted thiophene) is particularly preferably poly(3,4-dialkoxythiophene) or poly(3,4-alkylenedioxythiophene) and most preferably
25 poly(3,4-ethylenedioxythiophene). When the electric conductive polymer is poly(3,4-disubstituted thiophene) or a complex of poly(3,4-disubstituted thiophene) and a polyanion (a dopant), an electric conductive composite material can be formed at low temperatures in a short time,
30 which also provides excellent productivity. The polyanion refers to a dopant of the electric conductive polymer.

[0022] The dopant, which is not limited to a particular compound, is preferably a polyanion. Examples of the

polyanion include, but are not limited to, carboxylic acid polymers (polyacrylic acid, polymaleic acid, and polymethacrylic acid, for example) and sulfonic acid polymers (polystyrene sulfonic acid, polyvinyl sulfonic acid, and polyisoprene sulfonic acid, for example). These carboxylic acid polymers and sulfonic acid polymers may be copolymers of vinylcarboxylic acids and vinylsulfonic acids and other polymerizable monomers such as acrylates and aromatic vinyl compounds such as styrene and vinyl naphthalene. Among these, polystyrene sulfonic acid is particularly preferred.

[0023] <(B) Binder Resin>

The electric conductive resin preferably further contains a binder resin and is more preferably an electric conductive resin with a mixture of (A) electric conductive polymer and (B) binder resin as a main component.

(B) binder resin contained in the electric conductive polymer is preferably at least one selected from the group consisting of olefinic resins, polyester-based resins, polyurethane, epoxy resins, and acrylic resins. Among them, (B) binder resin is most preferably (B1) olefinic resin in view of bringing blends contained in the electric conductive resin in the electric conductive fiber structure into intimate contact with each other and imparting electric conductivity to the fiber structure more steadily.

<(B1) Olefinic Resin>

(B1) olefinic resin is added in order to bring blends contained in the electric conductive resin in the electric conductive fiber structure into intimate contact with each other and to impart electric conductivity to the fiber structure more steadily. (B1) olefinic resin is preferably (B2) nonpolar olefinic resin in view of the flexibility and washing durability of the obtained fiber structure. In

some embodiments of the present invention, "nonpolar" means having an SP value of 6 to less than 10 and preferably 7 to 9.

5 [0024] (B2) nonpolar olefinic resin is not limited to a particular resin so long as its SP values is 6 to less than 10. (B2) olefinic resin may be used alone, or two or more of them may be used in combination.

[0025] Examples of (B1) olefinic resin include polyethylene, polypropylene, cycloolefin polymers (cyclic
10 polyolefins), and polymers obtained by modifying them. For the electric conductive fiber structure, these may be used as (B1) olefinic resin, or olefin-modified products of polyvinyl chloride, polystyrene, or the like may be used as (B1) olefinic resin. These may be used alone, or two or
15 more of them may be used in combination.

[0026] Examples of commercially available products that can be used as (B1) olefinic resin include Hardlen (manufactured by Toyobo Co., Ltd.), Aptolok (manufactured by Mitsubishi Chemical Corporation), and Arrowbase
20 (manufactured by Unitika Ltd.).

[0027] In the electric conductive fiber structure of at least some embodiments of the present invention, the content of (B1) olefinic resin, which is not limited to a particular content, is preferably 0.1 to 1,000 parts by
25 mass and more preferably 5 to 500 parts by mass relative to 100 parts by mass of a solid content of (A) electric conductive polymer. If the content is less than 0.1 part by mass, the strength of the obtained fiber structure may be low; if the content exceeds 1,000 parts by mass, the
30 content of (A) electric conductive polymer in the electric conductive fiber structure is relatively low, and when used as an electrode member, sufficient electric conductivity cannot necessarily be ensured. When the strength of the

fiber structure is low, washing durability as a textile electrode may be poor.

[0028] In the electric conductive fiber structure of at least some embodiments of the present invention, the electric conductive resin may contain other components apart from (A) electric conductive polymer and (B) binder resin. Examples of the other components include (C) electric conductivity improving agent, (D) flexibility imparting agent, (E) surface active agent and/or leveling agent, cross-linking agents, catalysts, and defoaming agents.

[0029] <(C) Electric Conductivity Improving agent>

(C) electric conductivity improving agent may be added to the electric conductive resin. Examples of (C) electric conductivity improving agent include, but are not limited to, compounds having a boiling point of 100°C or more and having two or more hydroxy groups within the molecule, compounds having a boiling point of 100°C or more and having at least one sulfinyl group within the molecule, compounds having a boiling point of 60°C or more and having at least one carbonyl group within the molecule, and compounds having a boiling point of 100°C or more and having at least one amide group within the molecule. These (C) electric conductivity improving agent may be used alone, or two or more of them may be used in combination.

[0030] Examples of the compounds having a boiling point of 100°C or more and having two or more hydroxy groups within the molecule include ethylene glycol, diethylene glycol, propylene glycol, trimethylene glycol, β -thiodiglycol, triethylene glycol, tripropylene glycol, 1,4-butanediol, 1,5-pentanediol, 1,3-butanediol, 1,6-hexanediol, neopentyl glycol, catechol, cyclohexanediol,

cyclohexanedimethanol, glycerin, erythritol, inmatol, lactitol, maltitol, mannitol, sorbitol, xylitol, and sucrose. These may be used alone, or two or more of them may be used in combination.

5 [0031] Examples of the compounds having a boiling point of 100°C or more and having at least one sulfinyl group within the molecule include dimethylsulfoxide.

[0032] Examples of the compounds having a boiling point of 60°C or more and having at least one carbonyl group
10 within the molecule include acrylic acid, methacrylic acid, methanoic acid, ethanoic acid, propanoic acid, butanoic acid, pentanoic acid, hexanoic acid, octanoic acid, decanoic acid, dodecanoic acid, benzoic acid, p-toluic acid, p-chlorobenzoic acid, p-nitrobenzoic acid, 1-naphthoic acid,
15 2-naphthoic acid, phthalic acid, isophthalic acid, oxalic acid, malonic acid, succinic acid, adipic acid, maleic acid, and fumaric acid. These may be used alone, or two or more of them may be used in combination.

[0033] Examples of the compounds having a boiling point
20 of 100°C or more and having at least one amide group within the molecule include N,N-dimethylacetamide, N-methylformamide, N-N-dimethylformamide, acetamide, N-ethylacetamide, N-phenyl-N-propylacetamide, and benzamide. These may be used alone, or two or more of them may be used
25 in combination.

[0034] When the electric conductive resin contains (C) electric conductivity improving agent, the content thereof, which is not limited to a particular content, is preferably 0.01 to 100,000 parts by mass and more preferably 0.1 to
30 10,000 parts by mass relative to 100 parts by mass of (A) electric conductive polymer. If the content of (C) electric conductivity improving agent is less than 0.01

part by mass, a sufficient electric conductivity improving effect cannot necessarily be obtained; if the content exceeds 100,000 parts by mass, the drying performance of the fiber structure may degrade.

5 [0035] <(D) Flexibility Imparting Agent>

(D) flexibility imparting agent may be added to the electric conductive resin. Examples of (D) flexibility imparting agent include, but are not limited to, glycerol, sorbitol, polyglycerin, polyethylene glycol, and a
10 polyethylene glycol-polypropylene glycol copolymer. These may be used alone, or two or more of them may be used in combination.

[0036] When the electric conductive resin contains (D) flexibility imparting agent, the content thereof, which is
15 not limited to a particular content, is preferably 10 to 10,000 parts by mass and more preferably 100 to 5,000 parts by mass relative to 100 parts by mass of (A) electric conductive polymer. If the content of (D) flexibility imparting agent is less than 10 parts by mass, sufficient
20 flexibility cannot necessarily be obtained; if the content exceeds 10,000 parts by mass, the fiber structure may degrade in electric conductivity and/or strength or may significantly degrade in washing durability.

[0037] <(E) Surface active agent/Leveling Agent>

25 (E) surface active agent/leveling agent may be added to the electric conductive resin. In the electric conductive fiber structure of at least some embodiments of the present invention, one compound may correspond to both the surface active agent and the leveling agent. When the
30 surface active agent and the leveling agent are different compounds, the surface active agent and the leveling agent may be used in combination.

[0038] The surface active agent is not limited to a

particular compound so long as it has a leveling improving effect; specific examples thereof include siloxane-based compounds such as polyether-modified polydimethylsiloxane, polyether-modified siloxane, polyetherester-modified hydroxy group-containing polydimethylsiloxane, polyether-modified acrylic group-containing polydimethylsiloxane, polyester-modified acrylic group-containing polydimethylsiloxane, perfluoro-polydimethylsiloxane, perfluoro-polyether-modified polydimethylsiloxane, and perfluoro-polyester-modified polydimethylsiloxane; fluorine-containing organic compounds such as perfluoro-alkyl carboxylic acids and perfluoro-alkyl polyoxyethylene ethanol; polyether-based compounds such as polyoxyethylene alkylphenyl ethers, propylene oxide polymers, and ethylene oxide polymers; carboxylic acids such as amine salts of coconut fatty acid and gum rosin; ester-based compounds such as castor oil sulfuric esters, phosphoric esters, alkylether sulfates, sorbitan fatty acid esters, sulfonic acid esters, and succinic acid esters; sulfonate compounds such as amine salts of alkylaryl sulfonic acids and sodium dioctyl sulfosuccinate; phosphate compounds such as sodium lauryl phosphate; amid compounds such as coconut fatty acid ethanol amide; and acrylic-based compounds. These surface active agents may be used alone, or two or more of them may be used in combination. Among them, preferred are siloxane-based compounds and fluorine-containing organic compounds in view of significantly obtaining the leveling improving effect.

[0039] The leveling agent is not limited to a particular compound; examples thereof include siloxane-based compounds such as polyether-modified polydimethylsiloxane, polyether-modified siloxane, polyetherester-modified hydroxy group-containing polydimethylsiloxane, polyether-modified acrylic

group-containing polydimethylsiloxane, polyester-modified acrylic group-containing polydimethylsiloxane, perfluoro-polydimethylsiloxane, perfluoro-polyether-modified polydimethylsiloxane, and perfluoro-polyester-modified polydimethylsiloxane; fluorine-containing organic compounds such as perfluoro-alkyl carboxylic acids and perfluoro-alkyl polyoxyethylene ethanol; polyether-based compounds such as polyoxyethylene alkylphenyl ethers, propylene oxide polymers, and ethylene oxide polymers; carboxylic acids such as amine salts of coconut fatty acid and gum rosin; ester-based compounds such as castor oil sulfuric esters, phosphoric esters, alkylether sulfates, sorbitan fatty acid esters, sulfonic acid esters, and succinic acid esters; sulfonate compounds such as amine salts of alkylaryl sulfonic acids and sodium dioctyl sulfosuccinate; phosphate compounds such as sodium lauryl phosphate; amid compounds such as coconut fatty acid ethanol amide; and acrylic-based compounds. These leveling agents may be used alone, or two or more of them may be used in combination.

[0040] <Method for Producing Electric conductive Fiber Structure>

The electric conductive fiber structure of at least some embodiments of the present invention is obtained by causing an electric conductive resin with a mixture of an electric conductive polymer and an olefinic resin as a main component to be filled in gaps between single fibers included in a fiber structure; for the electric conductive resin caused to be supported, one having a small particle diameter is used.

When being caused to be supported, the electric conductive resin is preferably caused to be supported in the form of a dispersion liquid or a solution of the electric conductive resin. In the present specification,

both an entity that completely dissolves all the components contained in the electric conductive resin (that is a "solvent") and an entity that disperses insoluble components (that is, a "dispersion medium") are referred to as a "solvent" without any distinction. The following describes the solvent.

[0041] <Solvent>

Examples of the solvent include, but are not limited to, water; alcohols such as methanol, ethanol, 2-propanol, 1-propanol, and glycerin; ethylene glycols such as ethylene glycol, diethylene glycol, triethylene glycol, and tetraethylene glycol; glycol ethers such as ethylene glycol monomethyl ether, diethylene glycol monomethyl ether, ethylene glycol diethyl ether, and diethylene glycol dimethyl ether; glycol ether acetates such as ethylene glycol monoethyl ether acetate, diethylene glycol monoethyl ether acetate, and diethylene glycol monobutyl ether acetate; propylene glycols such as propylene glycol, dipropylene glycol, and tripropylene glycol; propylene glycol ethers such as propylene glycol monomethyl ether, propylene glycol monoethyl ether, dipropylene glycol monomethyl ether, dipropylene glycol monoethyl ether, propylene glycol dimethyl ether, dipropylene glycol dimethyl ether, propylene glycol diethyl ether, and dipropylene glycol diethyl ether; propylene glycol ether acetates such as propylene glycol monomethyl ether acetate, propylene glycol monoethyl ether acetate, dipropylene glycol monomethyl ether acetate, and dipropylene glycol monoethyl ether acetate; tetrahydrofuran; acetone; and acetonitrile. These solvents may be used alone, or two or more of them may be used in combination.

[0042] The solvent is preferably water or a mixture of water and organic solvents. When the electric conductive

fiber structure contains water as the solvent, the content of water, which is not limited to a particular content, is preferably 20 to 1,000,000 parts by mass and more preferably 200 to 500,000 parts by mass relative to 100 parts by mass of the solid content of (A) electric conductive polymer. If the content of water is less than 20 parts by mass, viscosity increases, which may make handling difficult; if the content of water exceeds 1,000,000 parts by mass, the concentration of the electric conductive fiber structure is extremely low, which may increase the amount of liquid used.

[0043] In at least some embodiments of the present invention, the electric conductive resin is supported on the fiber structure using a normal method such as immersion, coating, or spraying, and the fiber structure supporting the electric conductive resin is heated to obtain an electric conductive fiber structure.

In view of enabling the electric conductive resin to be filled in gaps between single fibers included in the fiber structure in a large amount, immersion and coating are preferred.

[0044] <Particle Diameter of Electric Conductive Resin>

The dispersion particle diameter of the electric conductive resin with (A) electric conductive polymer or the mixture of (A) electric conductive polymer and (B) binder resin as a main component is preferably less than 200 nm. If the dispersion particle diameter of the electric conductive resin is 200 nm or more, the electric conductive resin is difficult to be filled in gaps between single fibers of fibers included in the fiber structure and is supported on the surface of single fibers in a large amount, which is easily peeled off by physical impact, and high electric conductivity after repeated washing cannot be

maintained. If the dispersion particle diameter of the electric conductive resin is less than 200 nm, the electric conductive resin is supported on the surface of single fibers and gaps between single fibers in a large amount and is little peeled off by physical impact, and high electric conductivity after repeated washing can be maintained.

[0045] Whether the dispersion particle diameter is less than 200 nm is measured by filtering the electric conductive resin dispersed in a dispersion liquid of the electric conductive resin with a syringe filter with a pore diameter of 0.2 μm . In other words, it can be determined that the dispersion particle diameter is less than 200 nm if the electric conductive resin dispersed in the dispersion liquid of the electric conductive resin passes through the syringe filter.

[0046] The average particle diameter of the electric conductive resin with (A) electric conductive polymer or the mixture of (A) electric conductive polymer and (B) binder resin as a main component is preferably 20 nm or less. With this average particle diameter, the electric conductive resin is supported on the surface of single fibers and gaps between single fibers in a larger amount and is particularly little peeled off by physical impact, and high electric conductivity after repeated washing can be maintained to a larger extent.

The average particle diameter of the electric conductive resin refers to a median diameter (D50) when measured by dynamic light scattering.

[0047] In at least some embodiments of the present invention, using the electric conductive resin containing (A) electric conductive polymer or (A) electric conductive polymer and (B) binder resin, with the dispersion particle diameter being 200 nm or less or with the average particle

diameter being 20 nm or less, the electric conductive resin is filled in gaps between single fibers of fibers included in the fiber structure, whereby the electric conductive resin can be impregnated into a deep part of the fiber structure. With this impregnation, an electric conductive fiber structure excellent in durability against repeated washing can be obtained.

[0048] Denatron FB408B, Denatron TX401 (manufactured by Nagase Chemtex Corporation), and the like are commercially available as a dispersion liquid that disperses an electric conductive resin with a mixture of (A) electric conductive polymer with poly(3,4-ethylenedioxythiophene) and polystyrene sulfonic acid as main components and (B1) olefinic resin as (B) binder resin as a main component in a solvent, which can be used as the electric conductive resin of the electric conductive fiber structure of at least some embodiments of the present invention.

[0049] In view of improving the electric conductivity and stability of the electric conductive fiber structure, glycerol, a physiological saline solution, or the like is further imparted to the fiber structure containing the electric conductive resin, which can be suitably used; the electric conductive fiber structure of the present invention is not limited to these examples. These exemplified electric conductive resins are imparted to the fiber structure using a known method such as immersion, coating, or spraying, whereby the electric conductive resin is supported on the surface of single fibers included in the fiber structure and gaps between single fibers, and a continuous layer of the electric conductive resin can be formed.

[0050] <Fiber Structure>

In the electric conductive fiber structure of at least

some embodiments of the present invention, the form of fibers included in the fiber structure may be any of a monofilament yarn, a multifilament yarn, and a staple yarn. The cross-sectional shape of the fibers may be a circular cross section, a triangular cross section, or other modified cross sections with a high modification degree and is not limited to a particular shape.

[0051] A polymer as a material of the fibers included in the fiber structure is not limited to a particular polymer so long as it is a polymer that can be formed into fibers by a known method and refers to, but are not limited to, polyolefin-based fibers with polyethylene, polypropylene, or the like as a main component, cellulose for chemical fibers such as rayon and acetate, and polymers for synthetic fibers such as polyester and nylon.

[0052] In the electric conductive fiber structure of at least some embodiments of the present invention, the fineness of the fibers included in the fiber structure is preferably uniform and fine size. In melt spinning, particularly preferably exemplified is a fiber formed of a thermoplastic polymer that enables composite spinning, especially polyester.

[0053] Examples of the polyester referred to in this context include polyesters with terephthalic acid as a main acid component and with an alkylene glycol with a carbon atom number of 2 to 6, that is, at least one glycol selected from ethylene glycol, trimethylene glycol, tetramethylene glycol, pentamethylene glycol, and hexamethylene glycol, preferably ethylene glycol and tetramethylene glycol, and particularly preferably ethylene glycol as a main glycol component.

[0054] The polyester may be a polyester with a mixture of terephthalic acid and another bifunctional carboxylic

acid as an acid component and may be a polyester with a mixture of the above glycol and another diol component as a glycol component. Further, the polyester may be a polyester with a mixture of terephthalic acid and another bifunctional carboxylic acid as an acid component and with a mixture of the above glycol and another diol component as a glycol component.

[0055] Examples of the other bifunctional carboxylic acid apart from terephthalic acid used in this example include aromatic, aliphatic, and alicyclic bifunctional carboxylic acids such as isophthalic acid, naphthalene dicarboxylic acid, diphenyldicarboxylic acid, diphenoxyethanedicarboxylic acid, adipic acid, sebacic acid, and 1,4-cyclohexanedicarboxylic acid. Examples of the diol compound apart from the above glycol include aromatic, aliphatic, and alicyclic diol compounds such as cyclohexane-1,4-dimethanol, neopentyl glycol, bisphenol A, and bisphenol S.

[0056] The polyester used as fibers included in the fiber structure may be synthesized by any method. Polyethylene terephthalate, for example, can be normally manufactured by a first-step reaction that produces a glycol ester of terephthalic acid and/or its oligomer by directly subjecting terephthalic acid and ethylene glycol to an esterification reaction, by subjecting a lower alkyl ester of terephthalic acid such as dimethyl terephthalate and ethylene glycol to an ester exchange reaction, or by reacting terephthalic acid and ethylene oxide and a second-step reaction that heats the reaction product in the first step under reduced pressure to be subjected to a polycondensation reaction until a desired degree of polymerization is gained.

[0057] The form of the fiber structure according to at

least some embodiments of the present invention may be a mesh, paper, a woven fabric, a knitted fabric, a nonwoven fabric, a ribbon, a string, or the like, which may be any form corresponding to a purpose and is not limited to a particular form.

[0058] The fiber structure according to at least some embodiments of the present invention includes multifilament yarns, and an electric conductive material is preferably supported on the surface of single fibers included in the multifilament yarns and filled in gaps between single fibers.

[0059] In view of supporting the electric conductive resin on the fiber structure and high electric conductivity of the electric conductive fiber structure, the fiber structure preferably includes multifilament yarns including a plurality of single fibers. The fineness of the multifilament yarns, which is not limited to a particular value, is preferably 30 dtex to 400 dtex in view of using the characteristics as the fiber structure. The mixing ratio of the multifilament yarns in the fiber structure is not limited to a particular ratio to the extent that the performance is not affected; a higher mixing ratio is preferred in view of making it easier for the electric conductive resin to be supported and improving practical durability. The used multifilament yarns can be subjected to thread-plying, doubling, and crimping by known methods.

[0060] The multifilaments included in the fiber structure further preferably include single fibers with 0.2 dtex or less. In view of supporting the electric conductive polymer on the fiber structure and high electric conductivity, a fiber structure with a small fiber diameter of single fibers is desirable and preferably includes single fibers with 0.2 dtex or less. For polyethylene

terephthalate with a density of 1.38 g/cm^3 as an example, a fineness of 0.2 dtex forms microfibers with a fiber diameter of about $5 \text{ }\mu\text{m}$. With a density of a polymer compound capable of forming fibers and microfibers with 0.2 dtex or less, they are fibers with sufficiently small fineness, and many gaps can be formed from single fibers.

[0061] A larger number of single fibers included in the multifilaments fractionate gaps formed from a plurality of single fibers, that is, parts on which the electric conductive resin is supported and increase the supportability of the electric conductive resin on the fiber structure. In addition, the fiber diameter of the single fibers is reduced, whereby even when the parts that can support the electric conductive resin are fractionated, the continuity of the electric conductive resin is maintained, and high electric conductivity can be simultaneously exhibited.

[0062] For microfibers with a large number of single fibers, sea-island type composite fibers formed of two kinds of polymers having different solubility are prepared, and one component of the sea-island type composite fibers is removed with a solvent to form ultrafine fibers, for example. Although the respective thicknesses of island components and the distribution thereof are not fixed, the constituent number of the island components is increased, whereby multifilaments formed of microfibers can be formed.

[0063] In the multifilaments that can be manufactured by the above method, the constituent number of the island components of the microfibers, which relates to monofilament fineness or the presence or absence of thread plying to single fibers, is 5 or more, preferably 24 or more, and further preferably 50 or more. Further, denier mix is also included in the present invention. The cross-

sectional form of the entire multi-component fibers is not limited to a circular hole and includes various known fiber cross sections such as trilobal type, tetralobal type, T type, and hollow type ones.

5 [0064] One preferred form of the fiber structure of the present invention is obtained by treating a woven fabric woven using the sea-island type composite fibers by a method such as chemical peeling, physical peeling, or removal by dissolution to manufacture a woven or knitted
10 fabric with the constituent fibers made ultrafine, and entangling the fibers by water jet punching or the like.

[0065] In the preferred form of the fiber structure described above, to maintain the fiber entangled structure, a polymer elastic substance such as polyurethane is
15 imparted by means such as impregnation. With this treatment, an effect of improving the dyeability, the size stability, the quality stability, and the like of the fiber structure is produced. Further, the surface of the sheet-shaped fiber structure is napped to form erected fibers
20 formed of a bundle of ultrafine fibers on the surface, whereby various types of sheet-shaped products corresponding to an object can be made.

[0066] On the fiber structure, in addition to fiber entanglement and napping, many pieces of processing such as
25 shrinking treatment, form fixing treatment, compressing treatment, dyeing finishing treatment, oil imparting treatment, thermal fixing treatment, solvent removal, form fixing agent removal, combing treatment, brightening treatment, flat (roll) pressing treatment, and high-
30 performance short-cut shirring treatment (cutting of erected fibers) are performed in combination as appropriate at each process; they are performed in an unlimited manner so long as the performance as an electrode is not impaired.

[0067] Further, in the fiber structure according to at least some embodiments the present invention, at least part of the single fibers are further preferably nanofibers with a single fiber diameter of 10 nm or more and 5,000 nm or less; suitably used are fiber structures including multifilament yarns including nanofibers prepared by known methods such as a nanofiber staple yarn aggregate manufactured from "Nanoalloy (registered trademark)" fibers and an aggregate of monofilaments manufactured by an electrospinning method or the like.

[0068] The multifilament yarns including nanofibers can be manufactured by a known composite spinning method or the like. As an example, effectively used are nanofiber multifilament yarns with small variations in fiber diameter obtained by removing the sea component from composite fibers using a composite spinneret exemplified in Japanese Patent Application Laid-open No. 2013-185283; this is not limiting.

[0069] The weight per unit area of the electric conductive fiber structure of at least some embodiments of the present invention is preferably 50 g/m² or more and 300 g/m² or less. If the weight per unit area is less than 50 g/m², the raw fabric is extremely thin, and the amount of impregnation of the electric conductive resin is small; if the weight per unit area exceeds 300 g/m², it is extremely thick, which causes a feel of wearing to degrade. The weight per unit area is more preferably 100 g/m² or more and 250 g/m² or less.

[0070] The electric conductive fiber structure of at least some embodiments of the present invention preferably has an antibacterial activity value of *Staphylococcus aureus* as human indigenous bacteria of 3 or more by JIS L 1902 (2015 Edition) Bacterial liquid absorption method. If

the antibacterial activity value is less than 3, when an electrode member including the electric conductive fiber structure of at least some embodiments of the present invention are installed on clothes, for example, the propagation of bacteria caused by perspiration cannot be reduced, and when the clothes after perspiring are left as they are, the clothes emit odors by the propagation of bacteria. An electrode member including the electric conductive fiber structure with an antibacterial activity value of 3 or more can reduce the propagation of bacteria caused by perspiration and can reduce the emission of odors. [0071] The electric conductive fiber structure of at least some embodiments of the present invention preferably has a surface resistance after repeating washing 30 times by JIS L 0217 (1995 Edition) 103 method is $1 \times 10^4 \Omega$ or less. The electrode member of such an embodiment can be washed in homes, although it includes the fiber structure and the electric conductive resin. A larger number of single fibers included in the fiber structure fractionate gaps formed from a plurality of single fibers, that is, parts on which the electric conductive resin is supported, increase the supportability of the electric conductive resin with a dispersion particle diameter of 200 nm or less or with an average particle diameter of 20 nm or less on the fiber structure, and can impart high washing durability. [0072] When the electric conductive fiber structure of an embodiment of the present invention is used as a bioelectrode, high air-permeability is required in view of adhesion and followability to skin or in order to achieve a flexible, soft feel and reduce sweatiness and rashes caused by perspiration on skin, and the form of the fiber structure is preferably the shape of a woven fabric, a knitted fabric, and a nonwoven fabric.

[0073] For the fiber structure, dyeing, functional treatment, and the like by known methods and means are performed in an unlimited manner so long as the performance as an electrode is not impaired. Surface physical
5 treatment such as napping of the surface of the electrode member, calendering, embossing, or water jet punching are also performed in an unlimited manner so long as the performance as an electrode is not impaired.

[0074] The shape and size of the electrode member of at
10 least an embodiment of the present invention are not set to particular ones so long as biosignals can be detected.

[0075] In the electrode member including the electric conductive fiber structure of at least some embodiments of the present invention, a resin layer may be laminated on
15 one side of the fiber structure containing the electric conductive resin.

[0076] Examples of preferred use modes of the electric conductive fiber structure of embodiments of the present invention include being in direct contact with living
20 bodies to enable electric signals to be acquired and/or electric signals to be imparted, which include electrode members of cardiac potential, myoelectric potential, brain waves, and the like acquiring electric signals from living bodies and electrode members of low frequency, high
25 frequency, EMS, and the like imparting electric stimuli to living bodies. Examples include, but are not limited to, single bodies of fibers, fabrics, films, slit yarns, unwoven fabrics, resins, and structures formed of composites thereof. Examples of further specific shapes
30 include, but are not limited to, ones in direct contact with skin such as electrodes formed of the base, electric wires, wear, underpants, gloves, socks, brassieres, headbands, wristbands, mufflers, caps, belly bands,

athletic supporters, shoes, sheets, glasses, hairbands, hair ornament adhesive members, headphones, watches, chairs, toilet seats, handles, beds, carpets, and various kinds of covers.

5 [0077] For an electrode, an electrode by itself and/or a combination with the above members in direct contact with skin can also be suitably used. The shape of the electrode by itself is not limited to a circle, a polygon, and the like.

10 [0078] The size of the electrode is only required to have a contact area enabling a desired biosignal to be acquired and is not limited. To improve adhesion to living bodies, a general flat electrode may have a three-dimensional structure such as a loop shape or be swelled by
15 air in order to follow movement.

[0079] When being used as an electrode in combination with other structures such as clothes, to acquire an electric signal at a desired part, the fiber structure can also be suitably used with a shape attachable and
20 detachable to and from clothes using buttons, hooks, magnets, and Magic Tape (registered trademark) in combination.

[0080] The electric conductive fiber structure of at least some embodiments of the present invention can also be
25 used as a planer heating element, is excellent in flexibility and flex resistance, is light in weight, can be reduced in thickness, and can thus be used as a fabric heater.

[Examples]

30 [0081] The following describes the electric conductive fiber structure of at least some embodiments of the present invention in detail by examples. These examples do not limit the electric conductive fiber structure of the

present invention. Measured values in the examples and comparative examples were obtained by the following methods.

[0082] (1) Electric Conductive Resin Impregnation Area Ratio

5 The area ratio of the electric conductive resin existence in an area of 15 to 30 μm from a surface when a cross section in the thickness direction of the electric conductive fiber structure of embodiments of the present invention was observed (an electric conductive resin
10 impregnation area ratio) was determined as follows.

Using an argon (Ar)-ion beam processing apparatus, the electric conductive fiber structure was cut in the thickness direction to prepare a cross-sectional thin film piece to obtain a sample for measurement. For the obtained
15 sample for measurement, using scanning spreading resistance microscopy (hereinafter, referred to as SSRM), voltage was applied from the back side of the sample for measurement, and using an electric conductive probe, the presence or absence of the continuity of the surface layer of the
20 sample was observed. In an observed image, as illustrated in a cross-sectional image of FIG. 1 below, a 30 μm $\times$ 30 μm square area was set such that the highest part of the surface layer part of the fiber structure was in contact with the upper part of a field of view. For a 15 μm $\times$ 30
25 μm area at 15 μm below the highest position of the surface part, using image processing software (GIMP 2.8 portable), with a threshold value set at 60, an area ratio impregnated with the electric conductive resin in an area of 15 to 30 μm from the surface in the thickness direction of the
30 electric conductive fiber structure was determined. In this process, the number of observation was 20 cross sections extracted at random. The average value of the

respective area ratios determined at the 20 places was calculated, which was defined as a "electric conductive resin impregnation area ratio."

Observation apparatus: manufactured by Bruker AXS and

5 Digital Instruments

NanoScope Iva AFM

Dimension 3100 stage AFM system

+ SSRM option

SSRM scanning mode: simultaneous measurement of

10 contact mode and spreading resistance

SSRM probe (Tip): diamond-coated silicon cantilever

Probe product name: DDESP-FM (manufactured by Bruker
AXS)

Ar-ion beam processing apparatus: IM-4000 manufactured
15 by Hitachi High-Technologies Corporation

Acceleration voltage: 3 kV

[0083] (2) Fineness

The fineness of the sea-island type composite fibers included in the fiber structure of embodiments of the
20 present invention was calculated by immersing a fabric in a 3% by mass aqueous sodium hydroxide solution (75°C, with a bath ratio of 1:30) to remove an easily soluble component by 99% or more, dissolving yarns, extracting a multifilament formed of ultrafine fibers, measuring the
25 mass of 1 meter of this multifilament, and multiplying the mass by 10,000. This procedure was repeated ten times, and a value obtained by rounding off their simple average to the first decimal place was defined as fineness.

For other fibers, fineness was calculated by
30 dissolving yarns, extracting a multifilament, measuring the mass of 1 meter of this multifilament, and multiplying the mass by 10,000. This procedure was repeated ten times, and a value obtained by rounding off their simple average to

the first decimal place was defined as fineness.

[0084] (3) Fiber Diameter

Multifilaments extracted from fibers were embedded in epoxy resin, were frozen with FC4E Cryosectioning System
5 manufactured by Reichert Inc., and were cut with Reichert-Nissei ultracut N (an ultramicrotome) equipped with a diamond knife, and their cut faces were photographed with model VE-7800 scanning electron microscope (SEM) manufactured by Keyence Corporation with a magnification of
10 5,000 times for nanofibers, 1,000 times for microfibers, and 500 times for others. From an obtained photograph, 150 ultrafine fibers selected at random were extracted, and for the photograph, all circumscribed circle diameters (fiber diameters) were measured using image processing software
15 (WINROOF).

[0085] (4) Variations in Fiber Diameter (CV% (A))

The average fiber diameter and the fiber diameter standard deviation of the fiber diameter measured in (3) were determined, and variations in fiber diameter (CV% (A):
20 coefficient of variation) was calculated on the basis of the following expression. For all of the above values, measurements were performed at three places for each photograph to determine averages of the three places; the averages were measured to the first decimal place in mm and
25 were rounded off to the nearest integers.

Variations in fiber diameter (CV% (A)) = (the fiber diameter standard deviation/the average fiber diameter) × 100

[0086] (5) Modification Degree and Variations in
30 Modification Degree (CV% (B))

Cross sections of multifilaments were photographed in a way similar to that for the fiber diameter in (3); from each of those images, the diameter of a perfect circle

circumscribed to a cut face was defined as a circumscribed circle diameter (a fiber diameter), the diameter of a perfect circle inscribed thereto was defined as an inscribed circle diameter, and a modification degree = the
5 circumscribed circle diameter/the inscribed circle diameter was determined to the third decimal place, which was rounded off to the second decimal place to be determined to be the modification degree. This modification degree was measured for 150 ultrafine fibers extracted at random
10 within the same image, and from its average and standard deviation, variations in modification degree (CV% (B): coefficient of variation) was calculated on the basis of the following expression. The variations in modification degree was rounded off to the first decimal place.

15 Variations in modification degree (CV% (B)) = (the standard deviation of the modification degree/the average of the modification degree) × 100(%)

[0087] (6) Weight per Unit Area

For an electrode base fabric, a weight per unit area
20 in the standard state of JIS L 1096 (Testing methods for general woven fabrics) (1999) and JIS L 1018 (Testing methods for knitted fabrics) (1999) was measured.

[0088] (7) Dispersion Particle Diameter of Electric Conductive Resin

25 The electric conductive resin dispersed in a dispersion liquid was filtered with a Minisart 0.2 μm syringe filter manufactured by Sartorius to determine whether the dispersion particle diameter of the electric conductive resin was less than 200 nm.

30 [0089] (8) Average Particle Diameter of Electric Conductive Resin (Dynamic Light Scattering)

A hydrodynamic diameter was calculated from particle diameter distribution determined by measuring the electric

conductive resin diluted by 50 times obtained by adding 1 g of the electric conductive resin to 49 g of water with stirring with NanotracerWave series manufactured by Microtrac, which was defined as an average particle diameter.

5 [0090] (9) Electric Conductive Resin Adhesion Amount

An electric conductive resin adhesion amount was measured from a mass change of a fiber structure as a test fabric before and after application of an electric conductive resin dispersion liquid at the standard state
10 (20°C × 65% RH). The calculation expression was as follows:

The electric conductive resin adhesion amount (g/m^2) = (the mass of the test fabric after treatment (g) - the mass of the test fabric before treatment)/the area of the test
15 fabric on which the dispersion liquid has been applied (m^2)

[0091] (10) Surface Resistance

With a 10 cm × 10 cm electric conductive fiber structure as a test piece, it was placed on high-quality expanded polystyrene, and its surface resistance value (Ω)
20 was measured under an environment of 20°C and 40% RH using a resistance meter (four-probe resistance meter Loresta-AX MCP-T370 manufactured by Mitsubishi Chemical Analytech Co., Ltd.).

[0092] (11) Washing Durability

25 With a 10 cm × 10 cm electric conductive fiber structure as a test piece, a surface resistance value after washing by a 30-times repeating method was measured by a method in conformity with JIS L 0217 (1995) 103 method. For the washing machine, a fully automatic washing machine
30 (National NA-F50Z8) was used.

[0093] (12) Bending Resistance

The bending resistance of the electric conductive

fiber structure was measured in conformity with JIS L 1096 (Testing methods for woven and knitted fabrics) (1999)

Bending resistance A method (45° cantilever method).

[0094] (13) Presence or Absence of Peeling of Electric
5 Conductive Resin

General adhesive tape cut into 25 mm wide and 50 mm long was pasted on a 10 cm × 10 cm test piece of the electric conductive fiber structure and was peeled off with a constant force, and the presence or absence of the
10 peeling of the electric conductive resin was visually observed. The absence of peeling is indicated by A, whereas the presence of peeling is indicated by B.

[0095] (14) Antibacterial Activity

The antibacterial activity of the fiber structure
15 having electric conductivity was measured in conformity with JIS L 1902 Testing methods for antibacterial activity on fiber products (2015) Bacterial culture absorption method. Staphylococcus aureus was used as a test strain.

[0096] The following describes examples and comparative
20 examples of the electric conductive fiber structure according to some embodiments of the present invention.

[Example 1]

Using 100T-136F polyester nanofiber combined filament yarns obtained by combining 75T-112F (with a sea-island
25 ratio of 30%:70% and an island number of 127/Filament) nanofibers of an alkaline hot water-soluble polyester formed of polyethylene terephthalate as an island component and a polyester having a copolymer of terephthalic acid and 5-sodium sulfoisophthalic acid as acid components as a sea
30 component and 22T-24F highly shrinkable yarns, a circularly knitted fabric was knitted with a smooth texture. Next, the fabric was immersed in a 3% by mass aqueous sodium

hydroxide solution (75°C, with a bath ratio of 1:30) to remove an easily soluble component, and a nanofiber-highly shrinkable yarn combined yarn-used knitted fabric was obtained. "Denatron FB408B" (manufactured by Nagase Chemtex Corporation) as an electric conductive resin-containing dispersion liquid was applied to the obtained knitted fabric as a fiber structure so as to give an agent application amount of 15 g/m² by a known knife coating method and was heated at 120°C to 130°C to obtain an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure. FIG. 1 illustrates a cross-sectional photograph used for the evaluation of the electric conductive resin impregnation area ratio of the electric conductive fiber structure according to Example 1. FIG. 1 reveals that low resistance is present, that is, the electric conductive resin is impregnated from a surface to 30 μm.

[0097] [Example 2]

The same processing as that of Example 1 was performed except that the electric conductive resin-containing dispersion liquid was changed from "Denatron FB408B" to "Denatron TX401" to manufacture an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

[0098] [Example 3]

The same processing as that of Example 1 was performed except that the highly shrinkable yarns were changed from 22T-24F to 33T-6F to make 110T-118F polyester nanofiber combined filament yarns combined with 75T-112F (with a sea-to-island ratio of 30%:70% and an island number of

127/Filament) as the nanofibers and that dyeing treatment was performed to manufacture an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

[0099] [Example 4]

The same processing as that of Example 1 was performed except that the fabric structure was changed from the knitted fabric to a plain-woven fabric to manufacture an electric conductive fiber structure. Table 1 lists the characteristics of the used materials and the characteristics of the obtained electric conductive fiber structure.

[0100] [Example 5]

The same processing as that of Example 1 was performed except that the 22T-24F highly shrinkable yarns were not used and that the polyester nanofiber combined filament yarns were changed to 75T-112F (with a sea-island ratio of 30%:70% and an island number of 127/Filament) polyester nanofiber single yarns to manufacture an electric conductive fiber structure. Table 1 lists the characteristics of the used materials and the characteristics of the obtained electric conductive fiber structure.

[0101] [Example 6]

The same processing as that of Example 1 was performed except that the 22T-24F highly shrinkable yarns were not used and that 75T-112F (with a sea-island ratio of 30%:70% and an island number of 127/Filament) was changed to 100T-30F (with a sea-island ratio of 30%:70% and an island number of 2,048/Filament) polyester nanofiber single yarns to manufacture an electric conductive fiber structure. Table 1 lists the characteristics of the used materials and

the characteristics of the obtained electric conductive fiber structure.

[0102] [Example 7]

The same processing as that of Example 1 was performed
5 except that the 22T-24F highly shrinkable yarns were not
used and that 75T-112F (with a sea-island ratio of 30%:70%
and an island number of 127/Filament) was changed to 120T-
60F (with a sea-island ratio of 50%:50% and an island
number of 2,048/Filament) polyester nanofiber single yarns
10 to manufacture an electric conductive fiber structure.
Table 1 lists the used materials and the characteristics of
the obtained electric conductive fiber structure.

[0103] [Example 8]

The same processing as that of Example 1 was performed
15 except that the 22T-24F highly shrinkable yarns were not
used and that the polyester nanofiber combined filament
yarns were changed to 75T-112F (with a sea-island ratio of
30%:70% and an island number of 127/FILAMENT) triangular-
cross-section polyester nanofiber single yarns to
20 manufacture an electric conductive fiber structure. Table
1 lists the used materials and the characteristics of the
obtained electric conductive fiber structure.

[0104] [Example 9]

The same processing as that of Example 1 was performed
25 except that the 22T-24F highly shrinkable yarns were not
used and that 75T-112F (with a sea-island ratio of 30%:70%
and an island number of 127/Filament) was changed to a 66T-
9F (with a sea-island ratio of 20%:80% and an island number
of 70/Filament) microfiber woven fabric to manufacture an
30 electric conductive fiber structure. Table 1 lists the
used materials and the characteristics of the obtained
electric conductive fiber structure.

[0105] [Example 10]

A needle punched nonwoven fabric formed using polymer arrangement fibers (with a sea-island ratio of 57%:43% and an island number of 16) with 4.2 dtex, a length of 51 mm, polyethylene terephthalate as an island component, and polystyrene as a sea component was impregnated with polyurethane and was subjected to wet solidification. The content of polyurethane was 49% relative to the mass of polyethylene terephthalate. This nonwoven fabric was immersed in trichloroethylene and was squeezed with a mangle to remove a polystyrene component to obtain ultrafine fibers with a monofilament fineness of 0.15 dtex. With a buffing machine, a nonwoven fabric with fluffing processing and dyeing treatment performed was obtained. Next, similarly to Example 1, "Denatron FB408B" (manufactured by Nagase Chemtex Corporation) as an electric conductive resin-containing dispersion liquid was applied to the obtained nonwoven fabric as a fiber structure so as to give an agent application amount of 15 g/m² by a known knife coating method to obtain an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

[0106] [Example 11]

Using 100T-136F polyester nanofiber combined filament yarns obtained by combining 75T-112F (with a sea-island ratio of 30%:70% and an island number of 127/Filament) nanofibers and 22T-24F highly shrinkable yarns, a circularly knitted fabric was knitted. Next, the fabric was immersed in a 3% by mass aqueous sodium hydroxide solution (75°C, with a bath ratio of 1:30) to remove an easily soluble component, and a nanofiber-highly shrinkable yarn combined yarn-used knitted fabric was obtained. A polyurethane resin fine porous film was laminated on the

back side of the obtained knitted fabric by a known method, whereas "Denatron FB408B" (manufactured by Nagase Chemtex Corporation) as an electric conductive resin-containing dispersion liquid was applied to the front side thereof so as to give an agent application amount of 15 g/m² by a known knife coating method to obtain an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

10 [0107] [Example 12]

The same processing as that of Example 11 was performed except that the highly shrinkable yarns were changed from 22T-24F to 33T-6F to make polyester nanofiber combined filament yarns combined with 75T-112F (with a sea-
15 to-island ratio of 30%:70% and an island number of 127/Filament) and that dyeing treatment was performed to manufacture an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

20 [0108] [Example 13]

The same processing as that of Example 11 was performed except that the fabric structure was changed from the knitted fabric to a plain-woven fabric to manufacture an electric conductive fiber structure. Table 1 lists the
25 used materials and the characteristics of the obtained electric conductive fiber structure.

[0109] [Example 14]

The same processing as that of Example 11 was performed except that the polyester nanofiber combined
30 filament yarns were changed to 75T-112F (with a sea-island ratio of 30%:70% and an island number of 127/Filament) polyester nanofiber single yarns to manufacture an electric conductive fiber structure. Table 1 lists the used

materials and the characteristics of the obtained electric conductive fiber structure.

[0110] [Example 15]

The same processing as that of Example 11 was performed except that the polyester nanofiber combined filament yarns were changed to 100T-30F (with a sea-island ratio of 30%:70% and an island number of 2,048/Filament) polyester nanofiber single yarns to manufacture an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

[0111] [Example 16]

The same processing as that of Example 11 was performed except that the polyester nanofiber combined filament yarns were changed to 120T-60F (with a sea-island ratio of 50%:50% and an island number of 2,048/Filament) polyester nanofiber single yarns to manufacture an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

[0112] [Example 17]

The same processing as that of Example 11 was performed except that the polyester nanofiber combined filament yarns were changed to 75T-112F (with a sea-island ratio of 30%:70% and an island number of 127/Filament) triangular-cross-section polyester nanofiber single yarns to manufacture an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

[0113] [Example 18]

The same processing as that of Example 11 was performed except that the 22T-24F highly shrinkable yarns were not used and that 75T-112F (with a sea-island ratio of

30%:70% and an island number of 127/Filament) was changed to a circularly knitted fabric obtained using 66T-9F (with a sea-island ratio of 20%:80% and an island number of 70/Filament) microfibers to manufacture an electric
5 conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

[0114] [Example 19]

A needle punched nonwoven fabric formed using polymer
10 arrangement fibers (with a sea-island ratio of 57%:43% and an island number of 16) with 4.2 dtex, a length of 51 mm, polyethylene terephthalate as an island component, and polystyrene as a sea component was impregnated with polyurethane and was subjected to wet solidification. The
15 content of polyurethane was 49% relative to the mass of polyethylene terephthalate. This nonwoven fabric was immersed in trichloroethylene and was squeezed with a mangle to remove a polystyrene component to obtain ultrafine fibers with a monofilament fineness of 0.15 dtex.
20 With a buffing machine, a nonwoven fabric with fluffing processing and dyeing treatment performed was obtained. Similarly to Example 11, a polyurethane resin fine porous film was laminated on the back side of the obtained nonwoven fabric, whereas "Denatron FB408B" (manufactured by
25 Nagase Chemtex Corporation) as an electric conductive resin-containing dispersion liquid was applied to the front side thereof so as to give an agent application amount of 20 g/m² by a known knife coating method to obtain an electric conductive fiber structure. Table 1 lists the
30 used materials and the characteristics of the obtained electric conductive fiber structure.

[0115] [Example 20]

The same processing as that of Example 1 was performed

except that the polyester nanofibers in Example 5 were changed to nylon nanofibers to manufacture an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

[0116] [Comparative Example 1]

The same processing as that of Example 1 was performed except that the electric conductive resin-containing dispersion liquid was changed from "Denatron FB408B" to "Seplegyda OC-AE401," in which an acrylic resin is used as a binder, (manufactured by Shin-Etsu Polymer Co., Ltd.) to manufacture an electric conductive fiber structure. Table 1 lists the used materials and the characteristics of the obtained electric conductive fiber structure.

[0117] [Comparative Example 2]

"Denatron FB408B" (manufactured by Nagase Chemtex Corporation) as an electric conductive resin-containing dispersion liquid was applied to a PET film so as to give an agent application amount of 15 g/m² by a known knife coating method to obtain an electrode. Table 1 lists the used materials and the characteristics of the obtained film.

[0118]

Table 1

	Filament	Polymer	Cross section	Fiber diameter	Used yarn	Variations in fiber diameter (CV% (A))	Variations in modification degree (CV% (B))
Example 1	Multifilament /highly shrinkable yarn	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)/22T-24F	5	7
Example 2	Multifilament /highly shrinkable yarn	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)/22T-24F	5	7
Example 3	Multifilament /highly shrinkable yarn	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)/33T-6F	5	7
Example 4	Multifilament /highly shrinkable yarn	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)/22T-24F	5	7
Example 5	Multifilament	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)	5	7
Example 6	Multifilament	Polyester	Circle	300 nm	100T-30F (sea:island = 30%:70%)	3	3.4
Example 7	Multifilament	Polyester	Circle	200 nm	120T-60F (sea:island = 50%:50%)	3	3.4
Example 8	Multifilament	Polyester	Triangle	700 nm	75T-112F (sea:island = 30%:70%)	3	3.4
Example 9	Multifilament	Polyester	Circle	2,700 nm	66T-9F (sea:island = 20%:80%)	6	9
Example 10	Multifilament	Polyester	Circle	3,800 nm	Single yarn fineness 0.15 dtex	6	9
Example 11	Multifilament /highly shrinkable yarn	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)/22T-24F	5	7
Example 12	Multifilament /highly shrinkable	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)/33T-6F	5	7

	yarn						
Example 13	Multifilament /highly shrinkable yarn	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)/22T-24F	5	7
Example 14	Multifilament	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)	5	7
Example 15	Multifilament	Polyester	Circle	300 nm	100T-30F (sea:island = 30%:70%)	3	3.4
Example 16	Multifilament	Polyester	Circle	200 nm	120T-60F (sea:island = 50%:50%)	3	3.4
Example 17	Multifilament	Polyester	Triangle	700 nm	75T-112F (sea:island = 30%:70%)	3	3.4
Example 18	Multifilament	Polyester	Circle	2,700 nm	66T-9F (sea:island = 20%:80%)	6	9
Example 19	Multifilament	Polyester	Circle	3,800 nm	Single yarn fineness 0.15 dtex	6	9
Example 20	Multifilament	Nylon	Circle	700 nm	75T-112F (sea:island = 30%:70%)	5	7
Comparative Example 1	Multifilament /highly shrinkable yarn	Polyester	Circle	700 nm	75T-112F (sea:island = 30%:70%)/22T-24F	5	7
Comparative Example 2	R-PET film		-	-	-	-	-

	Density (number/in) Longitudinal × lateral	Weight per unit area (g/m ²)	Fiber structure	Name of agent	Electric Conductive Resin Impregnation area ratio (%)	Electric Conductive Resin Impregnation area ratio (%) (washing)	Electric Conductive resin dispersion particle diameter
Example 1	58 × 78	118	Knitted fabric	Denatron FB408B	20.7	12.2	Less than 200 nm
Example 2	58 × 78	118	Knitted fabric	Denatron TX401	18.3	11.5	Less than 200 nm
Example 3	46 × 110	194	Knitted fabric	Denatron FB408B	23.2	13.3	Less than 200 nm
Example 4	216 × 113	98	Woven	Denatron	20.2	11.8	Less than 200 nm

			fabric	FB408B			
Example 5	43 × 58	112	Knitted fabric	Denatron FB408B	28.3	15.5	Less than 200 nm
Example 6	58 × 78	110	Knitted fabric	Denatron FB408B	29.2	15.3	Less than 200 nm
Example 7	70 × 94	98	Knitted fabric	Denatron FB408B	27.5	12.3	Less than 200 nm
Example 8	43 × 58	115	Knitted fabric	Denatron FB408B	28.2	16.2	Less than 200 nm
Example 9	114 × 118	61	Woven fabric	Denatron FB408B	15.7	10.3	Less than 200 nm
Example 10	-	135	Nonwoven fabric	Denatron FB408B	16.4	12.2	Less than 200 nm
Example 11	58 × 78	118	Knitted fabric	Denatron FB408B	21.5	13.2	Less than 200 nm
Example 12	46 × 110	194	Knitted fabric	Denatron FB408B	19.3	11.8	Less than 200 nm
Example 13	216 × 113	98	Woven fabric	Denatron FB408B	24.3	12.5	Less than 200 nm
Example 14	43 × 58	112	Knitted fabric	Denatron FB408B	23.2	11.9	Less than 200 nm
Example 15	58 × 78	110	Knitted fabric	Denatron FB408B	28.8	-15.8	Less than 200 nm
Example 16	70 × 94	98	Knitted fabric	Denatron FB408B	29.5	15.5	Less than 200 nm
Example 17	43 × 58	115	Knitted fabric	Denatron FB408B	27.5	12.3	Less than 200 nm
Example 18	114 × 118	61	Knitted fabric	Denatron FB408B	16.5	10.5	Less than 200 nm
Example 19	-	135	Nonwoven fabric	Denatron FB408B	17.2	13.2	Less than 200 nm
Example 20	45 × 60	115	Knitted fabric	Denatron FB408B	16.4	12.2	Less than 200 nm
Comparative Example 1	58 × 78	118	Knitted fabric	Seplegda OC-AE401	10.9	0	200 nm or more
Comparative Example 2	-	140	Film	Denatron FB408B	Unmeasurable	Unmeasurable	Less than 200 nm

	Conduc-	Resin	Water-	Dyeing	Chemical	Physical	Resist-	Resistance	Bending	Peeling	Anti-
--	---------	-------	--------	--------	----------	----------	---------	------------	---------	---------	-------

	Tive Resin Average Particle diameter	Adhesion Amount (g/m ²)	Proof And Moisture penetra- tion		treatment	treatment	ance (Ω)	(washing)	resis- Tance (mm) Longitu- dinal $\times$ lateral		Bacterial activity
Example 1	14 nm	12.3	-	-	-	-	10.3	7.5×10^2	53×68	A	4.9
Example 2	19 nm	15.3	-	-	-	-	12.5	2.5×10^3	51×63	A	3.5
Example 3	15 nm	13.5	-	o	-	-	9.8	6.2×10^2	64×72	A	5.0
Example 4	16 nm	9.8	-	-	-	-	11.3	2.3×10^3	47×40	A	4.8
Example 5	14 nm	12.2	-	-	-	-	10.3	4.5×10^2	12×12	A	5.2
Example 6	14 nm	12.3	-	-	-	-	10.2	3.2×10^2	10×11	A	5.3
Example 7	14 nm	9.7	-	-	-	-	11.4	5.8×10^2	10×11	A	4.6
Example 8	14 nm	12.5	-	-	-	-	10.4	2.4×10^2	13×15	A	4.9
Example 9	17 nm	8.9	-	-	-	-	10.9	8.9×10^2	39×27	A	4.8
Example 10	15 nm	12.8	-	o	PU	Napping	10.5	4.1×10^3	42×43	A	4.9
Example 11	14 nm	14.5	PU fine porous	-	-	-	9.5	6.3×10^2	52×58	A	5.3
Example 12	17 nm	15.3	PU fine porous	o	-	-	8.9	5.4×10^2	58×60	A	5.5
Example 13	14 nm	10.9	PU fine porous	-	-	-	10.8	7.5×10^2	69×59	A	4.8
Example 14	14 nm	14.2	PU fine porous	-	-	-	9.7	6.6×10^2	28×33	A	5.1
Example 15	16 nm	14.1	PU fine porous	-	-	-	9.7	2.3×10^2	29×30	A	5.1
Example 16	14 nm	12.6	PU fine porous	-	-	-	10.4	4.5×10^2	25×27	A	4.8
Example 17	17 nm	14.3	PU fine porous	-	-	-	9.4	4.3×10^2	31×32	A	5.1
Example 18	14 nm	8.2	PU fine porous	-	-	-	11.8	0.9×10^4	76×78	A	4.3
Example 19	15 nm	12.8	PU fine porous	o	PU	Napping	10.2	2.6×10^3	42×43	A	4.8
Example 20	16 nm	13.5	-	-	-	-	9.9	7.9×10^2	25×33	A	5.0
Comparative Example 1	55 nm	12.3	-	-	-	-	35.8	10^6 or more	50×62	B	2.0
Comparative Example 2	14 nm	14.9	-	-	-	-	12.4	10^6 or more	95	B	3.0

[0119] Throughout this specification and the claims which follow, unless the context requires otherwise, the word "comprise", and variations such as "comprises" and "comprising", will be understood to imply the inclusion of
5 a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

[0120] The reference in this specification to any prior publication (or information derived from it), or to any
10 matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this
15 specification relates.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An electric conductive fiber structure comprising an electric conductive resin containing electric conductive polymer(s), the electric conductive resin being supported
5 in a surface of single fibers included in a fiber structure and being filled in gaps between single fibers included in a fiber structure, the electric conductive fiber structure having 15% or more area ratio of the electric conductive resin existence in an area of 15 to 30 μm from a surface
10 when a cross section in a thickness direction of the fiber structure is observed.
2. The electric conductive fiber structure according to claim 1, wherein the electric conductive resin further
15 contains binder resin(s).
3. The electric conductive fiber structure according to claim 2, wherein the binder resin is olefinic resin(s).
- 20 4. The electric conductive fiber structure according to any one of claims 1 to 3, wherein main components of the electric conductive polymer are poly(3,4-ethylenedioxythiophene) and polystyrene sulfonic acid.
- 25 5. The electric conductive fiber structure according to any one of claims 1 to 4 having antibacterial activity.
6. The electric conductive fiber structure according to any one of claims 1 to 5 having an antibacterial activity
30 value of 3 or more by JIS L 1902 (2015 Edition) "Bacterial liquid absorption method".
7. The electric conductive fiber structure according to

any one of claims 1 to 6 having single fiber(s) of which diameter(s) is/are 10 nm or more and 5,000 nm or less in a part or all.

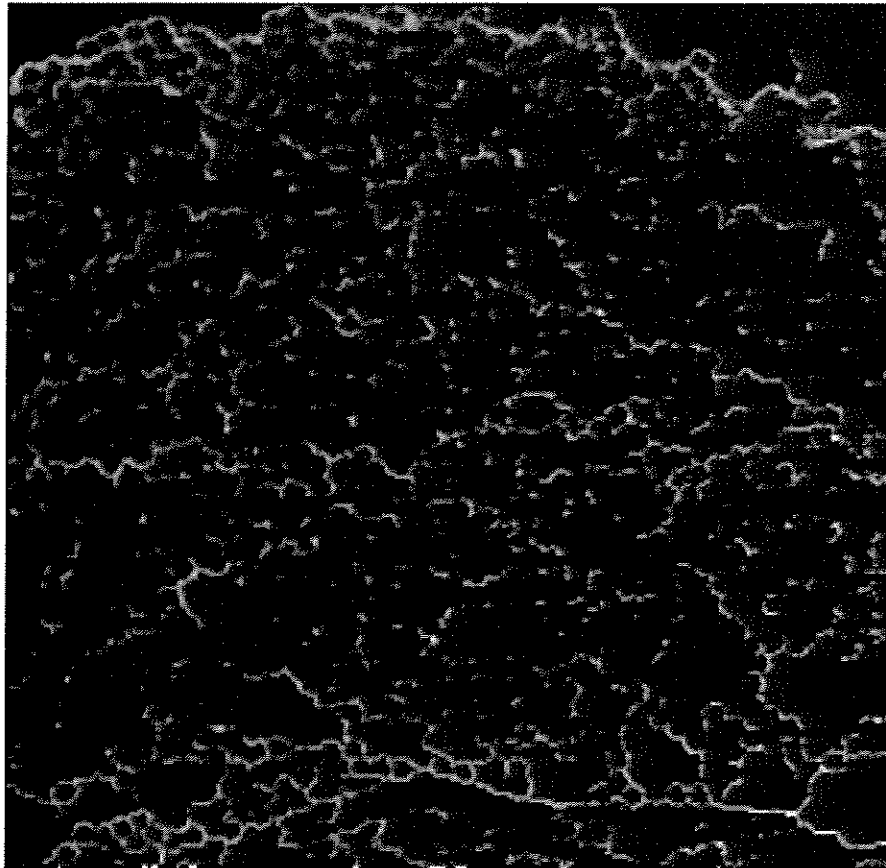
- 5 8. The electric conductive fiber structure according to any one of claims 1 to 7 having a surface resistance of $1 \times 10^4 \Omega$ or less after repeating washing 30 times by JIS L 0217 (1995 Edition) 103 method.
- 10 9. An electrode member comprising the electric conductive fiber structure according to any one of claims 1 to 8 for use in acquisition of a biosignal.
- 15 10. A method for producing an electric conductive fiber structure comprising a process that an electric conductive resin containing an electric conductive polymer and having a dispersion particle diameter of less than 200 nm is supported in a surface of single fibers included in a fiber structure and is filled in gaps between single fibers
- 20 included in a fiber structure.
- 25 11. The method for producing an electric conductive fiber structure according to claim 10, wherein the electric conductive resin contains a mixture of the electric conductive polymer(s) and binder resin(s) as a main component.
- 30 12. A method for producing an electric conductive fiber structure comprising a process that an electric conductive resin containing an electric conductive polymer and having an average particle diameter of 20 nm or less is supported in a surface of single fibers included in a fiber structure and is filled in gaps between single fibers included in a

fiber structure.

13. The method for producing an electric conductive fiber
structure according to claim 12, wherein the electric
5 conductive resin contains a mixture of the electric
conductive polymer(s) and binder resin(s) as a main
component.

1/1

FIG.1

OBSERVED RANGE: 30 μm $\times$ 30 μm 