



(51) International Patent Classification:

B24B 55/10 (2006.01) **B24B 41/047** (2006.01)
B24B 55/06 (2006.01)

(21) International Application Number:

PCT/FI2017/050079

(22) International Filing Date:

13 February 2017 (13.02.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **KWH MIRKA LTD** [FI/FI]; Pensalavägen
210, 66850 JEPPÖ (FI).

(72) Inventors: **FINNÄS, Stig**; Gästgiversvägen 29, 68690
SUNDBY (FI). **BÄCK, Simon**; Vöråvägen 1075, 66600
Vörå (FI).

(74) Agent: **BERGGREN OY**; Visiokatu 1, 33720 TAMPERE
(FI).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,

MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: CONDUIT ARRANGEMENTS IN INTERMEDIATE PAD, BACKING PAD, AND ABRADING ARTICLE FOR EXTRACTING ABRADING DEBRIS

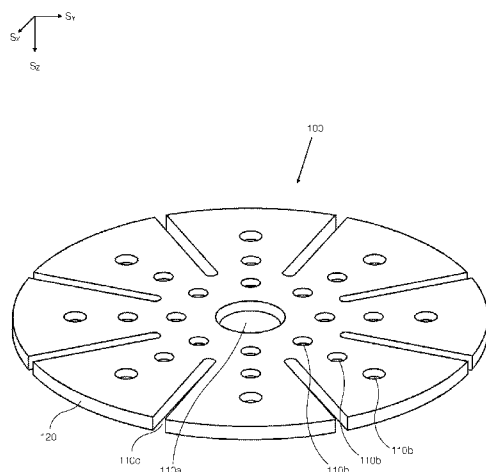


Fig. 3

(57) Abstract: The presented solution discloses conduit arrangements in an intermediate pad (20, 100), a backing pad (10, 200) and an abrading article (300, 400). The conduit arrangements enable controlled conveyance of air onto and extraction of air and debris from the surface of an intermediate pad (20, 100), a backing pad (10, 200) and an abrading article (300, 400). The presented solution is an intermediate pad (20, 100) suitable for use in an abrading system. The presented solution is an abrading system comprising an intermediate pad (20, 100). The presented solution is a backing pad (10, 200) suitable for use in an abrading apparatus (1). The presented solution is an abrading system comprising a backing pad (10, 200). The presented solution is an abrading article (300, 400) suitable for use in an abrading system. The presented solution is an abrading system comprising an abrading article (300, 400). The presented solution further relates to methods of using an abrading system for extracting abrading debris.

CONDUIT ARRANGEMENTS IN INTERMEDIATE PAD, BACKING PAD, AND ABRADING ARTICLE FOR EXTRACTING ABRADING DEBRIS

5 FIELD

The solution to be presented relates to extracting debris during abrading a work piece with an abrading apparatus.

- 10 The solution relates to an intermediate pad suitable for use in an abrading system. The solution relates to an abrading system comprising an intermediate pad. The solution relates to a backing pad suitable for use in an abrading apparatus. The solution relates to an abrading system comprising a backing pad. The solution relates to an abrading article suitable for use in an abrading system. The solution relates to an abrading system comprising an abrading article.
- 15 The solution further relates to methods of using an abrading system for extracting abrading debris.

BACKGROUND

- 20 Abrading is performed in a multitude of contexts such as automobile repair and paint work, building construction and repair, and manufacturing and repairing furniture and the like. In all such contexts, abrading creates debris which should be efficiently and controllably extracted from the abrading process, because remaining debris negatively affects abrading efficiency and result, and constitutes a health hazard and a nuisance if spread out. In some abrading
- 25 applications, user control, cost efficiency and/or resulting surface quality can be improved by using an intermediate pad between the abrading article and the backing pad of an abrading apparatus.

30 SUMMARY

The presented solution is an intermediate pad suitable for use in an abrading system. The presented solution is an abrading system comprising an intermediate pad. The presented solution is a backing pad suitable for use in an abrading apparatus. The presented solution is

an abrading system comprising a backing pad. The presented solution is an abrading article suitable for use in an abrading system. The presented solution is an abrading system comprising an abrading article. The presented solution further relates to methods of using an abrading system for extracting abrading debris.

5

The presented solution discloses conduit arrangements in an intermediate pad, a backing pad and an abrading article. Such an intermediate pad, a backing pad and an abrading article are suitable for use in an abrading system comprising an abrading apparatus capable of producing sucking pressure or capable of being connected to a source of sucking pressure for the
10 purposes of extracting abrading debris away from the abrading process with the suction pressure.

When the said conduit arrangements are implemented on an intermediate pad, they may be adapted for improved conveyance of abrading debris away from the intermediate pad and an
15 abrading article.

Such an intermediate pad may be suitable for use in an abrading system comprising an abrading apparatus adapted to provide suction pressure. Such an intermediate pad may comprise an upper surface layer comprising attachment elements suitable for attaching the
20 upper surface layer to a backing pad of an abrading apparatus, a lower surface layer comprising attachment elements suitable for attaching the lower surface layer to an abrading article, optionally a single- or multi-ply intermediate layer or layers between and attached to the upper surface layer and the lower surface layer, a lower surface facing the abrading article, an upper surface facing the backing pad, an outer side wall, at least one medial conduit which
25 terminates with an orifice on the lower surface and is suitable for conveying air and abrading debris from the lower surface, and at least one peripheral conduit which extends from the outer side wall terminating with an orifice on the lower surface, is suitable for conveying incoming air onto the lower surface and is separated from the medial conduits by an unbroken portion of the intermediate pad.

30

When the said conduit arrangements are implemented on a backing pad, they may be adapted for extracting abrading debris away from the backing pad and an abrading article as well as an intermediate pad, if the abrading system comprises an intermediate pad.

Such a backing pad may be suitable for use in an abrading system comprising an abrading apparatus adapted to provide suction pressure. Such a backing pad may comprise a body comprising attachment elements suitable for attaching the body to an abrading apparatus, a lower surface layer which may be attached to the body and comprise attachment elements
5 suitable for attaching the lower surface layer to a abrading article, a lower surface facing the abrading article, an outer side wall, at least one medial conduit which terminates with an orifice on the lower surface and is suitable for conveying air and abrading debris from the lower surface, and at least one peripheral conduit which extends from the outer side wall terminating with an orifice on the lower surface, is suitable for conveying incoming air onto
10 the lower surface and is separated from the medial conduits by an unbroken portion of the backing pad.

When the said conduit arrangements are implemented on an abrading article, they may be adapted for extracting abrading debris away from the interface between an abrading article and
15 an abraded workpiece and/or from the interface between an abrading article and a backing pad or an intermediate pad.

Such an abrading article may be suitable for use in an abrading system comprising an abrading apparatus adapted to provide suction pressure. Such an abrading article may comprise an
20 upper surface layer which may comprise attachment elements suitable for attaching the upper surface layer to a backing pad of an abrading apparatus or to an intermediate pad, an upper surface facing the backing pad or the intermediate pad, a lower surface layer with a lower surface which comprises abrasive material such that the lower surface may be used for abrading a workpiece, an optional single- or multi-ply intermediate layer which may
25 additionally be porous and/or comprise multiple plies, an outer side wall, and at least one peripheral conduit which extends from the outer side wall to the lower surface and is separated from any other possible conduits by an unbroken portion of the abrading article. Advantageously, the lower surface layer may comprise an open mesh with small openings, which mesh is coated with abrasive particles.

30

The disclosed conduit arrangements and related methods for extracting abrading debris provide the benefit of advantageously directing air and debris flows on the surface of the intermediate pad, backing pad and/or the abrading article so that the surface is evenly flushed, when suitably used as attached to an abrading apparatus adapted to provide suction pressure.

Such advantageous directing of air comprises controllably introducing incoming air also onto the medial regions of the said surfaces so as to bring about even flushing of the said surfaces including their medial regions. According to the disclosed conduit arrangements, peripheral conduits, which are blind in that they do not convey air and/or debris into any conduit in
5 another component in the system, may force air and/or debris to pass over the said surfaces before reaching the nearest suction pressure-connected extraction conduit.

Such forced passing over the said surfaces by air and/or debris may bring about significantly more even flushing of the said surfaces than is the case with known backing pads,
10 intermediate pads and abrading articles. Namely, with known backing pads, intermediate pads and abrading articles, the flushing of the medial regions of the said surfaces is less complete than the flushing of the central regions and peripheral regions.

Such even flushing of the said surfaces has the benefit of eliminating or reducing the amount
15 of abrading debris remaining in the said surfaces. This is beneficial, because debris remaining in the abrading process, i.e. in the interface between an abrading article and an intermediate pad or a backing pad and/or in the interface between an abrading article and the abraded work piece may adversely affect abrasion efficiency and resulting surface quality, and may even clog the abrading article. In addition, any debris caught between the abrading article and the
20 component of the abrading system it is attached to, i.e. an intermediate pad or a backing pad, may progressively damage the attachment elements until eventual failure. For example, drywall plaster dust may gradually abrade the hooks of a hook-and-loop fastening system on a backing pad or an intermediate pad to the extent that the backing pad or the intermediate pad must be replaced. Such replacement increases the cost of abrading, interrupts the work for the
25 duration of replacement and requires a stock of replacements to be kept. Furthermore, accumulated debris on the abrading article, the intermediate pad and/or the backing pad adds to the weight of the system component on which debris accumulates, resulting in an imbalanced abrading system with compromised user control, abrading efficiency and surface quality.

30

The disclosed intermediate pad may be used as a part of an abrading system comprising an abrading apparatus, a backing pad and the disclosed intermediate pad. For abrading a work piece, the disclosed intermediate pad may be attached to an abrading article which is preferably porous and most preferably an abrading net which comprises an open mesh with

small openings, which mesh is coated with abrasive particles. The backing pad and/or the abrading article may be of the type that does not comprise conduit arrangements according to as disclosed.

- 5 The disclosed backing pad may be used as a part of an abrading system comprising an abrading apparatus and the disclosed backing pad. For abrading a work piece, the disclosed backing pad may be attached to an abrading article which is preferably porous and most preferably an abrading net which comprises an open mesh with small openings, which mesh is coated with abrasive particles. The abrading article may be of the type that does not comprise
10 conduit arrangements according to as disclosed.

The disclosed abrading article may be used as a part of an abrading system comprising an abrading apparatus and a backing pad and optionally an intermediate pad. For abrading a work piece, the disclosed abrading article may be attached to a backing pad, or the abrading article
15 may be attached to an intermediate pad which is attached to a backing pad. The backing pad and/or the intermediate pad may be of the type that does not comprise conduit arrangements according to as disclosed.

An abrading system comprising the disclosed intermediate pad, the disclosed backing pad or
20 the disclosed abrading article may have applications in automobile repair and paint work, building construction and repair, and manufacturing and repairing furniture and the like.

BRIEF DESCRIPTION OF THE DRAWINGS

25

The figures illustrate example embodiments of the presented solution, and are not to be taken to be limiting the scope its use. The figures are not in any particular scale. Moreover, any conduits in the Figures are illustrated schematically, and therefore the precise shapes and contours of the conduits may be varied while adhering to their general principles as illustrated.

30

Figure 1 illustrates an abrading apparatus 1, equipped with a backing pad 10, an intermediate pad 20, 100 and an abrading article 300, 400.

- Figure 2 illustrates a cross section view of an abrading apparatus **1** with conduits **2**, and the apparatus **1** equipped with a backing pad **10**, an intermediate pad **100** and an abrading article **300**.
- 5 Figure 3 illustrates an example embodiment of an intermediate pad **100**.
- Figure 4 illustrates a layer structure of an intermediate pad **100** as attached to a backing pad **10** and an abrading article **300**.
- 10 Figures 5a through 5f illustrate different exemplary types of conduits **110a-c** in an intermediate pad **100** depicted in partial cross section as attached to a backing pad **10** and an abrading article **300**.
- Figure 6 illustrates an abrading apparatus **1** equipped with a backing pad **200** and an
15 abrading article **300**.
- Figure 7 illustrates an example embodiment of a backing pad **200** as viewed from below, plus a cross-sectional view.
- 20 Figure 8 illustrates a layer structure of a backing pad **200** as attached to an abrading article **300**.
- Figures 9a through 9e illustrate different exemplary types of conduits **210a-c** in a backing pad **200** as attached to an abrading article **300**.
- 25 Figure 10a illustrates the directions of air flows on the lower surface of an intermediate pad **100** and a backing pad **200** according to example embodiments.
- Figure 10b illustrates the directions of air flows on the lower surface of an intermediate pad
30 **20** or a backing pad **10** according to a conventional, known solution.

Figures 11a

through 11f illustrate different exemplary configurations of conduits in an intermediate pad and/or a backing pad and/or an abrading article according to example embodiments, as viewed from below.

5

Figure 12 illustrates a cross section view of an abrading apparatus **1** with conduits **2**, and the apparatus **1** equipped with a backing pad **200** and an abrading article **300**.

Figure 13a illustrates an example embodiment of an abrading article **400** as viewed from below.

10

Figure 13b illustrates an example embodiment of an abrading article **400** as viewed from below.

Figure 13c illustrates an example embodiment of an abrading article **400** as viewed from below.

15

Figure 14 illustrates a layer structure of an abrading article **400** as attached to a backing pad **10** or an intermediate pad **20**.

20

Figures 15a through 15d illustrate different exemplary types of conduits **410a-c** in an abrading article **400** depicted in partial cross section as attached to a backing pad **10** or an intermediate pad **20**.

Figure 16 illustrates a cross section view of an abrading apparatus **1** with conduits **2**, and the apparatus **1** equipped with a backing pad **10** and an abrading article **400**.

25

Figures 17a through 17e illustrate different exemplary configurations of peripheral conduits in an abrading article according to example embodiments with no central conduit and no medial conduits.

30

Figure 18 illustrates an abrading apparatus **1** equipped with a backing pad **10** and an abrading article **400**.

DETAILED DESCRIPTION

In all abrading, whether abrading a discrete work piece or a larger surface such as a wall or a ceiling, abrading debris is created. This debris comprises abraded material from the abraded surface as well as abrasive particles detached from an abrading article such as a sandpaper or a sanding net. In the interest of abrading productivity, a high volume of abraded material from the abraded surface and therefore a high and constant volume of abrading debris is desirable.

- 10 Debris extraction and conveyance is commonly brought about with a suction-based system such that there are holes on a backing pad and an abrading article through which abrading debris is sucked away from the abrading process. However, with a uniformly porous abrading article such as an abrading net, characterized by a high number of apertures distributed over the entire surface of the abrading article, debris may accumulate on a backing pad or an intermediate pad if the attachment area remains unevenly flushed. Adding more suction holes does not bring about even flushing, as illustrated in Figure 10*b*, without controlled introduction of incoming air onto the surface to be flushed through conduits on and/or terminating with orifices on the lower surface, as illustrated in Figure 10*a*.
- 20 The following text describes a solution to enable such even extraction of abrading debris with a novel configuration of conduits which can be implemented in a backing pad, in an intermediate pad and an abrading article. The conduit configurations may differ with respect to the precise embodiment of a backing pad, and intermediate pad and an abrading article, but they share the same guiding principles especially with respect to controllably introducing incoming air to the medial region of the product in question.
- 25

In the text, reference is made to the figures with the following numerals and denotations:

S_x , S_y and S_z denote orthogonal directions.

30

- 1 Abrading apparatus
- 2 Conduit
- 3 Source of suction pressure
- 4 Debris collection receptacle

- 10 10 Backing pad
- 11*a* 11*a* Central conduit
- 11*b* 11*b* Medial conduit
- 12 12 Outer side wall
- 5 20 Intermediate pad
- 100 100 Intermediate pad
- 110*a* 110*a* Central conduit
- 110*b* 110*b* Medial conduit
- 110*c* 110*c* Peripheral conduit
- 10 120 Outer side wall
- 130 130 Upper surface layer
- 140 140 Intermediate layer
- 150 150 Lower surface layer
- 160 160 Lower surface
- 15 170 Upper surface
- 200 200 Backing pad
- 210*a* 210*a* Central conduit
- 210*b* 210*b* Medial conduit
- 210*c* 210*c* Peripheral conduit
- 20 220 Outer side wall
- 230 230 Body
- 240 240 Lower surface layer
- 250 250 Lower surface
- 260 260 Upper surface
- 25 300 Abrading article
- 310 310 Outer side wall
- 400 400 Abrading article
- 410*a* 410*a* Central conduit
- 410*b* 410*b* Medial conduit
- 30 410*c* Peripheral conduit
- 420 420 Outer side wall
- 430 430 Upper surface layer
- 440 440 Intermediate layer
- 450 450 Lower surface layer

460 Lower surface

470 Upper surface

5 Intermediate pad

An intermediate pad **100** according to one embodiment is shown in Figure **3**. The intermediate pad **100** may have a plurality of conduits **110a-110c** for desirably directing flows of air, when used as a part of an abrading system used for abrading a work piece. Such desirable
10 flows of air, as exemplified in Figure **10a**, flush the surface of the intermediate pad **100** evenly for extracting abrading debris so that very little abrading debris remains on the surface of the intermediate pad **100**, with the resulting benefits that the lifetime of the intermediate pad **100** is increased and the abrading process is not impaired by accumulated debris in the system. As is known, flows of air capture abrading debris and convey the captured abrading debris away
15 from the surfaces of the intermediate pad **100** as the flows of air exit the surface of the intermediate pad **100**.

The structure of the intermediate pad **100** according to one embodiment is illustrated in Figure **4**, as attached between a backing pad **10** and an abrading article **300**.

20

According to the embodiment illustrated in Figure **4**, the intermediate pad **100** may comprise an upper surface layer **130**, a lower surface layer **150** and an intermediate layer **140**. In another embodiment, the intermediate pad **100** may comprise the upper surface layer **130** and the lower surface layer **150**, and no intermediate layer. In yet another embodiment, the
25 intermediate pad **100** may comprise the upper surface layer **130**, the lower surface layer **150** and the intermediate layer **140** such that the intermediate layer **140** comprises two or more plies, which plies may be, for example, of different materials.

The intermediate pad **100** has an outer side wall **120** enclosing the upper surface layer **130**, the
30 lower surface layer **150** and the intermediate layer **140**, if any. In the embodiment illustrated in Figure **4**, the outer side wall **120** has a wall surface which may be on a plane substantially perpendicular to the upper surface layer **130** and the lower surface layer **150**. In other embodiments, the outer side wall **120** may be inclined such that the circumference of the

intermediate pad **100** is greater at the lower surface **160** than at the upper surface **170**, or vice versa.

The upper surface layer **130** may comprise attachment elements for attaching the intermediate pad **100** to a backing pad, and the lower surface layer **150** may comprise attachment elements for attaching the intermediate pad **100** to an abrading article. Such attachment elements may enable mechanical or adhesive attachment. Advantageously, such attachment enables removal and re-attachment. According to a preferred embodiment, attachment elements may comprise hook-and-loop type of fastening with the capability for convenient re-attachment. In this preferred embodiment, the upper surface layer **130** of the intermediate pad **100** may comprise hooks and the lower surface layer of the backing pad **10** may comprise loops, or vice versa, and/or the lower surface layer **150** of the intermediate pad **100** may comprise hooks and the upper surface layer of the abrading article **300** may comprise loops, or vice versa.

In another embodiment, the attachment elements may be premised on pressure sensitive adhesion, i.e. PSA. In such an embodiment, the upper surface layer **130** of the intermediate pad **100** may comprise pressure sensitive adhesive and the lower surface layer of the backing pad **10** may comprise an even surface adapted for pressure sensitive adhesion, or vice versa, and/or the lower surface layer **150** of the intermediate pad **100** may comprise pressure sensitive adhesive and the upper surface layer of the abrading article **300** may comprise an even surface adapted for pressure sensitive adhesion, or vice versa.

In the specific embodiment depicted in Figure 4 which comprises the intermediate layer **140** and in such embodiments that comprise the intermediate layer **140** comprising multiple plies, the thickness and the material or materials of the intermediate layer **140** may be selected according to application. Examples of design choices concerning the characteristics of the intermediate layer **140** may include absorption of mechanical vibration, absorption of sound, weight, recyclability, cost, manufacturability, plasticity, and the attachability to the other layers of the intermediate pad **100**. Such choices may affect the controllability of the abrading system as well as the quality of the abraded surface.

In the specific embodiment comprising the intermediate layer **140** and illustrated in Figure 4, examples of materials which the intermediate layer **140** may comprise include soft materials such as foamed polypropylene, foamed polyethylene, foamed acrylonitrilebutadienestyrene,

foamed polyurethane, foamed polyamide, foamed ethylene vinyl acetate or similar, and hard materials such as polypropylene, polyethylene, acrylonitrilebutadienestyrene, polyurethane, polyamide, aluminum or similar.

- 5 The intermediate pad **100** comprises a central region referring to the portion of the intermediate pad **100** at and near its center, a peripheral region referring to the portion of the intermediate pad **100** at and near its outer side wall **120**, and a medial region referring to the portion of the intermediate pad **100** between the central and peripheral regions. The central region, the peripheral region and the medial region are defined on the S_x, S_y plane.

10

According to the embodiment illustrated in Figure **3** in which the intermediate pad **100** has a circular shape, the central region may extend radially from the center of the intermediate pad **100** towards its outer side wall **120** to the distance of no more than 5%, or 10%, or 15%, or 20%, or 25%, or 30%, or 35% of the radius of the intermediate pad **100**, and the peripheral
15 region may extend radially from the outer side wall **120** of the intermediate pad **100** towards its center to the distance of at least 10%, or 15%, or 20%, or 25%, or 30%, or 35% of the radius of the intermediate pad **100**.

In the specific embodiment depicted in Figure **3**, the central region may extend radially from
20 the center of the intermediate pad **100** towards its outer side wall **120** to the distance of 20% of the radius of the intermediate pad **100**, and the peripheral region may extend radially from the outer side wall **120** of the intermediate pad **100** towards its center to the distance 20% of the radius of the intermediate pad **100**.

25 In other embodiments with different shapes for the intermediate pad **100** on the S_x, S_y plane, such as the intermediate pad **100** being rectangular or triangular, the central region, the medial region, and the peripheral region may be similarly defined by replacing the notion of a radius with the distance between the center of the intermediate pad **100** and any given point at the outer side wall **120**, for example, the nearest point with respect to the center of the
30 intermediate pad **100**.

The intermediate pad **100** may comprise a plurality of conduits **110a-110c** which may terminate with orifices on the lower surface **160**. Such conduits may comprise a central conduit or conduits **110a** located in or at least originating from the central region, a medial conduit or

conduits **110b** located in the medial region, and/or a peripheral conduit or conduits **110c** originating from the peripheral region and extending into the medial region. Such conduits **110a-110c** may be surrounded by an unbroken portion of the intermediate pad **100** such that no conduit **110a-110c** extends into another conduit **110a-110c**. The central conduit **110a** and the
5 peripheral conduit or conduits **110c** may not be connected to a source of suction pressure, for example to a medial conduit or conduits **110b**.

An unbroken portion of the intermediate pad refers to a portion of the intermediate pad **100** which contains no conduit or conduits **110a-110c**, and therefore resists the flow of air to such a
10 degree that air will flow substantially more freely along a conduit **110a-110c** than through an unbroken portion of the intermediate pad **100**. The purpose of conduits **110a-110c** being separated from each other by unbroken portions of the intermediate pad **100** is to enable controlled conveyance of air through the conduits **110a-110c** so that surface flushing can be brought about with air flowing from conduits not connected to suction pressure to conduits
15 connected to suction pressure over the surface of the intermediate pad **100**. Such controlled conveyance of air would be disturbed if the flow of air was to leak from one conduit **110a-110c** directly into another.

As the peripheral conduit or conduits **110c** may extend into the medial region of the
20 intermediate pad **100**, the peripheral conduit or conduits **110c** may extend to the distance of more than 10%, or 15%, or 20%, or 25%, or 30%, or 35% of the distance between the starting point of the peripheral conduit **110c** at the outer side wall **120** and the center of the intermediate pad **100** in correspondence with what was said about the extent of the peripheral region above.

25

The technical effect of separating the medial conduits **110b** adapted to be connected to suction pressure in an abrading system from conduits **110a,110c** not adapted to be connected to suction pressure in the abrading system is to enable controlling the flow of air from ambient pressure to low, i.e. suction pressure in order to bring about even flow of air over and across
30 the surface of the intermediate pad **100**. In the embodiment illustrated in Figure 3, the medial conduits **110b** may be adapted to be connected to suction pressure in an abrading system, and the central conduit **110a** and the peripheral conduits **110c** may not be adapted to be connected to suction pressure.

The peripheral conduits **110c** may pass through the outer side wall **120** of the intermediate pad **100**. The peripheral conduits **110c** may be elongated such that the peripheral conduits **110c** may extend from the peripheral region of the intermediate pad **100** to its medial region such that the end of the peripheral conduit **110c** which is nearest to the center of the intermediate pad **100** is nearer to the center of the intermediate pad **100** than the medial conduit **110b** which is most distant from the center of the intermediate pad **100**. The peripheral conduits **110c** may extend in the direction of or towards the central conduit **110a** and/or the central region.

If suitably used as a part of an abrading system, as illustrated in Figures **1** and **2**, the central and peripheral conduits **110a** and **110c** may be used for introducing incoming air onto the lower surface **160** of the intermediate pad **100**, and the medial conduits **110b** may be used for conveying air and debris away from the said surface.

Figure **3** illustrates the configuration of the conduits **110a-110c** according to a specific embodiment. In this embodiment there is at least one central conduit **110a** located in the central region; a plurality of medial conduits **110b** located in the medial region such that the medial conduits **110b** are arranged along three concentric circles which are concentric with the center of the intermediate pad **100** with each concentric circle having several medial conduits **110b**, for example eight medial conduits **110b**, preferably with equal mutual distances; and several peripheral conduits **110c**, for example eight peripheral conduits **110c**, preferably with equal mutual distances, which peripheral conduits **110c** pass through the outer side wall **120** of the intermediate pad **100**. The central conduits **110a** and/or the medial conduits **110b** may be circular on the lower surface **160** of the intermediate pad **100**.

The peripheral conduits **110c** may be elongated such that the peripheral conduits **110c** extend towards the center of the intermediate pad **100** and into its the medial region so that the ends of the peripheral conduits **110c** extend towards the center of the intermediate pad **100** to the distance of more than half of the radius of the intermediate pad **100**.

Figures **11a** through **11f** illustrate examples of different conduit configurations which may be used in other embodiments of the intermediate pad **100**, or from which specific conduit geometries may be adopted into the intermediate pad **100** provided with the conduits **110a-110c**. According to an example configuration illustrated in Figure **11a**, there may be a plurality of elongated peripheral conduits having a curvature. According to an example illustrated in

Figure 11*b*, there may be a plurality of elongated peripheral conduits with branching. According to an example illustrated in Figure 11*c*, there may be more than one type of elongated peripheral conduits such that there may be a plurality of branching peripheral conduits and a plurality of non-branching peripheral conduits. According to an example
5 illustrated in Figure 11*d*, there may be a branching central conduit, and there may be a plurality of elongated peripheral conduits such that some of the elongated peripheral conduits extend from the peripheral region of the intermediate pad 100 to its medial region in a direction other than towards the center of the intermediate pad 100. According to an example illustrated in Figure 11*e*, there may be a plurality of elongated medial conduits with branching. According an
10 example illustrated in Figure 11*f*, there may be a plurality of elongated peripheral conduits with an angle. While Figures 11*a* through 11*f* illustrate examples of different conduit configurations on the circular intermediate pad 100, the illustrated geometrical principles may be implemented on the intermediate pad 100 with a different shape, such as rectangular or triangular, as well.

15

In the specific embodiment illustrated in Figure 3, the conduits 110*a*-110*c* may extend through the entire thickness of the intermediate pad 100 on the S_z axis. That is, in this embodiment, the conduits 110*a*-110*c* may extend from the upper surface 170 of the intermediate pad 100 to its lower surface 160.

20

In the embodiment premised on what is illustrated in Figure 3 and Figure 4, the conduits 110*a*-110*c* may extend from the upper surface 170 of the intermediate pad 100, through its upper surface layer 130, intermediate layer 140 and lower surface layer 150, and finally to the lower surface 160 of the intermediate pad 100. In this embodiment, the central conduit 110*a*
25 and the medial conduits 110*b* are of the type illustrated in Figure 5*a*, i.e. a hole which extends through the entire thickness of the intermediate pad 100, and the peripheral conduit 110*c* is of the type illustrated in Figure 5*f*, i.e. a slit which extends through the entire thickness of the intermediate pad 100 and as shown in Figure 3 and Figures 11*a* through 11*f*.

30 Figures 5*b*, 5*c*, 5*d* and 5*e* illustrate conduit types which may be employed in other embodiments of the intermediate pad 100 premised on the layer structure illustrated in Figure 4, i.e. in such embodiments which comprise the intermediate layer 140. Conduit types illustrated in Figures 5*a* and 5*f* may be employed in embodiments of the intermediate pad 100 with or without the intermediate layer 140.

Figure 5*b* illustrates an example of the peripheral conduit **110c** which originates from and passes through the outer side wall **120** of the intermediate pad **100**, and is elongated on the S_x , S_y plane, has an equally elongated orifice on the lower surface **160** of the intermediate pad **100**, and extends on the S_z axis through the lower surface layer **150**, partially through the intermediate layer **140** and not into the upper surface layer **130**. This conduit type is for example a groove on the lower surface **160** of the intermediate pad **100**, the groove being open towards the abrading article **300**. Preferably, the groove has an open end at the outer side wall **120** and at least one opposite, closed end. This conduit type may be modified so that it extends on the S_z axis through the intermediate layer **140** entirely instead of partially, in which case this conduit type may be used in embodiments of the intermediate pad **100** which may not comprise the intermediate layer **140**.

Figure 5*d* illustrates an example of the peripheral conduit **110c** and/or the central conduit **110a**, which originates from and passes through the outer side wall **120** of the intermediate pad **100**, travels within the intermediate layer **140** and may be configured puncture the lower surface **160** in a desired location, including the center of the intermediate pad **100**. This may enable freedom of choice over the location on the lower surface **160** of the intermediate pad **100** to which incoming air is conveyed, including an advantageous use of the intermediate pad **100** with the backing pad **10** and/or an abrading apparatus with no central air conduit. This conduit type used as the peripheral conduit **110c** comprises for example a groove on the lower surface **160**, the groove being open towards the abrading article **300**. In such a case, the peripheral conduit **110c** preferably comprises the groove with at least two closed ends and an orifice on the outer side wall **120**. In other words, in this preferable case the peripheral conduit **110c** has an elongated orifice on the lower surface **160**. This conduit type may be modified so that it extends on the S_z axis through the intermediate layer **140** entirely instead of partially.

Figures 5*c* and 5*e* illustrate the central conduit **110a** and/or the medial conduit **110b** with orifices transversally offset on the S_x , S_y plane in the upper surface layer **130** and the lower surface layer **150**. This enables advantageous configuring of conduits on the lower surface **160** of the intermediate pad **100** differently from the conduit configuration on the upper surface **170** and in the backing pad **10**. This conduit type may be modified so that it extends on the S_z axis through the intermediate layer **140** entirely instead of partially.

In the intermediate pad **100**, each group of conduits, i.e. the central conduits **110a**, the medial conduits **110b**, and/or peripheral conduits **110c**, may employ a different type of conduit as explained above. Furthermore, each said group of conduits may employ different types of conduits within that group such that more than one of the conduit types explained above and
5 illustrated in Figure **5a** to Figure **5f** may be used within a group of conduits.

In the intermediate pad **100**, each group of conduits, i.e. the central conduits **110a**, the medial conduits **110b**, and/or peripheral conduits **110c**, may use conduit type different from another group of conduit.

10

The intermediate pad **100** according to the specific embodiment illustrated in Figure **3** and Figure **4**, i.e. the embodiment comprising the intermediate layer **140** and the conduits **110a-110c** which extend from the upper surface **170** to the lower surface **160**, may be manufactured for example by punching. Such punching may be carried out with suitable punches and dies, a
15 sheet comprising the upper surface layer **130**, the intermediate layer **140** and the lower surface layer **150**. Such layers may be attached to each other adhesively prior to punching. Alternatively, such layers may be punched separately and attached to each other after punching, for example adhesively.

20 The intermediate pad **100** without the intermediate layer **140** but otherwise in accordance to the said specific embodiment illustrated in Figure **3** and **4** may be similarly manufactured by punching. Such punching may be carried out with suitable punches and dies, a sheet comprising the upper surface layer **130** and the lower surface layer **150**. Such layers may be attached to each other adhesively prior to punching. Alternatively, such layers may be punched
25 separately and attached to each other after punching, for example adhesively.

Embodiments of the intermediate pad **100** comprising conduits of the types illustrated in Figures **5b**, **5c**, **5d** and/or **5e** may be manufactured for example by manufacturing additively, such as with three-dimensional printing, the intermediate layer **140**, punching the upper
30 surface layer **130** and the lower surface layer **150** out of a sheet of suitable material, and finally attaching the all the layers **140**, **130** and **150** to each other adhesively.

The intermediate pad **100** as explained above may be used in an abrading system comprising an abrading apparatus **1** and the backing pad **10** and the intermediate pad **100**, as illustrated in

Figure 1 according to one embodiment. The intermediate pad **100** may be of the type comprising the intermediate layer **140** as explained above, or of the type not comprising the intermediate layer **140** as also explained above. During abrading a work piece with such an abrading system, the abrading article **300** may be attached to the intermediate pad **100**. The
5 abrading article **300** is preferably porous and most preferably an abrading net which comprises an open mesh, which mesh is coated with abrasive particles and comprises a plurality of openings. During abrading, the abrading apparatus **1** may rotate and/or oscillate the backing pad **10**. Such rotation and/or oscillation may be brought about by a source of power of the abrading apparatus **1** such as an electric or a pneumatic motor.

10

The abrading article **300**, the backing pad **10** and the intermediate pad **100** may be of any shape on the S_x , S_y plane, such as rectangular, triangular, or preferably round if rotating. Advantageously, the backing pad **10**, the intermediate pad **100** and the abrading article **300** are substantially of the same shape. The backing pad **10** and the abrading article **300** may be, for
15 example, of conventional, known type, or they may incorporate the principles of the solution disclosed for the backing pad **200** and the abrading article **400**.

An embodiment of the abrading system is illustrated in cross section in Figure 2, wherein the intermediate pad **100** is in accordance with the specific embodiment shown in Figure 3. In this
20 embodiment of the abrading system, the central and medial conduits **110a** and **110b** of the intermediate pad **100** are respectively aligned with the central and medial conduits **11a** and **11b** of the backing pad **10**. Furthermore, the medial conduits **11b** of the backing pad **10** are aligned with the conduits **2** of the abrading apparatus **1**. The conduits **2** of the abrading apparatus **1** may be connected to, or are adapted to be connected to, a source of suction pressure **3** which
25 may comprise a debris collection receptacle **4**.

It is to be generally understood that for conduits to be aligned, the conduits do not necessarily have to be geometrically perfectly aligned such that, for example, their orifices would perfectly match each other without any geometrical offset or difference in area, or that the conduits
30 would need to be hermetically coupled to each other. Instead, conduits are to be understood to be aligned when they constitute a functional air and/or debris conveyance pathway, i.e. it is possible to convey air and/or debris from one conduit into another.

During operation of the abrading system, the central conduit **11a** of the backing pad **10** may convey incoming air through the central conduit **110a** of the intermediate pad **100** onto the lower surface **160** of the intermediate pad **100**. The peripheral conduits **110c** (not visible in the cross section in Figure 2), extending on the S_x , S_y plane from the medial region of the intermediate pad **100** to its peripheral region and through its outer side wall **120** may be blind in that on the backing pad **10** there are no corresponding apertures or conduits aligned with the peripheral conduits **110c**. Thus, the peripheral conduits **110c** are not connected to suction pressure.

10 According to the embodiment illustrated in Figure 2, during abrading, abrading debris may be extracted from the lower surface **160** of the intermediate pad **100**, that is from the space between the intermediate pad **100** and the abrading article **300** housing their attachment elements, with suction pressure led through the medial conduits **110b** of the intermediate pad **100**, then through the medial conduits **11b** of the backing pad **10** into the conduits **2** of the
15 abrading apparatus **1**. The extracted abrading debris may be conveyed into a debris collection receptacle **4**. Replacement air, pulled in by suction pressure onto the lower surface **160** of the intermediate pad **100**, may originate through the central conduit **110a**, the peripheral conduits **110c** and over the outer side wall **120** of the intermediate pad **100**. As the peripheral conduits **110c** may be blind, as explained above, incoming air through these conduits may be forced to
20 pass over the lower surface **160** of the intermediate pad **100** before reaching the nearest suction pressure-connected medial conduit **110b**, thereby providing surface flushing which extends substantially into the medial regions of the intermediate pad **100**. Figure **10a** illustrates the flow of air on the lower surface **160** of the intermediate pad **100** according to this embodiment.

25

Furthermore, if the abrading article **300** is porous such an abrading net which comprises an open mesh, which mesh is coated with abrasive particles and comprises a plurality of openings, during abrading, abrading debris may move from the abrading article **300** onto the lower surface **160** of the intermediate pad **100**, and the lower surface of the abrading article
30 **300** may be flushed in a similar manner as the lower surface **160** of the intermediate pad **100**.

In other embodiments of the intermediate pad **100**, the conduits **110a-110c** may be differently configured on the S_x , S_y plane, such as according to the examples illustrated in Figures **11a** through **11f**. Additional conduit configurations may be designed for example by combining

conduit types illustrated in Figures 11*a* through 11*f*. Different such configurations may be designed to manage the incoming and outgoing airflows in different applications, including different shapes of the backing pad 10, the intermediate pad 100 and the abrading article 300, such that the lower surface 160 of the intermediate pad 100 may be evenly flushed with air in
5 order to extract abrading debris evenly over the whole surface of the intermediate pad 100, as illustrated according to one embodiment in Figure 10*a*.

In yet other embodiments of the intermediate pad 100, the central conduit or conduits 110*a* may be connected to suction pressure and thereby function as air and debris extraction
10 conduits, instead of conveying incoming air onto the lower surface 160 of the intermediate pad 100. In such embodiments, the central conduit or conduits 110*a* may therefore function similarly to the medial conduits 110*b* according to what has been described above. Such embodiments may otherwise adhere to the principles of the solution as described above. Thus, in such embodiments incoming air may originate through the peripheral conduits 110*c*
15 and over the outer side wall 120 of the intermediate pad 100 and be forced to pass over the lower surface 160 of the intermediate pad 100 before reaching the nearest suction pressure-connected central or medial conduit 110*b*, 110*a* thereby providing surface flushing which extends substantially into the medial and central regions of the intermediate pad 100.

20 Backing pad

A backing pad 200 according to one embodiment is shown in Figure 7. The backing pad 200 may have a plurality of conduits 210*a*-210*c* for desirably directing flows of air and abrading debris, when used as a part of an abrading system used for abrading a work piece. Such
25 desirable flows of air and abrading debris flush the surface of the backing pad 200 evenly so that very little abrading debris remains on the surface of the backing pad 200, with the resulting benefits that the lifetime of the backing pad 200 is increased and the abrading process is not impaired by accumulated debris in the system. As is known, flows of air capture abrading debris and convey the captured abrading debris away from the surfaces of the
30 backing pad 200 as the flows of air exit the surface of the backing pad 200.

The structure of the backing pad 200 according to one embodiment is illustrated in Figure 8, as attached to the abrading article 300.

According to the embodiment illustrated in Figure 8, the backing pad **200** may comprise a body **230**, a lower surface layer **240** and a lower surface **250**. In another embodiment, the backing pad **200** may comprise the lower surface layer **240** and the body **230**, which body **230** may comprise two or more plies, which plies may be, for example, of different materials.

5

The backing pad **200** has an outer side wall **220** enclosing the body **230** and the lower surface layer **240**. In the specific embodiment illustrated in Figure 8, the outer side wall **220** has a wall surface on a plane substantially perpendicular to the body **230** and the lower surface layer **240**. In other embodiments, the outer side wall **220** may be inclined such that the circumference of
10 the backing pad **220** is greater at the lower surface **250** than at the top of the body **220**, or vice versa.

The lower surface layer **240** may comprise attachment elements to attach the backing pad **200** to the abrading article **300**. Such attachment elements may enable mechanical or adhesive
15 attachment. Advantageously, such attachment enables removal and re-attachment. According to a preferred embodiment, attachment elements may comprise hook-and-loop type of fastening with the capability for convenient reattachment. In this preferred embodiment, the lower surface layer **240** of the backing pad **200** may comprise hooks and the upper surface of the abrading article **300** may comprise loops, or vice versa.

20

In another embodiment, attachment elements may be premised on pressure sensitive adhesion, i.e. PSA. In such an embodiment, the upper surface of the abrading article **300** may comprise pressure sensitive adhesive and the lower surface layer **240** of the backing pad **200** may comprise an even surface adapted for pressure sensitive adhesion, or vice versa.

25

The body **230** of the backing pad may comprise attachment elements to attach the backing pad **200** to the abrading apparatus **1**. Such attachment elements may enable mechanical attachment and may advantageously enable removal and re-attachment. Such attachment elements may comprise, as is known, for example, a bolt or bolts, a nut or nuts and/or a
30 screw or screws, with the abrading apparatus **1** having suitable elements for being attached to the attachment elements of the body **230**.

In the specific embodiment depicted in Figure 8 in which the backing pad **200** comprises, in addition to the lower surface layer **240**, the body **230**, the thickness and the material or

materials of the body **230** may be selected according to application. The same applies to embodiments of the backing pad **200** in which the body **230** comprises multiple plies.

Examples of design choices concerning the characteristics of the body **230** may include
5 absorption of mechanical vibration, absorption of sound, weight, recyclability, cost, manufacturability, plasticity, and the attachability to the lower surface layer **240**. Such choices may affect the controllability of the abrading system as well as the quality of the abraded surface.

10 In the specific embodiment illustrated in Figure **8**, examples of materials which the body **230** may comprise include soft materials such as foamed polypropylene, foamed polyethylene, foamed acrylonitrilebutadienestyrene, foamed polyurethane, foamed polyamide, foamed ethylene vinyl acetate or similar, and hard materials such as polypropylene, polyethylene, acrylonitrilebutadienestyrene, polyurethane, polyamide, aluminum or similar.

15

The backing pad **200** comprises a central region referring to the portion of the backing pad **200** at and near its center, a peripheral region referring to the portion of the backing pad **200** at and near its outer side wall **220**, and a medial region referring to the portion of the backing pad **200** between the central and peripheral regions. The central region, the peripheral region
20 and the medial region are defined on the S_x, S_y plane.

According to an embodiment illustrated in Figure **7** in which the backing pad **200** has a circular shape, the central region may extend radially from the center of the backing pad **200** towards its outer side wall **220** to the distance of no more than 5%, or 10%, or 15%, or 20%,
25 or 25%, or 30%, or 35% of the radius of the backing pad **200**, and the peripheral region may extend radially from the outer side wall **220** of the backing pad **200** towards its center to the distance of at least 10%, or 15%, or 20%, or 25%, or 30%, or 35% of the radius of the backing pad **200**.

30 In the specific embodiment depicted in Figure **7**, the central region may extend radially from the center of the backing pad **200** towards its outer side wall **220** to the distance of 20% of the radius of the backing pad **200**, and the peripheral region may extend radially from the outer side wall **220** of the backing pad **200** towards its center to the distance 20% of the radius of the backing pad **200**.

In other embodiments with different shapes for the backing pad **200** on the S_x , S_y plane, such as the backing pad **200** being rectangular or triangular, the central region, the medial region, and the peripheral region may be similarly defined by replacing the notion of a radius with the
5 distance between the center of the backing pad **200** and any given point at the outer side wall **220**, for example, the nearest point with respect to the center of the backing pad **200**.

The backing pad **200** may comprise a plurality of conduits **210a-210c** which may terminate with orifices on the lower surface **250**. Such conduits may comprise at least a central conduit
10 **210a** located in or at least originating from the central region, a medial conduit or conduits **210b** located in the medial region, and/or a peripheral conduit or conduits **210c** originating from the peripheral region and extending into the medial region. Such conduits **210a-210c** may be surrounded by an unbroken portion of the backing pad **200** such that no conduit **210a-210c** extends into another conduit **210a-210c**. The central conduit **210a** and the peripheral conduit
15 or conduits **210c** may not be connected to a source of suction pressure, such as a medial conduit or conduits **210b**.

An unbroken portion of the backing pad **200** refers to a portion of the backing pad **200** which contains no conduit or conduits **210a-210c**, and therefore resists the flow of air to such a
20 degree that air will flow substantially more freely along a conduit **210a-210c** than through an unbroken portion of the backing pad **200**. The purpose of conduits **210a-210c** being separated from each other by unbroken portions of the backing pad **200** is to enable controlled conveyance of air through the conduits **210a-210c** so that surface flushing can be brought about with air flowing from conduits not connected to suction pressure to conduits connected
25 to suction pressure over the lower surface **250** of the backing pad **200**. Such controlled conveyance of air would be disturbed if the flow of air was to leak from one conduit **210a-210c** directly into another.

As the peripheral conduit or conduits **210c** may extend into the medial region of the backing
30 pad **200**, the peripheral conduit or conduits **210c** may extend to the distance of more than 10%, or 15%, or 20%, or 25%, or 30%, or 35% of the distance between the starting point of the peripheral conduit **210c** at the outer side wall **220** and the center of the backing pad **200** in correspondence with what was said about the extent of the peripheral region above.

The technical effect of separating the medial conduits **210b** adapted to be connected to suction pressure in an abrading system from conduits **210a, 210c** not adapted to be connected to suction pressure in the abrading system is to enable controlling the flow of air from ambient pressure to low, i.e. suction pressure in order to bring about even flow of air over and across the surface of the backing pad **200**. In the embodiment illustrated in Figure 7, the medial conduits **210b** may be adapted to be connected to suction pressure in an abrading system, and the central conduit **210a** and the peripheral conduits **210c** may not be adapted to be connected to suction pressure.

- 10 The peripheral conduits **210c** may pass through the outer side wall **220** of the backing pad **200**. The peripheral conduits **210c** may be elongated such that the peripheral conduits **210c** may extend from the peripheral region of the backing pad **200** to its medial region such that the end of a peripheral conduit **210c** which is nearest to the center of the backing pad **200** is nearer to the center of the backing pad **200** than the medial conduit **210b** which is most distant from the center of the backing pad **200**. The peripheral conduits **210c** may extend in the direction of or towards the central conduit **210a** and/or the central region.

If suitably used as a part of an abrading system, as illustrated in Figures 6 and 12, the central and peripheral conduits **210a** and **210c** may be used for introducing incoming air onto the lower surface **250** of the backing pad **200**, and the medial conduits **210b** may be used for conveying air and debris away from the said surface.

Figure 7 illustrates the configuration of the conduits **210a-210c** according to a specific embodiment. In this embodiment there is at least one central conduit **210a** located in the central region; a plurality of medial conduits **210b** located in the medial region such that the medial conduits **210b** are arranged along three concentric circles which are concentric with the center of the backing pad **200** with each concentric circle having several medial conduits **210b**, for example eight medial conduits **210b**, preferably with equal mutual distances; and several peripheral conduits **210c**, for example eight peripheral conduits **210c**, preferably with equal mutual distances, which peripheral conduits **210c** pass through the outer side wall **220** of the backing pad **200**. The central conduits **210a** and/or the medial conduits **210b** may be circular on the lower surface **250** of the backing pad **200**.

The peripheral conduits **210c** may be elongated such that the peripheral conduits **210c** extend towards the center of the backing pad **200** and into its medial region so that the ends of the peripheral conduits **210c** extend towards the center of the backing pad **200** to the distance of more than half of the radius of the backing pad **200**.

5

Figures **11a** through **11f** illustrate examples of different conduit configurations which may be used in other embodiments of the backing pad **200**, or from which specific conduit geometries may be adopted into the backing pad **200** provided with the conduits **210a-210c**. According to an example configuration illustrated in Figure **11a**, there may be a plurality of
10 elongated peripheral conduits having a curvature. According to an example illustrated in Figure **11b**, there may be a plurality of elongated peripheral conduits with branching. According to an example illustrated in Figure **11c**, there may be more than one type of elongated peripheral conduits such that there may be a plurality of branching peripheral conduits and a plurality of non-branching peripheral conduits. According to an example
15 illustrated in Figure **11d**, there may be a branching central conduit, and there may be a plurality of elongated peripheral conduits such that some of the elongated peripheral conduits extend from the peripheral region of the backing pad **200** to its medial region in a direction other than towards the center of the backing pad **200**. According to an example illustrated in Figure **11e**, there may be a plurality of elongated medial conduits with branching. According an
20 example illustrated in Figure **11f**, there may be a plurality of elongated peripheral conduits with an angle. While Figures **11a** through **11f** illustrate examples of different conduit configurations on the circular backing pad **200**, the illustrated geometrical principles may be implemented on the backing pad **200** with a different shape, such as rectangular or triangular, as well.

25 In the specific embodiment illustrated in Figure **7**, the central conduit **210a** and the medial conduits **210b** may extend through the entire thickness of the backing pad **200** on the **S_z** axis. That is, in this embodiment, the central conduit **210a** and the medial conduits **210b** may extend from the upper surface **260** of the backing pad **200** to its lower surface **250**. In the same specific embodiment, the peripheral conduits **210c** may extend on the **S_z** axis through
30 the lower surface layer **240** and partially, but not entirely, through the body **230** of the backing pad **200**. That is, in this embodiment, the peripheral conduits **210c** may have orifices on the lower surface **250** and the outer side wall **220**, but not on the upper surface **260**.

According to this specific embodiment, the central conduit **210a** and/or the medial conduits **210b** may be of the conduit type illustrated in Figure **9a**, i.e. holes which extend through the entire thickness of the backing pad **200**, and the peripheral conduits may be of the type illustrated in Figure **9b**, i.e. a groove on the lower surface **250** of the backing pad **200**, the
5 groove being open towards the abrading article **300** as shown in Figure **7**. Preferably, as shown in Figure **7**, the groove has an open end at the outer side wall **220** and at least one opposite, closed end.

As illustrated in the cross section **A-A** of Figure **7**, the medial conduits **210b** which extend
10 through the entire thickness of the backing pad **200** may be branched such that a medial conduit **210b** has fewer number of orifices on the upper surface **260** than on the lower surface **250**, or vice versa.

Figure **9d** illustrates an example of the central conduit **210a**, which originates from and passes
15 through the outer side wall **220** of the backing pad **200**, travels within the body **230** and may be configured puncture the lower surface layer **240** and the lower surface **250** in a desired location, including the center of the backing pad **200**. This conduit type may be used as the peripheral conduit **210c** with an elongated orifice on the lower surface **250**, with elongation meaning that the length of the orifice is at least 10% or 25% or 100% or 200% greater than
20 the width of the orifice. In such a case the peripheral conduit **210c** comprises a groove on the lower surface **250** with two closed ends and an orifice on the outer side wall **220**, the groove being open towards the abrading article **300**. In other words, in this case the peripheral conduit **210c** resembles a groove like illustrated in Figure **9b** and Figure **7** with the difference that the groove itself is not open at the outer side wall **220**.

25

Figures **9c** and **9e** illustrate the central conduit **210a** and the medial conduit **210b** with orifices transversally offset on the S_x , S_y plane in the body **230** and the lower surface layer **240**. This enables advantageous configuring of conduits on the lower surface **240** of the backing pad **200** differently from the conduit configuration in the abrading apparatus **1**. The cross section **A-A**
30 in Figure **7** illustrates this in the case of the medial conduits **210b**.

Figures **9c**, **9d** and **9e** illustrate conduit types which may be employed in other embodiments of the backing pad **200** premised on the layer structure illustrated in Figure **8**. The same

principles of conduit types as illustrated in Figure 9a through 9e may be employed in embodiments in which the body 230 comprises two or more plies.

In the backing pad 200, each group of conduits, i.e. the central conduits 210a, the medial conduits 210b, and/or peripheral conduits 210c, may employ a different type of conduit as explained above. Furthermore, each said group of conduits may employ different types of conduits within that group such that more than one of the conduit types explained above and illustrated in Figure 9a to Figure 9e may be used within a group of conduits.

- 10 The backing pad 200 according to the specific embodiment illustrated in Figure 7 and Figure 8, i.e. an embodiment with the central conduit 210a and the medial conduits 210b of the type illustrated in Figure 9a and the peripheral conduits 210c of the type illustrated in Figure 9b, may be manufactured for example by molding the body 230 with a suitable plastic such as polypropylene, drilling the central conduit 210a and the medial conduits 210b into the body 230, milling the peripheral conduits 210c into the body 230, punching the lower surface layer 240 with the orifices of the central conduit 210a, the medial conduits 210b and the peripheral conduits 210c from a sheet of suitable material such as a sheet of hook-and-loop fabric, and adhesively attaching the body 230 and the lower surface layer 240 together.
- 20 The backing pad 200 comprising the conduits 210a-210c of the types illustrated in Figures 9c, 9d and/or 9e may be manufactured for example by manufacturing additively, such as with three-dimensional printing, the body 230 comprising the conduits 210 with materials known suitable for three-dimensional printing such as nylon, polyamide or ABS, punching the lower surface layer 240 with the orifices of the central conduit 210a, the medial conduits 210b and/or the peripheral conduits 210c from a sheet of suitable material such as a sheet of hook-and-loop fabric, and adhesively attaching the body 230 and the lower surface layer 240 together.

The backing pad 200 as explained above may be used in an abrading system comprising an abrading apparatus 1 and the backing pad 200, as illustrated in Figure 6 according to one embodiment. During abrading a workpiece with such an abrading system, an abrading article 300 may be attached to the backing pad 200. The abrading article 300 is preferably porous and most preferably an abrading net which comprises an open mesh, which mesh is coated with abrasive particles and comprises a plurality of openings. During abrading, the abrading

apparatus **1** may rotate and/or oscillate the backing pad **10**. Such rotation and/or oscillation may be brought about by a source of power of the abrading apparatus **1** such as an electric or a pneumatic motor

- 5 The abrading article **300** and the backing pad **200** may be of any shape on the S_x , S_y plane, such as rectangular, triangular, or preferably round if rotating. Advantageously, the backing pad **200** and the abrading article **300** are substantially of the same shape. The abrading article **300** may be, for example, of conventional, known type, or it may incorporate the principles of the solution disclosed for the abrading article **400**. If the abrading article **300** comprises
- 10 central, medial and/or peripheral conduits, all or some of such conduits may be aligned with the central, medial and/or peripheral conduits **210a-210c** of the backing pad in accordance with the air conveyance principles described above.

It is to be generally understood that for conduits to be aligned, the conduits do not necessarily

15 have to be geometrically perfectly aligned such that, for example, their orifices would perfectly match each other without any geometrical offset or difference in area, or that the conduits would need to be hermetically coupled to each other. Instead, conduits are to be understood to be aligned when they constitute a functional air and/or debris conveyance pathway, i.e. it is possible to convey air and/or debris from one conduit into another.

20

An embodiment of the abrading system is illustrated in cross section in Figure **12**, wherein the backing pad **200** comprises the central conduit **210a** and a plurality of the medial conduits **210b** of the conduit type depicted in Figure **9a**, and further may comprise a plurality of the peripheral conduits **210c** (not visible in the cross section in Figure **12**) of the conduit types

25 depicted in Figure **9b**. In this embodiment, the medial conduits **210b** of the backing pad **200** may be connected to suction pressure through the conduits **2** of the abrading apparatus **1**. The conduits **2** of the abrading apparatus **1** may be connected to, or are adapted to be connected to, a source of suction pressure **3** which may comprise a debris collection receptacle **4**.

30 During operation of the abrading system according to this embodiment, the central conduit **210a** of the backing pad **200** may convey incoming air onto the lower surface **250** of the backing pad **200**. The peripheral conduits **210c** (not visible in the cross section in Figure **12**), extending on the S_x , S_y plane from the medial region of the backing pad **200** to its peripheral region and through its outer side wall **220**, as illustrated according to one embodiment in

Figure 7, may be blind in that the peripheral conduits **210c** are not connected with the medial conduits **210b**, the central conduit **210a** or the conduits **2** in the abrading apparatus **1** in such a way that any air passing through the peripheral conduits **210c** could travel into the medial conduits **210b**, the central conduit **210a** or the conduits **2** in the abrading apparatus **1** without
5 first travelling over a portion of the lower surface **250** of the backing pad **200**.

In this embodiment, during abrading, abrading debris may be extracted from the lower surface **250** of the backing pad **200**, that is from the space between the backing pad **200** and the abrading article **300** housing their attachment elements, with suction pressure through the
10 medial conduits **210b** of the backing pad **200** into the conduits **2** of the abrading apparatus **1**. The extracted abrading debris may be conveyed into a debris collection receptacle **4**. Replacement air, pulled in by suction pressure onto the lower surface **250** of the backing pad **200**, may originate through the central conduit **210a**, the peripheral conduits **210c** and over the outer side wall **220** of the backing pad **200**. Thus, the peripheral conduits **210c** are not
15 connected to suction pressure. As the peripheral conduits **210c** may be blind, as explained above, incoming air through these conduits may be forced to pass over the lower surface **250** of the backing pad **200** before reaching the nearest suction pressure-connected medial conduit **210b**, thereby providing surface flushing which extends substantially into the medial regions of the backing pad **200**. Figure **10a** illustrates the flow of air on the lower surface **250** of the
20 backing pad **200** according to this embodiment.

Furthermore, if the abrading article **300** is porous such an abrading net which comprises an open mesh, which mesh is coated with abrasive particles and comprises a plurality of openings, during abrading, abrading debris may move from the abrading article **300** onto the
25 lower surface **250** of the backing pad **200**, and the lower surface of the abrading article **300** may be flushed in a similar manner as the lower surface **250** of the backing pad **200**.

In other embodiments of the backing pad **200**, conduits **210a-210c** may be differently configured on the S_x , S_y plane, such as according to the examples illustrated in examples in
30 Figures **11a** through **11f**. Additional conduit configurations may be designed for example by combining conduit types illustrated in Figures **11a** through **11f**. Different such configurations may be designed to manage the incoming and outgoing airflows in different applications, including different shapes of the backing pad **200** and the abrading article **300**, such that the lower surface **250** of the backing pad **200** may be evenly flushed with air in order to extract

abrading debris evenly over the whole surface of the backing pad **200**, as illustrated according to one embodiment in Figure **10a**.

In yet other embodiments of the backing pad **200**, the central conduit or conduits **210a** may
5 be connected to suction pressure and thereby function as air and debris extraction conduits,
instead of conveying incoming air onto the lower surface **250** of the backing pad **200**. In such
embodiments, the central conduit or conduits **210a** may therefore function similarly to the
medial conduits **210b** according to what has been described above. Such embodiments may
otherwise adhere to the principles of the solution as described above. Thus, in such
10 embodiments incoming air may originate through the peripheral conduits **210c** and over the
outer side wall **220** of the backing pad **200** and be forced to pass over the lower surface **250** of
the backing pad **200** before reaching the nearest suction pressure-connected central or medial
conduit **210b, 210a** thereby providing surface flushing which extends substantially into the
medial and central regions of the backing pad **200**.

15

Abrading article

An abrading article **400** according to one example embodiment is shown in Figure **13a**. An
20 abrading article **400** according to another example embodiment is shown in Figure **13b**. An
abrading article **400** according to yet another example embodiment is shown in Figure **13c**.

The abrading article **400** may have a plurality of conduits **410a-410c** for desirably directing
flows of air, when used as a part of an abrading system used for abrading a work piece. Such
25 desirable flows of air flush the surface or surfaces of the abrading article **400** evenly extracting
abrading debris so that very little abrading debris remains on the surface or surfaces of the
abrading article **400**, with the resulting benefits that the lifetime of the abrading article **400** is
increased and the abrading process is not impaired by accumulated debris in the system
and/or on the surface of the abraded work piece. As is known, flows of air capture abrading
30 debris and convey the captured abrading debris away from the surfaces of the abrading article
400 as the flows of air exit the surface of the abrading article **400**.

The structure of the abrading article **400** according to an embodiment is illustrated in Figure
14, as attached to a backing pad **10** or an intermediate pad **20**. The intermediate pad **20** is

adapted to be attached to the backing pad **10**. The backing pad **10** and/or the intermediate pad **20** may be of the conventional, known type and thereby not comprising conduit arrangements according to the solution as disclosed. For example, the backing pad **10** may comprise a plurality of medial conduits, for example circular, and a central conduit, for example circular, but no peripheral conduits. Correspondingly, for example, the intermediate pad **20** may comprise, a plurality of medial conduits, for example circular, and a central conduit, for example circular, but no peripheral conduits

According to the embodiment illustrated in Figure **14**, the abrading article **400** may comprise an upper surface layer **430**, an intermediate layer **440** and a lower surface layer **450**. In another embodiment, the abrading article **400** may comprise the upper surface layer **430** and the lower surface layer **450**, and no intermediate layer. In yet another embodiment, the abrading article **400** may comprise the upper surface layer **430**, the lower surface layer **450** and the intermediate layer **440** such that the intermediate layer **440** comprises two or more plies, which plies may be, for example, of different materials. All these structural embodiments may be applied in the embodiments of the abrading article **400** illustrated in Figures **13a-13c**.

The abrading article **400** has an outer side wall **420** enclosing the upper surface layer **430**, the lower surface layer **450**, and the intermediate layer **440**, if any. In the embodiment illustrated in Figure **14**, the outer side wall **420** has a wall surface which may be on a plane substantially perpendicular to the upper surface layer **430** and the lower surface layer **450**. In other embodiments, the outer side wall **420** may be inclined such that the circumference of the abrading article **400** is greater at the lower surface **460** than at the upper surface **470**, or vice versa.

The upper surface layer **430** may comprise attachment elements for attaching the abrading article **400** to the backing pad **10** or the intermediate pad **20**. Such attachment elements may enable mechanical or adhesive attachment. Advantageously, such attachment enables removal and re-attachment. According to a preferred embodiment, attachment elements may comprise by hook-and-loop type of fastening with the capability for convenient re-attachment. In this preferred embodiment, the upper surface layer **430** of the abrading article **400** may comprise hooks and the lower surface layer of the backing pad **10** or the intermediate pad **20** may comprise loops, or vice versa.

In another embodiment, the, attachment elements may be premised on pressure sensitive adhesion, i.e. PSA. In such an embodiment, the upper surface layer **430** of the abrading article **400** may comprise pressure sensitive adhesive and the lower surface layer of the backing pad **10** or the intermediate pad **20** may comprise an even surface adapted for pressure sensitive
5 adhesion, or vice versa.

In the embodiment depicted in Figure **14** which comprises the intermediate layer **440** and in such embodiments that comprise the intermediate layer **440** comprising multiple plies, the thickness and the material or materials of the intermediate layer **440** may be selected according
10 to application. Examples of design choices concerning the characteristics of the intermediate layer **440** may include absorption of mechanical vibration, absorption of sound, weight, recyclability, cost, manufacturability, plasticity, and the attachability to the other layers of the abrading article **400**. Such choices may affect the controllability of the abrading system as well as the quality of the abraded surface.

15

In the embodiment comprising the intermediate layer **440** and illustrated in Figure **14**, examples of materials which the intermediate layer **440** may include soft materials such as foamed polypropylene, foamed polyethylene, foamed acrylonitrilebutadienstyrene, foamed polyurethane, foamed polyamide, foamed ethylene vinyl acetate or similar, and hard materials
20 such as polypropylene, polyethylene, acrylonitrilebutadienstyrene, polyurethane, polyamide, aluminum or similar.

The lower surface layer **450** may comprise abrasive material comprising abrasive particles such that the lower surface **460** may be used for abrading a work piece.

25

According to a preferred embodiment, the lower surface layer **450** may comprise an open mesh, which mesh may be coated with abrasive material comprising abrasive particles, and which mesh may comprise a plurality of openings. In such a preferred embodiment, the intermediate layer **440** may be of porous material which may allow air and abrading debris to
30 traverse the intermediate layer **440**. In a variation of such a preferred embodiment, the abrading article **400** does not comprise an intermediate layer **440**, in which case the lower surface layer **450** may be attached to the upper surface layer **430**. Such a preferred structural embodiment, in which the structural lower surface layer **450** comprises an open mesh coated with abrasive material comprising abrasive particle and which comprises a porous intermediate

layer 440, including its said variation which does not comprise an intermediate layer 440, may be advantageously combined with the embodiment of the abrading article 400 illustrated in Figure 13*b*. Advantageousness relates to the plurality of small openings in the open mesh and the pores in the intermediate layer 440, if any, since they may bring about the air and debris extraction functionality commonly brought about by medial conduits 410*b* and/or the air conveyance functionality commonly brought about by central conduits 410*a*, which conduits are depicted in the embodiment in Figure 13*a*.

According to another embodiment, the lower surface layer 450 may comprise abrasive grains adjoined to a resin. In such an embodiment, the surface layer 450 may further comprise, for example, a backing material, such as paper, cardboard, polymeric film or fabric, to which the abrasive grains adjoined to a resin are attached. Such a structural embodiment may be advantageously combined with the embodiment of the abrading article 400 illustrated in Figure 13*a*, since the non-porosity of abrasive grains adjoined to a resin, especially on a non-porous backing material, typically may give rise to a need for the air and debris extraction functionality commonly brought about by medial conduits 410*b* and/or the air conveyance functionality commonly brought about by central conduits 410*a*, which conduits are depicted in the embodiment in Figure 13*a*.

The abrading article 400 comprises a central region referring to the portion of the abrading article 400 at and near its center, a peripheral region referring to the portion of the abrading article 400 at and near its outer side wall 420, and a medial region referring to the portion of the abrading article 400 between the central and peripheral regions. The central region, the peripheral region and the medial region are defined on the S_x, S_y plane.

According to embodiments, as illustrated in Figures 13*a*-13*c*, in which the abrading article 400 has a circular shape, the central region may extend radially from the center of the abrading article 400 towards its outer side wall 420 to the distance of no more than 5%, or 10%, or 15%, or 20%, or 25%, or 30%, or 35% of the radius of the abrading article 400, and the peripheral region may extend radially from the outer side wall 420 of the abrading article 400 towards its center to the distance of at least 10%, or 15%, or 20%, or 25%, or 30%, or 35% of the radius of the abrading article 400.

In the specific embodiments depicted in Figures 13a-13c, the central region may extend radially from the center of the abrading article 400 towards its outer side wall 420 to the distance of 20% of the radius of the abrading article 400, and the peripheral region may extend radially from the outer side wall 420 of the abrading article 400 towards its center to the distance 20% of the radius of the abrading article 400.

In other embodiments with different shapes for the abrading article 400 on the S_x , S_y plane, such as the abrading article 400 being rectangular or triangular, the central region, the medial region, and the peripheral region may be similarly defined by replacing the notion of a radius with the distance between the center of the abrading article 400 and any given point at the outer side wall 420, for example, the nearest point with respect to the center of the abrading article 400.

The abrading article 400 may comprise a plurality of conduits 410a-410c which may terminate with orifices on the lower surface 460. The conduits 410a-410c do not refer to any minute openings within a porous material such as in some embodiments an open mesh in the lower surface layer 450 of the abrading article 400 or elsewhere, or in some embodiments porous material in the intermediate layer 440 or the upper surface layer 430 of the abrading article 400.

Such conduits may comprise a central conduit or conduits 410a located in or at least originating from the central region, a medial conduit or conduits 410b located in the medial region, and/or a peripheral conduit or conduits 410c originating from the peripheral region and extending into the medial region. Such conduits 410a-410c may be surrounded by an unbroken portion of the abrading article 400 such that no conduit 410a-410c extends into another conduit 410a-410c. The central conduit or conduits 410a and the peripheral conduit or conduits 410c may not be connected to a source of suction pressure, for example to a medial conduit or conduits 410b.

An unbroken portion of the abrading article 400 refers to a portion of the abrading article 400 which contains no conduit or conduits 410a-410c, and therefore resists the flow of air to such a degree that air will flow substantially more freely along a conduit 410a-410c than through an unbroken portion of the abrading article 400. The purpose of conduits 410a-410c being separated from each other by unbroken portions of the abrading article 400 is to enable

controlled conveyance of air through the conduits **410a-410c** so that surface flushing can be brought about with air flowing from conduits not connected to suction pressure to conduits connected to suction pressure over the surface of the abrading article **400**. Such controlled conveyance of air would be disturbed if the flow of air was to leak from one conduit **410a-410c**
5 directly into another.

As the peripheral conduit or conduits **410c** may extend into the medial region of the abrading article **400**, the peripheral conduit or conduits **410c** may extend to the distance of more than 10%, or 15%, or 20%, or 25%, or 30%, or 35% of the distance between the starting point of
10 the peripheral conduit **410c** at the outer side wall **420** and the center of the abrading article **400** in correspondence with what was said about the extent of the peripheral region above.

The technical effect of separating the medial conduits **410b** adapted to be connected to suction pressure in an abrading system from conduits **410a, 410c** not adapted to be connected to
15 suction pressure in the abrading system is to enable controlling the flow of air from ambient pressure to low, i.e. suction pressure in order to bring about even flow of air over and across the abrading surface **460**. In the embodiment illustrated in Figure **13a**, the medial conduits **410b** may be adapted to be connected to suction pressure in an abrading system, and the central conduit **410a** and the peripheral conduits **410c** may not be adapted to be connected to
20 suction pressure.

The peripheral conduits **410c** may pass through the outer side wall **420** of the abrading article **400**. The peripheral conduits **410c** may be elongated such that the peripheral conduits **410c** may extend from the peripheral region of the abrading article **400** to its medial region.
25

In embodiments of the abrading article **400** which comprise the medial conduit or conduits **410b** and the peripheral conduit or conduits **410c**, and which may additionally comprise the central conduit or conduits **410a**, the peripheral conduits **410c** may be elongated such that the end of the peripheral conduit **410c** which is nearest to the center of the abrading article **400** is
30 nearer to the center of the abrading article **400** than the medial conduit **410b** which is most distant from the center of the abrading article **400**. The peripheral conduits **410c** may extend in the direction of or towards the central conduit **410a** and/or the central region

Figure **13b** illustrates an embodiment of the abrading article **400** which comprises a plurality of the elongated peripheral conduits **410c** and no central conduit and no medial conduits. In this embodiment, such a conduit configuration may be advantageously combined with a structure of the abrading article **400** according to which the abrading article **400** may comprise the upper surface layer **430** similar to the examples explained above which may comprise attachment elements enabling re-attachment such as premised on the hook-and-loop attachment as explained above; the lower surface layer **450** similar to the examples explained above which may comprise an open mesh, which mesh may be coated with abrasive particles and comprise a plurality of small openings; and the intermediate layer **440** which may be of porous material which may allow air and abrading debris to traverse the intermediate layer **440**. In a variation of such a specific preferred embodiment, the abrading article **400** may not comprise the intermediate layer **440** similar to the examples explained above, in which case the lower surface layer **450** may be attached to the upper surface layer **430**.

In the specific embodiment of Figure **13b** there are several peripheral conduits **410c**, for example eight peripheral conduits **410c**, preferably with equal mutual distances, which peripheral conduits **410c** pass through the outer side wall **420** of the abrading article **400**. The peripheral conduits **410c** may be elongated such that the peripheral conduits **410c** extend towards the center of the abrading article **400** and into its the medial region so that the ends of the peripheral conduits **410c** extend towards the center of the abrading article **400** to the distance of more than half of the radius of the abrading article **400**.

Figure **13a** illustrates an embodiment of the abrading article **400** which comprises a plurality of the elongated peripheral conduits **410c**, the central conduit **410a** and a plurality of the medial conduits **410b**. The central conduit **410a** and the circular medial conduits **410b** may be circular. In a specific embodiment, such conduit configuration may be advantageously combined with the structure of the abrading article **400** according to which the abrading article **400** may comprise the upper surface layer **430** which may comprise attachment elements enabling re-attachment such as premised on the hook-and-loop attachment as explained above; and the intermediate layer **440**; and the lower surface layer **450** which may comprise abrasive grains adjoined to a resin, and which lower surface layer **450** which may additionally comprise a backing material, such as paper, cardboard, polymeric film or fabric, to which the abrasive grains adjoined to a resin are attached.

In the specific embodiment of Figure 13a there is at least one central conduit 410a located in the central region; a plurality of the medial conduits 410b located in the medial region such that the medial conduits 410b are arranged along three concentric circles which are concentric with the center of the abrading article 400 with each concentric circle having several medial
5 conduits 410b, for example eight medial conduits 410b, preferably with equal mutual distances; and several peripheral conduits 410c, for example eight peripheral conduits 410c, preferably with equal mutual distances, which peripheral conduits 410c pass through the outer side wall 420 of the abrading article 400 and are elongated such that the peripheral conduits 410c extend towards the center of the abrading article 400 and into its the medial region so that the ends of
10 the peripheral conduits 410c extend towards the center of the abrading article 400 to the distance of more than half of the radius of the abrading article 400.

Figure 13c illustrates an embodiment of the abrading article 400 which is a variation of the embodiment illustrated in Figure 13a. The variation-creating difference is that in the
15 embodiment illustrated in Figure 13a the peripheral conduits 410c may be slits which extend along the S_z axis through the entire thickness of the abrading article 400, whereas in the embodiment illustrated in Figure 13c the peripheral conduits 410c may be grooves which do not extend through the entire thickness of the abrading article 400, but instead extend, for example, through or partially through the lower surface layer 450.

20

If suitably used as a part of an abrading system, as illustrated in Figure 18 and Figure 16 according to an example, the peripheral conduits 410c may be used for introducing incoming air onto the lower surface 460 and/or the upper surface 470 of the abrading article 400.

25 In the embodiments which comprise the central conduit or conduits 410a, the central conduit or conduits 410a may be used for introducing incoming air onto the lower surface 460 and/or the upper surface 470 of the abrading article 400. Correspondingly, in the embodiments which comprise the medial conduit or conduits 410b, the medial conduits 410b may be used for conveying air and debris away from the said surface or surfaces.

30

In embodiments without the central conduit 410a and the medial conduits 410b and wherein the lower surface layer 450 which may comprise an open mesh, which mesh may be coated with abrasive particles and comprise a plurality of small openings, air and debris may be conveyed away from the lower surface 460 through the holes, i.e. the small openings, between

the said threads, and air and debris may be conveyed away from the upper surface 470 through conduits on the backing pad 10 or the intermediate pad 20.

Figures 11*a* through 11*f* illustrate examples of different conduit configurations which may be used in such embodiments of the abrading article 400 that comprise a plurality of the peripheral conduits 410*c*, the central conduit 410*a* and a plurality of the medial conduits 410*b*, or from which examples specific conduit geometries may be adopted into the abrading article 400 provided with the conduits 410*a*-410*c*. According to an example configuration illustrated in Figure 11*a*, there may be a plurality of the elongated peripheral conduits having a curvature. According to an example illustrated in Figure 11*b*, there may be a plurality of the elongated peripheral conduits with branching. According to an example illustrated in Figure 11*c*, there may be more than one type of the elongated peripheral conduits such that there may be a plurality of the branching peripheral conduits and a plurality of the non-branching peripheral conduits. According to an example illustrated in Figure 11*d*, there may be a branching central conduit, and there may be a plurality of elongated peripheral conduits such that some of the elongated peripheral conduits extend from the peripheral region of the abrading article 400 to its medial region in a direction other than towards the center of the abrading article 400. According to an example illustrated in Figure 11*e*, there may be a plurality of elongated medial conduits with branching. According to an example illustrated in Figure 11*f*, there may be a plurality of elongated peripheral conduits with an angle. While Figures 11*a* through 11*f* illustrate examples of different conduit configurations on the circular abrading article 400, the illustrated geometrical principles may be implemented on the abrading article 400 with a different shape, such as rectangular or triangular, as well.

Figures 17*a* through 17*e* illustrate examples of different conduit configurations in those embodiments of the abrading article 400 which comprise a plurality of the peripheral conduits similar to the peripheral conduits 410*c* explained above and no central conduit and no medial conduits. According to an example illustrated in Figure 17*a*, there may be a plurality of the elongated peripheral conduits having a curvature. According to an example illustrated in Figure 17*b*, there may be a plurality of the elongated peripheral conduits with branching. According to an example illustrated in Figure 17*c*, there may be more than one type of the elongated peripheral conduits such that there may be a plurality of branching peripheral conduits and a plurality of non-branching peripheral conduits. According to an example illustrated in Figure 17*d*, there may be a plurality of the elongated peripheral conduits such that

some of the elongated peripheral conduits extend from the peripheral region of the abrading article 400 to its medial region in a direction other than towards the center of the abrading article 400. According an example illustrated in Figure 17e, there may be a plurality of the elongated peripheral conduits with an angle. While Figures 17a through 17e illustrate examples of different conduit configurations on circular abrading articles 400, the illustrated geometrical principles may be implemented on the abrading article 400 with a different shape, such as rectangular or triangular, as well.

In the specific embodiments illustrated in Figure 13a and Figure 13b, the conduits 410a-410c may extend through the entire thickness of the abrading article 400 on the S_z axis. That is, in these embodiments, the conduits 410a-410c may extend from the upper surface 470 of the abrading article 400 to its lower surface 460. Hence, the conduits 410a-410c may extend through the entire thickness of the abrading article 400 on the S_z axis in the specific preferred embodiment explained above.

In the embodiment according to Figure 13a, wherein the conduits 410a-410c extend through the entire thickness of the abrading article 400 on the S_z axis and wherein the abrading article 400 comprises the intermediate layer 440, the central conduits 410a and the medial conduits 410b may be of the type illustrated in cross section in Figure 15a, i.e. holes which extend through the entire thickness of the abrading article 400, and the peripheral conduits 410c may be of the type illustrated in cross section in Figure 15c.

In the embodiment according to Figure 13b, wherein the conduits 410a-410c extend through the entire thickness of the abrading article 400 on the S_z axis and wherein the abrading article 400 comprises the intermediate layer 440, the peripheral conduits 410c may be of the type illustrated in cross section in Figure 15c. This conduit type of the peripheral conduit 410c is for example a slit which extends through the entire thickness of the abrading article 400. Preferably, the slit has an open end at the outer side wall 420 and at least one opposite, closed end.

Figure 15b illustrates the peripheral conduit 410c according to an embodiment where the peripheral conduit 410c extends on the S_z axis through the lower surface layer 450 and the intermediate layer 440 but not through the upper surface layer 430. This conduit type of the peripheral conduit 410c is for example a groove on the lower surface 460 of the abrading

article 400, the groove being open towards the work piece. Preferably, the groove has an open end at the outer side wall 420 and at least one opposite, closed end.

Figure 15*d* illustrates the peripheral conduit 410*c* according to an embodiment where the peripheral conduit 410*c* extends on the S_z axis through or partially through the lower surface layer 450, but not through the upper surface layer 430 and not through the intermediate layer 440. This conduit type of the peripheral conduit 410*c* is for example a groove on the lower surface 460 of the abrading article 400, the groove being open towards the work piece. Preferably, the groove has an open end at the outer sidewall 420 and at least one opposite, closed end. In an example embodiment, such a groove may be formed by the absence of abrasive particles on the lower surface 460 in the area constituting the groove. In such an embodiment, therefore, the groove not comprising abrasive particles is recessed on the lower surface 460 in comparison to areas on the lower surface 460 surrounding the groove, which surrounding areas do comprise abrasive particles.

15

The principles of the conduit types of Figure 15*a*, Figure 15*c* and Figure 15*d* may be employed also in the embodiments of the abrading article 400 which lack the intermediate layer 440, i.e. in embodiments in which the lower surface layer 450 is attached to the upper surface layer 430.

20

The abrading article 400 according to the embodiments illustrated in Figure 13*a* and Figure 13*b*, i.e. the embodiments comprising the conduits 410*a*-410*c* which extend through the entire thickness of the abrading article 400, i.e. from the upper surface 470 to the lower surface 460, may be manufactured for example by punching.

25

The abrading article 400 comprising a peripheral conduit or conduits 410*c* of the type illustrated in Figure 15*d* may be manufactured by first manufacturing the abrading article 400 without such peripheral conduits 410*c* for example by punching as described above, and then making such peripheral conduits 410*c* for example by incising them or additively printing onto the lower surface 460 except for in the areas of the peripheral conduits 410*c*.

30

For the specific embodiments of the abrading article 400 which are in accordance with Figure 13*a* and Figure 13*b* and which comprise the intermediate layer 440 as illustrated in Figure 14, such punching may be carried out with suitable punches and dies, a sheet comprising the

upper surface layer **430**, the intermediate layer **440** and the lower surface layer **450**. Such layers may be attached to each other adhesively prior to punching. Alternatively, such layers may be punched separately and attached to each other after punching, for example adhesively.

- 5 In the example of the abrading article **400** not comprising the intermediate layer **440** but otherwise in accordance with the said specific embodiments, such punching may be carried out with suitable punches and dies, a sheet comprising the upper surface layer **430** and the lower surface layer **450**. Such layers may be attached to each other adhesively prior to punching. Alternatively, such layers may be punched separately and attached to each other
10 after punching, for example adhesively.

Such a punching-based manufacturing may apply to the specific preferred embodiment of the abrading article **400** explained above.

- 15 The abrading article **400** as explained above may be used in an abrading system comprising an abrading apparatus **1**, the backing pad **10** and the abrading article **400**, as illustrated in Figure **18** according to one embodiment. During abrading a work piece, the abrading apparatus **1** may rotate and/or oscillate the backing pad **10** and thereby rotate and/or oscillate the abrading article **400** as well. Such rotation and/or oscillation may be brought about by a source of
20 power of the abrading apparatus **1** such as an electric or a pneumatic motor.

According to another embodiment, the abrading article **400** as explained above may be used in an abrading system comprising the abrading apparatus **1**, the backing pad **10**, an intermediate pad **20** and the abrading article **400**. During abrading a work piece, the abrading apparatus **1**
25 may rotate and/or oscillate the backing pad **10** and thereby rotate and/or oscillate the intermediate pad **20** and the abrading article **400** as well. Such rotation and/or oscillation may be brought about by a source of power of the abrading apparatus **1** such as an electric or a pneumatic motor.

- 30 The abrading article **400** and the backing pad **10** and the intermediate pad **20**, if any, may be of any shape on the S_x , S_y plane, such as rectangular, triangular, or preferably round if rotating. Advantageously, the abrading article **400** and the backing pad **10** and the intermediate pad **20**, if any, are substantially of the same shape. The backing pad **10** and the intermediate pad **20**

may be, for example, of conventional, known type, or they may incorporate the principles of the solution disclosed for the backing pad **200** and the intermediate pad **100**.

An embodiment of the abrading system is illustrated in cross section in Figure **16**, wherein the
5 abrading article **400** is in accordance with the specific embodiment shown in Figure **13a**. In this embodiment, the central and medial conduits **410a** and **410b** of the abrading article **400** respectively are aligned with central and medial conduits **11a** and **11b** of the backing pad **10**. Furthermore, the medial conduits **11b** of the backing pad **10** are connected to the conduits **2** of the abrading apparatus **1**. The conduits **2** of the abrading apparatus **1** may be connected to, or
10 are adapted to be connected to, a source of suction pressure **3** which may comprise a debris collection receptacle **4**.

It is to be generally understood that for conduits to be aligned, the conduits do not necessarily have to be geometrically perfectly aligned such that, for example, their orifices would perfectly
15 match each other without any geometrical offset or difference in area, or that the conduits would need to be hermetically coupled to each other. Instead, conduits are to be understood to be aligned when they constitute a functional air and/or debris conveyance pathway, i.e. it is possible to convey air and/or debris from one conduit into another.

20 During operation of the abrading system, and in correspondence with what is illustrated in Figure **10a**, the central conduit **11a** of the backing pad **10** may convey incoming air through the central conduit **410a** of the abrading article **400** onto the lower surface **460** of the abrading article **400**. In embodiments in which the attachment elements between the abrading article **400** and the backing pad **10** are of the hook-and-loop type, during operation of the abrading
25 system, the central conduit **11a** of the backing pad **10** may additionally convey incoming air through the central conduit **410a** of the abrading article **400** into the interface between the abrading article **400** and the backing pad **10**, which interface houses the attachment elements for attaching the abrading article **400** to the backing pad **10**. The elongated peripheral conduits **410c** depicted in Figures **13a-13c**, but not visible in the cross section in Figure **16**, extending on
30 the S_x, S_y plane from the medial region of the abrading article **400** to its peripheral region and through its outer side wall **420**, may be blind in that there are no corresponding apertures or conduits on the backing pad **10** aligned with the peripheral conduits **410c**.

- In this embodiment of the abrading system, during abrading, abrading debris may be extracted from the lower surface **460** of the abrading article **400** with a suction pressure led through the medial conduits **410b** of the abrading article **400**, then through the medial conduits **11b** of the backing pad **10** into the conduits **2** of the abrading apparatus **1**. The extracted abrading debris
5 may be conveyed into a debris collection receptacle **4**. In embodiments in which the attachment elements between the abrading article **400** and the backing pad **10** are of the hook-and-loop type, debris may be similarly extracted from the interface between the abrading article **400** and the backing pad **10**, which interface houses the attachment elements.
- 10 Replacement air, pulled in by suction pressure onto the lower surface **460** of the abrading article **400**, may originate through the central conduit **410a**, peripheral conduits **410c** and over the outer side wall **420** of the abrading article **400**. Thus, the peripheral conduits **410c** are not connected to suction pressure. As the peripheral conduits **410c** may be blind, as explained above, incoming air through these conduits may be forced to pass over the lower surface **460**
15 of the abrading article **400** before reaching the nearest suction pressure-connected medial conduit **410b**, thereby providing surface flushing which extends substantially into the medial regions of the abrading article **400**. Figure **10a** illustrates the flow of air on the lower surface **460** of the abrading article **400** according to this embodiment.
- 20 In other embodiments of the abrading article **400**, which comprise the central conduit **410a**, a plurality of the medial conduits **410b** and a plurality of the peripheral conduits **410c**, conduits **410a-410c** may be differently configured on the S_x , S_y plane, such as according to the examples illustrated in Figures **11a** through **11f**. Additional conduit configurations may be designed for example by combining conduit types illustrated in Figures **11a** through **11f**. Different such
25 configurations may be designed to manage the incoming and outgoing airflows in different applications, including different shapes of the backing pad **10** and the abrading article **400**, such that the lower surface **460** of the abrading article **400** and the interface between the abrading article **400** and the backing pad **10** may be evenly flushed with air in order to extract abrading debris evenly over the whole surface of the abrading article **400**, as illustrated
30 according to one embodiment in Figure **10a**.

In yet other embodiments of the abrading article **400**, which comprise a plurality of the peripheral conduits **410c** but not the central conduit **410a** and not the medial conduits **410b**, and in which the lower surface layer **450** may comprise an open mesh coated with abrasive

particles, and in which the intermediate layer **440**, if any, may be of porous material, such as the preferred specific embodiment explained above, the abrading article **400** may not comprise conduits which could be aligned with the central and/or medial conduits **11a** and **11b** of the backing pad **10**, of which the medial conduits **11b** of the backing pad **10** are aligned with the
5 conduits **2** of the abrading apparatus.

In these embodiments, during operation of the abrading system, the central conduit **11a** of the backing pad **10** may convey incoming air through the small openings in the open mesh in the lower surface layer **450** and through the pores of the porous intermediate layer **440**, if any, of
10 the abrading article **400** onto the lower surface **460** of the abrading article **400**. In embodiments in which the attachment elements between the abrading article **400** and the backing pad **10** additionally are of the hook-and-loop type, during operation of the abrading system, the central conduit **11a** of the backing pad **10** may additionally convey incoming air into the interface between the abrading article **400** and the backing pad **10**, which interface
15 houses the attachment elements for attaching the abrading article **400** to the backing pad **10**. The elongated peripheral conduits **410c** such as depicted in Figure **13b**, extending on the S_x , S_y plane from the medial region of the abrading article **400** to its peripheral region and through its outer side wall **420**, may be blind in that there are no corresponding apertures or conduits on the backing pad **10**.

20

In such embodiments of the abrading system, during abrading, abrading debris may be extracted from the lower surface **460** of the abrading article **400** with a suction pressure through the small openings in the open mesh in the lower surface layer **450** and through the pores of the porous intermediate layer **440**, if any, of the abrading article **400**, then through
25 the medial conduits **11b** of the backing pad **10** into the conduits **2**. The extracted abrading debris may be conveyed into a debris collection receptacle **4**. In such embodiments in which the attachment elements between the abrading article **400** and the backing pad **10** additionally are of the hook-and-loop type, debris may be extracted through the medial conduits **11b** from the interface between the abrading article **400** and the backing pad **10**, which interface houses
30 the attachment elements.

In such embodiments, replacement air, pulled in by suction pressure onto the lower surface **460** of the abrading article **400**, may originate through the central conduit **410a**, peripheral conduits **410c** and over the outer side wall **420** of the abrading article **400**. Thus, the peripheral

conduits **410c** are not connected to suction pressure. As the peripheral conduits **410c** may be blind, incoming air through these conduits may be forced to pass over a portion of the lower surface **460** of the abrading article **400** before entering into a plurality of small openings, thereby providing surface flushing which extends substantially into the medial regions of the
5 abrading article **400**. Furthermore, as the peripheral conduits **410c** may be blind, incoming air through these conduits may be forced to pass over a portion of the upper surface **470** of the abrading article **400** before entering into the medial conduit **11b** of the backing pad **10**, thereby providing flushing of the interface between the abrading article **400** and the backing pad **10**, which extends substantially into the medial regions of the abrading article **400** and the backing
10 pad **10**.

In other embodiments of the abrading article **400**, which comprise a plurality of the peripheral conduits **410c** but not the central conduit **410a** and not the medial conduits **410b**, conduits **410c** may be differently configured on the S_x , S_y plane, such as according to the examples
15 illustrated in Figures **17a** through **17e**. Additional conduit configurations may be designed for example by combining conduit types illustrated in Figures **17a** through **17e**. Different such configurations may be designed to manage the incoming and outgoing airflows in different applications, including different shapes of the backing pad **10** and the abrading article **400**, such that the lower surface **460** of the abrading article **400** and the interface between the
20 abrading article **400** and the backing pad **10** may be evenly flushed with air in order to extract abrading debris evenly over the whole surface of the abrading article **400**.

In embodiments of the abrading system which additionally may comprise the intermediate pad **20** attached between the backing pad **10** and the abrading article **400**, the air and debris flows
25 during the operation of the abrading system may adhere to the same principles as explained above, because in such embodiments the intermediate pad **20** may comprise a central conduit or conduits and/or a medial conduit or conduits which may correspond to and be capable of being aligned with the central conduit or conduits **11a** and the medial conduit or conduits **11b** of the backing pad **10**. In other words, in such embodiments, the conduit pattern on the
30 intermediate pad **20** may substantially match the conduit pattern on the backing pad **10**.

In embodiments of the abrading article pad **400** which comprise one or more of the central conduits **410a**, the central conduit or conduits **410a** may in some system embodiments be connected to suction pressure and thereby function as air and debris extraction conduits,

instead of conveying incoming air onto the upper surface **470** and the lower surface **460** of the abrading article **400**. Such embodiments may otherwise adhere to the principles of the solution as described above. Thus, in such embodiments incoming air may originate through the peripheral conduits **410c** and over the outer side wall **420** of the abrading article **400** and
5 be forced to pass over the upper surface **470** and the lower surface **460** of the abrading article **400** before reaching the nearest suction pressure-connected conduit thereby providing surface flushing which extends substantially into the medial and central regions of the abrading article **400**.

10 The disclosed solutions are not limited to the examples and embodiments explained above and these examples and embodiments should not be construed as limiting. These examples and embodiments may be applied in useful combinations also. The solution is defined in the appended claims supported by this description.

CLAIMS

1. An intermediate pad suitable for use in an abrading system comprising an abrading apparatus adapted to provide suction pressure, the intermediate pad comprising:
 - 5 an upper surface layer having an upper surface comprising attachment elements suitable for attaching the upper surface layer to a backing pad of the abrading apparatus;
 - a lower surface layer having a lower surface comprising attachment elements suitable for attaching the lower surface layer to an abrading article;
 - 10 an intermediate layer between the upper surface layer and the lower surface layer, the intermediate layer being attached to the upper and lower surface layers and comprising one or more plies;
 - an outer side wall enclosing the upper surface layer, the lower surface layer and the intermediate layer;
 - 15 at least one medial conduit suitable for conveying air and abrading debris from the lower surface, the at least one medial conduit terminating with an orifice on the lower surface; and
 - at least one peripheral conduit suitable for conveying incoming air onto the lower surface, the at least one peripheral conduit extending from the outer side wall and
 - 20 terminating with an orifice on the lower surface, and being separated from the at least one medial conduit by an unbroken portion of the intermediate pad.
2. The intermediate pad according to claim 1, wherein the intermediate pad further comprises at least one central conduit, the at least one central conduit:
 - 25 terminating with an orifice on the lower surface and being suitable for conveying incoming air onto the lower surface or conveying air and abrading debris from the lower surface; and
 - being separated from the at least one medial conduit and the at least one peripheral conduit by an unbroken portion of the intermediate pad.
- 30 3. The intermediate pad according to any of the preceding claims, wherein the attachment elements on the upper surface layer and/or the lower surface layer enable re-attachment.

4. The intermediate pad according to claim 3, wherein the attachment elements on the upper surface layer are premised on hooks and loops, or mechanical fasteners, or pressure sensitive adhesion.
- 5 5. The intermediate pad according to claim 3 or 4, wherein the attachment elements on the lower surface layer are premised on hooks and loops, or mechanical fasteners, or pressure sensitive adhesion.
- 10 6. The intermediate pad according to any of the preceding claims, wherein the at least one central conduit and/or the medial conduits is/are holes which extend through the upper surface layer, the intermediate layer and the lower surface layer of the intermediate pad.
- 15 7. The intermediate pad according to any of the preceding claims, wherein the at least one peripheral conduit is a groove on the lower surface or a slit, the groove or the slit having an open end at the outer side wall.
- 20 8. The intermediate pad according to any of the preceding claims, wherein at least one of the peripheral conduits extends towards the center of the intermediate pad past at least one of the medial conduits or to the distance of more than 10% of the distance between the starting point of the peripheral conduit at the outer side wall and the center of the intermediate pad.
- 25 9. The intermediate pad according to any of the preceding claims, wherein the intermediate pad has a circular shape.
- 30 10. The intermediate pad according to claim 9, wherein the intermediate pad further comprises a plurality of the medial conduits arranged along at least one concentric circle which is/are concentric with the center of the intermediate pad.
11. The intermediate pad according to any of the preceding claims, wherein at least one of the medial conduits or at least one of the peripheral conduits has an elongated orifice on the lower surface of the intermediate pad.

12. The intermediate pad according to any of the preceding claims, wherein the intermediate layer comprises
- 5 soft material such as foamed polypropylene, foamed polyethylene, foamed acrylonitrilebutadienstyrene, foamed polyurethane, foamed polyamide, foamed ethylene vinyl acetate or similar; or
- hard material such as polypropylene, polyethylene, acrylonitrilebutadienstyrene, polyurethane, polyamide, aluminum or similar.
13. An intermediate pad suitable for use in an abrading system comprising an abrading
- 10 apparatus adapted to provide suction pressure, the intermediate pad comprising:
- an upper surface layer having an upper surface comprising attachment elements suitable for attaching the upper surface layer to a backing pad of the abrading apparatus;
- a lower surface layer having a lower surface comprising attachment elements
- 15 suitable for attaching the lower surface layer to an abrading article;
- an outer side wall enclosing the upper surface layer and the lower surface layer;
- at least one medial conduit suitable for conveying air and abrading debris from the lower surface, the at least one medial conduit terminating with an orifice on the lower surface; and
- 20 at least one peripheral conduit suitable for conveying incoming air onto the lower surface, the at least one peripheral conduit extending from the outer side wall and terminating with an orifice on the lower surface, and being separated from the at least one medial conduit by an unbroken portion of the intermediate pad.
- 25 14. The intermediate pad according to claim 13, wherein the intermediate pad further comprises at least one central conduit, the at least one central conduit:
- terminating with an orifice on the lower surface and being suitable for conveying incoming air onto the lower surface or being suitable for conveying air and abrading debris from the lower surface; and
- 30 being separated from the at least one medial conduit and the at least one peripheral conduit by an unbroken portion of the intermediate pad.
15. The intermediate pad according to claims 13 or 14, wherein the attachment elements on the upper surface layer and/or the lower surface layer enable re-attachment.

16. The intermediate pad according to claim 15, wherein the attachment elements on the upper surface layer are premised on hooks and loops, or mechanical fasteners, or pressure sensitive adhesion.
- 5
17. The intermediate pad according to claim 15 or 16, wherein the attachment elements on the lower surface layer are premised on hooks and loops, or mechanical fasteners, or pressure sensitive adhesion.
- 10
18. The intermediate pad according to any of the claims 14-17, wherein the at least one central conduit and/or the medial conduits is/are holes which extend through the upper surface layer and the lower surface layer of the intermediate pad.
- 15
19. The intermediate pad according to any of the claims 13-18, wherein the at least one peripheral conduit is a groove on the lower surface or a slit, the groove or slit having an open end at the outer side wall.
- 20
20. The intermediate pad according to any of the claims 13-19, wherein the at least one peripheral conduit extends towards the center of the intermediate pad past at least one of the medial conduits or to the distance of more than 10% of the distance between the origin of the peripheral conduit at the outer side wall and the center of the intermediate pad.
- 25
21. The intermediate pad according to any of the claims 13-20, wherein the intermediate pad has a circular shape.
- 30
22. The intermediate pad according to claim 21, wherein there is a plurality of the medial conduits arranged along at least one concentric circle which is/are concentric with the center of the intermediate pad.
23. The intermediate pad according to any of the claims 13-22, wherein at least one of the medial conduits has an elongated orifice on the lower surface of the intermediate pad.
24. An abrading system, comprising:

the intermediate pad according to any of the claims 1-12, or any of the claims 13-23;

an abrading apparatus adapted to provide suction; and

a backing pad capable of being attached to the abrading apparatus, the backing pad comprising at least one medial conduit for conveying the suction pressure and capable of being aligned with at least one of the medial conduits of the intermediate pad for sucking air and abrading debris.

25. A method of using the abrading system according to claim 24 for removing abrading debris from the lower surface of the intermediate pad; the method comprising:

suction pressure in the conduits of the abrading apparatus being conveyed through the medial conduits of the backing pad into the medial conduits of the intermediate pad;

incoming air flowing due to the suction pressure onto the lower surface of the intermediate pad through the central conduit or conduits, if any, and through the peripheral conduits, and over the outer side wall of the intermediate pad; and

said incoming air passing over unbroken portions of the intermediate pad between the lower surface of the intermediate pad and the abrading article before entering, as pulled in by the suction pressure, into the medial conduits of the intermediate pad.

26. A method of using the abrading system according to claim 24 for removing abrading debris from the lower surface of the intermediate pad; the method comprising:

suction pressure in the conduits of the abrading apparatus being conveyed through the central conduit or conduits of the backing pad into the central conduit or conduits if any, of the intermediate pad and through the medial conduits of the backing pad into the medial conduits of the intermediate pad;

incoming air flowing due to the suction pressure onto the lower surface of the intermediate pad through the peripheral conduits, and over the outer side wall of the intermediate pad; and

said incoming air passing over unbroken portions of the intermediate pad between the lower surface of the intermediate pad and the abrading article before entering, as pulled in by the suction pressure, into the central conduit or conduits, if any, and the medial conduits of the intermediate pad.

27. A backing pad suitable for use in an abrading apparatus adapted to provide suction pressure, the backing pad comprising:
- 5 a body comprising attachment elements suitable for attaching the body to the abrading apparatus;
 - a lower surface layer having a lower surface, the lower surface layer being attached to the body, and comprising attachment elements suitable for attaching the lower surface layer to an abrading article;
 - an outer side wall enclosing the body and the lower surface layer;
 - 10 at least one medial conduit suitable for conveying air and abrading debris from the lower surface, the at least one medial conduit terminating with an orifice on the lower surface; and
 - at least one peripheral conduit suitable for conveying incoming air onto the lower surface, the at least one peripheral conduit extending from the outer side wall and
 - 15 terminating with an orifice on the lower surface, and being separated from the at least one medial conduit by an unbroken portion of the backing pad.
28. The backing pad according to claim 27, wherein the backing pad further comprises at least one central conduit, the at least one central conduit:
- 20 terminating with an orifice on the lower surface and being suitable for conveying incoming air onto the lower surface or conveying air and abrading debris from the lower surface; and
 - being separated from the at least one medial conduit and the at least one peripheral conduit by an unbroken portion of the backing pad.
- 25
29. The backing pad according to claims 27 or 28, wherein the attachment elements on the body and/or the lower surface layer enable re-attachment.
30. The backing pad according to any of the claims 27-29, wherein the at least one central conduit, and/or the at least one medial conduit is/are orifices which extend through
- 30 the body and the lower surface layer of the backing pad.

31. The backing pad according to any of the claims 27-30, wherein the at least one peripheral conduit is a groove on the lower surface having an open end at the outer side wall.
- 5 32. The backing pad according to any of the claims 27-30, wherein the at least one peripheral conduit comprises a groove on the lower surface with at least two closed ends and an orifice on the outer side wall.
- 10 33. The backing pad according to any of the claims 27-32, wherein the at least one peripheral conduit extends towards the center of the backing pad past at least one of the medial conduits or to the distance of more than 25% of the distance between the starting point of the at least one peripheral conduit at the outer side wall and the center of the backing pad.
- 15 34. The backing pad according to any of the claims 27-33, wherein the backing pad has a circular shape.
- 20 35. The backing pad according to claim 34, wherein the backing pad further comprises a plurality of the medial conduits arranged along at least one concentric circle which is/are concentric with the center of the backing pad.
- 25 36. The backing pad according to any of the claims 27-35, wherein at least one of the medial conduits or at least one of the peripheral conduits has an elongated orifice on the lower surface of the backing pad.
- 30 37. An abrading system, comprising:
the backing pad according to any of the claims 27-36;
an abrading apparatus capable of being attached to the backing pad, the abrading apparatus adapted to provide suction pressure and comprising at least one conduit capable of being connected to at least one of the medial conduits of the backing pad for sucking air and abrading debris.
38. A method of using the abrading system according to claim 37 for removing abrading debris from the lower surface of the backing pad; the method comprising:

suction pressure in the conduits of the abrading apparatus being conveyed into the medial conduits of the backing pad;

incoming air flowing due to the suction pressure onto the lower surface of the backing pad through the central conduit or conduits, if any, through the peripheral conduits, and over the outer side wall of the backing pad; and

said incoming air passing over unbroken portions of the backing pad between the lower surface of the backing pad and the abrading article before entering, as pulled in by the suction pressure, into the medial conduits of the backing pad.

39. A method of using the abrading system according to claim 37 for removing abrading debris from the lower surface of the backing pad; the method comprising:

suction pressure in the conduits of the abrading apparatus being conveyed into the central conduit or conduits, if any, and the medial conduits of the backing pad;

incoming air flowing due to the suction pressure onto the lower surface of the backing pad through the peripheral conduits, and over the outer side wall of the backing pad; and

said incoming air passing over unbroken portions of the backing pad between the lower surface of the backing pad and the abrading article before entering, as pulled in by the suction pressure, into the central conduit or conduits, if any, and the medial conduits of the backing pad.

40. An abrading article suitable for use in an abrading system comprising an abrading apparatus adapted to provide suction pressure, the abrading article comprising:

an upper surface layer with an upper surface and comprising attachment elements suitable for attaching the upper surface layer to a backing pad of the abrading apparatus or to an intermediate pad attachable to the backing pad of the abrading apparatus;

a lower surface layer with a lower surface, the lower surface layer comprising abrasive material such that the lower surface may be used for abrading a work piece;

an outer side wall enclosing the upper surface layer and the lower surface layer; and

at least one peripheral conduit suitable for conveying incoming air onto the lower surface, the at least one peripheral conduit extending from the outer side wall to the lower surface.

5 41. The abrading article according to claim 40, wherein the at least one peripheral conduit is a slit or a groove having an open end at the outer side wall.

42. The abrading article according to claim 40 or 41, wherein the at least one peripheral conduit is a groove, which groove
10 is formed by the absence of abrading particles in the area constituting the groove on the lower surface of the abrading article, and has an open end at the outer side wall.

43. The abrading article according to any of the claims 40-42, wherein the at least one
15 peripheral conduit extends towards the center of the abrading article to the distance of more than 25% of the distance between the starting point of the peripheral conduit at the outer side wall and the center of the abrading article.

44. The abrading article according to any of the claims 40-43, the abrading article further
20 comprising:
 at least one medial conduit suitable for conveying air and abrading debris from the lower surface, the at least one medial conduit extending from the upper surface to the lower surface, and being separated from the at least one peripheral conduit by an unbroken portion of the abrading article.

25 45. The abrading article according to any of the claims 40-44, the abrading article further comprising at least one central conduit suitable for conveying air onto the lower surface or conveying air and abrading debris from the lower surface, the at least one central conduit extending from the upper surface to the lower surface and being
30 separated from the at least one medial conduit, if any, and the at least one peripheral conduit by an unbroken portion of the abrading article.

46. The abrading article according to claim 44 or 45, wherein the at least one medial conduit and/or the at least one central conduit is/are orifices which extend from the upper surface to the lower surface of the abrading article.
- 5 47. The abrading article according to any of the claims 40-46, wherein at least one of the peripheral conduits extends towards the center of the abrading article to the distance of more than 10% of the distance between the starting point of the at least one peripheral conduit at the outer side wall and the center of the abrading article.
- 10 48. The abrading article according to any of the claims 40-47, wherein the abrading article has a circular shape.
49. The abrading article according to claim 48, wherein is the abrading article further comprises a plurality of the medial conduits arranged along at least one concentric circle which is/are concentric with the center of the abrading article.
- 15 50. The abrading article according to any of the claims 44-49, wherein at least one of the medial conduits, if any, has an elongated orifice on the lower surface of the abrading article.
- 20 51. The abrading article according to any of the claims 40-50, wherein the lower surface layer comprises an open mesh with small openings, which mesh is coated with abrasive particles.
- 25 52. The abrading article according to any or the claims 40-51, wherein the attachment elements on the upper surface layer enable re-attachment.
53. The abrading article according to any of the claims 40-52, wherein the abrading article further comprises an intermediate layer between and attached to the upper surface layer and the lower surface layer.
- 30 54. An abrading system, comprising:
the abrading article according to any of the claims 40-53;

a backing pad capable of being attached to the abrading article, the backing pad comprising at least one medial conduit for conveying suction pressure, the at least one medial conduit extending to the interface between the backing pad and the upper surface of the abrading article; and

5 an abrading apparatus, the abrading apparatus adapted to provide the suction pressure, being capable of being attached to the backing pad, and comprising at least one conduit capable of being connected to at least one of the medial conduits of the backing pad for sucking air and abrading debris.

10 55. A method of using the abrading system according to claim 54 for removing abrading debris from the interface between the abrading article and the backing pad, and for removing abrading debris from the lower surface of the abrading article; the method comprising:

15 suction pressure in conduits of the abrading apparatus being conveyed into the medial conduits of the backing pad;
incoming air flowing due to the suction pressure onto the upper surface and the lower surface of the abrading article through the peripheral conduits and over the outer side wall of the abrading article; and
said incoming air passing over unbroken portions of the abrading article before
20 entering into the medial conduits of the backing pad.

56. An abrading system, comprising:

the abrading article according to any of the claims 40-53;
an intermediate pad capable of being attached to the abrading article, the
25 intermediate pad comprising at least one medial conduit for conveying suction pressure, the at least one medial conduit extending to the interface between the intermediate pad and the upper surface of the abrading article;
a backing pad capable of being attached to the intermediate pad and comprising at least one medial conduit for conveying suction pressure, the at least one medial
30 conduit capable of being aligned with at least one of the medial conduits of the intermediate pad; and
an abrading apparatus adapted to provide the suction pressure, the abrading apparatus capable of being attached to the backing pad, and comprising at least

one conduit capable of being connected to at least one of the medial conduits of the backing pad for sucking air and abrading debris.

57. A method of using the abrading system according to claim 56 for removing abrading debris from the interface between the abrading article and the intermediate pad, and for removing abrading debris from the lower surface of the abrading article; the method comprising:
- suction pressure in conduits of the abrading apparatus being conveyed into the medial conduits of the backing pad and into the medial conduits of the intermediate pad;
- incoming air flowing due to the suction pressure onto the upper surface and the lower surface of the abrading article through the peripheral conduits and over the outer side wall of the abrading article; and
- said incoming air passing over unbroken portions of the abrading article before entering into the medial conduits of the intermediate pad and the medial conduits of the backing pad.

58. An abrading system, comprising:
- the abrading article according any of the claims 44-53;
- a backing pad capable of being attached to the abrading article, the backing pad comprising at least one medial conduit for conveying suction pressure, the at least one medial conduit capable of being aligned with at least one of the medial conduits of the abrading article; and
- an abrading apparatus adapted to provide the suction pressure, the abrading apparatus capable of being attached to the backing pad, and comprising at least one conduit capable of being aligned with at least one of the medial conduits of the backing pad for sucking air and abrading debris.

59. A method of using the abrading system according to claim 58 for removing abrading debris from the interface between the abrading article and the backing pad, and for removing abrading debris from the lower surface of the abrading article; the method comprising:

suction pressure in conduits of the abrading apparatus being conveyed into the medial conduits of the backing pad and into the medial conduits of the abrading article;

5 incoming air flowing due to the suction pressure onto the upper surface and the lower surface of the abrading article through the peripheral conduits and over the outer side wall of the abrading article; and
said incoming air passing over unbroken portions of the abrading article before entering into the medial conduits of the abrading article and the medial conduits of the backing pad.

10

60. A method of using the abrading system according to claim 58 for removing abrading debris from the interface between the abrading article and the backing pad, and for removing abrading debris from the lower surface of the abrading article; the method comprising:

15 suction pressure in conduits of the abrading apparatus being conveyed into the medial conduits and the central conduits of the backing pad and into the medial conduits and the central conduits of the abrading article;
incoming air flowing due to the suction pressure onto the upper surface and the lower surface of the abrading article through the peripheral conduits and over the
20 outer side wall of the abrading article; and
said incoming air passing over unbroken portions of the abrading article before entering into the into the medial conduits and the central conduits of the abrading article and into the medial conduits and the central conduits of the backing pad.

25 61. An abrading system, comprising:

the abrading article according any of the claims 44-53;
an intermediate pad capable of being attached to the abrading article, the intermediate pad comprising at least one medial conduit for conveying suction pressure, the at least one medial conduit capable of being aligned with at least one
30 of the medial conduits of the abrading article;
a backing pad capable of being attached to the intermediate pad and comprising at least one medial conduit capable of being aligned with at least one of the medial conduits of the intermediate pad; and

an abrading apparatus adapted to provide suction pressure, the abrading apparatus being capable of being attached to the backing pad, and comprising at least one conduit capable of being connected to at least one of the medial conduits of the backing pad for sucking air and abrading debris.

5

62. A method of using the abrading system according to claim 61 for removing abrading debris from the interface between the abrading article and the intermediate pad, and for removing abrading debris from the lower surface of the abrading article; the method comprising:

10 suction pressure in conduits of the abrading apparatus being conveyed into the medial conduits of the backing pad, into the medial conduits of the intermediate pad and into the medial conduits of the abrading article;
incoming air flowing due to the suction pressure onto the upper surface and the lower surface of the abrading article through the peripheral conduits and over the
15 outer side wall of the abrading article; and
said incoming air passing over unbroken portions of the abrading article before entering into the medial conduits of the backing pad, into the medial conduits of the intermediate pad and into the medial conduits of the abrading article.

20 63. A method of using the abrading system according to claim 61 for removing abrading debris from the interface between the abrading article and the intermediate pad, and for removing abrading debris from the lower surface of the abrading article; the method comprising:

25 suction pressure in conduits of the abrading apparatus being conveyed into the medial conduits and the central conduits of the backing pad, into the medial conduits and the central conduits of the intermediate pad and into the medial conduits and the central conduits of the abrading article;
incoming air flowing due to the suction pressure onto the upper surface and the lower surface of the abrading article through the peripheral conduits and over the
30 outer side wall of the abrading article; and
said incoming air passing over unbroken portions of the abrading article before entering into the into the medial conduits and the central conduits of the abrading article, into the medial conduits and the central conduits of the intermediate pad and into the medial conduits and the central conduits of the backing pad.

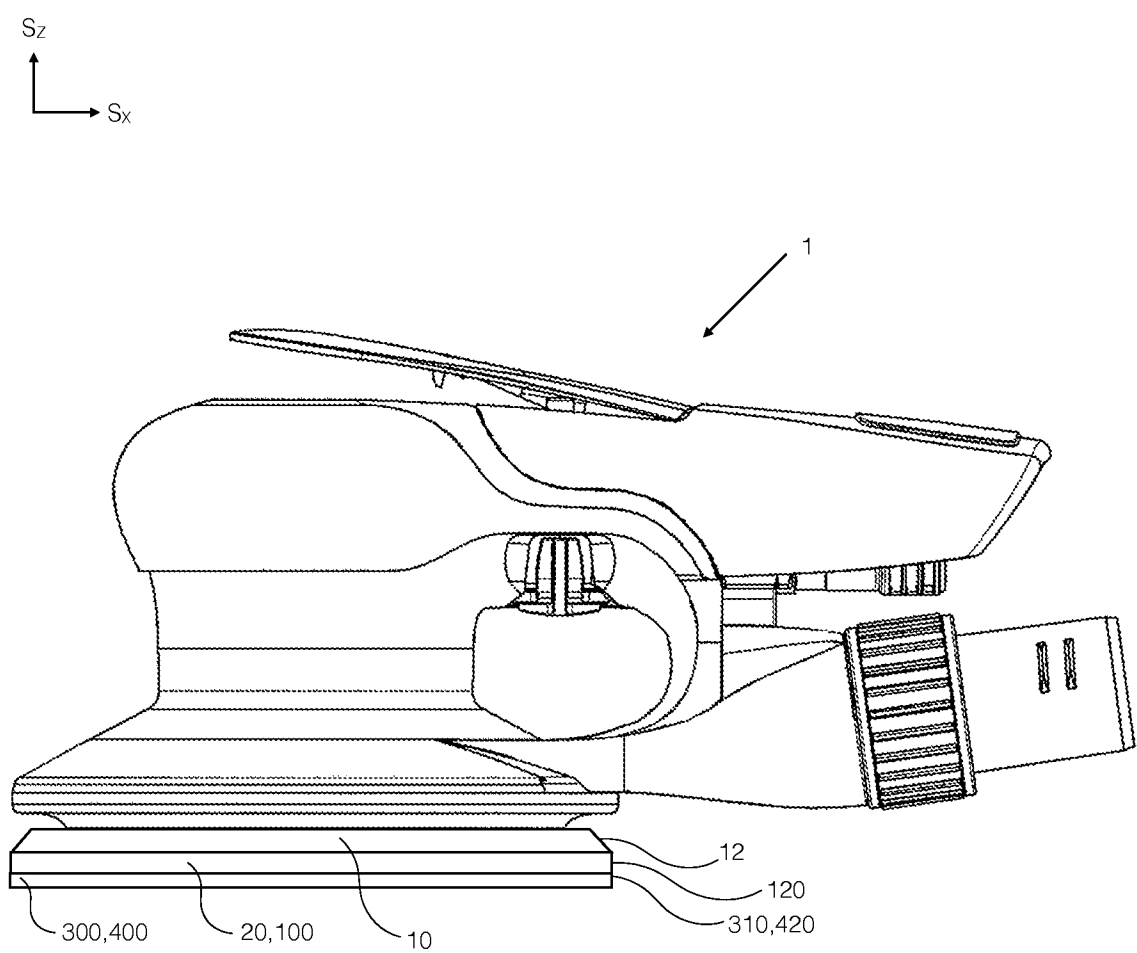


Fig. 1

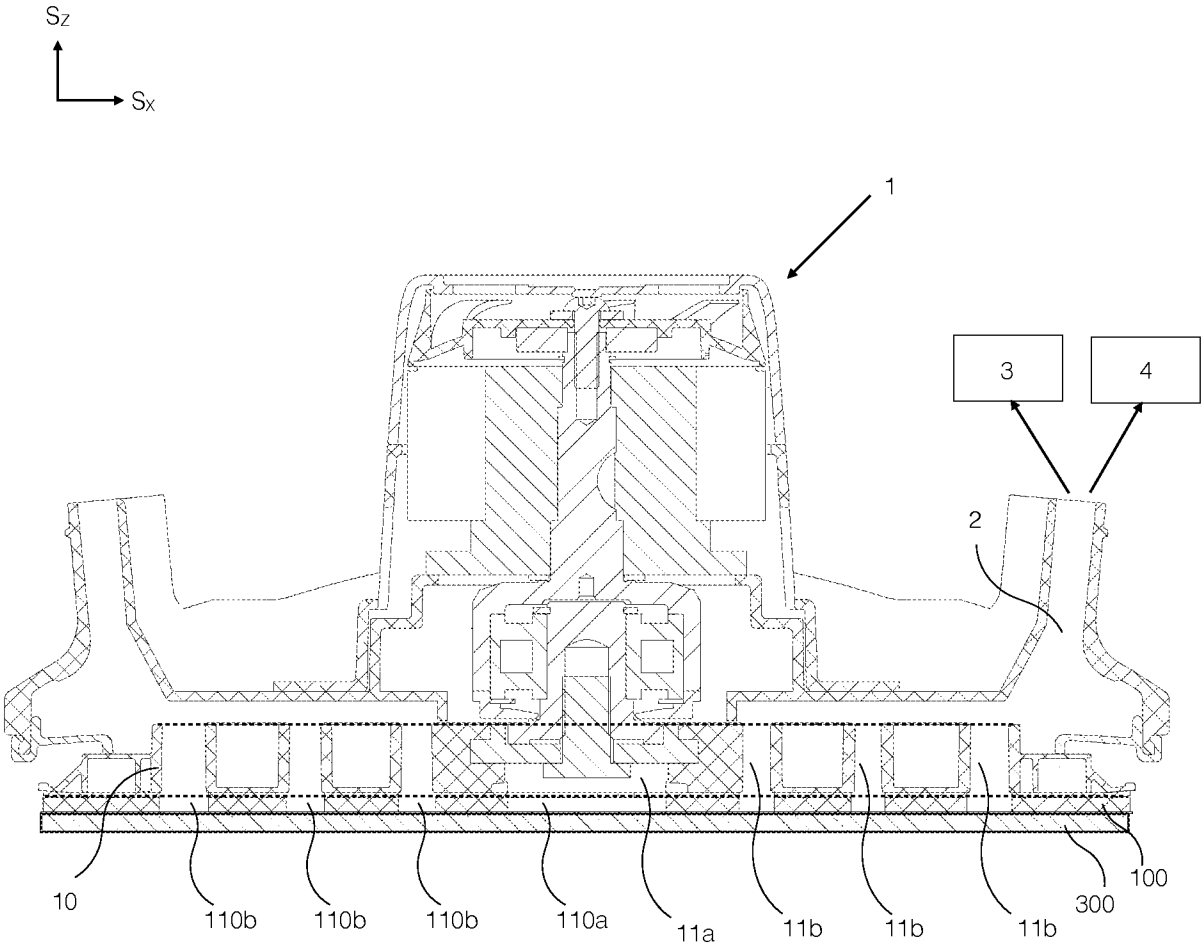


Fig. 2

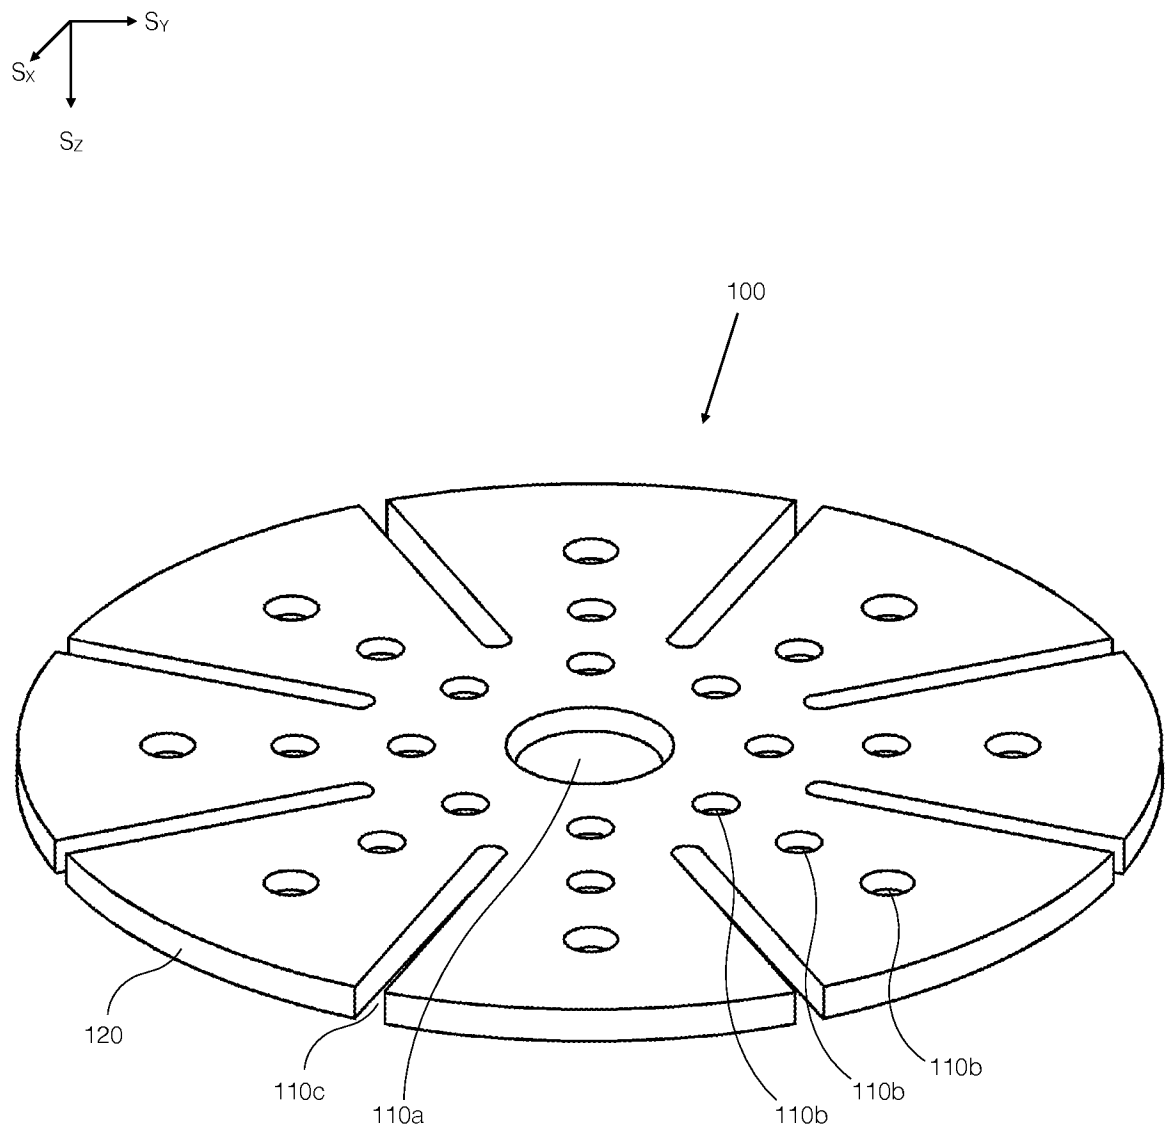


Fig. 3

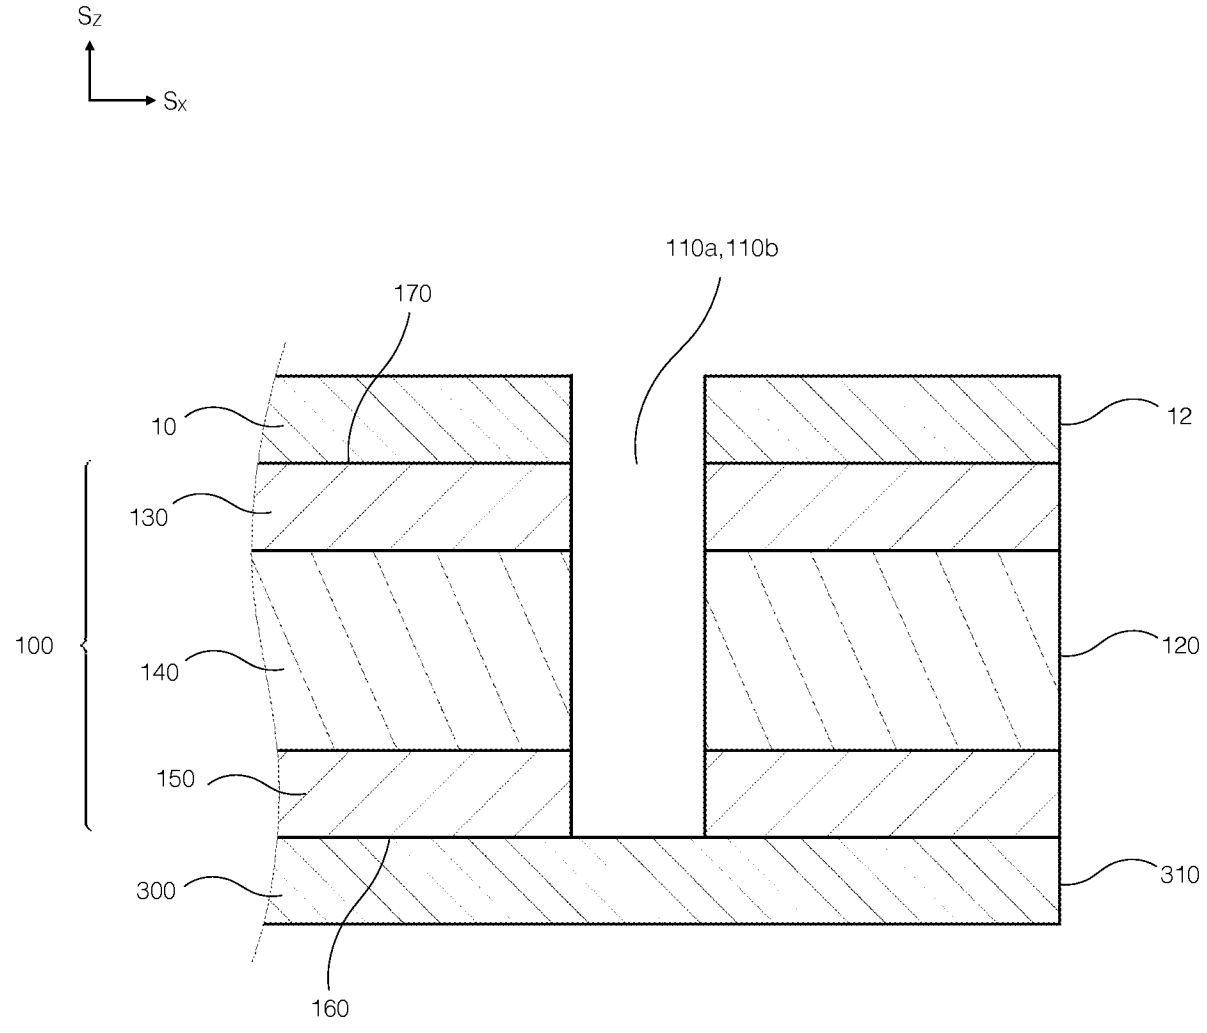


Fig. 4

5/20

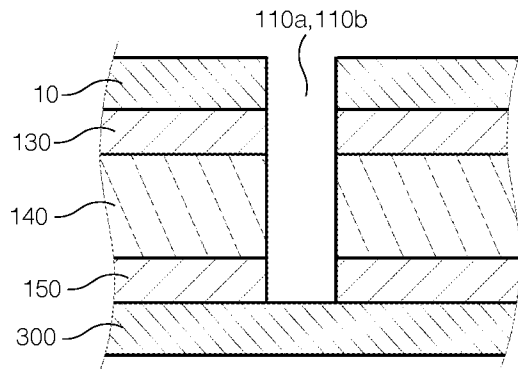



Fig. 5a

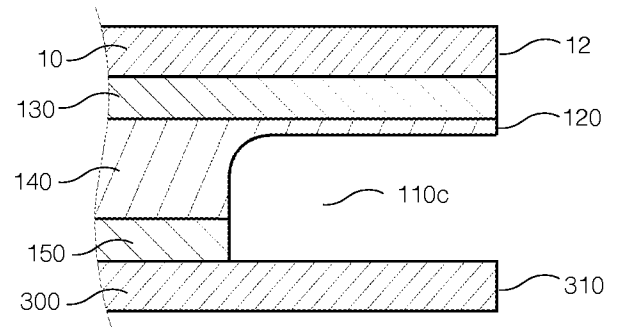


Fig. 5b

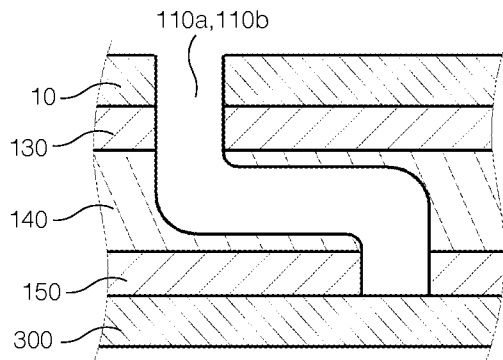


Fig. 5c

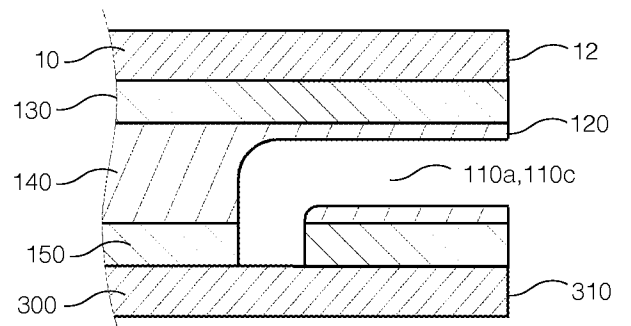


Fig. 5d

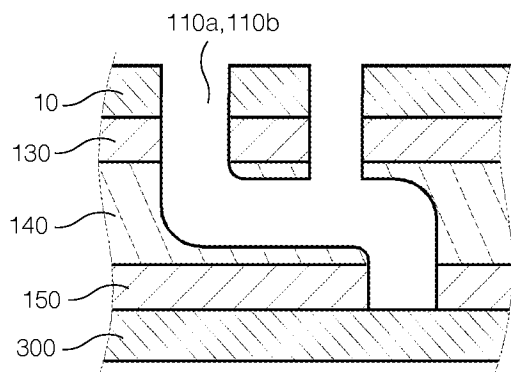


Fig. 5e

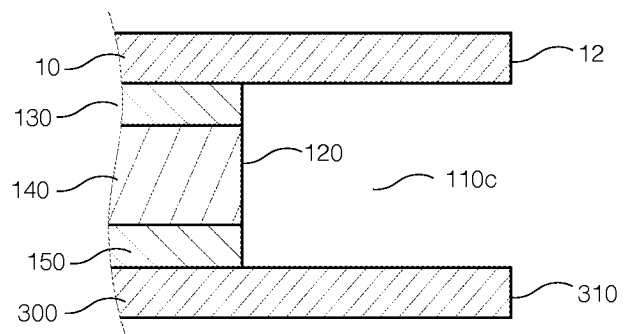


Fig. 5f

6/20

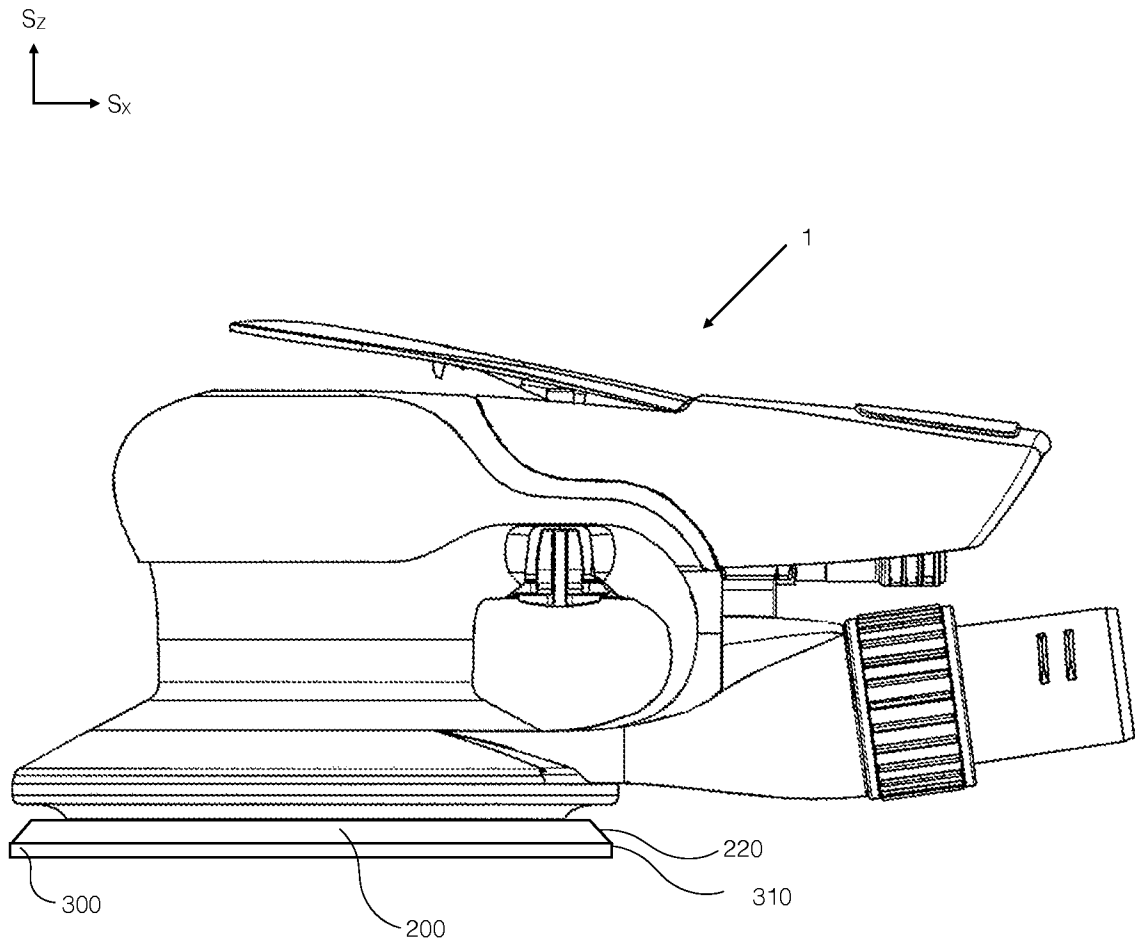


Fig. 6

7/20

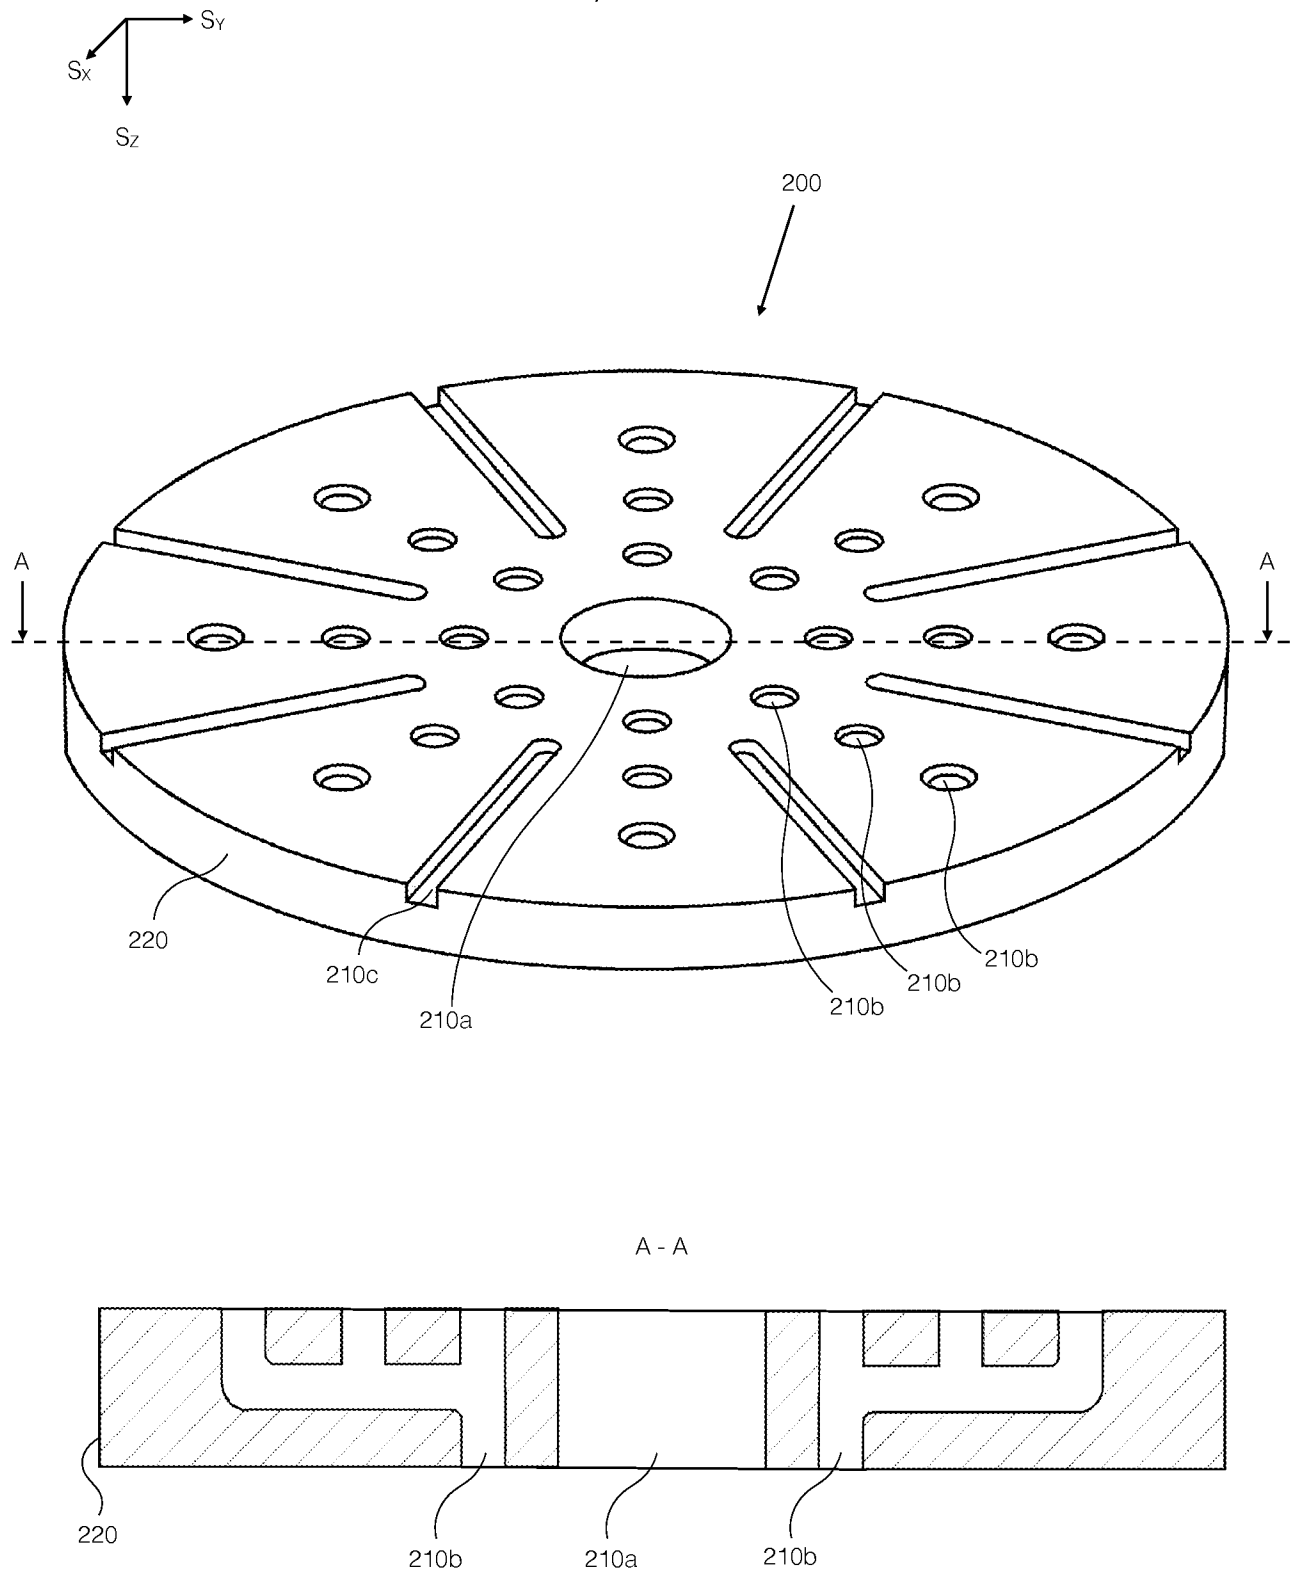


Fig. 7

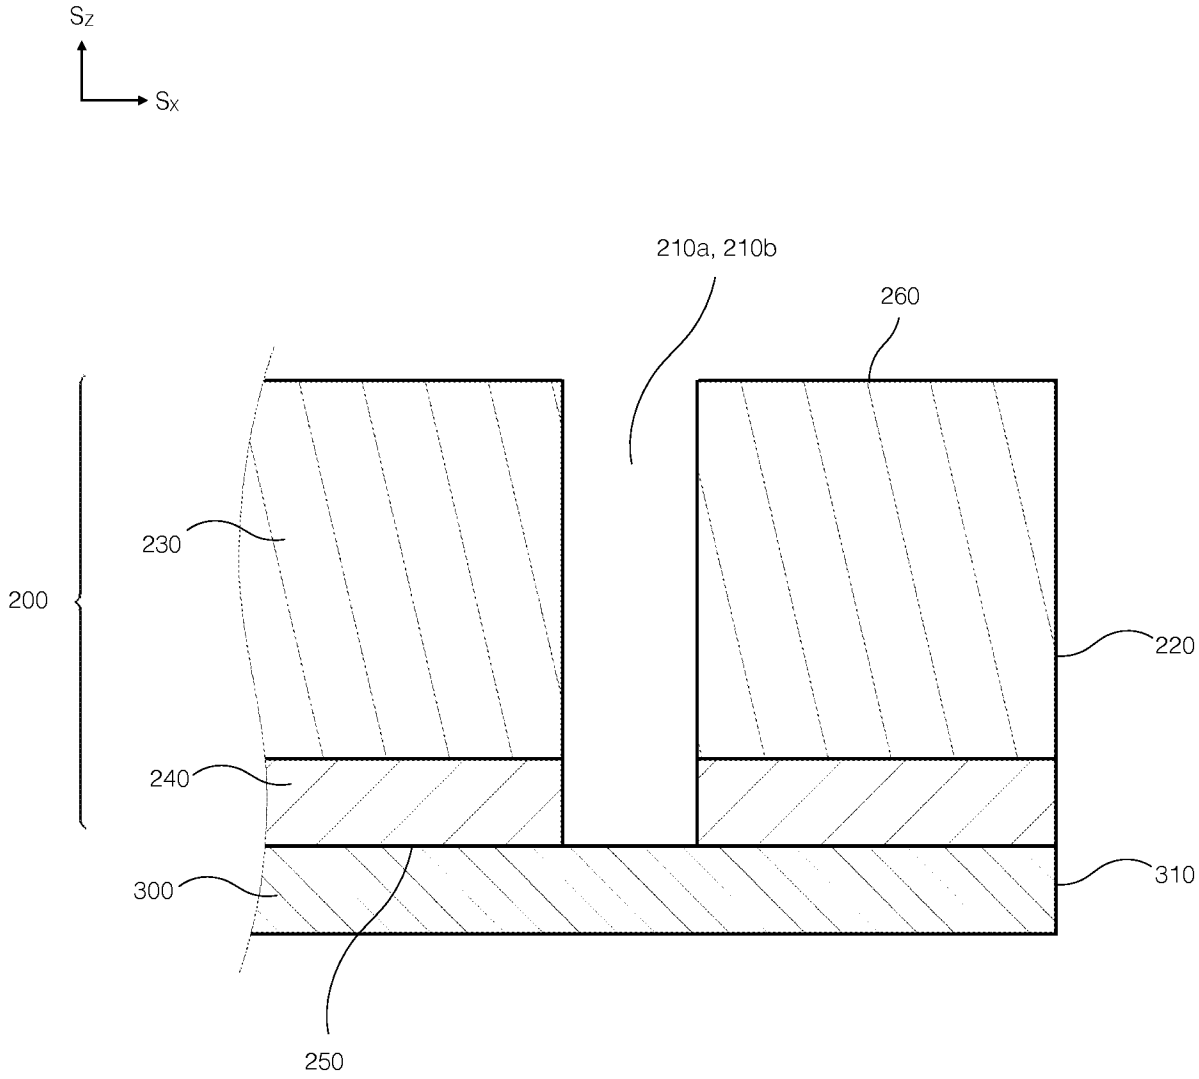


Fig.8

9/20

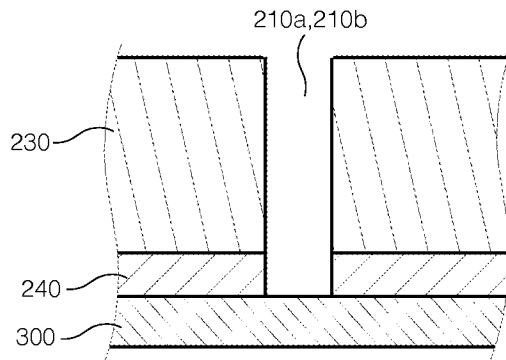



Fig. 9a

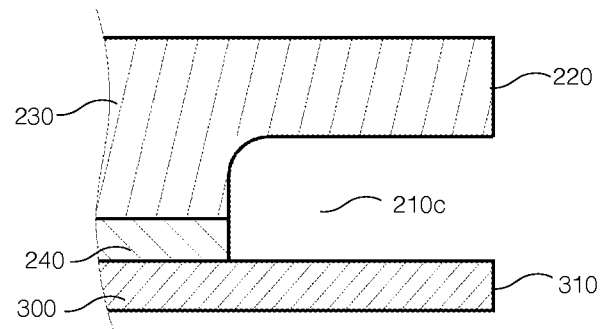


Fig. 9b

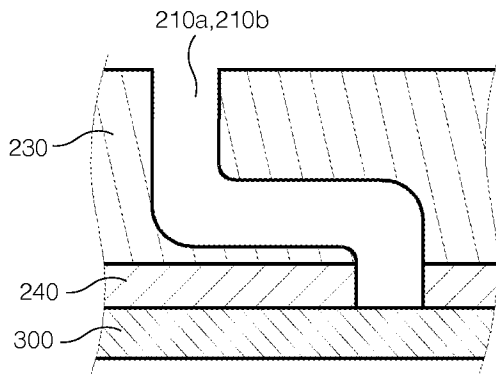


Fig. 9c

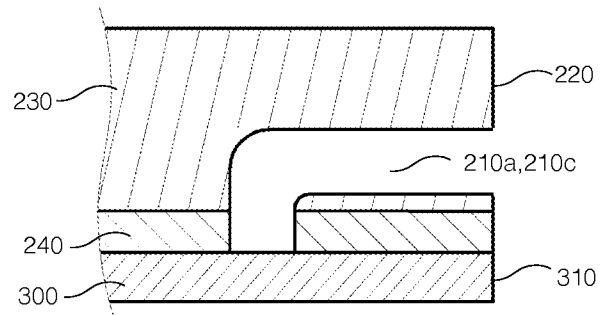


Fig. 9d

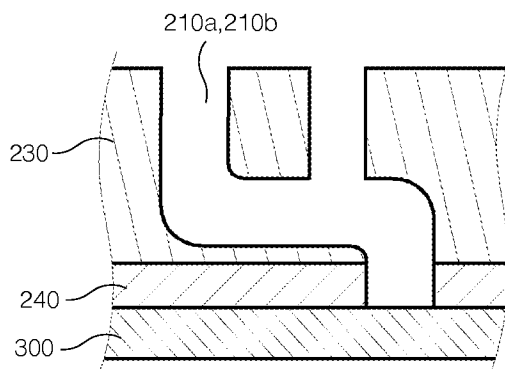


Fig. 9e

10/20

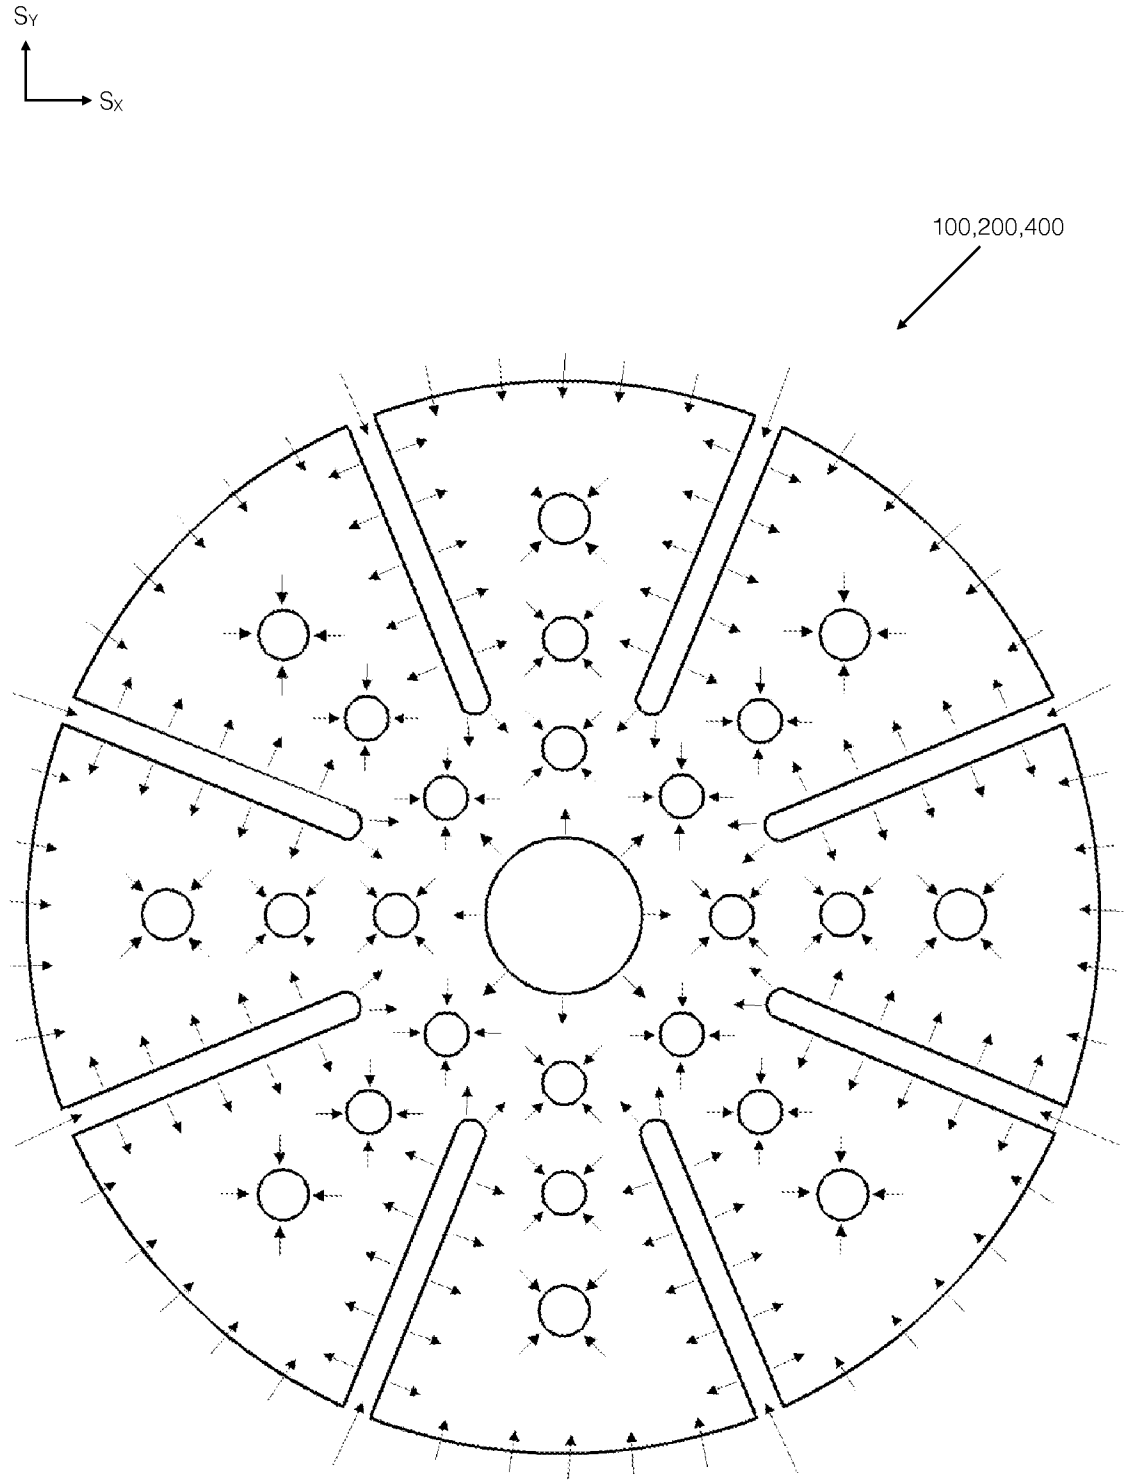


Fig.10a

11/20

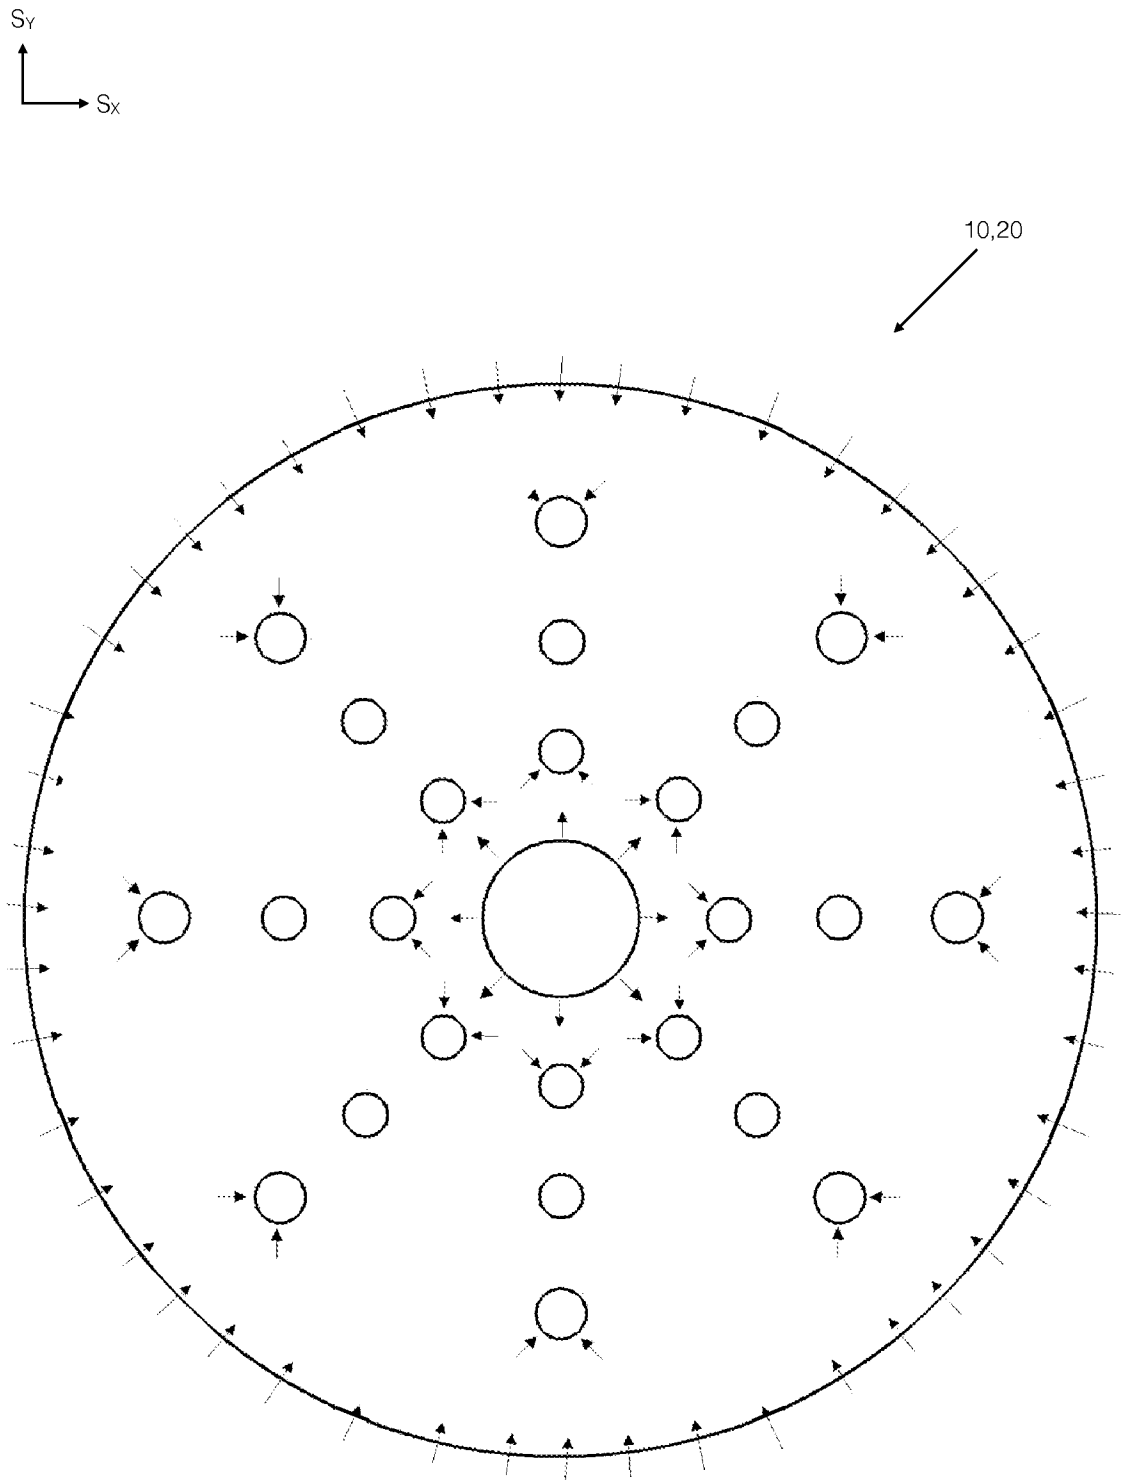


Fig.10b

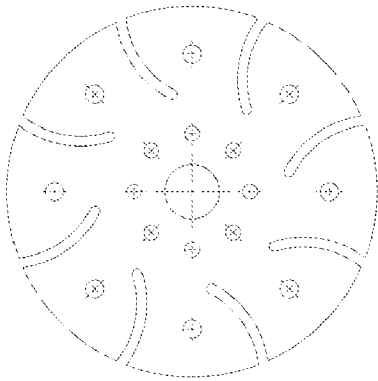



Fig. 11a

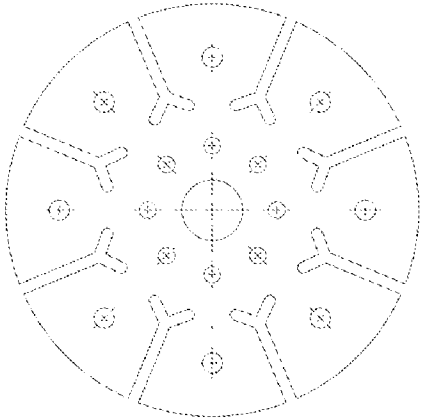


Fig. 11b

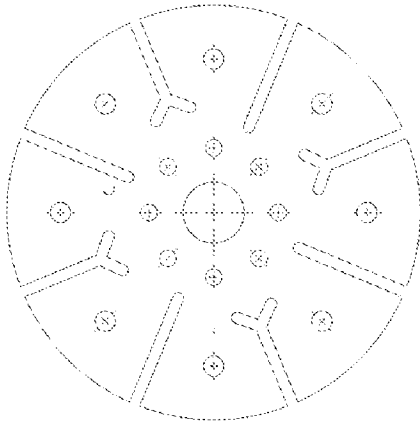


Fig. 11c

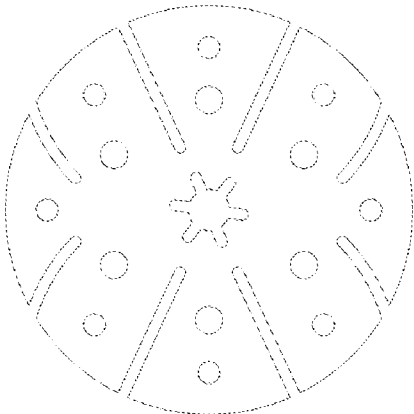


Fig. 11d

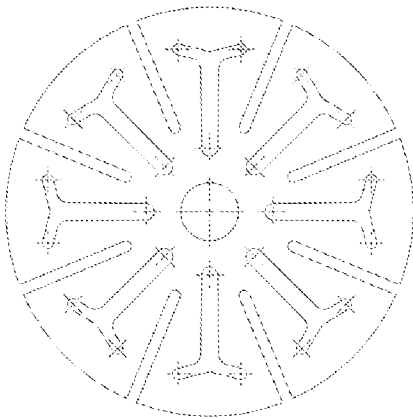


Fig. 11e

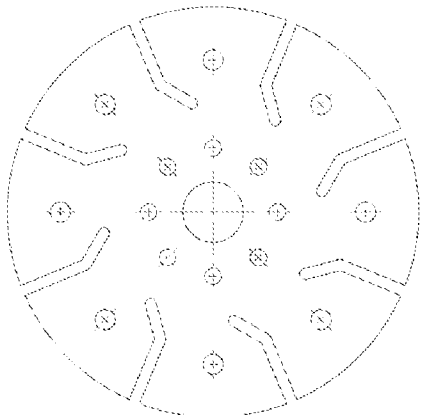


Fig. 11f

13/20

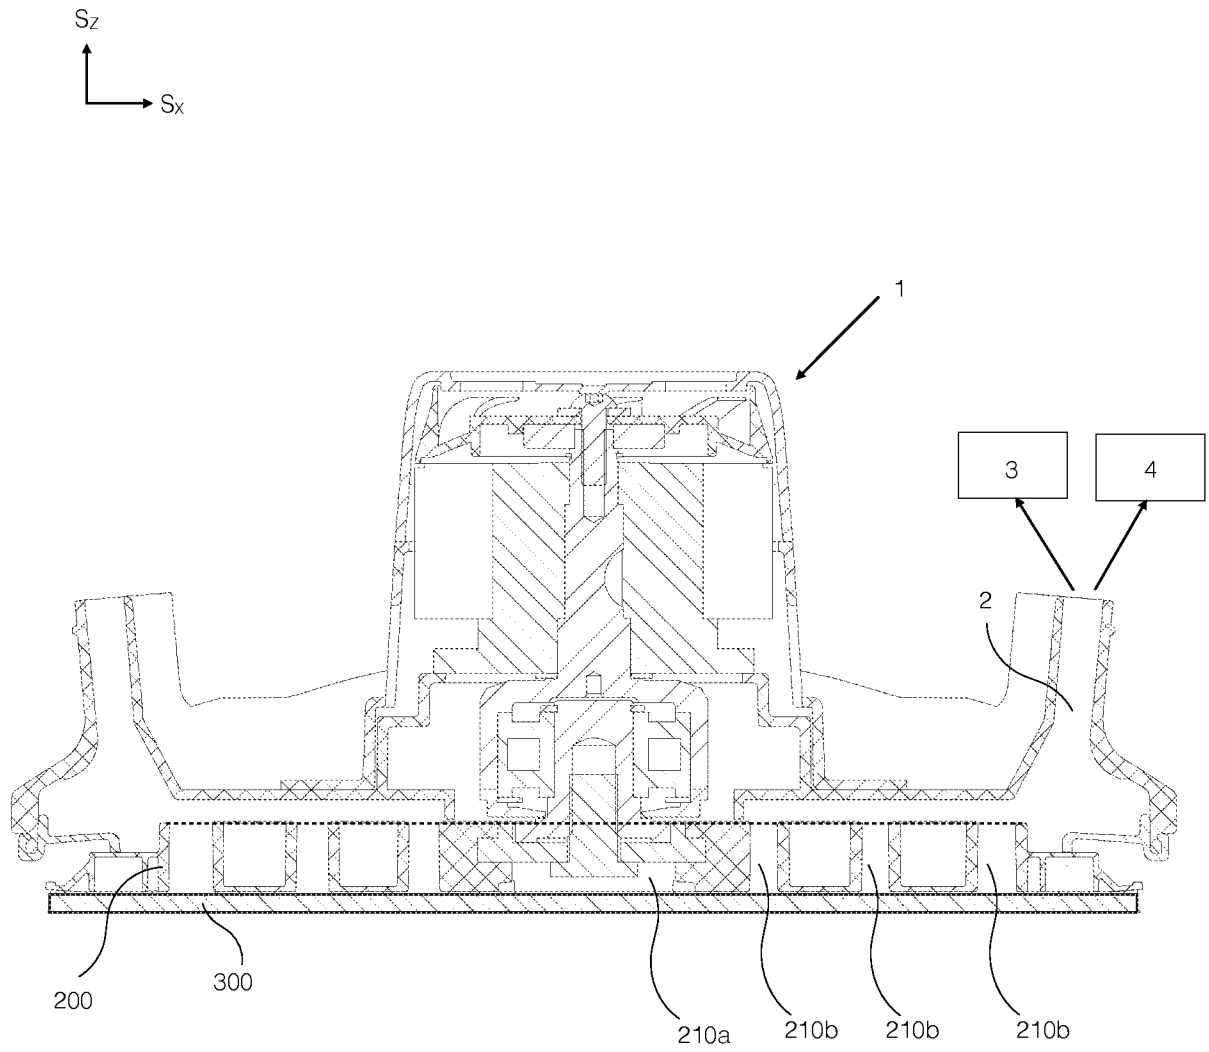


Fig. 12

14/20

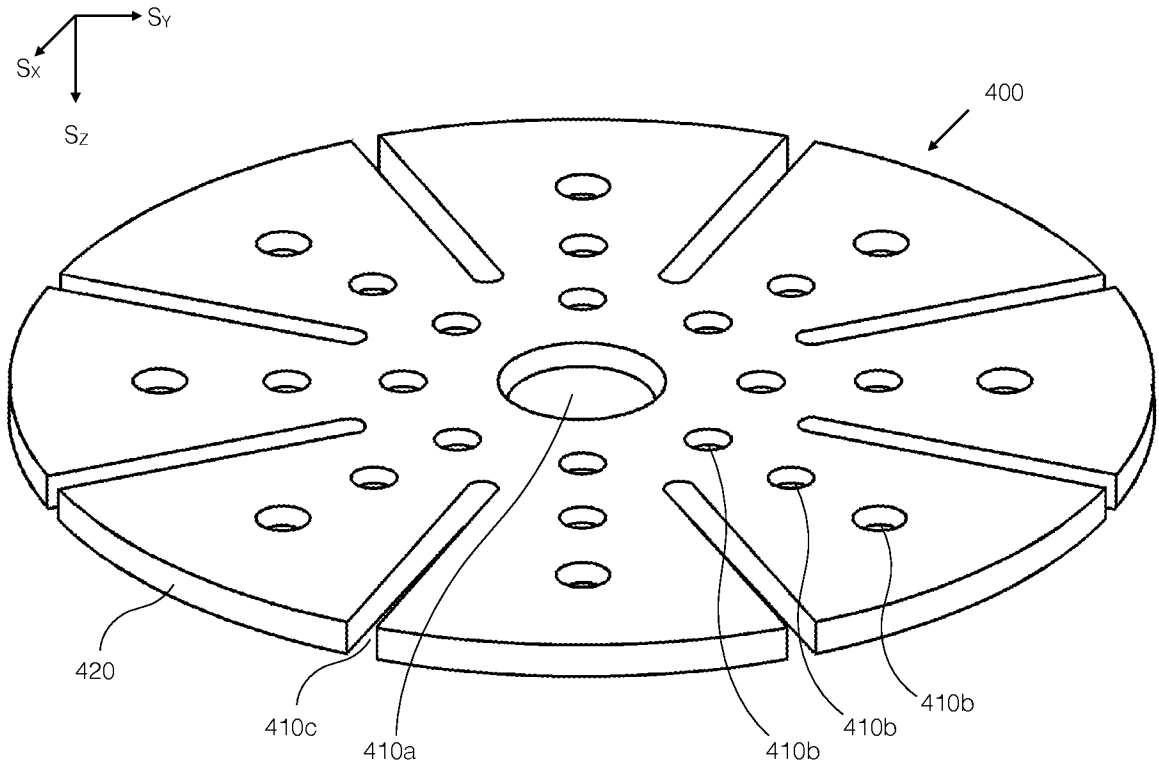


Fig. 13a

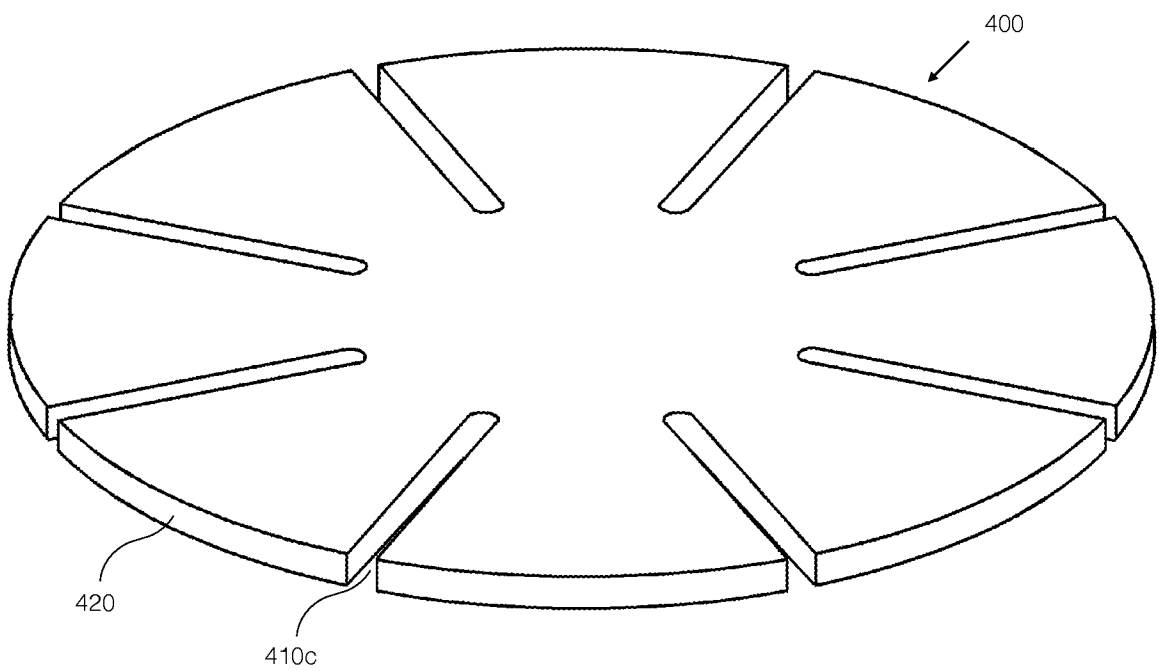


Fig. 13b

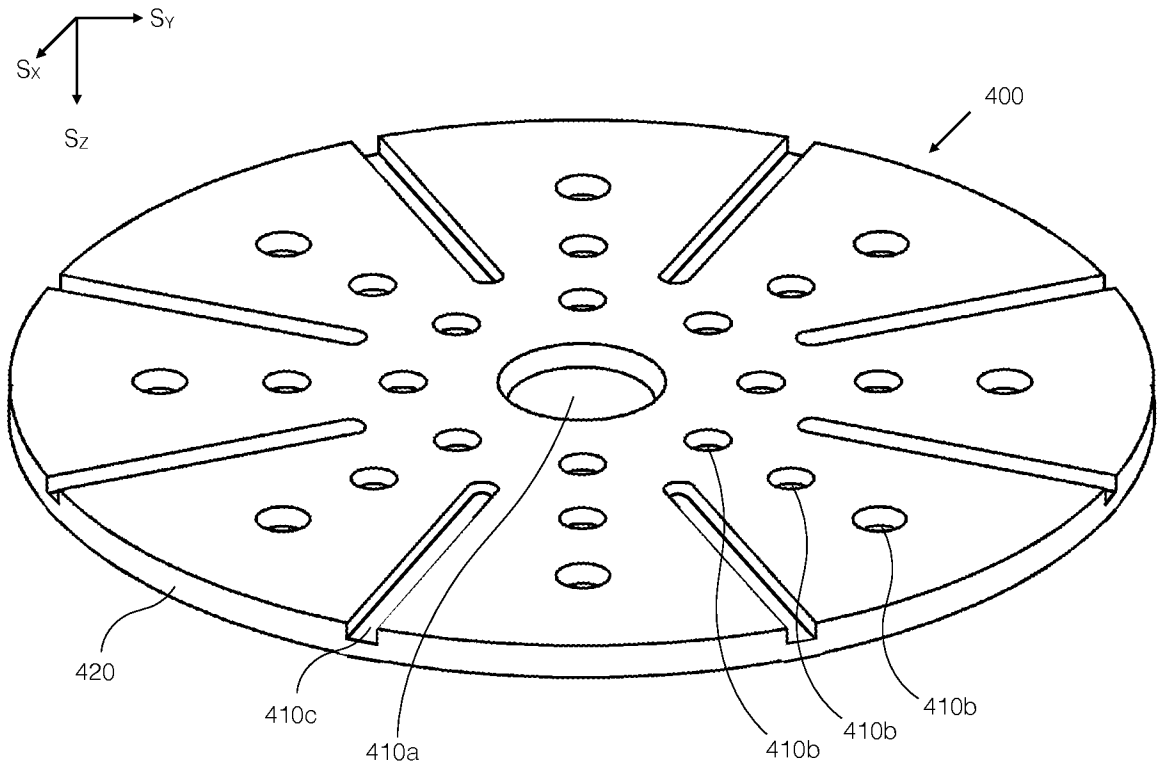


Fig. 13c

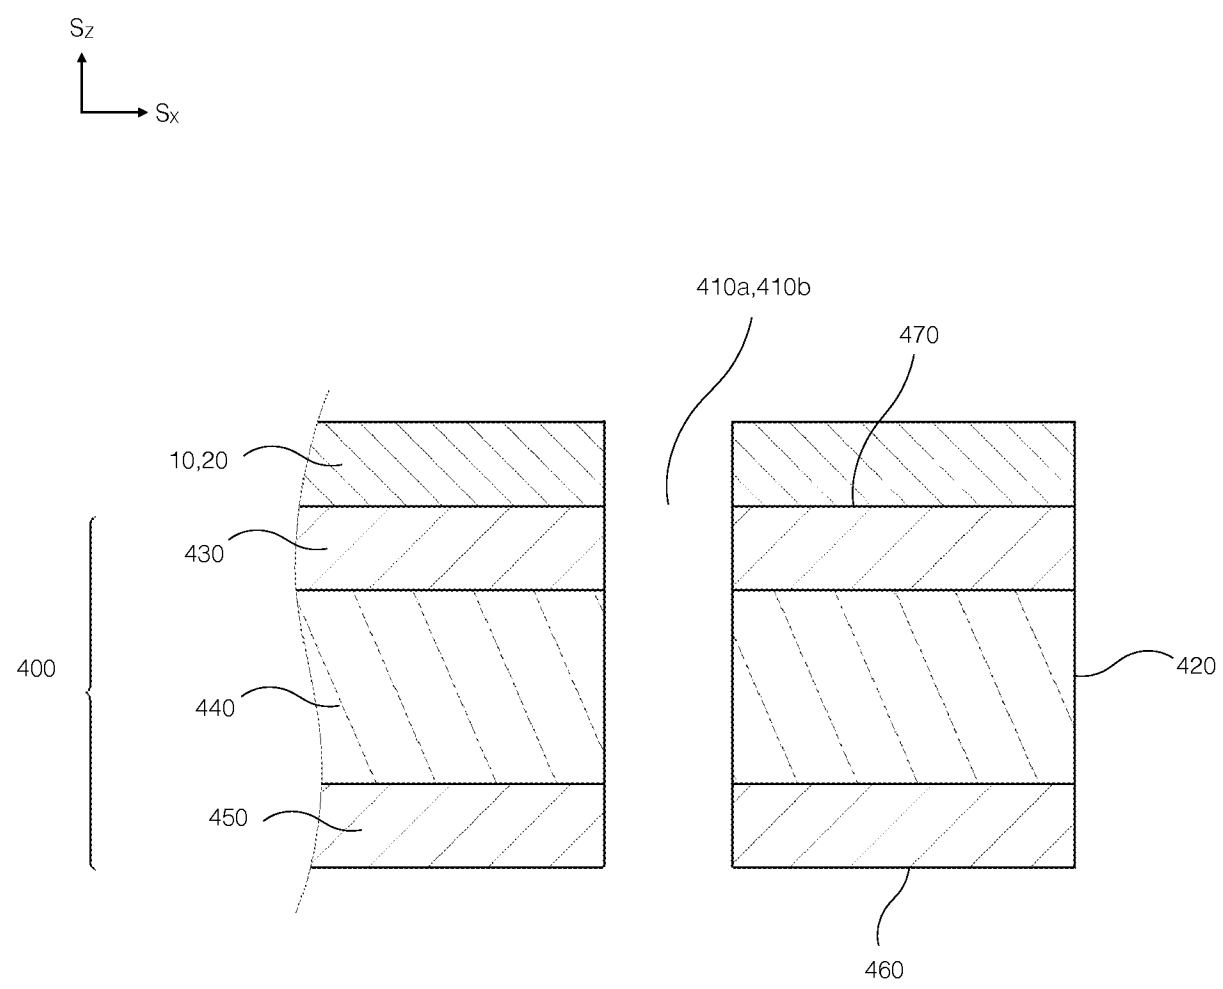


Fig. 14

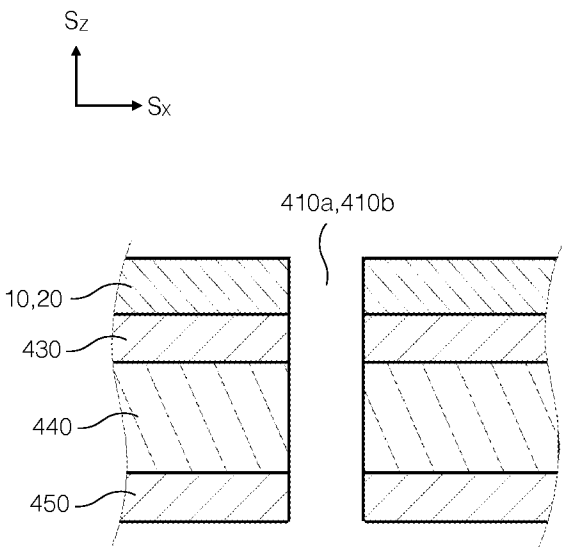


Fig. 15a

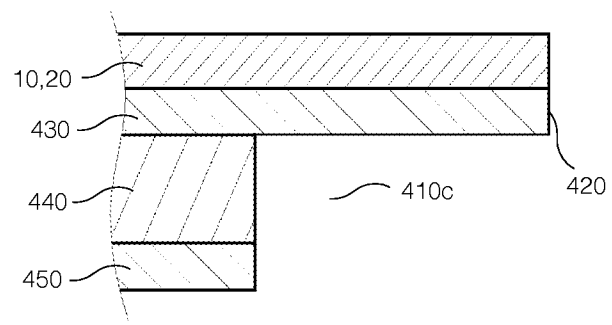


Fig. 15b

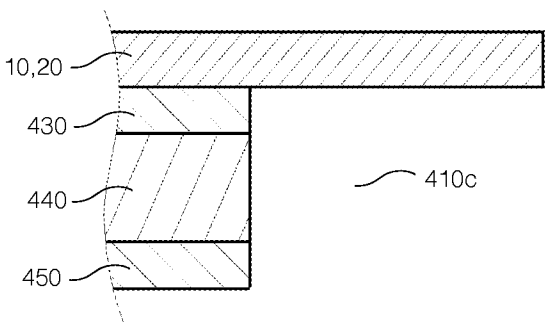


Fig. 15c

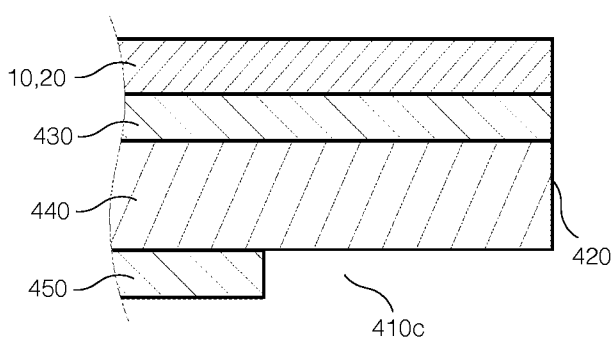


Fig. 15d

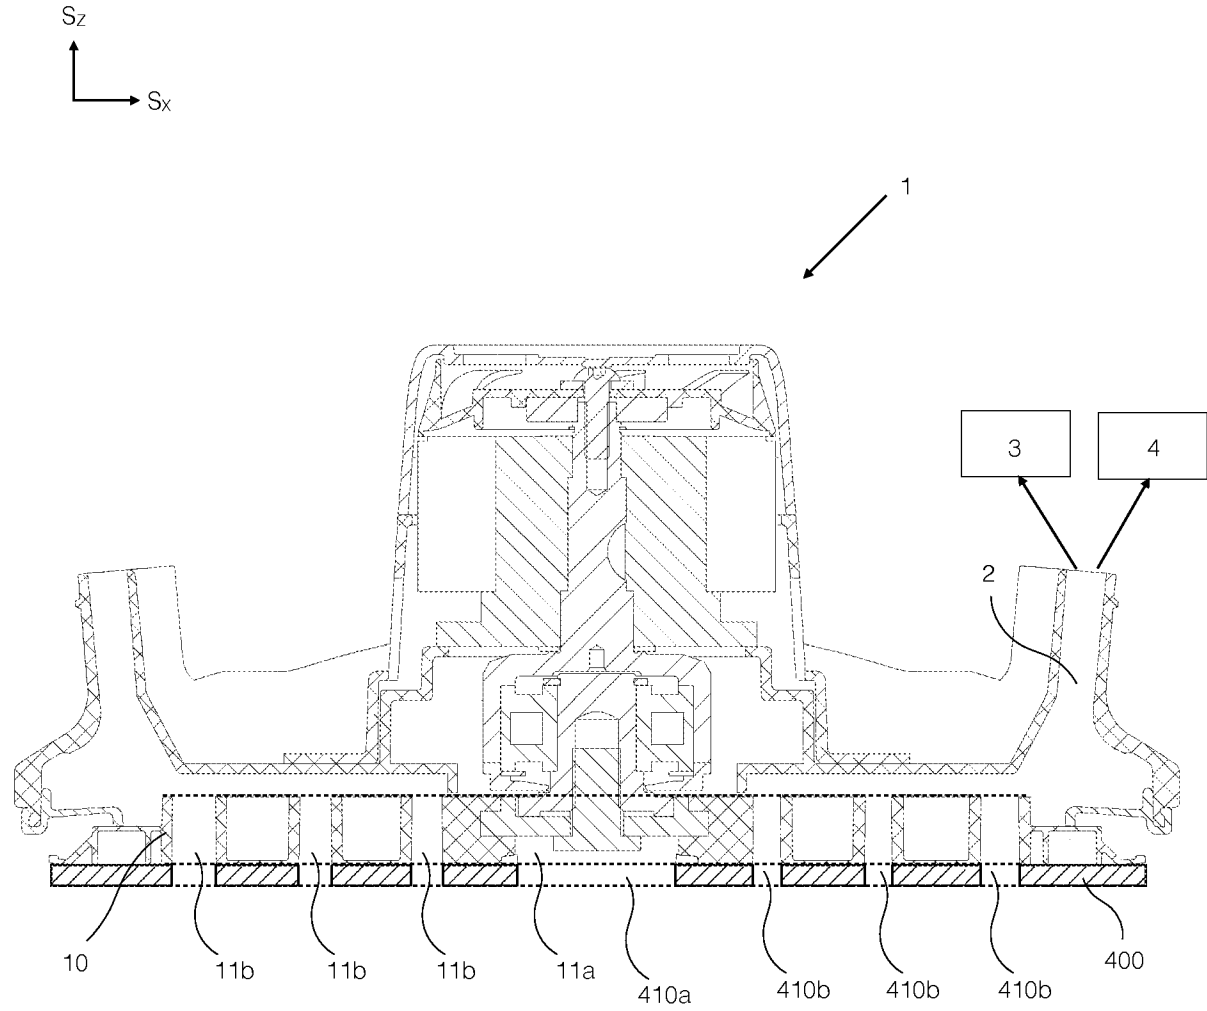


Fig. 16

19/20

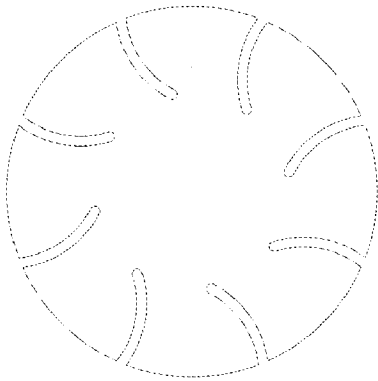



Fig. 17a

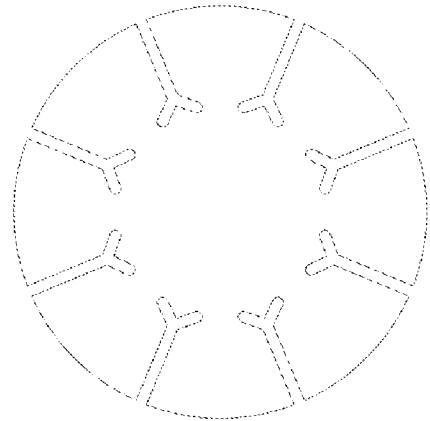


Fig. 17b

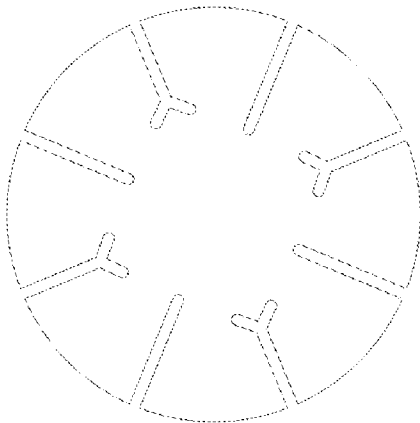


Fig. 17c

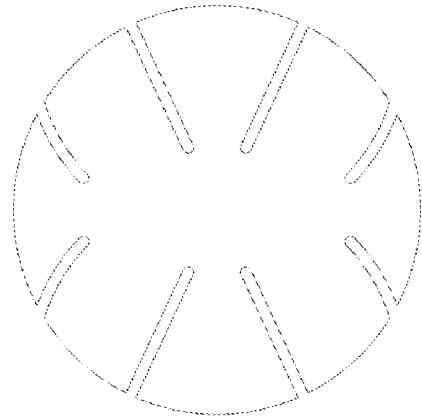


Fig. 17d

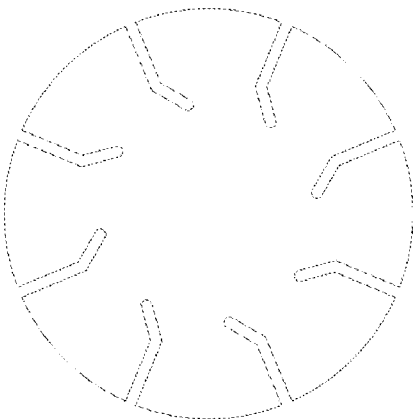


Fig. 17e

20/20

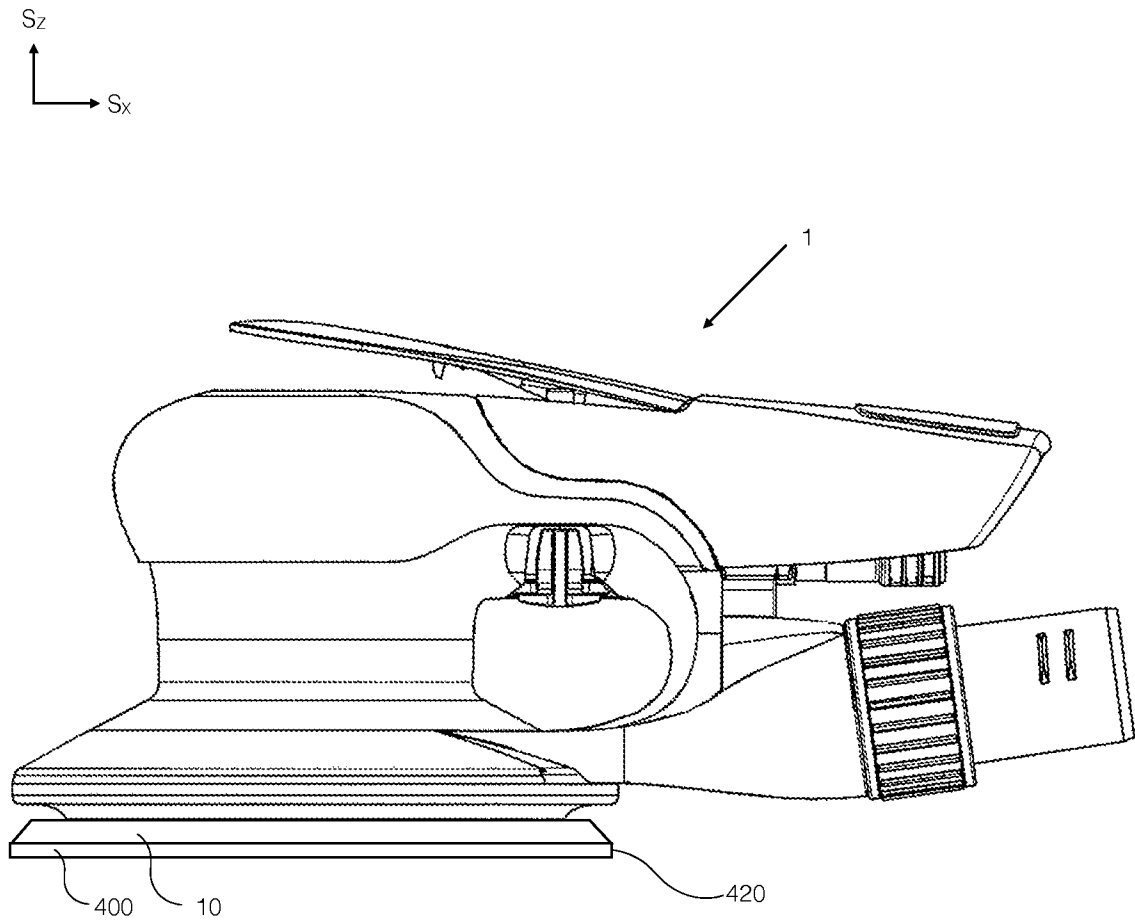


Fig. 18

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2017/050079

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: B24B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base, and, where practicable, search terms used)

EPODOC, EPO-Internal full-text databases, WPIAP, PRH-Internal, Full-text translation databases from Asian languages

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2010323594 A1 (SUN YUNG-YUNG [TW] et al.) 23 December 2010 (23.12.2010) paragraphs [0017]-[0022]; figures 1-3	1-63
A	WO 2007031815 A1 (CATALFAMO PASQUALE [IT]) 22 March 2007 (22.03.2007) whole document	1-63
A	EP 1524077 A1 (LAVAZZA LUCA [IT]) 20 April 2005 (20.04.2005) whole document	1-63
A	WO 2014083243 A1 (KWH MIRKA AB OY [FI]) 05 June 2014 (05.06.2014) paragraphs [0019]-[0021], [0025]; figures 3-7	1-63

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 15 May 2017 (15.05.2017)	Date of mailing of the international search report 17 May 2017 (17.05.2017)
Name and mailing address of the ISA/FI Finnish Patent and Registration Office P.O. Box 1160, FI-00101 HELSINKI, Finland Facsimile No. +358 9 6939 5328	Authorized officer Kimmo Kuparinen Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2017/050079

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
US 2010323594 A1	23/12/2010	None	
.....			
WO 2007031815 A1	22/03/2007	AU 2005336407 A1	22/03/2007
		AU 2005336407 B2	28/06/2012
		CA 2622553 A1	22/03/2007
		JP 2009508695 A	05/03/2009
		US 2008254726 A1	16/10/2008
.....			
EP 1524077 A1	20/04/2005	EP 1524077 B1	09/08/2006
		AT 335572 T	15/09/2006
		DE 602004001827 D1	21/09/2006
		MI 20031971	14/04/2005
.....			
WO 2014083243 A1	05/06/2014	CN 104822427 A	05/08/2015
		EP 2928571 A1	14/10/2015
		MX 2015006858 A	05/02/2016
		RU 2015125518 A	10/01/2017
		TW 201436935 A	01/10/2014
		US 2015298279 A1	22/10/2015
.....			

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2017/050079

CLASSIFICATION OF SUBJECT MATTER

IPC

B24B 55/10 (2006.01)

B24B 55/06 (2006.01)

B24B 41/047 (2006.01)