



HU000033302T2

(19) **HU**(11) Lajstromszám: **E 033 302**(13) **T2****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**

## EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 13 855428**(22) A bejelentés napja: **2013. 11. 14.**(51) Int. Cl.: **B41J 2/00** (2006.01)**B41J 23/00** (2006.01)**B41J 3/407** (2006.01)**B41F 17/18** (2006.01)(96) Az európai bejelentés bejelentési száma:  
**EP 20130855428**(97) Az európai bejelentés közzétételi adatai:  
**EP 2919994 A1** **2014. 05. 22.**

(86) A nemzetközi (PCT) bejelentési szám:

**PCT/IL 13/050946**(97) Az európai szabadalom megadásának meghirdetési adatai: **EP 2919994 B1** **2017. 04. 12.**

(87) A nemzetközi közzétételi szám:

**WO 14076704**

(30) Elsőbbségi adatok:

**201261726859 P****2012. 11. 15.****US**

(73) Jogosult(ak):

**Velox-Puredigital Ltd., 40300 Kfar Yona (IL)**

(72) Feltaláló(k):

**COFLER, Marian, 40300 Kfar Yona (IL)**

(74) Képviselő:

**Sworks Nemzetközi Szabadalmi Ügyvivői  
Iroda Kft., Budapest**

(54)

**Nyomtatási rendszer és eljárás**

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.

(19)



(11)

**EP 2 919 994 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**12.04.2017 Bulletin 2017/15**

(51) Int Cl.:  
**B41J 2/00** <sup>(2006.01)</sup> **B41J 23/00** <sup>(2006.01)</sup>  
**B41F 17/18** <sup>(2006.01)</sup> **B41J 3/407** <sup>(2006.01)</sup>

(21) Application number: **13855428.2**

(86) International application number:  
**PCT/IL2013/050946**

(22) Date of filing: **14.11.2013**

(87) International publication number:  
**WO 2014/076704 (22.05.2014 Gazette 2014/21)**

### (54) **PRINTING SYSTEM AND METHOD**

DRUCKSYSTEM UND -VERFAHREN

PROCÉDÉ ET SYSTÈME D'IMPRESSION

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(30) Priority: **15.11.2012 US 201261726859 P**

(43) Date of publication of application:  
**23.09.2015 Bulletin 2015/39**

(60) Divisional application:  
**17158145.7**

(73) Proprietor: **Velox-Puredigital Ltd.**  
**40300 Kfar Yona (IL)**

(72) Inventor: **COFLER, Marian**  
**40300 Kfar Yona (IL)**

(74) Representative: **Harrison IP Limited**  
**Westminster Business Centre**  
**10 Great North Way**  
**Nether Poppleton**  
**York YO26 6RB (GB)**

(56) References cited:  
**US-A- 3 933 091 US-A- 4 263 846**  
**US-A1- 2001 042 456 US-A1- 2009 213 157**  
**US-A1- 2010 192 517 US-A1- 2010 295 885**  
**US-A1- 2010 295 885 US-A1- 2010 302 304**  
**US-A1- 2012 098 914**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 2 919 994 B1**

## Description

### TECHNOLOGICAL FIELD

**[0001]** The invention is generally in the field of digital printing and relates to printing system and method, in particular for printing on a curved surface.

### BACKGROUND

**[0002]** Digital printing is a printing technique commonly used in the printing industry, as it allows for on-demand printing, short turn-around, and even a modification of the image (variable data) with each impression. Some of the techniques developed for printing on a surface of a three-dimensional object are described hereinbelow.

**[0003]** US Patent No. 7,467,847 relates to a printing apparatus adapted for printing on a printing surface of a three-dimensional object. The apparatus comprises an inkjet printhead having a plurality of nozzles, and being operative to effect relative movement of the printhead and the object, during printing, with a rotational component about an axis of rotation and with a linear component, in which the linear component is at least partially in a direction substantially parallel with the axis of rotation and wherein the nozzle pitch of the printhead is greater than the grid pitch to be printed onto the printing surface in the nozzle row direction.

**[0004]** US Patent No. 6,769,357 relates to a digitally controlled can printing apparatus for printing on circular two-piece cans, the apparatus including digital print-heads for printing an image on the cans and drives for transporting and rotating the cans in front of the print-heads in registered alignment.

**[0005]** US Patent Application No. 2010/0295885 describes an ink jet printer for printing on a cylindrical object using printheads positioned above a line of travel and a carriage assembly configured to hold the object axially aligned along the line of travel and to position the object relative to the printheads, and rotate it relative to the print-heads. A curing device located along the line of travel is used to emit energy suitable to cure the deposited fluid.

**[0006]** US Patent Publication No. 2010/0192517 describes method and device for printing containers in multiple colors on at least one outer surface thereof. The device includes at least one printing group, with at least two ink jet print heads in each printing group. Each of the print heads is designed to be moved out of the printing position after completing a printing task, and then another print head is moved into the printing position to perform a printing task.

### GENERAL DESCRIPTION

**[0007]** There is a need in the art for printing techniques that allow expediting the printing process while enabling maximal utilization (high efficiency) of the printing technology by allowing simultaneous printing on a plurality of

objects. It is also required that such printing techniques retain a relatively high printing resolution, with very high system accuracies (microns), which makes inkjet printing technology very challenging for real production line use.

5 Therefore, maintaining a high efficiency level by maximizing the printing engine utilization is necessary in such techniques to perform production runs.

**[0008]** In the above-mentioned patent publications (US 7,467,847 and US 6,769,357), printing takes place at discrete printing stations and is interrupted while the object is transported between printing stations. This interruption significantly slows the printing process. The inventor of the present invention has developed novel printing techniques enabling conducting a fast and efficient printing process on curved (and/or flat) surfaces of a plurality of objects streamed into the printing system from a production line.

**[0009]** The present invention is aimed at expediting the printing process, by providing a print head assembly which includes a plurality of print head units, where the print head units are arranged in a corresponding plurality of different (e.g., spaced-apart) locations along an axis of translation. In particular, a closed loop lane is used in the printing system to manage at least two streams of objects from a production line and move the streams of objects over the lane through one or more stages of the printing process. A printing zone is defined along a section of the closed loop lane wherein a printing assembly is operatively installed for printing on external surfaces of the objects traversing the printing zone by at least two arrays of print head units of the print head assembly.

**[0010]** The at least two arrays of print head units are preferably configured to define respective printing routes along a printing axis for advancing the streams of objects therealong while printing over their external surfaces by the print head units of the assembly. The print head assembly may comprise several arrays of print head units, each configured to define at least one printing route along the printing axis and which may be used for passing additional streams of objects therealong for printing on the objects. For example, and without being limiting, each print head array may comprise one or more aligned columns of print head units, wherein the print head units in each column have a predefined slant defining a specific orientation of each column of print head units to thereby direct their printing elements (e.g., printing nozzles for ejecting a material composition, markers, engraving tools, laser markers, paint markers) towards a specific printing path covered by the array.

**[0011]** The lane may comprise a conveyor system configured to convey the stream of objects along the lane and pass the objects through one or more zones of the lane adapted for carrying out various functionalities of the system. One or more support platforms (also referred to herein as carriages) may be used in the conveyor system to translate the stream of objects over the lane. In some embodiments each support platform is configured to be loaded with at least one stream of objects from the

production line and slide the objects over the lane through its one or more zones for processing and treatment. The support platform may be configured to maintain a stream of objects loaded thereto and aligned with respect to one or more printing routes defined by the print head assembly, and controllably rotate the objects carried by the platform whenever passing through certain zones of the lane (e.g., the printing zone).

**[0012]** The lane may include loading and unloading zones configured to receive one or more such streams of objects, and for removing the objects therefrom after completing the printing (typically requiring a single loop travel over the lane). A priming zone may be also defined on a section of the lane, typically upstream to the loading zone, wherein the surface areas of the loaded objects undergo a pre-treatment process designed to prepare the surface areas of the objects for the printing process. The lane may further comprise a curing zone, typically upstream to the printing zone, wherein the objects exiting the printing zone undergo a curing process (e.g., ultra violet - UV) to cure material compositions applied to their external surfaces.

**[0013]** In some embodiments, projections of the print head units on the axis of translations fall on different portions of the axis of translation. In this setup, the conveyor system effects a relative motion between the objects and the print head units. The relative motion provides both (i) a rotational motion around the axis of translation for bringing desired regions of the object's surface to the vicinity of the desired print head units and (ii) a translational motion along the axis of translation needed for bringing the object from one of print head units to a successive print head unit. This enables two or more print head units to print on the same object simultaneously. In the techniques of the present application the objects may be printed upon while being moved between groups of print head units. In this manner, the printing process is accelerated, and high printing throughput can be achieved. Additionally, the configuration of the printing system simultaneously prints on more than one object at the same time, by exposing consecutive objects to the arrays of print head units. It is further noted that the array of print head units is suitable for printing also on long objects at a variety of diameters.

**[0014]** The printing may be performed continuously (continuous printing) or in discrete steps (step printing). If the printing is continuous, the relative motion between object and print head units includes concurrent translation along the axis of translation and rotation around the axis of translation. In this manner printing of image data on the object's surface occurs along a substantially spiral path. If the printing occurs in discrete steps, a relative translation between the object and the print heads brings desired regions of the object in the vicinity of one or more groups. The translation is stopped, and a relative rotation is effected, in order to enable circumferential printing on the object's surface.

**[0015]** In some embodiments the print head assembly

includes a plurality of groups of printing heads. Each group includes at least two print head units arranged in different locations along a curved path around said axis of translation and surrounding a respective region of the axis of translation.

**[0016]** Therefore, an aspect of some embodiments of the present application relates to a printing system configured for printing on an outer curved surface of a volumetric object. The system comprises a conveyor system and a print head assembly. The conveyor system is configured for effecting a relative translation between the object and the print head assembly along an axis of translation, and for effecting a relative rotation between the object and the print head assembly around the axis of translation. The print head assembly comprises a plurality of print head units, arranged such that projections of different print head units on the axis of translations fall on different portions of the axis of translation, each of the print head units having at least one nozzle and/or ejection aperture (also referred to herein as printing element) for ejecting a material composition onto the object's surface.

**[0017]** In a variant, the print head assembly further comprises additional print head units, such that the print head units are arranged in a plurality of groups, at least one group comprising at least two of the print head units arranged along a curved path around the axis of translation, and each group surrounding a respective region of the axis of translation.

**[0018]** In another variant, the printing system comprises a control unit configured to operate the conveyor system to carry out said translation and rotation and to operate at least some of the print head units according to a predetermined pattern.

**[0019]** The control unit may be configured to operate the conveyor system and at least some of the print head units, so as to effect simultaneous printing of image data on the object's surface by at least two print head units, each belonging to a respective one of the groups.

**[0020]** Optionally, the control unit is configured to operate the conveyor system and at least some of the print head units, so as to effect simultaneous printing of image data on the object's surface by different printing elements of a single one of the print head units.

**[0021]** The control unit may be configured to operate the conveyor system and at least some of the print head units, so as to effect simultaneous printing of image data on the object's surface by at least two print head units belonging to a single one of the groups.

**[0022]** In a variant, the conveyor system is configured for moving the object along the axis of translation. In another variant, the conveyor system is configured for moving the print head assembly along the axis of translation. In yet another variant, the conveyor system is configured for rotating the object around the axis of translation. In a further variant, the conveyor system is configured for rotating the print head assembly around the axis of translation.

**[0023]** In some embodiments the control unit is config-

ured to operate the conveyor system to carry out the translation in a step-like fashion and to carry out the rotation at least during a time interval in which translation does not occur, and to operate at least some of the print head units to carry out the printing during the time interval in which translation does not occur and rotation occurs.

**[0024]** In some embodiments the control unit is configured for operating the conveyor system to carry out the translation and rotation simultaneously while operating at least some of the print head units to effect printing, such that continuous printing of image data is performed on the object's surface along at least one substantially spiral path.

**[0025]** In a variant, said conveyor system is further configured for effecting a relative motion between the object and the print head assembly along one or more radial axes substantially perpendicular to the axis of translation, in order to maintain a desired distance between at least one print head unit and the object's surface, while said at least one print head unit prints data on said surface.

**[0026]** In another variant, the conveyor system is configured for displacing at least one of the print head units to move towards and away from the translation axis.

**[0027]** In yet another variant, the conveyor system is configured and operable for displacing said at least one of said print head units with respect to the translation axis before operating the print head assembly to print the image data.

**[0028]** In a further variant, the conveyor system is configured and operable for displacing said at least one of the print head units with respect to the translation axis during the printing of the image data.

**[0029]** In yet a further variant, the conveyor system is configured and operable to operate said displacement to adjust a position of said at least one print head unit to conform to a shape of the surface of the object which is to undergo said printing.

**[0030]** In some embodiments of the present invention, the control unit is configured to operate said displacement of said at least one print head unit between an inoperative passive position and an operative active position of said at least one print head unit.

**[0031]** In a variant, the print head units of the same group are configured for ejecting a material composition of the same color. In another variant, each of the groups of print head units is configured for ejecting a material composition of a respective color.

**[0032]** In yet another variant, the printing system comprises at least one curing unit configured for curing a material composition ejected by any print head unit on the object's outer surface, the curing unit being located downstream along the translation axis of a last one of said print head units.

**[0033]** In a further variant, the printing system comprises at least one priming unit configured for priming at least one location of the object's surface to receive a composition to be ejected by at least one of the print head units, the priming unit being located upstream along the trans-

lation axis of a last one of said print head units. In yet a further variant, the printing system comprises at least a second curing unit located between print head units belonging to the same group. Optionally, the printing system comprises at least a second priming unit located between print head units belonging to the same group.

**[0034]** In a variant, projections along the translation axis of the print head units of at least one group fall on a single region of the translation axis. In another variant, the print head units of at least one of the groups are staggered, such that projections along the translation axis of at least two of the print head units of the at least one group fall on a different regions of the translation axis. In yet another variant, different print head units are configured for ejecting respective material composition on a region of the object's surface, such that a combination of the respective compositions on the object's surface forms a desired composition.

**[0035]** In a further variant, successive printing elements (e.g., nozzles and/or ejection apertures) of at least one of the print head units are configured for ejecting respective compositions on a region of the object's surface, such that a combination of the respective compositions on the object's surface forms a desired composition.

**[0036]** Optionally, the combination of the respective compositions comprises at least one of a mixing between the respective compositions and a chemical reaction between the respective compositions.

**[0037]** In yet another aspect there is provided a printing system for printing on outer surfaces of objects according to claim 1.

Other embodiments are the subject-matter of dependent claims 2 to 14.

**[0038]** In yet another aspect there is provided a method of printing on outer surfaces of objects according to claim 15.

Another embodiment is the subject-matter of dependent claim 16.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0039]** In order to better understand the subject matter that is disclosed herein and to exemplify how it may be carried out in practice, embodiments will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

**Fig. 1** schematically illustrates a printing system according to some possible embodiments employing a closed loop lane to translate objects therealong; **Figs. 2A** and **2B** are schematic drawings illustrating different examples of a print head assembly according to some embodiments, which includes a plurality of print head units located at successive positions along an axis of translation; **Figs. 3A** and **3B** are schematic drawings illustrating possible arrangements of printing elements on sin-

gle print head units, according to some possible embodiments;

**Figs. 4A and 4B** are schematic drawings illustrating different views of the printing array according to some possible embodiments, which includes a plurality of groups of print head units located at successive positions along an axis of translation;

**Figs. 5A and 5B** are schematic drawings exemplifying use of a conveyor system according to some possible embodiments;

**Figs. 6A and 6B** are schematic drawings illustrating some possible embodiments in which the print head units are controllably movable;

**Figs. 7A and 7B** are schematic drawings exemplifying possible embodiments in which the print head units are controllably movable to fit a shape of the object, before and during rotation of the object;

**Fig. 8A** is a schematic drawing exemplifying some embodiments in which the print head units belonging to the same group are positioned at the same location along the axis of translation;

**Fig. 8B** is a schematic drawing exemplifying some embodiments in which the print head units belonging to the same group are staggered, being positioned at different locations along the axis of translation;

**Fig. 9A** is schematic drawing exemplifying some embodiments in which at least one curing/fixing station is located at the end of the print unit assembly, downstream of the last group of print head units and/or in which at least one priming/pretreatment station is located at the beginning of the print unit assembly, upstream from first group of print head units;

**Fig. 9B** is schematic drawing exemplifying some embodiments in which at least one curing/fixing station and/or priming/pretreatment station is located between two successive groups of print head units;

**Fig. 9C** is a schematic drawing exemplifying some embodiments in which a plurality of curing/fixing and/or priming/pretreatment stations are positioned one after the other along the axis of translation;

**Fig. 9D** is a schematic drawing exemplifying some embodiments in which at least one curing/fixing and/or priming/pretreatment unit is located between print head units of the same group;

**Figs. 10A to 10C** are schematic drawings illustrating some embodiments in which first and second compositions are jetted on the same location of the object's surface by print head units of first and second groups respectively, in order to print the location with a third composition which is formed by a combination of the first and second compositions;

**Figs. 11A to 11C** are schematic drawings illustrating some embodiments in which first and second compositions are jetted on the same location of the object's surface by different nozzles belonging to a single print head unit, in order to print the location with a third composition which is formed by a combination of the first and second compositions;

**Figs. 12A to 12C** are schematic drawings illustrating some embodiments in which first and second compositions are jetted on the same location of the object's surface by respectively first and second print head units of the same group, in order to print the location with a third composition which is formed by a combination of the first and second compositions;

**Fig. 13A and 13B** are schematic drawings exemplifying possible embodiment in which printing units belonging to different groups are located at the same position around the axis of translation, and are organized in bars/columns;

**Fig. 14** is a block diagram illustrating a control unit usable according to some possible embodiments to control the conveyor system and print head assembly according to one or more kinds of input data;

**Fig. 15** schematically illustrates a conveyor system according to some possible embodiments;

**Figs. 16A and 16B** schematically illustrate arrangement of the print head assembly in the form of an array according to some possible embodiments;

**Fig. 17** schematically illustrates a carriage and an arrangement of mandrels mounted thereon, configured to hold objects to be printed on and translate and rotate them over the conveyor system;

**Fig. 18** schematically illustrates a carriage loaded with a plurality of objects to be printed entering a printing zone of the system;

**Fig. 19** schematically illustrates simultaneous printing on a plurality of objects attached to three different carriages traversing the printing zone;

**Fig. 20** schematically illustrates a mandrel arrangement according to some possible embodiments; and

**Figs. 21A to 21C** schematically illustrate possible control schemes usable in some possible embodiments.

## DETAILED DESCRIPTION OF EMBODIMENTS

**[0040]** The various embodiments of the present invention are described below with reference to **Figs. 1** through **20** of the drawings, which are to be considered in all aspects as illustrative only and not restrictive in any manner. Elements illustrated in the drawings are not necessarily to scale, emphasis instead being placed upon clearly illustrating the principles of the invention. This invention may be provided in other specific forms and embodiments without departing from the essential characteristics described herein.

**[0041]** **Fig. 1** schematically illustrates a printing system **17** according to some possible embodiments employing a closed loop lane **10** (e.g., elliptical track) to translate objects to be printed on (not shown) therealong towards a printing zone **12z** provided in the lane **10** and comprising one or more printing head assemblies **100** (e.g., comprising printing heads of various colors). The printing system **17** in this non-limiting example comprises a loading zone **306l** configured for automatic loading of a plurality

of objects to be printed on, from a production line. The loading zone **306l** may comprise a loading unit employing an independent controller and one or more sensors, motors mechanics and pneumatics elements, and being configured to communicate measured sensor data with a control unit **300** of the printing system **17** for timing, monitoring and managing the loading process. In some embodiments, the loading unit is configured to load a stream of objects to the system's lane at the same accurate index (used for marking printing start point on the surface of the object *e.g.*, in cases in which the object has a previous mark or cap orientation).

**[0042]** In some embodiments the loaded objects are attached to a plurality of carriages **C<sub>1</sub>, C<sub>2</sub>, C<sub>3</sub>, ..., C<sub>n-1</sub>, C<sub>n</sub>** (also referred to herein as support platforms or as carriages **C<sub>i</sub>**) configured for successive movement over the lane **10** and for communicating data with the control unit **300** regarding operational state of the carriages **C<sub>i</sub>** (*e.g.*, speed, position, errors etc.). As described hereinbelow in detail, the carriages **C<sub>i</sub>** may be configured to simultaneously, or intermittently, or in an independently controlled manner, move the carriages **C<sub>i</sub>** along the lane **10**, and to simultaneously, or intermittently, or in an independently controlled manner, to move and rotate the object attached to them (*e.g.*, using rotatable mandrels, not shown in fig1) while being treated in a pre-treatment unit **204** (also referred to herein as a priming station) and/or being treated/coated/primed prior, during or after, printing on in the printing zone **12z**.

**[0043]** A size detection unit **13** may be used in the lane **10** to determine sizes (geometrical dimensions and shapes) of the objects received at the loading zone **306l** and to communicate size data to the control unit **300**. The size data received from the size detection unit **13** is processed and analyzed by the control unit **300** and used by it to adjust positions of print head units of the print head assembly **100** and alert on any possible collision scenarios.

**[0044]** A pre-treatment unit **204** may be also provided in the lane **10** to apply a pre-treatment process to the surfaces of the objects moved along the lane **10** (*e.g.*, plasma, corona and/or flame treatment to improve adhesion of the ink to the container and create uniformity of the surface to the introduced printing/coating). Accordingly, control unit **300** may be configured to adjust operation of the pre-treatment unit **204** according to size data received from the size detection unit **13**. As exemplified in **Fig. 1** the print head assembly **100** may be configured to accommodate a plurality of carriages **C<sub>i</sub>** (in this example three carriages **C<sub>1</sub>, C<sub>2</sub>** and **C<sub>3</sub>** are shown) and simultaneously print on surfaces of the objects attached to each one of the carriages.

**[0045]** Objects exiting the printing zone **12z** may be moved along a portion of the lane **10** comprising a curing unit **202**. The curing unit **202** may be operated by the control unit **300** and configured to finalize the printing process by curing the one or more layer of compositions applied to their surfaces (*e.g.*, employing an ultra-vio-

let/UV ink curing process or any other fixing or drying process such as IR, Electronic beam, chemical reaction, and suchlike). A vision inspection unit **16** may be further used to collect data (*e.g.*, image data) indicative of the colors, patterns (*e.g.*, print registration, diagnostics, missing nozzles, image completeness) applied to the objects exiting the printing zone **12z** and/or the curing unit **202**. After the printing, and optionally curing and/or inspection, process is completed the objects may be advanced over the lane **10** towards an unloading zone **306u** for automatic removal thereof from the printing system **17**. The unloading zone **306u** may include an unloading unit employing an independent controller and one or more sensor units, motors, mechanics and pneumatics elements, and being configured to communicate sensor data with the control unit **300** of the printing system **17** for monitoring and managing the unloading process.

**[0046]** **Figs. 2A** and **2B** are schematic drawings illustrating different examples of a print head assembly **100** of the present disclosure, which includes a plurality of print head units located at successive positions along an axis of translation.

**[0047]** In the example of **Fig. 2A**, the print head units **102a, 104a, 106a, 108a** are arranged such that projections of different print head units on the axis of translation fall on different portions of the axis of translation **110** (along the printing axis), and are set at respective (angular) locations around the axis of translation **110**. In the example of **Fig. 2B**, the print head units **102a, 104a, 106a, 108a** are arranged such that projections of different print head units on the axis of translations fall on different portions of the axis of translation **110**, and are positioned at the same (angular) locations around the axis of translation **110**, to form a line of print head units substantially parallel to the axis of translation **110**.

**[0048]** In this non-limiting example the axis of translation **110** generally corresponds to an axis of the object **101**, and is the axis along which a respective translation between the object **101** and the print head assembly **100** may occur. Moreover, a relative rotation between the object **101** and the print head assembly **100** may occur around the axis of translation **110**.

**[0049]** The details of the translational and rotational motions will be discussed later hereinbelow.

**[0050]** Referring now to **Figs. 3A** and **3B**, schematically illustrating possible arrangements of printing elements **130** (*e.g.*, nozzles or ejection apertures) on single print head units, according to some possible embodiments.

**[0051]** As exemplified in **Figs. 3A/B**, a print head unit may include one or more nozzles or ejection apertures (generally **130**) configured for enabling ejection of material compositions onto the surface of the object **101**. The material compositions may be fluids (as is the case in inkjet printing, and plastic jetting or/and printing) and/or solids (*e.g.*, powders, as is the case in laser printing). The term printing is herein meant to include any type of ejection of a material onto a surface of an object, and/or

engraving or marking dots, lines or patterns thereon. Thus printing includes, for example, changing the color, the shape, or the texture of an object, by ejecting a material on the object's surface, engraving and/or applying marks thereon. For example, and without being limiting, the printing head units may comprise one or more markers (e.g., engraving tool, laser marker, paint marker, and suchlike) configured to apply visible and/or invisible (*i.e.*, functional, such as electronic charges) markings on the external surfaces of the objects traversing the printing zone **12z**.

[0052] **Fig. 3A** exemplifies different configurations of printing elements **130** of the print head units **104a** and **106a**. The print head units **104a** and **106a** are shown from a side thereof parallel to the translation axis. The print head unit **104a** includes a plurality of printing elements **130** (e.g., four), set along a row at successive locations along the axis of translation. The print head unit **106a** in this non-limiting example includes a single printing element **130**, as commonly used in the art for jetting plastic compositions.

[0053] **Fig. 3B** exemplifies a possible configuration of the printing elements provided in the print head unit **102a**. **Fig. 3B** shows a front view of the print head unit **102a** (perpendicular to the translation axis **110**). In this non-limiting example, the print head unit **102a** includes a column of printing elements **130** set in a line perpendicular to the translation axis **110**. Optionally, not all of the printing elements **130** are perpendicular to the object's surface. In the example of **Fig. 3B**, the printing element is perpendicular to the object's surface, e.g., is configured for ejecting a material composition along an ejection path perpendicular to the object's surface. On the other hand, the outer printing elements located on the sides of the central printing element are oblique to the object's surface.

[0054] Optionally, a print head unit used in the present invention can include a plurality of rows or columns of printing elements forming a two dimensional array defining a surface of the print head assembly facing the object. The print head assembly may be configured in any shape, such as, but not limited to, rectangular, parallelogram, or the like. Referring now to **Figs. 4A** and **4B**, schematically illustrating different views of a printing system **200** of the present disclosure. In **Fig. 4A**, a perspective view is shown, while in **Fig. 4B**, a front view is shown. The printing system **200** is configured for printing an image/pattern on a curved outer surface of the object **101**, and includes a print head assembly **100** having a plurality of print head units, and a conveyor system (**302** in **Figs. 5A** and **15**) configured for moving the object **101** and/or the print head units. Optionally, the system **200** includes a control unit (**300**, shown in **Figs. 1** and **21A**) configured for controlling the conveyor system **302** and the operation of the print head units. The curved surface of the object may be circular, oval, elliptical, etc.

[0055] In some embodiments, each print head unit includes one or more printing elements e.g., configured for

jetting/applying a material composition (such as ink, powder, curing fluid, fixation fluid, pretreatment fluid, coating fluid, and/or a composition of one or more fluids to create a third fluid, and/or any solid/gas material that, while jetted, is a fluid) onto the outer surface of the object **101**, as described above. The print head assembly **100** may be designed as the print head assemblies described in **Figs. 2A** and **2B**, or as a print head assembly **100** in which the print head units are organized in groups, as will be now described.

[0056] In the example shown in **Figs. 4A** and **4B**, the print head units of each group are arranged along a curved path around the axis of translation, and each group surrounds a respective region of the axis of translation **110**. Thus, the print head units **102a**, **102b**, and **102c** belong to a first group **102**. The print head units **104a**, **104b**, and **104c** (seen in **Fig. 13**) belong to a second group **104**. The print head units **106a**, **106b**, and **106c** belong to a third group **106**. The print head units **108a**, **108b**, and **108c** belong to a fourth group **108**. The groups **102**, **104** and **106** are located at respective locations along the axis of translation.

[0057] The conveyor system **302** is configured to move the object **101** and/or the print head assembly **100** such that a desired portion of the object **101** is brought to the vicinity of a desired print head unit at a desired time. In this manner, printing can be performed on the object's outer surface. The conveyor is configured for enabling at least two kinds of relative motion between the object **101** and the print head assembly: (i) a translational motion along or parallel to the axis of translation **110**, and (ii) a rotation about the axis of translation **110**. In this manner, any point on the outer surface of the object **101** can be brought to the vicinity of any print head unit. Optionally, a third kind of relative motion exists along one or more radial (or planar) axes substantially perpendicular to the axis of translation. This third motion may be necessary, in order to maintain a desired distance between at least one print head unit and the object's surface.

[0058] In some embodiments the control unit (**300**) is an electronic unit configured to transmit, or transfer from a motion encoder of the carriage, one or more signals to the print head units in the assembly **100** and to the conveyor system **302**. Alternatively, the signals from the motion encoder are transferred directly to the print head assembly wherein they are translated by each print head unit into printing instructions based on signals received from the control unit **300**. Accordingly, the positional control signal(s) transmitted from one of the carriage's encoders to the print head assembly **100**, may be used by the control unit (**300**) to instruct individual print head units to eject their respective material compositions from one or more printing elements (e.g., nozzles/ejection apertures) at specific times. The control unit **300** further generated control signal(s) to the conveyor system **302**, to instruct the conveyor system **302** to move (*i.e.*, translate and/or rotate) the objects **101** and/or the print head as-



sembly **100** according to a desired pattern. The control unit **300** therefore synchronizes the operation of the print head units with the relative motion between the object **101** and the print head assembly **100**, in order to create a desired printing pattern on the object and therefore print a desired image on the object's outer surface.

**[0059]** The groups of print head units are set along the translation axis **110**, such that during the relative motion between the object **101** and the print head assembly **100**, the object **101** is successively brought in the vicinity of different print head units or groups of print head units. Moreover, during at least certain stages of this motion, different portions of the objects **101** may be located in the vicinity of print head units belonging to at least two consecutive groups or print head units located at successive positions along the axis of translation **110**. In this manner, the object's outer surface may be printed upon simultaneously by print head units belonging to different groups or print head units located at successive positions along the axis of translation **110**. Optionally, different printing elements of a single printing unit may print on two different objects at the same time. As explained above, this feature enables the system **200** to perform printing on one or more objects while optimizing the utilization of print heads, thereby achieving a high efficiency system capable of providing high objects throughput. As exemplified in **Fig. 4A**, during a certain time period, the object **101** is in the vicinity of the first group (which includes print head units **102a**, **102b**, and **102c**) and the second group (which includes print head units **104a**, **104b**, and **104c**).

**[0060]** Besides enhancing the printing throughput on one or more objects, the structure of the system **200** also enables simultaneous printing on a plurality of objects **101**. For this purpose, the objects **101** are fed into the system **200** one after the other, and the conveyor system **302** moves (*i.e.*, translates and/or rotates) the objects **101** and/or the assembly **100** of print head units, so that each object **101** can be printed upon by certain portions of the print head units which are not printing on another object. For example, in **Fig. 4A**, the object **101** is in the vicinity of the first and second group (though in practice, an object can be printed upon by more than two groups if the object is long enough compared to the print heads and to the distances between print heads along the axis of translation). If no other object is present, the print head units of the third group (**106a**, **106b**, and **106c**) and the print head units of the fourth group (**108a**, **108b**, and **108c**) are idle. However, if a second object is introduced into the system **200** and moved to the vicinity of the printing heads of the first and/or second group, the first object will be moved to the vicinity of the second and/or third groups. In this manner, at least some of latter (second and third) groups of the printing heads will be able to print an image on the first object and the former (first and second) groups of the print head units will be able to print an image on the second object.

**[0061]** The printing system is considered fully utilized

when under all the print heads units there are objects that are being printed on by the print heads units. To this end, any gap between the objects in the printing zone is considered as decreasing the efficiency, and therefore it is required that gaps between objects be minimized.

**[0062]** As can be seen in **Fig. 4B**, the print head units of each group are set around the translation axis **110**, so as to maintain a desired distance from the object's outer surface. The print head units may be set in a spaced apart arrangement, or may be adjacent to each other. The distances between consecutive print head units belonging to the same group may be equal to each other or different to each other. Moreover, within a group, the print head units may be set around the object's outer surface, such that the distances between the different print head units and the object's outer surface are equal to each other, or such that each print head unit has a respective distance from the object's outer surface. The distance between the print head units and the object's outer surface depends on the type of print head units used and composition, and is chosen so that the print head units deliver their compositions in a desired fashion. It should be noticed that the composition jetted by the print head units may be a chemical material, a chemical compound of materials and/or a mixture between materials and/or compounds.

**[0063]** In some embodiments of the present invention, the printing on the object's surface by different print head units or by different printing elements **130** of a print head unit may be performed for the purpose of creating a new path that was not printed beforehand. Optionally, some of the printing may be performed along or near an existing printed path. A path printed near or between two other paths may be used to achieve a predefined resolution. A path printed along an existing path may be used to complete the resolution of the existing path by adding more dots to create a denser spiral path. Moreover, printing a path along an existing path may be used to create redundancy between two different printing elements, *i.e.*, if one printing element is not working then the second printing element prints a portion (*e.g.*, 50%) of the desired data. Optionally, in case one of the printing element stops operating, the system can be controlled so as to enable the second printing element to print the data that was originally intended to be printed by the first printing element. This may be done, for example, by controlling (*e.g.*, slowing) down the motion (translation and/or rotation) of the object **101** and/or print head array, or by controlling the second printing element to jet more ink. Optionally, the print head units belonging to the same group are configured for jetting ink of a single color to the object's surface, and the different groups of print head units are configured for jetting respective colors to the object's surface. Alternatively, different print head units belonging to the same group are configured for jetting ink of different colors.

**[0064]** It should be noted that although in the above-mentioned figures each group is shown to include three

print head units, the groups may have any number of printing units, for example, one, two, four, etc. Moreover, though the above-mentioned figures show the presence of four groups, any number of groups may be included in the system of the present invention. Additionally, the print head units in the above-mentioned figures are shown to be shorter than the length of the object **101**. This may not be the case, as in some cases, the print head units may be as long as the object, or even longer.

[0065] The system **200** can be used to print on the object **101** according to two different printing sequences: continuous printing and step printing or any combination thereof. In continuous printing, the printing occurs during the relative motion between the object **101** and the print head arrangement **100**, when such motion includes simultaneous translational motion along or parallel to the axis of translation **110** and a rotational motion around the axis of translation **110**. In this kind of printing, image data is printed on the object's surface along a substantially spiral path.

[0066] In step printing, a relative translation between the object and the print heads brings desired regions of the object's surface to the vicinity of one or more print head groups or print head units located at successive positions along the axis of translation. The translation is stopped, while the relative rotation is effected. During the rotation, the print head units perform circumferential printing on the object's surface. After the printing is performed, the relative translation re-starts to bring one or more additional desired regions of the object's surface to the vicinity of one or more print head groups. The rotation may be maintained during the translation, or be discontinued at least during part of the translation.

[0067] The steps may be small steps, where translation occurs for moving a desired region of the object **101** from one printing element **130** to a consecutive printing element **130** of a single print head unit, or may be larger steps, where translation occurs for moving a desired region of the object from a first print head unit to a successive print head unit (e.g., belonging to a different group) along the axis of translation **110**. In some embodiments, the steps may be large enough to translate a desired region of the object **101** from a first print head unit to a second print head unit while skipping one or more intermediate print head units.

[0068] In step printing, the circumferential printing may be activated by a trigger which confirms that the desired region of the object **101** has been translated by a desired distance. This trigger may be a positioning encoder signal and/or an index signal, which is active during translation and non active when no translation occurs. Knowing the speed of translation and the position (along the axis of translation) of the desired print head units and its printing elements **130**, the time point at which the desired region of the object **101** is exposed to the desired print head unit, and its printing element **130** can be calculated. Thus, when the trigger is activated by the positioning encoder and/or index signal, an instruction to effect printing is sent

to the desired print head unit, and/or printing element **130** for example, according to the encoder position signals. Alternatively, the trigger may be activated by a light detector located on one side of the object **101** and corresponding light emitters located on a second side of the object **101**. When the object **101** obscures the light detector, and the light from the light emitter does not reach the light detector, it is deemed that the desired region of the object's surface has been translated by the desired amount.

[0069] Optionally, a circumferential coordinate of a certain region of the object's surface is monitored (e.g., calculated via a known speed of rotation and the known radius of the object), and a second trigger is activated when the region reaches a desired circumferential coordinate which corresponds to the circumferential coordinate of desired print head unit, or printing element **130**. In a variant, after translation is stopped, the relative rotation is performed to expose the desired region on the object's surface to the desired print head unit, or printing element **130**, and only then printing (ejection of the material composition) is effected. In another variant, the second trigger is not used, and when translation ceases, the desired region of the object's surface is exposed to a different print head unit, or printing element **130**. Because the circumferential coordinate of desired region is known, the control unit can instruct the different print head unit or printing element **130**, to affect a desired printing onto the desired region. This last variant is useful for decreasing delays in the object's printing. A possible printing pattern may include both continuous printing and step printing, performed at different times.

[0070] It should be noted that the axis of translation **110** is shown in the figures as a straight line. This may not necessarily be the case. In fact, the axis of translation may be curvilinear, or may have straight sections and curvilinear sections.

[0071] Referring now to Figs. **5A** and **5B**, which exemplify a conveyor system **302** included in the printing system in some embodiments. In the non-limiting example illustrated in Fig. **5A** the conveyor system **302** is configured to move the object **101**, while in Fig. **5B** the conveyor system **302** is configured to move the assembly of print heads **100**.

[0072] In the non-limiting example shown in Fig. **5A**, the conveyor system **302** of the system **200** includes an object holder **150** joined to an end of the object **101**. In a variant, the object holder moves the object **101** along the translation axis **110**, and rotates the object around the translation axis **110**. The translation and rotation may or may not be simultaneous, depending on the desired manner of printing. Optionally, the conveyor system **302** includes a conveyor belt **152**, which is configured to move the object **101** along the translation axis **110** (as shown by the double arrow **154**), while the object holder's function is limited to rotating the object **101** (as shown by the arrow **156**).

[0073] The conveyor belt **152** may be a belt that is

moved by a motion system, such as an electrical motor, linear motor system, multiple linear motor systems that combine to form a route, a magnetic linear system, or an air pressure flow system. In case a plurality of objects is handled, each of the objects may be handled separately by one or more object holders. It may be the case that at different places along the translation axis **110** each of the objects **101** is controlled to translate in a different manner (e.g., at a different speed) along the translation axis **110**.

[0074] In the non-limiting example shown in Fig. 5B, the conveyor system **302** of the system **200** includes a carriage **158**. The carriage **158** in this example carries the print head assembly **100** along a direction parallel to the translation axis **110** (as shown by the double arrow **160**) and rotates with the print head units around the translation axis (as shown by the arrow **162**).

[0075] It should be added that, although not illustrated in the figures, other scenarios are also possible for giving rise to the relative translational and rotational motion between the object and the print head arrangement. In a first possible scenario, the conveyor system **302** is designed for moving the print head assembly **100** along the axis of translation **110** and includes an object holder for rotating the object around the axis of translation **110**. In a second possible scenario, the conveyor system **302** is designed for moving the object **101** along the axis of translation **110** and for rotating the print head arrangement around the axis of translation **110**.

[0076] In some embodiments both the object **101** and the print head arrangements **100** may be moved.

[0077] All the above-described manners of relative motion (fixed print head units and moving object, moving print head units and fixed object, translating the object and rotating the print head arrangement, rotating the object and translating the print head arrangement, moving print head units and moving object) are within the scope of the present invention and equivalent to each other. In order to simplify the description of the invention, in the remaining part of this document the description will relate to the case in which the print head units are fixed and the object **101** is moved (translated and rotated). However, references to the motion of the object **101** should be understood as references to the relative motion between the object **101** and the print head unit arrangements **100**.

[0078] In both of the cases described above, individual print head units and/or individual groups may be movable along the translation axis **110** with respect to each other. This may be used for manual and/or automatic calibration prior and/or post printing. Optionally, individual print head units and/or groups may be movable around or perpendicularly to the translation axis **110**. This may also be used for manual and/or automatic calibration prior and/or post printing.

[0079] Referring now to Figs. 6A and 6B, which are schematic drawings illustrating some possible embodiments in which the individual print head units are con-

trollably movable.

[0080] In Fig. 6A, the print head units **102a-102d** belong to a single group and are set along the circumference of the object **101**. In Fig. 6B, the print head units **102b** and **102d** are moved away from the translation axis (or from the object **101**), as depicted by the arrows **180** and **182**, respectively. In some embodiments of the present invention, at least some print head units can be individually moved toward and away from the object **101**. Optionally such motion for each print head unit occurs along a respective axis which is perpendicular to the translation axis. Optionally, the orientation of individual print head units can be adjusted as well.

[0081] The ability to move the print head units enables maintaining a desired distance between the print head units and the object **101**. Also, the moving of the print head units enables moving the selected print head units between their active positions and their passive positions. This gives flexibility to the print head assembly, as it can be configured in different manners to print on surfaces of different diameters and lengths (e.g., for object of small diameters, the number of active print head units in a group is decreased, to enable the active print heads to be at a desired distance from the object's outer surface). In a variant, the print head units can be moved only prior to the printing, i.e., after the object starts to move the print head units maintain their position with respect to the axis of translation. This feature is advantageous, as it enables the system **200** to keep a desired distance between the print head units and objects having a plurality of diameters and lengths. In another variant, the print head units can be moved during the printing. The latter feature may be advantageous in the instance in which the cross-sectional size and/or shape of the object varies along the length of the object, or in the cases where the object is not circular (as exemplified in Figs. 7A to 7C).

[0082] Referring now to Figs. 7A to 7C, exemplifying embodiments in which the print head units are controllably movable to fit a shape of the object **101**, before and during rotation of the object **101**.

[0083] In Fig. 7A, an object **101** having an elliptical cross section is brought to the system **100**. The print head units **102a-102d** belong to a single group and are initially set to match the shape of a circular object. In Fig. 7B, the print head units **102b** and **102c** are moved toward the translation axis (located at the center of the elliptical cross section on the object **101** and moving out of the page), so that a desired distance is maintained between the objects' outer surface and each print head unit. The object **101** is rotated. During the rotation, the print head units **102a-102d** are moved with respect to the translation axis, and optionally their orientation is varied. At a certain time, the object **101** has rotated by 90 degrees. The print head units **102a** and **102d** have been moved toward to the translation axis, while the print head units **102b** and **102c** have been moved away from the translation axis. In this manner, a desired distance between the print head

units and the object's surface is maintained. Moreover, the orientation of all of the print head units has been changed, in order to maintain a desired orientation with respect to the regions of the object that are exposed to the print head units.

[0084] It should be noted that in the previous figures, print head units of the same group have been shown to be located at the same coordinate along the axis of translation 110. However, this need not be the case. Referring now to **Figs. 8A** and **8B**, exemplifying two optional arrangements of print head units belonging to a group. In **Fig. 8A** a schematic drawing exemplifies some possible embodiments in which the print head units belonging to the same group are positioned at the same location along the axis of translation 110. **Fig. 8B** is a schematic drawing exemplifying some possible embodiments in which the print head units belonging to the same group are staggered *i.e.*, being positioned at different locations along the axis of translation 110.

[0085] In **Fig. 8A**, all the print head units belonging to the same group are positioned at a same location **X** along the axis of translation 110. In other words, the projections of the different print head units of the same group on the translation axis 110 fall on the same region of the translation axis. In **Fig. 8B**, each print head unit of the same group is positioned at a respective location along the translation axis 110. The print head unit 102a is centered at coordinate **A** on the axis of translation 110. The print head unit 102b is centered at coordinate **B**. The print head unit 102c is centered at coordinate **C**. The print head unit 102d is centered at coordinate **D**. In other words, projections along the translation axis of at least two of the print head units of the at least one group fall on a different regions of the translation axis 110.

[0086] Referring now to **Fig. 9A**, which exemplifies some embodiments in which at least one curing/drying station is located at the end of the print unit assembly 100, downstream of the last group of print head units.

[0087] In **Fig. 9A**, the object 101 is moved from right to left, in the direction 201. During this translation, regions of the object's surface are successively exposed to the print head units of the groups 102, 104, 106, and 108 (or to print head units 102a, 104a, 106a, and 108a, if the print head assembly 100 is set according to **Figs. 2A** and **2B**) and printed upon. The printing may be continuous printing or step printing, as described above. In some embodiments of the present invention, a curing/drying station 202 is located downstream from the last group 108 (or the last print head unit 108a). After receiving ink from the print head units, the object 101 is moved to the curing/drying station, where the ink is fixed on the object's surface. The curing/drying may be performed according to any known technique, such as: exposing the printed surface to ultraviolet (UV) light without or with any combination of gas or external liquid to enhance the curing/drying speed; exposing the printed surface to an electrical beam (EB); heating the surface via exposure to IR (infra red) radiation; ventilation drying. These techniques

maybe used for curing/drying after the printing is performed.

[0088] Techniques may also be used for priming/pre-treating the object's surface prior to printing: exposing the printed surface of the object to a flame, and/or plasma, and/or corona, and/or surface cleaning equipment; and/or antistatic equipment; surface heating or drying equipment; applying a primer or coating material to the surface; exposing the surface printed or unprinted to a gas, such as nitrogen or an inert to enhance later curing. To this end, optionally, a priming station 204 is located upstream from the first print head group 102 (or the first print head unit 102a). In the priming station 204, the surface of the object 101 is treated so as to enhance the imminent printing upon it. The priming may be performed according to any of the above-mentioned manners used for priming/pretreating.

[0089] It should be noticed that the curing/drying station may include a single curing/drying unit or a group of curing/drying units set around the translation axis 110. Similarly, the priming station may include a single priming unit or a group of priming units set around the translation axis 110.

[0090] Referring now to **Fig. 9B**, a schematic drawing exemplifying some embodiments in which at least one curing/drying station and/or priming/pretreating station is located between two successive groups of print head units.

[0091] In some embodiments, it may be desirable to have a curing or priming station after (downstream from) one or some of the groups of print head units (or after some of the print head units located at successive positions along the axis of translation). For example, and without being limiting, if consecutive groups or print head units apply to the object compositions that may mix together and yield undesirable results a curing station is needed between these two consecutive groups or print head units. In another example, certain print head units or the print head units of a certain groups are configured for jetting a composition which needs a certain kind of priming prior to application on the object's surface. In this case, a priming station needs to be placed before the certain print head units or certain groups.

[0092] In the non-limiting example of **Fig. 9B**, a curing/drying and/or priming/pretreating station 206 is located between the groups 102 and 104 (or print head units 102a and 104a), a curing/drying and/or priming/pretreating station 208 is located between the groups 104 and 106 (or print head units 104a and 106a), and a curing/drying and/or priming/pretreating station 210 is located between the groups 106 and 108 (or print head units 106a and 108a).

[0093] Referring now to **Fig. 9C**, a schematic drawing exemplifying some embodiments in which a plurality of curing/drying/priming/pretreating stations are positioned one after the other along the axis of translation. In this non-limiting example, the curing/drying/priming/pretreating stations 212, 214, 216, 218, 219 are located be-

low the object **101**, while the print head groups (or the individual print head units) are located above the object **101**. In this manner, the printing and the curing/drying/priming/pretreating may be performed simultaneously. Optionally, the stations **212**, **214**, **216**, **218**, **219** may be part of a single long station having a plurality of printing elements. This is advantageous since it creates a curing/drying/priming/pretreating to each printed layer on each cycle.

[0094] Referring now to **Fig. 9D**, a schematic drawing exemplifying some embodiments in which at least one curing/drying and/or priming/pretreating unit is part of a group of print head units. In this non-limiting example, the group **170** includes print head units **170a** and **170c** and curing/drying and/or priming/pretreating units **170b** and **170d**. This enables curing/drying and/or priming/pretreating to be performed before, between, or after printing by individual print head units.

[0095] It is that in some embodiments shown in **Figs. 9A to 9D** self-fixated inks may be advantageously used in the print head units **35**. Such self-fixated inks are typically configured to instantly fixate after injected from the printing elements of the print head upon reaching the surface of the object. Accordingly, such possible embodiments employing self-fixated inks may utilize one curing zone at the end of the printing process. Furthermore, in such possible embodiments wherein a single curing zone is employed at the end of the printing process allows designing printing head assemblies having shorter lengths and higher accuracies.

[0096] Referring now to **Figs. 10A to 10C**, which are schematic drawings illustrating some possible embodiments in which first and second compositions are jetted on the same location of the object's surface by print head units of first and second groups respectively (or by first and second print head units), in order to print the location with a third composition which is formed by a combination of the first and second compositions.

[0097] In **Fig. 10A**, the object **101** is moved in the direction **220** along the axis of translation so that a certain region of the object's surface is exposed to a print head unit of a first group **102** (or to a first print head unit **102a**, if the print head assembly is configured according to the examples of **Fig. 2A** or **2B**). The print head unit jets a first composition **222** on the region of the object's surface, according to an instruction from the control unit (**300**). In **Fig. 10B**, the object **101** is moved in the direction **220** by the conveyor system (**302**), so that the region of the object's surface is exposed to a print head unit of a second group **104** (or to a second print head unit **104a**). At this point, the control unit instructs the print head of the second group to jet a second composition **224** on the region which received the first composition. At **Fig. 10C** the first and second compositions combine and yield a third composition **226**. The combination of the first and second compositions may be a mixing or a chemical reaction. The mixing may be mixing of ink of two different colors for generating a desired ink of a third color.

[0098] This setup is advantageous in the instance in which the third composition **226** cannot be printed by the desired printing system. For example, and without being limiting, if the third composition is a solid, the third composition cannot be ejected in inkjet printing. The first and second liquid compositions are to be combined during the printing process according to the techniques of **Figs. 10A to 10C**, if they are to be delivered by print head units in liquid form to the target area. On the target area, the combination between the liquid compounds will occur to form the solid composition.

[0099] A solid composition is an extreme example. In fact, even a desired liquid composition having fluid viscosity above a certain threshold cannot be delivered by certain print head units (many inkjet print head units, for example, can jet liquids having viscosity between 10-15 centipoises). However if the component compositions of the desired composition have a viscosity that is below the operating threshold of the print head units, the component compositions can be delivered by successive print head units and mix on the target area to form the more viscous desired composition.

[0100] The combination of compositions described in **Figs. 10A to 10C** may be achieved by a single print head unit **102a** having at least two printing elements **226** and **228**, as depicted by **Figs. 11A to 11C**. In this non-limiting example, the first printing element **226** ejects the first composition **222** on a certain region of the surface of the object **101**, and the second printing element **228** ejects the second composition **224** on the certain region of the surface of the object **101**.

[0101] Referring now to **Figs. 12A to 12C**, which are schematic drawings illustrating some possible embodiments in which first and second compositions are jetted on the same location of the object's surface by respectively first and second printing units of the same group, in order to print the location with a third composition which is formed by a combination of the first and second compositions.

[0102] In **Fig. 12A**, a first print head unit **102a** jets a first composition **222** on a certain region of the object's surface, according to an instruction from the control unit (**300**), while the object rotates in the direction **230** around the axis of translation. In **Fig. 12B**, the object **101** is rotated in the direction **230**, and the region which received the first composition **222** is brought to the vicinity of a second print head unit **102b** belonging to the same group as the first print head unit **102a**. At this point, the control unit instructs the second print head unit **102b** to jet a second composition **224** upon the region which previously received the first composition **222**. In **Fig. 12C**, the first and second compositions combine together (e.g., by reacting chemically or mixing) and yield a third composition **226**. As above, this setup is advantageous in the instance in which the third composition **226** cannot be printed by the printing system.

[0103] It should be noted that though the examples of **Figs. 10A-10C**, **11A-11C**, and **12A-12C** relate to printing

a desired composition formed by two component compositions, the technique of **Figs. 10A-10c 11A-11C and 12A-12C**, can also be used for forming a desired composition by combining three or more component compositions.

**[0104]** Referring now to **Figs. 13A and 13B**, which are schematic drawings exemplifying possible embodiments in which print units belonging to different groups are located at the same position around the axis of translation, and are organized in bars/columns. In **Fig. 13A** a perspective view of the print head assembly is shown. In **Fig. 13B**, a side view of the print head assembly is shown.

**[0105]** As explained above, the print head units **102a**, **102b**, and **102c** belong to a first group, the print head units **104a**, **104b**, and **104c** belong to a second group, and the print head units **106a**, **106b**, and **106c** belong to a third group. In the example of **Figs. 13A and 13B**, the print head units **102a**, **104a**, and **106a** are located at a first angular coordinate around the axis of translation. Similarly, the printing head units **102b**, **104b**, and **106b** are located at a second angular coordinate around the axis of translation. Moreover, the printing head units **102c**, **104c**, and **106c** are located at a third angular coordinate around the axis of translation. The printing head units **102a**, **104a**, and **106a** form a column substantially parallel to the translation axis (as do the printing head units **102b**, **104b**, and **106b**, and the printing head units **102c**, **104c**, and **106c**).

**[0106]** In each column, the printing heads are joined to each other and form bars. The location of the print head units during printing is critical for achieving a successful printing. The print head units are to be aligned with each other along the translation axis at a high precision for high-resolution printing. Therefore, aligning the print head units with respect to each other is an important part of the printing process. The advantage of having the printing heads arranged in bars/columns lies in the fact that rather than adjusting a position of each printing head individually prior to printing, the positions of the bars/columns along the translation axis are adjusted. By adjusting the position of each bar/column, the position of a plurality of printing head units which constitute the bar/column is adjusted. Thus, once the position of the first bar/column is chosen, all the other bars/columns must simply be aligned with the first bar/column. This enables a precise and quick adjustment of the location of the printing heads prior to printing.

**[0107]** Though subsequent print head units of any bar of **Figs. 13A and 13B** are shown to be joined to each other, this is not necessarily the case. In fact, a bar/column can include at least two subsequent print head units set so as to define an empty space therebetween.

**[0108]** Referring now to **Fig. 14**, which is a block diagram illustrating an embodiment of the system **200** in which a control unit **300** controls the conveyor and print head assembly according to one or more kinds of input data.

**[0109]** The system **200** in this non-limiting example in-

cludes a control unit **300**, a conveyor system **302**, and a print head assembly **100**, all of which have been described hereinabove. The print head assembly **100** may, or may not, include one or more priming (**204**) and/or curing (**202**) units or stations, as described hereinabove. Optionally, the system **200** includes a loader/unloader unit **306** configured for loading the object(s) onto the conveyor system **302** and unloading the object(s) from the conveyor system **302** once the printing (and optionally curing/drying and/or priming/pretreating) is completed. The control unit **300** operates the conveyor system **302**, the print head assembly **100**, and the loader/unloader device **306** (if present), to create a desired sequence of operations of these elements (printing pattern), in order to yield a printed image on the object (**101**).

**[0110]** Optionally, the sequence of operations is transmitted to the control unit **300** from an outer source as input data **308**. The outer source may be a computer, which computes a suitable sequence of operations based on properties (e.g., colors, size, etc.) of an image which is to be printed on the object. In a variant, the control unit **300** includes a processor **302a** configured for processing the image and determining the desired sequence of operations. In this case, the input data **308** is data indicative of the image to be printed, which the processor **302a** uses to determine the sequence of operations.

**[0111]** In a variant, the system **200** includes a distance sensor **310** and an alignment sensor **312**. The distance sensor **310** is configured for sensing the distance between at least one print head unit and the surface of the object. The alignment sensor **312** is configured for determining whether print head units (or bars/columns of such units, if present) are properly aligned with each other along the translation axis and/or around the translation axis.

**[0112]** The control unit **300** receives data from the distance sensor **310** and alignment sensor **312** in order to determine whether the print head units are in their proper positions, and determines whether or not to move them. In a variant, the control unit **300** instructs the print head units to move to their assigned positions before the printing starts (perpendicularly to the translation axis according to data from the distance sensor **310**, and/or along and/or around the translation axis according to data from the alignment sensor **312**). In another variant, the control unit **300** instructs the print head units to move to their assigned positions during the printing (for example, if the cross-sectional shape of the object varies along the object's length or the object's cross section is not circular, as explained above).

**[0113]** The distance sensor **310** and the alignment sensor **312** may operate by emitting radiation (e.g., electromagnetic, optical, acoustic) toward a target and receiving the radiation reflected/scattered by the target. A property of the received radiation (e.g., time period after emission, phase, intensity, etc.) is analyzed in order to determine the distance between the sensor and the target.

**[0114]** According to a first variant, a distance sensor

element is mounted on at least one of the print head units and is configured for emitting radiation to and receiving radiation from the object. According to a second variant the distance sensor is an external element which determines the position of a print head unit and of the object's surface, and calculates the distance therebetween.

[0115] Similarly, in a variant, an element of the alignment sensor 312 is mounted on a print head unit and is configured for emitting radiation to and receiving radiation from another print head unit. In another variant, the alignment sensor 312 includes an external element configured for determining the position of two print head units (or bars/columns of such units) and calculating the distance therebetween.

[0116] In some embodiments of the present invention, the distance sensor and alignment sensor are not present, and a calibration process is required prior to printing. In the calibration process, the print head units of the assembly 100 are moved to their positions prior to printing, and a trial printing is performed. The image printed in the trial printing is analyzed either by a user or by a computer (e.g., an external computer or the control unit itself), and the positions of the print head units are adjusted accordingly, either manually or automatically. Once this calibration process is finished, the printing of one or more objects can take place.

[0117] Figs. 15 to 21 demonstrate a printing system 17 according to some possible embodiments. In general, the printing system 17 shown in Figs. 15 to 21 is configured to maintain and handle a continuous feed of objects 101 (also referred to herein as a stream of objects) to be printed on, while maintaining minimum gap (e.g., about 2 mm to 100 mm) between adjacent objects 101.

[0118] With reference to Fig. 15, in this non-limiting example the printing system 17 generally comprises the closed loop lane 10 and the print head assembly 100 mounted in the printing zone 12z of the lane 10 on elevator system 27. Other parts of the printing system (e.g., priming unit, curing unit, etc.) are not shown for the sake of simplicity. The lane 10 is generally a circular lane; in this non-limiting example having a substantially elliptical shape. The lane 10 may be implemented by an elliptical ring shaped platform 10p comprising one or more tracks 10r each having a plurality of sliding boards 22 mounted thereon and configured for sliding movement thereover. At least two sliding boards 22, each mounted on a different track 10r, are radially aligned relative to the lane 10 to receive a detachable platform 37 and implement a carriage C<sub>i</sub> configured to hold a plurality of objects 101 to be printed on, and advance them towards the printing zone 12z. In this non-limiting example the lane 10 comprises two tracks 10r and the sliding boards 22 slidably mounted on the tracks 22 are arranged in pairs, each sliding board of each pair of sliding boards being slidably mounted on a different track 22, such that a plurality of slidable carriages C<sub>1</sub>, C<sub>2</sub>, C<sub>3</sub>,..., are constructed by attaching a detachable platform 37 to each one of said pairs of sliding boards 22.

[0119] Implementing an elliptical lane 10 may be carried out using straight rails connected to curved rails to achieve the desired continuous seamless movement on the elliptical track. Accordingly, the sliding boards 22 may be configured to enable them smooth passage over curved sections of the lane 10. Printing zones 12z of the lane 10 are preferably located at substantially straight portions of the elliptical lane 10 in order to devise printing zones permitting high accuracy, which is difficult to achieve over the curved portions of the lane 10. In some embodiments curved shape tracks have runners with a built in bearing system's tolerance to allow the rotation required by the nonlinear/curved parts of the track. Those tolerances typically exceed the total allowable error for the linear printing zone 12z. In the printing linear zone 12z, the tolerable errors allowed are in the range of few microns, due to high resolution requirements for resolution greater than 1000 dpi for high image qualities/resolutions. For such high resolutions require 25 micron between dots lines, which means that about ±5 micron dot accuracy is required in order for the sliding boards to pass the printing zone 12z in an accumulated printing budget error in X,Y,Z axis that will not pass the required ±5micron tolerable dots placement position error.

[0120] The printing head assembly 100 comprises an array of printing head units 35 removably attached to a matrix board 30 and aligned thereon relative to the tracks 10r of the lane 10. The matrix board 30 is attached to the elevator system 27 which is configured to adjust the height of the printing elements of the printing heads units 35 according to the dimensions of the objects 101 held by the carriages C<sub>1</sub>, C<sub>2</sub>, C<sub>3</sub>,..., approaching the printing zone 12z.

[0121] Referring now to Figs. 16A and 16B, the array of print head units 35 of print head assembly 100 may comprise a plurality of sub-arrays R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>,..., of print head units 35, each one of said sub arrays R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>,..., configured to define a respective printing route T<sub>1</sub>, T<sub>2</sub>, T<sub>3</sub>,..., in the printing zone 12z. As illustrated in 16A and 16B, the printing routes T<sub>1</sub>, T<sub>2</sub>, T<sub>3</sub>,..., are defined along a printing axis 38 e.g., being substantially aligned with the tracks 10r of the lane 10. In this way, objects 101 moved along a printing route T<sub>j</sub> (j = 1, 2, 3, ...) are passed under the printing elements 130 of the print heads of the respective sub-array R<sub>j</sub>.

[0122] Each carriage C<sub>i</sub> being loaded onto the lane 10 at a loading zone (306l) with a plurality of objects 101 is advanced through the various stages of the printing system 17 (e.g., priming 204, printing 12z, curing 202 and inspection 16), and then removed from the lane 10 at an unload zone 306u, thereby forming a continuous stream of objects 101 entering the lane and leaving it after being printed on, without interfering the movement of the various carriages C<sub>i</sub>. In this way, the closed loop lane 10 provides for a continuous feed of carriages C<sub>1</sub>, C<sub>2</sub>, C<sub>3</sub>,..., loaded with objects 101 into the printing zone 12z, and independent control over the position and speed of each carriage C<sub>i</sub> (i = 1, 2, 3, ...) maintains a minimum gap (e.g.,

of about 1cm) between adjacent carriages  $C_i$  in the printing zone **12z**.

**[0123]** In this non-limiting example the print head assembly **100** comprises ten sub-arrays  $R_j$  ( $j = 1, 2, 3, \dots, 10$ ) of printing head units **35**, each sub-array  $R_j$  comprising two columns,  $R_{ja}$  and  $R_{jb}$  ( $j = 1, 2, 3, \dots, 10$ ), of printing head units **35**. The printing head units **35** in the columns  $R_{ja}$  and  $R_{jb}$  of each sub-array  $R_j$  may be slanted relative to the matrix board **30**, such that printing elements **130** of the printing head units of one column  $R_{ja}$  are located adjacent the printing elements **130** of the printing head units of other column of the sub-array column  $R_{jb}$ . For example, and without being limiting, the angle  $\alpha$  between two adjacent print head units  $R_{ja}$  and  $R_{jb}$  in a sub-array  $R_j$  may generally be about  $0^\circ$  to  $180^\circ$ , depending on the number of print head units used. The elevator system **27** is configured to adjust the elevation of the print head units **35** according to the geometrical dimensions of the objects **101** e.g., diameter. For example, in some possible embodiments the printing head assembly **100** is configured such that for cylindrical objects having a diameter of about 50mm the printing heads **35** are substantially perpendicular to a tangent at the points on the surface of the object under the printing elements **130** of said printing heads **35**. For cylindrical objects having a diameter of about 25mm the angles between the printing heads remains in about 73 degrees and the tangent is not preserved, which in effect results in a small gap between the printing elements **130** of the print heads **35** and the surface of the objects located beneath them. The formation of this gap may be compensated by careful scheduling the time of each discharge of ink through the printing elements **130** according to the angular and/or linear velocity of the object and the size of gap formed between the printing elements **130** and the surface of the objects **101**.

**[0124]** Angular distribution of the print heads is advantageous since it shortens the printing route (e.g., by about 50%), by densing the number of nozzles per area, and as a result shortening the printing zone **12z** (that is very accurate), thereby leading to a total track length that is substantially shortened.

**[0125]** Fig. 17 illustrates a structure of a carriage  $C_i$  according to some possible embodiments. In this non-limiting example the carriage  $C_i$  comprises an arrangement of rotatable mandrels **33** mounted spaced apart along a length of the carriage  $C_i$ . More particularly, the rotatable mandrels **33** are arranged to form two aligned rows, **r1** and **r2**, of rotatable mandrels **33**, wherein each pair of adjacent mandrels **33a** and **33b** belonging to different rows are mechanically coupled to a common pulley **33p** rotatably mounted in a support member **37s** vertically attached along a length of the detachable platform **37**. The mandrels **33a** and **33b** of each pair adjacent mandrels **33** belonging to different rows **r1** and **r2** are mechanically coupled to a single rotatable shaft, which is rotated by a belt **33q**.

**[0126]** In some embodiments the same belt **33q** is used to simultaneously rotate all of the pulleys **33p** of the

rotatable mandrels arrangement, such that all the mandrels **33** can be controllably rotated simultaneously at the same speed, or same positions, and direction whenever the carriage  $C_i$  enters any of the priming, printing, and/or curing, stages of the printing system **17**. A gap between pairs of adjacent mandrels **33a** and **33b** belonging to the different rows **r1** and **r2** of mandrels may be set to a minimal desirable value e.g., of about 30mm. Considerable efficiency may be gained by properly maintaining a small gap between carriages (e.g., about 1cm) adjacently located on the lane **10**, and setting the gap between pairs of mandrels **33a** and **33b** belonging to the different rows **r1** and **r2** (e.g., about 30mm, resulting in efficiency that may be greater than 85%).

**[0127]** In order to handle the multiple mandrels **33** of each carriage  $C_i$  and obtain high printing throughput, in some embodiments all mandrels are rotated with a speed accuracy tolerance smaller than 0.5% employing a single driving unit (not shown). Accordingly, each carriage  $C_i$  may be equipped with a single rotation driver and motor (not shown), where the motor shaft drives all of the mandrels **33** using the same belt **33q**. In some embodiments the speed of the rotation of the mandrel **33** is monitored using a single rotary encoder (not shown) configured to monitor the rotations of one of the pulleys **33p**. In this non-limiting example, each row (**r1** or **r2**) of mandrels **33** includes ten pulleys **33p**, each pulley configured to rotate two adjacent mandrels **33a** and **33b** each belonging to a different row **r1** and **r2**, such that the belt **33q** concurrently rotates the ten pulleys, and correspondingly all twenty mandrels **33** of the carriage  $C_i$  are thus simultaneously rotated at the same speed and direction.

**[0128]** Fig. 18 shows the coupling of the carriage  $C_i$  to the lane **10** according to some possible embodiments. Each sliding board **22** in this non-limiting example comprises four horizontal wheels **22w**, where two pairs of wheels **22w** are mounted on each side of the sliding board **22** and each pair of wheels **22w** being pressed into side channels **22c** formed along the sides of the tracks **10r**. The lane **10** may further include a plurality of magnet elements **10m** mounted therealong forming a magnet track (secondary motor element) for a linear motor installed on the carriages  $C_i$ . A linear motor coil unit **29** (forcer/primary motor element) mounted on the bottom side of each detachable platform **37** and receiving electric power from a power source of the carriage (e.g., batteries, inductive charging, and/or flexible cable) is used for mobilizing the carriage over the lane. An encoder unit **23r** attached to the bottom side of the carriage  $C_i$  is used to provide real time carriage positioning signal to the controller unit of the carriage. Each carriage  $C_i$  thus comprises at least one linear motor coil and at least one encoder so as to allow the control unit **300** to perform corrections to the positioning of the carriage  $C_i$ . In this way linear motor actuation of the carriages  $C_i$  may be performed while achieving high accuracy of position of carriage movement, over the linear and curved areas of the lane **10**.



**[0129]** For example, and without being limiting, the magnetic track **10m** used for the linear motors may be organized in straight lines over the straight portions of the lane **10**, and with a small angular gap in the curved portion of the lane **10**. In some embodiments this small angular gap is supported by special firmware algorithm provided in the motor driver to provide accurate carriage movements. The lane may further include an encoder channel **23** comprising a readable encoded scale **23t** on a lateral side of the channel **23**. The encoder scale **23t** is preferably placed around the entire elliptical lane **10**, and the encoder unit **23r** attached to the bottom side of each carriage **C<sub>i</sub>** is introduced into the encoder channel **23** to allow real time monitoring of the carriage movement along the lane **10**.

**[0130]** High resolution encoding allows closing of position loops in accuracy of about 1 micron. For example, and without being limiting, the improved accuracy may be used to provide carriage location accuracy of about 5 microns, in-position time values smaller than 50msec in the printing zone **12z**, and speed accuracy smaller than 0.5%.

**[0131]** Fig. 19 schematically illustrates simultaneous printing by the print head assembly **100** on surfaces of a plurality of objects **101** carried by three different carriages, **C<sub>1</sub>**, **C<sub>2</sub>** and **C<sub>3</sub>**. In order to enable high printing resolutions, the movement of the carriages **C<sub>i</sub>** in the printing zone **12z** should be carried out with very high accuracy. For this purpose, in some embodiments, a highly accurate (of about 25 micron per meter) linear rod **44** is installed along the printing zone **12z**, and each carriage **C<sub>i</sub>** is equipped with at least two open bearing runners **28** which become engaged with the linear rod **44** upon entering the printing zone **12z**. In order to facilitate receipt of the linear rod **44** inside the bearing runners **28**, in some embodiments the linear rod **44** is equipped with a tapering end sections **44t** configured for smooth insertion of the rod **44** into the opening **28b** (shown in Fig. 18) of the bearing runners **44**. A combination of individual carriage control (driver and encoder on each carriage) allows recognition of the exact position of the tapering entry section **44t** for allowing the carriage **C<sub>i</sub>** to perform slow and smooth sliding of the bearing **28** onto the rod **44**, thereby preventing direct damage to the bearings **28** and to the rod **44**. The engagement of the carriage to the linear rod **44** is supported by a special firmware in the controller of the carriage and /or on the motor driver.

**[0132]** Fig. 20 provides a closer view of the mandrel arrangement provided in the carriages **C<sub>i</sub>**. In some embodiments the mandrels **33** are configured to enable the system to adjust the diameter of the mandrel in order to permit firm attachment to objects **101** having different diameters and lengths (*i.e.*, using a single mandrel type and without requiring mandrel replacement as commonly used in the industry). For this purpose each mandrel **33** may be constructed from a plurality of elongated surfaces **41a**, where the elongated surfaces **41a** of each mandrel **33** are connected to a levering mechanism **41v** config-

ured to affect radial movement of the elongated surfaces **41a** relative to the axis of rotation of the mandrel **33**. The levering mechanism **41v** may employ a tension spring **41s** configured to facilitate controllable adjustment of a length of a central shaft **41r** of the mandrel **33**, such that elongation or shortening of the length of the central shaft **41r** cause respective inward (*i.e.*, increase of mandrel diameter) or outward (*i.e.*, decrease of mandrel diameter) radial movement of the elongated surfaces **41a** of the mandrel **33**. For example, and without being limiting, adjusting external diameter of a 25mm mandrel to fit into an object **101** having an inner diameter diameters of 50mm. This type of adjustment is required when different batches of objects **101** are introduced into the printing system (*e.g.*, from a production line) and the setup time required to change the mandrels over the line is affecting the production efficiency. Accordingly, production efficiency can be significantly improved by using the adjustable mandrel setup on the present invention since the dimensions/size of the all mandrels are digitally controlled by the control unit to fit into objects of different sizes/dimensions).

**[0133]** In some embodiments the lengths of the mandrels **33** may be also controllably adjusted according to the geometrical dimensions of the objects **101**. For example, and without being limiting, each mandrel **33** may be configured to be inflated by preload pressure applied thereto, and stopped whenever reaching the length of the mandrel **33** *i.e.*, when central shaft **41r** elongation reaches the length of the inner space of the object **101**. The mandrel elongation mechanism may be deflated by applying pressure higher than the preload for load/unload purpose. Accordingly, each carriage may be configured to controllably inflate/deflate 20 mandrels **33** using a single unit activated by pressure. However, mandrel length adjustment is not necessarily required because digital printing typically does not require full contact with the surface of the object **101** being printed. Accordingly, providing mechanical support by the mandrels **33** over a partial length of the objects **101** will be sufficient in most cases.

**[0134]** Figs. 21A to 21C demonstrate possible control schemes that can be used in the printing system **17**. One of the tasks of the control unit **300** is to synchronize print heads data jetting signals from each mandrel under the print heads assembly **100** (exemplified in Fig 21B) or adjust the speed of the carriage to align it with strict control done by the controller/driver on each carriage **C<sub>i</sub>**, so as to adjust a virtual signal for all print heads units and carriages movement or/and rotation (demonstrated in Fig. 21C). For this purpose the control unit **300** is configured to synchronize the ink jetting data supplied to the print heads according to the position of each carriage **C<sub>i</sub>** in the printing zone **12z**, while simultaneously multiple carriages **C<sub>i</sub>** are being advanced inside the printing zone and their mandrels **33** are being rotated under its printing head arrays. Fig. 21A shows a general control scheme usable in the printing system **17**, wherein the control unit

**300** is configured to communicate with each one of the carriages **C<sub>i</sub>** to receive its carriage position data and mandrel angular position (orientation, *i.e.*, using rotation encoder) data, and generate the ink jetting data **56d** supplied to the print head assembly **100** to operate each one of the printing heads **35** having objects **101** located under its nozzles.

**[0135]** **Fig. 21A** demonstrates possible approaches for communication between the control unit **300** and the carriages **C<sub>i</sub>**. One possible approach is to establish serial connection between the plurality of carriages **C<sub>i</sub>** moving on lane **10** *e.g.*, using a flexible cable (not shown) to electrically (and pneumatically) connect each pair of consecutive carriages **C<sub>i</sub>** on the lane **10**. In this approach the carriage/mandrel the electrical supply, position data, and other motion and control data are serially transferred along the serial connection of the carriages **C<sub>i</sub>**. The data communication over such serial communication connectivity may be performed, for example, using any suitable serial communication protocol (*e.g.*, Ethercat, Etheret and suchlike). In possible embodiments, electrical connection between the carriage **C<sub>i</sub>** and the control unit **300** may be established using an electrical slip ring and/or wirelessly (*e.g.*, Bluetooth, IR, RF, and the like for the data communication and/or a wireless power supply scheme such as inductive charging).

**[0136]** An alternative approach may be to establish direct connection, also called star connection (illustrated by broken arrowed lines) between the control unit **300** and power supply (not shown) units and the carriages **C<sub>i</sub>** on the lane **10**. Such direct connection with the carriages **C<sub>i</sub>** may be established using an electrical slip ring and/or wirelessly (*e.g.*, Bluetooth, IR, RF, and the like for the data communication and/or a wireless power supply scheme such as inductive charging).

**[0137]** A switching unit **56s** may be use in the control unit **300** for carrying out the printing signals switching (index and encoder signals and other signals) of each carriage **C<sub>i</sub>** to the respective print head units **35** above the carriages **C<sub>i</sub>** traversing the printing zone **12z**. The switching unit **56s** may be configured to receive all printing signals from all the carriages **C<sub>i</sub>** and switch each one of the received printing signals based on the position of carriages **C<sub>i</sub>** with respect to the relevant print heads **35**.

**[0138]** **Fig. 21A** also demonstrates a possible implementation wherein the control unit **300** is placed on one of the carriages **C<sub>i</sub>**; in this non-limiting example on the first carriage **C<sub>i</sub>**. Each carriage **C<sub>i</sub>** may also include a controller (not shown) configured to control the speed of the carriage over the lane **10**, the rotation of the mandrels **33**, the data communication with the control unit **300**, and performing other tasks and functionalities of the carriage as required during the different stations (*e.g.*, priming, curing, inspection, loading etc.) along the lane **10**. **Fig. 21A** further shows an exemplary control scheme usable in each carriage **C<sub>i</sub>** for controlling the speed of the carriage. In this control scheme a driver unit **51** is used to operate an electric motor **52** according to speed control

data received from the control unit **300**, and an encoder **53** coupled to the motor, and/or to rotating element associated with it, is used to acquire data indicative of the current speed/position of the carriage **C<sub>i</sub>** and feeding it back to the driver unit, to thereby establish a closed loop local control.

**[0139]** The control unit **300** may be configured to implement independent control of the carriage **C<sub>i</sub>** typically requires monitoring and managing carriage movement and mandrel rotation speeds, and optionally also full stop thereof, at different stages of the printing process carried out over the elliptic lane **10** (*e.g.*, plasma treatment, UV, inspection, printing, loading/unloading). For example, and without being limiting, the control unit **300** may be configured to perform loading/unloading of a plurality of objects **101** on mandrels **33** of one carriage, simultaneously advance another carriage in high speed through the printing zone **12z** while printing desired patterns over outer surfaces of a plurality of objects **101** carried by the carriage, and concurrently advance and slowly rotate mandrels of yet another carriage under a UV curing process. The control unit **300** is further configured to guarantee high precision of the carriage movement and mandrel rotation of the carriages **C<sub>i</sub>** traversing the printing zone **12z** *e.g.*, to maintain advance accuracy of about 5 microns for high print resolution of about 1200dpi

**[0140]** In some possible embodiments each wagon is equipped with two driver units **51**, two motors **52** (*i.e.*, a linear carriage movement motor and a mandrel rotative motor), and one or more high resolution position encoders **53** (*i.e.*, a linear encoder and a rotative encoder) which are configured to operate as an independent real time motion system. Each one of the drivers is configured to perform the linear or rotary axis movement, where the carriage linear advance and mandrels rotation per carriage (or per mandrel in other models) according to a general control scheme that is optimized to achieve high precision in real time. Accordingly, each carriage can effect both linear and rotatory motion of the objects,

**[0141]** **Figs. 21B and 21C** are block diagrams schematically illustrating possible control schemes usable for to achieve synchronization between the carriages **C<sub>i</sub>** and the print head units **35** of the print head assembly **100**. **Fig. 21B** demonstrates a multiple signal synchronization approach, wherein position (linear of the carriage and/or angular of the mandrels) data from each carriage **C<sub>i</sub>** is received and processed by the control unit **300**. The control unit **300** process position data, accurately determines which carriage **C<sub>i</sub>** is located under each print head unit **35**, and accordingly generates control signals for activation of the print head units **35**. The control signals are delivered to the print head assembly **100** through an electrical slip ring mechanism **55** (or any other suitable rotative cable guide). In this configuration each carriage **C<sub>i</sub>** is independently controlled with respect to its speed and position on the lane **10**.

**[0142]** **Fig. 21B** demonstrates another approach employing a single virtual synchronization signal that syn-

chronizes mandrel rotations, speed and position, of all carriage  $C_i$  with the print head units **35** of the print head assembly **100**. In this embodiment the control unit **300** is configured to provide a virtual pulse to the carriages  $C_i$  that receives the virtual pulse and are then accordingly aligned. Once aligned with the virtual pulse, synchronization between the rotation requested and required is achieved. Under such synchronization the controller may use the virtual signal to initiate the print heads units ejection and printing.

**[0143]** In a possible embodiment the electrical slip ring mechanism **55** is installed at the middle of the elliptic lane **10**, and the carriages  $C_i$  are electrically linked to the print head assembly via flexible cables (that are in between the carriages) electrically coupled to the electrical slip ring mechanism **55**. The electrical slip ring mechanism **55** may be configured to transfer the signals from the carriages  $C_i$  to the switching unit **56s** of the control unit **300**, which generates control signals to operate the printing heads **35** for printing on the objects held by the respective carriages  $C_i$  traversing the printing zone **12z**. In other possible scenarios the carriages  $C_i$  in the printing zone **12z** are synchronized to one virtual pulse to create a synchronized fire pulse to the print head units **35** and thereby allow single print head printing on a plurality of different tubes carried by different carriages  $C_i$  at the same time.

**[0144]** With this design the printing system is capable of maintaining high efficiency of printing heads utilization in cases wherein the length of the objects **101** is greater than the length of a print head, and maintain high printing efficiency in cases wherein a single print head is printing simultaneously on two different objects **101**. The print heads **35** may be organized to form a 3D printing tunnel shape.

**[0145]** Printing systems implementation based on the techniques described herein may be designed to reach high throughputs ranging, for example, and without being limiting, between 5,000 to 50,000 objects per hour. In some embodiments the ability to simultaneously print on a plurality of objects traversing the printing zone by the print head assembly may yield utilization of over 80% (efficiency) of the printing heads.

**[0146]** Functions of the printing system described hereinabove may be controlled through instructions executed by a computer-based control system. A control system suitable for use with embodiments described hereinabove may include, for example, one or more processors **302a** connected to a communication bus, one or more volatile memories **56m** (e.g., random access memory - RAM) or non-volatile memories (e.g., Flash memory). A secondary memory (e.g., a hard disk drive, a removable storage drive, and/or removable memory chip such as an EPROM, PROM or Flash memory) may be used for storing data, computer programs or other instructions, to be loaded into the computer system.

**[0147]** For example, computer programs (e.g., computer control logic) may be loaded from the secondary mem-

ory into a main memory for execution by one or more processors of the control system. Alternatively or additionally, computer programs may be received via a communication interface. Such computer programs, when executed, enable the computer system to perform certain features of the present invention as discussed herein. In particular, the computer programs, when executed, enable a control processor to perform and/or cause the performance of features of the present invention. Accordingly, such computer programs may implement controllers of the computer system.

**[0148]** As described hereinabove and shown in the associated Figs., the present invention provides a printing system for simultaneous printing on a plurality of objects successively streamed through a printing zone, and related methods. While particular embodiments of the invention have been described, it will be understood, however, that the invention is not limited thereto, since modifications may be made by those skilled in the art, particularly in light of the foregoing teachings. As will be appreciated by the skilled person, the invention can be carried out in a great variety of ways, employing more than one technique from those described above, all without exceeding the scope of the invention.

## Claims

1. A printing system for printing on outer surfaces of objects (101), the system comprising a conveyor system (302) configured for moving the objects (101) along a closed loop lane (10), and one or more print head assemblies (100) for printing on said objects (101), the system **characterized in that:**

the print head assembly (100) comprises at least two arrays (R) of print head units (35), each array ( $R_i$ ) of print head units being configured to define a respective printing route ( $T_i$ ) along a printing axis, said print head units (35) being arranged in a spaced-apart relationship along said at least two printing routes ( $T_i$ ), each of the print head units (35) having at least one printing element (130) for printing onto respective portions of the objects (101) successively aligned with said at least one printing element while moving with respect to the print head assembly (100); and said conveyor system (302) is configured for moving at least two streams of objects (101) along a general conveying direction for passing the objects of each of the at least two streams in a successive manner through a respective printing route ( $T_i$ ), and printing on said objects by printing elements of said respective printing route.

2. The system of claim 1 comprising a support platform for supporting the at least two stream of objects, said

- support platform being mountable on the conveyor system for moving the objects along the general conveying direction passing through the at least two printing routes and being configured to effect rotation of the objects about their axes of translation while moving along the printing routes.
3. The system of claim 1 or 2, wherein at least two of the print head units in each one of the at least two arrays being spaced-apart along an axis traverse to the printing axis.
  4. The system of any one of the preceding claims, wherein the print head units of the at least two arrays are arranged in a common plane, said conveyor system and the support platform being configured for simultaneously moving the at least two streams of objects along the at least two printing routes covered by the respective at least two arrays of the print head units.
  5. The system of any one of claims 2 to 4, comprising a control unit configured and operable to perform at least one of the following actions: operate the conveyor system to carry out translational movement along the general conveying direction along the lane; operate at least some of the print head units to concurrently print on the objects of said at least two streams of objects; and operate the support platforms to carry out the rotational movement of the objects.
  6. The system of claim 5, wherein the control unit is configured to operate the conveyor system to carry out translational movement of the support platforms along the general conveying direction in a step-like fashion, to operate the support platform to carry out the rotational movement at least during a time interval in which translational movement does not occur, and to operate at least some of the print head units to carry out the printing during the time interval in which translational movement does not occur and rotational movement occurs.
  7. The system of claim 5 or 6, wherein the control unit is configured and operable for operating the conveyor system and the support platform to carry out the translational and rotational movements simultaneously while operating at least some of the print head units to effect printing, such that substantially continuous printing of image data is performed on the surfaces of the objects in the stream of objects along a spiral path.
  8. The system of any one of claims 5 to 7, wherein the control unit is configured and operable to operate the conveyor system and at least some of the print head units, so as to effect simultaneous printing of image data on surfaces of the objects by at least two print head units belonging to different arrays of print head units.
  9. The system of any one of claims 5 to 8, wherein the control unit is configured and operable to perform at least one of the following: effect a change in a distance between at least one print head unit and the object surface aligned with said at least one print head unit to thereby adjust its position; effect simultaneous printing of image data on surface area of at least one of the objects by at least two print head units; effect simultaneous printing on surface areas of at least two different objects by a single print head unit; adjust elevation of the at least one print head assembly according to geometrical dimensions of the objects; and minimize gaps between adjacently located support platforms conveyed by the conveyor system.
  10. The system of any one of the preceding claims, wherein the print head units are mounted for movement along radial axes or one or more axes substantially perpendicular to the printing axis.
  11. The system of any one of claims 5 to 10, wherein the control unit is configured and operable to perform one of the following: to generate signals for synchronizing operation of the printing elements according to at least one of angular and linear position of the objects carried by the support platform along the printing route; to receive signals indicative of the angular and linear positions of the objects and generate synchronizing signals for operating the printing elements accordingly.
  12. The system of any one of the preceding claims, comprising at least one of the following: at least one curing unit configured for curing a material composition ejected by the print head assembly on the surfaces of the objects; at least one inspection unit for inspecting the objects after printing on their outer surfaces; at least one loading unit for loading the at least two streams of objects onto the conveyor system; at least one unloading unit for removal of the at least two streams of objects from the conveyor system; and at least one priming unit configured for priming at least one location of the surfaces of the objects.
  13. The system of any one of the preceding claims, wherein successive printing elements of at least one of the print head units are configured for ejecting respective compositions on a region of the objects' surfaces, such that a combination of the respective compositions on the object's surface forms a desired composition.
  14. The system of any one of the preceding claims,

wherein the objects are arranged on the support platform in two parallel rows, and wherein each pair of adjacently located objects belonging to different rows are mechanically coupled to a common actuating mechanism on the support assembly.

15. A method of printing on outer surfaces of objects (101), the method comprising conveying the objects over a closed loop lane (10) comprising at least one print head assembly (100) for printing on said objects, **characterized in that**

the conveying of the objects comprises passing at least two streams of said objects (101) through respective at least two printing routes ( $T_i$ ) in said closed loop lane, each printing route comprising at least one array ( $R_i$ ) of print head units arranged in a spaced-apart relationship along a printing axis; and the printing on the objects comprises receiving data indicative of locations of said streams of objects passing through said respective printing routes ( $T_i$ ) and of angular orientation of each object in said streams;

determining, based on the received data, surface areas of said objects facing print head units (35) of each array ( $R_i$ ), and one or more printing patterns to be applied on said surface areas by the respective print head units; and

operating said arrays ( $R_i$ ) of print head units to apply said one or more patterns on said surface areas by the respective printing head units (35).

16. The method of claim 15, comprising at least one of the following steps: adjusting elevation of the at least one print head assembly according to geometrical dimensions of the objects; rotating the objects passing through the printing route during application of the one or more patterns; advancing the streams of objects along the at least two printing routes during application of the one or more patterns; applying a priming process to surface areas of the streams of objects; effecting simultaneous printing of image data on surface area of at least one of the objects by two or more print head units; effecting simultaneous printing on surface areas of two different objects by a single print head unit; minimizing gaps between adjacently located objects; inspecting the objects after printing on their outer surfaces; and applying a curing process to surface areas of the streams of objects before passing them through the printing routes.

## Patentansprüche

1. Drucksystem zum Drucken auf Außenoberflächen von Objekten (101), wobei das System ein zur Bewegung der Objekte (101) entlang einer geschlossenen Schleifenbahn (10) gestaltetes Fördersystem

(302) und eine oder mehrere Druckkopfbaugruppen (100) zum Drucken auf den Objekten (101) aufweist, wobei das System **dadurch gekennzeichnet ist, dass:**

die Druckkopfbaugruppe (100) mindestens zwei Anordnungen ( $R$ ) von Druckkopfeinheiten (35) aufweist, wobei jede Anordnung ( $R_i$ ) von Druckkopfeinheiten gestaltet ist, um eine jeweilige Druckstrecke ( $T_i$ ) entlang einer Druckachse zu definieren, wobei die Druckkopfeinheiten (35) in einer voneinander-beabstandet Beziehung entlang der mindestens zwei Druckstrecken ( $T_i$ ) angeordnet sind, wobei jede der Druckkopfeinheiten (35) mindestens ein Druckelement (130) zum Drucken auf jeweilige Abschnitte der Objekte (101), die aufeinanderfolgend mit dem mindestens einen Druckelement ausgerichtet sind, während sie sich gegenüber der Druckkopfbaugruppe (100) bewegen, hat, und wobei das Fördersystem (302) zum Bewegen von mindestens zwei Strömen von Objekten (101) entlang einer allgemeinen Förderrichtung zur Hindurchführung der Objekte von jedem der mindestens zwei Ströme in aufeinanderfolgender Weise durch eine jeweilige Druckstrecke ( $T_i$ ) und zum Drucken auf den Objekten mit Hilfe von Druckelementen der jeweiligen Druckstrecke gestaltet ist.

2. System nach Anspruch 1, aufweisend eine Unterstützungsplattform zum Unterstützen der mindestens zwei Ströme von Objekten, wobei die Unterstützungsplattform auf dem Fördersystem zum Bewegen der Objekte entlang der allgemeinen Förderrichtung, die mindestens zwei Druckstrecken durchläuft, montierbar ist und gestaltet ist, um eine Rotation der Objekte um ihre Translationsachsen herum durchzuführen, während sie sich entlang der Druckstrecken bewegen.
3. System nach Anspruch 1 oder 2, wobei mindestens zwei der Druckkopfeinheiten in jeder der mindestens zwei Anordnungen entlang einer zur Druckachse quer liegende Achse voneinander beabstandet sind.
4. System nach einem der vorhergehenden Ansprüche, wobei die Druckkopfeinheiten der mindestens zwei Anordnungen in einer gemeinsamen Ebene angeordnet sind, wobei das Fördersystem und die Unterstützungsplattform zum gleichzeitigen Bewegen der mindestens zwei Ströme von Objekten entlang der mindestens zwei Druckstrecken, die von den jeweiligen mindestens zwei Anordnungen der Druckkopfeinheiten abgedeckt werden, gestaltet sind.
5. System nach einem der Ansprüche 2 bis 4, aufweisend eine Steuerungseinheit, die gestaltet und be-

- treibbar ist, um mindestens eine der folgenden Tätigkeiten durchzuführen: das Fördersystem betreiben, um eine Translationsbewegung entlang der allgemeinen Förderrichtung entlang der Bahn auszuführen, mindestens einige der Druckkopfeinheiten betreiben, um gleichzeitig auf den Objekten der mindestens zwei Ströme von Objekten zu drucken, und die Unterstützungsplattformen betreiben, um die Rotationsbewegung der Objekte auszuführen.
- 5
6. System nach Anspruch 5, wobei die Steuerungseinheit gestaltet ist, um das Fördersystem zu betreiben, um eine Translationsbewegung der Unterstützungsplattformen entlang der allgemeinen Förderrichtung in einer stufenartigen Weise auszuführen, um die Unterstützungsplattform zu betreiben, um die Rotationsbewegung mindestens während eines Zeitraums auszuführen, in welchem keine Translationsbewegung stattfindet, und um mindestens einige der Druckkopfeinheiten zu betreiben, um das Drucken während des Zeitraums auszuführen, in welchem keine Translationsbewegung stattfindet und eine Rotationsbewegung stattfindet.
- 10
7. System nach Anspruch 5 oder 6, wobei die Steuerungseinheit zum Betrieb der Fördersystems und der Unterstützungsplattform gestaltet und betreibbar ist, um die Translations- und Rotationsbewegungen gleichzeitig auszuführen, während mindestens einige der Druckkopfeinheiten betrieben werden, um das Drucken durchzuführen, so dass ein im Wesentlichen kontinuierliches Drucken von Bilddaten auf den Oberflächen der Objekte im Strom von Objekten entlang einer spiralförmigen Bahn durchgeführt wird.
- 15
8. System nach einem der Ansprüche 5 bis 7, wobei die Steuerungseinheit gestaltet und betreibbar ist, um das Fördersystem und mindestens einige der Druckkopfeinheiten zu betreiben, um das gleichzeitige Drucken von Bilddaten auf Oberflächen der Objekte durch mindestens zwei zu unterschiedlichen Anordnungen von Druckkopfeinheiten gehörenden Druckkopfeinheiten durchzuführen.
- 20
9. System nach einem der Ansprüche 5 bis 8, wobei die Steuerungseinheit gestaltet und betreibbar ist, um mindestens eines der Folgenden durchzuführen: eine Änderung in einem Abstand zwischen mindestens einer Druckkopfeinheit und der mit dieser mindestens einen Druckkopfeinheit ausgerichteten Objektoberfläche durchführen, um dadurch ihre Position zu justieren, gleichzeitiges Drucken von Bilddaten auf einem Oberflächenbereich von mindestens einem der Objekte durch mindestens zwei Druckkopfeinheiten durchführen, gleichzeitiges Drucken auf Oberflächenbereiche von mindestens zwei unterschiedlichen Objekten durch eine einzelne Druckkopfeinheit durchführen, die Erhöhung der mindestens
- 25
10. System nach einem der vorhergehenden Ansprüche, wobei die Druckkopfeinheiten zur Bewegung entlang radialer Achsen oder einer oder mehrerer Achsen, die im Wesentlichen senkrecht zur Druckachse liegen, montiert sind.
- 30
11. System nach einem der Ansprüche 5 bis 10, wobei die Steuerungseinheit gestaltet und betreibbar ist, um eines der Folgenden durchzuführen: um Signale zur Synchronisierung des Betriebs der Druckelemente entsprechend mindestens einer von einer Winkel- und einer Linearposition der von der Unterstützungsplattform entlang der Druckstrecke getragenen Objekte zu erzeugen, um die Winkel- und Linearpositionen der Objekte angegebene Signale zu empfangen und Synchronisierungssignale zum entsprechenden Betrieb der Druckelemente zu erzeugen.
- 35
12. System nach einem der vorhergehenden Ansprüche, aufweisend mindestens eine der Folgenden: mindestens eine Aushärtungseinheit, die zur Aushärtung einer von der Druckkopfbaugruppe auf die Oberflächen der Objekte ausgespritzte Materialzusammensetzung gestaltet ist, mindestens eine Inspektionseinheit zur Inspektion der Objekte nach dem Drucken auf ihren Außenoberflächen, mindestens eine Ladeeinheit zum Laden der mindestens zwei Ströme von Objekten auf das Fördersystem, mindestens eine Abladeeinheit zur Entfernung der mindestens zwei Ströme von Objekten vom Fördersystem und mindestens eine Grundiereinheit, die zum Grundieren von mindestens einer Stelle der Oberflächen der Objekte gestaltet ist.
- 40
13. System nach einem der vorhergehenden Ansprüche, wobei aufeinanderfolgende Druckelemente von mindestens einer der Druckkopfeinheiten zum Ausspritzen jeweiliger Zusammensetzungen auf einem Bereich der Objektoberflächen gestaltet sind, so dass eine Kombination der jeweiligen Zusammensetzungen auf der Objektoberfläche eine gewünschte Zusammensetzung bildet.
- 45
14. System nach einem der vorhergehenden Ansprüche, wobei die Objekte auf der Unterstützungsplattform in zwei parallelen Reihen angeordnet sind, und wobei jedes Paar nebeneinander liegender, zu unterschiedlichen Reihen gehörender Objekte mechanisch an einen gemeinsamen Betätigungsmechanismus auf der Unterstützungsbaugruppe gekoppelt sind.
- 50
- 55

15. Verfahren zum Drucken auf Außenoberflächen von Objekten (101), wobei das Verfahren das Fördern der Objekte über einer geschlossenen Schleifenbahn (10) umfassend mindestens eine Druckkopfbaugruppe (100) zum Drucken auf den Objekten umfasst, **dadurch gekennzeichnet, dass**

das Fördern der Objekte das Hindurchführen von mindestens zwei Strömen von den Objekten (101) durch jeweils mindestens zwei Druckstrecken ( $T_i$ ) in der geschlossenen Schleifenbahn, wobei jede Druckstrecke mindestens eine Anordnung ( $R_i$ ) von in einer voneinander-beabstandeten Beziehung entlang einer Druckachse angeordneten Druckkopfeinheiten umfasst, und das Drucken auf den Objekten Folgendes umfasst

Empfangen von Daten, die Positionen der Ströme von die jeweiligen Druckstrecken ( $T_i$ ) durchlaufenden Objekten und Winkelausrichtung von jedem Objekt in den Strömen angeben, Bestimmen, auf Basis der empfangenen Daten, von Oberflächenbereichen der den Druckkopfeinheiten (35) von jeder Anordnung ( $R_i$ ) gegenüberliegenden Objekte und eines oder mehrerer auf den Oberflächenbereichen durch die jeweiligen Druckkopfeinheiten aufzubringender Druckmuster und

Betreiben der Anordnungen ( $R_i$ ) von Druckkopfeinheiten, um das eine oder mehrere Muster auf die Oberflächenbereiche durch die jeweiligen Druckkopfeinheiten (35) aufzutragen.

16. Verfahren nach Anspruch 15, umfassend mindestens einen der folgenden Schritte: Justieren der Erhöhung der mindestens einen Druckkopfbaugruppe entsprechend geometrischer Dimensionen der Objekte, Drehen der die Druckstrecke durchlaufenden Objekte während der Auftragung des einen oder mehreren Muster; Verschieben der Ströme von Objekten entlang der mindestens zwei Druckstrecken während der Auftragung des einen oder mehreren Muster, Anwenden eines Grundverfahrens an Oberflächenbereichen der Ströme von Objekten, Durchführen von gleichzeitigem Drucken von Bildaten auf einem Oberflächenbereich von mindestens einem der Objekte durch zwei oder mehrere Druckkopfeinheiten, Durchführen von gleichzeitigem Drucken auf Oberflächenbereichen von zwei unterschiedlichen Objekten durch eine einzelne Druckkopfeinheit, Minimierung der Abstände zwischen nebeneinander liegenden Objekten, Inspektion der Objekte nach dem Drucken auf ihren Außenoberflächen und Anwenden eines Aushärtungsverfahrens an Oberflächenbereichen der Ströme von Objekten, bevor sie durch die Druckstrecken hindurchgeführt werden.

## Revendications

1. Système d'impression destiné à imprimer sur des surfaces externes d'objets (101), le système comprenant un système convoyeur (302) configuré pour déplacer les objets (101) le long d'une ligne en circuit fermé (10), et un ou plusieurs ensembles de têtes d'impression (100) destinés à imprimer sur lesdits objets (101), le système étant **caractérisé en ce que** :

l'ensemble de têtes d'impression (100) comprend au moins deux groupes (R) d'unités de têtes d'impression (35), chaque groupe ( $R_i$ ) d'unités de têtes d'impression étant configuré pour définir un parcours d'impression ( $T_i$ ) respectif le long d'un axe d'impression, lesdites unités de têtes d'impression (35) étant agencées dans une relation espacée les unes des autres le long desdits au moins deux parcours d'impression ( $T_i$ ), chacune des unités de têtes d'impression (35) ayant au moins un élément d'impression (130) destiné à imprimer sur des parties respectives des objets (101) successivement alignées avec ledit au moins un élément d'impression tandis qu'il se déplace par rapport à l'ensemble de têtes d'impression (100) ; et ledit système convoyeur (302) est configuré pour déplacer au moins deux flux d'objets (101) le long d'une direction générale de convoyage afin de conduire les objets de chacun des au moins deux flux à suivre de manière successive un parcours d'impression ( $T_i$ ) respectif, et imprimer sur lesdits objets par des éléments d'impression dudit parcours d'impression respectif.

2. Système selon la revendication 1, comprenant une plateforme de support destinée à supporter les au moins deux flux d'objets, ladite plateforme de support étant montable sur le système convoyeur afin de déplacer les objets le long de la direction générale de convoyage suivant les au moins deux parcours d'impression et étant configurée pour effectuer une rotation des objets par rapport à leurs axes de translation tandis qu'ils se déplacent le long des parcours d'impression.
3. Système selon la revendication 1 ou 2, dans lequel au moins deux des unités de têtes d'impression dans chacun des au moins deux groupes étant espacées les unes des autres le long d'un axe traversent l'axe d'impression.
4. Système selon l'une quelconque des revendications précédentes, dans lequel les unités de têtes d'impression des au moins deux groupes sont agencées sur un plan commun, ledit système convoyeur et la plateforme de support étant configurés pour dépla-

cer simultanément les au moins deux flux d'objets le long des au moins deux parcours d'impression couverts par les au moins deux groupes respectifs des unités de têtes d'impression.

5. Système selon l'une quelconque des revendications 2 à 4, comprenant une unité de commande configurée et utilisable pour réaliser au moins l'une des actions suivantes : commander au système convoyeur d'exécuter un mouvement de translation le long de la direction générale de convoyage le long de la ligne ; commander à au moins certaines des unités de têtes d'impression d'imprimer simultanément sur les objets desdits au moins deux flux d'objets ; et commander aux plateformes de support d'exécuter le mouvement de rotation des objets.
6. Système selon la revendication 5, dans lequel l'unité de commande est configurée pour commander au système convoyeur d'exécuter un mouvement de translation des plateformes de support le long de la direction générale de convoyage de manière alternative, commander à la plateforme de support d'exécuter le mouvement de rotation au moins pendant un intervalle de temps pendant lequel aucun mouvement de translation n'a lieu, et commander au moins à certaines des unités de têtes d'impression d'exécuter l'impression pendant l'intervalle de temps pendant lequel aucun mouvement de translation n'a lieu et un mouvement de rotation a lieu.
7. Système selon la revendication 5 ou 6, dans lequel l'unité de commande est configurée et utilisable pour commander au système convoyeur et à la plateforme de support d'exécuter les mouvements de translation et de rotation simultanément tout en commandant au moins certaines des unités de têtes d'impression de réaliser l'impression, de manière à ce qu'une impression sensiblement continue de données images soit réalisée sur les surfaces des objets dans le flux d'objets le long d'une trajectoire en spirale.
8. Système selon l'une quelconque des revendications 5 à 7, dans lequel l'unité de commande est configurée et utilisable pour commander le système convoyeur et au moins certaines des unités de têtes d'impression, de façon à réaliser une impression simultanée de données images sur des surfaces des objets par au moins deux unités de têtes d'impression appartenant à des groupes différents d'unités de têtes d'impression.
9. Système selon l'une quelconque des revendications 5 à 8, dans lequel l'unité de commande est configurée et utilisable pour exécuter au moins l'une des actions suivantes : effectuer un changement dans une distance entre au moins une unité de tête d'im-

pression et la surface d'objet alignée à ladite au moins une unité de tête d'impression pour ajuster ainsi sa position ; effectuer une impression simultanée de données images sur une zone en surface d'au moins l'un des objets par au moins deux unités de têtes d'impression ; effectuer une impression simultanée sur des zones en surface d'au moins deux objets différents par une même unité de tête d'impression ; ajuster l'élévation de l'au moins un ensemble de têtes d'impression en fonction des dimensions géométriques des objets ; et minimiser des jeux entre des plateformes de support situées de manière adjacente convoyées par le système convoyeur.

10. Système selon l'une quelconque des revendications précédentes, dans lequel les unités de têtes d'impression sont montées pour un déplacement le long des axes radiaux ou un ou plusieurs axes sensiblement perpendiculaires à l'axe d'impression.
11. Système selon l'une quelconque des revendications 5 à 10, dans lequel l'unité de commande est configurée et utilisable pour exécuter l'une des actions suivantes : générer des signaux pour synchroniser l'activation des éléments d'impression en fonction d'au moins l'une de la position angulaire et linéaire des objets portés par la plateforme de support le long du parcours d'impression ; recevoir des signaux indicatifs des positions angulaire et linéaire des objets et générer des signaux de synchronisation pour activer les éléments d'impression en conséquence.
12. Système selon l'une quelconque des revendications précédentes, comprenant au moins l'un des éléments suivants : au moins une unité de durcissement configurée pour durcir une composition de matériau éjectée par l'ensemble de têtes d'impression sur les surfaces des objets ; au moins une unité d'inspection destinée à inspecter les objets après impression sur leurs surfaces externes ; au moins une unité de chargement destinée à charger les au moins deux flux d'objets sur le système convoyeur ; au moins une unité de déchargement pour le retrait des au moins deux flux d'objets depuis le système convoyeur ; et au moins une unité d'apprêt configurée pour apprêter au moins un emplacement des surfaces des objets.
13. Système selon l'une quelconque des revendications précédentes, dans lequel des éléments d'impression successifs d'au moins l'une des unités de têtes d'impression sont configurés pour éjecter des compositions respectives sur une zone des surfaces des objets, de manière à ce qu'une combinaison des compositions respectives sur la surface de l'objet forme une composition souhaitée.



14. Système selon l'une quelconque des revendications précédentes, dans lequel les objets sont agencés sur la plateforme de support en deux rangées parallèles, et dans lequel chaque paire d'objets situés de manière adjacente appartenant à des rangées différentes est couplée à un mécanisme d'actionnement commun sur l'ensemble de support. 5
15. Procédé d'impression sur des surfaces externes d'objets (101), le procédé comprenant le convoyage des objets sur une ligne en circuit fermé (10) comprenant au moins un ensemble de têtes d'impression (100) destiné à imprimer lesdits objets, **caractérisé en ce que** 10
- le convoyage des objets comprend la conduite d'au moins deux flux desdits objets (101) à suivre au moins deux parcours d'impression ( $T_i$ ) respectifs dans ladite ligne en circuit fermé, chaque parcours d'impression comprenant au moins un groupe ( $R_i$ ) d'unités de têtes d'impression agencées dans une relation espacée les unes des autres le long d'un axe d'impression ; et 15
- l'impression sur les objets comprend 20
- la réception de données indicatives d'emplacements desdits flux d'objets tandis qu'ils suivent lesdits parcours d'impression ( $T_i$ ) respectifs et de l'orientation angulaire de chaque objet dans lesdits flux ; 25
- la détermination, sur la base des données reçues, des zones en surface desdits objets tournées vers les unités de têtes d'impression (35) de chaque groupe ( $R_i$ ), et un ou plusieurs dessins d'impression devant être appliqués sur lesdites zones en surface par les unités de têtes d'impression respectives ; et 30
- la commande desdits groupes ( $R_i$ ) d'unités de têtes d'impression d'appliquer ledit un ou plusieurs dessins sur lesdites zones en surface par les unités de têtes d'impression respectives 35
- (35). 40
16. Procédé selon la revendication 15, comprenant au moins l'une des étapes suivantes : ajuster l'élévation de l'au moins un ensemble de têtes d'impression en fonction des dimensions géométriques des objets ; 45
- effectuer une rotation des objets tandis qu'ils suivent le parcours d'impression pendant l'application du ou des plusieurs dessins ; avancer les flux d'objets le long des au moins deux parcours d'impression pendant l'application du ou des plusieurs dessins ; appliquer un processus d'apprêt à des zones en surface des flux d'objets ; effectuer une impression simultanée de données images sur une zone en surface d'au moins l'un des objets par deux unités de têtes d'impression ou plus ; effectuer une impression simultanée sur des zones en surface de deux objets différents par une même unité de tête d'impression ; 50
- 55
- minimiser des jeux entre des objets situés de manière adjacente ; inspecter les objets après impression sur leurs surfaces externes ; et appliquer un processus de durcissement sur des zones en surface des flux d'objets avant de les conduire à suivre les parcours d'impression.

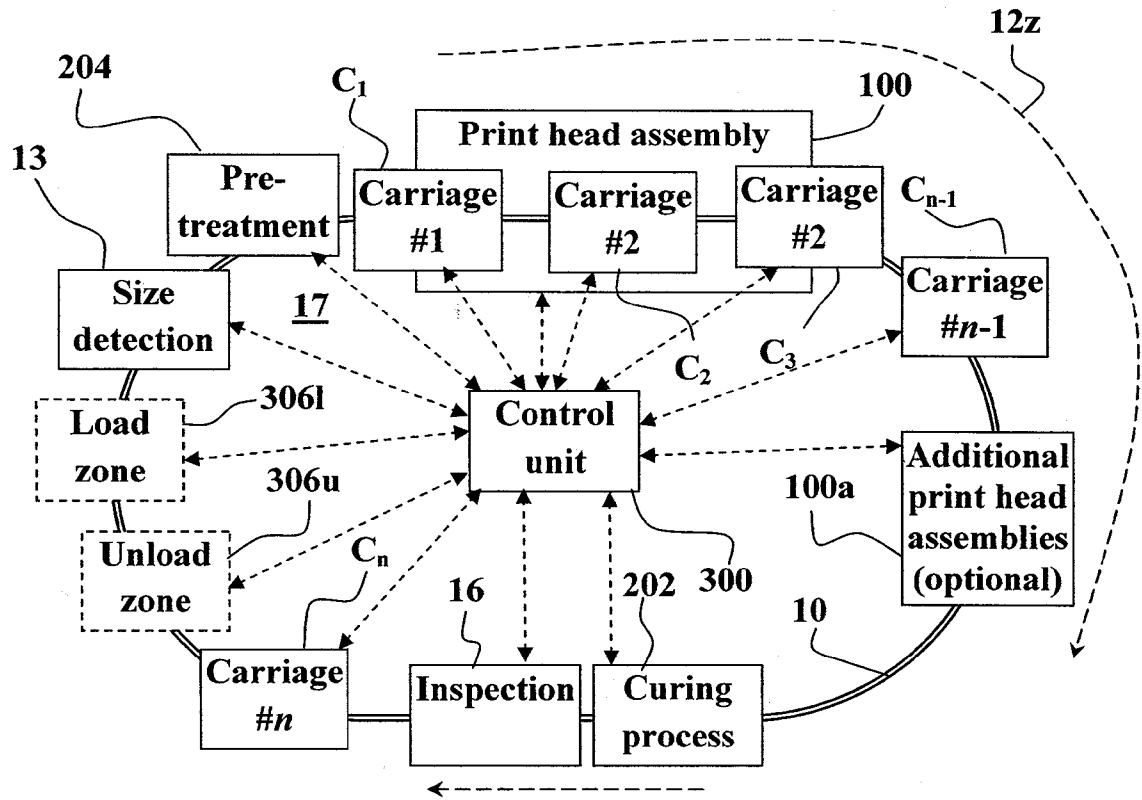


Fig. 1

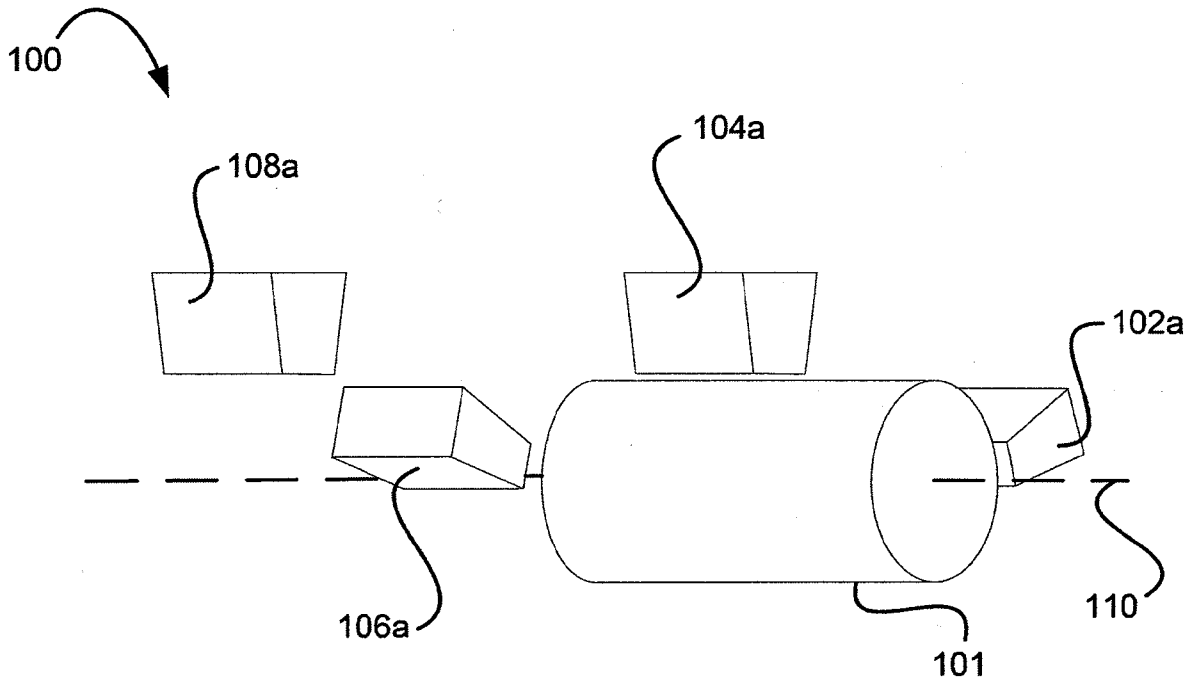
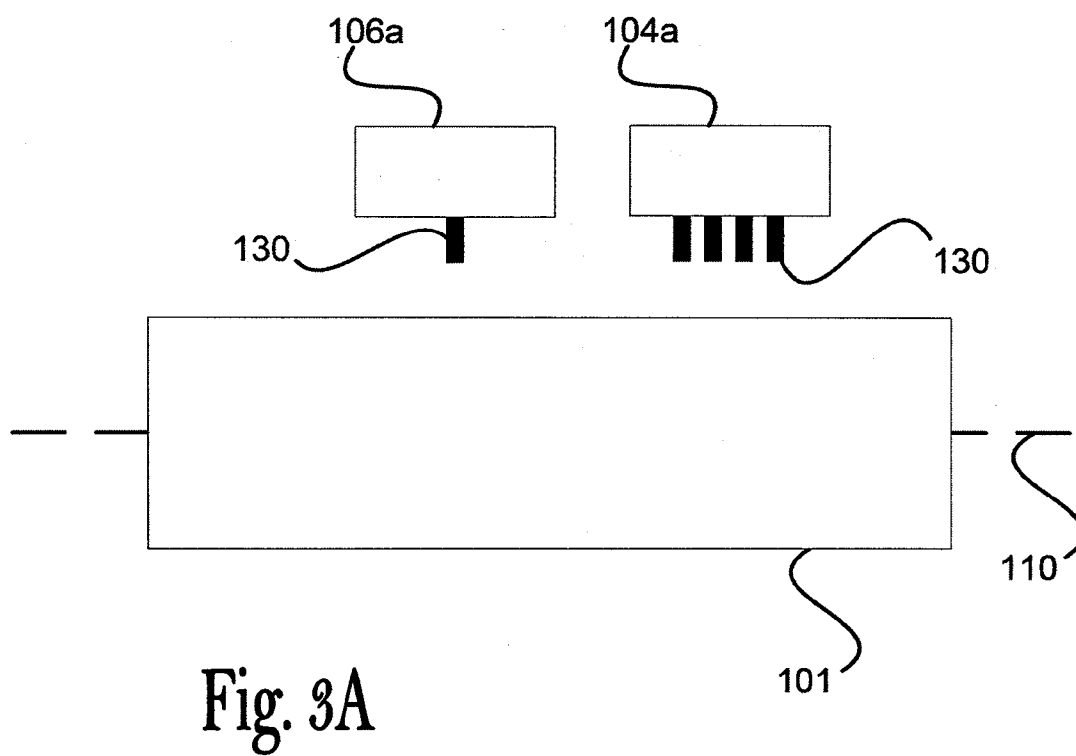
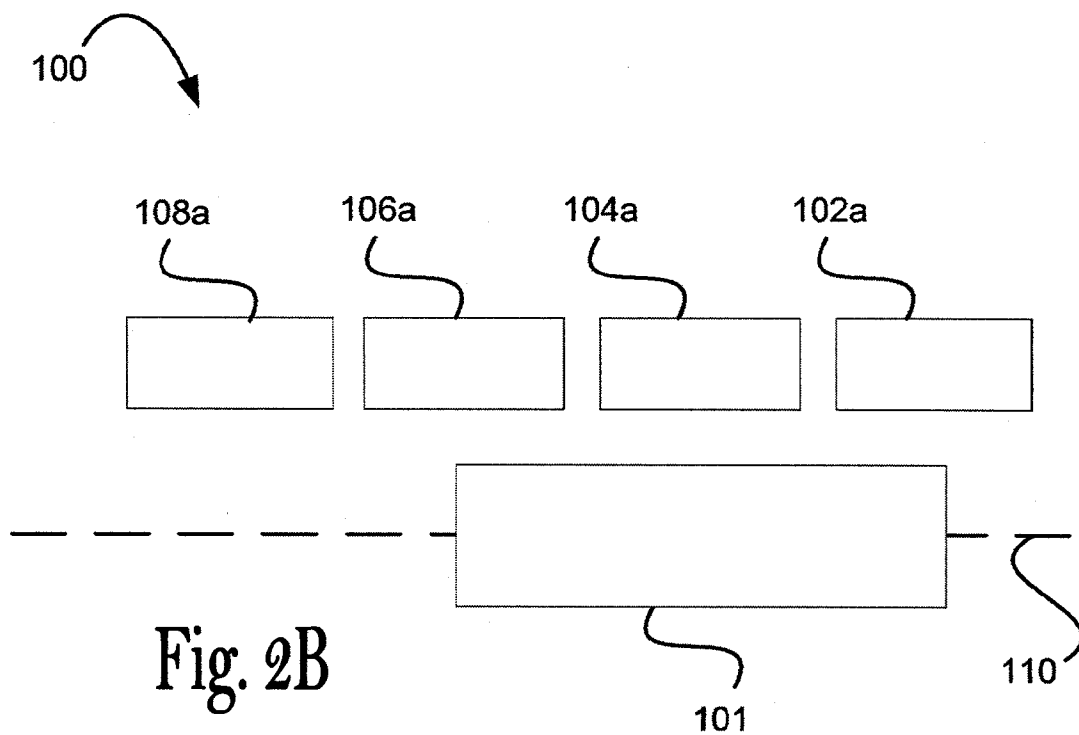


Fig. 2A



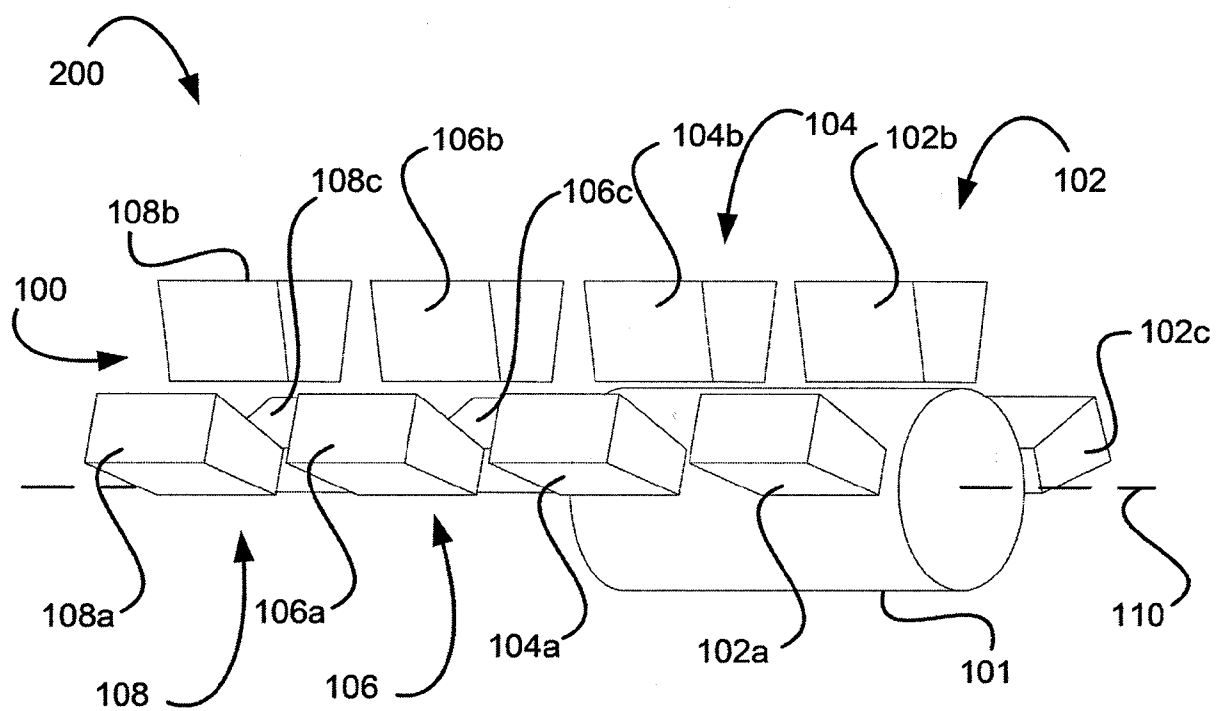
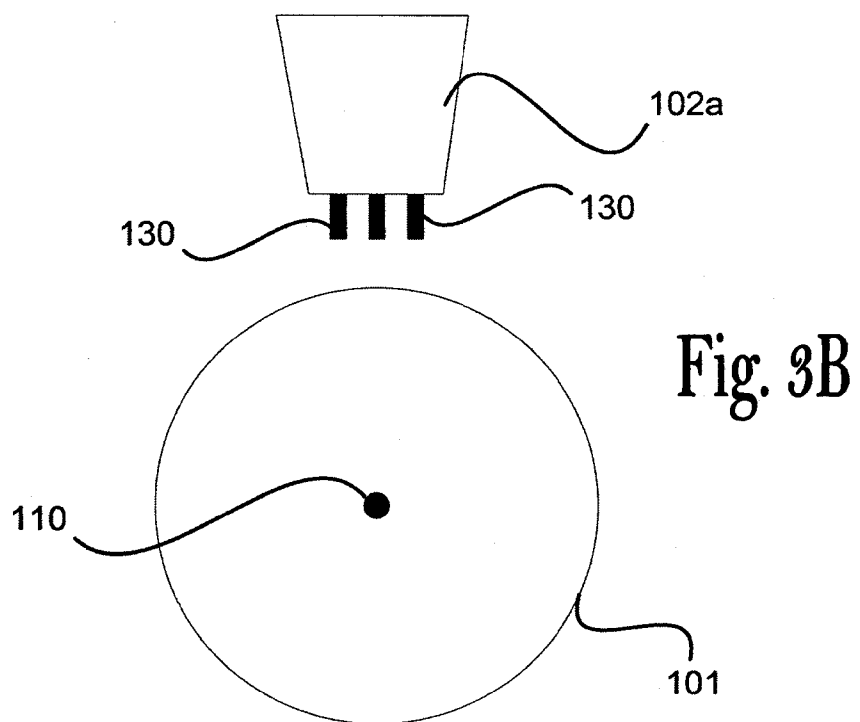


Fig. 4A

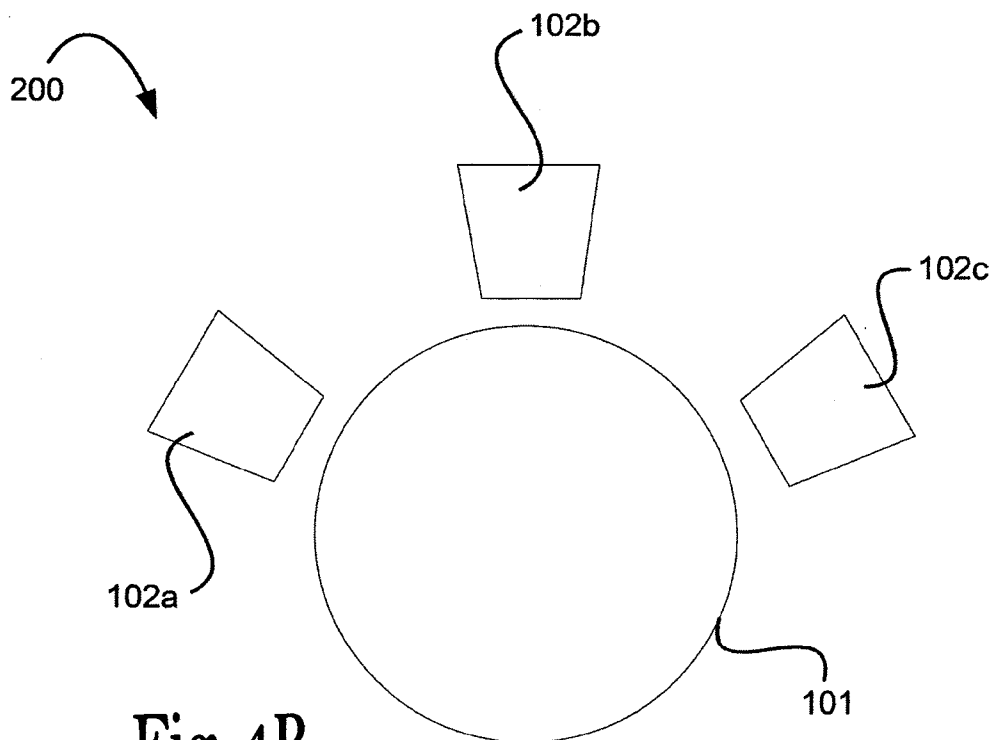


Fig. 4B

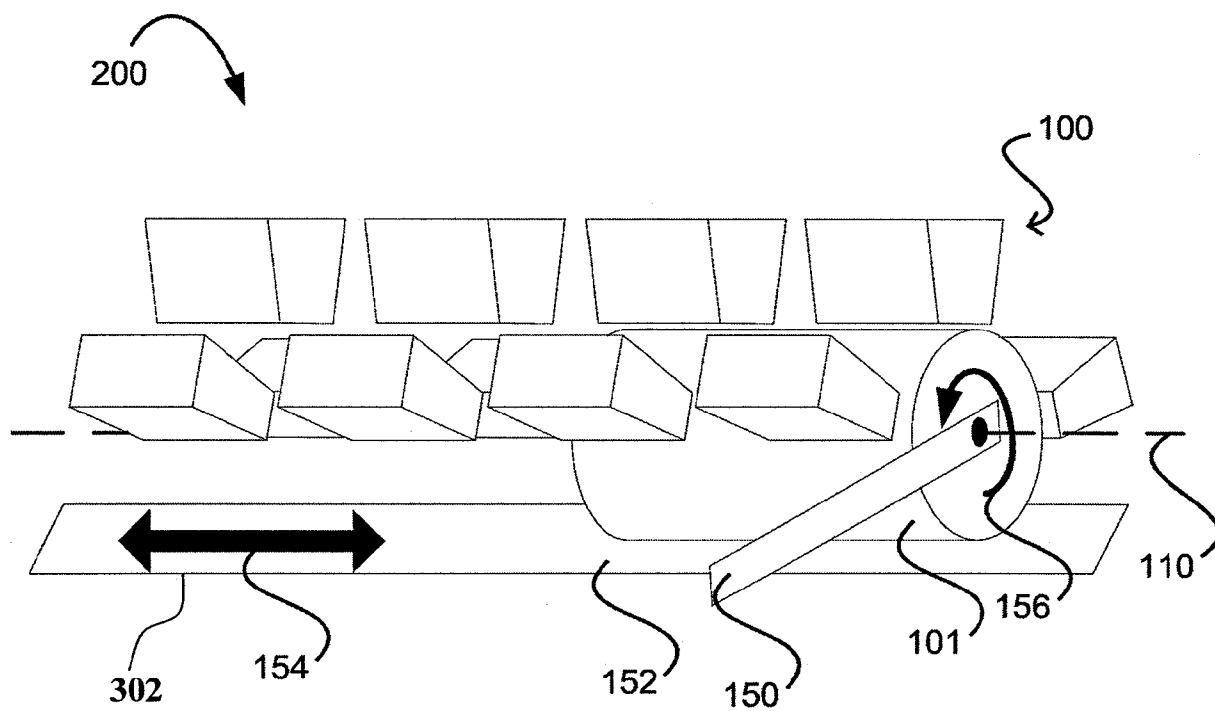
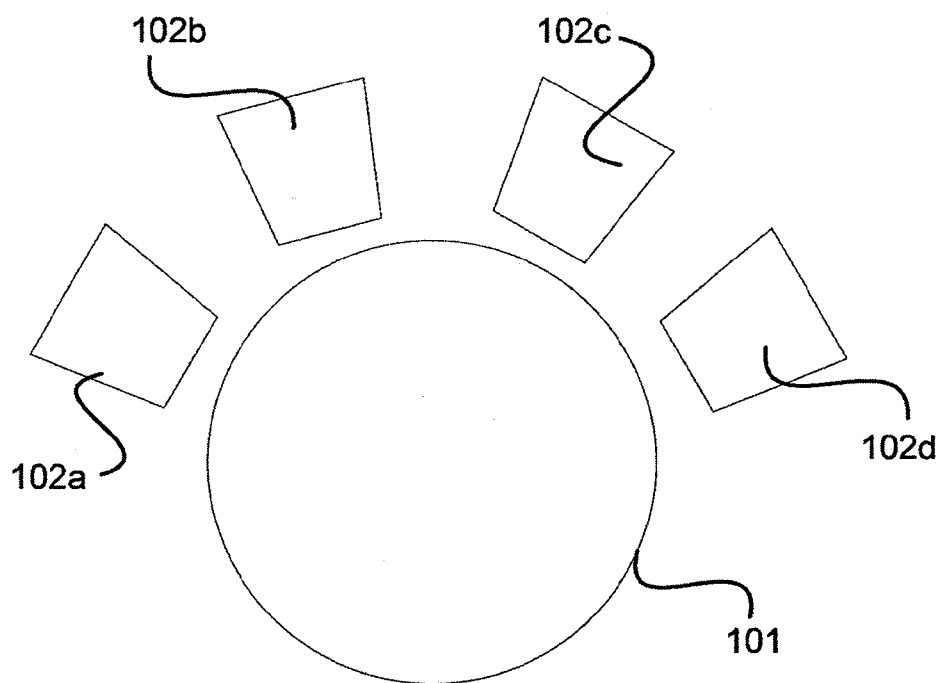
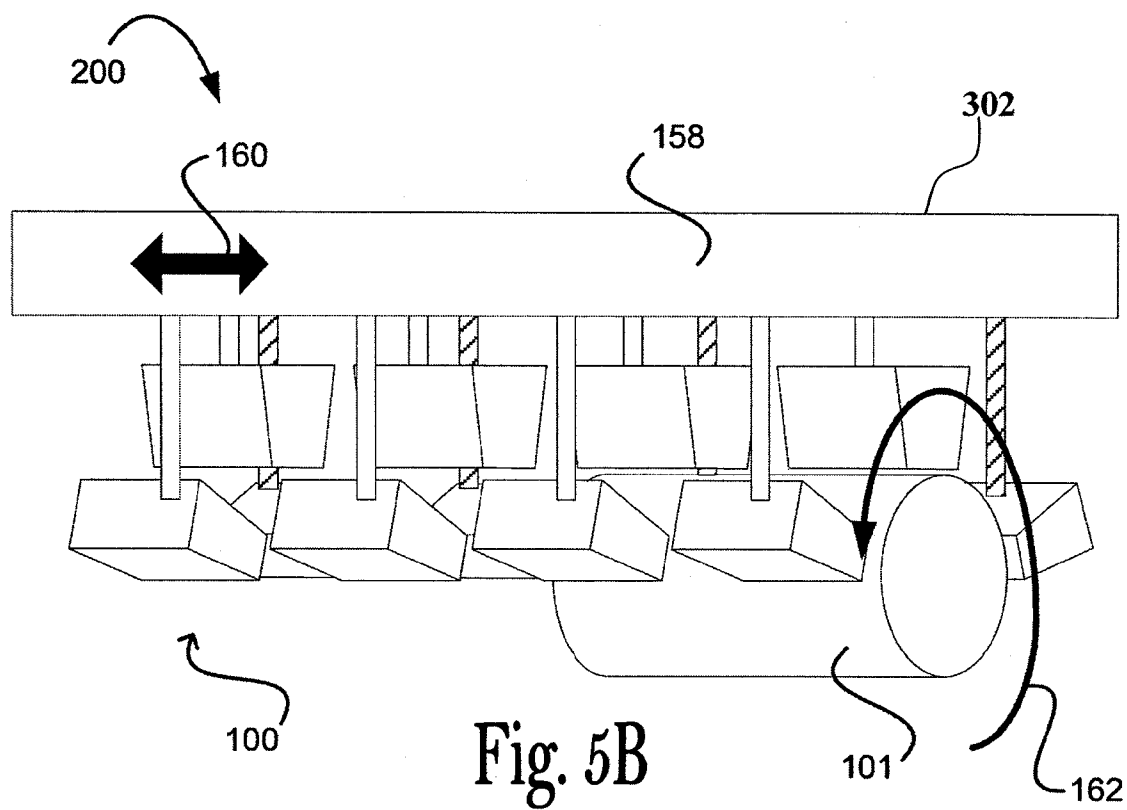


Fig. 5A



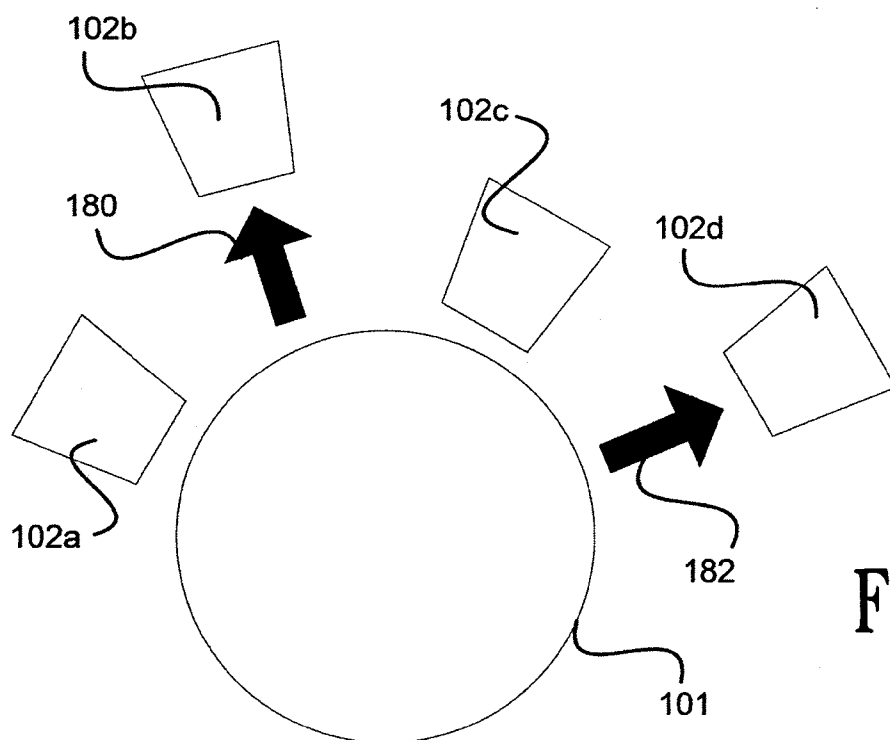


Fig. 6B

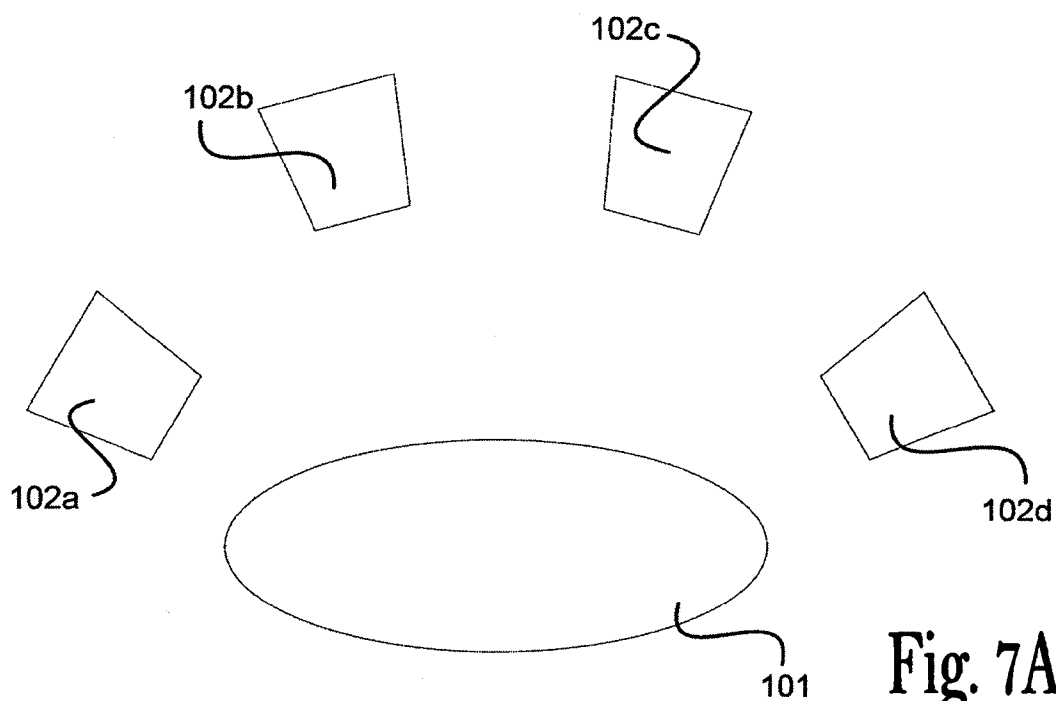


Fig. 7A

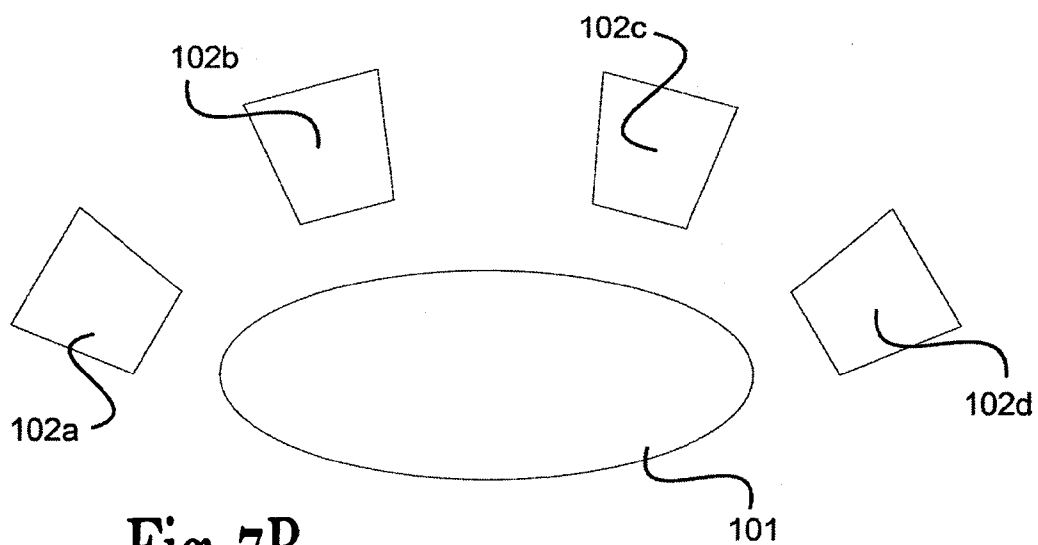


Fig. 7B

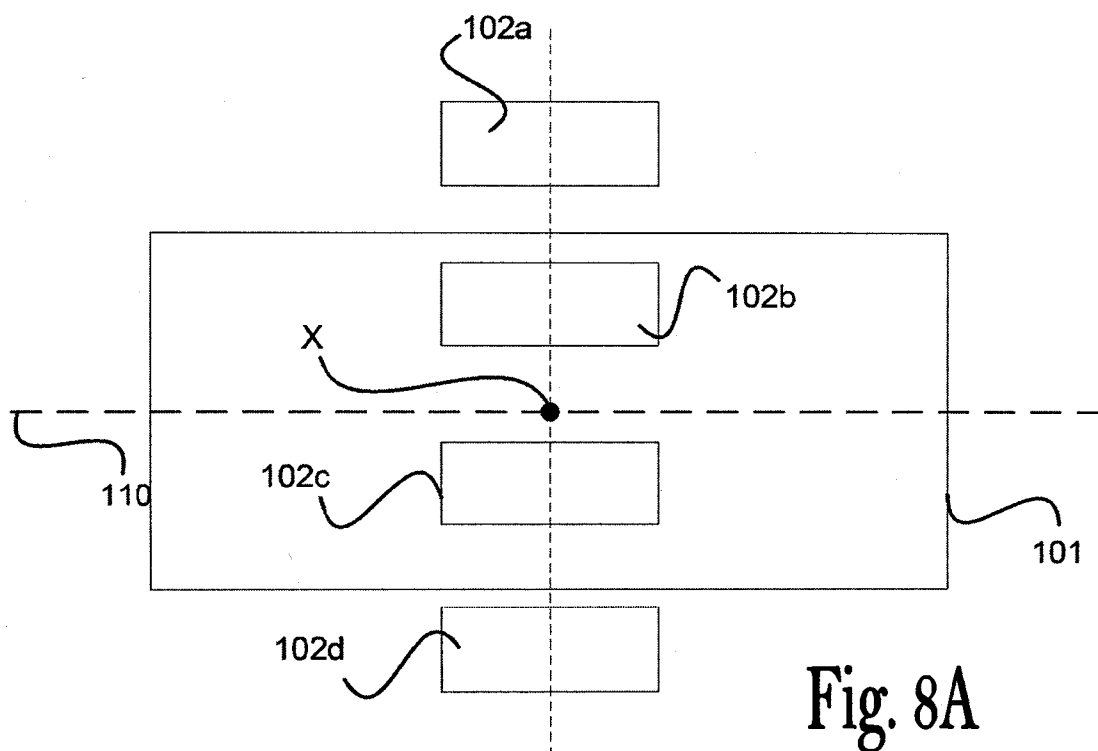


Fig. 8A



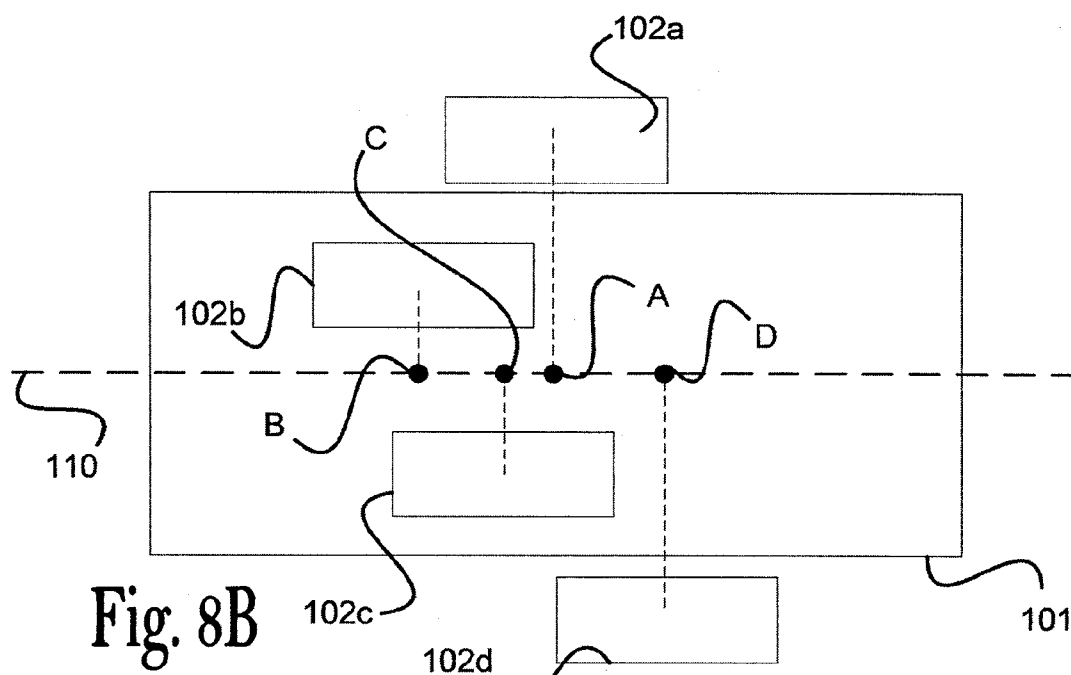


Fig. 8B

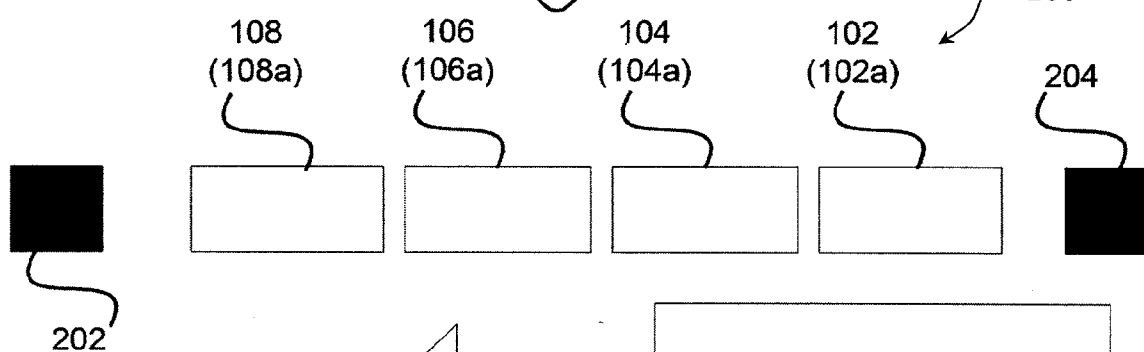


Fig. 9A

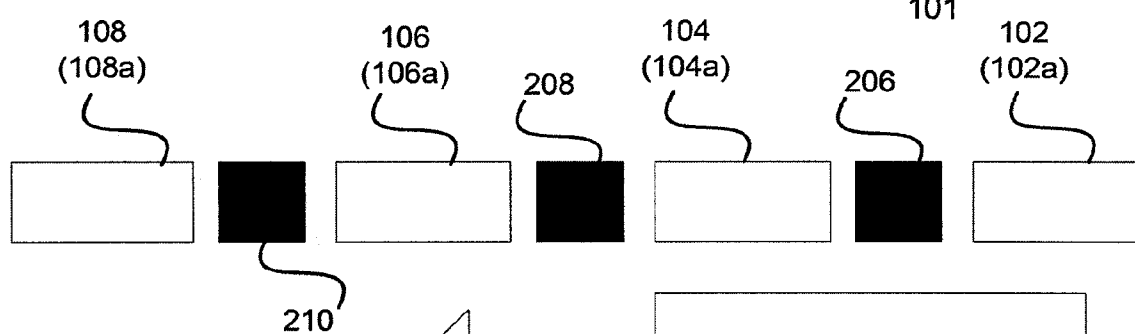
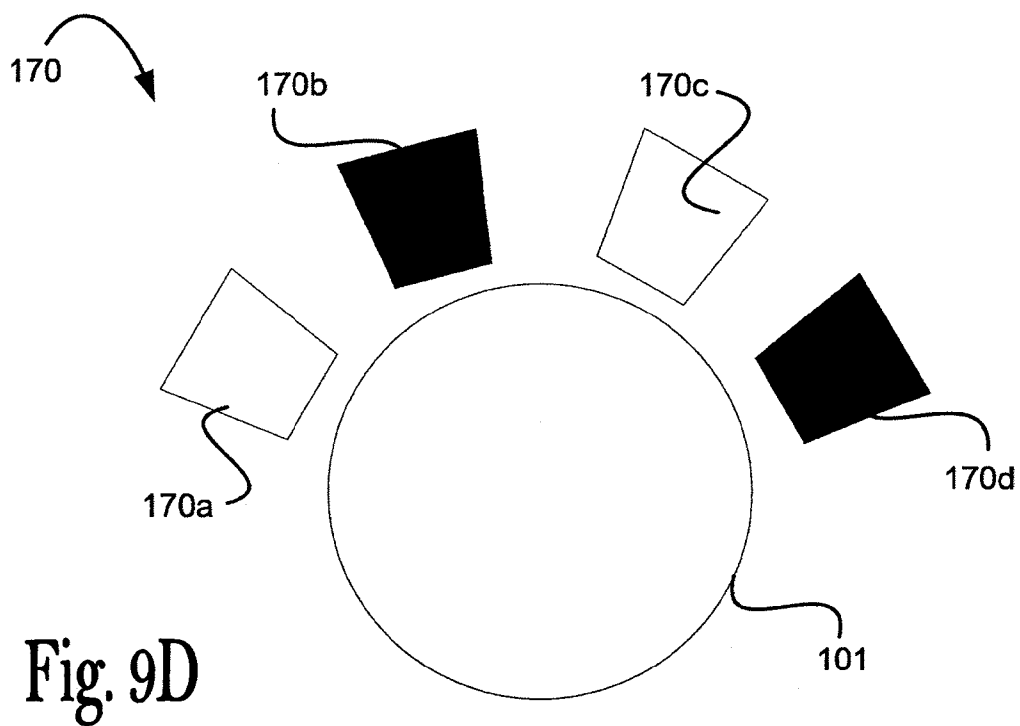
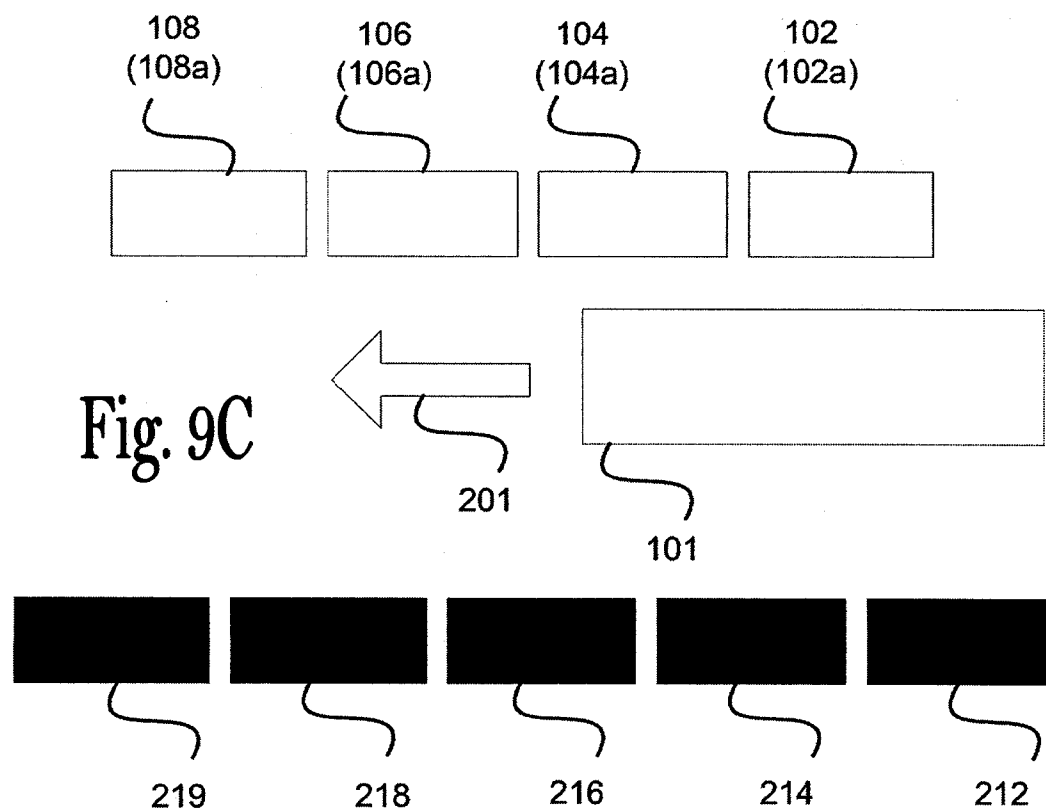


Fig. 9B



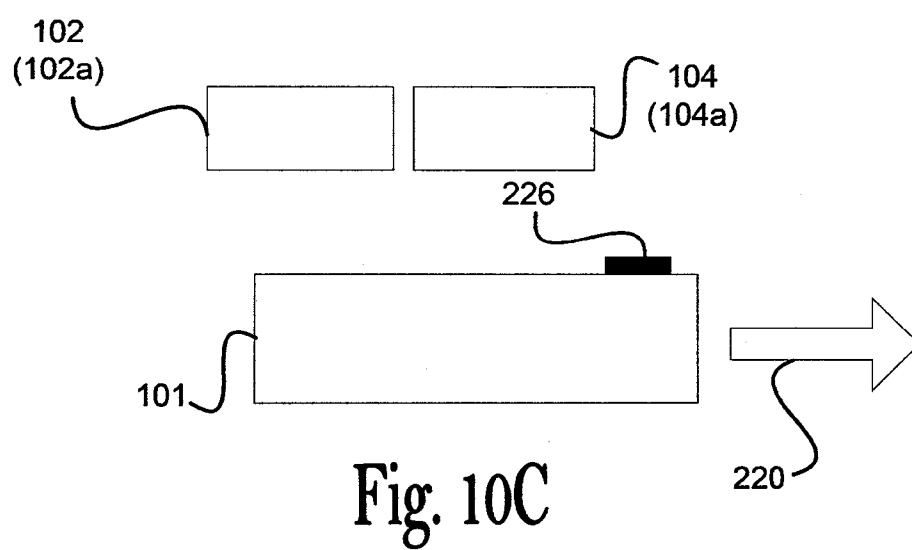
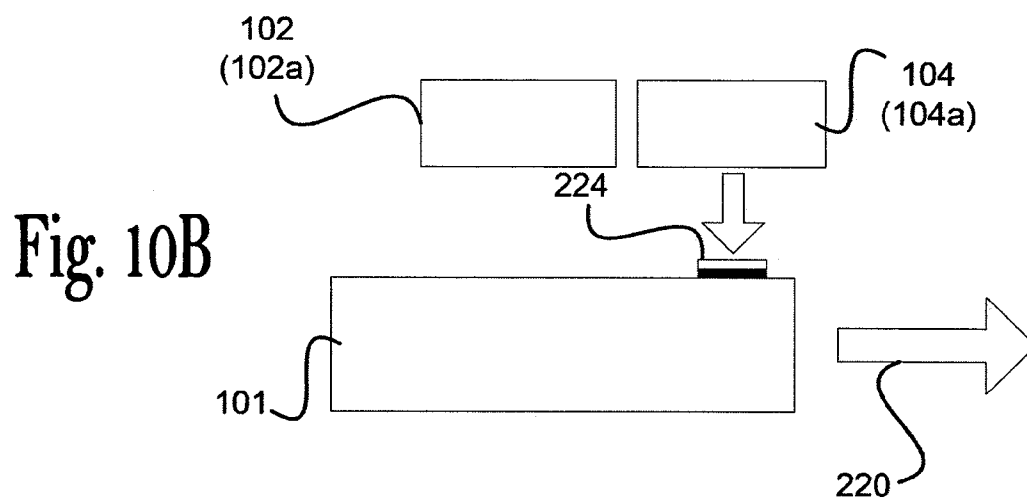
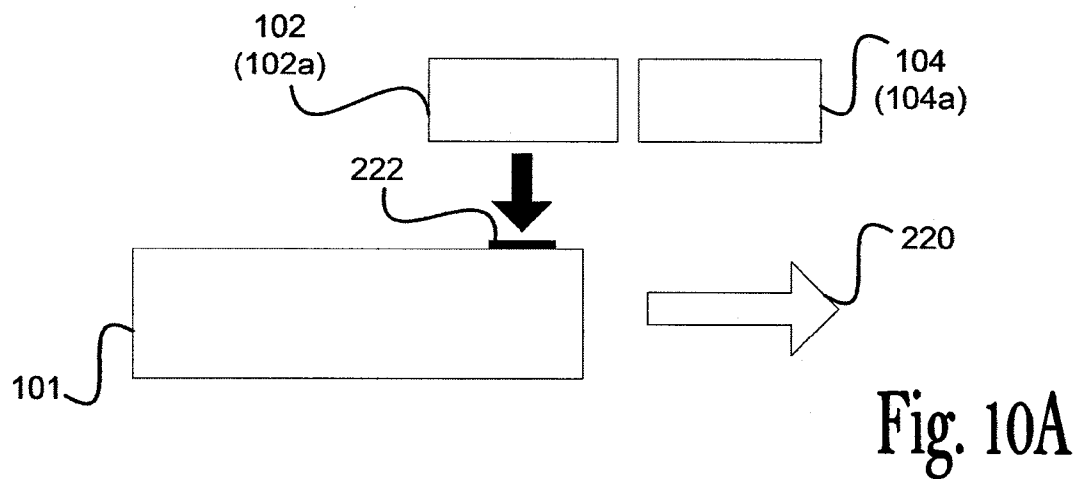


Fig. 11A

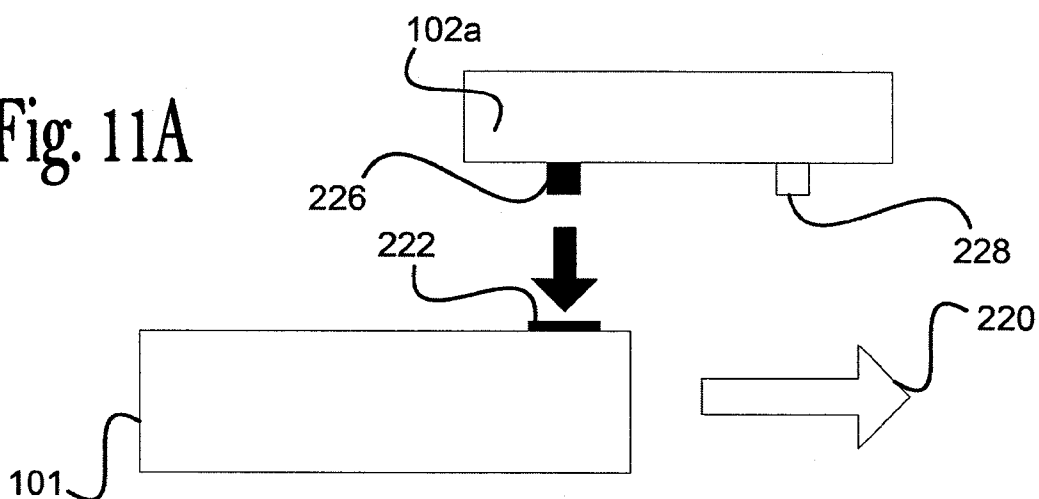


Fig. 11B

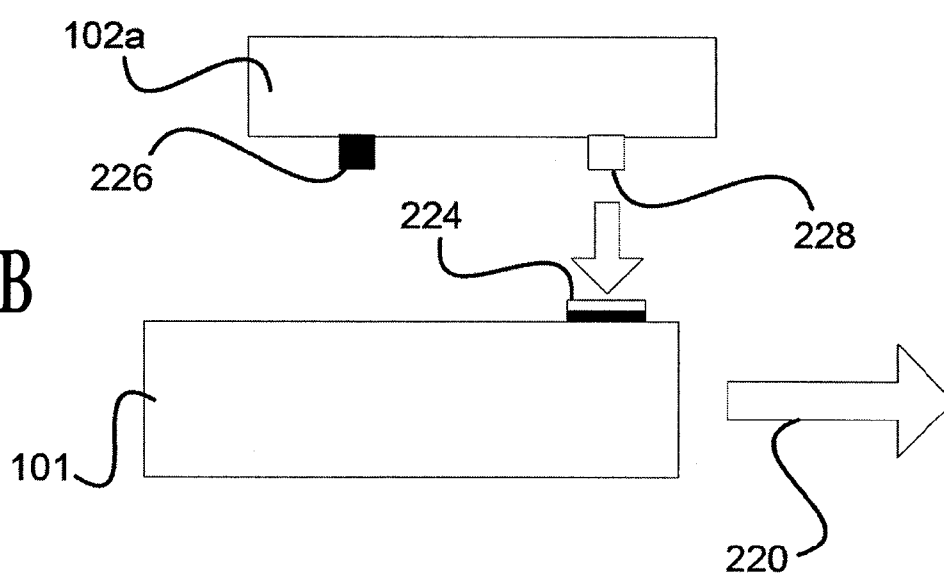


Fig. 11C

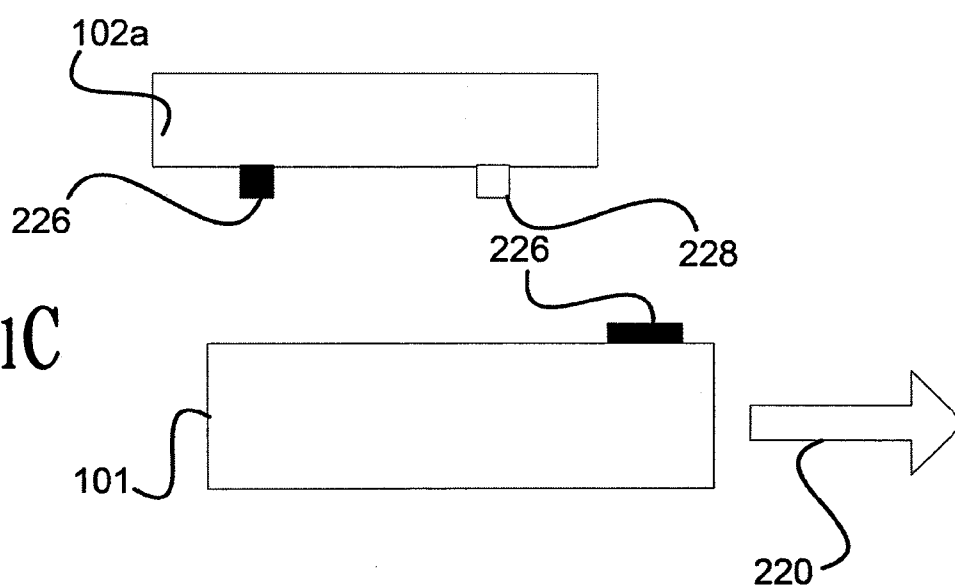


Fig. 12A

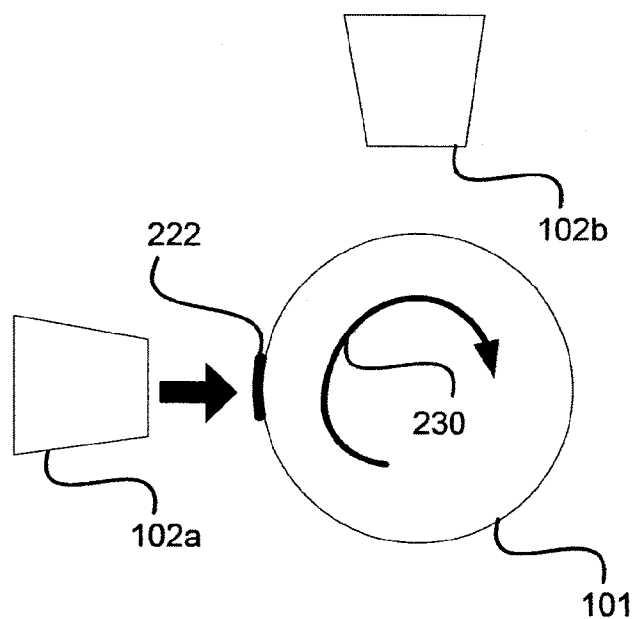


Fig. 12B





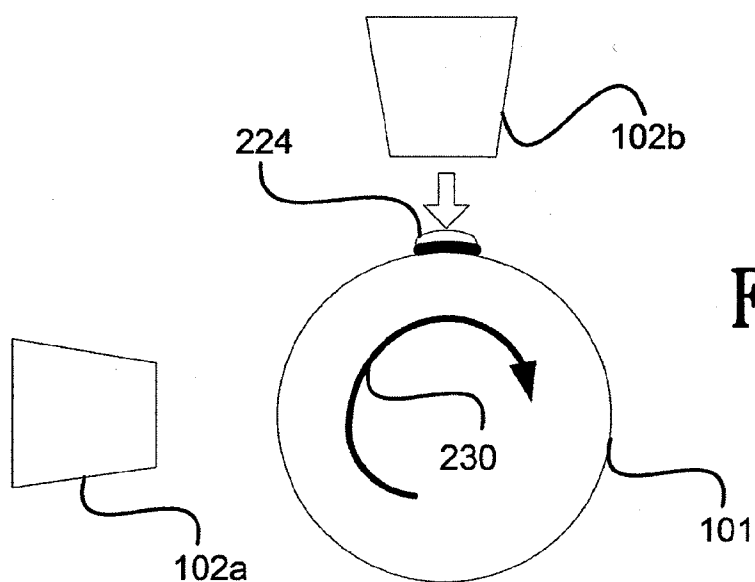


Fig. 12C

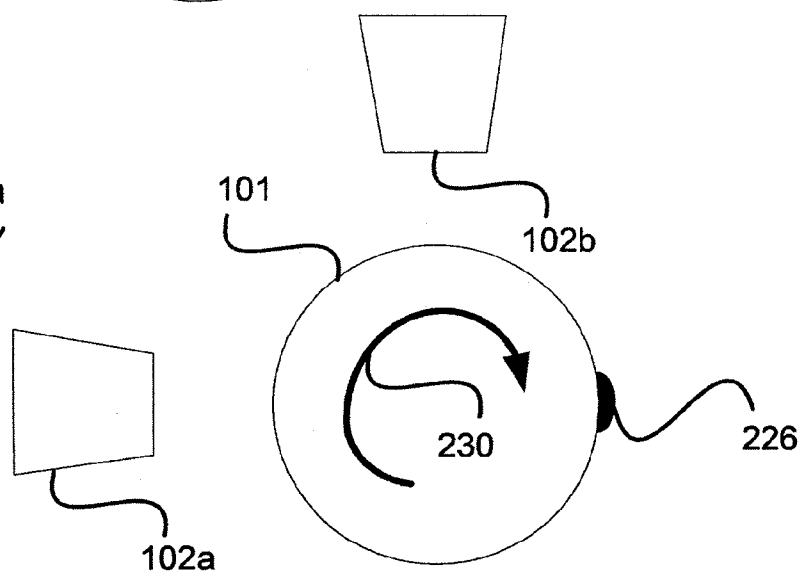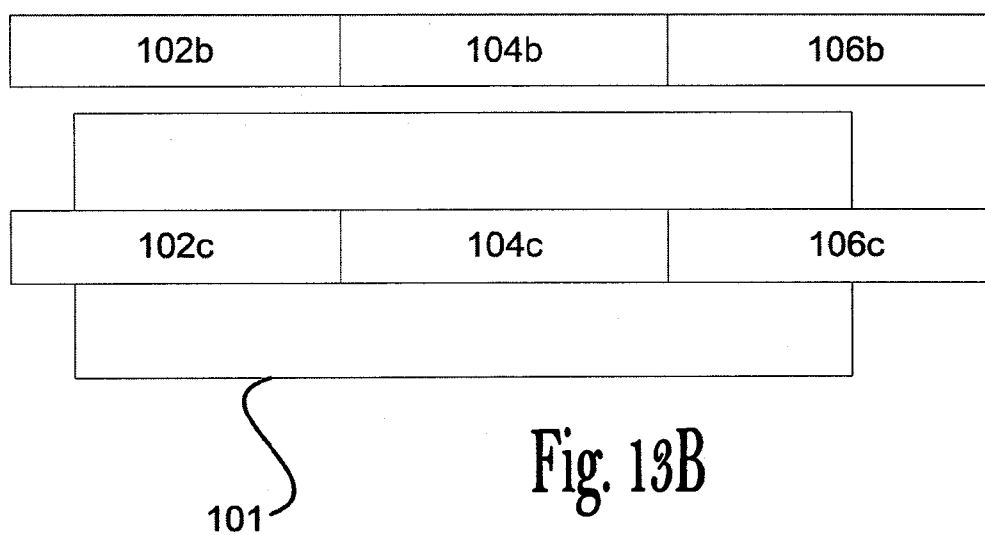

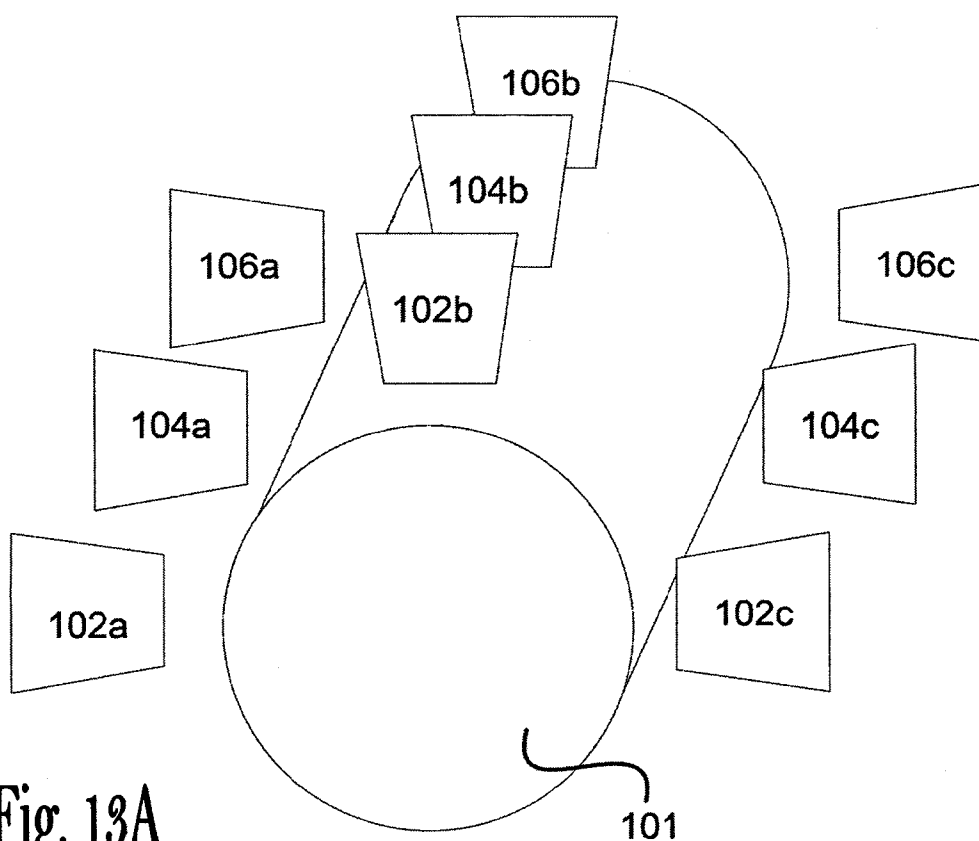

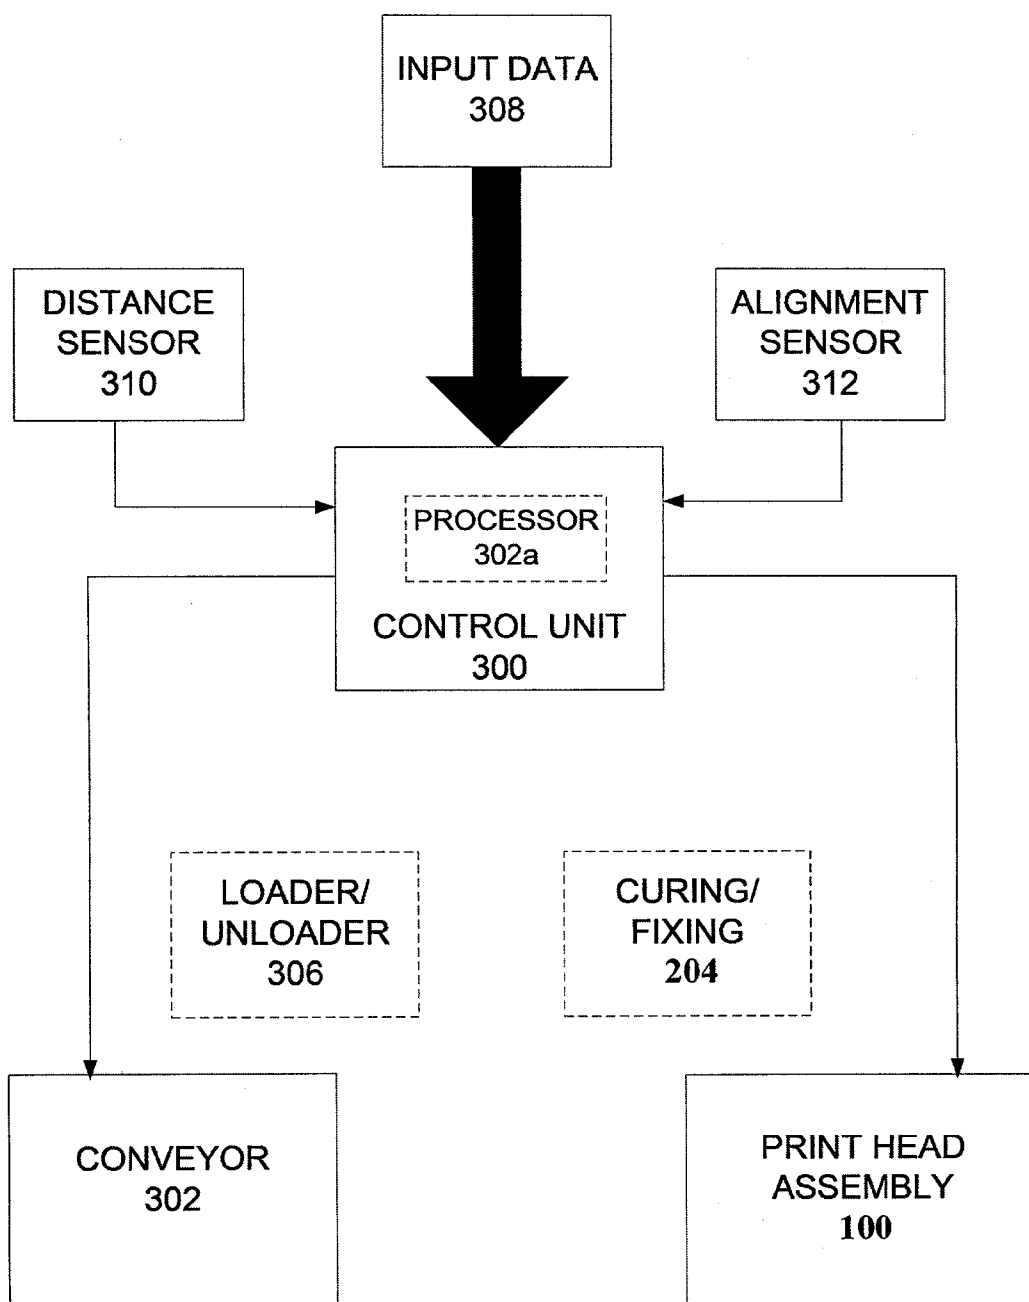

200

Fig. 14








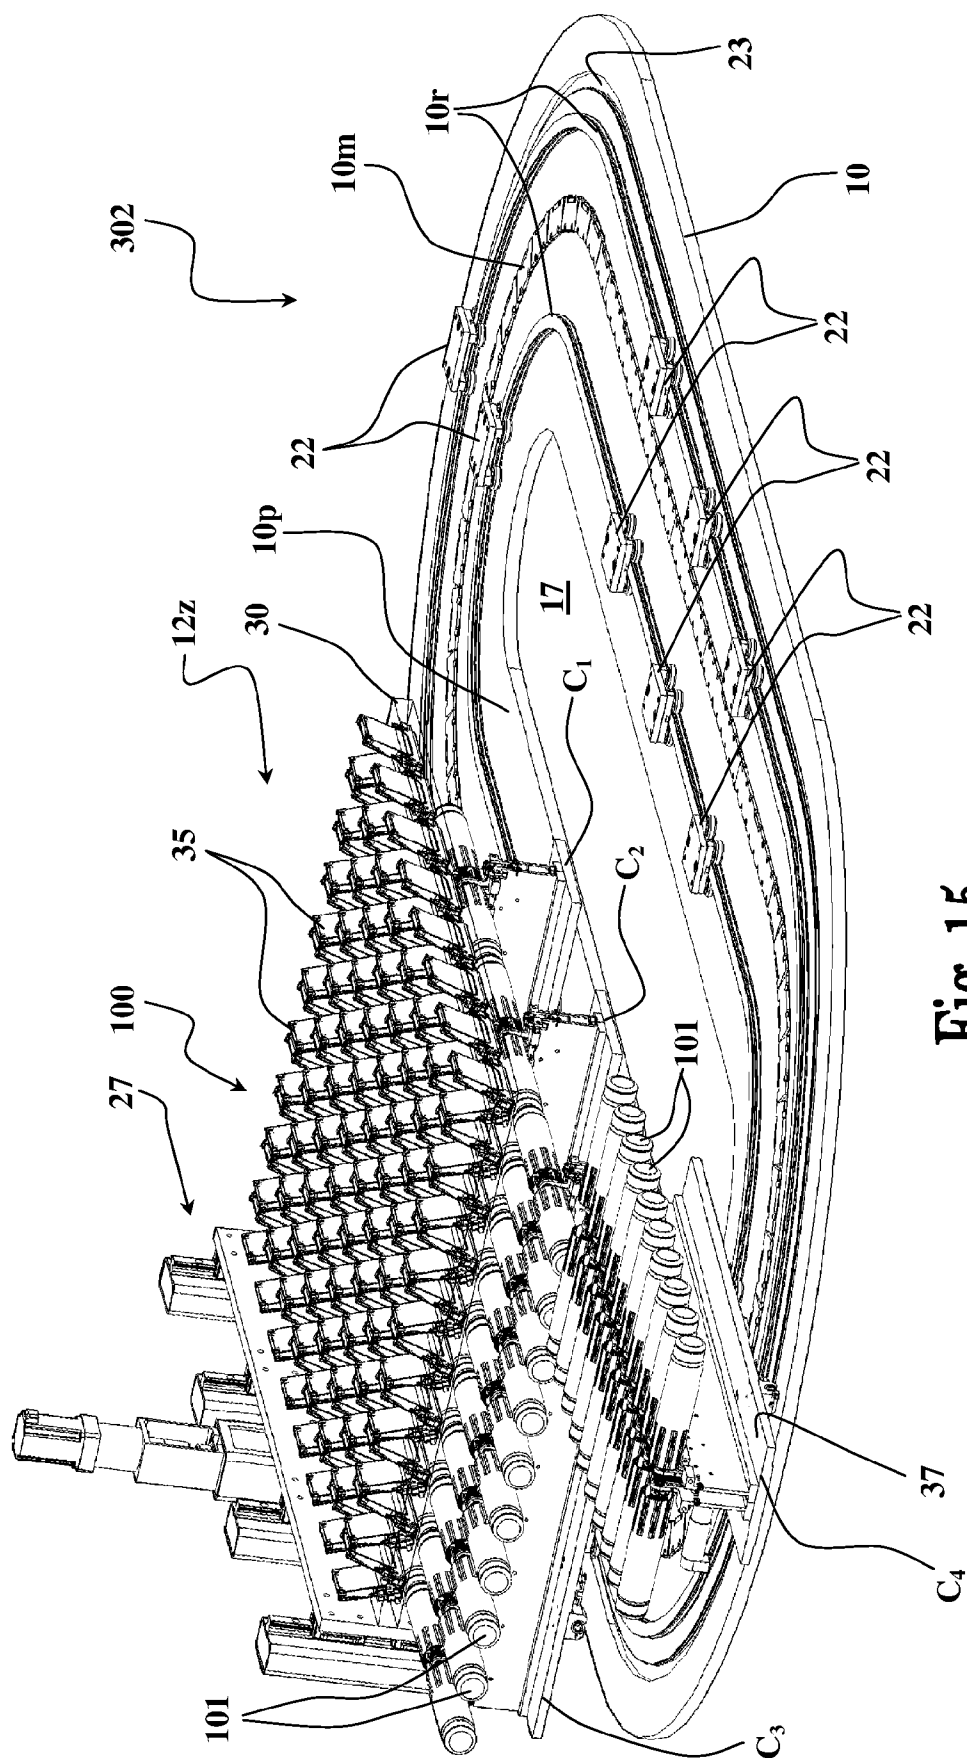




Fig. 15

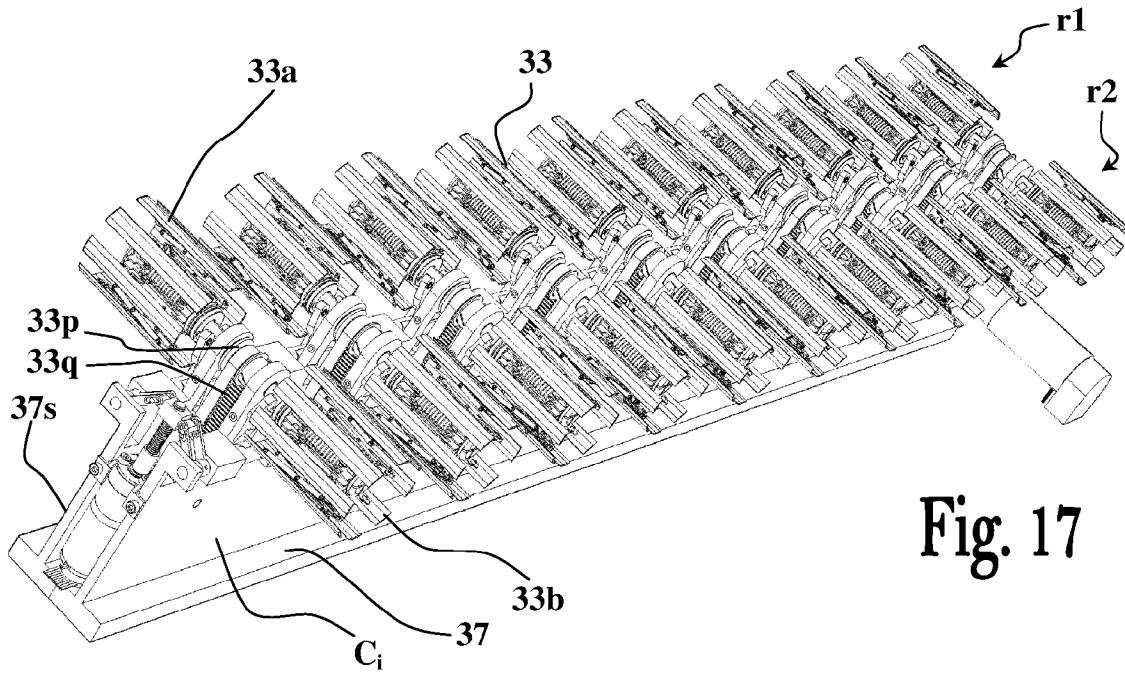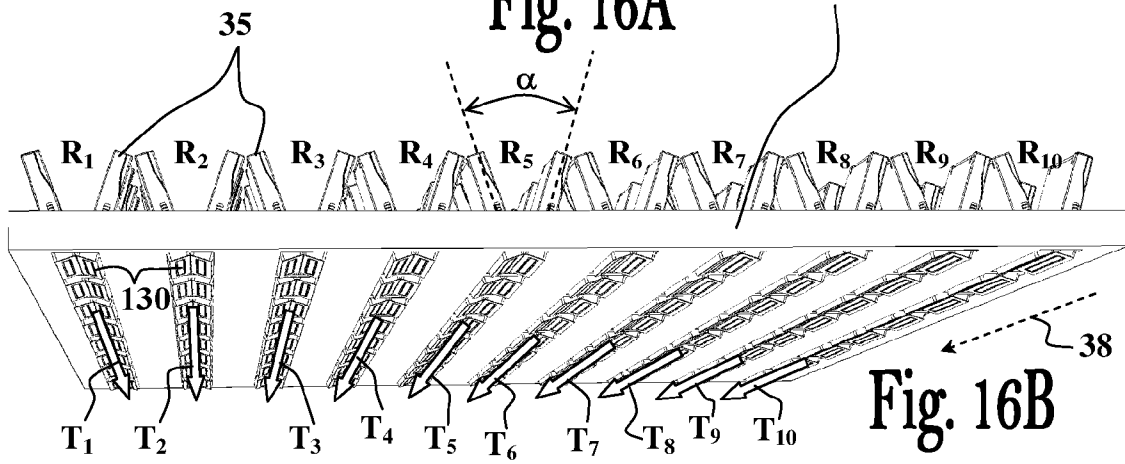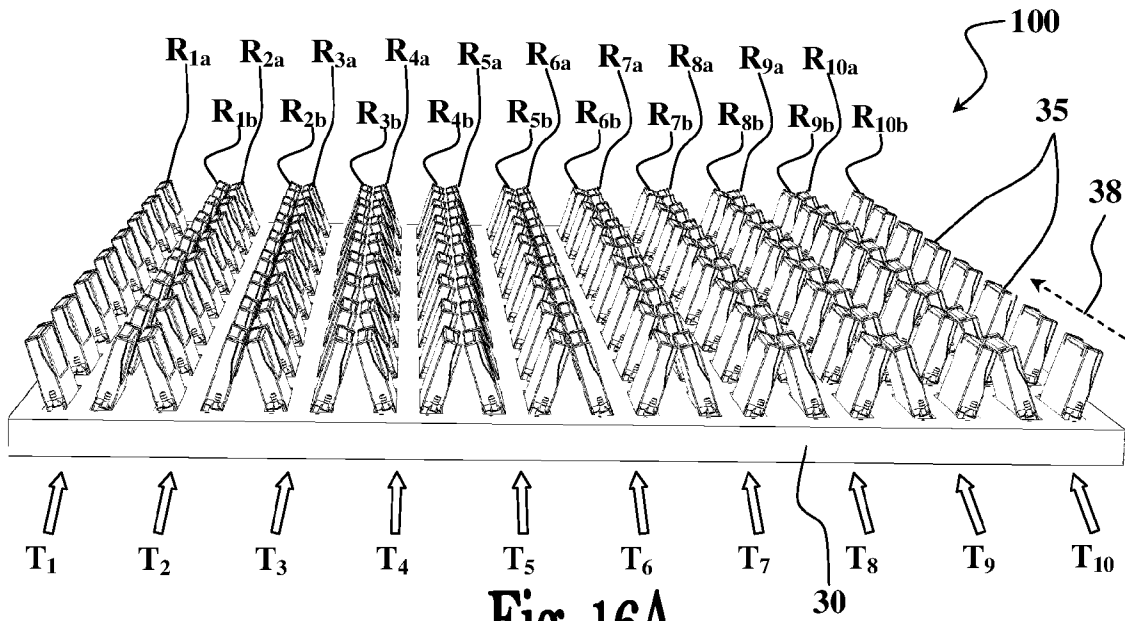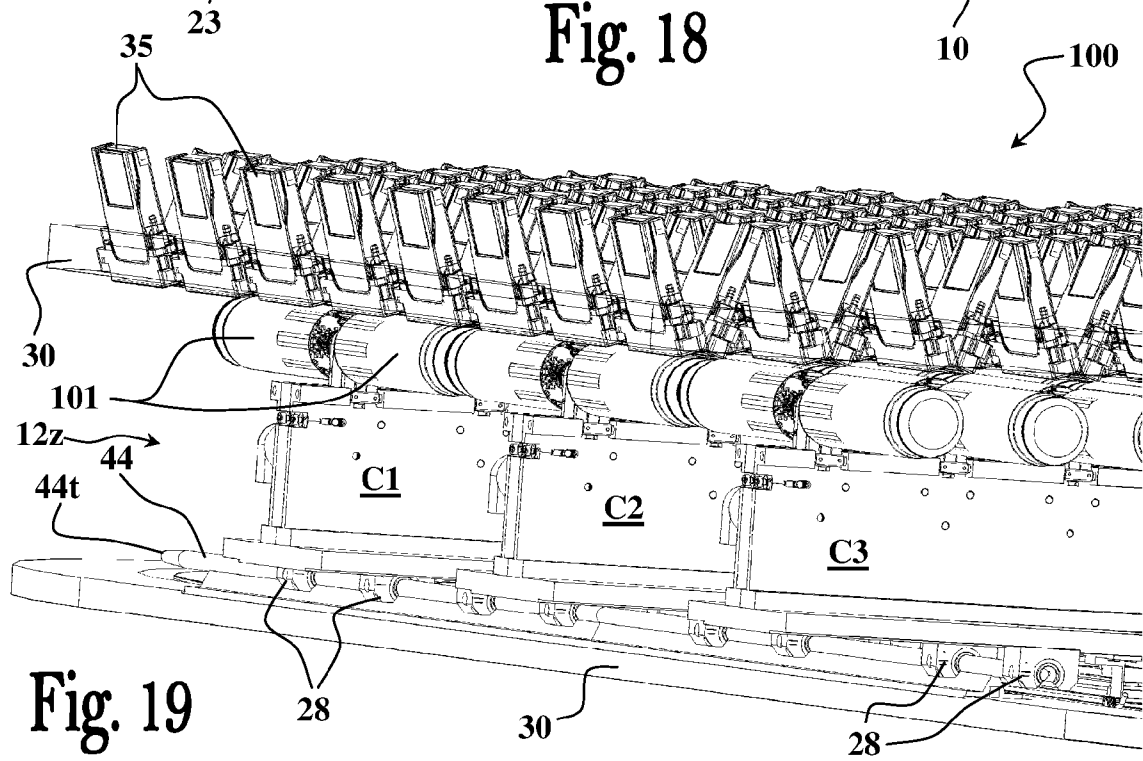

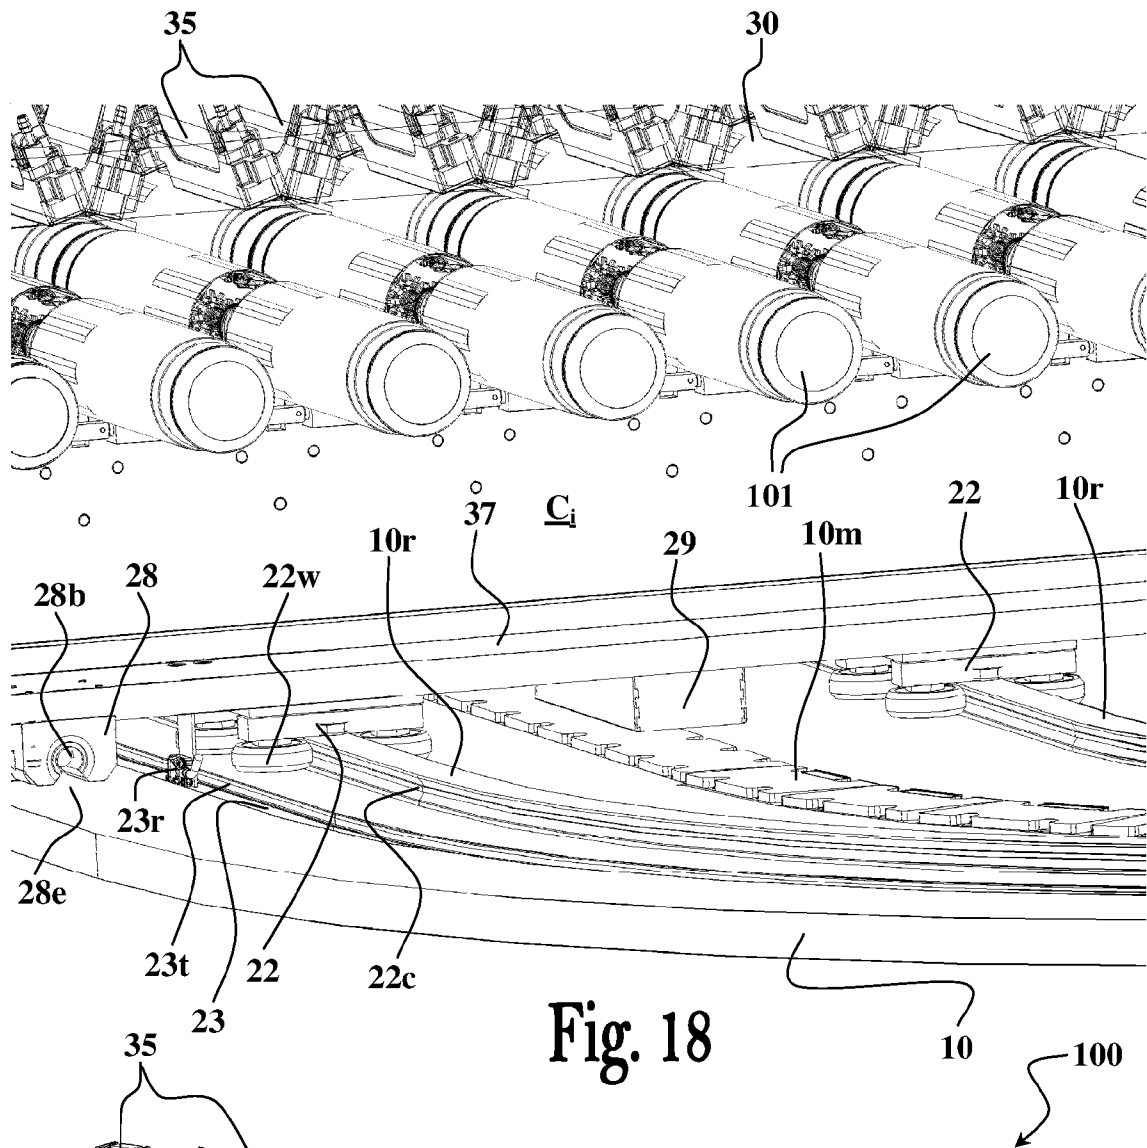

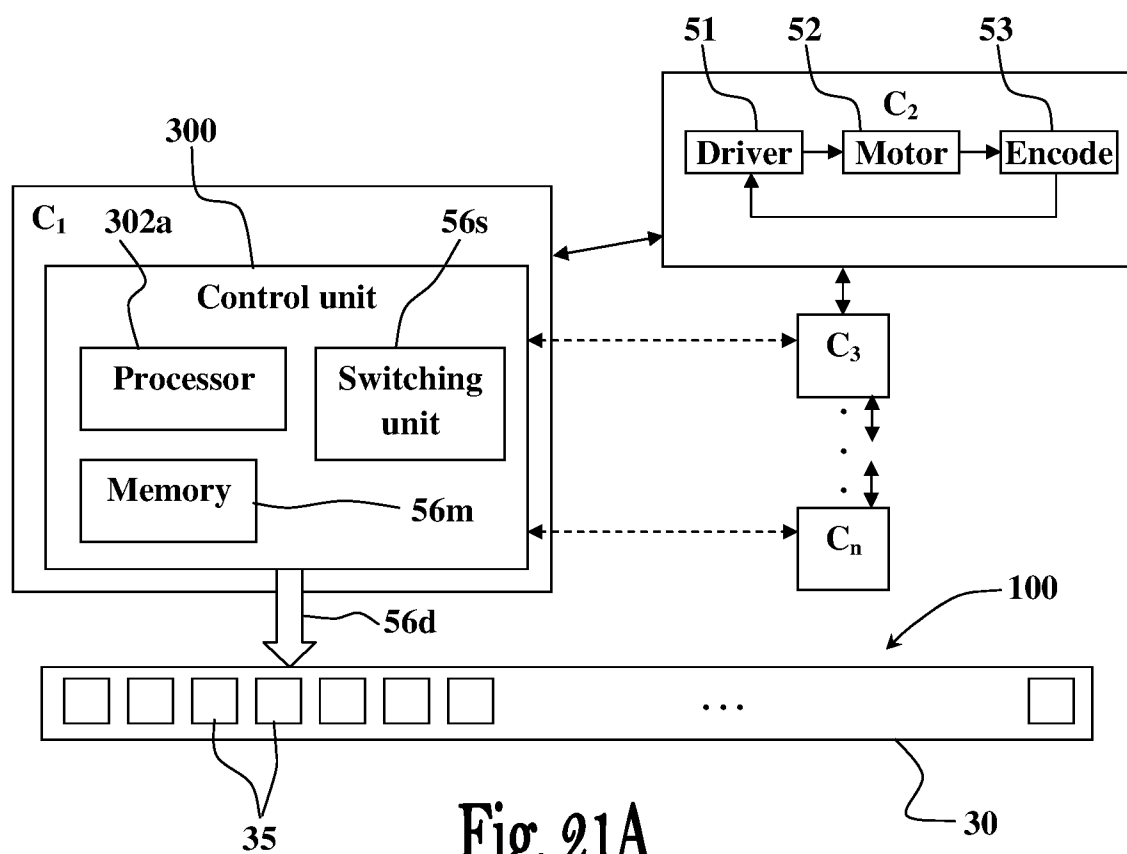

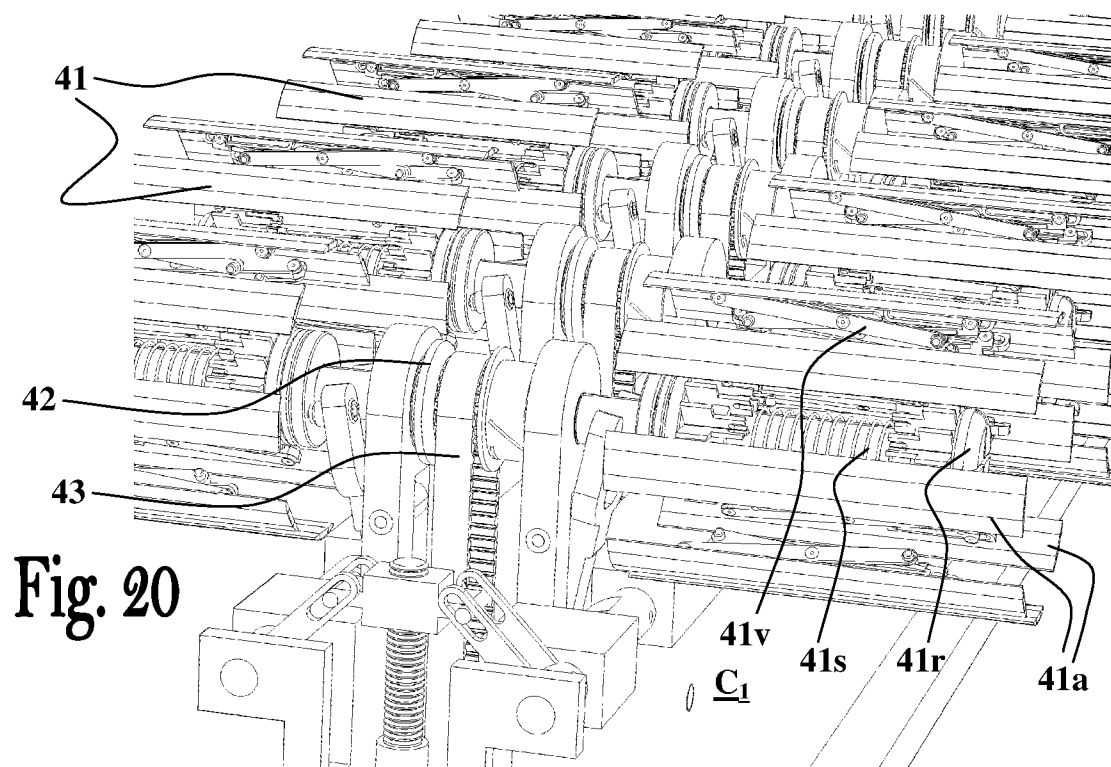

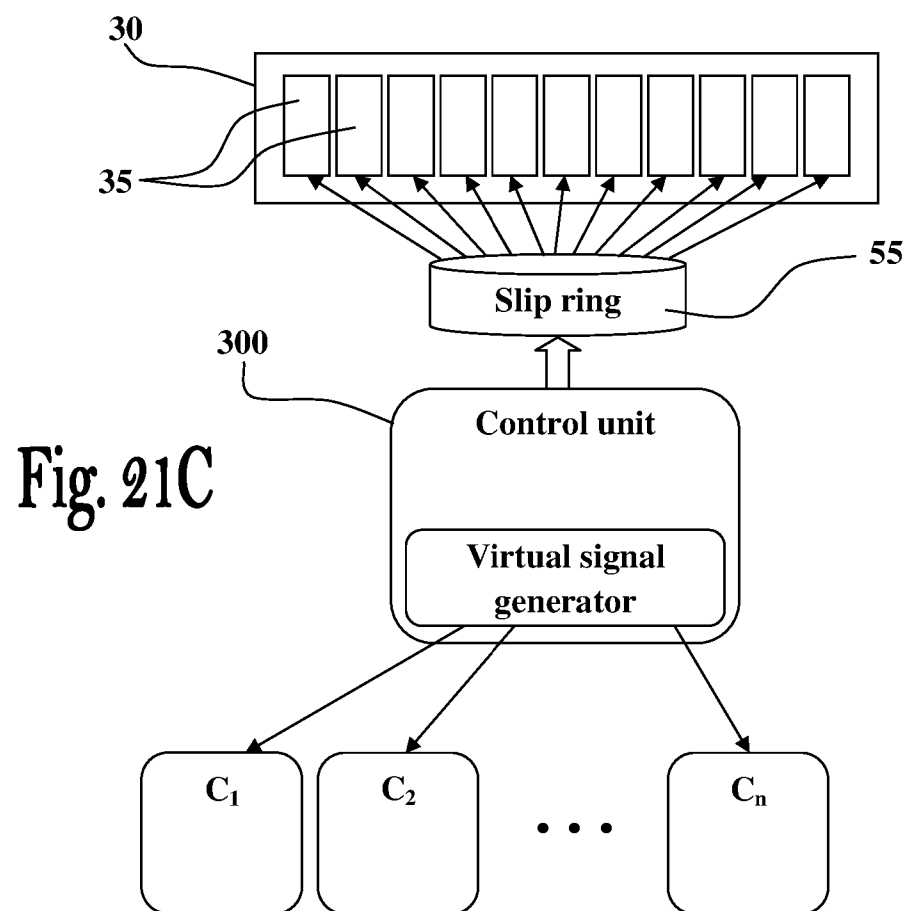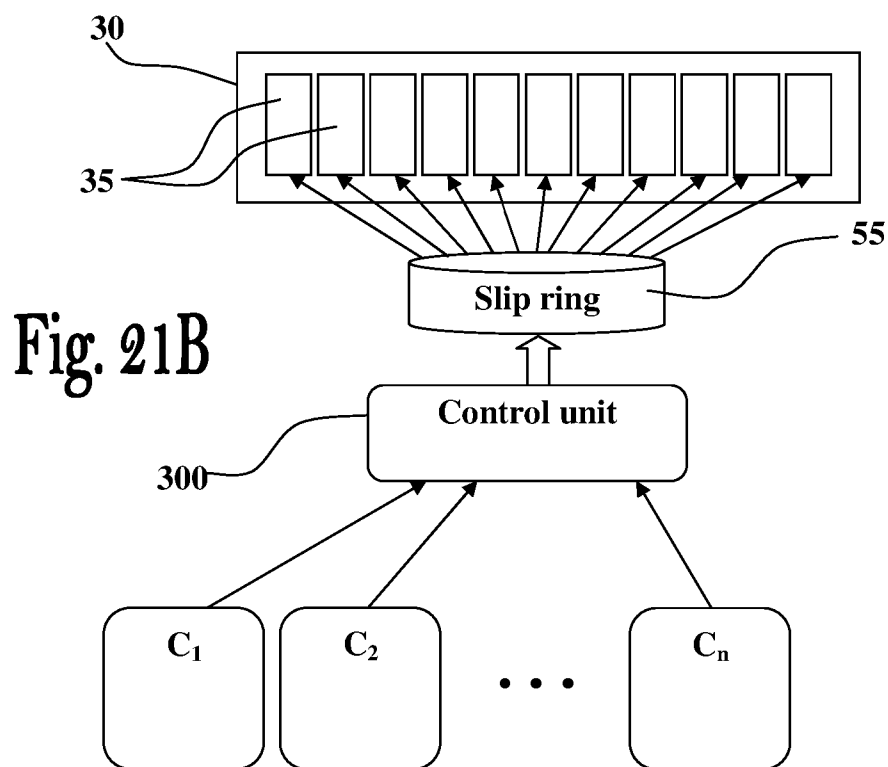

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 7467847 B [0003] [0008]
- US 6769357 B [0004] [0008]
- US 20100295885 A [0005]
- US 20100192517 A [0006]

## Szabadalmi igénypontok

1. Nyomtatási rendszer, nyomtatásra objektumok (101) külső felületeire, a rendszer tartalmaz szállító rendszert (302), amely úgy van kialakítva, hogy mozgassa az objektumokat (101) zárt burok pálya (10) mentén, és egy vagy több nyomtatófej összeállítást (100) nyomtatásra az objektumokra (101), a rendszerre az jellemző, hogy:
- a nyomtatófej összeállítás (100) tartalmazza nyomtatófej egységek (35) legalább két tömbjét (R), nyomtatófej egységek mindegyik tömbje (R<sub>i</sub>) úgy van kialakítva, hogy meghatározzon vonatkozó nyomtatási útvonalat (T<sub>i</sub>) nyomtatási tengely mentén, a nyomtatófej egységek (35) egymástól távolságban vannak elrendezve a legalább két nyomtatási útvonal (T<sub>i</sub>) mentén, a nyomtatófej egységek (35) mindegyikének van legalább egy nyomtatási eleme (130) nyomtatásra az objektumok (101) vonatkozó részeire, amelyek egymás után vonalba vannak hozva a legalább egy nyomtatási elemmel, míg mozog a nyomtatófej összeállításhoz (100) képest; és a szállító rendszer (302) objektumok (101) legalább két áramának mozgatására van kialakítva általános szállítási irány mentén, hogy a legalább két áram mindegyike objektumait átvigye egymás után vonatkozó nyomtatási útvonalon (T<sub>i</sub>) át és nyomtasson on az objektumokra a vonatkozó nyomtatási útvonal nyomtatási elemeivel.
2. Az 1. igénypont szerinti rendszer, amely tartalmaz tartó platformot, objektumok legalább két áramának tartására, a tartó platform szerelhető a szállító rendszerre az objektumok mozgatására az általános szállítási irány mentén a legalább két nyomtatási útvonalon át és úgy van kialakítva, hogy az objektumok rotációját váltsa ki translációs tengelyeik mentén, míg mozognak nyomtatási útvonalak mentén.
3. Az 1. vagy 2. igénypont szerinti rendszer, ahol legalább két nyomtatófej egység legalább két tömb mindegyikében távolságban van egymástól tengely mentén, amely a nyomtatási tengelyre keresztirányú.
4. Az előző igénypontok bármelyike szerinti rendszer, ahol a legalább két tömb nyomtatófej egység közös síkban van elrendezve, a szállító rendszer és a tartó platform úgy van kialakítva, hogy egyidejűleg mozgassa objektumok legalább két áramát a legalább két nyomtatási útvonal mentén, amely a nyomtatófej egységek vonatkozó legalább két tömbje által le van fedve.
5. Az 2-4. igénypontok bármelyike szerinti rendszer, amely tartalmaz vezérlő egységet, amely úgy van kialakítva és működtethető, hogy megvalósítsa a következő tevékenységek legalább egyikét: szállító rendszer működtetése, hogy translációs mozgást valósítson meg az általános mozgási irány mentén a pálya mentén; a nyomtatófej egységek legalább néhányának működtetése, hogy egyidejűleg nyomtasson objektumok legalább két áramának objektumaira; és működtesse a tartó platformot, hogy megvalósítsa az objektumok rotációs mozgását.
6. Az 5. igénypont szerinti rendszer, ahol a vezérlő egység úgy van kialakítva, hogy működtesse a szállító rendszert, hogy megvalósítsa a tartó platformok translációs mozgását az általános szállítási irány mentén lépésenként, hogy működtesse a tartó platformot, hogy rotációs mozgást valósítson meg legalább időintervallumban, amelyben translációs mozgás nem fordul elő, és működtesse nyomtatófej egységek közül legalább néhányat, hogy megvalósítsa a nyomtatást az időintervallumban, amelyben translációs mozgás nem fordul elő és rotációs mozgás előfordul.



7. Az 5. vagy 6. igénypont szerinti rendszer, ahol vezérlő egység úgy van kialakítva és működtethető a szállító rendszer és a tartó platform működtetésére, hogy a translációs és rotációs mozgások egyidejűleg legyenek megvalósítva, míg a nyomtatófej egységek közül legalább néhányat működtet, hogy nyomtatási valósítsa meg, úgy hogy kép adatok lényegében folyamatos nyomtatása van megvalósítva az objektumok felületein objektumok áramában spirális pálya mentén.
8. Az 5-7. igénypontok bármelyike szerinti rendszer, ahol a vezérlő egység úgy van kialakítva és működtethető, hogy működtesse a szállító rendszert és a nyomtatófej egységek közül legalább néhányat, hogy kép adatok egyidejű nyomtatását valósítsa az objektumok felületein legalább két nyomtatófej egységgel, amelyek nyomtatófej egységek különböző tömbjeihez tartoznak.
9. Az 5-8. igénypontok bármelyike szerinti rendszer, ahol a vezérlő egység úgy van kialakítva és működtethető, hogy a következők közül legalább egyet megvalósítson: legalább egy nyomtatófej egység és az objektum felület közötti távolság megváltoztatása, amely vonalba van hozva a legalább egy nyomtatófej egységgel, miáltal hozzáigazítja pozícióját; kép adatok egyidejű nyomtatásának megvalósítása az objektumok legalább egyikének felületi területén legalább két nyomtatófej egységgel; egyidejű nyomtatás megvalósítása legalább két különböző objektum felületi területein egyetlen nyomtatófej egységgel; legalább egy nyomtatófej összeállítás magasságának hozzáigazítása az objektumok geometriai méretei szerint; és minimalizálja a réseket szomszédosan elhelyezkedő tartó platformok között, amelyeket a szállító rendszer szállított.
10. Az előző igénypontok bármelyike szerinti rendszer, ahol a nyomtatófej egységek mozgásra van szerelve radiális tengelyek mentén vagy egy vagy több tengely mentén, amely lényegében merőleges a nyomtatási tengelyre.
11. Az 5-10. igénypontok bármelyike szerinti rendszer, ahol a vezérlő egység úgy van kialakítva és működtethető, hogy megvalósítsa a következők közül legalább egyet: generáljon jeleket a nyomtatási elemek működésének szinkronizálására az objektumok szög és lineáris pozíciójának legalább egyike szerint, amelyet a tartó platform valósít meg a nyomtatási útvonal mentén; hogy vegyen jeleket, amelyek megadják az objektumok szög és lineáris pozícióit és generáljon szinkronizáló jeleket a nyomtatási elemek működtetésére annak megfelelően.
12. Az előző igénypontok bármelyike szerinti rendszer, amely a következők legalább egyikét tartalmazza: legalább egy kikeményítő egységet, amely arra van kialakítva, hogy kikeményítsen anyagkompozíciót, amelyet a nyomtatófej összeállítás vet ki, az objektumok felületein; legalább egy felületei egységet az objektumok felületeire, nyomtatás után a külső felületein; legalább egy töltő egységet objektumok legalább két áramának töltésére a szállító rendszerbe; legalább egy letöltő egység objektumok legalább két áramának eltávolítására a szállító rendszerről; és legalább egy alapozó egységet, amely úgy van kialakítva, hogy alapozza az objektumok felületeinek legalább egy helyét.
13. Az előző igénypontok bármelyike szerinti rendszer, ahol a nyomtatófej egységek legalább egyikének egymást követő nyomtatási elemei úgy vannak kialakítva, hogy kivessen vonatkozó kompozíciókat objektum felületeinek tartományain, úgy hogy a vonatkozó kompozíciók az objektum felületein a kívánt kompozíciót képezik.
14. Az előző igénypontok bármelyike szerinti rendszer, ahol az objektumok a tartó platformon vannak elhelyezve két párhuzamos sorban, és ahol szomszédosan elhelyezkedő objektumok mindegyik párja

különböző sorokhoz tartoznak, amelyek mechanikailag csatlakozva vannak közös működtető mechanizmushoz a tartó összeállításon.

15. Eljárás nyomtatásra objektumok (101) külső felületeire, az eljárás tartalmazza az objektumok szállítását zárt hurok pálya (10) mentén, amely tartalmaz legalább egy nyomtatófej összeállítást (100) az objektumokra nyomtatáshoz, azzal jellemezve, hogy

az objektumok szállítása tartalmazza az objektumok (101) legalább két áramának vételét legalább két nyomtatási útvonalon (T.) át a zárt hurok pályán, mindegyik nyomtatási útvonal tartalmazza nyomtatófej egységek legalább egy tömbjét (R<sub>n</sub>), amely távolságban van nyomtatási tengely mentén; és

a nyomtatás az objektumokra tartalmazza

10 adatok vételét, amelyek jelzik objektumok áramának helyeit, amelyek áthaladnak a vonatkozó nyomtatási útvonalokon (T.) és mindegyik objektum szöghelyzetét az áramban;

a vett adatokon alapulva, az objektumok felületi területeinek meghatározását mindegyik tömb (R<sub>n</sub>) nyomtatófej egységeivel (35) szemben vannak, és egy vagy több nyomtatási minta meghatározását, amelyek a felületi területekre alkalmazandók vonatkozó nyomtatófej egységek által; és

15 a nyomtatófej egységek tömbjeinek (R<sub>n</sub>) működtetését, hogy felvigyük az egy vagy több mintát a felületi területekre a vonatkozó nyomtatási fej egységek (35) által.

16. Az 15. igénypont szerinti eljárás, amely tartalmazza a következő lépések legalább egyikét: a legalább egy nyomtatófej összeállítás magasságának beállítását az objektumok geometriai méretei szerint; az objektumok forgatását, amelyek a nyomtatási útvonalon át haladnak az egy vagy több minta felvitele alatt; objektumok áramának előretolását a legalább két nyomtatási útvonal mentén az egy vagy több minta felvitele alatt; alapozó eljárás alkalmazását az objektumok áramának felületi területeire; kép adatok egyidejű nyomtatását az objektumok legalább egyikének felületi területére két vagy több nyomtatófej egység által; egyidejű nyomtatást két különböző objektum felületi területein egyetlen nyomtatófej egység által; szomszédosan elhelyezkedő objektumok közötti rések minimalizálását; objektumok felügyeletét nyomtatás után külső felületeiken; és kikeményítő eljárás alkalmazását objektumok áramának felületi területeire, mielőtt a nyomtatási útvonalon áthaladnak.

30

35