



(43) International Publication Date
13 February 2014 (13.02.2014)

- (51) **International Patent Classification:**
F01L 7/02 (2006.01) *F01L 7/08* (2006.01)
F01L 7/04 (2006.01)
- (21) **International Application Number:**
PCT/GB2013/000336
- (22) **International Filing Date:**
6 August 2013 (06.08.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
GB1214328.5 10 August 2012 (10.08.2012) GB
- (71) **Applicant:** RCV ENGINES LIMITED [GB/GB]; 6 Haviland Road, Ferndown Industrial Estate, Wimborne BH21 7RF (GB).
- (72) **Inventors:** LAWES, Keith; c/o RCV Engines Limited, 6 Haviland Road, Ferndown Industrial Estate, Wimborne BH21 7RF (GB). MASON, Brian; c/o RCV Engines Limited, 6 Haviland Road, Ferndown Industrial Estate, Wimborne BH21 7RF (GB).
- (74) **Agent:** JENSEN & SON; 366-368 Old Street, London EC1V 9LT (GB).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** A ROTARY VALVE INTERNAL COMBUSTION ENGINE

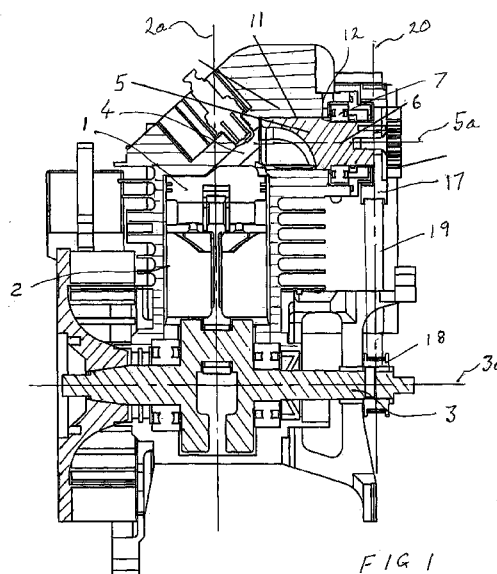

(57) **Abstract:** A rotary valve internal combustion engine has a piston (1) connected to a crankshaft (3) and reciprocable in a cylinder (2), a combustion chamber 4 being defined in part by the piston. The engine has a rotary valve (5) rotatable with a close sliding fit in a valve housing (8) fixed relative to the cylinder (2), the rotary valve having a valve body containing a volume (9) defining, in part, the combustion chamber 4 and further having in a wall part (11) thereof a port (12) giving, during rotation of the valve, fluid communication successively to and from the combustion chamber via inlet and exhaust ports (13), (14) in the valve housing. The rotary valve and the valve housing are both formed of aluminium.



WO 2014/023929 A1

A Rotary valve internal combustion engine

The present invention relates to internal combustion engines in which the control of the intake and exhaust of combustion gases is achieved by means of a rotary valve.

Such rotary valves are known, for example in the applicant's co-pending application No. GB 2467947A. Rotary valve engines are known to have problems of sealing as there is a conflict between minimising the clearances between the relatively rotating bodies, which improves efficiency, but runs the increasing risk of overheating and seizing. Being adjacent to the combustion chamber and in fact forming part of the combustion chamber, the valve is subjected to large thermal stresses, high gas pressures and high surface speeds with little or no lubrication. There are thus inherent problems in providing an adequate seal between the port formed in the valve body and the associated valve housing. Conventional rotary valves, which do not contain the volume defining in part the combustion chamber typically use flexible or resilient seals between the rotating valve body and the valve housing, but such seals inevitably have a very short life in the hostile environment and also require the substantial use of lubrication which results in excessive and unacceptable emissions. An example of such a rotary valve is disclosed in US Patent 6,321,699. Attempts have been made for many years to make a commercially acceptable engine utilising rotary valves without seals, notably by Aspin, but these have mostly been unsuccessful principally because of the differential thermal expansion between the valve body and the valve housing. In the prior art, such as DE 4217608 A1 and DE 4040936 A1, this conflict is recognised and attempts to solve the problem are made by providing complex cooling arrangements or simply saying the problem is solved by using suitable materials. In practice, larger than desired clearances are provided to reduce the risk of seizing, at the cost of reducing the efficiency of the engine and increased emissions.

There is an inherent problem in reducing the gap because of the differential thermal expansion between the rotary valve body and the valve housing caused, in part, by the higher temperatures that the rotary valve body reaches compared to the valve housing. This is caused in part by the fact that the valve body is located in the combustion chamber at the point of maximum temperature generation, and also has poorer thermal pathways through which to conduct the heat away to the outside world. In contrast the valve housing

has the advantage that it is able to conduct the heat away directly by the provision of external cooling means such as fins or water cooling.

In the past all efforts to solve this problem have been directed to the use of materials having the lowest possible co-efficient of expansion for the valve body to limit its increase in diameter as its temperature increases. This normally involves the use of high grade steels with a hardened surface to minimise wear.

A further drawback of a steel valve body is that steel is a poor conductor of heat. As a result the surface of the valve body tends to get very hot leading to problems with excessive carbonisation.

It is common to use aluminium as the main base material for the valve housing as this makes the engine lighter and also assists in cooling since aluminium is a much better heat conductor than steel. However as the engine gets hot the aluminium of the housing will expand more than the steel of the valve body causing the clearance between the valve body and valve housing to increase, causing gas leakage and loss of power.

To reduce this differential expansion effect sometimes a cast iron, or bronze bush is pushed into the aluminium valve housing. The steel valve body is then run within this bush. This bush further reduce thermal conductivity leading to increased problems with carbonisation. Alternatively the valve body may be run against the aluminium housing, with steel bands embedded within the housing being used to control the expansion of the aluminium. In either case the coefficients of expansion of the body and the housing will still tend not be closely matched. This can lead to problems with seizure if the valve body grows by more than the valve housing, and leakage if it grows by less.

A further disadvantage of the known engines utilising a steel valve body and an aluminium housing occurs in cold conditions. Since the aluminium housing has a greater coefficient of expansion than the steel valve body, it contracts more under cold conditions and it has been found that, particularly at sub-zero temperatures, the gap can disappear altogether with the result that the engine is effectively seized and will not start. To enable cold starting to be achieved, it is necessary to provide a larger gap than is desired for engine efficiency.

The present invention seeks to overcome these disadvantages by using aluminium for the rotary valve body as well as the valve housing, the surface of the aluminium valve body itself acting as the sealing surface, there being no additional sealing devices incorporated within the valve body or valve housing . The use of aluminium for the valve body goes against conventional rotary valve design where the requirement for minimal thermal expansion, and a very hard running surface mean that a hardened steel component is normally used. However it has now been found by experiment that, surprisingly, it is possible to successfully use aluminium for the valve body and that it does overcome the main disadvantages of the steel valve body.

Inherently because the same material is used for both valve body and valve housing, the valve body and housing expand at the same rate. This leads to more consistent sealing across the temperature range from cold starting up to maximum temperature, both reducing leakage when hot, and preventing the engine seizing when cold.

The improved thermal conductivity of the aluminium valve body leads to lower surface temperatures on the valve and reduced carbon deposition.

It has further been found that it is possible to use greater tolerances in the gap between the valve body and the housing than is possible with the existing steel valve bodies without reducing efficiency or increasing the risk of seizing. This greatly facilitates manufacture, particularly for mass production and offers significant savings in manufacturing costs. Typically, it has been found that cold clearances between the valve body and housing of 10-30 microns can be used without significant loss of efficiency, whereas in the known engines clearances in the region of 5-10 microns are needed if efficiency requirements are to be met. In practice, the use of such tight tolerances means that the valve bodies and housings must be individually matched, which is not practical for mass production.

The reason for this surprising advantage is a type of thermal expansion feedback loop in the transmission of heat from the valve body to the valve housing. If clearance between the valve body and the housing increases during running, the heat conduction from the valve to the housing reduces causing the valve body to heat up to reduce the clearance. Similarly, if the clearance reduces, the conduction increases and more heat is conducted

to the housing thus reducing the valve body temperature. This self-balancing, correction factor enables the use of the wider tolerance range.

According to the present invention there is provided a rotary valve internal combustion engine having a piston connected to a crankshaft and reciprocable in a cylinder, a combustion chamber being defined in part by the piston, and a rotary valve rotatable with a close sliding fit in a valve housing fixed relative to the cylinder, the rotary valve having a valve body containing a volume defining, in part, the combustion chamber and further having in a wall part thereof a port giving, during rotation of the valve, fluid communication successively to and from the combustion chamber via inlet and exhaust ports in the valve housing, wherein the rotary valve and the valve housing are formed of aluminium, the sealing function being carried out between a surface of the main body of the rotary valve and a contiguous surface of the valve housing.

Preferably the total sealing function is carried out between the surface of the body of the rotary valve and the surface of the valve housing only, there being no additional sealing devices incorporated within the rotary valve or valve housing..

Preferably, the aluminium is an aluminium alloy with a copper content of up to 5%, and may be a eutectic aluminium. In a preferred embodiment, the interface surface of one or both of the valve body and the valve housing is provided with a hardened surface, which may comprise hard anodised aluminium, a ceramic or silicon carbide coating, a DLC (Diamond like Carbon) coating or a plasma nitrided surface.

In one embodiment, the port in the valve is a recess formed in the lower peripheral edge of the wall of the valve body adjacent to the combustion chamber, the recess extending upwardly from this lower edge of the wall of the valve to form the port in the side of the valve. In another embodiment, the port in the valve is a bore in the wall part of the valve body, the wall having a lip formed below the port adjacent to the combustion chamber.

Preferred embodiments of the present invention will now be described by way of example with reference to the accompanying drawings, in which:-

Figure 1 shows a cross-sectional view of a single cylinder air cooled engine,

Figure 2 is a schematic view of one embodiment of the rotary valve body.

Referring now to Figure 1, there is shown a single cylinder air cooled engine. The cylinder 2 has a piston 1 connected to a crankshaft 3 in the conventional manner for reciprocation in the cylinder 2. As shown particularly in Figure 2, the upper part of the cylinder 2 is closed by a combustion chamber 4. The flow of inlet air/fuel mix and exhaust gas into and out of the combustion chamber 4 is controlled by a rotary valve 5. In this embodiment, the valve is rotatable in a valve housing in the combustion chamber housing about an axis 5a which is parallel to the axis of rotation 3a of the crankshaft 3.

At its end remote from the combustion chamber 4, the rotary valve 5 has a driven pulley 17 mounted thereon which is connected to a drive pulley 18 on the engine crankshaft 3 by a belt drive arrangement, comprising an endless belt 19 having a toothed profile on its inner surface which drivingly engage with corresponding teeth on the pulleys 17 and 18. The pulleys, and hence the endless belt 19 also, lie in a common plane 20. Thus, the rotation of the crankshaft 3 and hence the piston movement is coordinated with the rotation of the rotary valve 5 so that the engine operates on the conventional four stroke cycle. To achieve this, the diameter of the driven pulley 17 is twice that of the drive pulley 18 so that the rotary valve 5 rotates at half engine speed.

Referring now to Figure 2 also, there is shown more detail of the rotary valve 5. The rotary valve consists of a plain active valve having a first cylindrical part in the form of a shaft 6 mounted on a ball bearing arrangement comprising a single race ball bearing 7, located on a side of the valve 5 remote from the combustion chamber 4. The valve has a slightly larger cylindrical body part comprising the valve body 11 itself which forms a shoulder 12 against which the ball bearing 7 is located. The valve body 11 extends into the combustion chamber and has in its interior a volume 9 which forms part of the combustion chamber 4. The valve body 11 is rotatable in a bore in a valve housing 8 in which the valve body 11 is a close sliding fit. Typically, the clearance is within the range of 10-30 microns between the rotary valve 5 and the bore of the valve housing 8. The valve 5 and the valve housing 8 are formed of aluminium.

Preferably, the aluminium may be an aluminium alloy with a high copper content, up to 5%, which gives good heat dissipation properties and good bearing qualities. A preferred

aluminium is that designated as aluminium 2618. In further developments of the invention, one or both of the interface surfaces of the valve body 5 and the valve housing 8 may be provided with a hard coating such as anodised aluminium, a ceramic or silicon carbide coating such as Nikasil (a registered trademark), a DLC (Diamond like Carbon) coating or a plasma nitride treatment.

The shaft 6 part of the rotary valve 5 is only slightly smaller in diameter than the valve body 11 to provide the shoulder. The shaft part is solid to provide a good path for conducting heat from the valve body 11 to the exterior. The shaft, on its end remote from the combustion chamber, to which the driven pulley 17 is connected, may have additional cooling means such as a heat sink 13 which may include fins or a fan rotatable with the driven pulley 17.

The rotary valve, the valve body has a port 14 which, during rotation of the valve, enables fluid communication successively to and from the combustion chamber via inlet and exhaust ports in the valve housing. In this embodiment the port is in the form of a recess formed in the lower peripheral edge 16 of the wall 15 of the valve body adjacent to the combustion chamber the recess extending upwardly from this lower edge of the wall of the valve to form the port 14 in the side of the valve. In an alternative construction (not shown), the port is a bore in the wall part of the valve body, the wall having a lip formed below the port at the lower peripheral edge 16 of the wall 15 adjacent to the combustion chamber.

Although described as a single cylinder engine, it will be understood that the invention is equally applicable to multi cylinder engines which may be of in-line, Vee or horizontally opposed configuration. Furthermore, although described as a spark ignition engine the invention is equally applicable to a compression ignition engine.

Although the example given is for an engine with the axis of rotation of the rotary valve parallel to the axis of the crankshaft, it will be understood that the invention is equally applicable to rotary valve engines where the axis of rotation of the valve is perpendicular to the axis of rotation of the crankshaft, or indeed at any intermediate angle.

CLAIMS

1. A rotary valve internal combustion engine having a piston connected to a crankshaft and reciprocable in a cylinder, a combustion chamber being defined in part by the piston, and a rotary valve rotatable with a close sliding fit in a valve housing fixed relative to the cylinder, the rotary valve having a valve body containing a volume defining, in part, the combustion chamber and further having in a wall part thereof a port giving, during rotation of the valve, fluid communication successively to and from the combustion chamber via inlet and exhaust ports in the valve housing, wherein the base material of the valve body and valve housing is aluminium, the sealing function being carried out between a surface of the main body of the rotary valve and a contiguous surface of the valve housing.
2. A rotary valve internal combustion engine according to claim 1 wherein the total sealing function is carried out between the surface of the body of the rotary valve and the surface of the valve housing only, there being no additional sealing devices incorporated within the rotary valve or valve housing.
3. A rotary valve internal combustion engine according to claim 1 or 2 wherein the aluminium is an aluminium alloy with a copper content of up to 5%.
4. A rotary valve internal combustion engine according to claim 1 or 2, wherein the aluminium is a eutectic aluminium.
5. A rotary valve internal combustion engine according to claim 1 or 2 or 3 or 4, wherein the interface surface of one or both of the valve body and the valve housing is provided with a hardened surface.
6. A rotary valve internal combustion engine according to claim 5, wherein the hardened surface or surfaces comprises anodised aluminium, a ceramic or silicon carbide coating, a DLC (Diamond like Carbon) coating or a plasma nitrided surface.

7. A rotary valve internal combustion engine according to any one of claims 1 to 6, wherein the port in the valve is a recess formed in the lower peripheral edge of the wall of the valve body adjacent to the combustion chamber, the recess extending upwardly from this lower edge of the wall of the valve to form the port in the side of the valve.

8. A rotary valve internal combustion engine according to any one of claims 1 to 6 wherein the port in the valve is a bore in the wall part of the valve body, the wall having a lip formed below the port adjacent to the combustion chamber.

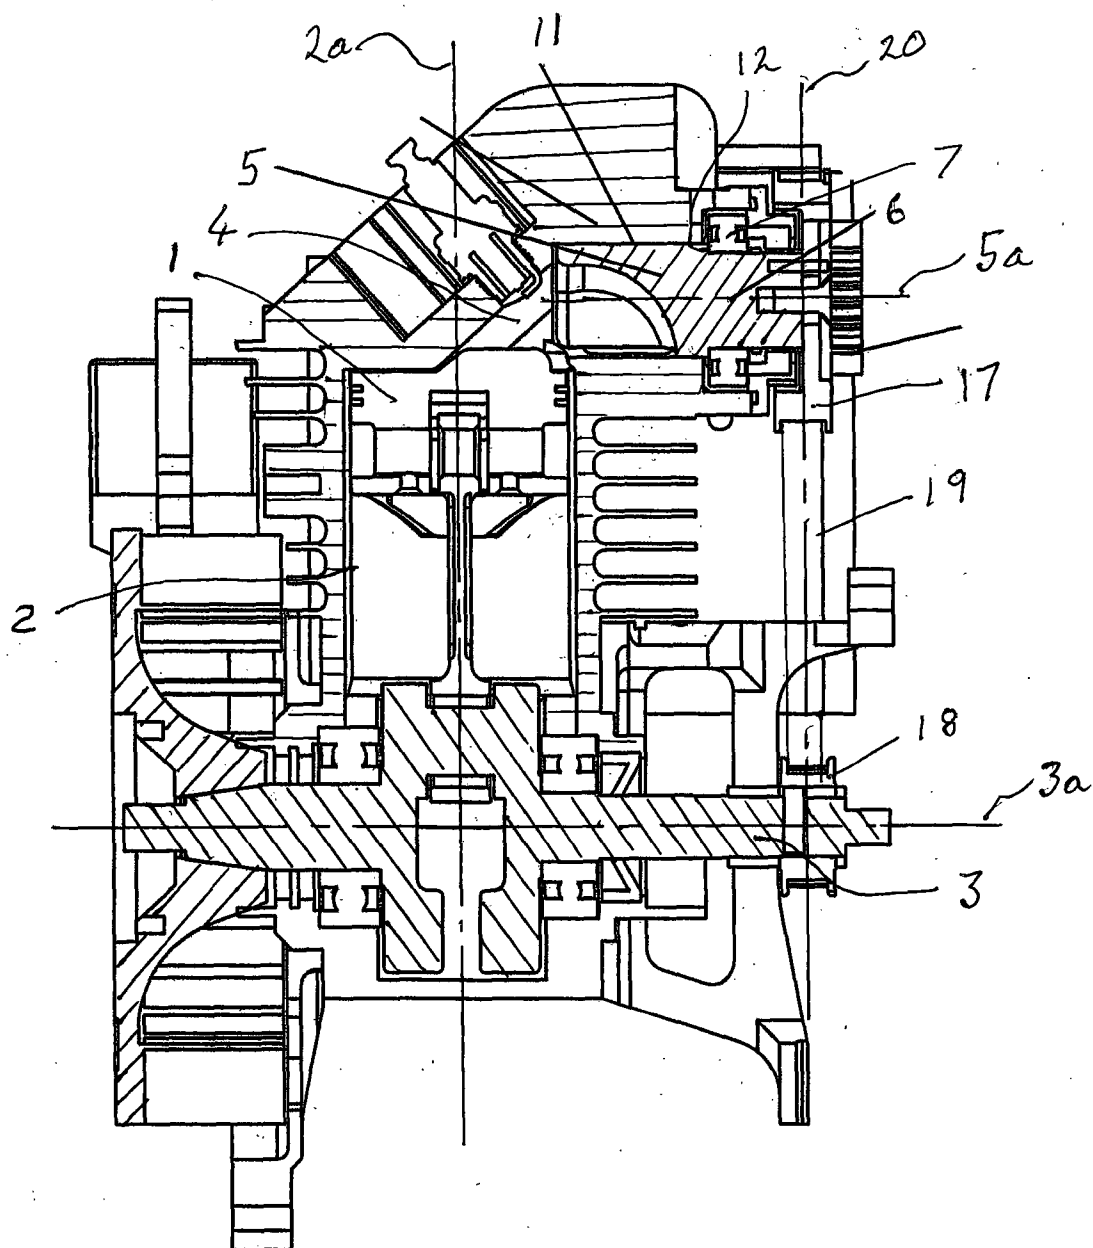


FIG 1

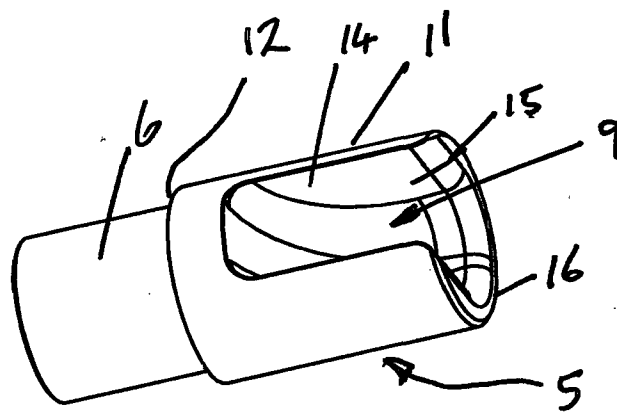


FIG 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2013/000336

A. CLASSIFICATION OF SUBJECT MATTER

INV. F01L7/02 F01L7/04 F01L7/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2 245 743 A (METCALF ASPIN FRANK) 17 June 1941 (1941-06-17) column 2, line 18; figure 1 -----	1
Y	GB 859 366 A (F M ASPIN ENGINES LTD; ASPIN FRANK METCALFE) 18 January 1961 (1961-01-18) page 1, line 77 - line 79; figures -----	1
Y	GB 487 184 A (WILLIAM MCMAHON) 16 June 1938 (1938-06-16) page 2, line 75 - line 80; figures -----	1
Y	GB 632 573 A (FORTUNE CAUDMONT) 28 November 1949 (1949-11-28) page 2, line 30 - line 35 ----- -/--	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

5 November 2013

Date of mailing of the international search report

15/11/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Paulson, Bo

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2013/000336

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 40 40 936 A1 (KLOECKNER HUMBOLDT DEUTZ AG [DE]) 25 June 1992 (1992-06-25) the whole document -----	1-8
A	GB 2 467 947 A (RCV ENGINES LTD [GB]) 25 August 2010 (2010-08-25) the whole document -----	1-8
A	US 1 682 512 A (HAYS HARRY S) 28 August 1928 (1928-08-28) the whole document -----	1-8
A	GB 2 438 207 A (RCV ENGINES LTD [GB]) 21 November 2007 (2007-11-21) the whole document -----	1-8

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2013/000336

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2245743	A	17-06-1941	NONE
GB 859366	A	18-01-1961	NONE
GB 487184	A	16-06-1938	NONE
GB 632573	A	28-11-1949	NONE
DE 4040936	A1	25-06-1992	NONE
GB 2467947	A	25-08-2010	CN 102325969 A 18-01-2012 EP 2399009 A1 28-12-2011 GB 2467947 A 25-08-2010 JP 2012518739 A 16-08-2012 KR 20120011844 A 08-02-2012 US 2011308491 A1 22-12-2011 WO 2010094917 A1 26-08-2010
US 1682512	A	28-08-1928	NONE
GB 2438207	A	21-11-2007	NONE