




(86) **Date de dépôt PCT/PCT Filing Date:** 2009/01/28  
 (87) **Date publication PCT/PCT Publication Date:** 2009/08/06  
 (45) **Date de délivrance/Issue Date:** 2016/10/11  
 (85) **Entrée phase nationale/National Entry:** 2010/08/03  
 (86) **N° demande PCT/PCT Application No.:** AU 2009/000082  
 (87) **N° publication PCT/PCT Publication No.:** 2009/094696  
 (30) **Priorités/Priorities:** 2008/02/01 (AU2008900435);  
 2008/04/09 (AU2008901730)

(51) **Cl.Int./Int.Cl. E04C 3/02** (2006.01)  
 (72) **Inventeurs/Inventors:**  
 THORNTON, PATRICK, AU;  
 BLAIR, PETER, AU  
 (73) **Propriétaire/Owner:**  
 LOGGO IP PTY LTD, AU  
 (74) **Agent:** BLAKE, CASSELS & GRAYDON LLP

(54) **Titre : ELEMENT STRUCTURAL EN BOIS DE CONSTRUCTION**  
 (54) **Title: TIMBER STRUCTURAL MEMBER**

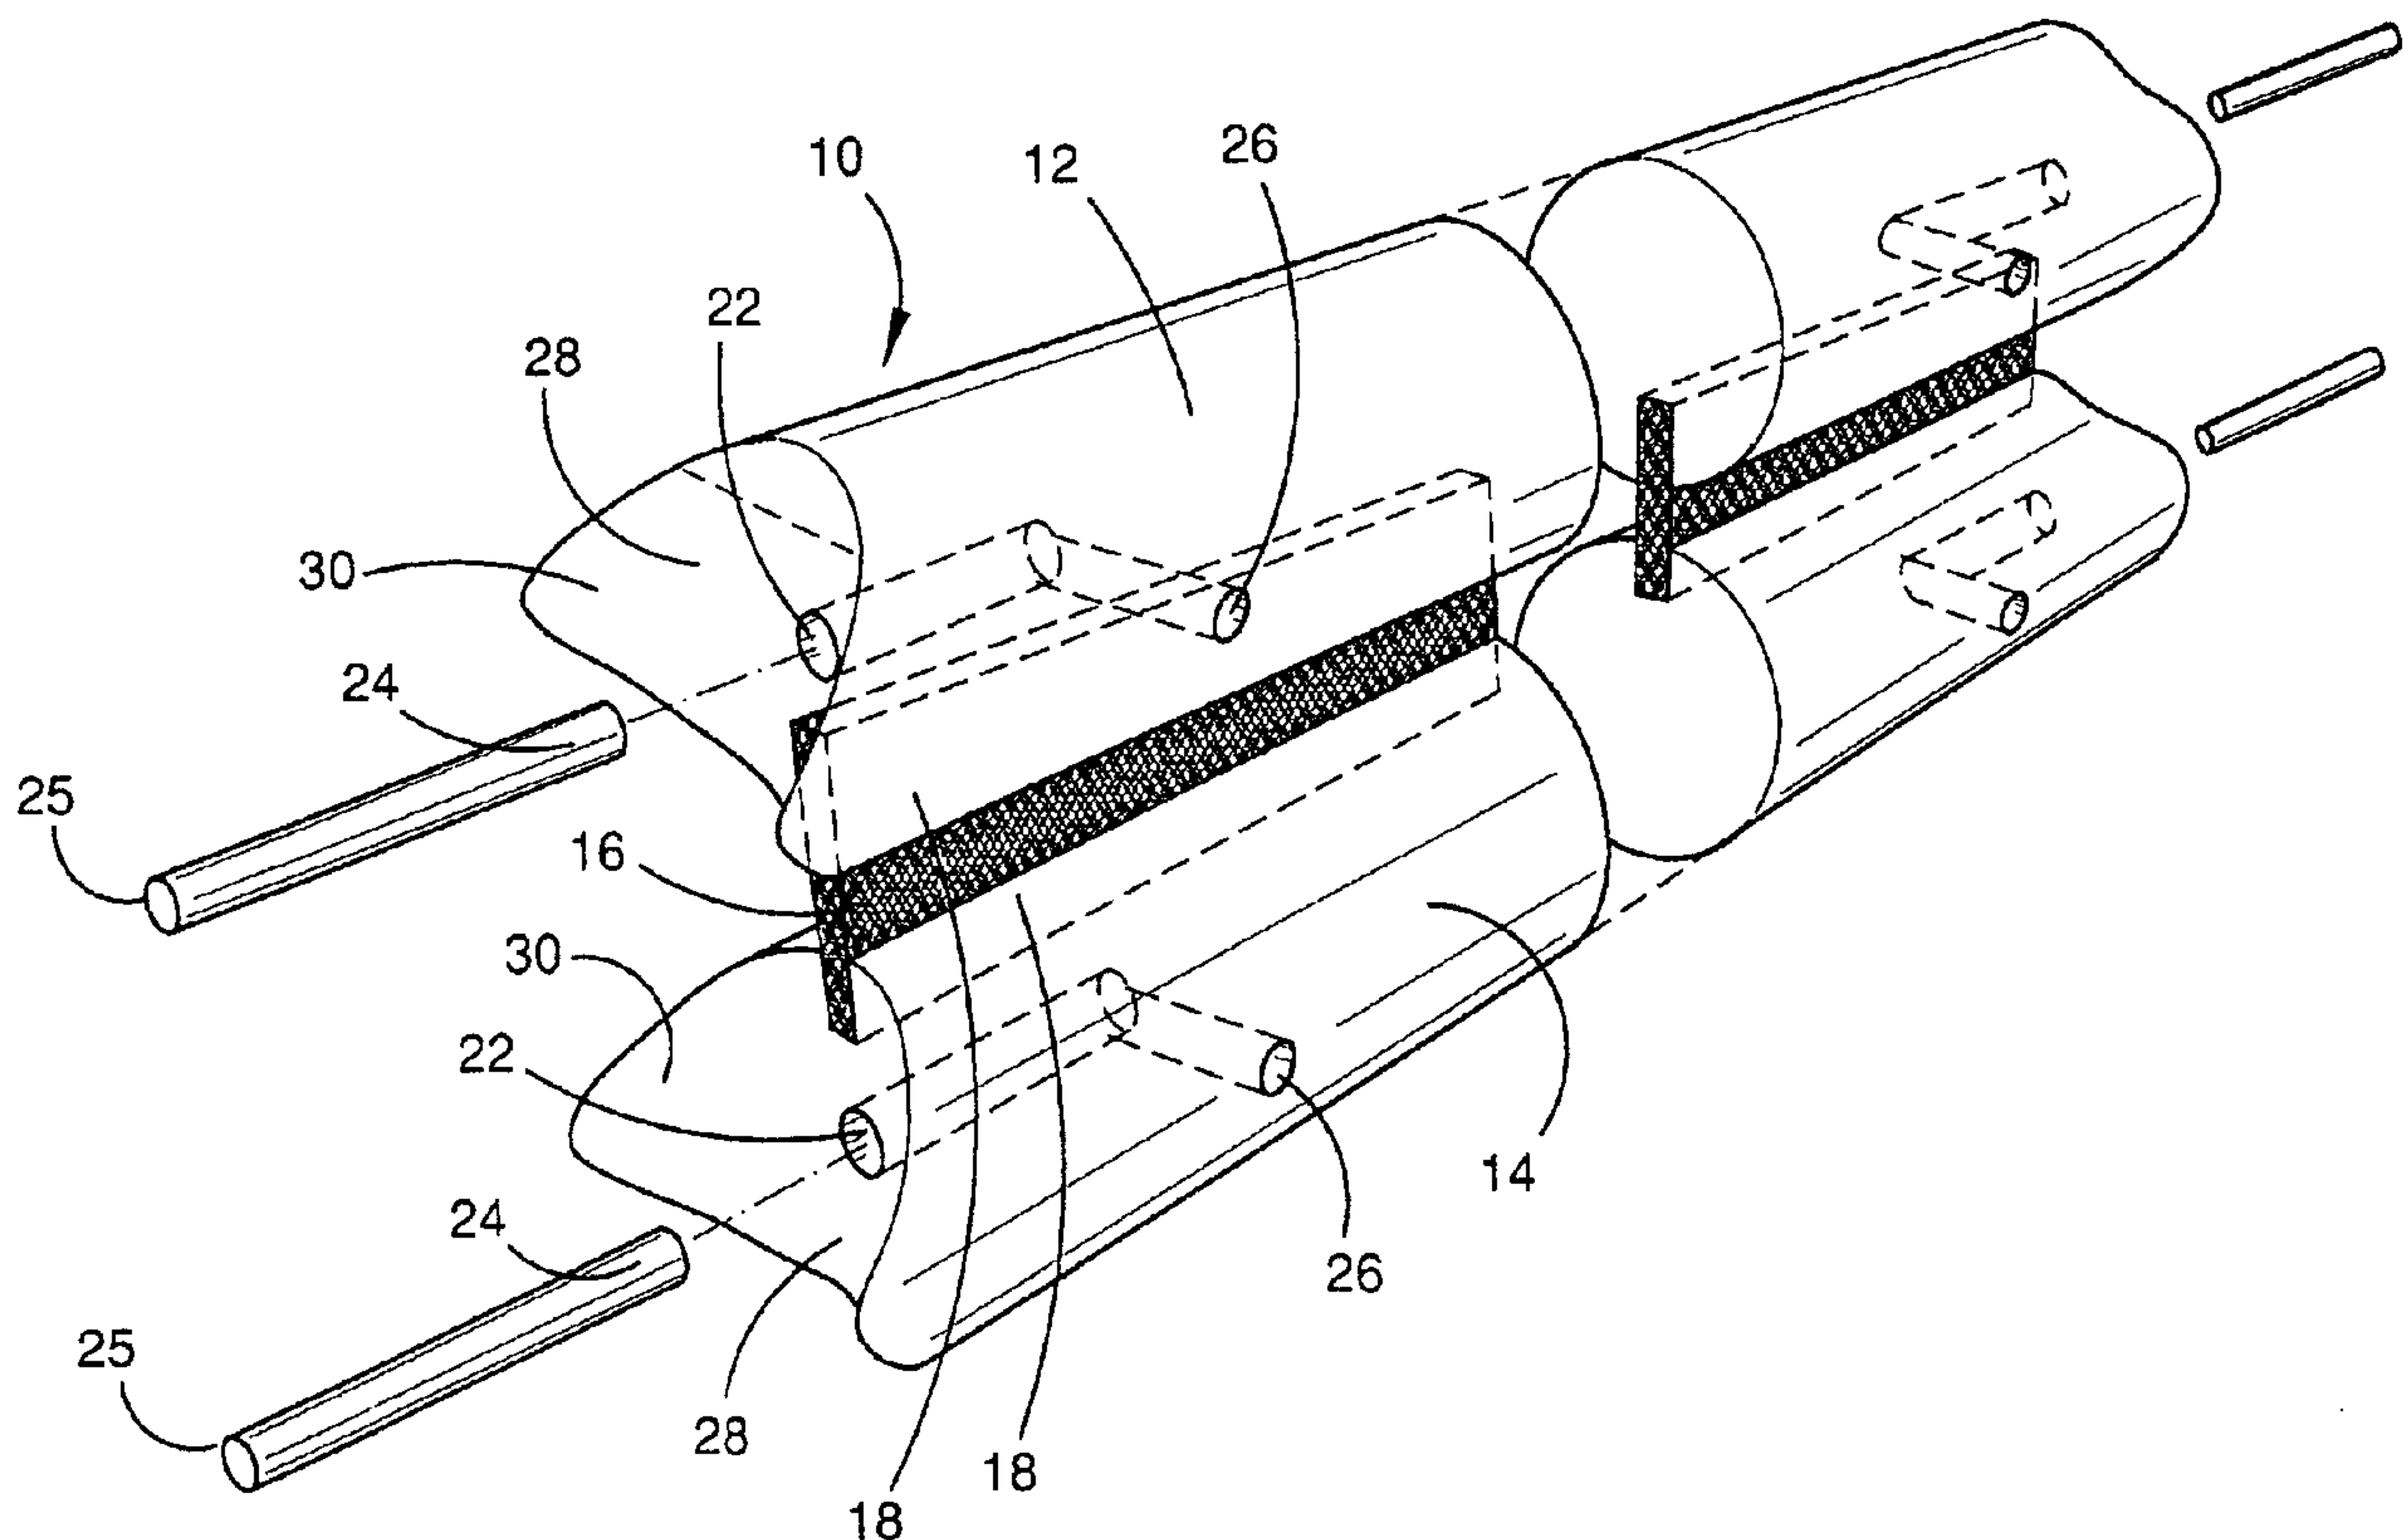

(57) **Abrégé/Abstract:**

A timber joist comprising first and second flanges connected together by a web, the web being structurally integral with the flanges. Both flanges comprise timber poles.

**ABSTRACT**

A timber joist comprising first and second flanges connected together by a web, the web being structurally integral with the flanges. Both flanges comprise timber poles.

5

# 1 **Timber structural member**

## 2 **Field of the invention**

3 The invention generally relates to the field of structural members for use in building construction.  
4 More particularly, but not exclusively, the invention relates to timber structural members for  
5 portal frames, which can be incorporated into modular building systems.

## 6 **Background of the invention**

7 Timber structural members play an important part in the construction of building structures.  
8 Timber is commonly used for joists, beams, columns, rafters and frames because of its  
9 strengths for load bearing and its natural ability to withstand a variety of forces. Additionally,  
10 compared to metal based materials, timber structural members often cost less to manufacture  
11 and are more easily cut and processed for specific building requirements. A strong and useful  
12 type of structural member is an "I-joist". The I-joist comprises two flange members with an  
13 interconnecting web member, resembling a letter "I" in its cross-section. I-joists have good load  
14 bearing and distribution capabilities and are key components in building construction.

15 The flanges of timber I-joists (hereon called "timber joists") have historically been made from  
16 solid wood lumber or laminated timber. In order to obtain flanges of appropriate length and  
17 cross-sectional dimensions, relatively large diameter lumber is required. Any imperfection in the  
18 flange can greatly compromise the strength of the flange, so relatively high quality lumber is  
19 required for the manufacture of timber joists. This has led in turn to increased cost in production  
20 as well as raising natural resource conservation issues. Depending on the part of the log it is  
21 sawn from, the solid lumber may have issues with natural defects such as splinters, rot,  
22 abnormal growth and grain structures. Additionally, when sawn and prepared for commercial  
23 use the lumbers are prone to processing defects such as chipping, torn grain and timber waness.

24 To address the problems associated with solid wood lumber, alternative forms of wood material  
25 for making timber joists have been sought. These include engineered wood composites such as  
26 plywood, laminated veneer lumber ("LVL"), oriented strand lumber ("OSL") and oriented strand  
27 board ("OSB"). Wood composites have the advantage of being less expensive in raw material  
28 cost (as they are able to be formed from lower grade wood or even wood wastes) and do not  
29 have the problems associated with solid lumber defects. However, the energy and resource  
30 requirements in their manufacture are generally significantly higher as processed structural

1 timber requires significantly more cutting, bonding, and curing than naturally formed timber.  
2 Also, timber joists made from wood composites do not have effective end grain connection and  
3 when used in building construction they are usually joined by bearing onto another member and  
4 nailed to deter sideways twisting and/or movement. This type of connection often requires further  
5 mounted metal braces which become design hindrances. Additionally, the metal braces are  
6 prone to oxidation and collapse in fire as the metal heats more readily than the timber, resulting  
7 in charring of the adjoining timber and loss of support.

8 Accordingly there is a need for a timber structural member that is manufactured to have superior  
9 strength characteristics, requires less processing, has less material wastage, and is easily  
10 joined to other structural members without compromising the strength of the member.

11 Any reference in this specification to the prior art does not constitute, nor should it be  
12 considered, an admission that such prior art was widely known or forms part of the common  
13 general knowledge in Australia, or in any other jurisdiction, before the priority date of any of the  
14 appended claims.

## 15 **Summary of the invention**

16 According to one aspect of the present invention there is provided a timber joist comprising: first  
17 and second flanges connected together by a web which is structurally integral with the flanges,  
18 both flanges comprising timber poles.

19 Preferably each flange has a slot formed therein which extends longitudinally along the length of  
20 the flange, the slot being dimensional to receive the web, the web being bonded in the slot.

21 The web may be generally planar and may extend the full length of the flanges. Alternatively,  
22 the web may extend beyond the length of the flanges or be shorter than the length of the  
23 flanges. The web may comprise one or more segments wherein the flanges include one or more  
24 slots and each web segment connects into one of the corresponding slots in the flanges.

25 The web may be formed of any suitable relatively high tensile strength planar material. Suitable  
26 materials include: processed timber such as chipboard, plywood or the like; metal sheet or  
27 plate; fibre reinforced cement sheet; plastics or fibre reinforced plastics materials; and the like.

28 The flanges are preferably parallel to each other and the web is preferably of elongate  
29 rectangular shape.

1 One or more ends of the flanges may be configured to form a dowel connection. The dowel  
2 connection may comprise of an axial bore in the flange sized to receive a dowel. The dowel will  
3 preferably comprise a mild steel or high strength steel rod.

4 One or more ends of the flanges may be provided with a radial cut shaped and positioned to  
5 engage with a further timber pole.

6 The term "timber pole" as used herein is intended to mean a naturally occurring round cross-  
7 section pole having a central core and having had its peripheral surface trimmed so that the  
8 pole has a substantially constant cross-sectional shape along its full length. Suitable poles  
9 include true round plantation pine, such as slashpine or carribaea hybrids, or other timber  
10 species.

11 According to another aspect of the present invention there is provided a structure comprising a  
12 plurality of interconnected structural members, wherein one or more structural members is a  
13 timber structural member according to the invention.

14 In a further aspect the present invention provides a truss comprising at least two timber poles in  
15 non-parallel alignment with each other, each pole having a slot therein, and a web bonded into  
16 the slots of the two poles to form a structurally integral assembly.

#### 17 **Brief description of the drawings**

18 Figure 1 shows a perspective view of one embodiment of a timber joist in accordance with the  
19 present invention;

20 Figure 2 shows a top view of the timber joist shown in Figure 1;

21 Figure 3 shows an end view of the timber joist shown in Figure 1;

22 Figure 4 shows a side view of the timber joist shown in Figure 1;

23 Figure 5 shows a perspective view of an alternative embodiment of a timber joist in accordance  
24 with the present invention;

25 Figure 6 shows a top view of the timber joist shown in Figure 5;

26 Figure 7 shows a front view of the timber joist shown in Figure 5;

27 Figure 8 shows an end view of the timber joist shown in Figure 5;

28 Figure 9 shows a front view of a section of a structural member for which the timber joist shown  
29 in Figure 5 may connect to;

1 Figure 10 shows a side view of one embodiment of a truss which incorporates the flange and  
2 web construct of the invention; and  
3 Figure 11 shows a side view of an elbow joint including a timber joist in accordance with an  
4 embodiment of the invention.

#### 5 **Detailed description of the embodiments**

6 Referring initially to Figures 1 to 4, a timber joist 10 in accordance with an embodiment of the  
7 invention is shown. The joist 10 comprises a first flange 12 and a second flange 14 which are  
8 joined together by a web 16 such that the two flanges 12 and 14 are aligned and parallel with  
9 each other and are spaced apart from each other by a predetermined distance. The diameter of  
10 the flanges 12 and 14 and the dimensions of the web 16 are selected so that the structural  
11 strength of the combined joist will meet predetermined design and load bearing requirements.  
12 The flanges 12 and 14 are comprised of timber poles.

13 As is shown, each of the flanges 12 and 14 has a rectangular groove or slot 18 cut therein into  
14 which the web 16 is located in a relatively close sliding fit. A suitable bonding material or other  
15 fixing means is used to secure the web 16 into the slots 18 to thereby ensure that the joist acts  
16 in a structurally integral manner. The bonding material that is used to bond the web 16 into the  
17 slots 18 will depend on the material from which the web 16 is formed. Typically a resin based  
18 waterproof structural adhesive will be appropriate.

19 In the preferred form of the invention, the web 16 is formed of a plywood or plywood like  
20 material which is well known in the art, and the bonding material selected will be of a type such  
21 that a high strength timber to timber bond is achieved between the web 16 and the timber from  
22 which the flanges 12 and 14 are made. If necessary, the composite joist may be treated after  
23 assembly to ensure that the web to flange bond is of high strength.

24 As mentioned, the flanges 12 and 14 are both formed of timber poles. Timber poles are selected  
25 because of the significant advantages that timber poles provide. A number of advantages which  
26 are inherent in the use of timber poles and are not to be found with other timber products such  
27 as sawn timber or laminated timber products. One significant advantage, for example, is that  
28 timber poles are relatively inexpensive and are manufactured simply by cutting down a suitable  
29 diameter tree and then trimming the outer surface of the tree to form a pole with a constant  
30 diameter along its full length. Only waste material such as bark and branches are cut from the  
31 outer surface of the pole.

1 Timber poles, sometimes called "logs" or "true rounds" are particularly strong since the natural  
2 strength of the timber fibres is not disrupted by sawing or other treatment. The integrity of the  
3 pole is maintained, and the trimming process required to circularise the pole will not greatly  
4 affect the overall strength of the pole. Also, it will be appreciated that the core of the pole, which  
5 is relatively structurally weak, is kept at the centre of the pole where, under load conditions, the  
6 stresses on the pole will be less than the stresses at the periphery of the pole.

7 It will be appreciated that the natural characteristics of timber are that the central core or pith of  
8 the pole is relatively soft and has low structural strength. The periphery of the pole, on the other  
9 hand, is much harder and the timber fibres are able to carry a high load. Also, this strong outer  
10 layer is more resistant to water absorption and thus by keeping the outer circumference of the  
11 timber pole intact, the structural integrity of the pole is maintained.

12 In addition to the benefits gained by use of timber poles, the joist (once assembled) acts as a  
13 composite member which serves to provides further structural strength and stability.

14 Thus, forming a structural member out of timber poles has a number of advantages, including  
15 relatively low waste, and maintaining the structural integrity of the round timber pole.

16 The overall height of the joist can be controlled by ensuring that timber poles of constant  
17 diameter are used, and that the slots 18 cut in the poles are of constant depth to accommodate  
18 standard dimension webs. Alternatively, if the diameters of the poles are variable to some  
19 degree, that variation can be accommodated by changing the depth of the slots 18 to ensure  
20 that the overall height dimension of the joist is constant. This will ensure that where the joists  
21 are used, for example, as supports for a deck or floor, the deck or floor is planar and all  
22 components of the deck or floor are supported by adjacent joists.

23 An alternative option is to cut a flat face, as indicated by dotted lines 20 into the top and bottom  
24 of the joist, with the faces 20 being a preselected distance apart from each other. This will  
25 ensure the joist has a flat bearing face on which cross members can be seated, and also  
26 ensures that the overall height of the joist can be precisely controlled.

27 Connection of the joist to any desired structure can conveniently be achieved by providing a pair  
28 of dowel type connections at each end of the joist. As shown in Figure 1, each of the flanges 12  
29 and 14 have had an axially central bore 22 machined into the end thereof to a predetermined  
30 depth. This bore 22 is dimensioned to receive a steel dowel 24 as shown. As will be  
31 appreciated, the axial bore 22 not only provides for a strong attachment means (as described

1 below), it also removes the central weakest part of the pole flanges 12 and 14 thereby providing  
2 enhanced strength/structural integrity to the joist as a whole.

3 A lateral access bore 26 connects the end of the bore 22 to a location exterior of the pole and  
4 this lateral access bore 26 is used to inject a suitable adhesive bonding material into the bore 22  
5 in order to bond the dowel 24 into the bore 22. Generally the bore 22 will be of slightly larger  
6 diameter than the dowel 24 so that the bonding material injected through the access bore 26 will  
7 fully surround the dowel 24, thereby ensuring a high strength bonded connection between the  
8 dowel 24 and the flange 12 or 14. A dowel centring ring, shown by dotted lines 29, may be  
9 placed at the opening of bore 22 for axially centring the dowel 24. In this configuration the dowel  
10 24 is received through the ring into the bore 22 and the inner diameter of the centring ring  
11 matches substantially to the diameter of the dowel 24 to enable a secure fit. The dowel centring  
12 ring may be made from plastic, metal or composite materials, or the like. The centring ring may  
13 comprise of lugs on the external diameter for secure placement of the ring to the opening of  
14 bore 22. The centring ring 29 may be used to create a sealing face between the end 28 of the  
15 pole, and the pole or other structural component to which the joist is mounted, thereby ensuring  
16 a sealed continuous passage for bonding material injected into passage 26.

17 The adhesive bonding material may comprise a two component epoxy material or in some  
18 applications a single phase resin may be used. Generally the adhesive will completely encase  
19 the dowel, thereby providing a barrier to corrosion of the dowel along its entire length.

20 By axially securing each of the flanges 12 and 14 of the joist all load forces experienced by the  
21 joist are transmitted axially through the flanges 12 and 14. This again serves to add to the  
22 strength of the connection and any construction erected using the joist.

23 Further, by housing the dowel 24 inside the flange 12 or 14 the dowel 24 is protected from fire.  
24 Other known joining systems make use of connectors (e.g. pins, nails, bolts, plates etc) which  
25 are externally fitted. In the event of a fire, such externally fitted connectors have been found to  
26 transfer heat into the timber of the joist resulting in charring of the adjoining timber and  
27 consequential joint failure.

28 By providing internal dowel connectors 24 this problem is avoided, and the fire rating of the  
29 resulting joist is dependent on the web and flanges 12 and 14 of the joist. It is further noted that  
30 the round flanges 12 and 14 of the preferred embodiment of the invention are have a lesser  
31 tendency to support a flame than sawn timber as is used in traditional joists.

1 In use it is envisaged that the opposite end 25 of the dowel 24 will pass through a vertical post  
2 or the like which will have a similar bonding arrangement to ensure that both ends of the dowel  
3 are properly anchored in their respective bores.

4 Since two dowels 24 are provided, one for each of the flanges 12 and 14, the joist 10 will be  
5 held vertical by the two dowels 24, preventing twisting of the joist as load is applied to the joist in  
6 use. Additionally, by securing both flanges 12 and 14 of the joist 10 (by dowels 24) potential  
7 rotation of an individual flange 12 or 14 under load is reduced. Obviously both ends of the joist  
8 will be mounted in this fashion, thereby ensuring that four high strength dowels 24 are used to  
9 secure the joist in position. Hot dipped galvanised deformed reinforcement bars may be used, or  
10 other suitable alternatives may be considered, depending on strength requirements and  
11 environmental conditions.

12 Where the joist is to be connected to a vertically extending circular pole, or the like, the ends 28  
13 of the flanges 12 and 14 may be formed having a scalloped concave shape as indicated at  
14 numeral 30. The radius of curvature of this concave shape 30 will be selected to mirror the  
15 diameter of the vertical pole to which the joist is to be connected, thereby ensuring a neat and  
16 structurally sound connection with a vertical pole of this type. It will, of course, be appreciated  
17 that the ends 28 of the flanges 12 and 14 may be formed with a scalloped concave shape 30  
18 oriented so as to connect with a circular pole of any orientation. For example, a vertical radial  
19 cut (as opposed to the horizontal radial cut as depicted) could be made to form a scalloped  
20 concave shape suitable for use with a horizontally extending circular pole.

21 The vertical member to which the joist is connected can itself be a joist of the type described  
22 herein. In other words, joists of the type shown in Figure 1 can be placed at angles to each  
23 other to form, for example, a portal frame or like structure. The joist shown in Figure 1 can thus  
24 be used either horizontally, or vertically, or indeed in any orientation, and the term "joist" is not  
25 intended to limit in any way the application to which the structural member of the invention can  
26 be put.

27 To improve the strength of the end connections of the joist with vertical support to which the joist  
28 is to be connected, the web 16 may be extended beyond the end of the flanges, as depicted in  
29 Figures 5 to 9 of the drawings. As shown, the web 16 has a tongue 32 which extends beyond  
30 the end face 28 of the flanges, and that tongue 32 will be slotted into a vertically extending  
31 groove 36 in the end support. The tongue 32 will be bonded with the suitable adhesive material  
32 into the vertically extending groove to thereby strengthen the integrity of the end connection and  
33 furthermore prevent twisting of the joist as load is applied to the joist in use. Since the web 16

1 can be made of relatively high strength material this end connection can be made to be  
2 operatively high strength, further improving the overall structural strength of the structure into  
3 which the joist is incorporated. If necessary, a laterally extending pin as indicated by dotted lines  
4 34 can be used to laterally pin the tongue 32 to the vertical support.

5 It will be appreciated that the scalloped ends 28 of the flanges act in conjunction with vertical  
6 posts to which the joists are connected to prevent the joists twisting under load. Thus, the  
7 combined effect of a shaped and nested interconnection between post and joist, and the dual  
8 dowel connection at each end of the joist will ensure that the end connection of the joist is  
9 structurally sound.

10 Whilst it is envisaged that a joist of the type shown in Figures 1 to 9 will be the preferred form of  
11 structural member with which the invention will be used, other forms of structural members are  
12 possible. Figure 10 depicts one such additional example. The example shown comprises a  
13 connection 40 formed of a series of timber poles 42 connected together to form a truss. A web  
14 member 44 has been bonded into one of the polygon shaped gaps between the poles 42, and  
15 bonded with a slot and tongue type connection arrangement as discussed previously with  
16 respect to the flange and web arrangements of the joist shown in Figures 1 to 9. By bonding the  
17 web into the polygonal shaped space in this manner will ensure that the overall strength of the  
18 truss is significantly improved, particularly where a relatively high strength web material, such as  
19 plywood, is used.

20 As mentioned previously, the web material can be formed of any suitable material and the  
21 strength and thickness of the web will depend on the overall strength requirements of the joist,  
22 the diameters of the log, and like considerations. Clearly, if a high strength web is required, a  
23 thicker plywood material, for example, may be used. Other web materials might comprise  
24 fibrous cement or like material, or other high strength planar materials such as chipboard,  
25 particle board, and plastics type materials.

26 Various species of timber would be suitable to form the timber poles, particularly those type of  
27 species that tend to have a relatively constant diameter for a considerable portion of their length  
28 to minimise waste during the trimming and circularising processes referred to previously.  
29 Plantation pine materials tend to form suitable true rounds. Other materials that might be  
30 considered, for example, include coconut, Douglas fir, and various eucalypt species. In some  
31 applications, high strength bamboo poles might be considered.

1 The timber poles will typically be treated against insect damage and fungus and might be  
2 impregnated with various timber protection products and/or fire retardants.

3 As mentioned above, the joists described herein can be used in many different applications and  
4 in particular, the joists will be suitable for use as columns of a structure in which case the lower  
5 ends of the columns might either be embedded in concrete or supported on studs which in turn  
6 are embedded in concrete foundations.

7 It will be appreciated that the dowel type connection described herein is advantageous since it  
8 transfers connection loads directly along the central axis of the timber pole. The bore hole along  
9 the core of the timber pole serves to remove only the weakest portion of the timber pole. Also,  
10 the scalloped end of the poles serve to increase the bearing surface area of the pole ends,  
11 thereby ensuring a well supported transfer of loads between different components within the  
12 structure.

13 As described above, one advantage of the dowel type construction referred to herein is that all  
14 metal components are encased within timber components in the manner described herein. That  
15 arrangement not only provides an aesthetically attractive connection arrangement, but also is  
16 advantageous in that the metal components, in the event of a fire, are not directly exposed to  
17 the heat of the fire thus avoiding catastrophic collapse of the structure shortly after the outbreak  
18 of a fire.

19 Figure 11 provides a view of an elbow joint 50 constructed using a joist 52 as described above  
20 and a structural member 54.

21 The structural member in this instance includes a pair of poles 56 and 58 joined together, each  
22 pole having a radial cut 60, 62 in its end. The joist 52 has been manufactured such that the  
23 upper flange 64 extends beyond the web 66 and lower flange 68. The radial cut 70 in the end of  
24 the lower flange 68 has been made at an angle which accommodates the angle at which the  
25 lower flange 68 abuts the pole 56 of the structural member 54. Similarly, radial cuts 60 and 62 in  
26 the poles 56 and 58 of the structural member 54 have also been made to accommodate the  
27 angle of the upper flange 64 of the joist 52.

28 Connection between the joist 52 and the structural member 54 is provided by a combination of:  
29 the seating of the pole 56 of the structural member 54 in the radial cut 70 of the lower joist  
30 flange 68; the seating of the upper flange 64 of the joist 52 in the radial cuts 60 and 62 of the  
31 poles 56 and 58 of the structural member 54; the insertion of the dowel 72 of the lower flange 68  
32 of the joist 52 through the poles 56 and 58 of the structural member 54; the insertion of the

1 dowels 74 and 76 of the poles 56 and 68 of the structural member 54 through the upper flange  
2 64 of the joist 52.

3 It will be understood that the invention disclosed and defined in this specification extends to all  
4 alternative combinations of two or more of the individual features mentioned or evident from the  
5 text or drawings. All of these different combinations constitute various alternative aspects of the  
6 invention.

7 It will also be understood that the term comprises (and grammatical variants thereof) as used  
8 herein is equivalent to the term includes and should not be taken as precluding the existence of  
9 additional elements or features.

**We Claim:**

1. A timber joist comprising first and second flanges connected together by a web which is structurally integral with the flanges, both flanges comprising timber poles;  
wherein at least one end of one of the flanges includes an axial bore sized to receive a dowel for forming a dowel connection; and,  
wherein each of the timber poles is a naturally-occurring round cross-section pole having a central core and a peripheral trimmed surface, whereby the pole has a substantially constant cross-sectional shape over its length.
2. A timber joist according to claim 1, wherein the dowel is selected from a group including a mild steel rod and a high strength steel rod.
3. A timber joist according to claim 1 or claim 2, wherein at least one end of one of the flanges is provided with a radial cut shaped and positioned to engage with a further timber pole.
4. A timber joist according to any one of claims 1 to 3, wherein each flange has a slot formed therein which extends longitudinally along the length of the flange, the slot being dimensional to receive the web, the web being bonded in the slot.
5. A timber joist according to any one of claims 1 to 4, wherein the web is generally planar.
6. A timber joist according to any one of claims 1 to 5, wherein the web extends the full length of the flanges.
7. A timber joist according to any one of claims 1 to 6, wherein the web extends beyond the length of the flanges.
8. A timber joist according to any one of claims 1 to 5, wherein the web is shorter than the length of the flanges.
9. A timber joist according to any one of claims 1 to 8, wherein the web comprises one or more segments and the flanges include one or more slots, and wherein each web segment

connects into one of the corresponding slots in the flanges.


10. A timber joist according to any one of claims 1 to 9, wherein the web is formed of a high strength planar material.

11. A timber joist according to any one of claims 1 to 10, wherein the web is formed of a material selected from a group including: processed timber; chipboard, plywood, metal sheet, metal plate, fibre reinforced cement sheet, plastic, and fibre reinforced plastic material.


12. A timber joist according to any one of claims 1 to 11, wherein the flanges are parallel to each other and the web is of elongate rectangular shape.

13. A structure comprising a plurality of interconnected structural members, wherein one or more of the structural members is a timber joist according to any one of claims 1 to 12.


14. A truss comprising at least two timber poles in non-parallel alignment with each other, each pole having a slot therein, and a web bonded into the slots of the two poles to form a structurally integral assembly, wherein each of the timber poles is a naturally-occurring round cross-section pole having a central core and a peripheral trimmed surface, whereby the pole has a substantially constant cross-sectional shape over its length.

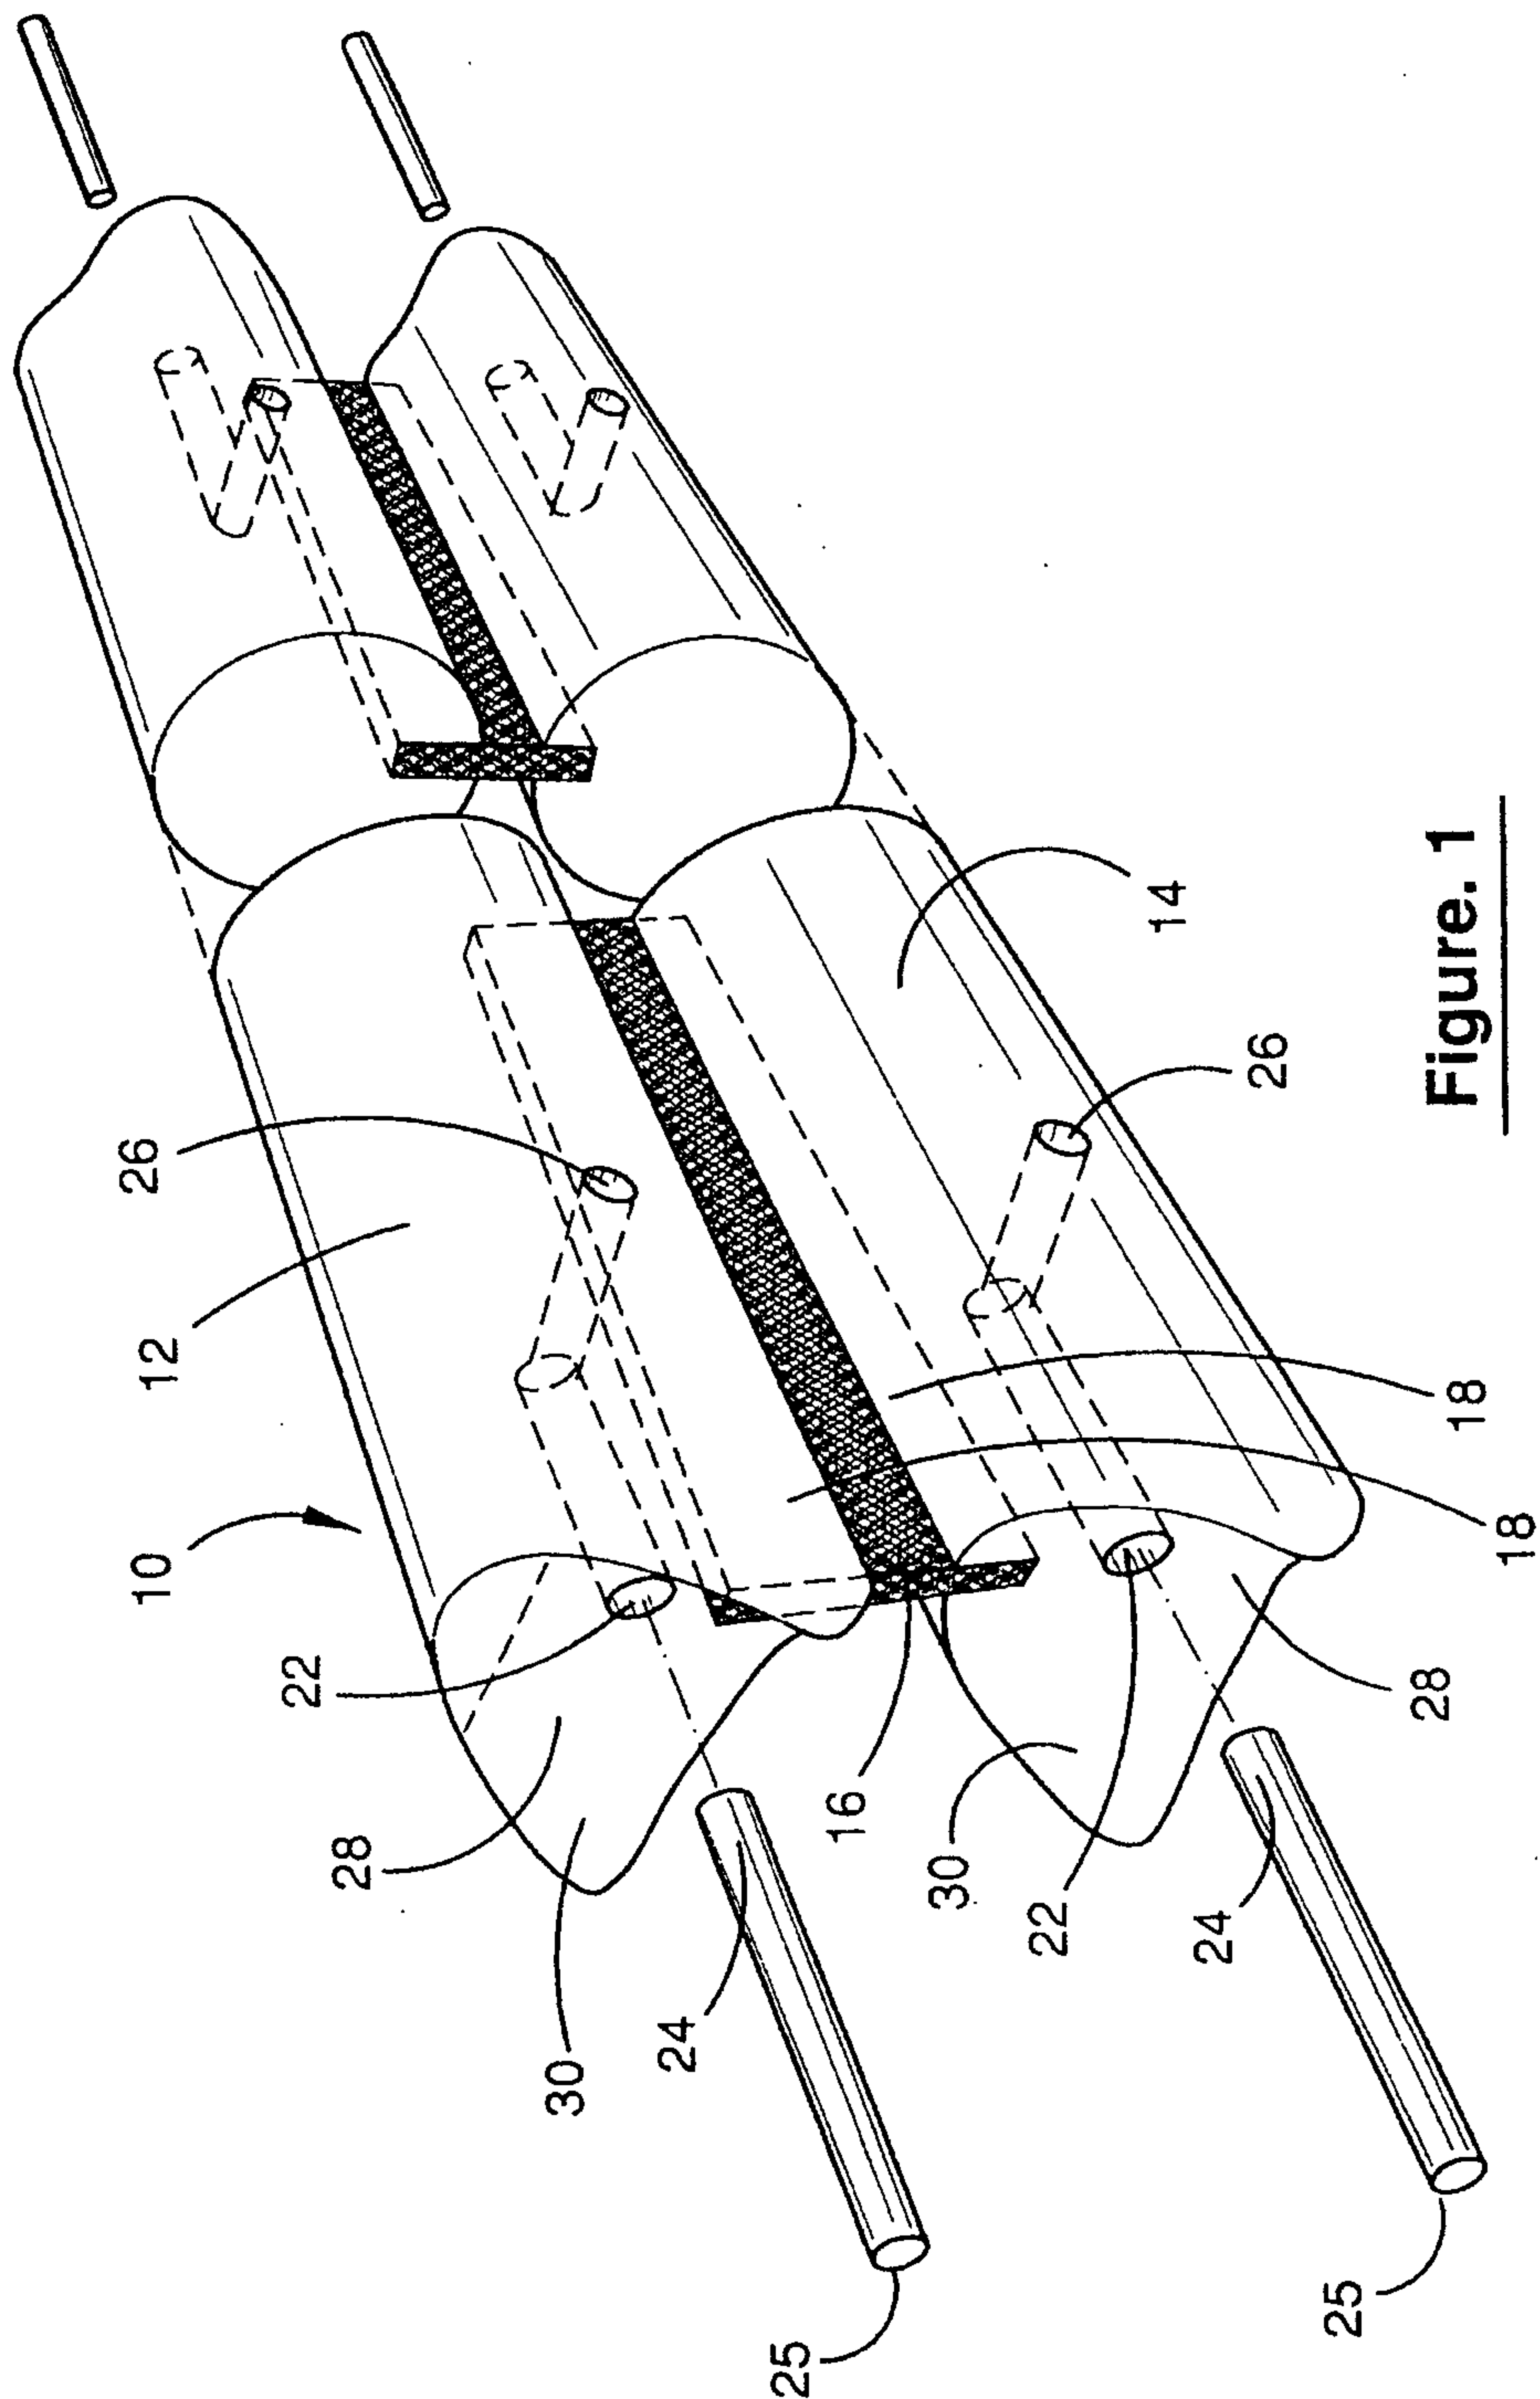


**Figure. 1**

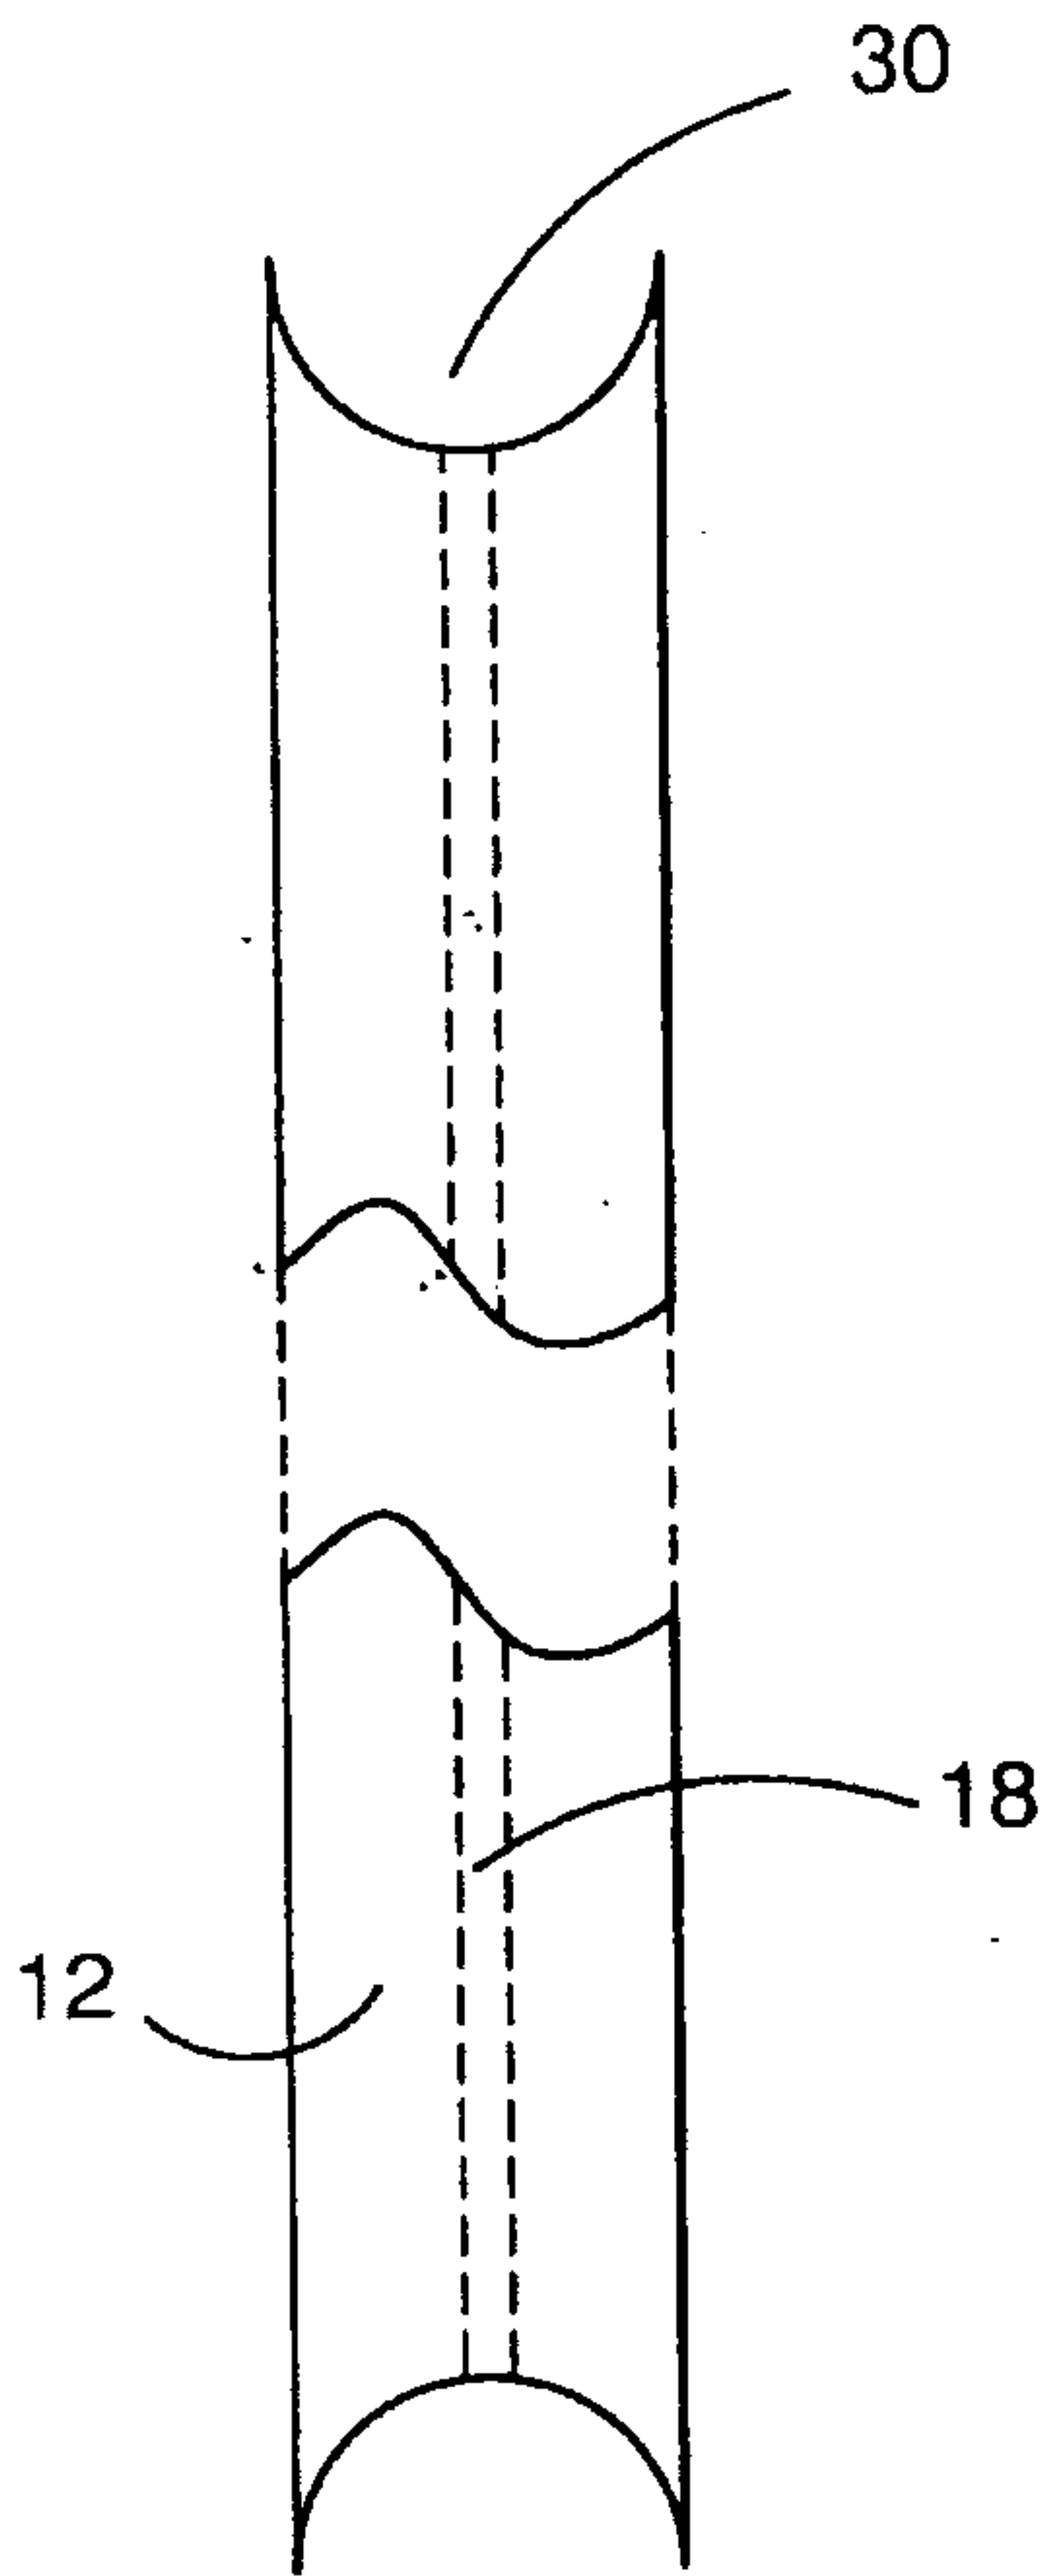


**Figure. 2**

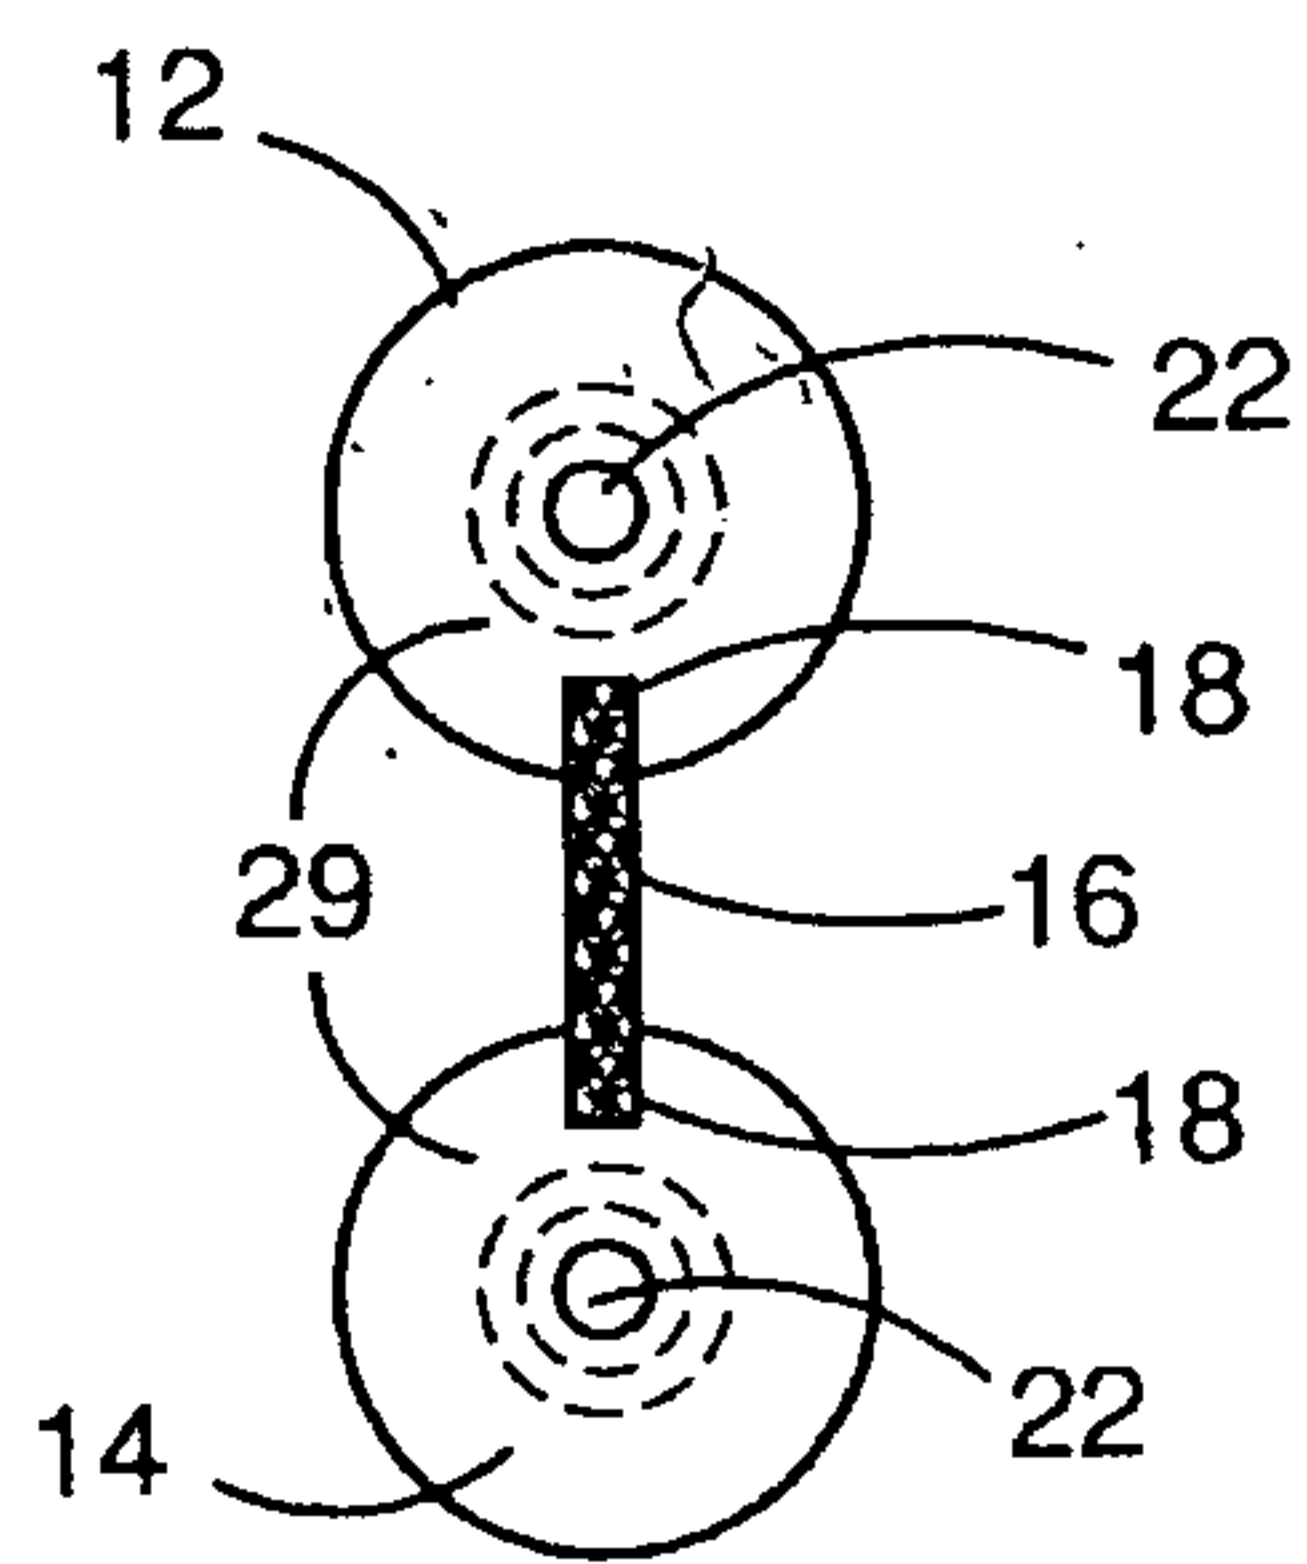


**Figure. 3**

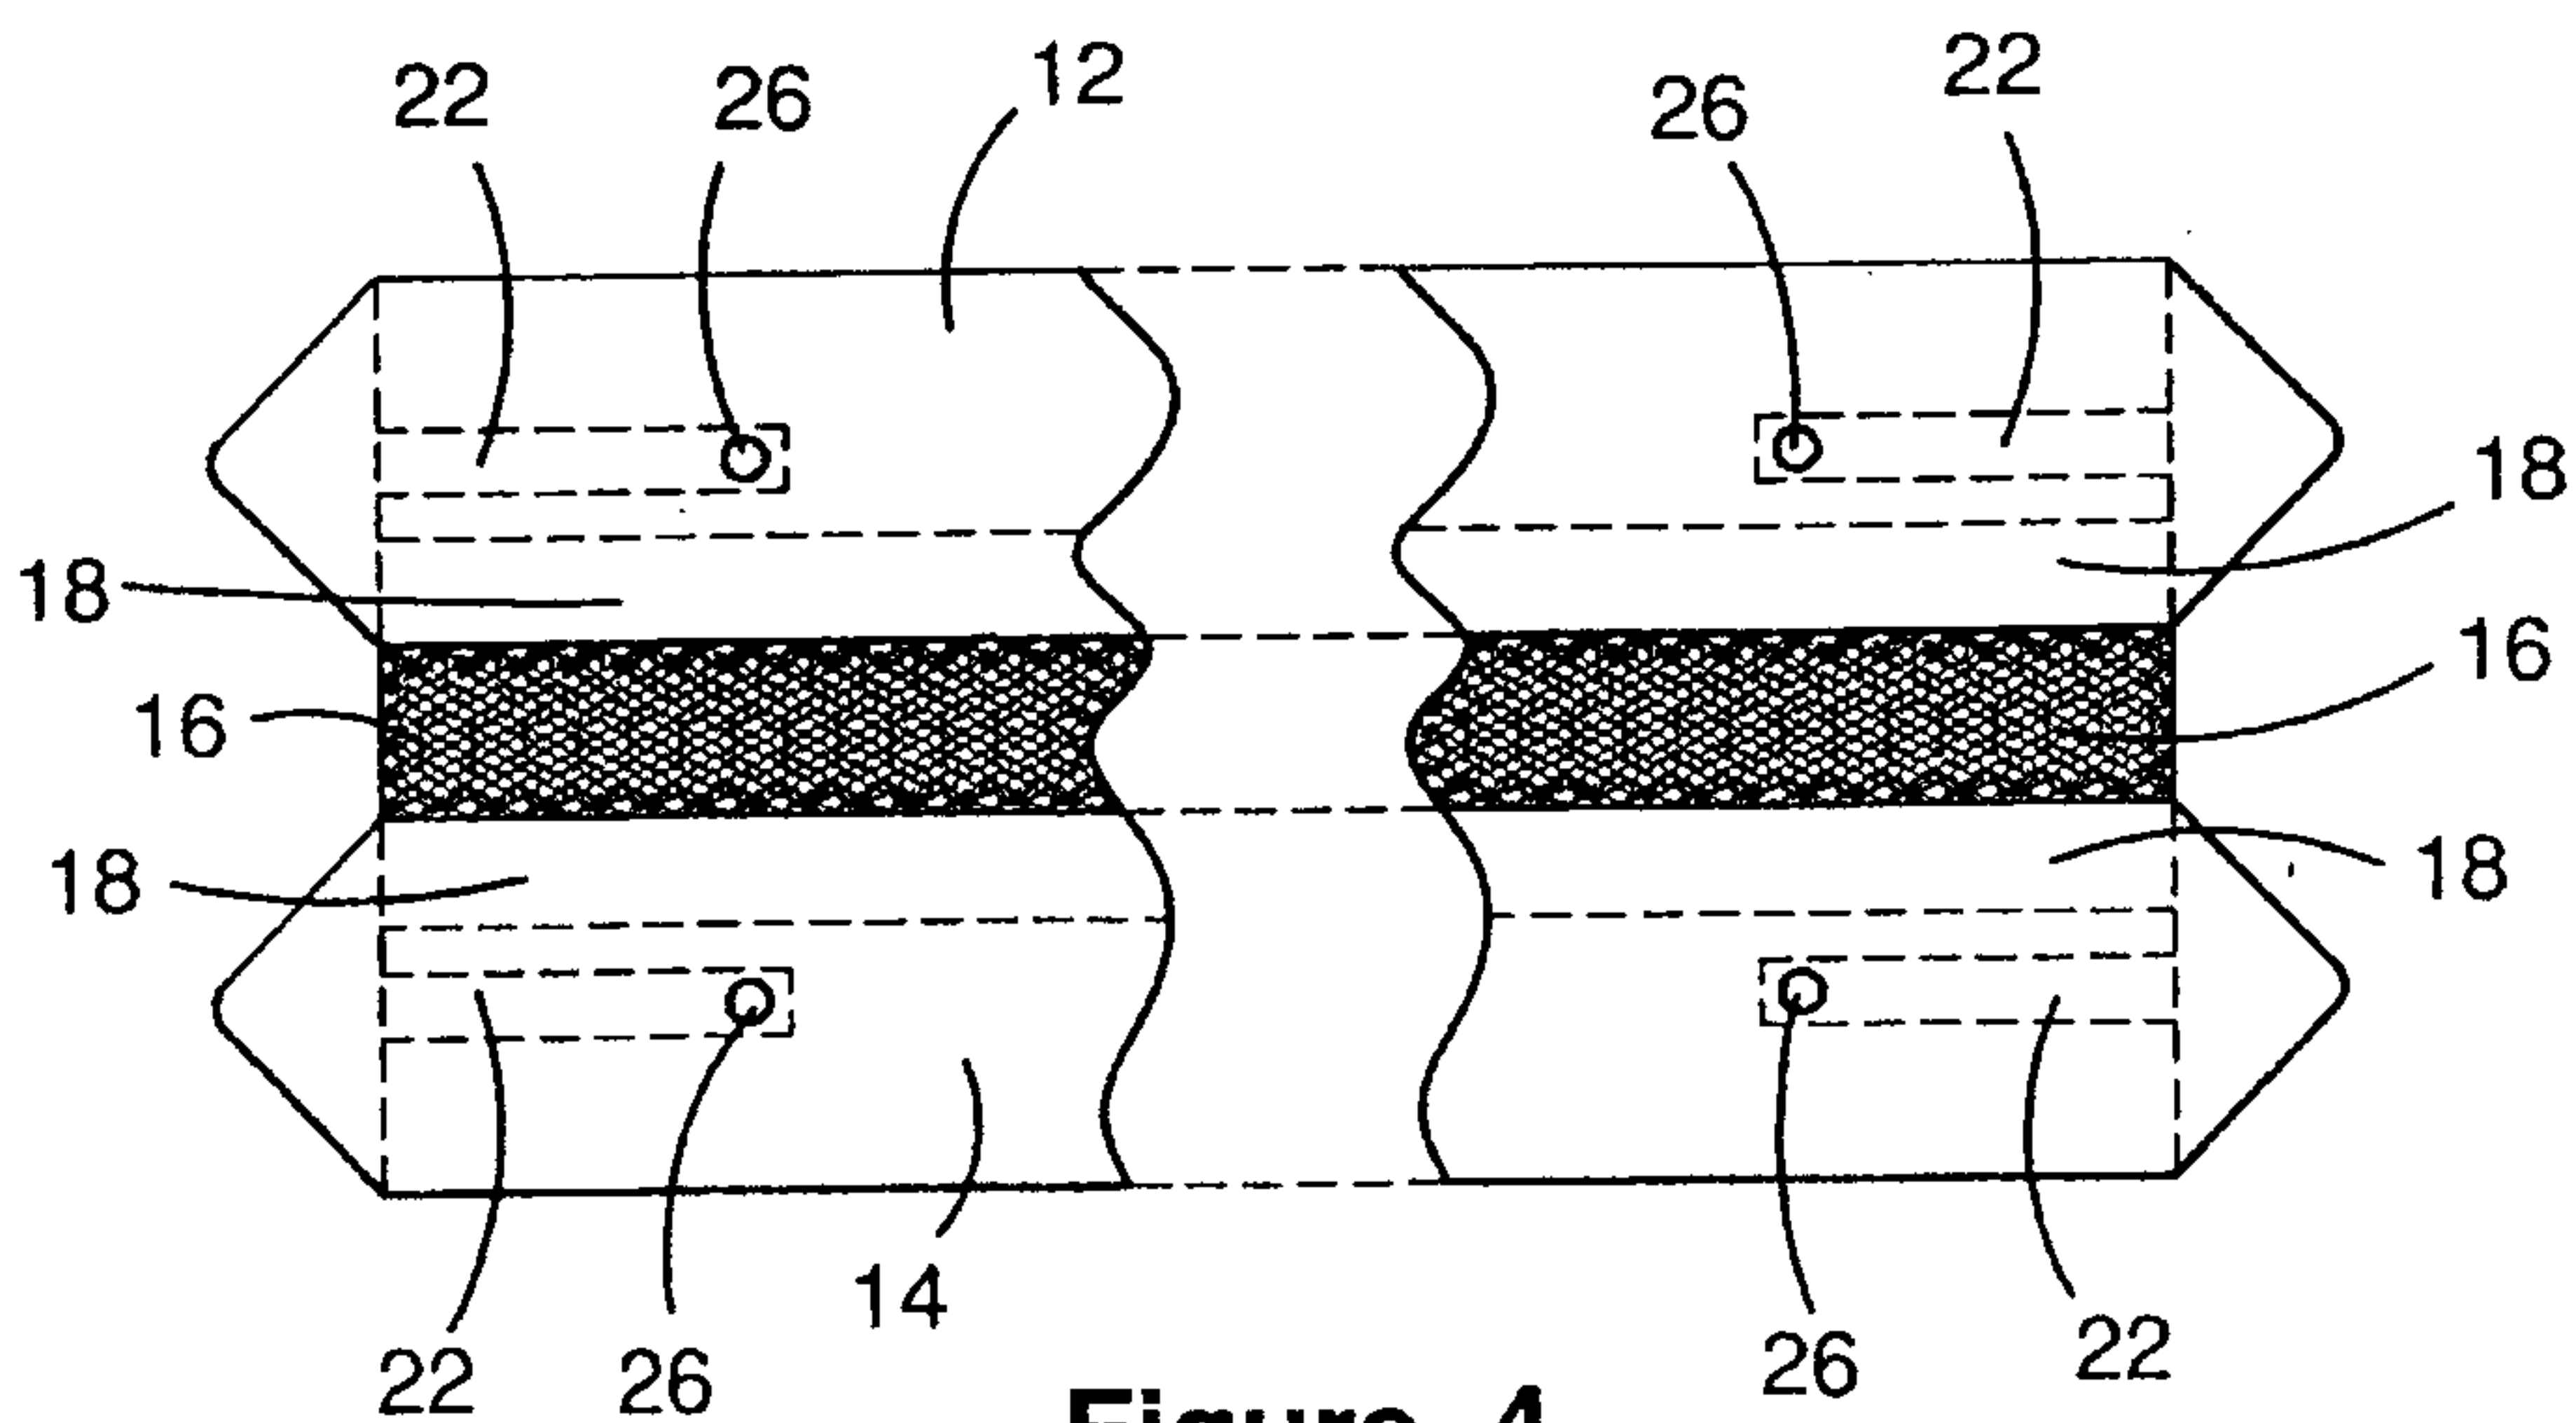


**Figure. 4**

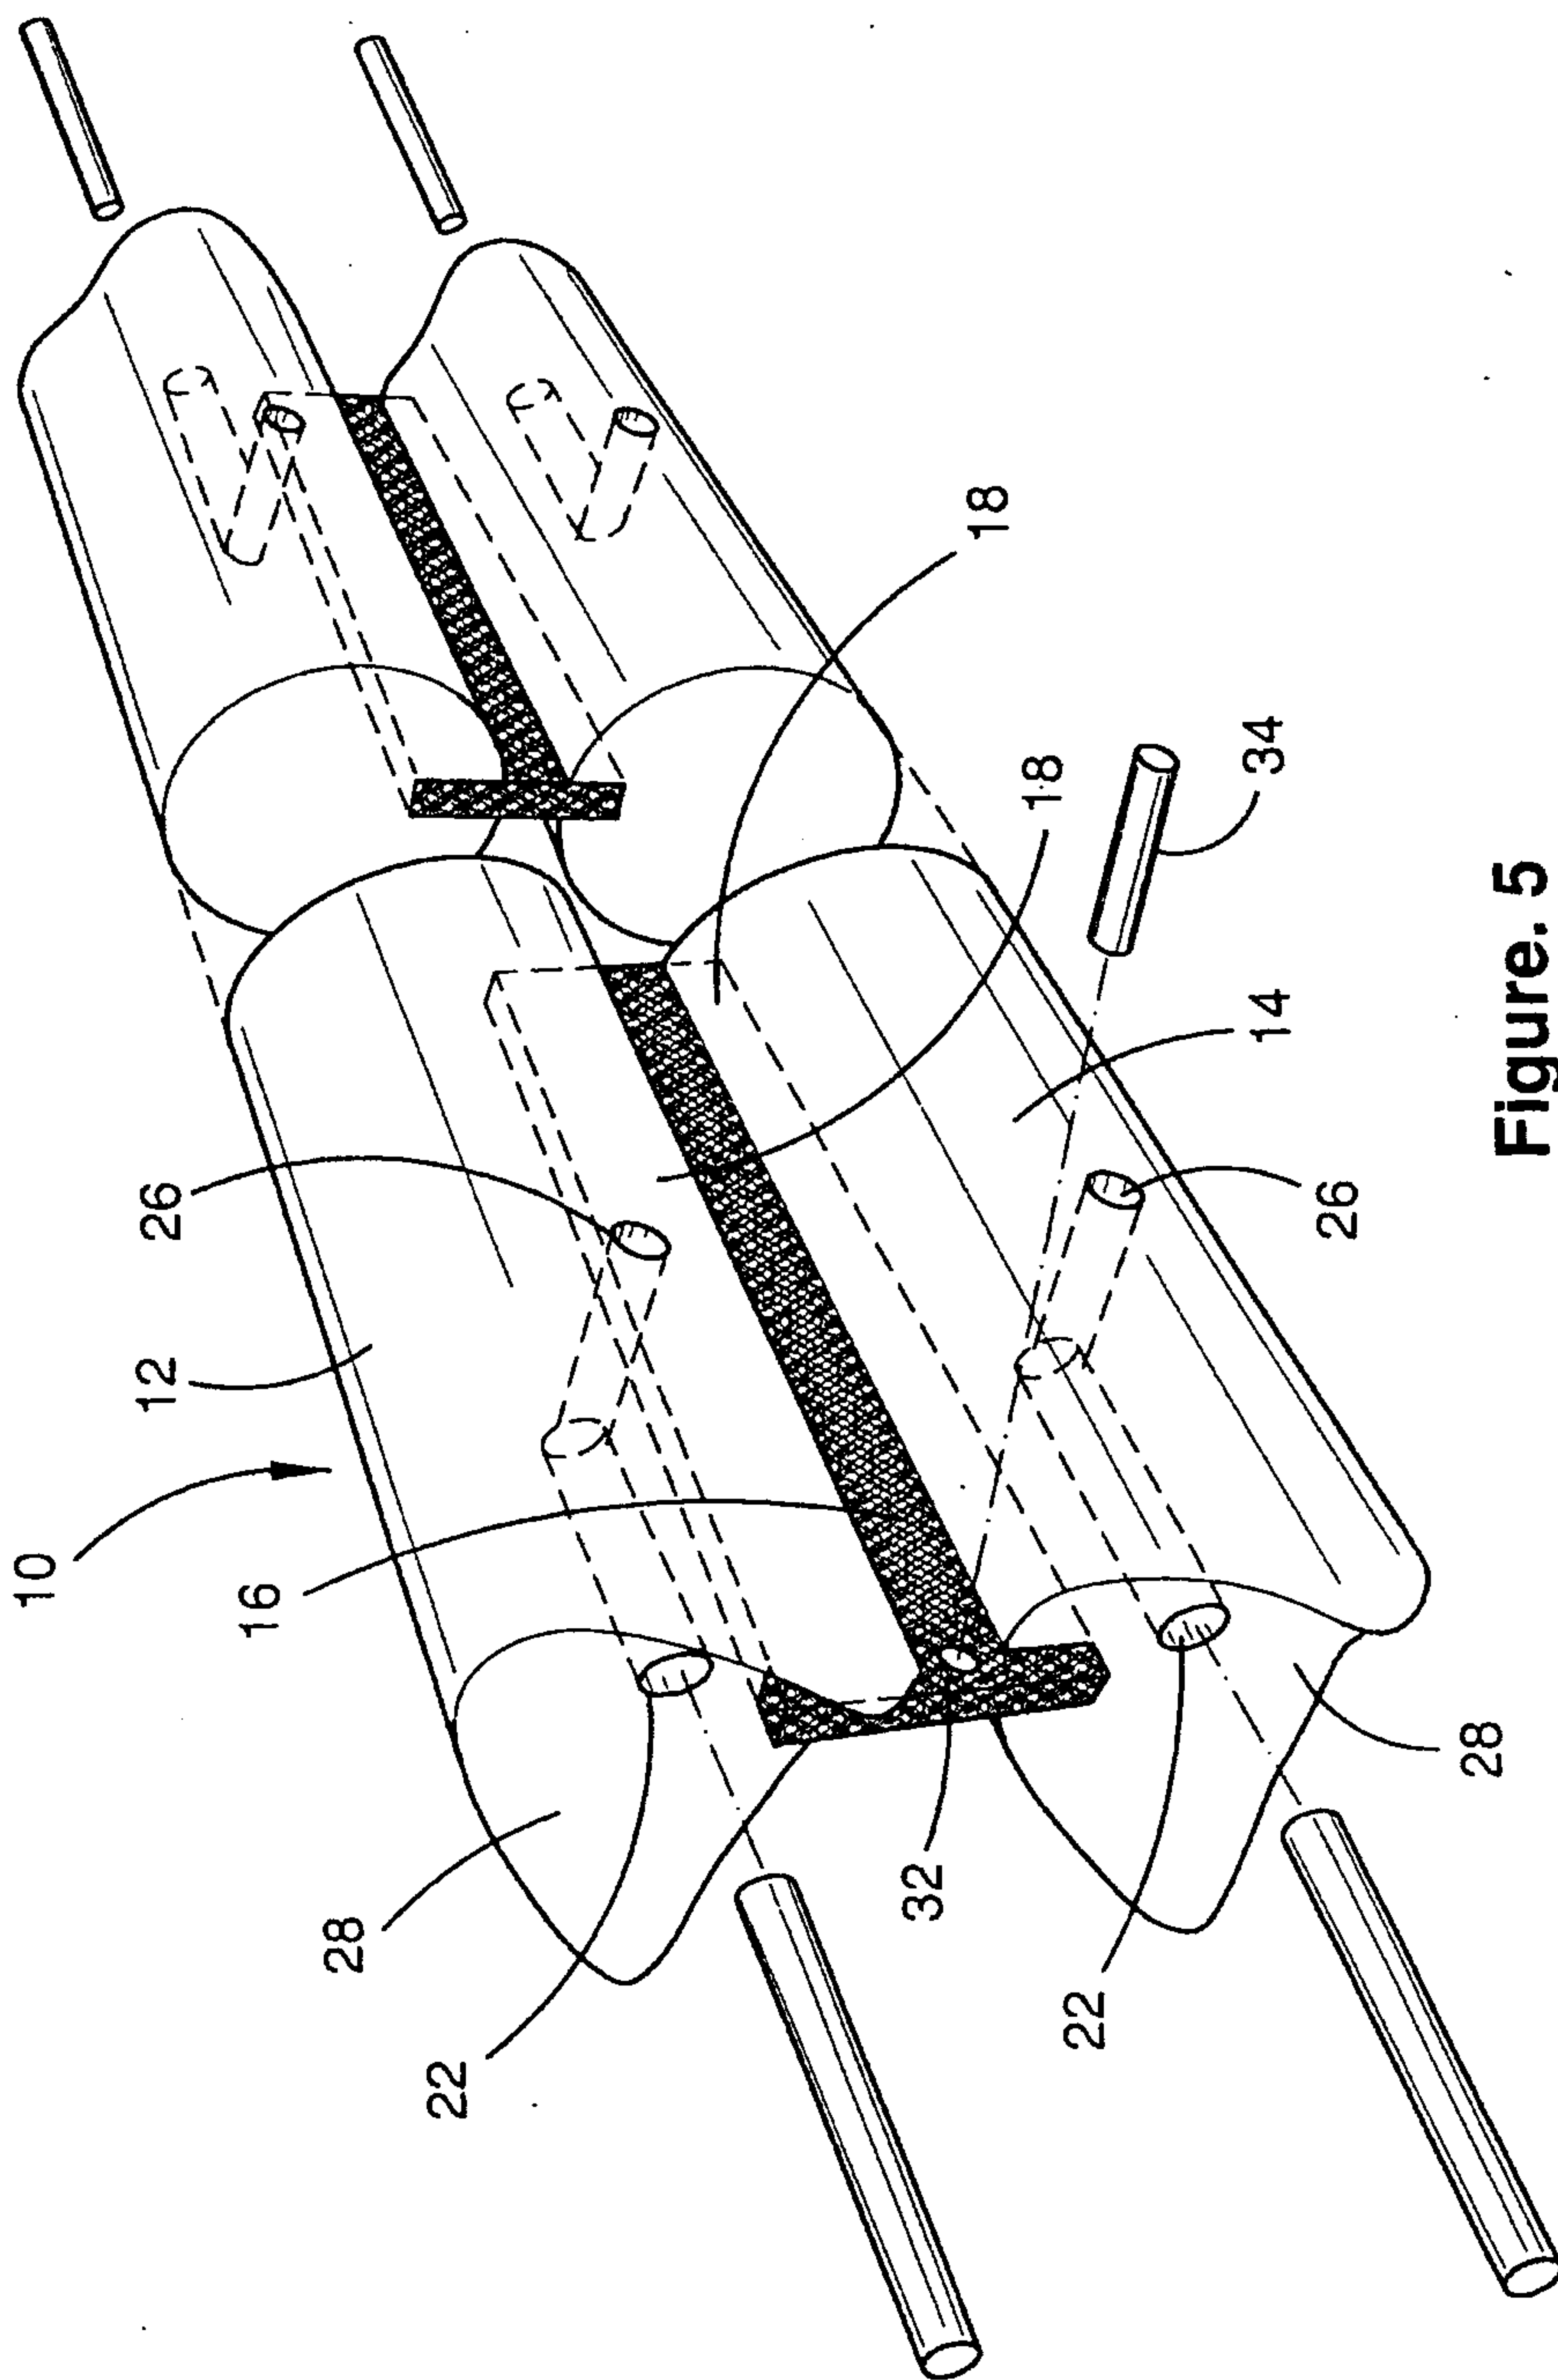


**Figure. 5**

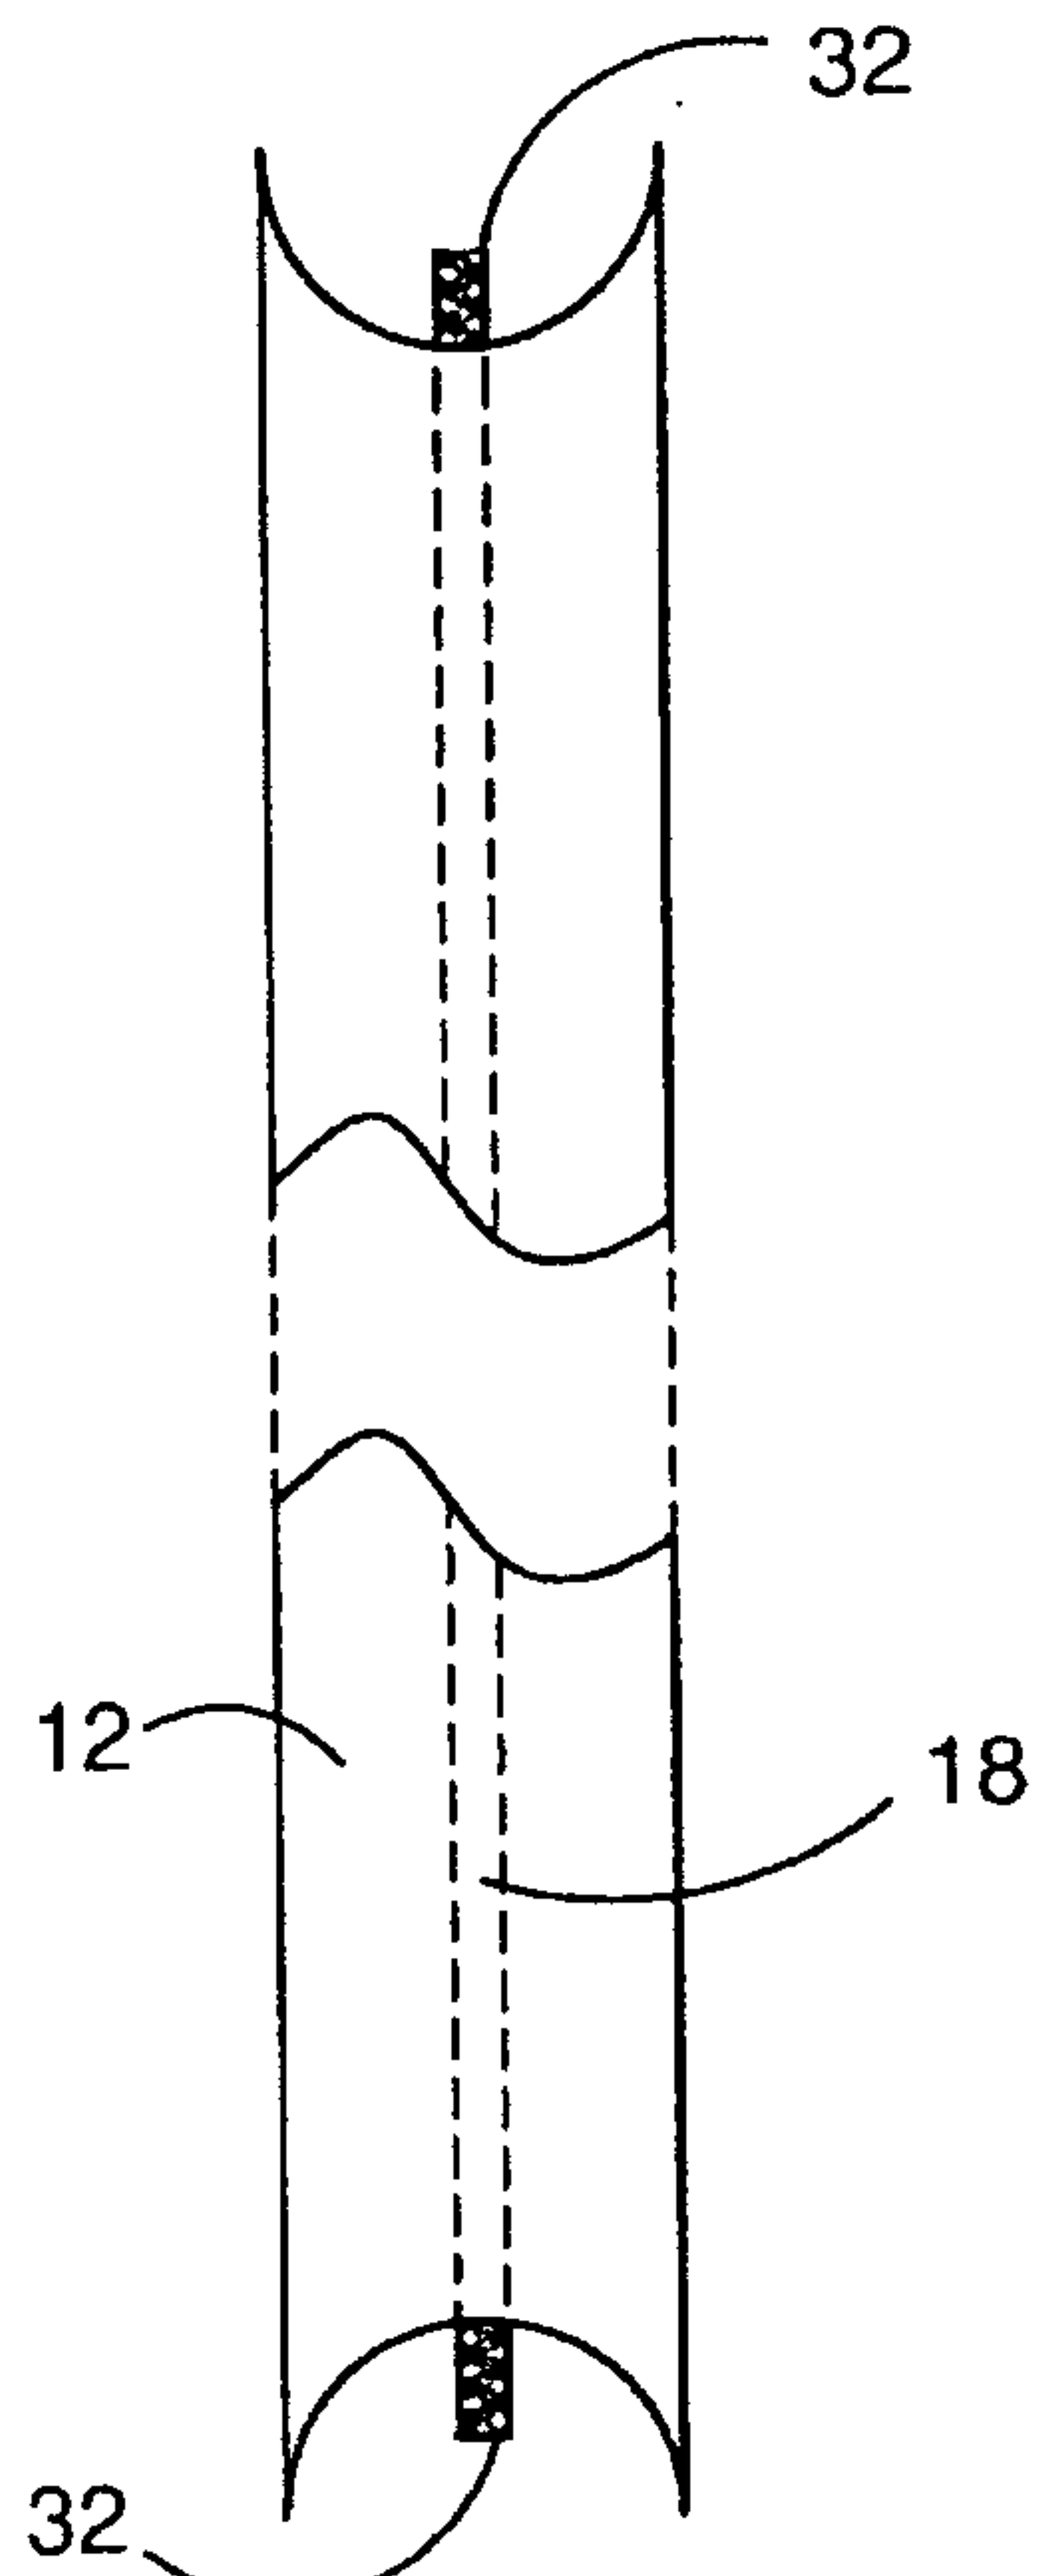


**Figure. 6**

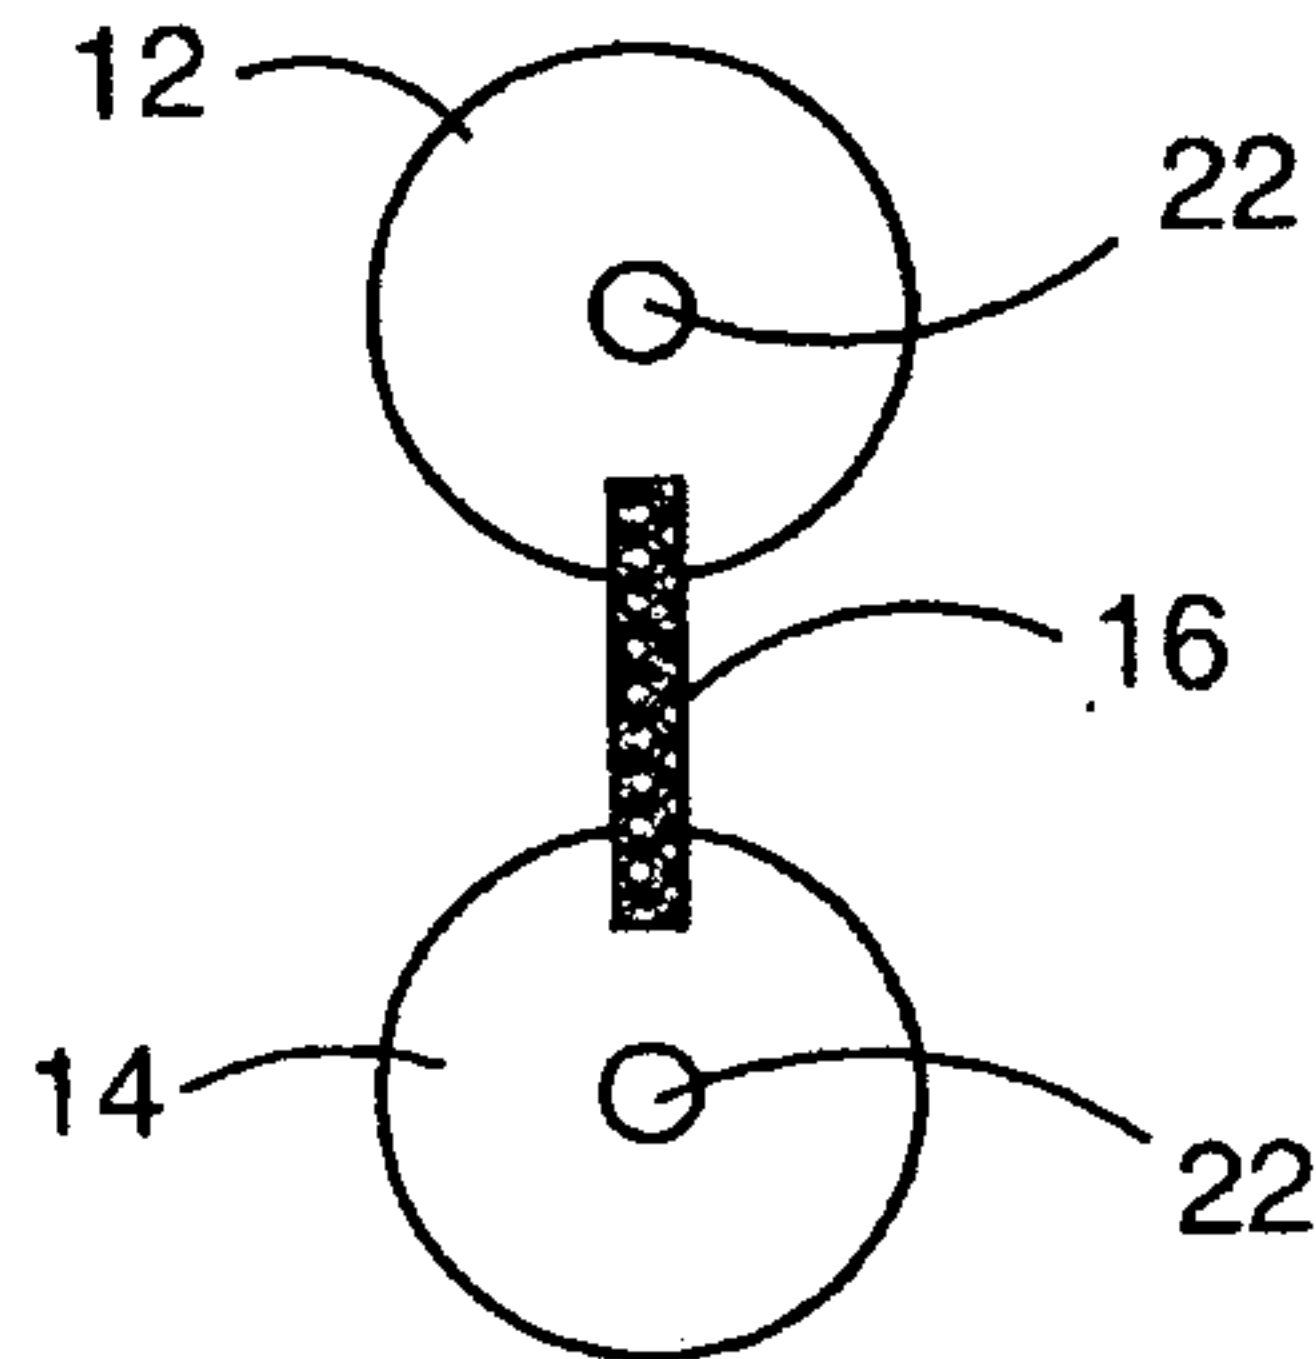

**Figure. 7**

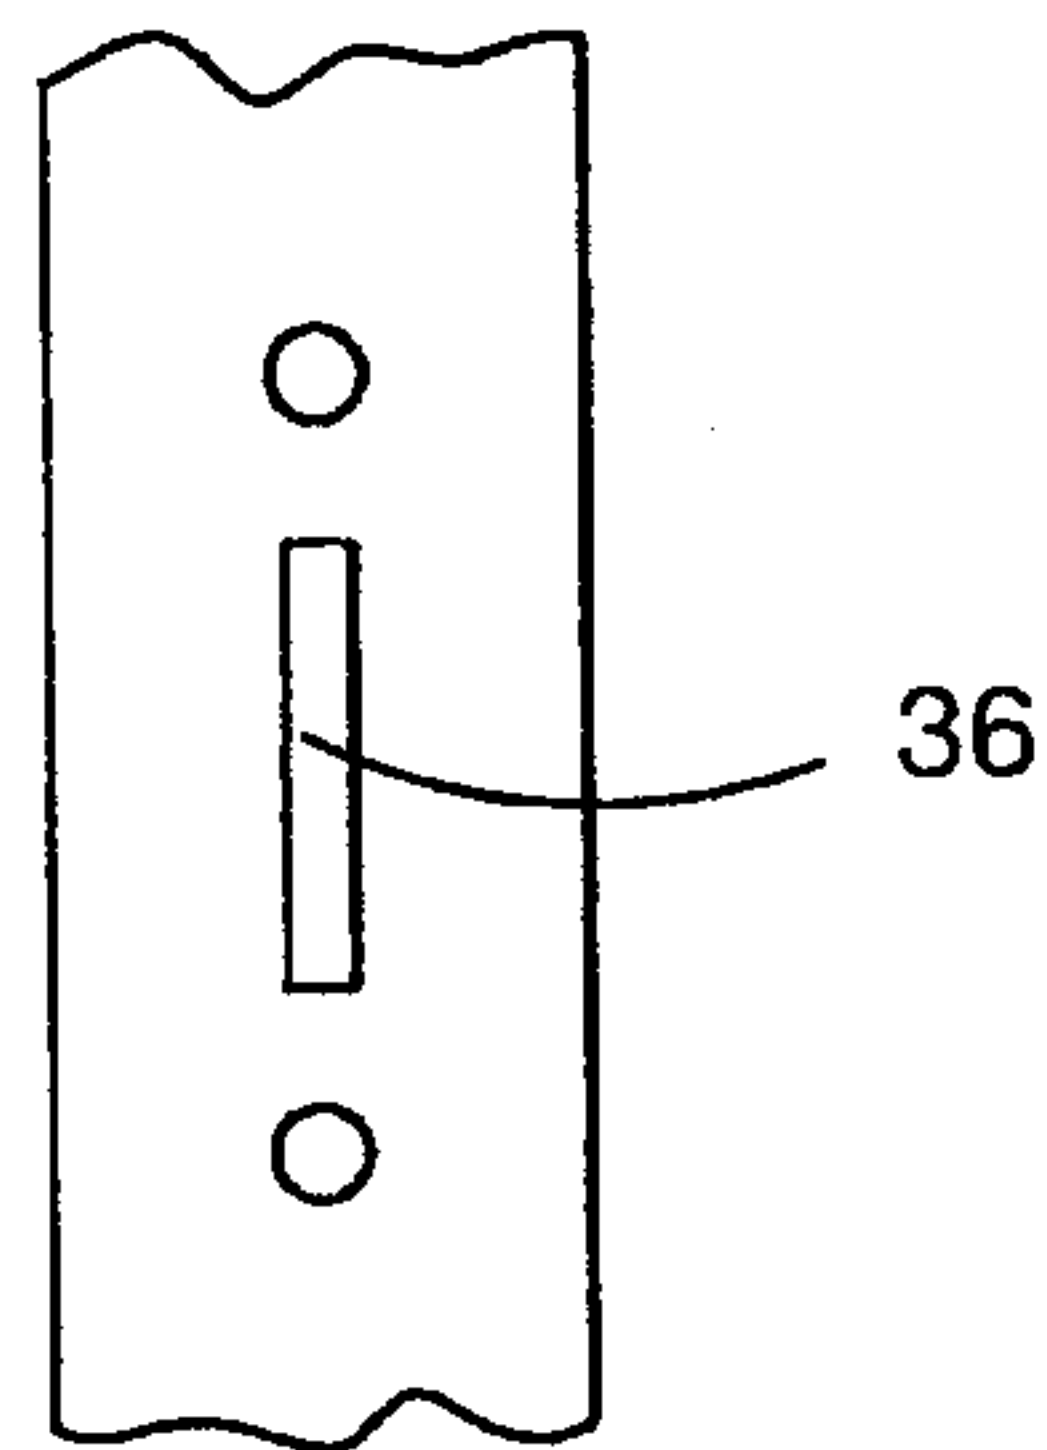

**Figure. 8**

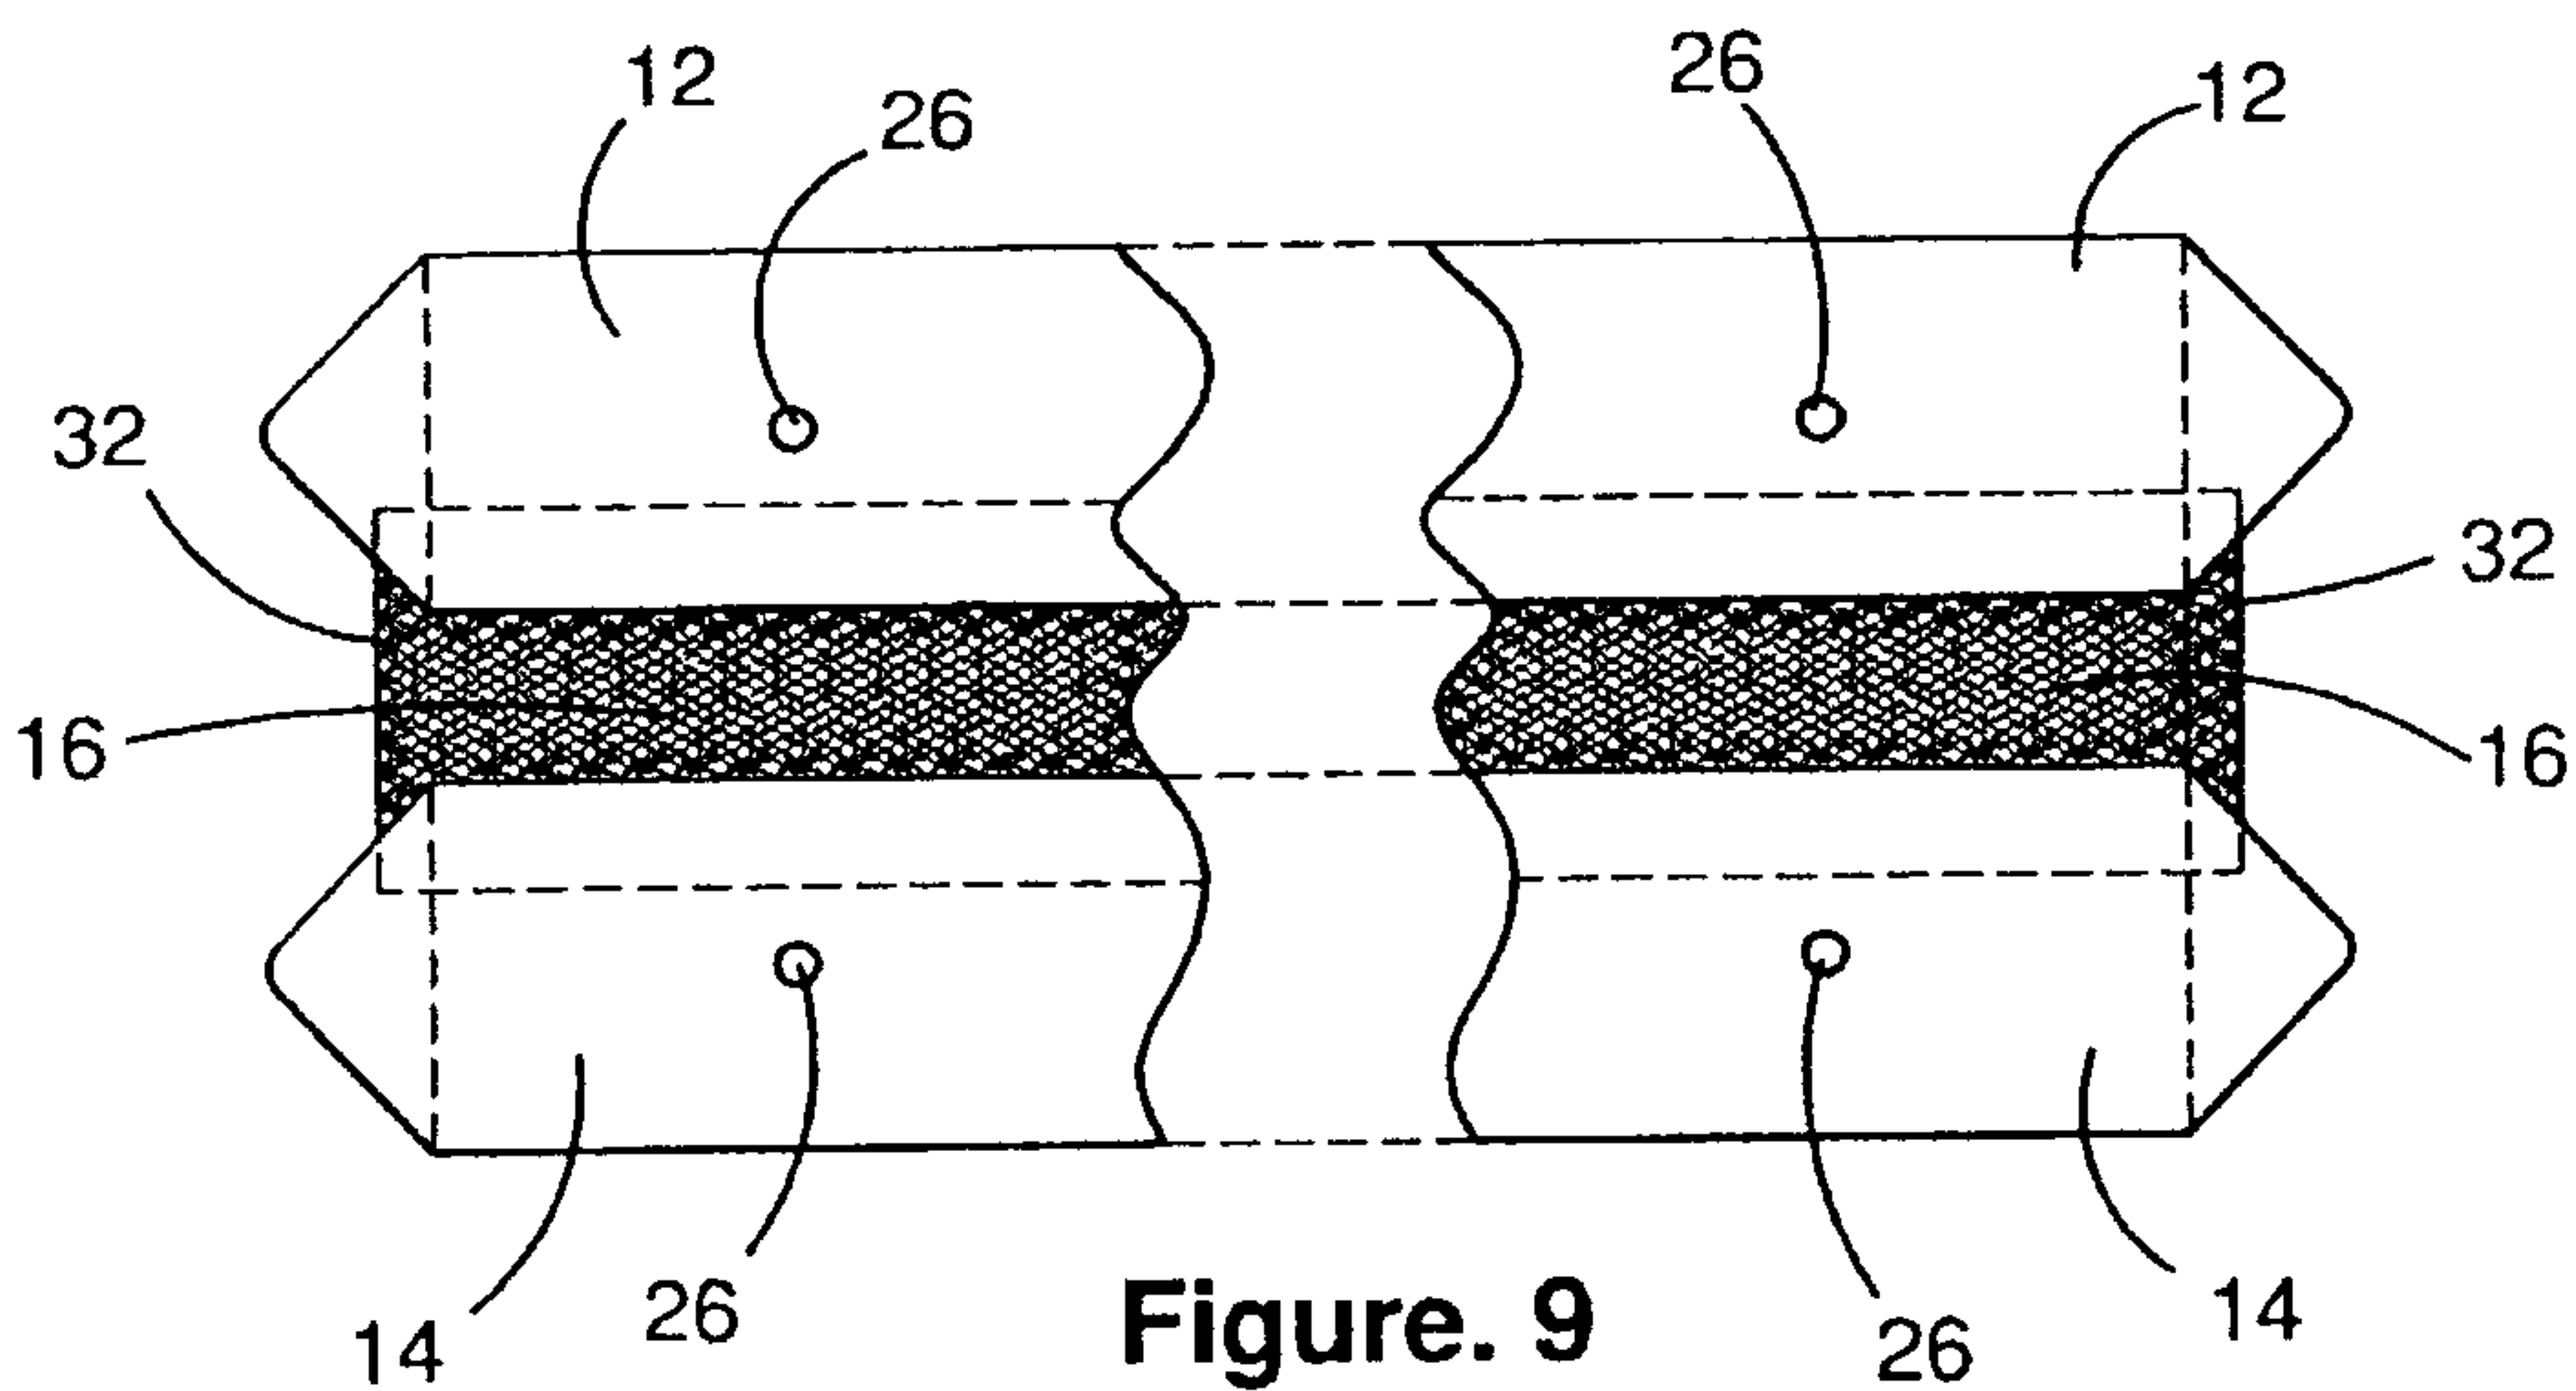

**Figure. 9**

5/6

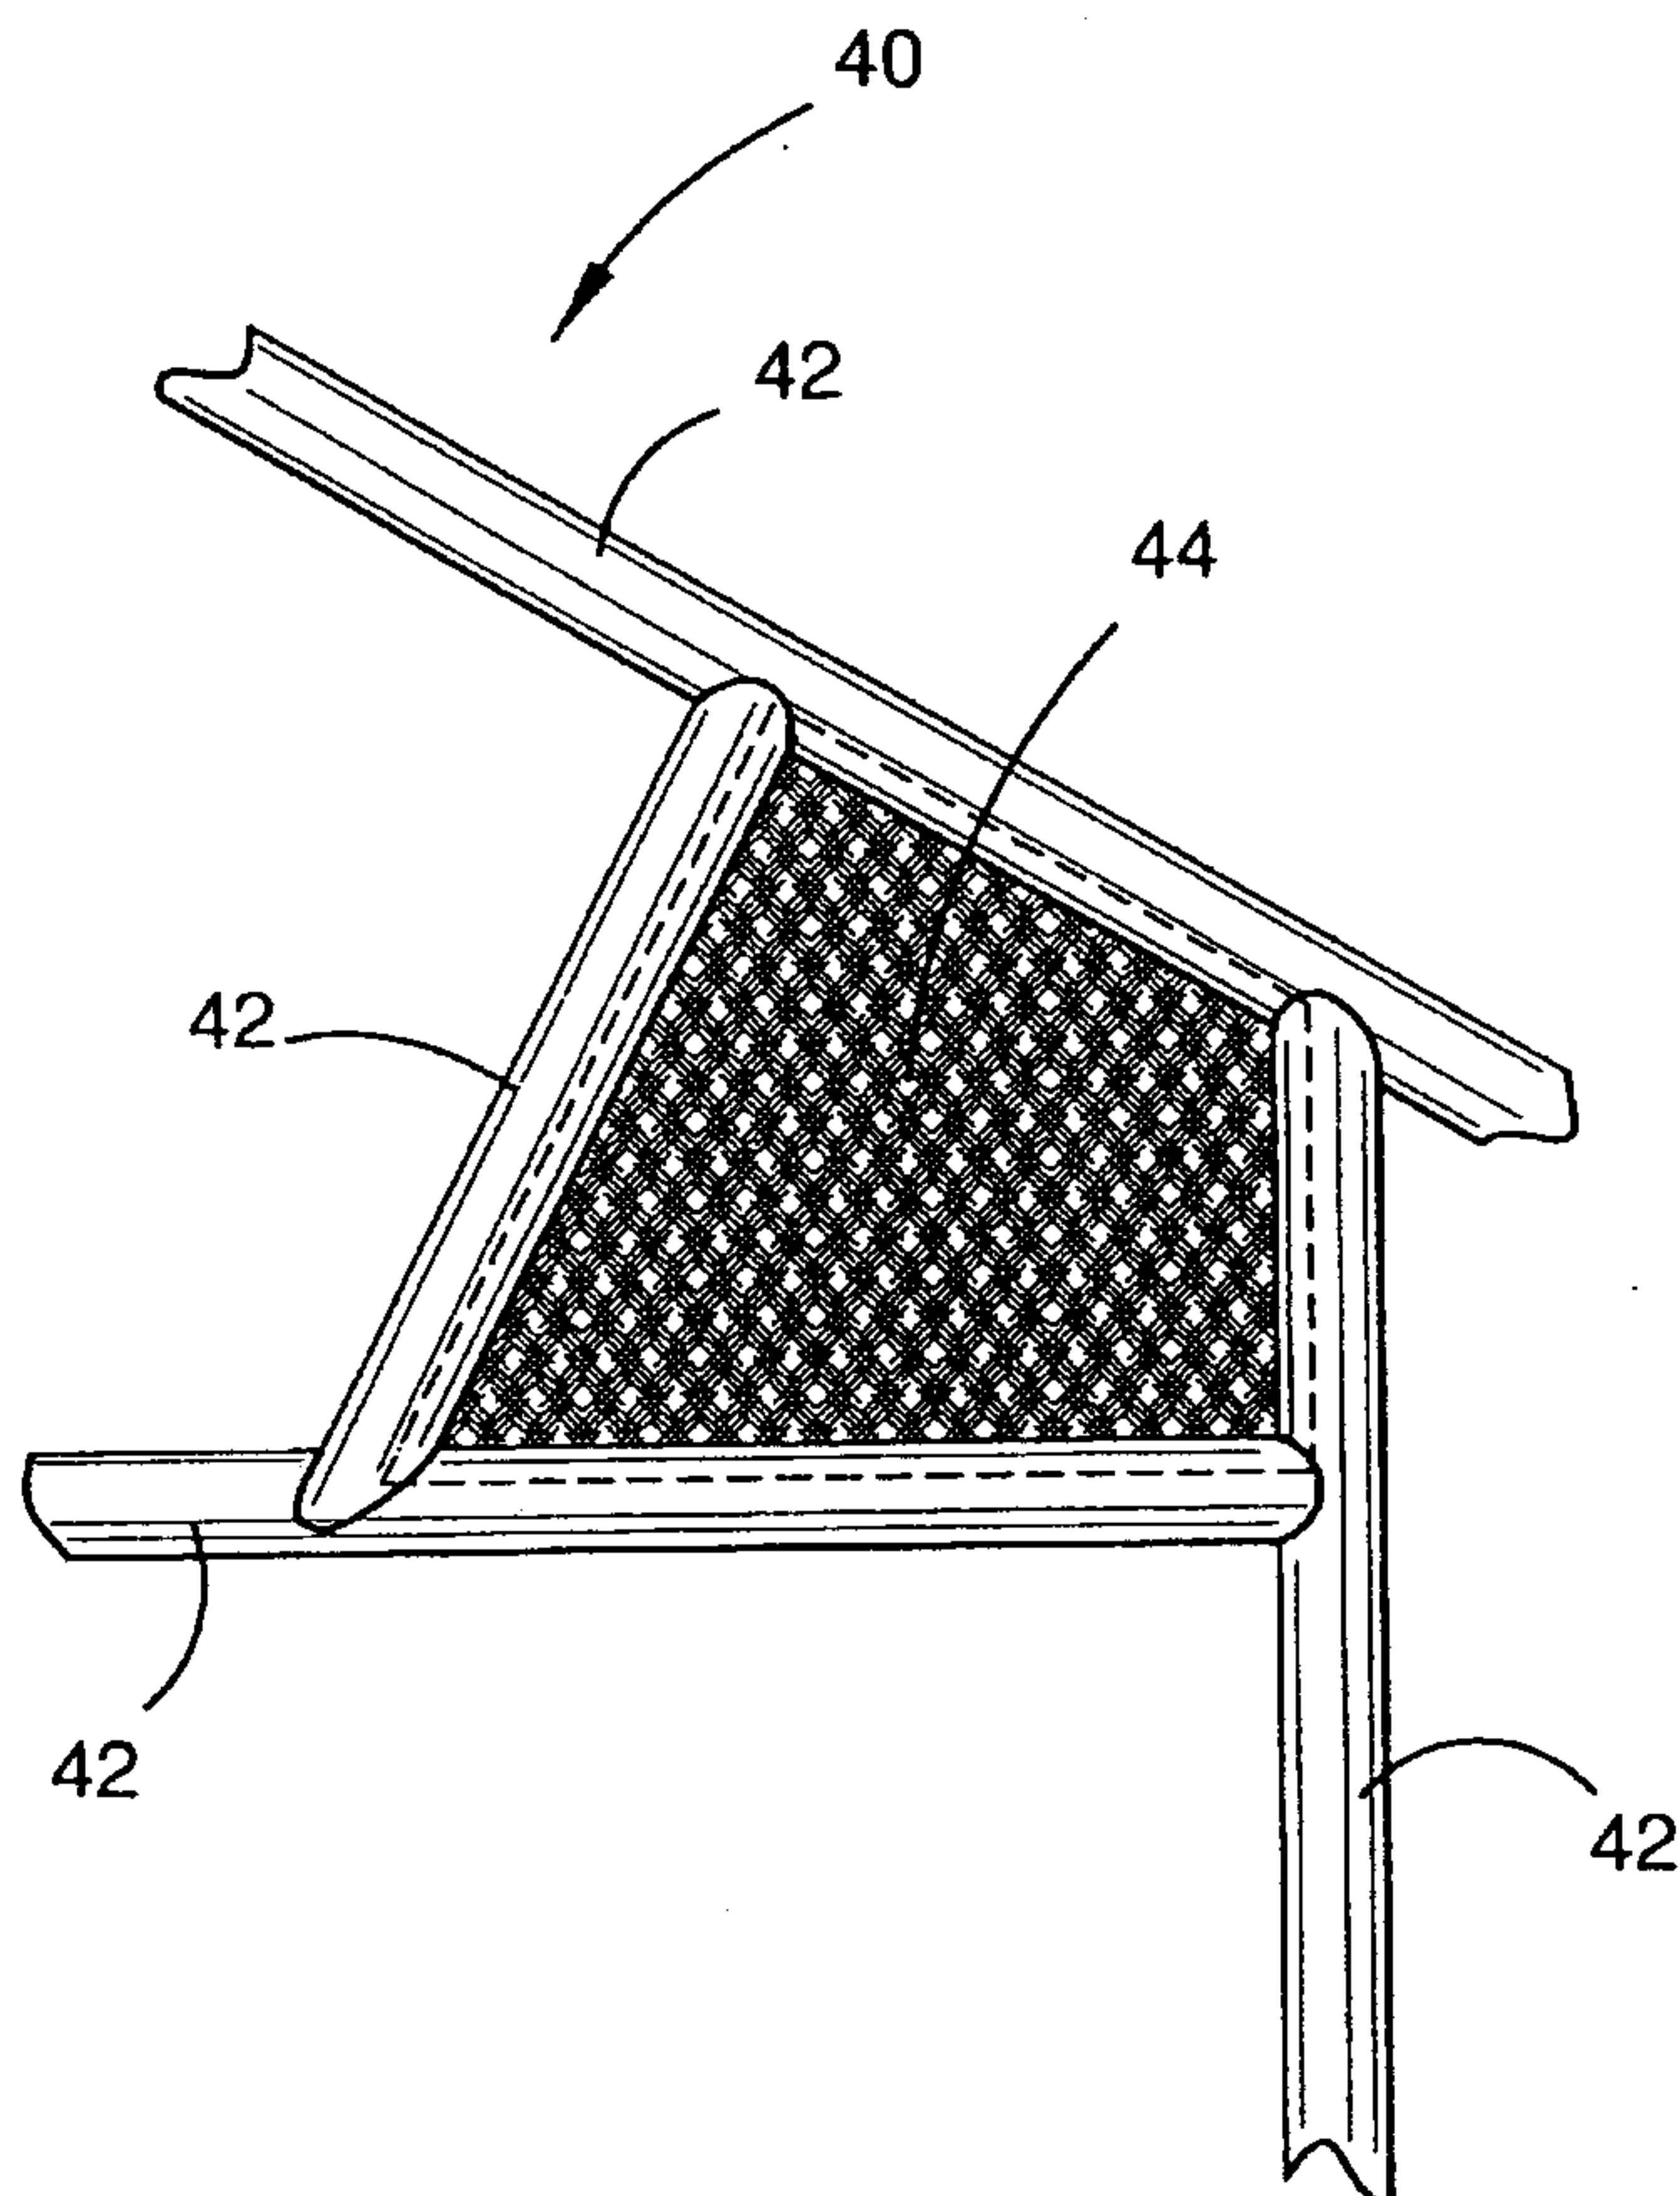


Figure. 10

6/6

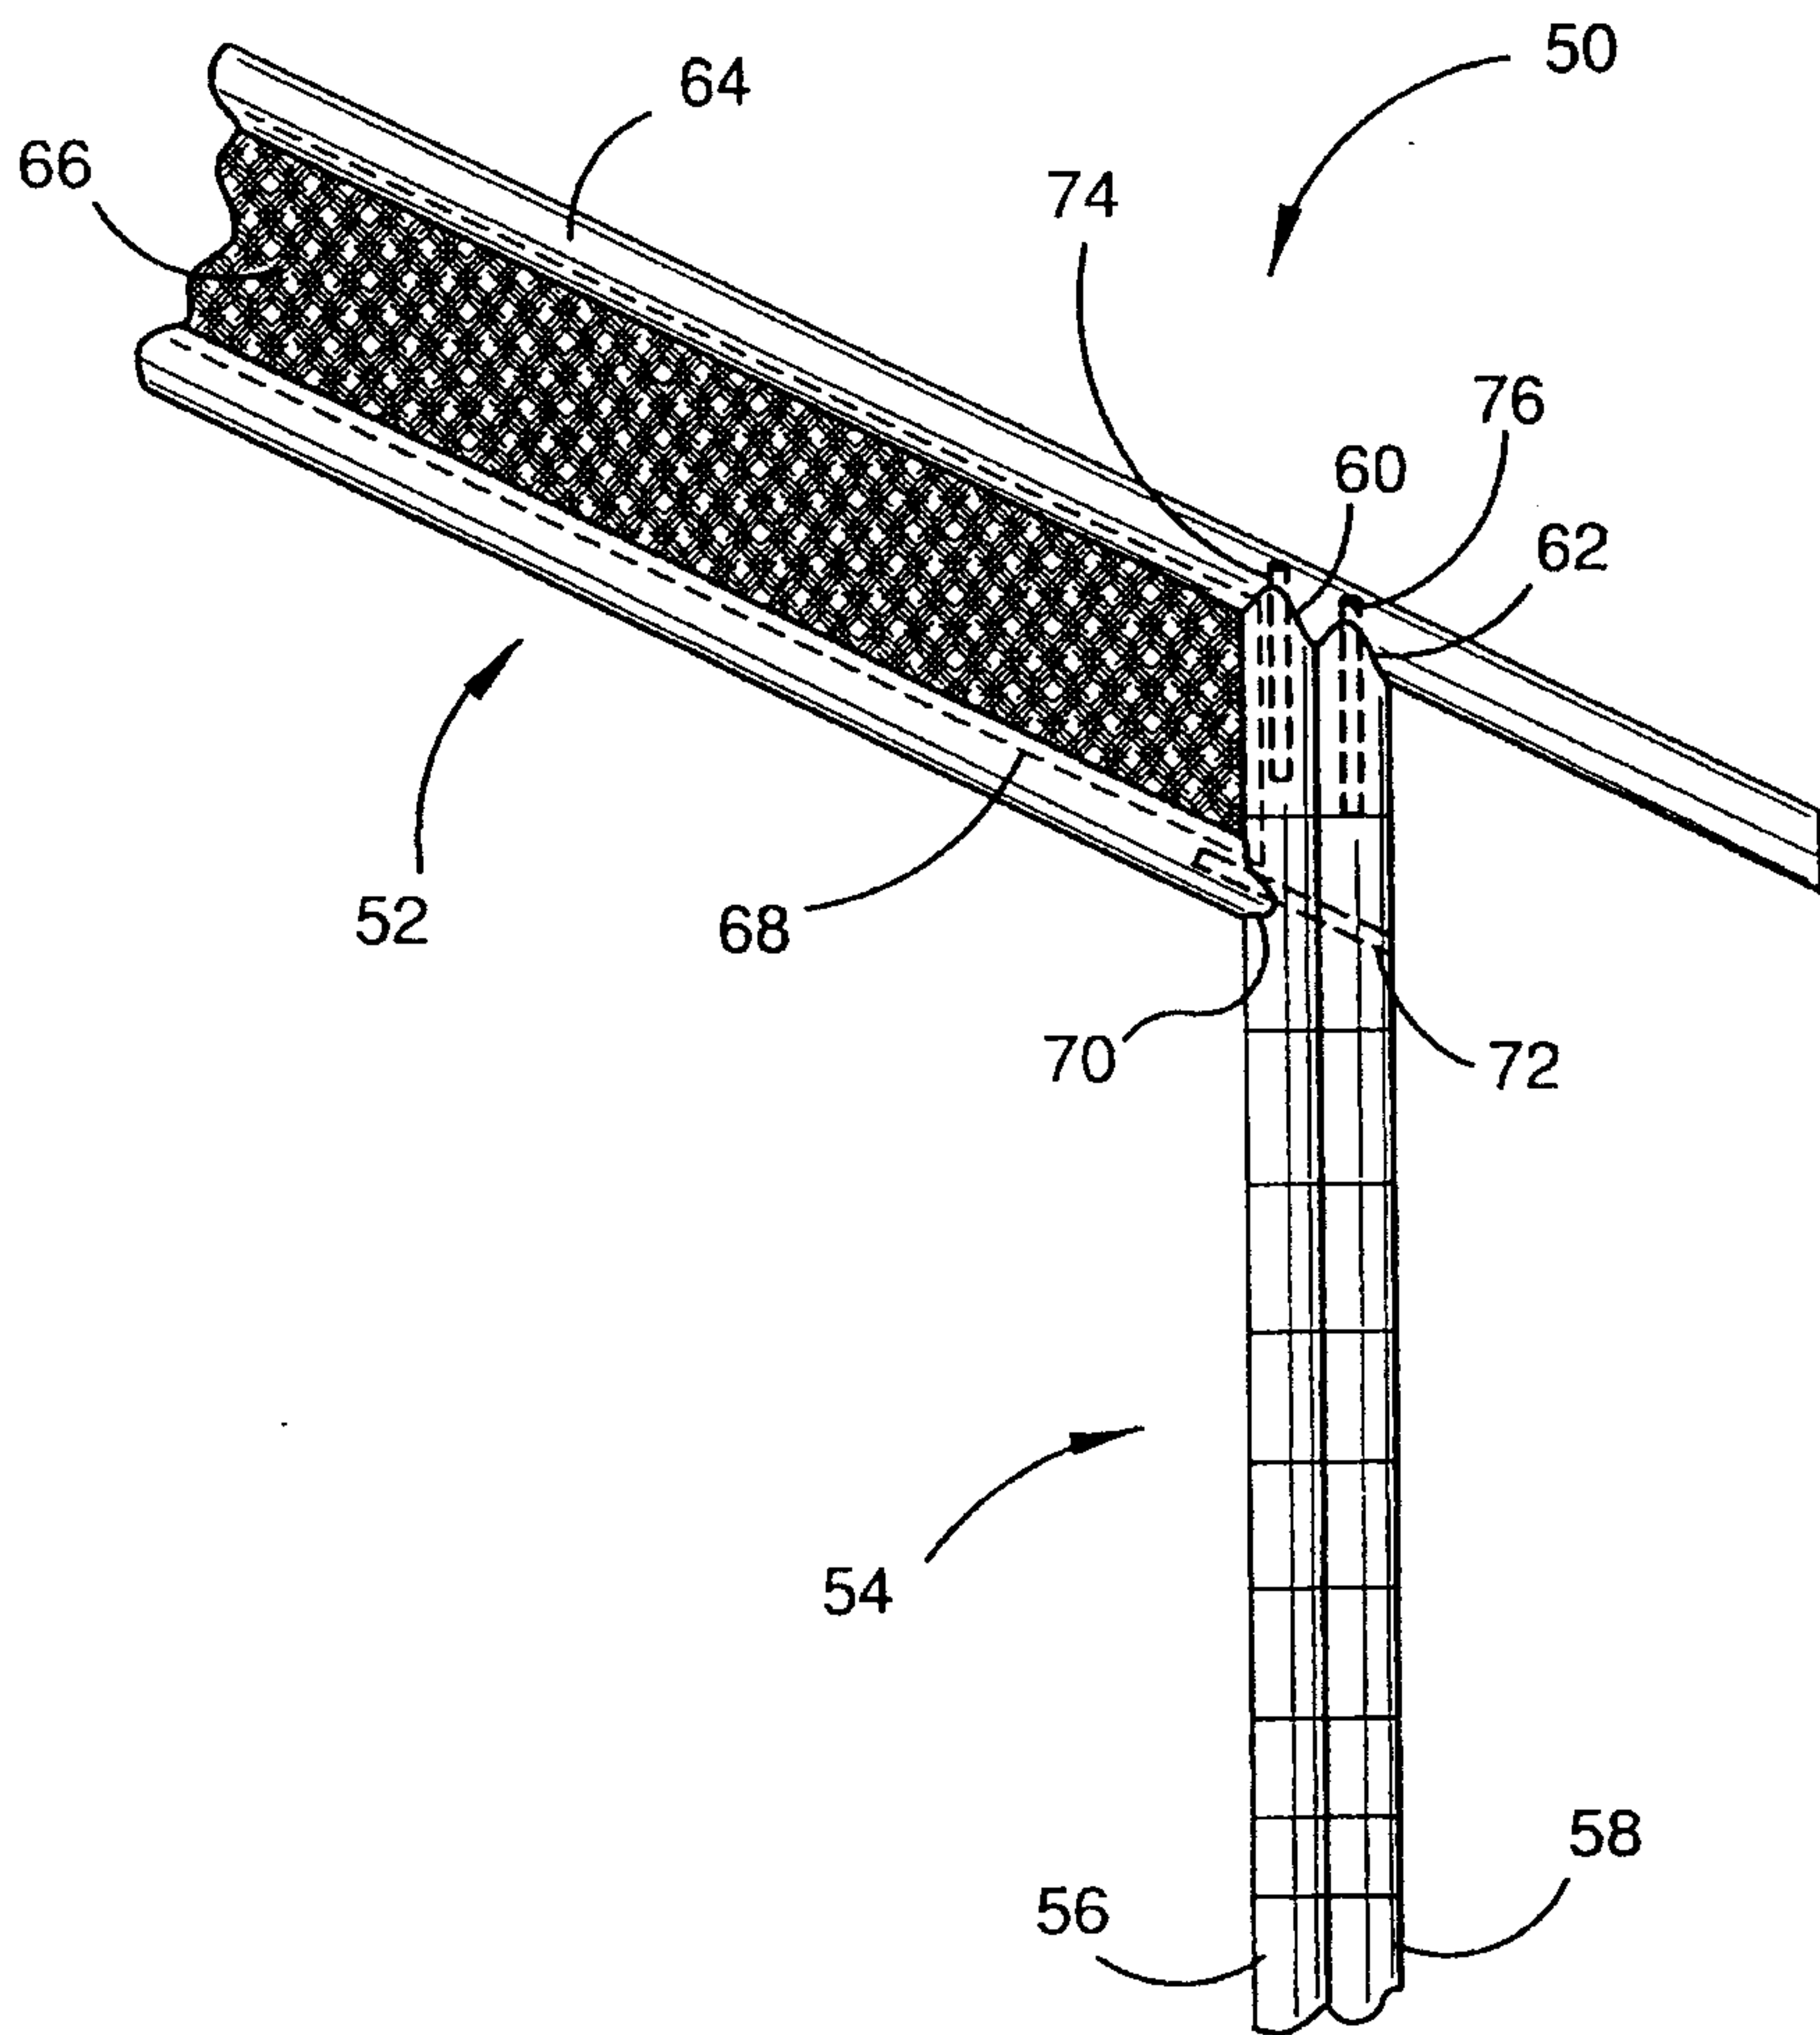


Figure. 11

