



US 20070250166A1

(19) **United States**

(12) **Patent Application Publication**
McKay

(10) **Pub. No.: US 2007/0250166 A1**

(43) **Pub. Date: Oct. 25, 2007**

(54) **FACET FUSION IMPLANTS AND METHODS OF USE**

(52) **U.S. Cl. 623/17.11**

(75) **Inventor: William F. McKay, Memphis, TN (US)**

(57) **ABSTRACT**

Correspondence Address:
COATS & BENNETT, PLLC
1400 Crescent Green, Suite 300
Cary, NC 27518 (US)

An implant is insertable onto a vertebral facet joint includes a body with an inner surface that mates with one or both articular processes of the facet joint. The inner surface may define an interior cavity that accepts at least a portion of an inferior articular process and a superior articular process forming the facet joint. The body may be constructed of a bone growth material that fuses with the articular processes. The implant may help retain bone growth promoting substance that is inserted between or on articulating surfaces of the facet joint. A receiving portion of an exterior surface of one or both articular process may be prepared to stimulate bone growth. The implant may be placed onto the receiving portion to cover an exterior junction between or on the articulating surfaces of the facet joint. The implant may be secured to one or both of the articular processes.


(73) **Assignee: SDGI Holdings, Inc.**

(21) **Appl. No.: 11/410,803**

(22) **Filed: Apr. 25, 2006**

Publication Classification

(51) **Int. Cl.**
A61F 2/44 (2006.01)

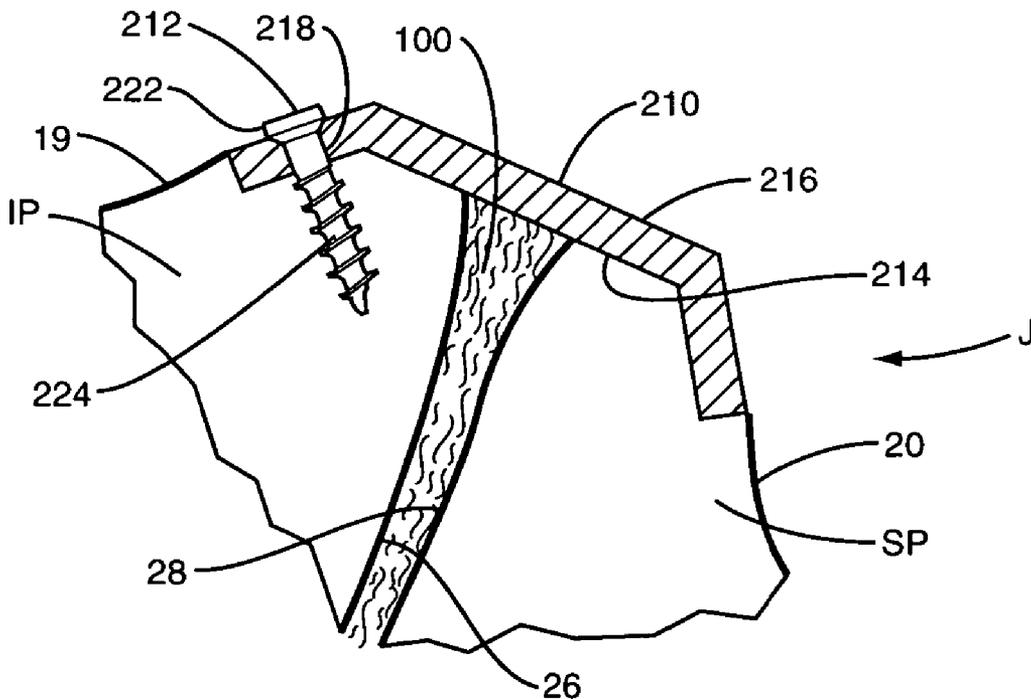

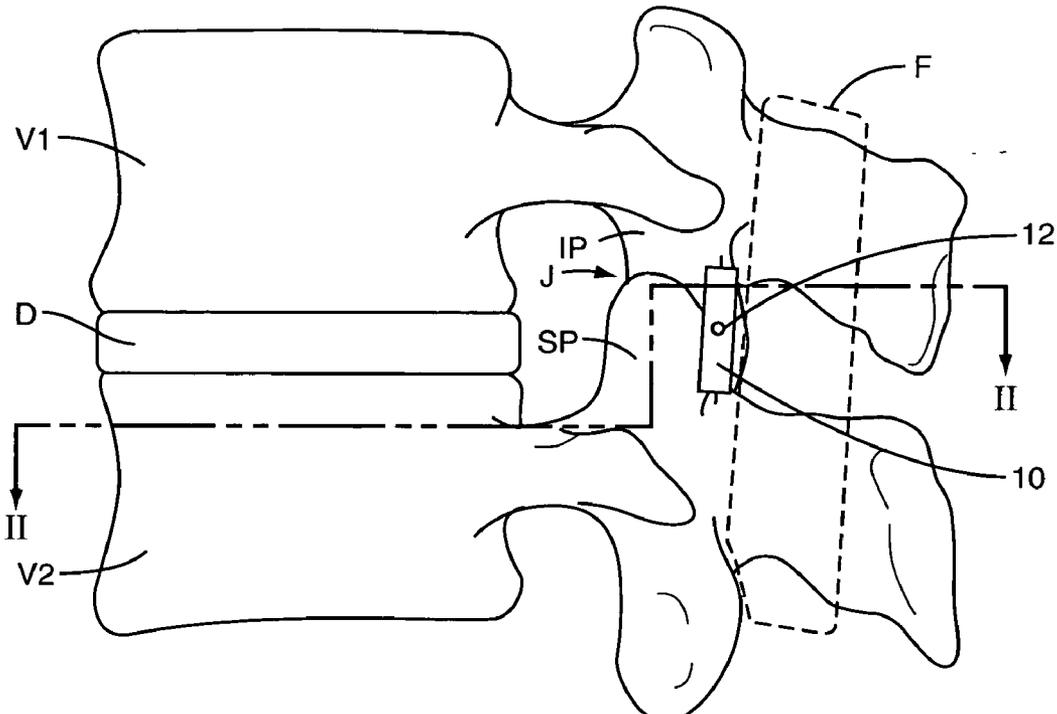


FIG. 1

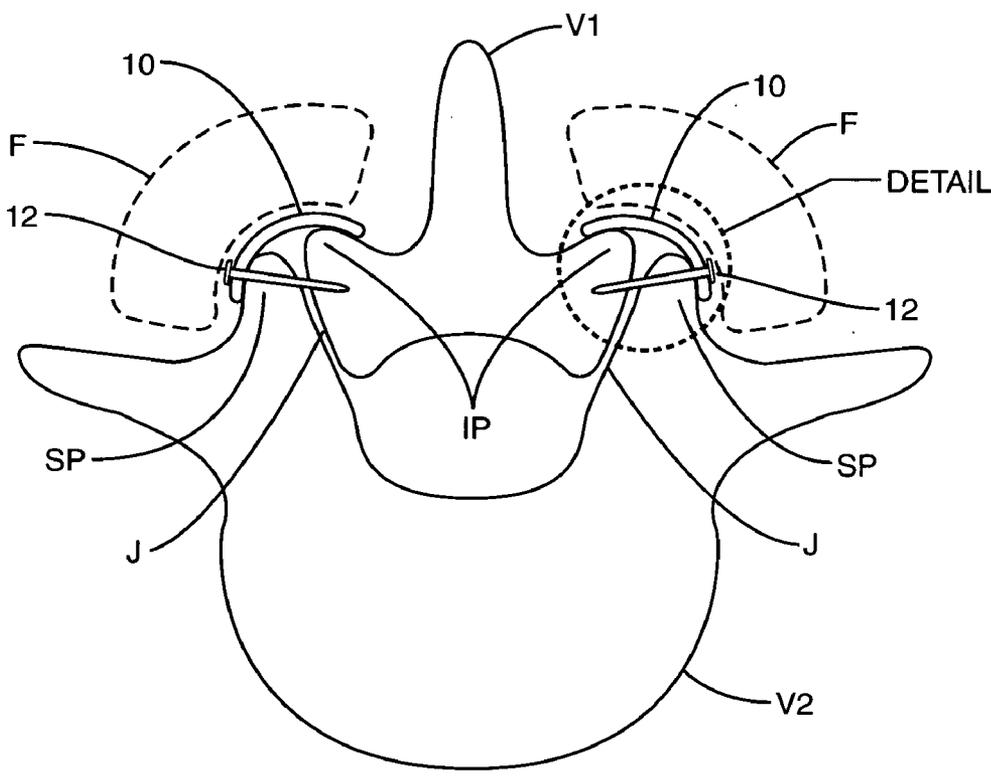


FIG. 2

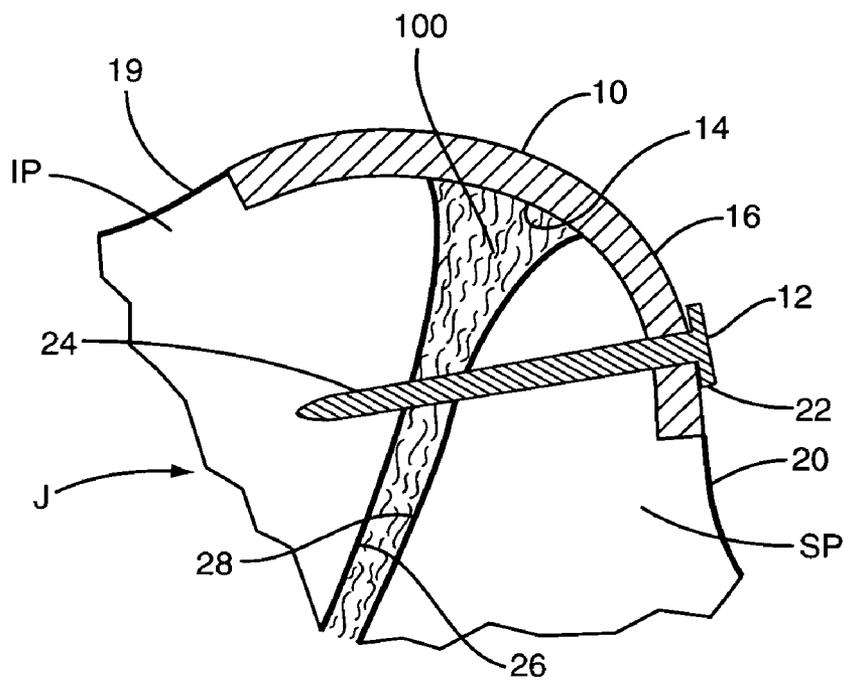


FIG. 6

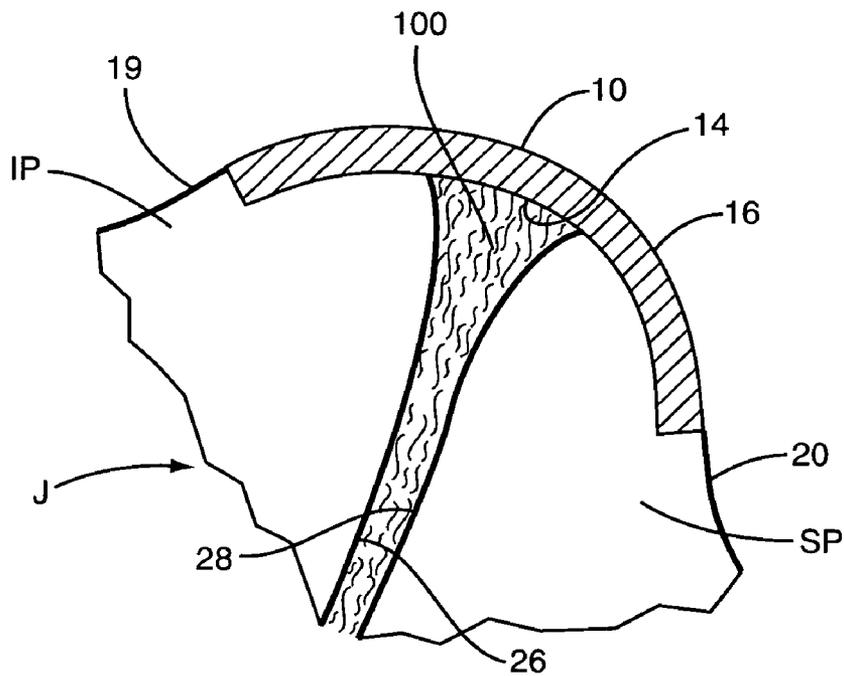


FIG. 7

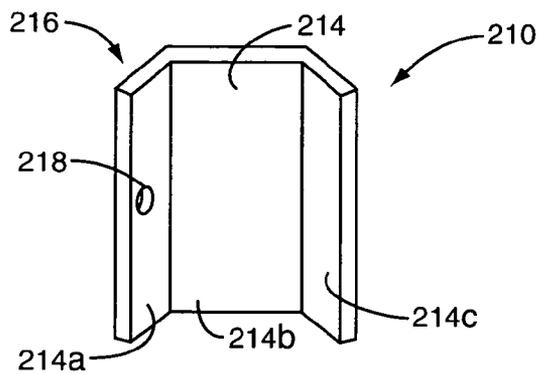


FIG. 8

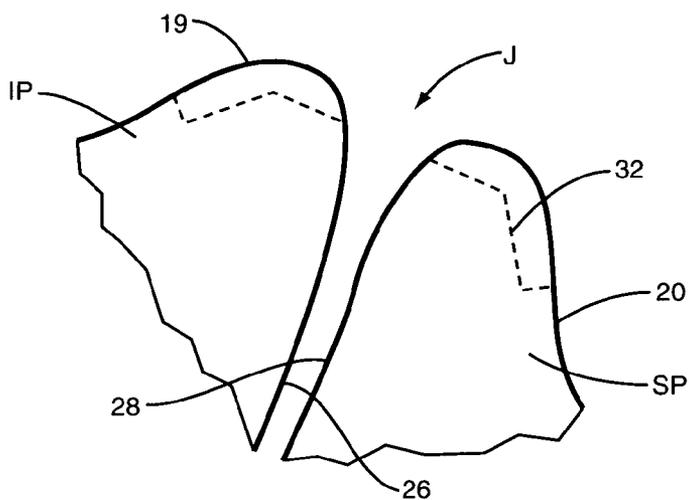


FIG. 9

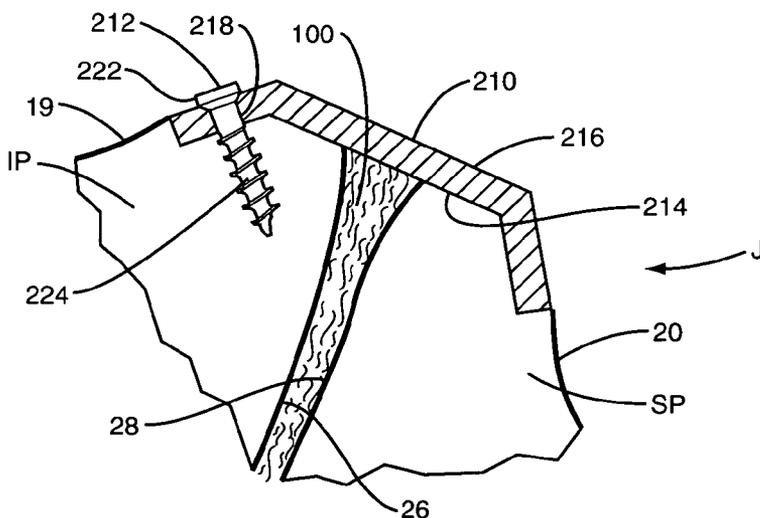


FIG. 10

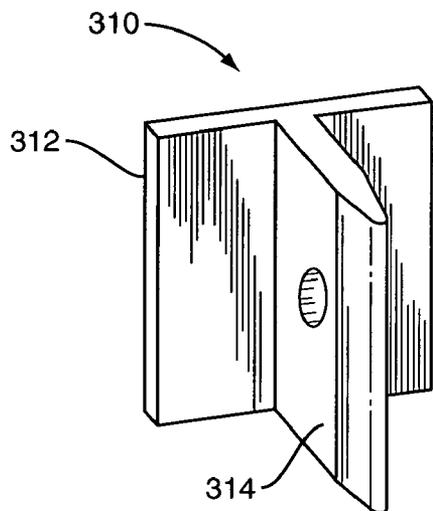


FIG. 11

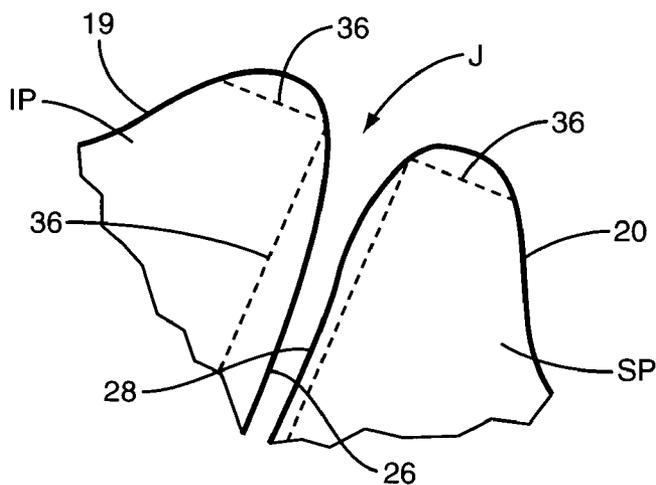


FIG. 12

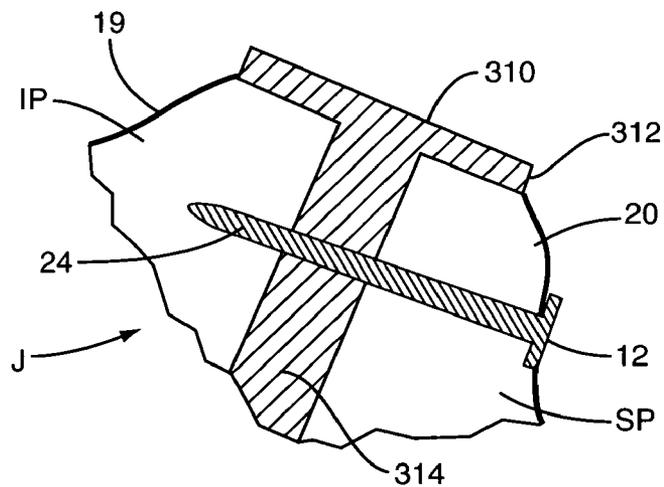


FIG. 13

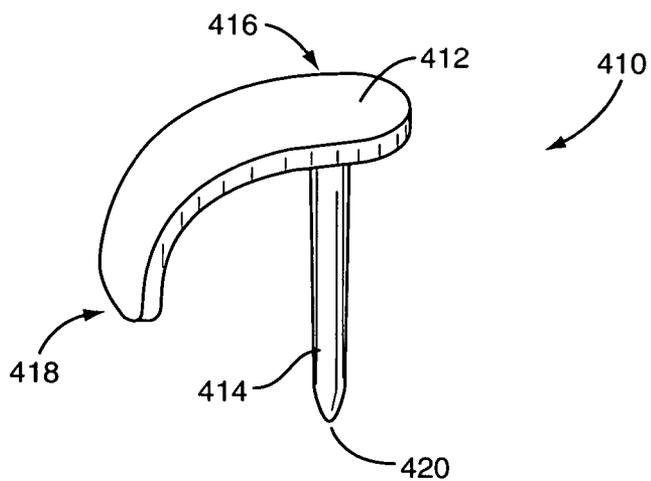


FIG. 14

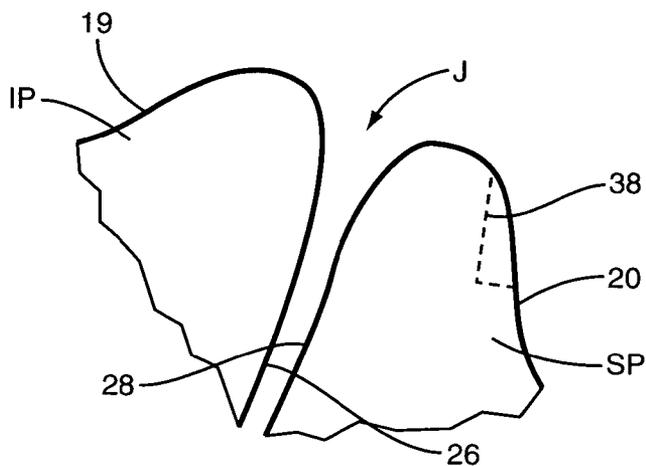


FIG. 15

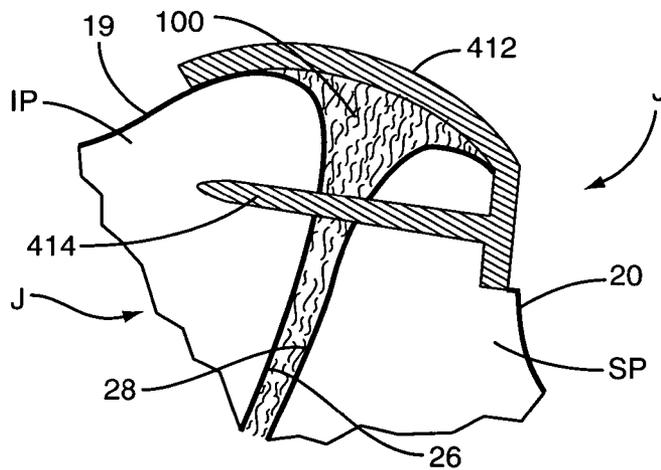


FIG. 16

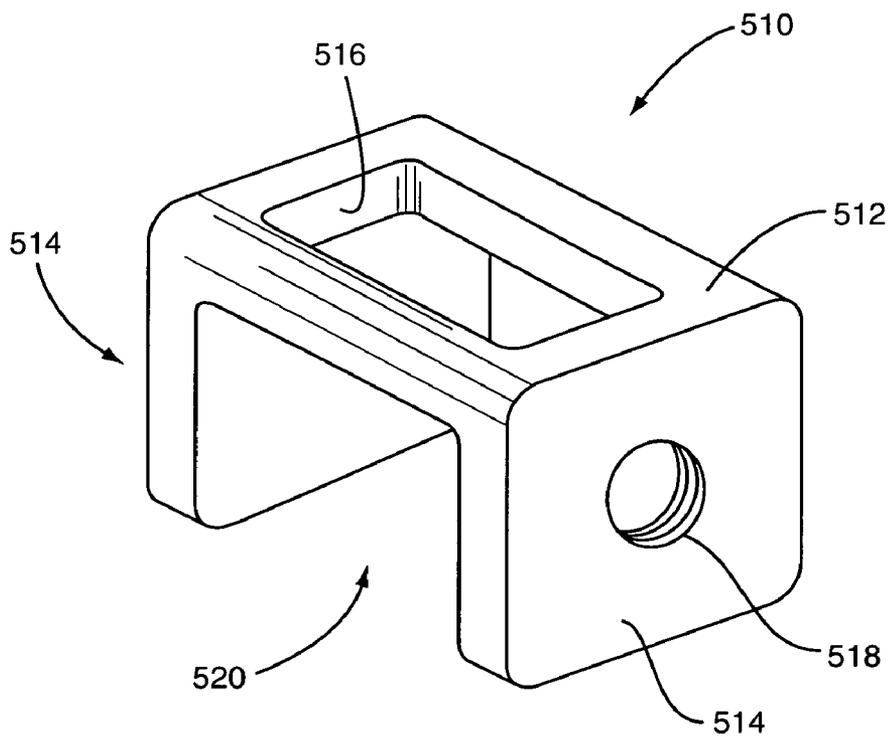


FIG. 17

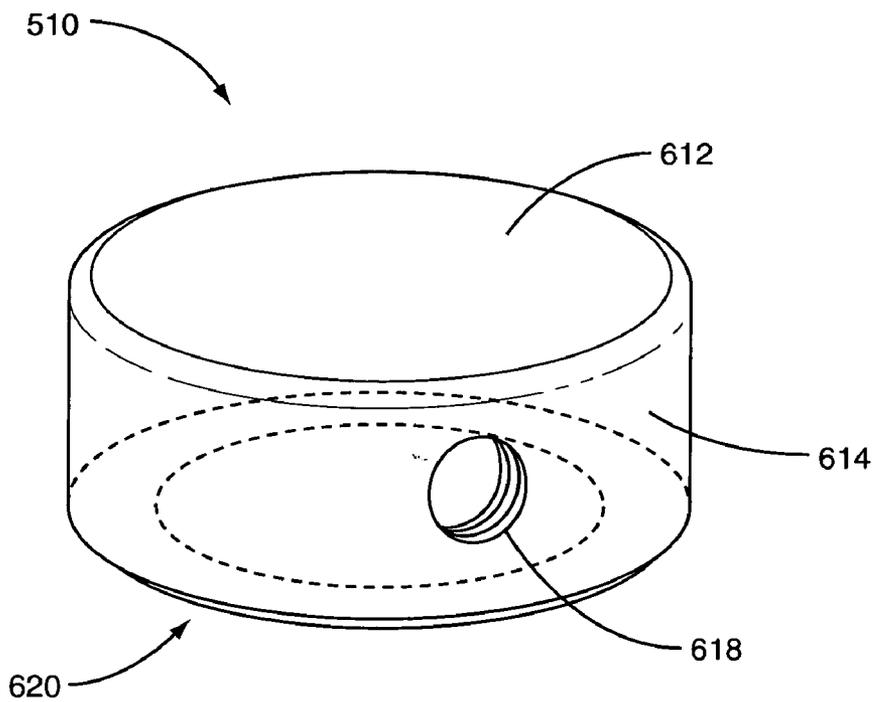


FIG. 18

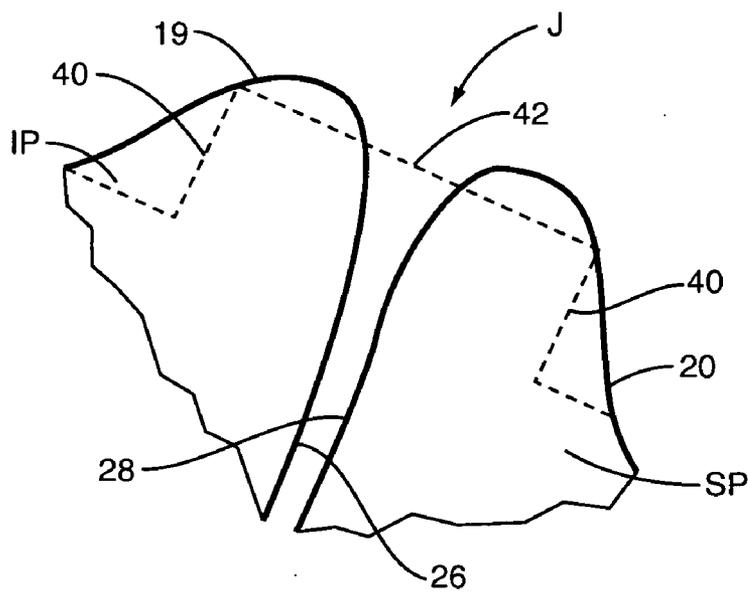


FIG. 19

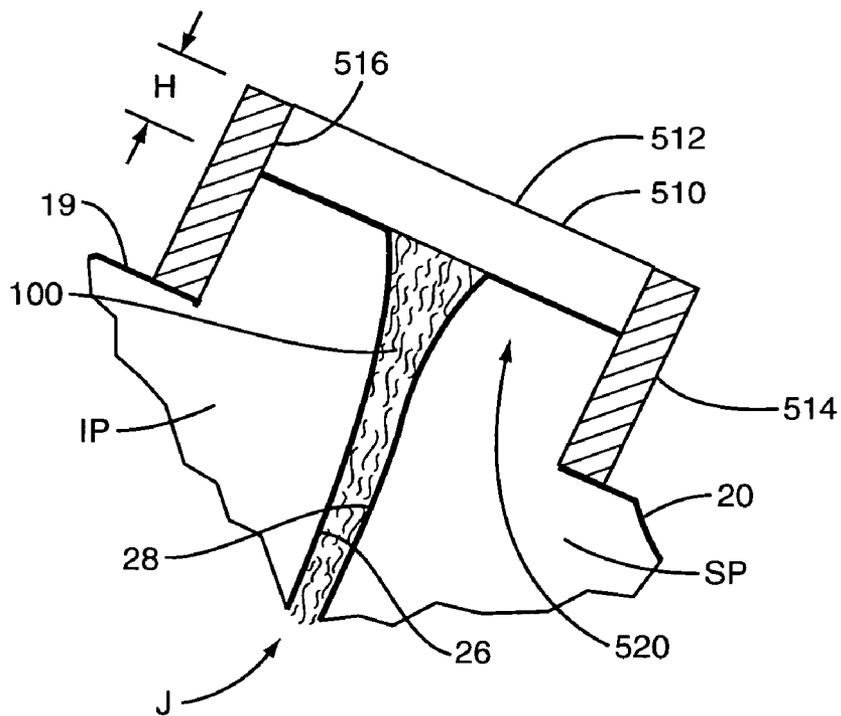


FIG. 20

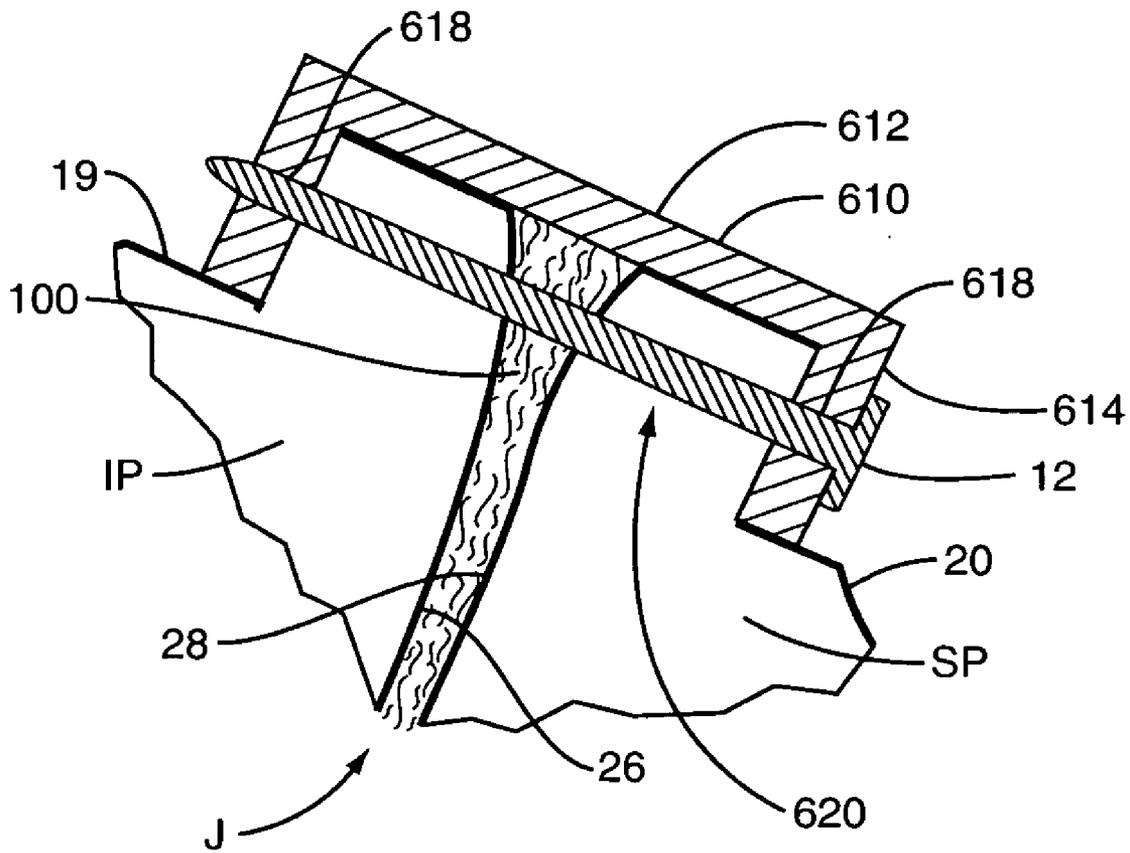


FIG. 21

FACET FUSION IMPLANTS AND METHODS OF USE

BACKGROUND

[0001] The human spine serves many functions. The vertebral members of the spinal column protect the spinal cord. The spinal column also supports other portions of the human body. Furthermore, moveable facet joints and resilient discs disposed between the vertebral members permit motion between individual vertebral members. Each vertebrae includes an anterior body and a posterior arch. The posterior arch includes two pedicles and two laminae that join together to form the spinous process. A transverse process is laterally positioned at the transition from the pedicles to the laminae. Both the spinous process and transverse process provide for attachment of fibrous tissue, including muscle. Two inferior articular processes extend downward from the junction of the laminae and the transverse process. Further, two superior articular processes extend upward from the junction. The articular processes of adjacent vertebrae form the facet joints. The inferior articular process of one vertebra articulates with the superior articular process of the vertebra below. The facet joints are gliding joints because the articular surfaces glide over each other.

[0002] Vertebral implants are often used in the surgical treatment of spinal disorders such as degenerative disc disease, disc herniations, curvature abnormalities, and trauma. Many different types of treatments are used. In some cases, spinal fusion is indicated to inhibit relative motion between vertebral bodies. Spinal fusion often involves the removal of the vertebral disc and insertion of an interbody implant to create a fused junction between a pair of vertebral bodies. Furthermore, the facet joints may be fused to complete the fusion between vertebral pairs. Facet fusion often involves destruction of the facet by decorticating the opposing articulating surfaces and packing bone growth promoting substances such as grafts or synthetic materials into the space between the articular processes. The facet joints are generally small as compared to the intervertebral space. Consequently, limited amounts of bone-growth promoting substances may be inserted into the joint. Some of the bone-growth promoting substances tend to disperse post-operatively resulting in a less robust fusion. Furthermore, the overlying fibrous tissue may further disperse the bone-growth promoting substances as a result of contact, friction, and/or the ingrowth of fibrous mass. These and other factors may result in pseudarthrosis or inadequate fusion.

SUMMARY

[0003] Illustrative embodiments disclosed herein are directed to an implant that is insertable onto a vertebral facet joint. The implant includes a body with an inner bone-contact surface that is configured to fuse with the articular processes. The inner surface may define an interior cavity that is configured to accept at least a portion of an inferior articular process and a superior articular process forming the facet joint. The inner surface may include curved and/or planar portions. The body may be constructed of a bone growth material that fuses with the articular processes. The implant body may be constructed from manufactured materials that include bone growth promoting materials and/or bone ingrowth promoting features.

[0004] The implant may be used in conjunction with bone growth promoting materials that are packed into the facet

joint. The implant may help retain the bone growth promoting substance between the articulating surfaces of the facet joint. The implant may also protect the bone growth promoting substance from adjacent muscle compression and fibrous tissue invasion and may improve bone fusion rate and size of the fusion mass. A receiving portion of an exterior surface of one or both articular process may be prepared to stimulate bone growth. The implant may be placed onto the receiving portion to cover an exterior junction between the articulating surfaces of the facet joint. The implant may be secured to one or both of the articular processes. For example, the implant may be staked, pinned, screwed, or adhered to the exterior of one or both articular processes.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005] FIG. 1 is a lateral view of a facet implant according to one embodiment shown relative to vertebral bodies;

[0006] FIG. 2 is a section view according to the section lines in FIG. 1;

[0007] FIG. 3 is a detail view of a facet joint showing one embodiment of a facet implant;

[0008] FIG. 4 is a perspective view of a facet implant according to one embodiment;

[0009] FIG. 5 is a detail view of a facet joint showing the preparation of a receiving area about the exterior of the articular processes according to one embodiment;

[0010] FIG. 6 is a detail view of a facet joint showing one embodiment of a facet implant;

[0011] FIG. 7 is a detail view of a facet joint showing one embodiment of a facet implant;

[0012] FIG. 8 is a perspective view of a facet implant according to one embodiment;

[0013] FIG. 9 is a detail view of a facet joint showing the preparation of a receiving area about the exterior of the articular processes according to one embodiment;

[0014] FIG. 10 is a detail view of a facet joint showing one embodiment of a facet implant;

[0015] FIG. 11 is a perspective view of a facet implant according to one embodiment;

[0016] FIG. 12 is a detail view of a facet joint showing the preparation of a receiving area about the exterior of the articular processes according to one embodiment;

[0017] FIG. 13 is a detail view of a facet joint showing one embodiment of a facet implant;

[0018] FIG. 14 is a perspective view of a facet implant according to one embodiment;

[0019] FIG. 15 is a detail view of a facet joint showing the preparation of a receiving area about the exterior of the articular processes according to one embodiment;

[0020] FIG. 16 is a detail view of a facet joint showing one embodiment of a facet implant;

[0021] FIG. 17 is a perspective view of a facet implant according to one embodiment;

[0022] FIG. 18 is a perspective view of a facet implant according to one embodiment;

[0023] FIG. 19 is a detail view of a facet joint showing the preparation of a receiving area about the exterior of the articular processes according to one embodiment;

[0024] FIG. 20 is a detail view of a facet joint showing one embodiment of a facet implant; and

[0025] FIG. 21 is a detail view of a facet joint showing one embodiment of a facet implant.

DETAILED DESCRIPTION

[0026] The various embodiments disclosed herein relate to an implant in which a graft plate or cap is disposed over the exterior of a facet joint to promote fusion of the facet in spinal fusion surgery. FIG. 1 illustrates one embodiment of an implant 10 installed in this manner. Specifically, FIG. 1 shows a lateral view of two vertebrae V1, V2 and an intervertebral disc D disposed therebetween. During fusion surgery, some or all of the disc D is removed and may be replaced with an implant or graft that ultimately fuses to the vertebrae V1, V2. In addition, a surgeon may elect to fuse the facet joints J that are formed between the inferior articular process IP of the superior vertebra V1 and the superior articular process SP of the inferior vertebra V2. To that end, the implant 10 may be attached to the articular processes IP, SP as illustrated and disclosed herein. In one or more embodiments, the implant 10 may be pinned or screwed to the articular processes IP, SP using a fastener 12. The fastener 12 may be implemented using a pin, a nail, a screw, a staple, a wedge, or other feature that secures the implant 10 to the facet joint J until fusion occurs. Other embodiments disclosed herein may be implemented without a fastener 12.

[0027] In one or more embodiments, the implant 10 is disposed over the exterior of the facet joint J in a manner that physically separates the facet joint J from fibrous tissue (e.g., muscle and ligaments) that is depicted generally by the dashed lines and the letter F in FIG. 1. Further, the exemplary implant 10 serves as a cap that covers the posterior junction between the inferior articular process IP of the superior vertebra V1 and the superior articular process SP of the inferior vertebra V2. The implant 10 and fastener 12 may be constructed of biocompatible materials, including metals, such as titanium or stainless steel, non-metals, such as PEEK or UHMWPE. The implant 10 and fastener 12 may be constructed of a graft material, which is interpreted herein to include implants constructed from natural or synthetic bone materials including, but not limited to autograft, allograft, xenograft, or calcium phosphate. In embodiments where the implant 10 is constructed from synthetic or manufactured materials, the implant 10 may be coated or textured to improve the likelihood of bony ingrowth into the implant. Similarly, the implant may be impregnated, packed, or filled with bone growth promoting substances such as Bone Morphogenetic Protein (BMP), demineralized bone matrix (DBM), allograft, autograft, xenograft, or other osteoinductive growth factors. For example, the implant 10 may have a porous structure with open portions of the implant 10 packed with the bone growth promoting substance. In certain implementations, the implant 10 may osseointegrate or become part of the fusion mass at the facet joint J to increase the size and stability of the fusion mass. In one embodiment,

the fastener 12 may be constructed from a bioabsorbable material that begins to dissolve after the implant 10 has begun to fuse to the facet joint J.

[0028] The section view shown in FIG. 2 is depicted according to the section line labeled II-II in FIG. 1. The exemplary implant 10 illustrated in FIG. 1 is also presented in FIG. 2. As described above, this embodiment of the implant 10 is disposed so that it covers the posterior side of the facet joint J and forms a barrier between joint J and the fibrous tissue F that covers the facet joint J. In other embodiments, the implant 10 may cover other portions of the facet joint, including lateral or anterior junctions between the inferior articular process IP of the superior vertebra V1 and the superior articular process SP of the inferior vertebra V2. Notably, FIG. 2 includes a "DETAIL" callout that identifies the view illustrated in various other Figures. The detail views provide a magnified representation of the facet joint and various embodiments of the implant.

[0029] FIG. 3 shows a detail view of the same embodiment of the implant 10 depicted in FIGS. 1 and 2. FIG. 3 further illustrates bone growth promoting material 100 that is packed between the articular processes IP, SP that form the facet joint J. These bone growth promoting materials 100 are often used in an attempt to fuse the facet joint J and stabilize a motion segment of the spine. The fusion process may involve some destruction of the facet, including removing cartilage at the interface surfaces 26, 28, decorticating each interface surface 26, 28, and packing the bone growth promoting material 100 into the joint J in an attempt to promote new bone growth that will ultimately fuse the facet joint J. Some non-limiting examples of bone growth promoting substances that may be inserted into the facet joint J include Bone Morphogenetic Protein (BMP), demineralized bone matrix (DBM), allograft, autograft, xenograft, or other osteoinductive growth factors to facilitate fusion of the facet joint J.

[0030] An inner surface 14 of the implant 10 is positioned so that it contacts outer cortical surfaces 19, 20 of the inferior articular process IP and the superior articular process SP, respectively. In one embodiment, the implant 10 is generally curved to match the anatomy of the outer, cortical surfaces 19, 20. As such, the implant 10 may include an elongated, curved shape as illustrated in the perspective view in FIG. 4. Other shapes are possible as the various embodiments described below bear out.

[0031] The exemplary implant 10 covers the facet joint J by an amount that helps prevent the bone growth promoting substance 100 from evacuating the facet joint J. Further, the exemplary implant 10 may act as a barrier to prevent the migration of fibroblasts or other ingrowth of fibrous matter F (see FIGS. 1 and 2) that lies over or adjacent the facet joint J. The implant 10 may be secured as described above with a fastener 12 that extends through the implant 10, from the outer surface 16, and engages one or both of the articular processes IP, SP. In one embodiment, the implant 10 includes an aperture 18 through which the fastener 12 may pass. Additional apertures 18 may be included in the implant 10. The fastener 12 includes an enlarged head 22 and elongated body 24. The length of the illustrated body 24 is sufficient to engage both of the articular processes IP, SP. That is, the fastener 12 passes through the implant 10, through the superior articular process SP, across the interface

surfaces **26**, **28**, and into the inferior articular process IP. In the embodiment shown, the aperture **18** is disposed in proximity to the superior articular process SP so that the fastener **12** initially engages the superior articular process SP of the inferior vertebra V2. In one embodiment, the aperture **18** is disposed so that the fastener **12** initially engages an inferior articular process IP of a superior vertebra V1. Certainly, the length of the elongated body **24** may be shortened so that it engages only one of the articular processes IP, SP that form the facet joint J.

[0032] The fastener **12** may require a pilot hole for attachment of the implant **10** over the facet joint J. Thus, in one implementation, the implant may be positioned as desired. Then, a pilot hole may be drilled into the articular processes IP and/or SP using the aperture **18** as a guide. Then, if necessary, the implant may be removed and bone growth promoting material **100** inserted into the facet joint J, between the interface surfaces **26**, **28**, and under the implant **10** as desired. The implant **10** is then secured to the articular processes IP, SP by inserting the fastener **12**.

[0033] The illustrated embodiment of the implant **10** may be attached to the facet joint J without any preparation of the exterior surfaces **19**, **20** of the articular processes IP, SP. In another embodiment, the exterior surfaces **19**, **20** of the articular processes IP, SP are prepared for the implant **10**. As used herein, the term “preparing” is intended to encompass such actions as abrading, ablating, roughening, or scouring such as with an abrading tool (not shown). Alternatively, preparing the exterior surfaces **19**, **20** may comprise contouring or decorticating, with bony material removed in preparation for receiving the implant **10**. For example, FIG. **5** shows a facet joint J as previously described with a dashed line **30** representing a region of the outer surfaces **19**, **20** that are removed using conventionally known techniques. The dashed line **30** represents a receiving portion of the articular processes IP, SP that will receive the implant **10**.

[0034] FIG. **6** shows the previously described implant **10** inserted into the receiving portion **30** formerly occupied by the bony material that is removed according to FIG. **5**. As above, the implant **10** is retained with a fastener **12**. FIG. **7** shows an embodiment in which a similar implant **110** is inserted into a similar receiving portion **30** as in FIGS. **5** and **6**. However, in this implementation, a fastener **12** is not used. The overlying fibrous tissue F may retain the implant **110** in the position shown. Further, the implant **110** may be adhered to the articular processes IP, SP with a biocompatible adhesive. Suitable adhesives may include protein derived, aldehyde based adhesive materials, albumin/glutaraldehyde materials, and cyanoacrylate-based materials.

[0035] The previously described implants **10**, **110** included a substantially curved construction similar to that shown in FIG. **4**. In one embodiment shown in FIG. **8**, the implant **210** includes an inner surface **214** and outer surface **216** that are comprised of three substantially planar portions **214a**, **214b**, **214c** oriented at angles relative to one another. In other embodiments, the implant **210** may include a single substantially planar portion or include two planar portions oriented at an angle with respect to each other. In other embodiments, the implant **210** may include four or more substantially planar portions oriented at angles with respect to one another. The angles between the planar portions **14a-c** may be configured to substantially match the contour of the

exterior surfaces **19**, **20** of the facet joint J. The amount of bony material that is removed from the outer surfaces **19**, **20** of the facet joint J may be minimized to the extent the implant **210** matches the contour of the exterior surfaces **19**, **20**. In other implementations, the implant **210** may be attached to a facet joint J where the exterior surfaces **19**, **20** are not abraded or decorticated.

[0036] In implementations where the outer cortical surfaces **19**, **20** of the facet joint J are decorticated in anticipation of receiving the implant **210**, substantially planar faces may be formed in the articular processes IP, SP that substantially match the configuration of the implant **210**. For example, FIG. **9** illustrates substantially planar cuts identified by the dashed line **32**. FIG. **10** illustrates the exemplary implant **210** inserted against the prepared articular processes IP, SP. In the illustrated embodiment, the implant **210** is secured to the inferior articular process IP with a threaded fastener **212**. The threaded fastener **212** includes an enlarged head **222** and a threaded shank **224** that passes through the aperture **218** and into the inferior articular process IP. The threaded fastener **212** may include a drive feature (not shown) disposed in the head **222**, such as a hex recess, slotted recess, cross recess, or other driving feature that permits insertion into the facet joint J. In other embodiments, the threaded fastener **212** may engage both articular processes IP, SP. In yet other embodiments, multiple threaded fasteners **212** may be installed to secure the implant **210** to the articular processes IP, SP.

[0037] In an embodiment shown in FIG. **11**, the implant **310** includes a cover portion **312** and a wedge portion **314** joined together to form a substantially T-shaped implant **310**. The cover portion **312** serves a similar purpose to embodiments described above. That is, the cover portion **312** covers the posterior junction between the inferior articular process IP of the superior vertebra V1 and the superior articular process SP of the inferior vertebra V2. Accordingly, the cover portion **312** may include a substantially planar configuration as shown in FIG. **11** or include curved or partially curved configurations similar to previously described embodiments. In contrast with embodiments described above, this implant **310** includes a wedge portion **314** that is positionable within the facet joint J, between the interface surfaces **26**, **28** of the articular processes IP, SP. Consequently, in addition to preparing the outer surfaces **19**, **20** of the facet joint J to receive the implant **310**, the fusion site may benefit from decorticating the interface surfaces **26**, **28** as depicted by the dashed lines **36** in FIG. **12**. Once the facet joint J is prepared by removing cortical bone as shown in FIG. **12**, the implant **310** may be inserted as shown in FIG. **13** and secured with a fastener **12**.

[0038] In an embodiment shown in FIGS. **14**, **15**, and **16**, the implant **410** includes an elongated stake **414** and an enlarged head **412**. The stake portion **414** is similar to the retainer **12** used in other embodiments in that it includes a pointed insertion tip **420** that can be driven through one or both of the articular processes IP, SP. The head **412**, being wider than the stake **414**, limits the depth to which the stake **414** is inserted. In one implementation, the outer cortical surfaces **19**, **20** of the articular processes IP, SP may be prepared to receive the head **412**. In one embodiment shown in FIG. **15**, only one of the articular processes SP is decorticated as indicated by dashed line **38** to receive the

head **412**. In other embodiments, neither or both articular processes IP, SP may be prepared by removing cortical bone.

[0039] The enlarged head **412** extends laterally from the stake **414** at a first end **416** and curves along an arcuate path towards a second end **418**. The length and curvature of the head **412** may be configured so that the head covers the posterior junction between the inferior articular process IP and the superior articular process SP as shown in FIG. **16**. In other embodiments, the head **412** may be formed similar to the head **22** of the retainer **12** shown in other embodiments. That is, the head portion **412** may be configured with a substantially cylindrical or disc shape.

[0040] FIGS. **17** and **18** depict implant embodiments **510**, **610**, that are similar to one another in that lateral sides **514**, **614** of the implants **510**, **610** extend substantially perpendicular to a substantially planar top surface **512**, **612**. In each implant **510**, **610**, the top surface **512**, **612** and lateral sides **514**, **614** form an open bottom end that leads into an interior cavity **520**, **620**. In one embodiment, the intersection of the top surface **612** and side surface **614** may be rounded such that the implant **610** includes a substantially continuous outer surface forming a dome shaped structure. The facet joint J may be prepared to receive the implants **510**, **610** by removing cortical bone from the exterior surfaces **19**, **20** of the articular processes IP, SP as shown in FIG. **19**. The dashed line **40** illustrates an exemplary cutting path to accommodate the lateral sides **514**, **614** of the implants **510**, **610**. Dashed line **42** represents a cut that reduces the height of the facet joint J and may be optional depending on the implementation. The cut may traverse a substantially cylindrical path or a square path depending on the shape of the side walls **514**, **614** of the implant **510**, **610**. The prepared facet joint J is inserted into the interior cavity **520**, **620** as shown in FIGS. **20** and **21**.

[0041] FIG. **17** shows that the implant **510** includes an aperture **516** in the top surface **512** through which bone growth promoting material **100** may be inserted. For example, FIG. **20** shows the implant **510** inserted onto the facet joint J and the aperture **516** exposing the interface surfaces **26**, **28** to permit packing of the bone growth promoting material **100** between the articular processes IP, SP. Notably, the top surface **512** of the implant **510** is disposed a distance H above the top surface of the articular processes IP, SP, which may advantageously provide a buffer between the packed bone growth promoting material **100** and the overlying fibrous tissue. In FIG. **17**, this distance H is relative to an outer surface **19**, **20** that is cut according to dashed line **42** in FIG. **19**. In other implementations, the height of the articular processes IP, SP may be retained by omitting the cut identified by dashed line **42** in FIG. **19**. In either case, the implant **510** can be configured to provide the buffer represented by dimension H.

[0042] FIG. **17** also shows that the implant **510** includes two side surfaces **514**. Thus, the implant **510** includes a generally inverted U-shaped structure. In other embodiments, the implant **510** may include three or four side surfaces **514** to form a box structure. The implant **510** also includes one or more apertures **518** that are sized to accept one of the aforementioned retainers **12**, **212**. Alternatively, the implant **510** may be attached to the facet joint J without a retainer **12**, **212** as shown in FIG. **20** and using one of the aforementioned adhering techniques.

[0043] FIG. **18** also shows that the implant **610** includes one or more apertures **618** that are sized to accept a retainer **12**, **212**. FIG. **21** illustrates that apertures **618** may be disposed opposite one another so that a retainer **12** can be driven through opposite sides of the side wall **614** and both articular processes IP, SP. Implant **510** may be secured to the facet joint J using a similar configuration.

[0044] Spatially relative terms such as “under”, “below”, “lower”, “over”, “upper”, and the like, are used for ease of description to explain the positioning of one element relative to a second element. These terms are intended to encompass different orientations of the device in addition to different orientations than those depicted in the figures. Further, terms such as “first”, “second”, and the like, are also used to describe various elements, regions, sections, etc and are also not intended to be limiting. Like terms refer to like elements throughout the description.

[0045] As used herein, the terms “having”, “containing”, “including”, “comprising” and the like are open ended terms that indicate the presence of stated elements or features, but do not preclude additional elements or features. The articles “a”, “an” and “the” are intended to include the plural as well as the singular, unless the context clearly indicates otherwise.

[0046] The present invention may be carried out in other specific ways than those herein set forth without departing from the scope and essential characteristics of the invention. For instance, while only one of the two facet joints are depicted in the various detailed views provided according to the “DETAIL” callout in FIG. **2**, a similar configuration may exist at the facet joint located on the opposite lateral side of the spine. The descriptions disclosed herein are not intended to be limited to facet joints on a single side of the spine. Those skilled in the art will comprehend the symmetry and applicability of the various embodiments disclosed herein. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive, and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

What is claimed is:

1. An implant for insertion onto a facet joint in a patient comprising:
 - a body including an inner bone-contact surface and an outer surface,
 - the bone-contact surface shaped to cover an exterior junction formed by articular processes of the facet joint, and
 - the body constructed of a graft material selected from a group consisting of autograft, allograft, and xenograft to fuse the processes together.
2. The implant of claim 1 wherein the inner bone-contact surface is curved to match a contour of an exterior of the articular processes of the facet joint.
3. The implant of claim 1 wherein the inner bone-contact surface is planar.
4. An implant for insertion onto a facet joint in a patient comprising:
 - a body including an outer surface and an inner surface defining an interior cavity,

the body shaped to accept at least a portion of an inferior articular process and a superior articular process forming the facet joint,

the body constructed of a graft material selected from a group consisting of autograft, allograft, and xenograft to fuse with the inferior articular process and the superior articular process.

5. The implant of claim 4 further comprising an aperture extending from the inner surface to the outer surface and sized to allow a bone fastener to pass.

6. The implant of claim 4 wherein the body is substantially dome shaped.

7. The implant of claim 4 wherein the interior cavity is rectangular.

8. The implant of claim 4 wherein the interior cavity is cylindrical.

9. An implant for insertion onto a facet joint in a patient comprising:

a body including an outer surface and an inner surface defining an interior cavity,

the body shaped to accept at least an exterior portion of a facet joint,

the body constructed of a graft material to fuse with the inferior articular process and the superior articular process.

10. The implant of claim 9 wherein the graft material is selected from a group consisting of autograft, allograft, and xenograft.

11. The implant of claim 9 wherein the graft material is at least partially constructed of calcium phosphate.

12. A method of inserting an implant onto a facet joint in a patient, the method comprising the steps of:

placing the implant onto the facet joint with the implant covering an exterior junction formed by a first articulating surface of an inferior articular process and a second articulating surface of a superior articular process of the facet joint; and

causing the implant to osseointegrate to the inferior articular process and the superior articular process.

13. The method of claim 12 wherein causing the implant to osseointegrate to the inferior articular process and the superior articular process comprises placing an implant constructed from a graft material onto a prepared exterior surface of one of the inferior articular process and the superior articular process.

14. The method of claim 12 further comprising securing the implant to one of the inferior articular process and the superior articular process.

15. The method of claim 14 wherein securing the implant comprises inserting a fastener through the implant and into one of the inferior articular process and the superior articular process.

16. The method of claim 15 wherein the fastener is threaded.

17. The method of claim 15 wherein the fastener is constructed of a graft material.

18. The method of claim 12 wherein placing the implant onto the facet joint comprises covering a posterior interface formed by the inferior and superior articular processes.

19. The method of claim 12 wherein placing the implant onto the facet joint comprises placing the implant between the facet joint and overlying fibrous tissue.

20. A method of inserting an implant onto a facet joint in a patient, the method comprising the steps of:

preparing a receiving portion of an exterior surface other than an articulating surface of one of an inferior articular process and a superior articular process forming a facet joint;

placing the implant onto the receiving portion; and

causing the implant to osseointegrate to the one of the inferior articular process and the superior articular process.

21. The method of claim 20 wherein placing the implant onto the receiving portion comprises covering a posterior interface formed by the inferior and superior articular processes.

22. The method of claim 20 wherein preparing the receiving portion comprises decorticating the exterior surface of one of the inferior articular process and the superior articular process.

23. The method of claim 20 wherein preparing the receiving portion comprises contouring the exterior surface of one of the inferior articular process and the superior articular process to substantially match a bone contact surface of the implant.

24. The method of claim 20 wherein causing the implant to osseointegrate to one of the inferior articular process and the superior articular process comprises placing an implant constructed from a graft material onto the receiving portion.

25. The method of claim 20 wherein causing the implant to osseointegrate to one of the inferior articular process and the superior articular process comprises placing an implant constructed at least partially from calcium phosphate onto the receiving portion.

26. The method of claim 20 wherein causing the implant to osseointegrate to one of the inferior articular process and the superior articular process comprises securing the implant to one of the inferior articular process and the superior articular process.

27. A method of inserting an implant onto a facet joint in a patient, the method comprising the steps of:

preparing a receiving portion of an exterior surface other than articulating surfaces of an inferior articular process and a superior articular process that form a facet joint;

placing a bone growth promoting substance onto the receiving portion and between the articulating surfaces of the facet joint;

placing the implant onto the receiving portion;

securing the implant to one of the inferior articular process and the superior articular process; and

causing the implant to osseointegrate to the inferior articular process and the superior articular process.

28. The method of claim 27 wherein causing the implant to osseointegrate to the inferior articular process and the superior articular process comprises placing an implant constructed from a bone graft onto the receiving portion.

29. The method of claim 27 wherein causing the implant to osseointegrate to the inferior articular process and the

superior articular process comprises placing an implant constructed from calcium phosphate onto the receiving portion.

30. The method of claim 27 wherein causing the implant to osseointegrate to the inferior articular process and the superior articular process comprises placing bone growth promoting substance between implant and the receiving portion.

31. The method of claim 27 wherein securing the implant comprises inserting an elongated fastener through the implant and into one of the inferior articular process and the superior articular process.

32. The method of claim 27 wherein placing the implant onto the receiving portion comprises placing the implant at a posterior side of the facet joint.

33. The method of claim 27 wherein placing the implant onto the receiving portion comprises placing the implant at a lateral side of the facet joint.

34. The method of claim 27 wherein placing the implant onto the receiving portion comprises placing the implant between the bone growth promoting substance and a fibrous tissue overlying the facet joint.

35. The method of claim 27 wherein placing the implant onto the receiving portion comprises covering an exterior junction formed by the articulating surfaces of the facet joint.

36. The method of claim 27 wherein placing the implant onto the receiving portion comprises protecting the bone growth promoting substance from compression by a fibrous tissue overlying the facet joint.

37. The method of claim 27 wherein placing the implant onto the receiving portion comprises protecting the bone growth promoting substance from fibrous tissue invasion.

* * * * *