



- (51) International Patent Classification:
G01K 7/34 (2006.01) *G01L 9/10* (2006.01)
G01D 3/08 (2006.01)
- (21) International Application Number:
PCT/US2018/012538
- (22) International Filing Date:
05 January 2018 (05.01.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/443,103 06 January 2017 (06.01.2017) US
- (71) Applicants: **FLORIDA STATE UNIVERSITY RESEARCH FOUNDATION, INC.** [US/US]; 874 Traditions Way, Tallahassee, Florida 32306-4166 (US). **GOVERNMENT OF THE UNITED STATES AS REPRESENTED BY THE SECRETARY OF THE AIR FORCE** [US/US]; 2240 B Street, Bldg. 11, Room 204, Wright-Patterson AFB, Ohio 45433-7109 (US).
- (72) Inventors: **XU, Chengying**; 8067 Preservation Road, Tallahassee, Florida 32312 (US). **SCHRAND, Amanda**; 306 W. Eglin Boulevard, Building 432, Room 2, Eglin AFB, Florida 32542 (US).
- (74) Agent: **KING, Kevin, W.** et al.; Eversheds Sutherland (US) LLP, 999 Peachtree Street, NE, Atlanta, Georgia 30309-3996 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: TEMPERATURE AND PRESSURE SENSORS AND METHODS

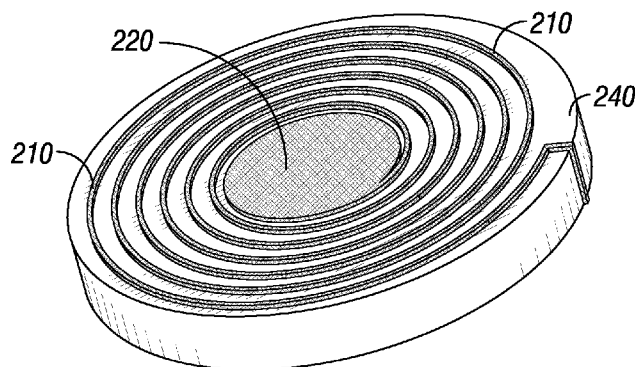


FIG. 5A

(57) Abstract: Temperature sensors, pressure sensors, methods of making the same, and methods of detecting pressures and temperatures using the same are provided. In an embodiment, the temperature sensor includes a ceramic coil inductor having a first end plate and a second end plate, wherein the ceramic coil inductor is formed of a ceramic composite that comprises carbon nanotubes or, carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers thereof dispersed in a ceramic matrix; and a thin film polymer-derived ceramic (PDC) nanocomposite disposed between the first and the second end plates, wherein the thin film PDC nanocomposite has a dielectric constant that increases monotonically with temperature.



Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

TEMPERATURE AND PRESSURE SENSORS AND METHODS

Cross-Reference to Related Applications

5 This application claims priority to U.S. Provisional Patent Application No. 62/443,103, filed on January 6, 2017, which is incorporated herein by reference in its entirety.

Statement Regarding Federally Sponsored Research or Development

10 This invention was made with government support under contract number N00014-11-1-0706 awarded by the Office of Naval Research. The government has certain rights in the invention.

Background

15 Maintaining situational awareness of the weapon environment is desirable for developing the next generation of robust missile and munition (M&M) systems that can withstand the extreme acceleration, temperature, and pressure conditions that are presented by traditional fighter and hypersonic aircraft. Conventional techniques for remotely monitoring munition assets are primarily performed by proximate environmental monitoring by fuel sensors, accelerometers, surface acoustic wave sensors, chemical resistors, and temperature
20 sensors, which unfortunately are limited to storage and transportation purposes. In addition, conventional temperature testing for M&M surveillance is performed over a limited temperature range, e.g., -55 °C to 125 °C.

25 Typical conventional temperature sensors used in the evaluation of M&M systems include thermocouples, thermistors, resistance thermometers, quartz thermometers, which all include a metallic coil inductor. However, these temperature sensors have certain drawbacks. For example, these temperature sensors cannot be used in high temperature environments (e.g., 800 °C to 1400 °C) for prolonged periods of time due to oxidation of the metallic coil inductor, or can only be used under wired measurement conditions, and therefore are not
30 suitable for in-flight monitoring. As a result, these temperature sensors can provide only limited evaluation of M&M systems.

It therefore would be desirable to provide improved temperature sensors that overcome one or more of the foregoing limitations. In particular, it would be desirable to provide a temperature sensor that can withstand high temperatures for prolonged periods of

time, along with the ability to wirelessly transmit real-time, in-flight temperature data of M&M systems.

Similarly, real-time, online pressure monitoring is desired for many harsh-environment applications, such as gas turbines for power generation, to maintain operational effectiveness and safety. However, in such applications, suitable pressure sensors need to withstand corrosive gas environments having high temperatures (e.g., 1000 °C to 1400 °C) and high pressures (e.g., 300 psi to 600 psi).

Typical conventional pressure sensors used in these applications include passive pressure sensors based on resistive or capacitive sensing mechanisms. However, these pressure sensors have certain drawbacks. For example, wire interconnection is required to interrogate these sensors, and these sensors cannot operate effectively in high temperature environments. Moreover, pressure sensors that utilize a patch antenna operate within a limited temperature range, e.g., -55 °C to 125 °C, because of the metallic wire used with the patch antenna. As a result, the application of these common pressure sensors is limited.

It therefore would be desirable to provide improved pressure sensors that overcome one or more of the foregoing limitations. In particular, it would be desirable to provide a pressure sensor that can withstand high temperatures and pressures for prolonged periods, along with the ability to wirelessly transmit real-time pressure data.

Summary

In one aspect, a temperature sensor is provided which includes: a ceramic coil inductor having a first end plate and a second end plate, wherein the ceramic coil inductor is formed of a ceramic composite that comprises carbon nanotubes, carbon nanofibers, or a combination thereof dispersed in a ceramic matrix; and a thin film polymer-derived ceramic (PDC) nanocomposite disposed between the first and the second end plates, wherein the thin film PDC nanocomposite has a dielectric constant that increases monotonically with temperature.

In another aspect, a pressure sensor is provided including: a ceramic coil inductor having a first end plate and a second end plate, wherein the ceramic coil inductor is formed of a ceramic composite that comprises carbon nanotubes, or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers thereof dispersed in a ceramic matrix; and a PDC nanocomposite structure disposed between the first and the second end plates, wherein the

PDC nanocomposite structure has walls that define an internal cavity having a first cavity surface and an opposed second cavity surface, wherein the first and second cavity surfaces are spaced a distance from one another and the distance varies proportionally to the atmospheric pressure outside of the pressure sensor.

5 In another aspect, a method for making a wireless sensor is provided, the method including: disposing a PDC nanocomposite between a first end plate and a second end plate of a ceramic coil inductor, wherein the ceramic coil inductor comprises carbon nanotubes, or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers thereof dispersed in a ceramic matrix, wherein the sensor is a temperature sensor or a pressure sensor.

10 In another aspect, a method of detecting a change in temperature is provided, the method including: placing one or more temperature sensors described above in an environment; and measuring a frequency shift of an electromagnetic signal induced in the ceramic coil to detect a change in temperature of the environment.

15 In another aspect, a method of detecting a change in pressure is provided, the method including: placing one or more pressure sensors described above in an environment; and measuring a frequency shift of an electromagnetic signal induced in the ceramic coil inductor to detect a change in pressure of the environment.

Brief Description of the Drawings

20 The detailed description is set forth with reference to the accompanying drawings. The use of the same reference numerals may indicate similar or identical items. Various embodiments may utilize elements and/or components other than those illustrated in the drawings, and some elements and/or components may not be present in various embodiments. Elements and/or components in the figures are not necessarily drawn to scale.

25 **FIG. 1A** is a top plan view of a temperature sensor in accordance with an embodiment of the present disclosure.

FIG. 1B is an elevated side view of the temperature sensor in **FIG. 1A**.

FIG. 1C is a bottom plan view of the temperature sensor in **FIG. 1A**.

30 **FIG. 2** is a graph showing the dielectric constant of polymer-derived ceramic material as a function of temperature at 1 MHz.

FIG. 3 is a schematic of an exemplary temperature sensor represented as a passive resistor-inductor-capacitor (RLC) circuit.

FIG. 4A is a graph illustrating the mechanical and electrical properties of a ceramic composite of an exemplary temperature sensor of the present disclosure compared to other
5 representative CNT-reinforced ceramic composites and graphite.

FIG. 4B is a graph showing a change in measured electrical conductivity of a ceramic composite of an exemplary temperature sensor of the present disclosure as a function of temperature.

FIG. 5A is a top perspective view of a pressure sensor in accordance with an
10 embodiment of the present disclosure.

FIG. 5B is a cross-sectional view of the pressure sensor in **FIG. 5A**.

FIG. 5C is a bottom perspective view of the pressure sensor in **FIG. 5A**.

FIG. 6 is a schematic of an exemplary pressure sensor represented as an evanescent-mode cavity resonator.

FIG. 7 is a schematic of a temperature sensor of the present disclosure integrated
15 within an exemplary missile and munition (M&M) system.

FIG. 8 is an elevated side view of a temperature sensor according to an embodiment of the present disclosure.

FIG. 9 is an elevated side view of a pressure sensor according to an embodiment of
20 the present disclosure.

Detailed Description

New temperature and pressure sensors are provided herein that may include a ceramic coil inductor having ceramic material and a relatively high volume fraction of carbon
25 nanotubes. The combination leverages the remarkable electrical and mechanical properties (stiff and strong) of carbon nanotubes (CNTs) and the thermal properties (temperature sensitivity) of ceramic materials.

In some embodiments, the temperature sensors provided herein are high temperature, wireless sensors having one or more of the following advantages: (i) the ability to provide
30 real-time, in-flight monitoring of M&M systems; (ii) the ability to maintain safety and effectiveness of critical parts and materials of the M&M systems without the need for

extensive non-destructive evaluation (NDE), thereby reducing cost and time; and (iii) on-demand tracking and assessing of the status of the M&M systems over extended periods, based upon changing conditions.

Similarly, in some embodiments, the pressure sensors provided herein are wireless and
5 can operate in harsh, corrosive gaseous environments having high temperatures and pressures. These sensors have one or more of the following advantages: (i) the ability to provide real-time, monitoring of systems that operate in high temperature and pressure environments; (ii) the ability to maintain safety and effectiveness of critical parts and materials of these systems, thereby reducing cost and time; and (iii) on-demand tracking and assessing of the status of
10 systems over extended periods, based upon changing conditions.

Temperature Sensors

In some embodiments, the temperature sensors include a ceramic coil inductor that is formed of a ceramic composite and a thin film polymer-derived ceramic (PDC)
nanocomposite having a dielectric constant that increases monotonically with temperature.

15 An exemplary embodiment is illustrated in **FIGS. 1A-1C**. In this embodiment, the temperature sensor **100** includes a ceramic coil inductor **110** having a first end plate **120** and a second end plate **130**. The temperature sensor **100** further includes a PDC nanocomposite **140** that is disposed between the first and second end plates, **120, 130**.

In certain embodiments, the ceramic coil inductor **110** is configured to communicate
20 with an external radio frequency antenna. In other embodiments, the temperature sensor **100** includes a patch antenna that is attached to the first end plate **120** of the ceramic coil inductor **110** and is configured to communicate with an external radio frequency antenna. Therefore, by using wireless transmission, the signal transmission distance can be accomplished over a network of RF links, such as satellite, the Internet, and/or infrared data links, or any other
25 desired communication path.

FIG. 8 illustrates an elevated side view of a temperature sensor **800** according to another embodiment of the present disclosure. In this embodiment, the temperature sensor **800** includes a ceramic coil inductor **810** having a first end plate **820** and a second end plate **830**. The temperature sensor **800** further includes a PDC nanocomposite **840** that is disposed
30 between the first and second end plates, **820, 830**.

The temperature sensor **800** further includes a patch antenna **850** that is attached to the first end plate **820** of the ceramic coil inductor **810** and is configured to communicate with an external radio frequency antenna. Therefore, by using wireless transmission, the signal transmission distance can be accomplished over a network of RF links, such as satellite, the Internet, and/or infrared data links, or any other desired communication path.

Polymer-derived ceramic (PDC) materials are synthesized by thermal decomposition of polymeric precursors, instead of by conventionally sintering ceramic powder compacts. The polymeric precursor is in liquid form, and solidified into a polymer phase and then further pyrolyzed into a ceramic phase.

It has been demonstrated that the electrical conductivity of PDC materials can be greatly varied by tailoring the composition of the PDC materials from being an insulator to a semiconductor. When in the insulator state, PDC materials possess a dielectric constant that increases monotonically with temperature. This is desired because, when the dielectric constant can be determined, the environmental temperature the sensor is experiencing can be calculated. As shown in **FIG. 2**, this trend has been verified for temperatures up to 1000 K (727 °C) at 1 MHz.

In embodiments, the present temperature sensors can be represented as a passive resistor-inductor-capacitor (RLC) circuit, which receives electromagnetic energy from an external transmitter/receiver as shown in **FIG. 3**.

The permittivity ϵ of the PDC nanocomposite is a function of temperature as indicated in Equation (1):

$$\epsilon = \epsilon(T) \quad (1)$$

This results in the capacitance C of the *RLC* circuit being temperature dependent as indicated in Equation 2:

$$C = \epsilon \frac{A}{d} \quad (2)$$

where A is the area of the end plate that serves as the bottom plate of the ceramic coil inductor, e.g., the second end plate **130**, and d is the distance between two plates (and is also the thickness of ceramic material).

Since the inductance L is a constant, the frequency f of the *RLC* circuit can then be expressed as Equation 3:

$$f = \frac{1}{2\pi\sqrt{CL}} \quad (3)$$

Therefore, the frequency electromagnetic wave generated by the sensor will change as a function of the temperature. This change in frequency can be transmitted by either the ceramic coil inductor itself or by a patch antenna attached thereto and received by a remotely placed RF reader antenna.

In embodiments, the ceramic composite comprises a ceramic matrix and carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and nanofibers dispersed in the ceramic matrix. In some embodiments, the ceramic matrix comprises a polymer-derived ceramic (PDC) material.

In some embodiments, the carbon nanotubes comprise single-walled carbon nanotubes, multi-walled carbon nanotubes, or a combination thereof.

The ceramic composites provided herein generally may include a relatively high volume fraction of carbon nanotubes. As shown in **FIG. 4A**, it has been found that high volume fraction of carbon nanotubes in combination with a PDC material result in ceramic composites having greater electrical conductivity compared to other CNT-reinforced ceramic composites and to graphite. Therefore, high electrical conductivity, which is desirable, may be provided, at least in part, by the high volume of carbon nanotubes.

In embodiments, the volume fraction of carbon nanotubes in the composite material is about 15% to about 90%, for example about 15%, about 20%, about 25%, about 30%, about 35%, about 40%, about 45%, about 50%, about 55%, about 60%, about 65%, about 70%, about 75%, about 80%, about 85%, about 90%, or any ranges therebetween. In some embodiments, the volume fraction of carbon nanotubes in the composite material is about 30% to about 80%. In some embodiments, the volume fraction of carbon nanotubes in the composite material is about 40% to about 70%. In some embodiments, the volume fraction of carbon nanotubes in the composite material is about 60%.

Additionally, as illustrated in **FIG. 4B**, the present ceramic composites are lighter and possess a desirable amount of electrical conductivity, along with having the ability to withstand high temperatures. **FIG. 4B** compares the electrical conductivity changes with elevated temperature for an exemplary ceramic composite compared to copper. As seen in **FIG. 4B**, the electrical conductivity of the ceramic composite increases as the temperature

increases to 750 °C. This trend is desirable not only because the higher the electrical conductivity of the sensor, the greater the distance the sensor signal can be transmitted by the ceramic coil inductor itself or by the patch antenna, but also because elevated temperatures may not adversely affect the performance of the sensor.

5 Pressure Sensors

Generally, the pressure sensors comprise a ceramic coil inductor formed of a ceramic composite, which has carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers dispersed in a ceramic matrix, and a polymer-derived ceramic (PDC) nanocomposite. In some embodiments, the ceramic matrix comprises a
10 polymer-derived ceramic (PDC) material.

An exemplary embodiment of a pressure sensor is illustrated in **FIGS. 5A-5C**. In this embodiment, the pressure sensor **200** includes a ceramic coil inductor **210** having a first end plate **220** and a second end plate **230**. The pressure sensor **200** further includes a PDC nanocomposite structure **240** that is disposed between the first and second end plates **220**,
15 **230**. The PDC nanocomposite structure **240** has two opposed, generally disk shaped walls and an outer ring wall that together define an internal cavity **250**. The internal cavity **250** is bounded, in part, by a first cavity surface **260**, which includes a generally centrally-located elevated regional surface **290**, and a second cavity surface **280**. The elevated regional surface **290** is part of protrusion **270**. The elevated regional surface **290** of the first cavity surface **260**
20 is not in contact with the second cavity surface **280**. Instead, the elevated regional surface **290** is spaced a distance **D** from the second cavity surface **280**. The distance **D** will vary based on the differential between the pressure within the internal cavity **250** and the pressure of the external environment in which the pressure sensor **200** is located. The distance **D** will vary inversely proportional to the environmental pressure. In some embodiments, the
25 protrusion **270** is generally in the shape of a cylindrical disk.

In certain embodiments, the ceramic coil inductor **210** is configured to communicate with an external radio frequency antenna. Therefore, by using wireless transmission, the signal transmission distance can be accomplished over a network of RF links, such as satellite, the Internet, and/or infrared data links, or any other desired communication path.

30 **FIG. 9** illustrates an elevated side view of a pressure sensor **900** according to another embodiment of the present disclosure. In this embodiment, the pressure sensor **900** includes a

ceramic coil inductor **910** having a first end plate **920** and a second end plate **930**. The pressure sensor **900** further includes a PDC nanocomposite structure **940** that is disposed between the first and second end plates **920**, **930**. The PDC nanocomposite structure **940** has two opposed, generally disk shaped walls and an outer ring wall that together define an internal cavity **950**. The internal cavity **950** is bounded, in part, by a first cavity surface **960**, which includes a generally centrally-located elevated regional surface **290**, and a second cavity surface **280**. The elevated regional surface **990** is part of protrusion **970**. The elevated regional surface **990** of the first cavity surface **960** is not in contact with the second cavity surface **980**. Instead, the elevated regional surface **990** is spaced a distance **D** from the second cavity surface **980**. The distance **D** will vary based on the differential between the pressure within the internal cavity **950** and the pressure of the external environment in which the pressure sensor **900** is located. The distance **D** will vary inversely proportional to the environmental pressure. In some embodiments, the protrusion **970** is generally in the shape of a cylindrical disk.

The pressure sensor **900** further includes a patch antenna **995** that is attached to the first end plate **920** of the ceramic coil inductor **910** and is configured to communicate with an external radio frequency antenna. Therefore, by using wireless transmission, the signal transmission distance can be accomplished over a network of RF links, such as satellite, the Internet, and/or infrared data links, or any other desired communication path.

In embodiments, the present pressure sensors can be represented as an evanescent-mode cavity resonator, which receives electromagnetic energy from an external transmitter/receiver as shown in **FIG. 6**.

The resonant frequency of the evanescent-mode resonator can be expressed as Equation (4):

$$f_r = \frac{1}{2\pi\sqrt{L(C_p+C_r)}} \quad (4)$$

where C_p represents parallel-plate capacitance between the second cavity surface and the protrusion, C_r is the remaining fringing capacitance, and L is the equivalent inductance.

The parallel-plate capacitance C_p between the second cavity and the protrusion is expressed as indicated in Equation 5:

$$C_p = \frac{\epsilon_0 A}{gap} \quad (5)$$

where ϵ_0 is the permittivity of the PDC nanocomposite at room temperature, A is the area of the first surface of the protrusion, and the gap is the distance between the second cavity surface and the first surface of the protrusion.

With pressure being applied to the pressure sensor, C_p increases with the reduced gap due to the cavity deformation of the PDC nanocomposite, and therefore the gap is inversely proportional to pressure. Therefore, the frequency electromagnetic wave generated by the pressure sensor will change as a function of the applied pressure. This change in frequency can be transmitted by the ceramic coil inductor and received by a remotely placed RF reader antenna.

In some embodiments, the carbon nanotubes comprise single-walled carbon nanotubes, multi-walled carbon nanotubes, or a combination thereof.

As discussed above, the ceramic composites provided herein generally may include a relatively high volume fraction of carbon nanotubes. In embodiments, the volume fraction of carbon nanotubes in the composite material is about 20 % to about 90 %. In other embodiments, the volume fraction of carbon nanotubes in the composite material is about 30 % to about 80 %. In some particular embodiments, the volume fraction of carbon nanotubes in the composite material is about 40 % to about 70 %. In some embodiments, the volume fraction of carbon nanotubes in the composite material is about 60 %.

Methods of Manufacture

Generally, the methods for making the wireless temperature and pressure sensors described herein include disposing a PDC nanocomposite between a first end plate and a second end plate of a ceramic coil inductor. The ceramic coil inductor comprises carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers dispersed in a ceramic matrix.

Temperature Sensors

In some embodiments, the PDC nanocomposite is in the form of a thin film and has a dielectric constant that increases monotonically with temperature. In such embodiments, the method may further comprise attaching a patch antenna to the first end plate of the ceramic coil inductor.

In some embodiments, the method of making a wireless temperature sensor further includes forming the ceramic coil inductor and/or the PDC nanocomposite via an additive

manufacturing process. Exemplary additive manufacturing processes are disclosed in U.S. Patent Application Publication No. 2017/0341297 A1, which is incorporated by reference herein.

5 In some embodiments, the additive manufacturing process includes (i) providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers; (ii) disposing the mixture on a support; (iii) exposing the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer; and (iv) subjecting the mixture to pyrolysis at a temperature and time effective to form the ceramic coil inductor or the PDC nanocomposite.

10 In some embodiments, the additive manufacturing process includes (i) providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers; (ii) disposing a first portion of the mixture on a support; (iii) exposing the first portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the first portion; (iv) disposing a
15 second portion of the mixture on the first portion; (v) exposing the second portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the second portion; and (vi) subjecting the first and second portions of the mixture to pyrolysis at a temperature and time effective to form the ceramic coil inductor or the PDC nanocomposite.

20 In some variations of the foregoing embodiments, the curing step may be effected by application of other suitable wavelengths of light and/or by heating the mixture.

25 In some embodiments, a 3D printing process is used to place the mixture of a liquid-state pre-ceramic polymer and carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers, onto a support. 3D printing systems are known in the art and may be readily adapted to dispose the mixture on a support to form a ceramic coil inductor of the present temperature sensors.

30 In some embodiments, the support is maintained at a temperature equal to or less than the freezing point of the liquid-state pre-ceramic polymer. Not wishing to be bound by any particular theory, it is believed that a support maintained at such a temperature may allow the dimensions of the liquid-state pre-ceramic polymer disposed on the substrate to be at least substantially controlled.

In one embodiment, one or more additives are added to the mixture. The one or more additives may include powders, a UV sensitizer, or a combination thereof. The powders may include metal powders.

5 In embodiments, the liquid-state pre-ceramic polymer is a paste. In some particular embodiments, the liquid-state pre-ceramic polymer is an aqueous paste.

In one embodiment, the liquid-state pre-ceramic polymer is formed by mixing a pre-ceramic material and water. Proper mixing may be used to ensure that the mixture will be soluble enough to ease the deposition of the liquid-state pre-ceramic polymer, such as with 3D printing, with no entrapped gas in it.

10 In some embodiments, the liquid-state pre-ceramic polymer includes polysilazane.

The mixture may be formed by mixing the components in a suitable container (e.g., a beaker or other processing or reaction vessel), with mechanical stirring, such as with a magnetic mixer, for a period effective to substantially uniformly disperse the components with the mixture.

15 The viscosity of the liquid-state pre-ceramic polymer may be tested. Based on the viscosity, mixing may be continued as necessary, or the proportions of the components may be adjusted to achieve a desired viscosity, or a combination thereof.

20 When the liquid-state pre-ceramic polymer is a paste, the paste, in embodiments, should not be too thick or too watery, so that the paste can be suitably transported and deposited, and otherwise processed as described herein. Not wishing to be bound by any particular theory, it is believed that a relatively thick paste may make extrusion/printing/disposing more difficult to perform and/or may lead to cracks, while paste that is not viscous enough may make extrusion/printing/disposing hard to control and also may add time to the curing and/or pyrolysis steps. Viscosity checks, if necessary, may be performed frequently as
25 mixing proceeds, and mixing stopped when a suitable viscosity is achieved.

Once the mixture is obtained, the mixture may be collected into a syringe or other device, for loading into a 3D printer or other apparatus configured to dispose the mixture on a substrate.

30 In some embodiments, the performance of the temperature sensors described herein may be tested using arc-jet facilities, such as a short-take and vertical landing (STOVL) jet facility, or wind tunnels.

Pressure Sensors

In some embodiments, the PDC nanocomposite defines an internal cavity having a first cavity surface from which a protrusion extends, but does not contact, a second cavity surface. The protrusion has a first surface that is spaced at a distance from the second cavity surface in which the distance is inversely proportional to pressure.

In some embodiments, the method for making the present wireless pressure sensors further includes forming the ceramic coil inductor and/or the PDC nanocomposite via an additive manufacturing process. Exemplary additive manufacturing processes are disclosed in U.S. Patent Application Publication No. 2017/0341297 A1, which is incorporated by reference herein.

In some embodiments, the additive manufacturing process for forming the ceramic coil inductor includes (i) providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers; (ii) disposing the mixture on a support; (iii) exposing the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer; and (iv) subjecting the mixture to pyrolysis at a temperature and time effective to form the ceramic coil inductor.

In some embodiments, the additive manufacturing process for forming the ceramic coil inductor includes (i) providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers; (ii) disposing a first portion of the mixture on a support; (iii) exposing the first portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the first portion; (iv) disposing a second portion of the mixture on the first portion; (v) exposing the second portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the second portion; and (vi) subjecting the first and second portions of the mixture to pyrolysis at a temperature and time effective to form the ceramic coil inductor.

In some embodiments, the additive manufacturing process for forming the PDC nanocomposite includes (i) providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers; (ii) disposing a first portion of the mixture on a first support; (iii) exposing the first portion of the mixture to ultraviolet light effective to substantially cure the liquid-state

pre-ceramic polymer of the first portion; (iv) subjecting the first portion of the mixture to pyrolysis at a temperature and time effective to form a first section of the PDC nanocomposite, wherein the first portion comprises a first cavity surface; (v) metallizing the first portion of the PDC nanocomposite; (vi) disposing a second portion of the mixture on a second support; (vii) exposing the second portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the second portion; (viii) subjecting the second portion of the mixture to pyrolysis at a temperature and time effective to form a second section of the polymer derived-ceramic nanocomposite, wherein the second portion comprises a second cavity surface; metallizing the second portion of the PDC nanocomposite; and (ix) joining the first portion with the second portion to form the PDC nanocomposite.

In some variations of the foregoing embodiments, the curing step may be effected by application of other suitable wavelengths of light and/or by heating the mixture.

In one embodiment, disposing the mixture of a liquid-state pre-ceramic polymer and carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers on a support includes 3D printing the mixture on a support.

In one embodiment, the support is maintained at a temperature equal to or less than the freezing point of the liquid-state pre-ceramic polymer. Not wishing to be bound by any particular theory, it is believed that a support maintained at such a temperature may allow the dimensions of the liquid-state pre-ceramic polymer disposed on the substrate to be at least substantially controlled.

In one embodiment, one or more additives are added to the mixture. The one or more additives may include powders, a UV sensitizer, or a combination thereof. The powders may include metal powders.

In embodiments, the liquid-state pre-ceramic polymer is a paste. In particular embodiments, the liquid-state pre-ceramic polymer is an aqueous paste.

In one embodiment, the liquid-state pre-ceramic polymer is formed by mixing a pre-ceramic material and water. Proper mixing may be used to ensure that the mixture will be soluble enough to ease the deposition of the liquid-state pre-ceramic polymer, such as with 3D printing, with no entrapped gas in it.

In one embodiment, the liquid-state pre-ceramic polymer comprises polysilazane.

The mixture may be formed by mixing the components in a suitable container (e.g., a beaker or other processing or reaction vessel), with mechanical stirring, such as with a magnetic mixer, for a period effective to substantially evenly mix the components.

5 The viscosity of the liquid-state pre-ceramic polymer may be tested. Based on the viscosity, mixing may be continued as necessary, or the proportions of the components may be adjusted to achieve a desired viscosity, or a combination thereof.

10 When the liquid-state pre-ceramic polymer is a paste, the paste, in embodiments, must not be too thick, nor too watery. Not wishing to be bound by any particular theory, it is believed that a relatively thick paste may make extrusion/printing/disposing more difficult to perform and/or may lead to cracks, while paste that is not viscous enough may make extrusion/printing/disposing hard to control and also may add time to the curing and/or pyrolysis steps. Viscosity checks, if necessary, may be performed frequently as mixing proceeds, and mixing may be stopped when good viscosity is achieved.

15 Once the mixture is obtained, the mixture may be collected into a syringe or other device, for loading into a 3D printer or other apparatus configured to dispose the mixture on a substrate.

Method of Use

20 Generally, the wireless temperature sensors described herein are used to detect a change in temperature of an environment, such as an in-flight environment of an M&M system. Similarly, the wireless pressure sensors described herein are used to detect a change in pressure of an environment, such as an operational environment of a gas turbine.

Temperature Sensors

25 In some embodiments, the method of detecting a change in temperature comprises placing one or more temperature sensors as described herein in an environment; and measuring a frequency shift of an electromagnetic signal induced in the ceramic coil inductor to detect a change in temperature of the environment.

30 As described herein, the change in permittivity of the ceramic matrix of the ceramic coil inductor is a function of temperature within the environment. In embodiments, the change in permittivity of the ceramic matrix results in the frequency shift of the electromagnetic signal.

In some embodiments, the one or more temperature sensors are configured to detect the change in temperature in the environment with a temperature in the range from about 800 °C to about 1000 °C, for example, about 810 °C, about 825 °C, about 850 °C, about 900 °C, about 925 °C, about 950 °C, about 980 °C, and any ranges therebetween. In some
5 embodiments, the one or more temperature sensors are configured to detect the change in temperature in the environment with a temperature in the range of from about 25 °C to about 1000 °C, for example about 25 °C, about 100 °C, about 200 °C, about 300 °C, about 400 °C, about 500 °C, about 600 °C, about 700 °C, about 800 °C, about 900 °C, about 1000 °C, and any ranges therebetween.

10 **FIG. 7** shows an exemplary system of a present temperature sensor integrated into an M&M system. The system **700** includes an aircraft **702**, and a wireless ceramic temperature sensor **704** for in-flight health monitoring. The wireless ceramic temperature sensor includes a wireless sensor **706** and an RF antenna **708**. Using the RF antenna **708**, the sensor **704** communicates with several field programmable gate arrays (“FPGA”). For example, the
15 sensor **704** communicates with a DSP processing FPGA **710** and a control FPGA **712**, each of which communicates with a processor interface FPGA **714**. The processor interface **714** in turn communicates with a processor **716** and a secure communication FPGA **718**. The control FPGA **712** communicates with a roll/pitch/altitude sensor **720** and a control motor **722**, which may control parts of the aircraft **702**.

20 *Pressure Sensors*

In some embodiments, the method of detecting a change in pressure comprises placing one or more pressure sensors as described herein in an environment; and measuring a frequency shift of an electromagnetic signal induced in the ceramic coil inductor to detect a change in pressure of the environment.

25 As described herein, the change in distance is a function of pressure within the environment. In embodiments, the change in the distance between the first surface of the protrusion and the second cavity surface results in the frequency shift.

In some embodiments, the one or more pressure sensors are configured to detect the change in pressure in the environment with a pressure in the range from about 0 psi to about
30 40,000 psi, for example about 1 psi, about 10 psi, about 50 psi, about 100 psi, about 150 psi, about 200 psi, about 300 psi, about 400 psi, about 500 psi, about 600 psi, about 700 psi, about

800 psi, about 900 psi, about 1,000 psi, about 2,000 psi, about 3,000 psi, about 4,000 psi, about 5,000 psi, about 6,000 psi, about 7,000 psi, about 8,000 psi, about 9,000 psi, about 10,000 psi, about 15,000 psi, about 20,000 psi, about 25,000 psi, about 30,000 psi, about 35,000 psi, about 40,000 psi, and any ranges therebetween.

- 5 It should be apparent that the foregoing relates only to certain embodiments of the present disclosure and that numerous changes and modifications may be made herein without departing from the spirit and the scope of the disclosure as defined by the following claims and equivalents thereof.

Claims

We claim:

1. A temperature sensor comprising:
 - a ceramic coil inductor having a first end plate and a second end plate, wherein the ceramic coil inductor is formed of a ceramic composite that comprises carbon nanotubes, carbon nanofibers, or a combination thereof dispersed in a ceramic matrix; and
 - a thin film polymer-derived ceramic (PDC) nanocomposite disposed between the first and the second end plates, wherein the thin film PDC nanocomposite has a dielectric constant that increases monotonically with temperature.
2. The temperature sensor of claim 1, wherein the ceramic coil inductor is configured to communicate with an external radio frequency antenna.
3. The temperature sensor of claim 1, further comprising a patch antenna configured to communicate with an external radio frequency antenna, wherein the patch antenna is attached to the first end plate of the ceramic coil inductor.
4. The temperature sensor of claim 1, wherein the volume fraction of carbon nanotubes in the ceramic composite is about 15 % to about 70 %.
5. The temperature sensor of claim 1, wherein the ceramic matrix comprises a PDC material.
6. The temperature sensor of claim 1, wherein the ceramic composite comprises single-walled carbon nanotubes, multi-walled carbon nanotubes, or a combination thereof.

7. A pressure sensor comprising:
 - a ceramic coil inductor having a first end plate and a second end plate, wherein the ceramic coil inductor is formed of a ceramic composite that comprises carbon nanotubes, carbon nanofibers, or a combination thereof dispersed in a ceramic matrix; and
 - a polymer-derived ceramic (PDC) nanocomposite structure disposed between the first and the second end plates, wherein the PDC nanocomposite structure has walls that define an internal cavity having a first cavity surface and an opposed second cavity surface,
 - wherein the first and second cavity surfaces are spaced a distance from one another.
8. The pressure sensor of claim 7, wherein the volume fraction of carbon nanotubes in the ceramic composite is about 15 % to about 70 %.
9. The pressure sensor of claim 7, wherein the ceramic matrix comprises a PDC material.
10. The pressure sensor of claim 7, wherein the ceramic composite comprises single-walled carbon nanotubes, multi-walled carbon nanotubes, or a combination thereof.
11. A method for making a wireless temperature or pressure sensor, the method comprising:
 - forming a ceramic coil inductor having a first end plate and a second end plate, wherein the ceramic coil inductor comprises carbon nanotubes, carbon nanofibers, or a combination thereof dispersed in a ceramic matrix; and
 - providing a polymer-derived ceramic (PDC) nanocomposite between the first end plate and the second end plate.
12. The method of claim 11, wherein the PDC nanocomposite is in the form of a thin film and has a dielectric constant that increases monotonically with temperature.
13. The method of claim 12, further comprising attaching a patch antenna to the first end plate of the ceramic coil inductor.

14. The method of claim 11, wherein the ceramic matrix comprises a PDC material.
15. The method of any one of claims 11-14, wherein the sensor is the temperature sensor and the manufacturing process comprises:
 - providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes, carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers;
 - disposing the mixture on a support;
 - exposing the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer; and
 - pyrolyzing the mixture at a temperature and for a time effective to form the ceramic coil inductor or the PDC nanocomposite.
16. The method of any one of claims 11-14, wherein the sensor is a temperature sensor and the manufacturing process comprises:
 - providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes or carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers;
 - disposing a first portion of the mixture on a support;
 - exposing the first portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the first portion;
 - disposing a second portion of the mixture on the first portion;
 - exposing the second portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the second portion; and
 - pyrolyzing the first and second portions of the mixture at a temperature and for a time effective to form the ceramic coil inductor or the PDC nanocomposite.
17. The method of any one of claims 11-14, wherein the sensor is the pressure sensor and the manufacturing process comprises:
 - providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes, carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers;
 - disposing the mixture on a support;
 - exposing the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer; and

pyrolyzing the mixture at a temperature and for a time effective to form the ceramic coil inductor.

18. The method of any one of claims 11-14, wherein the sensor is a pressure sensor and the manufacturing process comprises:

providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes, carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers;

disposing a first portion of the mixture on a support;

exposing the first portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the first portion;

disposing a second portion of the mixture on the first portion;

exposing the second portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the second portion; and

pyrolyzing the first and second portions of the mixture at a temperature and for a time effective to form the ceramic coil inductor.

19. The method of any one of claims 11-14, wherein the sensor is the pressure sensor and the manufacturing process comprises:

providing a mixture of a liquid-state pre-ceramic polymer and carbon nanotubes, carbon nanofibers, or a combination of carbon nanotubes and carbon nanofibers;

disposing a first portion of the mixture on a first support;

exposing the first portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the first portion;

subjecting the first portion of the mixture to pyrolysis at a temperature and time effective to form a first section of the PDC nanocomposite, wherein the first portion comprises a first cavity surface;

metallizing the first portion of the PDC nanocomposite;

disposing a second portion of the mixture on a second support;

exposing the second portion of the mixture to ultraviolet light effective to substantially cure the liquid-state pre-ceramic polymer of the second portion;

- pyrolyzing the second portion of the mixture at a temperature and for a time effective to form a second section of the polymer derived-ceramic nanocomposite, wherein the second portion comprises a second cavity surface;
- metallizing the second portion of the PDC nanocomposite; and
- joining the first portion with the second portion to form the PDC nanocomposite.
20. The method of claim 15, wherein the mixture further comprises a UV sensitizer.
21. The method of claim 15, wherein the liquid-state pre-ceramic polymer comprises polysilazane.
22. A method of detecting a change in temperature, the method comprising:
- placing one or more temperature sensors of any one of claims 1-6 in an environment; and
- measuring a frequency shift of an electromagnetic signal induced in the ceramic coil to detect a change in temperature of the environment.
23. The method of claim 22, wherein the one or more temperature sensors are configured to detect the change in temperature in the environment with a temperature in the range from about 25 °C to about 1000 °C.
24. A method of detecting a change in pressure, the method comprising:
- placing one or more pressure sensors of any one of claims 7-10 in an environment; and
- measuring a frequency shift of an electromagnetic signal induced in the ceramic coil inductor to detect a change in pressure of the environment.
25. The method of claim 24, wherein a change in the distance between the first surface of the protrusion and the second cavity surface results in the frequency shift, and wherein the change in distance is function of pressure within the environment.

26. The method of claim 25, wherein the one or more pressure sensors are configured to detect the change in pressure in the environment with a pressure in the range from about 0 psi to about 40,000 psi.

1/7

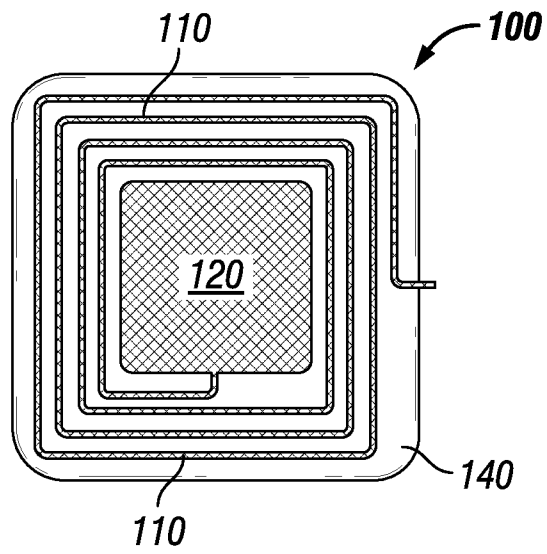


FIG. 1A

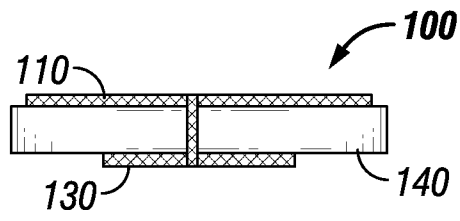


FIG. 1B

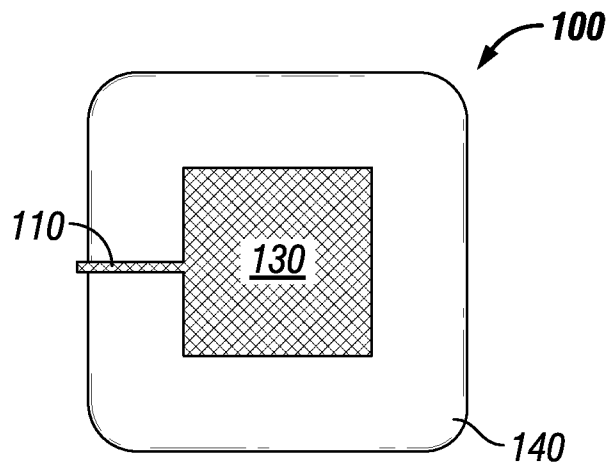


FIG. 1C

2/7

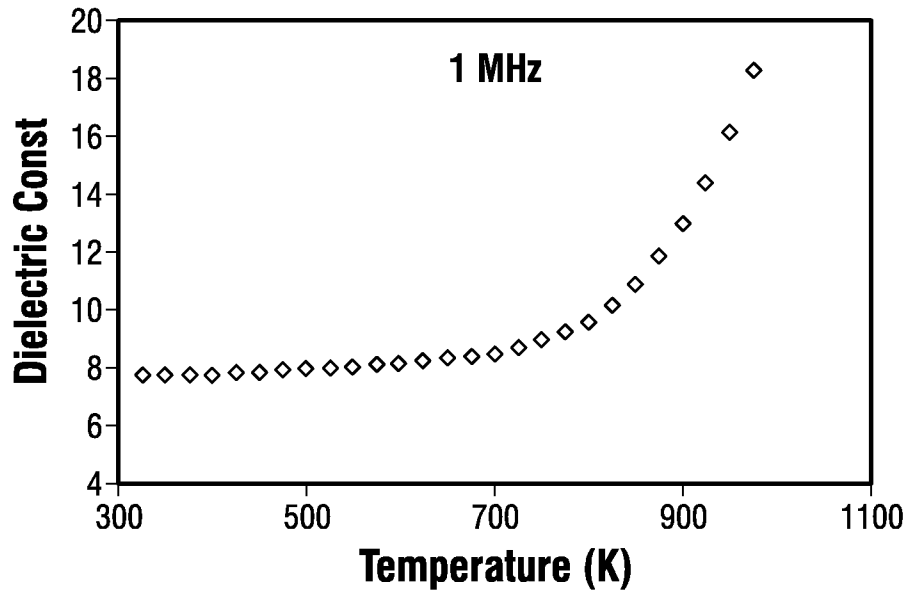


FIG. 2

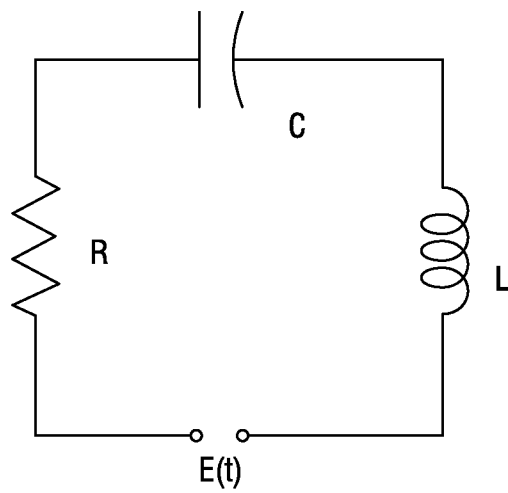


FIG. 3

3/7

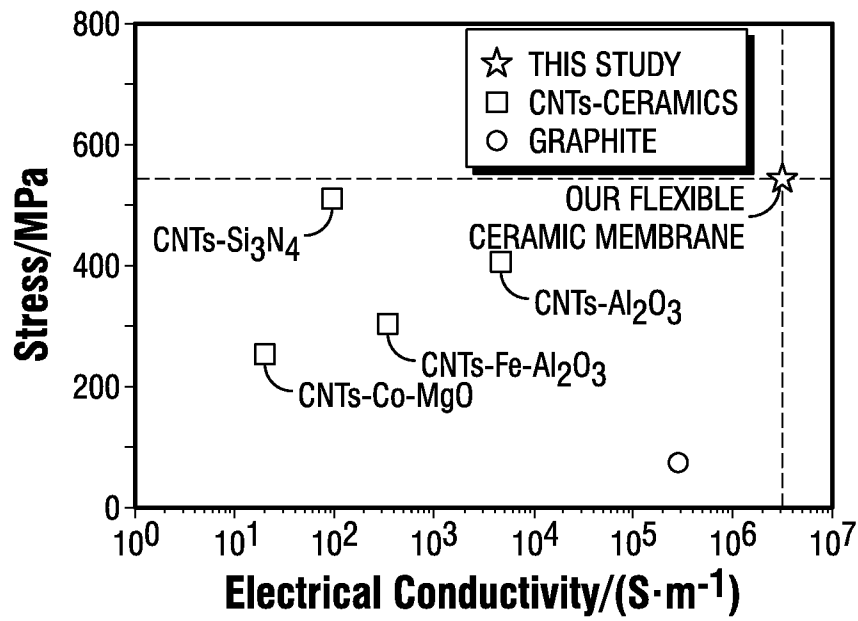


FIG. 4A

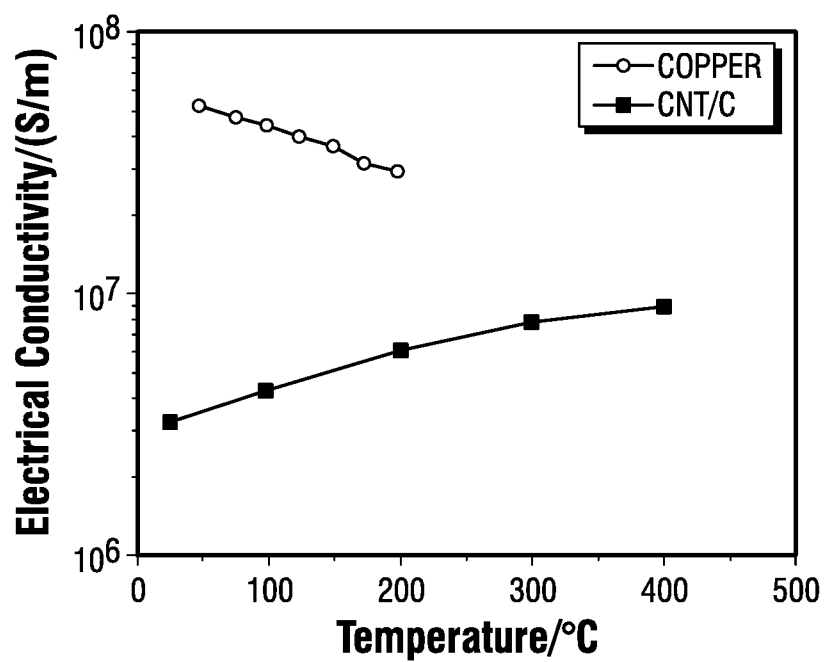


FIG. 4B

4/7

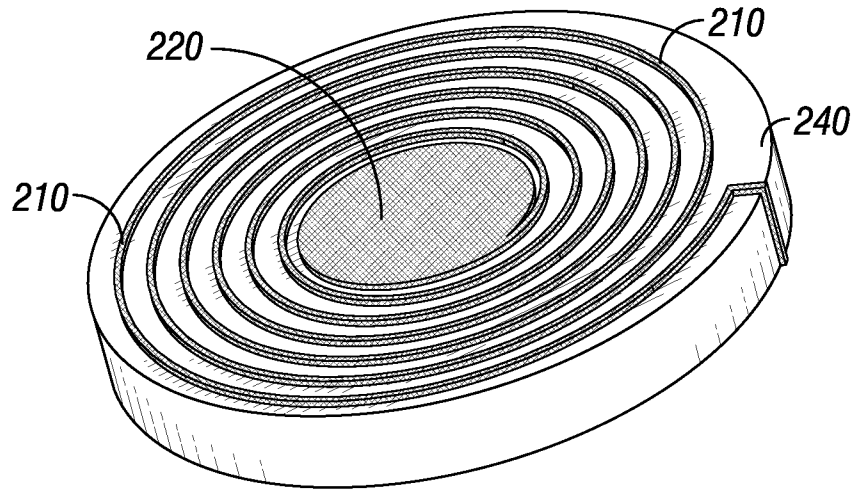


FIG. 5A

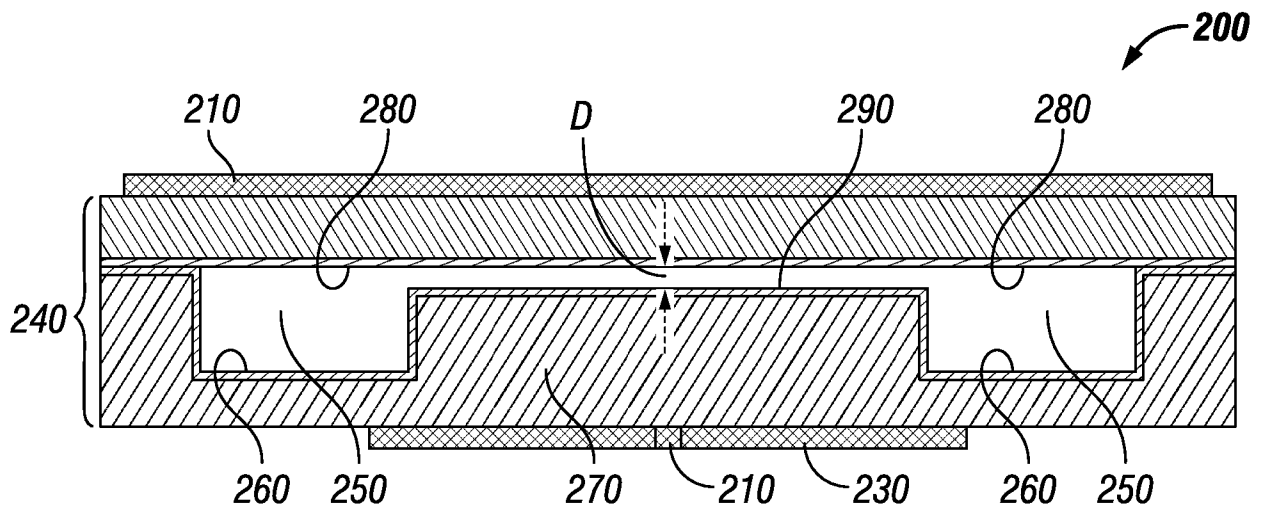


FIG. 5B

5/7

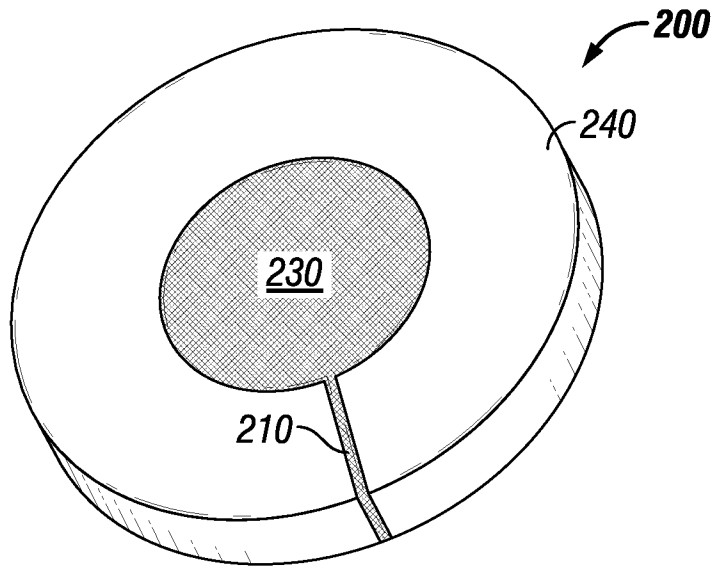


FIG. 5C

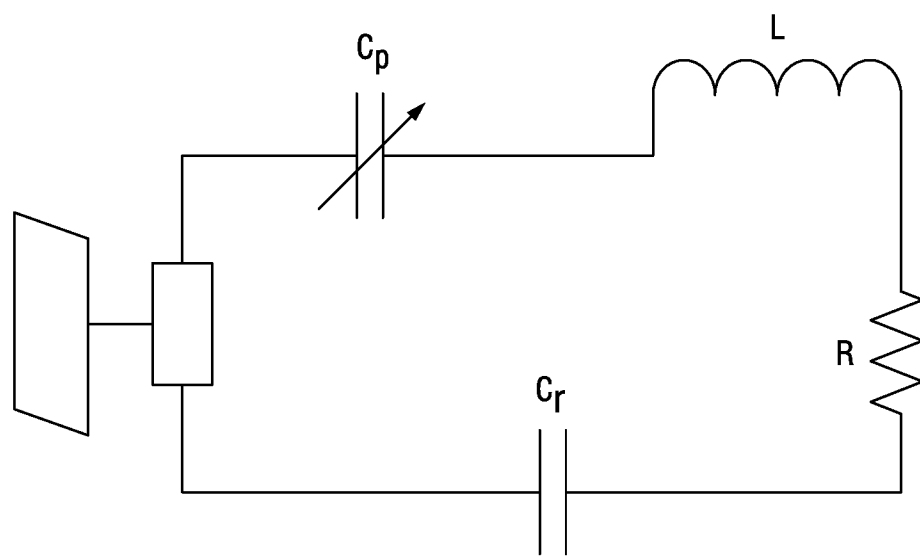


FIG. 6

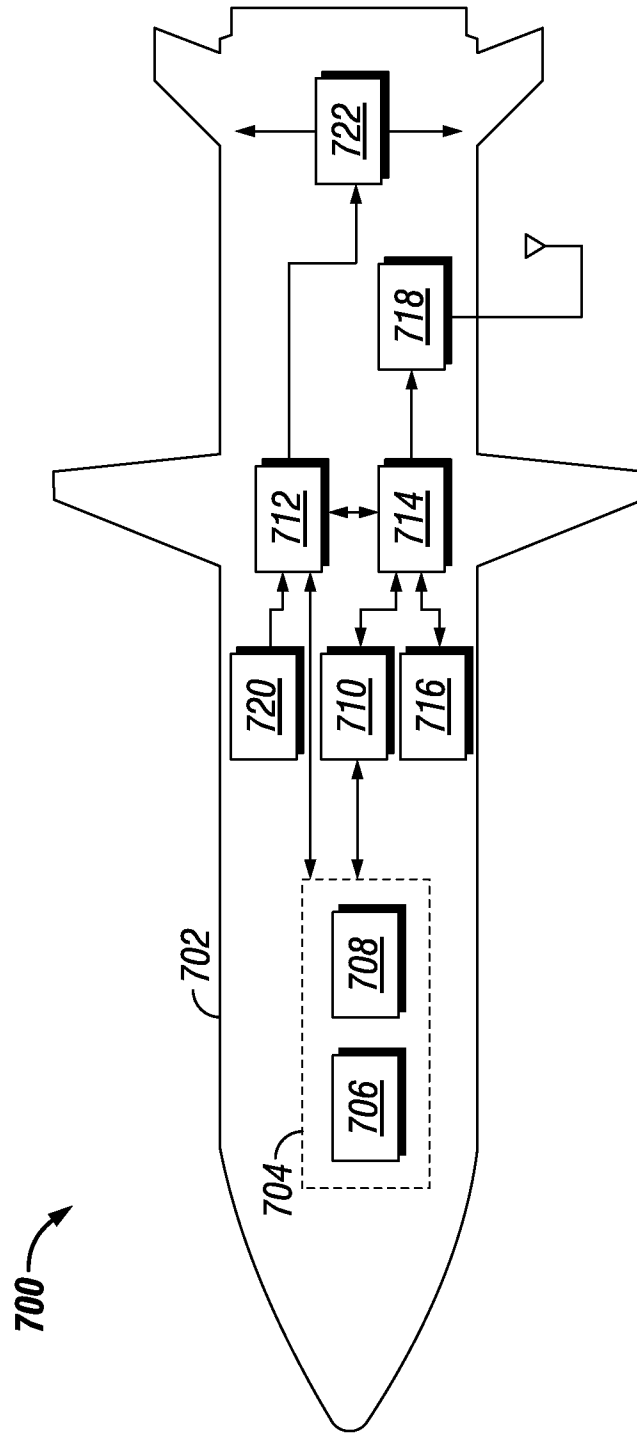


FIG. 7

7/7

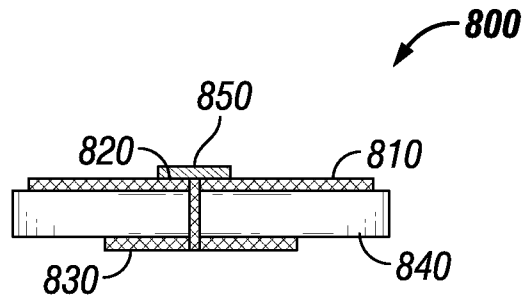


FIG. 8

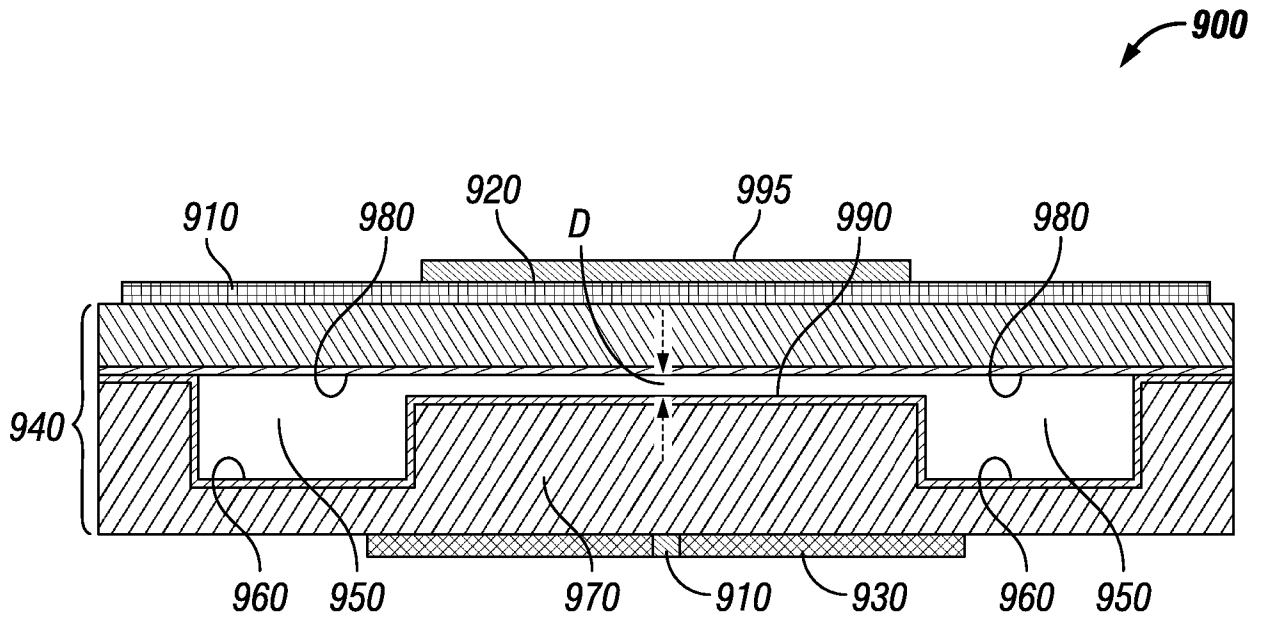


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2018/012538

A. CLASSIFICATION OF SUBJECT MATTER
 IPC(8) - G01K 7/34; G01D 3/08; G01L 9/10 (2018.01)
 CPC - G01K 7/343; G01D 3/08; G01K 7/34; G01L 9/10 (2018.08)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
 USPC - 340/584; 29/595; 340/626 (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 See Search History document

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2010/0321191 A1 (GONG et al) 23 December 2010 (23.12.2010) entire document	1-14, 22-26
Y	US 2002/0003463 A1 (SHIN et al) 10 January 2002 (10.01.2002) entire document	1-14, 22-26
A	US 2008/0122439 A1 (BURDICK et al) 29 May 2008 (29.05.2008) entire document	1-26
A	US 2006/0084752 A1 (OUNAIES et al) 20 April 2006 (20.04.2006) entire document	1-26

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 23 August 2018	Date of mailing of the international search report 10 SEP 2018
---	--

Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, VA 22313-1450 Facsimile No. 571-273-8300	Authorized officer Blaine R. Copenheaver PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774
---	--