United States Patent [19]

Logan et al.

[11] **3,808,090**

[45] **Apr. 30, 1974**

[54] **MECHANICAL ABRASION OF WOOD PARTICLES IN THE PRESENCE OF WATER AND IN AN INERT GASEOUS ATMOSPHERE**

[76] Inventors: **Kenneth C. Logan,** P.O. Box 1456, Quebec, 2 P.Q., Canada; **Friedrich O. B. Luhde,** 8226 Lilly Stone Dr., Bethesda, Md. 20034

[22] Filed: **Mar. 3, 1972**

[21] Appl. No.: **231,694**

Related U.S. Application Data

[63] Continuation-in-part of Ser. No. 77,374, Oct. 1, 1970, abandoned, which is a continuation-in-part of Ser. No. 888,728, Dec. 29, 1969, abandoned, which is a continuation-in-part of Ser. No. 704,497, Dec. 14, 1967, abandoned, which is a continuation-in-part of Ser. No. 569,351, Aug. 1, 1966, abandoned, which is a continuation-in-part of Ser. No. 357,008, March 25, 1964, abandoned, which is a continuation-in-part of Ser. No. 759,329, Dec. 14, 1961, abandoned.

[52] **U.S. Cl.** **162/23,** 162/26, 162/28, 241/15, 241/28

[51] **Int. Cl.** **D21b 1/30**

[58] **Field of Search** 162/23, 17, 26, 27, 28, 162/65, 68, 15, 18, 20, 21, 28

[56] **References Cited**

UNITED STATES PATENTS

2,454,532	11/1948	Walter	162/23
2,008,892	7/1935	Asplund	162/23
3,597,310	8/1971	Sumi et al.	162/26 X

FOREIGN PATENTS OR APPLICATIONS

567,103	12/1958	Canada	162/26

OTHER PUBLICATIONS

Schafer et al., "Effect of Temperature and Consistency in Mechanical Pulping," Paper Trade Journal, pp. 71–76, 9–26–1935.

Casey, Pulp and Paper, p. 303, Vol. I, 1960.

Primary Examiner—S. Leon Bashore
Assistant Examiner—Arthur L. Corbin
Attorney, Agent, or Firm—Sughrue, Rothwell, Mion, Zinn & Macpeak

[57] **ABSTRACT**

Wood particles are fed into a substantially closed chamber where they are mechanically abraded in the presence of water in an inert gaseous atmosphere under an environmental pressure of 10 to 60 psig, a temperature of 160°–300° F and under a power consumption of 50 to 150 horsepower days per ton.


7 Claims, 9 Drawing Figures

PATENTED APR 30 1974

3,808,090

SHEET 1 OF 5

Fig. 8.

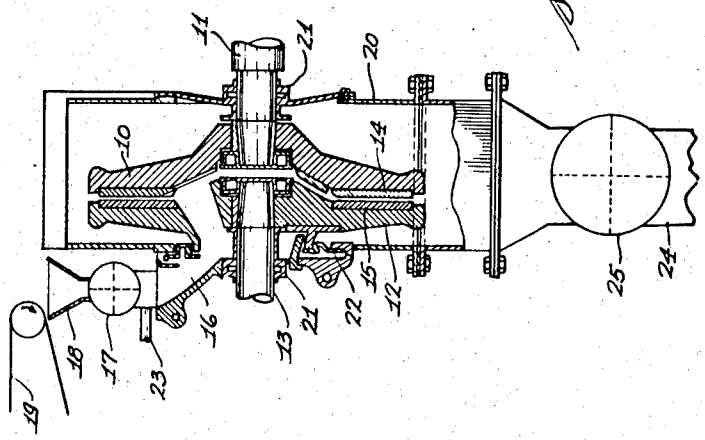

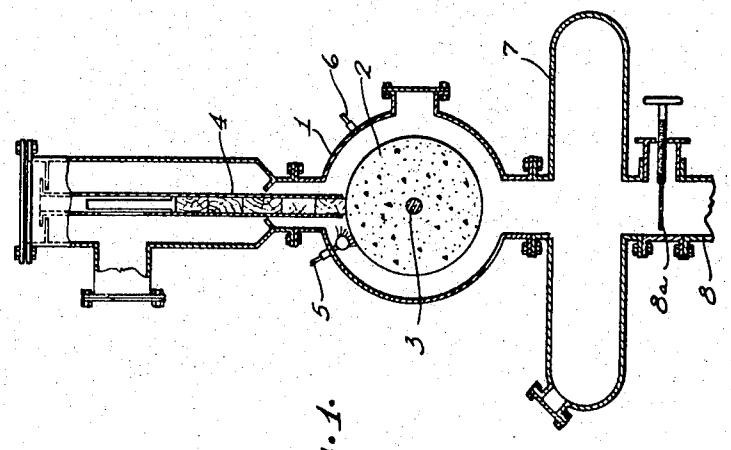


Fig. 1.

Kenneth C. Logan
Friedrich O.B. Kuhde
INVENTOR

Weir, Marshall, MacRae
& Lamb
ATTORNEY

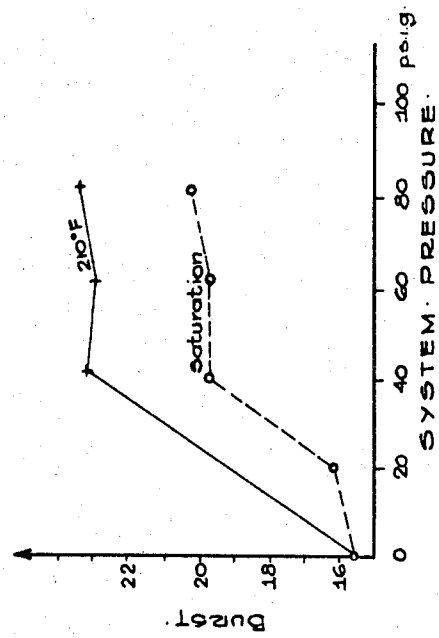


Fig. 3.

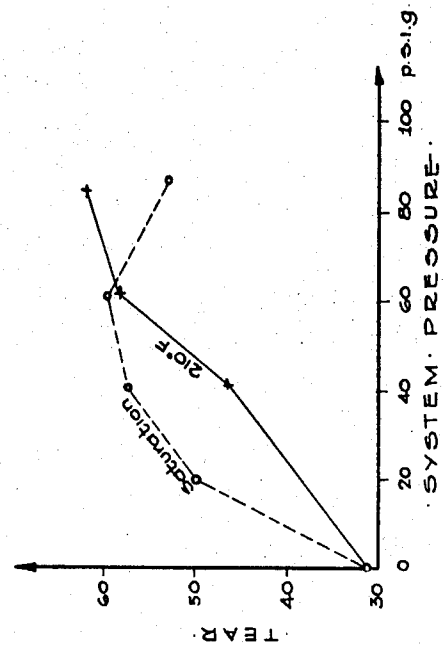


Fig. 2.

Kenneth C. Logan
Friedrich O.B. Luhde
INVENTOR

Weir, Marshall, MacRae & Lamb
ATTORNEY

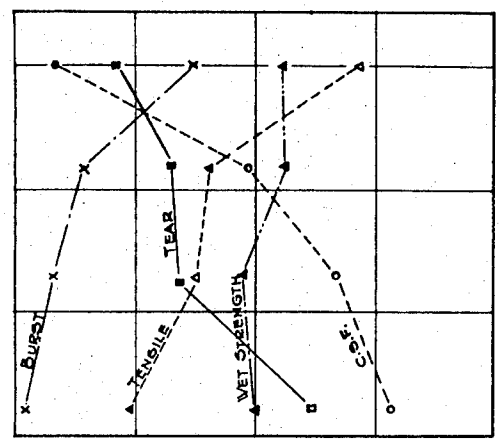


Fig. 5.

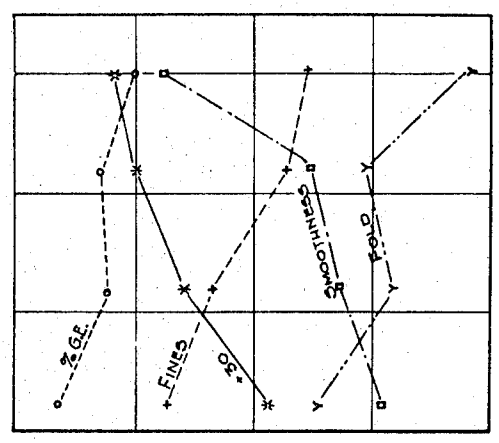


Fig. 4.

Kenneth C Logan
Friedrich O.B. Rudde
INVENTOR

Weir, Marshall, MacRae
& Lamb
ATTORNEY

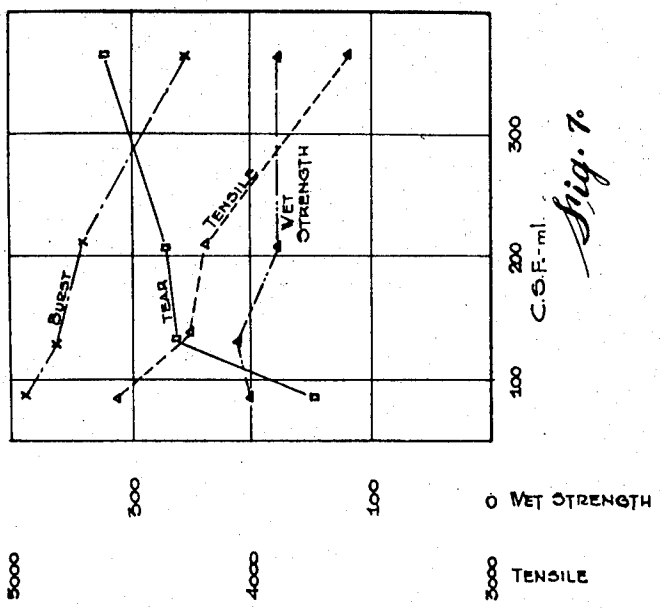


Fig. 7.


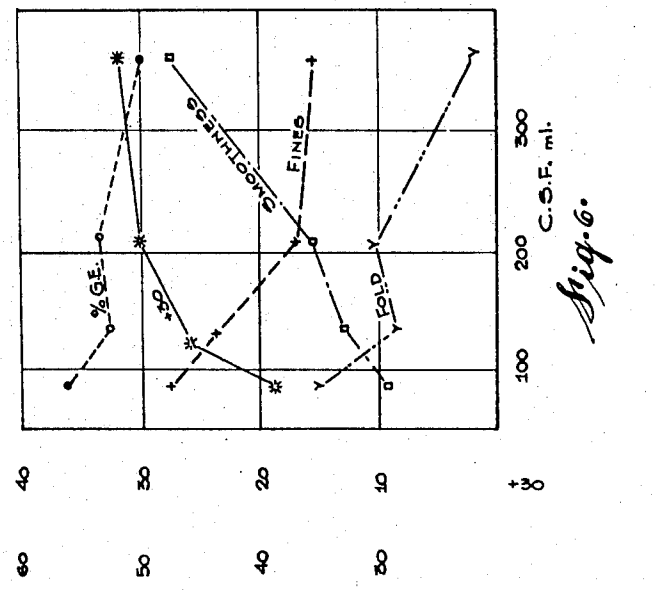


Fig. 6.

Kenneth C. Fogan
Friedrich O.B. Rudde
INVENTOR

Weir, Marshall, MacRae & Lamb
ATTORNEY

Fig. 9.

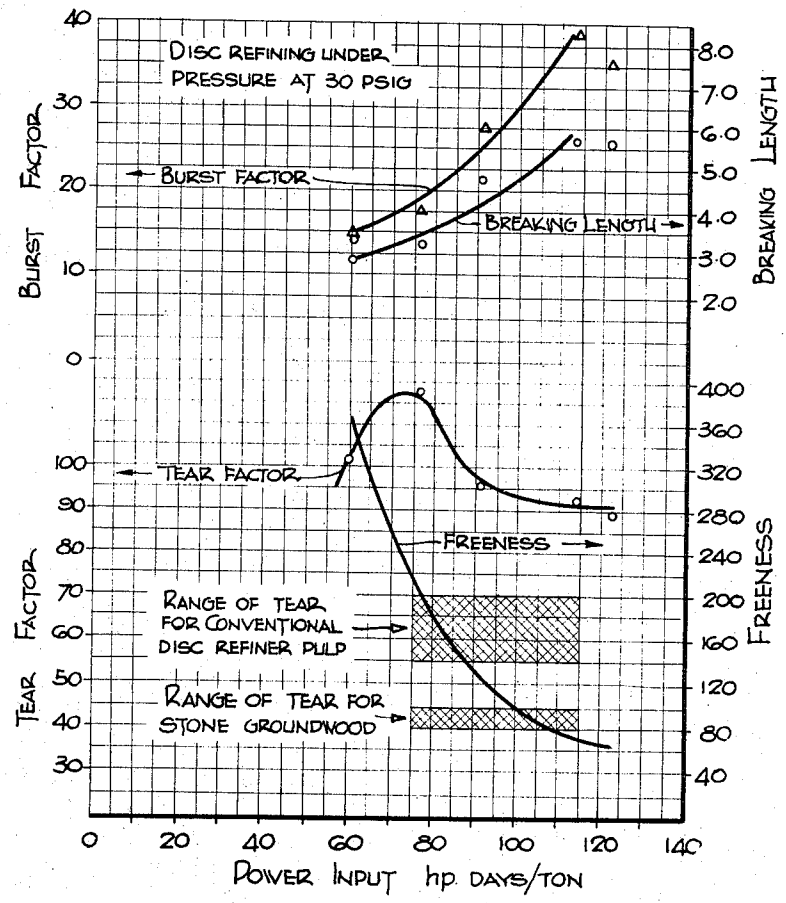

Kenneth C. Logan
Friedrich O. C. Luhde
INVENTOR

Weir, Marshall, MacRae & Lamb
ATTORNEY

MECHANICAL ABRASION OF WOOD PARTICLES IN THE PRESENCE OF WATER AND IN AN INERT GASEOUS ATMOSPHERE

RELATED APPLICATIONS

This application is a continuation-in-part of application Ser. No. 77,374, filed Oct. 1, 1970, now abandoned, which is a continuation-in-part of application Ser. No. 888,728 filed Dec. 29, 1969 and now abandoned and which, in turn, was a continuation-in-part of Ser. No. 704,497, filed Dec. 14, 1967, now abandoned and which was a continuation-in-part of Ser. No. 569,351, filed Aug. 1, 1966, now abandoned and which was a continuation-in-part of Ser. No. 357,008, filed on Mar. 25, 1964, now abandoned and which in turn, was a continuation-in-part of Ser. No. 159,329 filed Dec. 14, 1961 and now abandoned.

BACKGROUND OF THE INVENTION

In the manufacture of mechanical wood pulps, two basic procedures have heretofore been followed. In one case, wood logs are abraded to a pulp by pressing against a rotating abrasive wheel formed, for instance, of silicon carbide, in the presence of sufficient moisture to prevent decomposition by excessive temperatures. In the other case, which is becoming of growing significance in the industry, there is employed a mechanical refining treatment wherein wood logs are first reduced to small chips which are subsequently fed between rotating discs set at small clearance and provided with abrading surfaces of suitable design to promote the refining action desired.

In this abrading process there is an input of power of about 75 to 130 H.P. days per ton and sufficient water is added to encase the wood particles and prevent discoloration which would result from "dry" abrading. The water also seems to act as a vehicle to dissipate local heat and to lubricate the mass so it flows and gives relative uniform treatment in the abrading or refining action. All such installations have sufficient water added so that the consistency is below about 30% (230% water on dry basis of wood).

In the existing systems for the production of papermaking mechanical pulp, it is the practice to employ atmospheric pressure in the abrading operation. The feed of raw material and the recovery of the product is accomplished without provision for isolating the system or for controlling the system pressure during the abrading treatment.

In the Asplund process, well known in the industry for the manufacture of low grade pulps for employment in the manufacture of roofing and flooring felts the system involves generally a presteaming of wood chips followed by refining under high pressure. The products are not suitable for papermaking pulps because of their inherent low strength and other poor paper-making qualities. In the Asplund process, conditions are selected to provide a mechanical reduction of wood into fibers with least possible energy input. To this end, high pressures of the order of 115–150 psig and low energy input of the order of 7–12 horsepower days per ton are employed to attain best results. Asplund process plants have been in existence throughout the world for over twenty years. However, as previously indicated, these plants have not successfully produced paper grades.

In papermaking grades of mechanical pulp, the most widespread in use is stone groundwood which is produced by abrading logs with an abrasive stone, as previously indicated. Almost the entire world production of newsprint, for example, is manufactured from pulp in which stone groundwood is the principal component.

However, efforts have constantly been made to improve the strength of paper obtained from stone groundwood since it has always been necessary to include some chemical pulps with the groundwood in order to achieve adequate strength for most requirements. Chemical pulps are much more expensive than mechanical pulps because they are obtained in low yields (40–50%) from wood and involve extensive, costly processing techniques. Their production causes pollution of the environment. Consequently, it has been a logical objective of research in the paper industry to develop a mechanical wood pulp with sufficient strength and toughness to permit its use as the only fibrous raw material for paper manufacture. However, prior to the present invention, no economically feasible procedure for the production of such a pulp has thus far been developed.

One step towards achieving improved strength properties has been the development of disc refiners for processing wood chips into mechanical pulp. The equipment currently in use comprises conventional disc refiners operating at atmospheric pressure with unrestricted feed and discharge ports. Generally, the tear resistance (TAPPI method) of disc refiner pulps is about 50% greater than that of corresponding stone groundwood made from the same wood species. These disc refiner mechanical pulps are currently considered to be the strongest available for papermaking purposes.

SUMMARY OF THE INVENTION

The present invention seeks to provide a wholly mechanical wood pulp with sufficient strength to render it quite satisfactory for the manufacture of paper of acceptable quality.

In accordance with the invention, the lignocellulosic material is fiberized by mechanically abrading it in a closed chamber under a power input of at least 15 horsepower days per ton in the presence of a suitable quantity of water. During the entire abrading step, the material is maintained in an inert gaseous atmosphere of a pressure of 10 to 80 psig, preferably 20 to 40 psig.

In the accompanying drawing:

FIG. **1** is an end elevation, partly in section, of a grinder which may be employed to carry out the method of the invention,

FIG. **2**, is a graph showing the dependence of tear on pressure at different water temperatures,

FIG. **3** is a graph showing the dependence of burst on pressure at different water temperatures,

FIGS. **4**, **5**, **6** and **7** are graphs showing pulp and paper properties versus water temperatures and freeness,

FIG. **8** is a side elevation, partly in section, of a disc refiner apparatus which may be employed to carry out the method of the invention, and

FIG. **9** is a graph illustrating the significance of power input in relation to pulp properties.

Referring to FIG. **1**, **1** is a closed vessel enclosing a grinding or abrasive wheel **2** mounted on a driven shaft

3. A magazine or feeding device **4** is adapted to feed the wood onto the surface of the wheel **2.** Shower water is applied to the wood constantly during the treatment by means of pipes **5.** An inlet for air, steam or other gas under pressure is indicated at **6.** Stock is discharged from the pit to a collecting container **7** and thence through a pipe **8** having a valve **8***a* therein.

The grinder is operated in a pressurized atmosphere or environment by supplying a pressure medium through inlet **6.** Steam, air or other inert gas, such as argon or nitrogen, may be employed as the pressure medium.

Referring to FIG. **8,** a refiner of basically conventional type is therein illustrated and comprises a rotating disc **10** mounted on a shaft **11,** a stationary disc **12** carried by shaft **13,** mating plates **14** and **15** carried by the discs, a chip feeding passage **16** for delivering chips between the plates **14** and **15,** a chip feeding device **17** in passage **16,** a chip receiving hopper **18** leading to the passage, and a conveyer **19** for supplying chips to the hopper.

In accordance with the invention, the refiner is fully enclosed in a casing **20,** suitable seals as indicated at **21** and **22** being provided to make the casing substantially pressure tight.

The casing **20** and the enclosed refining elements are subjected to pressure of steam, air or other gas, through a connection **23** communicating with passage **16.** A suitable quantity of water is fed into the casing with the chips. Stock is discharged from the casing through a conduit **24** provided with a valve **25.**

The abrading operation in each case is conducted in a pressurized environment, within the vessel **1** or casing **20,** of 10 to 80 psig. Preferably, such pressure is maintained at about 30 psig and within the range 20 to 40 psig. The mechanical energy introduced to perform the abrading step is at least 15 hp. days/ton and may be in the range of 30 to 150 hp. days/ton.

The wood chips may be subjected to a preliminary heating before being fed to the refiner with beneficial results. Such preliminary heating is conducted at temperatures of 50° to 100° C.

The following Table I gives the results of operational tests conducted using a grinder such as illustrated in FIG. **1,** —

TABLE I

I.	Independent Grinding Conditions									
	(a) Constant Conditions:									
	Specific Grinding Pressure	psi	40							
	Shower Water Volume	USGPM	2.4 . . . 2.7							
	Wood Moisture	%	28.4							
	Wood Density	g/cc	0.423							
	Burst No.		1.	2.	3.	4.	5.	6.	7.	8.
	(b) Variable Conditions									
	Shower Water Temperature	°F	210	210	210	210	260	280	300	315
	Pressurizing Medium		Atmos.	Air	Air	Air	Air	Air	Air	Air
	System pressure	psig	0	40	60	80	20	40	60	85
II.	Dependent Variables									
	Travelling rate of wood	micron/sec	567	623	903	701	645	945	1030	1050
	Specific Power Consumption	HP day/air dry ton	72.2	74.6	55.5	51.5	56.6	43.4	49.9	35.8
	Pulp Properties									
	Bulk	cc/g	2.15	2.17	2.31	2.39	2.34	2.43	2.48	2.50
	Brightness	% G.E.	54.3	53.9	52.6	54.1	54.0	52.1	51.7	47.6
	Smoothness	cc/min	84	69	117	116	158	136	159	208
	Porosity	sec/50 cc.	42.4	76.9	32.0	33.0	38.4	24.3	22.8	16.2
	Freeness	ml.	48	55	139	130	156	174	167	225
	Burst		15.6	23.0	20.7	23.0	15.8	19.6	19.6	20.1
	Tensile	m	3450	4400	4050	4250	3350	3950	3700	3250
	Tear	gcm/cm/n	31	47	59	61	50	58	62	54
	Fold		—	1458	1310	1795	141	777	801	772
	Wet Web Strength W20	g/3cm	103	198	158	197	142	169	183	186
	Initial Solid Content	%	100	156	104	148	109	118	126	133
	Initial Wet Web	g/3cm	19.2	16.3	15.3	15.8	17.0	15.3	15.5	14.7
	Fibre Classification:									
	Ret. 14 mesh	%	0.1	0.2	1.1	0.5	0.5	0.4	0.9	1.8
	Ret. 30 Mesh	%	6.5	16.3	24.8	23.9	16.1	24.7	26.5	32.4
	Ret. 50 Mesh	%	9.2	13.8	17.3	16.4	14.4	15.3	16.0	16.0
	Ret. 100 Mesh	%	14.4	15.0	14.4	14.7	15.8	13.6	13.8	12.8
	Fines (passing 100 Mesh)	%	69.8	54.7	42.4	45.5	53.2	46.0	42.8	37.0
	Rejects	%	0.8	2.9	2.3	3.0	2.1	6.5	7.2	5.5
	H_2O - Sol.	%	3.4	2.5	3.2	2.8	3.7	3.8	4.7	6.3
	Total Yield	%	96.6	97.5	96.8	97.2	96.3	96.2	95.3	93.7

The advantages of operating a grinder at the elevated pressures set forth is clearly shown in the table. It will be observed that the pulps (**2**) and (**3**), for instance, prepared in the pressurized atmosphere required less energy, had higher freeness, and were produced at a greater rate than the pulp (**1**) which was prepared under conventional atmospheric conditions.

The classfication of fiber sizes reveals that grinding in the pressurized atmosphere defined results in fewer fines and a larger increase in the fraction retained on the 30 mesh screen. Micrographs show that pulps (**2**) and (**3**) contain a predominance of long unbroken fibers such as are found in chemical pulps in contrast with the predominance of short broken fibers in conventional groundwood. As previously indicated, the presence of many long fibers in pulp is desirable be-

cause they result in paper with high resistance to tearing.

The strength properties of handsheets prepared from the pulps described indicate that resistance to tearing is much greater in handsheets produced from pulps (2) and (3) while other properties such as burst, breaking length, folding endurance and initial wet web strength, are at levels which are higher than or only with very low freeness achieved by using conventional groundwood.

During grinding in the pressurized atmosphere described, it is desirable to supply the shower water at increased temperatures. It has been found that this temperature has relation to the properties of the resulting pulp and may be chosen in accordance with such properties.

FIGS. 2 and 3 illustrate the dependence of tear and burst on pressure at two shower water temperatures, namely; 210° F. and saturation temperature for the particular pressure employed.

Table II gives the results of tests conducted at a pressure of 60 psig and shower water temperatures of 160° F., 210° F., 260° F, and 300° F., all other conditions, including the wood samples, being identical. Properties of a conventional groundwood are included for comparison. These results are also plotted on the curves of FIGS. 4 to 7.

The results show:

1. The most desirable practical range of pressure is 10 to 30 psig.

hence production by 53%. The average production of a Waterous Standard hydraulic magazine grinder is 23.8 air dry tons per day. At 160° F. the production in accordance with the invention is 71% greater than that of the grinder mentioned and at 300° F., it is 162% greater.

4. The tear property increases as the shower water temperature is increased, although other stock properties decrease. However, the pulp quality is best evaluated when compared to the pulp freeness (see FIGS. 6 and 7).

a. The freeness rose sharply from a minimum of 89 C.S.F. to a maximum of 364 C.S.F. This is further reflected in the increase in long fiber content (+30) and the decrease in fines content.

b. Bulk increases as the temperature increases. This is to be expected because of the increase in long fibers.

c. Smoothness decreases and porosity increases as the temperature increases. These effects are directly related to freeness increase. It will be observed that smoothness shows a linear increase as freeness increases.

d. While burst and tensile dropped as the temperature increased, when this is related to freeness, the decrease is found to be practically linear. This implies that the strength drop is only that which corresponds to the higher freeness. It will be noted that the burst and tensile values are at a very high level for all the pulps tested and these values are

TABLE II

	EFFECT OF TEMPERATURE ON PRESSURIZED GRINDING				CONVENTIONAL GROUNDWOOD
Shower Temperature*	160°F	210°F	260°F	300°F	
C.S.F. - ml	89	132	208	364	115
Burst - g/sq.cm.	24.5	23.4	22.2	17.6	13.3
Tensile - m	4550	4250	4200	3600	3200
Tear - cm.g/cm.	55	66	67	72	45
Folds (using 0.3 kg. load)	1463	865	1065	193	115
Wet strength - g	200	210	176	175	108
Bulk - cc/g	2.24	2.37	2.45	2.69	2.56
Brightness - % G.E.	56.4	52.7	53.1	50.3	57.5
Smoothness - ml/sec.	97	129	156	274	152
Porosity - Sec./50 ml	63.3	38.8	20.2	8.6	20.8
Wood Solubles - % on o.d. wood	1.6	2.8	3.0	3.9	—
Screen - Rejects	1.8	3.3	3.4	5.5	0
Classification + 14	0.3	0.7	1.6	2.9	0.4
+ 30	18.9	25.8	29.7	31.7	10.8
+ 50	16.1	16.1	18.3	17.5	23.7
+ 100	17.1	14.3	13.6	12.6	10.4
Fines	47.6	43.4	36.8	35.3	54.9
Wood Travel micro/sec.	792	885	1105	1210	461
Production Rate (Relative Value)	40.7	45.7	57.0	62.6	23.8
Power Consumption - HPD/ADT	56.2	50.2	36.1	27.7	70.8

*Constant Test Conditions
60 psig (Air) - System pressure
40 psi - Specific grinding pressure
2.5 USGPM - Shower water flow
Spruce - Wood
0.396 g/cc - Wood density
33.6% - Wood moisture

2. The power input is desirably not substantially less than 20 HP days/ton. A practical operating range is 15 to 80 HP days/ton but a range of 15 to 150 HP days/ton may be employed.

3. Increasing the shower water temperature from 160° F. to 300° F. increased the rate of wood travel and considerably higher than those of conventional groundwood at the same freeness. Thus,

Burst = maximum 24.5, minimum 17.6

Tensile = maximum 4450, minimum 3600.

e. The tear value increased from 55 to 72 with the sharp rise at 210° F. This sharp rise becomes even more

significant when related to freeness. The effect of temperature on tear is thus quite positive and most evident between 160°. to 210° F.

f. Fold value decreases somewhat with the temperature rise.

g. The wet strength is high in all cases as shown by the properties of the conventional groundwood. The change with temperature is believed to be related to the freeness of the stock.

h. The pulp brightness decreases as the shower temperature increases. The drop was 6.1% G.E. from 56.4% G.E.

5. The wood soluble portion increases from 1.6% at 160° F. to 3.9% at 300° F. and is lost from the process. The rejects increase from 1.8% at 160° F. to 5.5% at 300° F. These rejects consist of bundles of long fibers partially separated into individual fibers and consequently they could be readily recovered by a light refining.

Resistance to tear is particularly improved but other strength properties are also superior to those of conventional groundwood. Because of the large influence of freeness upon all properties, it is essential to take this factor into account when making comparisons.

Increasing shower water temperature generally enhances the effects of increased pressure and there is, therefore, the additional advantage that hotter shower water can be used at temperatures as high as correspond to saturation at the pressure employed.

In order further to demonstrate the advantages of the present invention, tests were conducted using a conventional two stage refining procedure with two "Bauer 480" refiners (3,000 H.P. each) operating in series and a single stage pressurized refiner of the type described herein of 3,000 H.P. Spruce and balsam chips (50/50) were the feed material and the power consumption in each case was about 70 H.P. days/ton. The results were:

Type of Operation	Conventional 2-Stage		Pressurized Refining		
System pressure psig	0		30		
Stock freeness	280	240	490	440	510
Burst factor	4.2	4.4	10	12	8.8
Tear factor	41	46	98	84	93
Breaking Length,km	1.19	1.9	2.4	2.5	2.3

It will be observed that the treatment in accordance with the invention produced a marked improvement in all strength properties as well as an increase in freeness. Normally, a higher freeness is associated with weaker pulp strength, but in the treatment in accordance with the invention, both strength and drainage characteristics are substantially and unexpectedly improved.

It has also been found that the addition of certain chemicals, as with the shower water, produces desirable results when used in conjunction with the process described. Useful chemicals in this regard may be generally defined as inorganic salts of sodium, calcium and magnesium. Examples of suitable compounds are, sodium bisulphite, sodium carbonate, sodium chloride, sodium sulphate, sodium sulphite, sodium hydrosulphite, sodium tetrapyrophate, sodium hexametaphosphate, sodium tri-polyphosphate, sodium hydroxide, zinc hydrosulphate, calcium chloride, magnesium chloride, and a chelating agent such as the pentasodium salt of diethylene-triamine-pentaacetic acid. Preferably, the compound added will be selected from the group sodium hydrosulphite, zinc hydrosulphite, sodium carbonate, sodium sulphite, and sodium hydroxide. The results of tests conducted with the addition of certain of these compounds with the shower water are given in the following table, —

TABLE III

THE EFFECT OF CHEMICAL ADDITIONS ON PRESSURIZED GROUNDWOOD

Grinding Variables							
Wood Density	0.411	g/cc					
Wood Moisture	23.6	%					
Shower Water Temperature	295	F					
System Pressure	60	p.s.i.g.					
Spec. Grinding Presure	40	p.s.i.					
CHEMICAL	—	Na_2SO_3	Na_2SO_3	$NaHSO_3$	$Na_2S_2O_4$	Na_2CO_3	$Na_4P_2O_7$
% on o.d. wood	—	5	12	20	9	8	10
Travelling rate micron/sec.	1000	1025	911	936	1090	980	1020
Production % (relative)	100	103	91	94	109	98	102
Spec. Power Cons. HP/day a.d.t.	38.1	37.0	37.7	35.3	37.7	33.3	34.0
Bulk - cc/g	2.28	2.25	2.03	2.38	2.33	1.82	2.04
Brightness - % G.E.	51.0	50.5	49.8	53.4	55.0	38.3	46.6
Smoothness - cc/min.	121	88	56	103	114	47	53
Porosity - s/50 c.c.	32.8	39.2	104.6	35.6	27.6	183.2	127.1
Freeness - ml.	151	139	98	127	218	85	77
Burst	22.1	22.5	28.3	19.3	25.5	33.5	27.3
Tensile - m	4200	4600	5350	3850	4750	5800	5200
Tear - gcm/cm.	58	59	54	60	64	54	51
Folds - n	1183	905	4429	835	2266	2573	2637
Wet Web W20 - g/s cm	190	183	224	250	231	255	244
Rejects - %	12.1	8.6	9.1	6.3	7.3	9.9	5.9
Ret. 14 mesh - %	0.7	1.6	0.8	1.1	2.6	0.9	0.8
Ret. 30 mesh - %	28.4	26.8	25.8	26.8	34.9	28.2	24.5
Ret. 50 mesh - %	16.0	14.6	17.2	14.9	19.5	15.0	14.4
Ret. 100 mesh - %	14.0	13.7	11.9	13.6	17.7	13.0	13.5
Fines (Pass. 100 mesh) - %	40.9	43.3	44.1	43.6	25.3	42.9	46.8
Grinding Variables							
Wood Density						0.418 g/cc	
Wood Moisture						35.9 %	
Shower Water Temperature						320 °F.	
System Pressure						90 p.s.i.g.	
Spec. Grinding Pressure						40 p.s.i.	
CHEMICAL	$CaCl_2$	$MgCl_2$	Na_2SO_3*	—	$Na_2S_2O_4$	V80**	15% $Na_2S_2O_4$ + 2% V80
% on o.d. wood	12	6	13	—	15	1.8	—
Travelling rate micron/sec.	910	1320	852	1410	1340	1505	1385

TABLE III – Continued

THE EFFECT OF CHEMICAL ADDITIONS ON PRESSURIZED GROUNDWOOD

Production % (relative)	91	132	85	100	95	107	98
Sped. Power Cons. HP/day a.d.t.	42.0	30.9	50.7	31.9	35.1	26.9	35.1
Bulk - cc/g	2.32	2.38	2.14	2.42	2.28	2.68	2.52
Brightness - % G.E.	45.6	47.6	52.9	46.9	49.5	48.7	52.9
Smoothness - cc/min.	127	172	98	180	134	241	221
Porosity - s/50 c.c.	29.4	14.6	61.2	20.9	36.8	16.6	14.4
Freeness - ml.	167	280	119	205	151	230	300
Burst	22.1	19.4	21.9	20.9	22.2	22.8	21.9
Tensile - m	4000	3900	4850	3870	4230	3900	4210
Tear - gcm/cm.	63	64	56	72	64	72	72
Fold - n	923	370	1541	976	375	1068	662
Wet Web W20 - g/s cm.	180	171	230	176	183	132	152
Rejects - %	4.6	5.6	1.8	6.9	6.1	8.1	12.9
Ret. 14 mesh - %	1.7	2.6	1.2	1.4	1.2	1.4	1.3
Ret. 30 mesh - %	29.4	31.3	26.4	30.4	28.5	28.5	31.8
Ret. 50 mesh - %	18.0	17.4	18.6	10.3	9.4	9.5	11.9
Ret. 100 mesh - %	12.3	13.6	15.2	14.0	14.7	14.7	14.9
Fines (Pass. 100 mesh) - %	38.6	34.8	38.6	43.9	46.2	45.9	40.1

*Trial performed at 180°F. shower water temperature
**V80 means Versenex 80 (Chelating agent).

It will be observed that strength properties are improved by addition of sodium sulphite, sodium hydrosulphite, sodium carbonate or sodium tetrapyrophosphate. Calcium chloride gives improved tear resistance as well as reduced screening rejects. The use of magnesium chloride resulted in a pulp of very high freeness and yet strength was retained. Sodium bisulphite gives some improvement in wet strength and also reduces screening rejects. The results shown in Table III also demonstrate that chelating agents, such as that known under the trade name Versenex 80 (aqueous solution of the pentasodium salt of diethylene-triamine-pentaacetic acid) are useful for enhancing the improvement in brightness achieved with sodium hydrosulphite.

The compounds may be added either singly or in groups of two or more. The amount of chemical addition will depend to a large extent upon the particular compound employed and the particular lignocellulosic material used. Generally speaking, the amount of chemical addition will not substantially exceed 10% by weight of the lignocelluosic material. If a chelating agent is used, either by itself or in combination with another chemical addition, a very small percentage, say not exceeding 10%, gives beneficial results.

Further to illustrate the improvement achieved in pulp physical characteristics, tests were carried out by standard TAPPI methods used in the industry and the pulps were manufactured specifically for use in newsprint furnish. The results are shown in the following Table, —

TABLE IV

Pulp Properties Obtained from Spruce/Balsam wood	Conventional Stone Groundwood	Conventional Disc Refiner Mechanical Pulp	Disc Refiner of present Invention
Freeness (Canadian Standard)	100–110	150–200	150–200
Tear Resistance	40–45	55–70	80–95
Burst Factor	10–14	9–15	18–25
Breaking length, km.	3.5–4.5	2.0–3.5	4.0–5.0
System Pressure	Atmospheric	Atmospheric	30 psig

The disc refiners used in carrying out the method for the present invention were the same as those used in the conventional disc refining (Bauer 480 Refiners) except that in practicing the present invention the refiner was modified by providing a suitable enclosure and feeding devices to permit operation under positive pressure in the manner heretofore described.

The limits of spacing between the discs is between 0.001 and 0.025 inch with a preferred spacing of about 0.007±0.003 inch. At greater spacing the chips will pass through too quickly so that they are insufficiently abraded and the energy input to the refiners falls off since there is not the work performed in abrading the wood to a fine pulp suitable for newsprint. As an extreme when the disc spacing exceeds the dimension of the chip practically no work is performed on the wood. The only load on the motor is the "idling load" which in the case of the 3,000 H.P. unit specified amounted to approximately 100 H.P. This ratio of "idling load" to full "refining load" is substantially constant for commercial refiners. Thus, "total power consumption" as used in the present invention, refers to that horsepower actually applied to the wood chips. In performing the "work" in producing the papermaking pulp from wood in the refiner over 90% of the energy is converted into heat. In the "Asplund" and related processes a high temperature of about 170° C is obtained. This is substantially above the "melting point" of the lignin which "flows" and coats the fibers which are formed so that further refining is difficult and that at this temperature pulps of low brightness result which are unsuited for newsprint and other papers. Because of the low energy consumption relatively little heat is generated. It is therefore necessary for Asplund to have a very low content of water in his process or these high temperatures would not be achieved. This is the reason for him providing in his process a press for squeezing out water from the naturally occurring water in wet chips.

In our process we add substantial quantities of water and also relieve the pressure so as to keep the temperature down. We provide no chamber to extend the retention time. This lower temperature and short retention time prevent the discoloration of the fibers and also permits the absorption of high quantities of energy in the refining step in order to produce a fine thoroughly defibered strong pulp suitable for newsprint and some other printing papers. It will be noted that in our experiments we added water to minimum of 2.4 U.S.G./min. This gave a quantity of water "suitable" to prevent the "burning" or loss of brightness which is a well recognized feature of the conventional grinding and also conventional refining process when consistencies rise too high. There is no known successful installation in the world in either conventional grinding or conventional refining to produce the groundwood type of fiber suitable for newsprint which does not add sufficient water to prevent this discoloration which occurs at low moisture content and high temperature. In every case there is sufficient water added to lower the consistency to 33% or in most cases below. In our experiments we always used enough energy in the refining to raise the temperature of the water (and thus pressure) to the required level when this suitable quantity of water was added. At these levels of energy consumption and with pressures relieved to levels specified the refiners produced pulp suitable for newsprint manufacture.

As in conventional processes the pulp is screened with the screened rejects being further refined. The screenings produced however, are much less than in conventional processes.

An earlier paragraph states that the only modification of the conventional groundwood refiners needed to practise this invention was their operation under pressure. There was about the same amount of water added as is required in operating conventional unpressurized refiners which produce paper grade mechanical pulp. The consistency of the conventional refiner pulp is in the range from 33% down to possibly 3% when producing acceptable pulp. The present invention utilizes the same range of consistencies. To achieve these consistencies, the water added together with the inherent moisture of the wood pulps will be from 200%–3,200% of the weight of the dry wood particles.

Table I shows that when operating the small pilot unit under pressure a minimum of 2.4 U.S.G.P.M. of water was added to the abrading system. This was sufficient to guarantee the wood and fiber always had "free" water to encase the fiber and prevent discoloration or "burning" of the fibers by overheating. The data in Table I (and FIG. 4) show that under conditions of the invention the brightness was maintained over 50 G.E. and when conditions were outside our specified range (85 lbs/sq. in and 315° F.) the brightness was unsatisfactory. In this case the high pressure prevented cooling of the mass by flashing to steam.

A further test was conducted using the large commercial refiners described above (3,000 H.P.). In this case the refining was performed on two refiners in series using the same total horsepower per ton range as previously. The chips and water were both fed at predetermined rates Data was as follows:

H.P. on pressurized refiner	2800 H.P.
H.P. on second refiner	2600 H.P.
Feed Rate of woods chips (dry)	55 t/day
Water added to chips fed to pressurized refiner	18 U.S.G.P.M.
Moisture in Wood Chips	45–55%
Calculated water to dry wood chip ratio or consistency of	2.95:1 25%

A number of trial runs were made producing about 30 tons in each. This pressurized refiner mechanical pulp was run without addition of chemical pulp on a 238 inches wide paper machine running in excess of 2,000 ft. per min. with an open draw. The newsprint produced was printed in a commercial newspaper pressroom. The newsprint was evaluated by both the letterpress and offset printing processes. It was satisfactory.

Tests on the pulp used in the newsprint trials were compared with a conventional furnish to the machine which was made up of a mixture of 72% conventional groundwood and 28% sulphite pulp of 47% yield

	Conventional Furnish	Disc Refiner Pulp of Present Invention (no chemical pulp)
Freeness C.S.	222	180
Tear	64	81
Breaking Length	4.2	3.9
Bulk	2.27	2.45
Opacity	93.3	97.1
Brightness (Elrepho)	61.3	59.6

The high tear was carried over into the finished newsprint. This is the most important physical test in determining runnability. Most of the increased opacity also was retained in the finished newsprint. These two favorable features will no doubt be employed to make a lighter weight newsprint sheet feasible with attendant ecological benefits in addition to those obtained from eliminating the use of chemical pulp.

The results shown in Table IV indicate a significant improvement in strength properties and particularly a marked increase in tear resistance which is of much importance in most papermaking and converting operations. Furthermore, these improvements were obtained at high freeness values which is an added advantage from the point of view of enhancing drainage on the paper machine with consequent better performance.

The significant effect of power input on properties is illustrated in FIG. 9, which shows the results of tests conducted on pulps produced in disc refining equipment in accordance with the invention.

These results demonstrate two significant features:

Firstly, a remarkable improvement in pulp strength, and particularly in tear resistance, is achieved over the entire range of power input. The strength properties not only approach those of chemical pulps but are superior in some cases. Thus, they represent a significant advance in the technology of manufacture of mechanical pulps.

Secondly, useful pulps were obtained over the entire range of power inputs, although for different purposes. The coarser pulps produced at low energy input were of a type very suitable for the manufacture of paperboard of excellent strength. The intermediate pulps were especially suited for newsprint while those produced with high energy were of a kind suited for finer

groundwood grades such as newsprint for rotogravure printing. In all cases, strength properties appear to surpass those of any mechanical pulps currently known in the field.

As previously indicated, a preferable positive pressure under which the disc refining operation of the present invention is carried out is about 30 psig. It appears that the beneficial effect arises from the higher temperatures attainable under pressure but it is not clear precisely what the reasons are. The exact pressure may, of course, be varied within the limits of the invention as indicated in Table V, which illustrates the results of tests conducted in accordance with the disc refiner treatment of the present invention.

TABLE V

Pulp Strength Data With Disc Refining Under Positive Pressure

System pressure, psig	16	30	50
Power input, hp days/ton	60	60	60
Pulp Properties			
Freeness Canadian Standard	410	566	650
Tear Factor	90	138	105
Burst Factor	11	11	6
Breaking Length, km	2.8	3.4	1.9

These results show that a system pressure of 30 psig gave the best pulp strength and that at 15 psig and 50 psig there was some deterioration of quality. However, all results are superior to conventional pulps so that the entire pressure range may be considered useful.

As previously indicated, the optimum conditions for practice of the well known Asplund system are a pressure of above 100 psig and a power input of 7–12 hp days/ton. It has been found that these conditions are quite unsuitable for producing papermaking pulps because of inadequate pulp strength and severe discoloration of the product. The results herein set forth demonstrate that, for the production of papermaking pulps, it is necessary to provide sufficient energy (at least 15 hp days/ton) under a pressure of 10 to 80 psig for developing adequate pulp strength.

What is claimed is:

1. A method of producing a papermaking wood pulp which comprises feeding a body of wood particles and a substantial quantity of water to wood-abrading equipment in an amount sufficient to provide enough free water to encase the fibers in the pulp and prevent discoloration of the fibers by overheating said substantial quantity of water being separate from the moisture naturally present in the wood particles so that it together with the moisture in the particles amounts to at least 200 percent of the weight of the dry wood particles, mechanically abrading said wood particles in said equipment to produce a final product consisting of papermaking wood pulp, conducting said abrasion process resulting in said final product under a total power consumption of 50 to 150 horsepower days per ton of said final product, and including the steps of subjecting said wood particles during said abrasion process in said equipment to an environmental pressure of 10 to 60 psig and a temperature of 160°–300° F. in an inert gaseous atmosphere.

2. A method as set forth in claim **1** wherein the total amount of water is less than 3,200% of the weight of the dry wood particles.

3. A method of producing a papermaking wood pulp as defined in claim **1**, wherein said pressure is about 30 psig.

4. A method of producing a papermaking wood pulp as defined in claim **1**, wherein said mechanical abrading process comprises a disc refining treatment.

5. A method of producing a papermaking wood pulp as defined in claim **1** but with the feeding of oxidation prevention reducing chemicals such as hydrosulphite, sodium sulphite and the like together with said substantial quantity of water.

6. A method as set forth in claim **1** wherein the total amount of water exceeds 300% of the weight of the dry wood particles.

7. A method as set forth in claim **1** further comprising pretreating said wood particles by heating to temperatures of 50° C. to 100° C. prior to said mechanical abrading.

* * * * *