



(22) Date de dépôt/Filing Date: 2000/08/24

(41) Mise à la disp. pub./Open to Public Insp.: 2001/03/08

(45) Date de délivrance/Issue Date: 2012/02/28

(62) Demande originale/Original Application: 2 382 314

(30) Priorité/Priority: 1999/08/27 (US09/384,512)

(51) Cl.Int./Int.Cl. *E04B 1/38* (2006.01),
E04B 1/26 (2006.01), *E04B 5/12* (2006.01),
E04C 5/16 (2006.01)


(72) Inventeurs/Inventors:
LEEK, WILLIAM F., US;
EVANS, THOMAS G., US;
HERRERA, JOHN G., US

(73) Propriétaire/Owner:
SIMPSON STRONG-TIE COMPANY, INC., US

(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : ETRIER A ENCLenchement

(54) Title: SNAP-IN HANGER

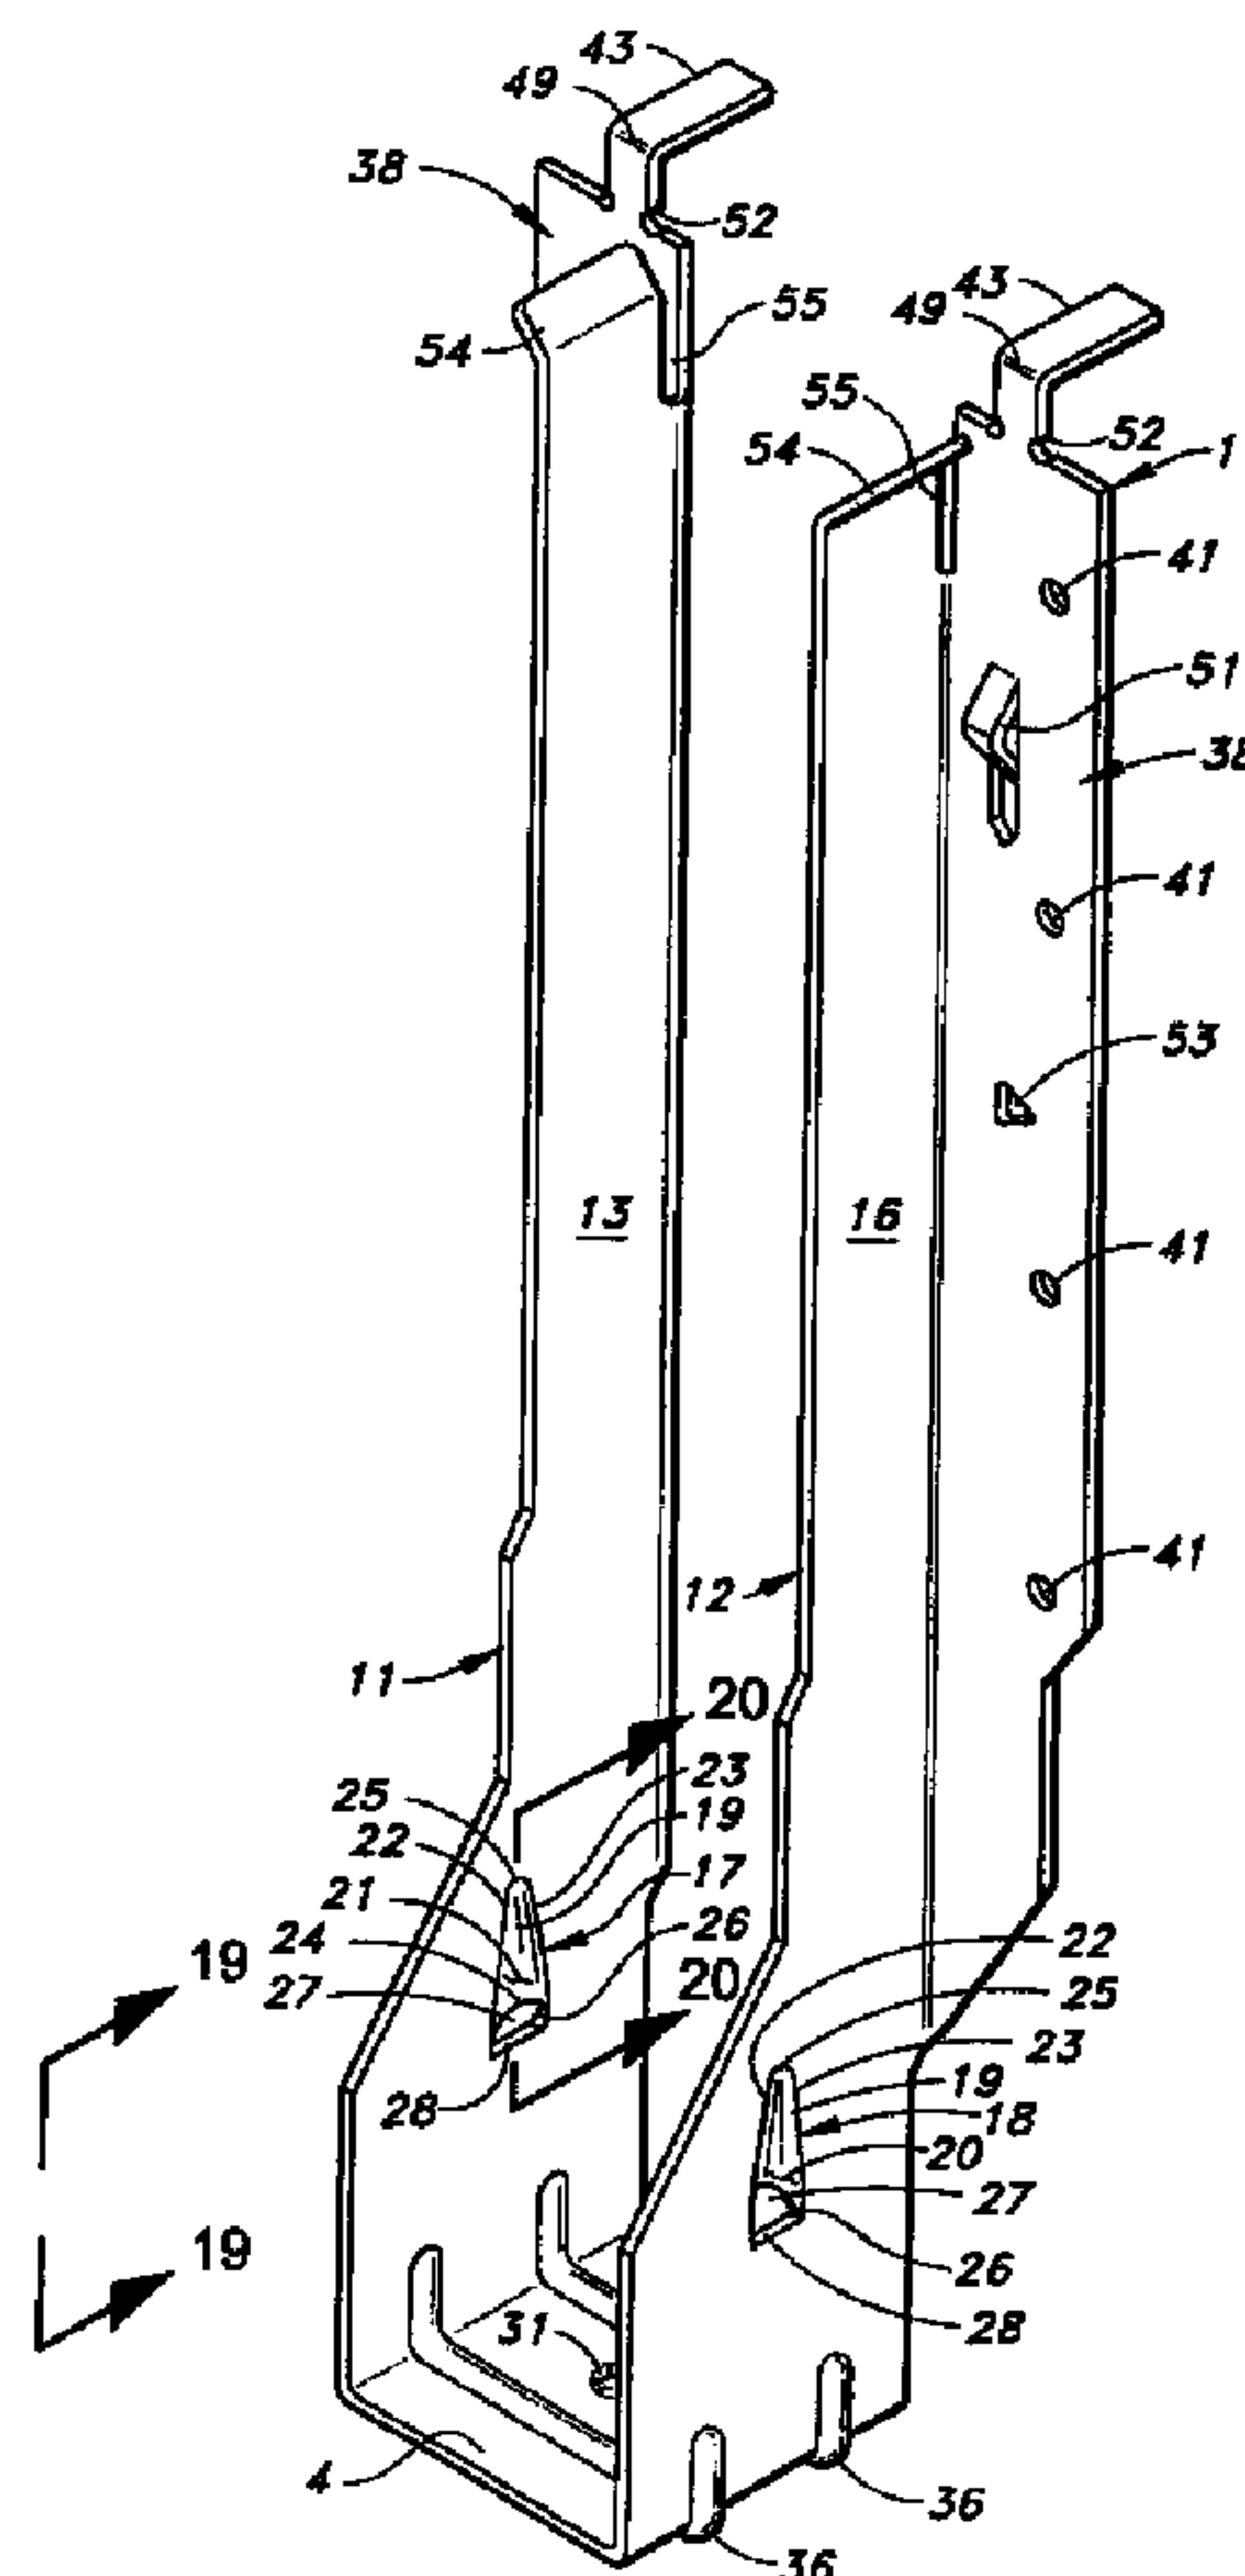

(57) Abrégé/Abstract:

A joist hanger (1) used to attach a joist (2) to a support member or header (3) designed to minimize the noise caused by the rubbing of the members of the connection, during loading. The joist hanger includes a seat (4) and a pair of side walls (11, 12)

(57) **Abrégé(suite)/Abstract(continued):**

extending upwardly in spaced relationship therefrom to receive the end portion of a joist. The bottom of the joist (5) rests on the seat, and the side faces of the joist extend upwardly therefrom in spaced relationship from the side walls of the hanger. Inwardly projecting guides (17, 18) formed in the side walls of the hanger, hold the joist at selected points, maintaining the spaced relationship between the side walls of the hanger and the side faces of the joist. The inwardly projecting guides can be formed with embossed portions connected to the side walls of the joist. The joist hanger is also formed with back flanges (38) and top flanges (43) that are relatively narrow compared to the back flanges.

ABSTRACT

A joist hanger (1) used to attach a joist (2) to a support member or header (3) designed to minimize the noise caused by the rubbing of the members of the connection, during loading. The joist hanger includes a seat (4) and a pair of side walls (11, 12) extending upwardly in spaced relationship therefrom to receive the end portion of a joist. The bottom of the joist (5) rests on the seat, and the side faces of the joist extend upwardly therefrom in spaced relationship from the side walls of the hanger. Inwardly projecting guides (17, 18) formed in the side walls of the hanger, hold the joist at selected points, maintaining the spaced relationship between the side walls of the hanger and the side faces of the joist. The inwardly projecting guides can be formed with embossed portions connected to the side walls of the joist. The joist hanger is also formed with back flanges (38) and top flanges (43) that are relatively narrow compared to the back flanges.

SNAP-IN HANGER**Related Applications**

This application is a division of Canadian Patent Application Serial No. 2,382,314, filed 24 August 2000, as
5 the Canadian national phase application of International Patent Application No. PCT/US00/23439, filed 24 August 2000.

Field of the Invention

The present invention relates to building construction, and more particularly to a joist hanger adapted to secure a
10 joist to a header or other support member while minimizing the contact between the surfaces of the hanger and the surface of the joist so as to reduce the likelihood that portions of the hanger will rub against the joist, during loading, causing unwanted squeaks.

15 Background

Joist hangers are used in building construction to secure the ends of joists or other members to headers or other support members. Typically, the joist hanger includes a u-shaped portion that receives the joist. The bottom surface of
20 the joist rests on the seat of the hanger, and the side walls of the hanger are dimensioned to closely receive the side faces of the joist, providing it with lateral support.

Where appropriate, the joist may be connected to the hanger by means of nails driven through the side walls into
25 the side faces of the joist. These nails may simply be driven horizontally into the joist, in which case they are preferably very short nails that will not pass through the joist. Alternatively, longer nails may be used that are driven horizontally and angularly into the joist such that they are
30 driven into the header as well. This is often referred to as toe-nailing. The other common way to nail the hanger to the joist is to use short nails that are driven downwardly at an angle into only the joist.

1a

Often, to connect the joist hanger to the header, back flanges are attached to the side walls. Generally, these flanges extend laterally from the side walls to overlap a portion of the face of the header. These flanges can extend
5 inwardly or outwardly from the side walls, depending on various design considerations.

Openings may be provided in the back flanges to receive fasteners. These fasteners are generally nails in light-frame wood construction. Screws and bolts are also used in wood

construction, depending on the size of the members to be joined and other considerations. In light-gauge steel construction, sheet metal screws, bolts and rivets are commonly used. In perhaps the simplest of hangers, the back 5 flanges extend outwardly from the side flanges providing an easily accessible fastening face. Fasteners are then driven through the back flanges into the header. In other instances, design considerations dictate which particular attachment method is used for attaching the joist and the hanger to the 10 header.

In addition, top flanges may be attached to the back flanges to aid in the attachment to the header. If top flanges are used, the hanger is generally called a top-flange hanger. If no such top flanges are used, the hanger is 15 generally called a face-mount hanger. If the top flanges wrap over the top of the header and down to the opposite face of the header the hanger is often called a wrap-around hanger. Again, various design considerations dictate what type and whether a top flange is used. Generally, if a top flange is 20 used, and the header is made of wood, pre-formed holes will be made in the top flange to receive suitable fasteners for connecting the top flange to the header.

As mentioned above, often it is desirable to connect the joist to the hanger. This is generally done to resist uplift 25 forces on the joist. Such forces are often due to lateral loading on the building due to high winds or an earthquake. Also, one end of a joist must be downwardly restrained if that joist is loaded in cantilevered fashion, for example, to support an overhanging deck. As mentioned above, to retain 30 the joist within a conventional hanger, holes may be provided in the hanger side walls through which nails are driven into the joist.

Using nails or screw to fix the joist to the hanger to resist uplift forces may be satisfactory when the joist is 35 constructed from solid-sawn lumber or light gauge steel, but I-Joists are much more difficult to connect to a hanger with nails without splitting or damaging the chords of the I-Joist.

I-Joists have become more and more attractive as building materials as the cost of wood products has increased, because they generally use a third less lumber to provide similar performance as their solid-sawn counterparts which makes them generally less expensive. Thus, a need has arisen to adequately address the problems of securing I-Joists against uplift.

Most sheet metal hangers designed to attach wood I-Joist members to a support member use one of three methods to resist uplift forces on the I-Joist. In the first method, two short joist nails are driven through the sides of the hanger into the bottom chord of the I-joist at a downward angle. It is especially important to put the nails in at a downward angle when using a laminated veneer I-Joist to prevent splitting of the bottom chord. In the second method, web stiffeners are attached to the web, and nails are driven into the web stiffeners. The joist can also be toe-nailed through the web stiffeners into the header for even greater uplift resistance. In the third method, prongs or tabs are bent inwardly from the side walls of the seat and they either engage the top surface of the I-joist to hold it down or dig into the sides of the joist, if it tries to lift off the seat. Additional fasteners may or may not be used with methods that use tabs.

All of these methods have problems. As mentioned above, any methods that uses nails to connect the bottom chord to the hanger requires careful placement of the nails to prevent splitting of the bottom chord.

Furthermore, any method that uses nails must rely on the builder to go through the added step of actually installing the nails or using all the required nails, which can be time consuming and is sometimes ignored. Missing joist nails are difficult to detect through inspection, because of their placement. Without joist nails, the bottom chord of the wood I-Joist is not properly secured for uplift capacity and can also be a source of floor squeaks.

Adding web stiffeners and then nailing or toe-nailing into the web stiffeners is time consuming and material intensive.

A number of different methods have been proposed for securing an I-Joist in a hanger against uplift forces that use tabs. A good overview of these methods is provided in U.S. Patent No. 4,411,548, granted to J. Donald Tschan on October 5 25, 1983 and also U.S. Patent No. 5,564,248, granted to Gerald Callies on October 15, 1996.

Most of the methods that rely on tabs or prongs to hold the joist down do not rely on the tabs alone, but use nails as well, raising all the problems that accompany nails. The only 10 method that uses a tab, and does not use nails, is taught by U.S. Patent No. 4,411,548, and does not appear to have gained market acceptance.

The present invention when used with an I-Joist, provides uplift resistance without using nails to secure the I-Joist to 15 the hanger..

While a number of different methods have been proposed for resisting uplift of joists in light frame construction, up until now little has been done to address the generation of unnecessary noise due to the rubbing between the parts of the 20 connection as they become loose, which usually becomes worse as the building settles and ages. This unnecessary and unwanted noise due to looseness of the parts is commonly referred to as floor squeak.

Among the prior art methods of securing a joist to a 25 hanger, U.S. Patent No. 5,564,248, granted to Gerald Callies, is probably the patent most concerned with addressing floor squeak. In his patent, Callies recognizes that floor squeak can develop when there is a looseness between the members making up the connection. Callies '248 recognized that it is 30 important to keep the bottom of the chord resting on the seat of the hanger to minimize floor squeak. To help keep the bottom of the I-Joist on the seat of the hanger, Callies '248 proposed that a downwardly, and inwardly projecting tab be formed in each side wall of the hanger that would bite into 35 the side faces of the joist, and resist movement of the joist off of the seat of the hanger. It appears that Callies '248 did not mean for this tab to provide design load uplift resistance for the joist in most situations, but rather for

nails to be used to provide design load uplift resistance, and for the tabs to prevent any uplift of the joist that might occur during the installation of the nails through the hanger and into the joist. Callies '248, except for statements about
5 keeping the joist on the seat, is otherwise silent about preventing floor squeak.

In addition, to identifying noise problems associated with the joist lifting off of the seat of the hanger, the inventors have also found that it is important to keep the
10 side walls spaced away from the hanger as much as possible, and to minimize any portions of the hanger that would lie between the top surface of the header and the sub-flooring.

The connection of the present invention improves on the prior art, and in particular that of Callies '248 and Tschan
15 '548, by providing members which not only hold an I-Joist down onto the seat of the hanger without any additional operations having to be performed by the installer during the formation of the connection, but also push the joist away from the sides of the hanger while grabbing it firmly. Thus, in the present
20 invention there is less contact between the joist and the hanger, such that less noise can be generated by the rubbing of the two parts should any looseness develop. Further, the two pieces are firmly held against each other, such that it is less likely for any looseness to develop.

25 **Summary of the Invention**

It is a goal of the present invention to eliminate the need to use nails or other fasteners to sufficiently attach an I-Joist to a hanger to provide design load uplift resistance in selected applications.

30 It is a further goal of the present invention to support a joist from a header by means of a hanger, the hanger being especially formed to work with a selected joists to reduce the noises or squeaks that can develop during loading of this connection.

35 The preferred embodiment, of the present invention relates to a joist hanger which not only makes possible quick and convenient attachment of an I-Joist to a header, but also prevents uplift of the I-joist and reduces floor squeak

attributable to the connection of the I-Joist to the header by means of the hanger.

The joist hanger of the present invention includes a seat for receiving the bottom of the joist and side walls on either
5 side of the seat, extending upwardly therefrom for receiving the end portion of a joist.

Preferably, the joist hanger also has one or more back flanges connected to the side walls that overlap the header face to which the hanger will be attached.

10 An improvement embodied in the present invention includes specially formed inwardly projecting guides that are part of the side walls.

Preferably, the inwardly projecting guides in the side walls can hold the joist away from the side walls, and can
15 also hold I-Joists down on the seat under selected uplift loads without additional fasteners having to be used that mechanically connect the joist to the hanger.

Another improvement of the present invention is to provide the inwardly projecting guides of the side walls with
20 embossed portions that are, at least in part, connected to the side walls of the hanger on at least two sides of the embossment.

Another improvement of the present invention is to form the inwardly projecting guides so that they have angled
25 surfaces above and below the point where they extend inwardly the farthest such that it is fairly easy to install an I-Joist, and such that variations in the height of the bottom chord can be accommodated.

Another improvement of the present invention is to form
30 the inwardly projecting guides as rigid members that when they are pushed upon by the sides of an I-Joist during installation, they will cause the side walls of the joist hanger to flex outwardly, allowing the bottom chord of the I-Joist to pass by the guides.

35 The present invention also incorporates the method by which an I-Joist is installed in a joist hanger having rigid inwardly projecting guides.

Another improvement of the present invention is to form the seat so that it is relatively wider than a selected joist bottom surface which it is to receive, and to form the side walls so that they lie a minimum selected distance from each other at any point. That distance being wider than the end portion of the selected joist which is to be received by the side walls.

Further improvements to standard joist hangers embodied in the present invention include forming a rigid projection in the seat of the hanger that can embed itself into the bottom surface of the joist when sufficient downward force is placed on the joist to push it into the hanger past the projections in the side walls.

A further feature of the present invention includes forming one or more embossments that run from one side wall through the seat and to the other side wall to provide further rigidity to the seat and side walls.

Another improvement embodied in the present invention is providing the back flanges with top flanges that can be used to locate the joist hanger on the header at the proper height while minimally interfering with the attachment of the sub-flooring or other members to the top surface of the header.

Another improvement embodied in the present invention is the formation of upper, outwardly bending tabs on the side walls that guide the joist between the side walls.

Another embodiment of the present invention is the formation of a hanger whose side walls having inwardly projecting guides, but whose back flanges do not have top flanges and attach to the header with a plurality of fasteners.

In one aspect, the present invention resides in a joist hanger, for attaching a joist to a support member, said joist hanger comprising: a. a seat; b. first and second opposed side walls, each of said side walls being attached to said seat, each of said side walls having an inwardly facing side

7a

surface and an outwardly facing side surface, said inwardly facing side surfaces facing each other; c. each of said side walls further having one or more inwardly projecting guides projecting inwardly towards said other opposed side wall; d. each said inwardly projecting guide further being formed with an inwardly raised embossed portion, said embossed portion having first and second bracketing transition areas where at least a portion of said embossed portion is joined to said side wall.

10 In another aspect, the present invention resides in a joist hanger, for attaching a joist to a support member, said joist hanger comprising: a. a seat; b. first and second opposed side walls attached to said seat, each of said side walls having an inwardly facing side surface and an outwardly facing side surface, said inwardly facing side surfaces facing each other, said side walls extending upwardly from said seat; c. each of said side walls further having one or more inwardly projecting guides projecting inwardly towards said opposed side wall; d. each said inwardly projecting guide having a point where said inwardly projecting guide is farthest away from said side wall of which it is a part, said inwardly projecting guide further having portions above said point on said inwardly projecting guide and below said point on said inwardly projecting guide that do not extend as far away from said side wall at said point, such that said inwardly projecting guide tapers towards said point from above and below said point.

In another aspect, the present invention resides in a joist hanger for attaching a joist, having a bottom surface and a selected width, to a support member, said joist hanger comprising: a. a seat formed to receive a portion of said bottom surface of said joist; b. first and second opposed side walls attached to said seat, each of said side walls having an inwardly facing side surface and an outwardly facing side surface, said inwardly facing side surfaces

7b

facing each other; c. each of said side walls further having one or more inwardly projecting guides projecting inwardly towards said other opposed side wall, said inwardly projecting guides extending inwardly toward each other such
5 that said inwardly projecting guides create a space between them that is narrower than said selected width of said joist, said inwardly projecting guides further being formed so that they are so rigid that when said joist is pushed down past said inwardly projecting guides to install said bottom
10 surface of said joist on said seat, said side walls are pushed outwardly to allow said joist past said inwardly projecting guides.

In another aspect, the present invention resides in a method of installing an I-Joist in a joist hanger having
15 rigid inwardly projecting guides in the side walls of said joist hanger, said joist hanger being attached to a support member, said method comprising: a. aligning said I-Joist above said joist hanger; b. inserting said I-Joist downwardly into said joist hanger, said side walls flexing outwardly,
20 allowing said I-Joist to pass by said inwardly projecting guides.

In another aspect, the present invention resides in a joist hanger, for connecting a joist to a support member, said support member having front and top surfaces, said joist
25 hanger comprising: a. a seat formed for receiving said joist; b. first and second opposed side walls, each of said side walls being attached to said seat; c. first and second back flanges connected to said side walls, said back flanges having a selected maximum width, said back flanges being
30 formed to interface with said front surface of said support member; and d. first and second top flanges connected to said back flanges, said top flanges having portions that interface with said top surface of said support member, said top flange being narrower than said selected maximum width of said back
35 flanges.

7c

In another aspect, the present invention resides in a connection comprising: a. an I-Joist; b. a support member, having a top surface; c. a joist hanger for attaching said I-Joist to said support member, said joist hanger comprising:

5 a. a seat; b. first and second opposed side walls attached to said seat, each of said side walls having an inwardly facing side surface and an outwardly facing side surface, said inwardly facing side surfaces facing each other; c. each of said side walls further having one or more inwardly

10 projecting guides projecting inwardly towards said other opposed side wall, said inwardly projecting guides having portions disposed inwardly of said inwardly facing side surface of said side wall of which said inwardly projecting guide is a part prior to installation of said joist; d. one

15 or more back flange members connected to one or more of said first and second opposed side walls, said one or more back flanges each being connected to said support member by a plurality of fasteners; and wherein e. said joist hanger is formed and attached to said support member in such a manner

20 that no portion of said joist hanger extends above said top surface of said support member.

In a further aspect, the present invention resides in a connection between a joist hanger, a joist, and a support said connection comprising: said support; said joist hanger

25 attached to said support, said joist hanger supporting said joist, and said joist hanger comprising: a. a seat; b. first and second opposed side wall, each of said side walls being attached to said seat, each of said side walls having an inwardly facing side surface and an outwardly facing side

30 surface, said inwardly facing side surfaces facing each other; c. each of said side walls further having one or more inwardly projecting guides projecting inwardly towards said other opposed side wall; d. each said inwardly projecting guide further being formed with an inwardly raised embossed

35 portion, said embossed portion having first and second

bracketing transition areas where at least a portion of said embossed portion is joined to said side wall.

In yet a further aspect, the present invention resides in a connection between a joist hanger, a joist, and a support, said joist having a bottom surface and a selected width said connection comprising: said support; said joist hanger attached to said support, said joist hanger supporting said joist, and said joist hanger comprising: a. a seat formed to receive a portion of said bottom surface of said joist; b. first and second opposed side walls attached to said seat, each of said side walls having an inwardly facing side surface and an outwardly facing side surface, said inwardly facing side surfaces facing each other; c. each of said side walls further having one or more inwardly projecting guides projecting inwardly towards said opposed side wall, said inwardly projecting guides extending inwardly toward each other such that said inwardly projecting guides create a space between them that is narrower than said selected width of said joist, said inwardly projecting guides further being formed so that they are so rigid that when said joist is pushed down past said inwardly projecting guides to install said bottom surface of said joist on said seat, said side walls are pushed outwardly to allow said joist past said inwardly projecting guides.

In yet a further aspect, the present invention provides a joist hanger for attaching a joist to a support member, said joist hanger comprising: a. a seat; b. first and second opposed side walls attached to said seat, each of said side walls having an inwardly facing side surface, said inwardly facing side surfaces facing each other; c. each of said side walls further having one or more inwardly projecting guides projecting inwardly towards said other opposed side wall; and d. said seat being formed with an upwardly extending, sharp projection.

7e

In yet a further aspect, the present invention provides a joist hanger for attaching a joist to a support member, said joist hanger comprising: a. a seat; b. first and second opposed side walls attached to said seat, each of said side walls having an inwardly facing side surface, said inwardly facing side surfaces facing each other; c. each of said side walls further having one or more inwardly projecting guides projecting inwardly towards said other opposed side wall; d. said seat being formed with an upwardly extending, sharp projection; wherein: a. said joist is formed with substantially parallel opposed side faces that define a selected width of said joist; b. said opposed side walls of said hanger are substantially planar members disposed in parallel relationship, and spaced from each other a selected distance that is greater than said selected width of said joist; and wherein c. said inwardly projecting guides of said side walls are sufficiently rigid to hold said joist of said selected width entirely away from said side walls except at said inwardly projecting guides, when said side faces of said joist are substantially parallel with said side walls of said hanger.

Description of the Drawings

Figure 1 is an isometric view of a joist hanger of the present invention.

Figure 2A is a front view of a joist hanger of the present invention.

Figure 2B is a front view of a joist hanger of the present invention. An I-Joist, shown in phantom lines, is received by the joist hanger

Figure 3A is a side view of the joist hanger of figure 5 2A, taken along line 3A-3A.

Figure 3B is a side view of the joist hanger of figure 2B, taken along line 3B-3B.

Figure 4 is a top view of the joist hanger of figure 2A, taken along line 4-4.

10 Figure 5 is a bottom view of the joist hanger of figure 2A, taken along line 5-5.

Figure 6 is an isometric view of a joist hanger of the present invention attached to a support member. An I-Joist is shown received by the joist hanger. The I-Joist is shown in 15 phantom lines.

Figure 7 is a front view of a joist hanger of the present invention. The joist hanger is shown attached to a support member. An I-Joist is shown received by the joist hanger. A sub-flooring member is shown attached to the I-Joist and 20 support member by means of nails.

Figure 8 is an isometric view of a joist hanger of the present invention. A support member and a solid-sawn joist are shown in phantom lines.

Figure 9 is a front view of the joist hanger of the 25 present invention shown in figure 8.

Figure 10 is a side view of the joist hanger of figure 9, taken along line 10-10.

Figure 11 is a top view of the joist hanger of figure 9, 30 taken along line 11-11.

Figure 12 is an isometric view of a joist hanger of the present invention. The view shows an alternate form of upwardly projecting member in the seat.

Figure 13 is a front view of the joist hanger of figure 35 12. An I-Joist is shown received by the joist hanger. The I-Joist is shown in phantom lines.

Figure 14 is a top view of the joist hanger of figure 13, taken along line 14-14.

Figure 15 is a bottom view of the joist hanger of figure 13, taken along line 15-15.

Figure 16 is an isometric view of a joist hanger of the present invention.

5 Figure 17 is an isometric view of a joist hanger of the present invention

Figure 18 is an isometric view of a joist hanger of the present invention.

10 Figure 19 is an enlarged side view of the side wall of the hanger taken along line 19-19 of figure 1, showing one embodiment of the inwardly projecting guide of the present invention.

Figure 20 is a cross-sectional side view taken along line 20-20 of figure 1, showing one embodiment of the inwardly
15 projecting guide of the present invention.

Figure 21 is a cross-sectional view taken along line 21-21 of figure 2A, showing one embodiment of the inwardly projecting guide of the present invention.

Description of the Preferred Embodiment

20 As shown in figure 6, the present invention relates to a joist hanger 1 that attaches an I-Joist 2 or other member to a support member or header 3.

The joist hanger 1 has a seat 4 for receiving a portion of the bottom surface 5 of the I-Joist 2. The I-Joist 2 is
25 made up of top and bottom chords 6 and 7 and a web 8 between them. The bottom chord 6 has a bottom surface 5, a top surface 9 and side walls 10.

As shown in figure 1, the joist hanger 1 is also made with first and second opposed side walls 11 and 12, each of
30 the side walls 11 or 12 being attached to the seat 4, and each of the side walls 11 or 12 having an inwardly facing side surface 13 or 14 and an outwardly facing side surface 15 or 16 with the inwardly facing side surfaces 13 and 14 facing each other.

35 As shown in figure 2A, each of the side walls 11 or 12 also has one or more inwardly projecting guides 17 or 18

projecting inwardly towards the other opposed side wall 11 or 12.

As shown in figure 2B, in the preferred embodiment, the side walls 11 and 12 of the joist hanger 1 are formed with one 5 or more inwardly projecting guides 17 and 18 that hold the I-Joist 2 away from the side walls 11 and 12 of the joist hanger 1. As also shown in figure 2B, when formed in a particular manner, the inwardly projecting guides 17 and 18 that hold the I-Joist 2 away from the side walls 11 and 12 can 10 also serve to keep the I-Joist 2 pressed on the seat 4 of the joist hanger 1.

Preferably, only one such inwardly projecting guide 17 or 18 is formed in each side wall 11 or 12. Preferably, the joist hanger 1 is designed to be used with an I-Joist 2 and 15 the inwardly projecting guides 17 and 18 both hold the I-Joist 2 away from the side walls 11 and 12 and down on the seat 4, without the use of additional fasteners, as shown in figure 2B.

As can be seen in figure 1, in the preferred embodiment, 20 the inwardly projecting guides 17 and 18 are formed from the side walls 11 and 12 of the joist hanger 1. Each side wall 11 or 12 has an inwardly facing side 13 or 14 and an outwardly facing side 15 or 16. The seat 4 and the inwardly projecting guides 17 and 18 are disposed on the inwardly facing side 13 25 or 14 of each side wall 11 or 12. In the preferred embodiment, the creation of the inwardly projecting guides 17 and 18 divides each side wall 11 or 12 into inwardly projecting guides 17 or 18 and a remaining body portion. The inwardly projecting guides 17 and 18 lie closer to the 30 opposite side wall 11 or 12 than the body of the side wall 11 or 12 in which they are formed.

As shown in figure 1, the inwardly projecting guides 17 and 18 can have embossments 19 or arched portions, wherein the concave side 20 of the embossment 19 is disposed on the 35 outwardly facing side 15 or 16 of the side wall 11 or 12 and a convex side 21 is disposed on the inwardly facing side 13 or 14 of the side wall 11 or 12.

As best shown in figures 3A and 3B, the embossed portions 19 in the guides 17 and 18 have first and second bracketing transition areas 22 and 23 where at least a portion of the embossment 19 is joined to the side wall 11 or 12. These 5 bracketing transition areas 22 and 23 may lie substantially parallel to each other or may lie in an angular relation and could meet at a point. In the preferred embodiment, the embossment 19 that makes up all of the inwardly projecting guide 17 or 18 can be said to start at one bracketing 10 transition area 22 where it rises out of the side wall 11 or 12 and ends at the other bracketing transition area 23 where it returns to the side wall 11 or 12.

As shown in figures 2A, 2B, 7, 9, 13, 17, 19 and 21, in the preferred embodiment each inwardly projecting guide 17 or 15 18 has a point 24 where the inwardly projecting guide 17 or 18 is farthest away from the side wall 11 or 12 of which it is a part. Each inwardly projecting guide 17 or 18 further has portions above that point 24 on the inwardly projecting guide 17 or 18 and below that point 24 on the inwardly projecting 20 guide 17 or 18 that do not extend as far away from the side wall 11 or 12 as that point 24, such that the inwardly projecting guide tapers towards that point 24 from above and below that point 24.

As best shown in figures 1, 6, 8 and 17, the inwardly 25 projecting guides 17 and 18 that hold the I-Joist 2 or other member away from the side walls 11 and 12 of the joist hanger 1 can take a variety of forms.

In a first form shown in figure 1, each inwardly projecting guide 17 or 18 is formed as a cone-shaped 30 embossment 19, with the tip 25 of the cone above its base 26. This first form is made by cutting an opening 27 in each side wall 11 and 12 of the joist hanger 1. A generally triangular-shaped portion of each side wall 11 or 12 above the opening 27 is then pushed inward toward the opposite side wall 35 11 or 12 to form a half-cone.

As shown in figure 2B, in the preferred form used with an I-Joist 2, the opening 27 occurs at the level of the top

surface 9 of the bottom chord 7 of the I-Joist 2. In the preferred embodiment, the opening 27 in the inwardly projecting guide 17 or 18 also lies below the point 24 farthest away from the side wall 11 or 12 of which it is a part. Preferably, the opening or slit 27 is shaped like an oval so the top and side edges of the opening 27, which are also the base 26 of the cone-shaped embossment 19 is arced. The bottom edge 28 of the opening 27 lies below the top surface 9 of the bottom chord 7, and the upwardly arcing edge 26 of the opening 27 lies at an angle to the seat 4 of the joist hanger 1. This particular form, is the preferred form of the invention, for use with an I-Joist 2.

In a similar form, shown in figures 6 and 7, no opening is cut in the side walls 11 and 12. Each side wall 11 or 12 is simply pushed inwardly toward the opposite side wall 11 or 12, forming a cone-shaped embossment 19 or dome in each side wall 11 of 12.

In both forms shown in figures 1 and 6, where an I-joist 2 is used, the point 24 where the embossment 19 projects inwardly the farthest lies just above where the top surface 9 of the bottom chord 7 of the I-Joist 2 would lie when the I-Joist 2 is sitting properly in the joist hanger 1. See figures 2B and 7.

The dimple or embossment 19 in both forms can take a variety of shapes. As described above, and shown best in figure 3A, preferably the embossment 19 is shaped like a tear drop or a half-cone with the elongated portion disposed above the point 24 where the embossment 19 projects inwardly the farthest. That is to say the embossment 19 falls away from the most inward point 24 rather steeply to the sides and below this point 24, but much less so above it.

Shaping the inwardly projecting guides 17 and 18 in this manner aids in the installation of the I-Joist 2, while providing greater resistance to removal of the I-Joist 2. As shown best in figure 2A, the relatively gentle narrowing of the space between which the I-Joist 2 must be inserted, when the I-Joist 2 is pushed downwardly from above, means the resistance to the insertion of the I-Joist 2 past the inwardly

projecting guides 17 and 18 increases at a relatively slow rate. In contrast, the steep angle of the bottom portion of each guide 17 or 18, as shown in figures 2A, 19 and 20, means there must be a very quick buildup of the necessary force to
5 push the I-Joist 2 past the inwardly projecting guides 17 and 18, once it is installed. Thus it is easier to insert the I-Joist 2, then it is to remove it.

As shown in figure 19, in the preferred form of the invention, the portion of the inwardly projecting guide 17
10 above the point 24 farthest inward falls away gently and at an angle to the side wall 11 of the joist hanger 1 from which the inwardly projecting guide 17 is formed. As described above, this is preferable to a very sharp angle. The long tapering portion above the point 24 farthest inward serves to direct
15 the I-Joist 2 away from the side wall 11 of the hanger, and down onto the center of the seat 4.

As shown in figure 19, in the preferred form of the invention, the portion of the inwardly projecting guide 17 below the point 24 falls away gently, but less gently than the
20 portion above the point 24. This is preferable to having the inwardly projecting guide 17 falling away from the point 24 abruptly, such as at a right angle to the side wall 11. This is also preferable to forming a simple tab with a single bend to direct the tip of the tab away from the side wall of the
25 hanger, but still downwardly. Such tabs are shown in U.S. Patent Numbers 4,411,548 and 5,564,248. These tabs have no portion below the point of the tab where it extends farthest away from the side wall of the hanger.

As shown in figures 17 and 19, by forming the inwardly
30 projecting guide 17 with a downwardly sloping portion below the farthest inward point 24, the inwardly projecting guide 17 is better able to accommodate I-Joists 2 of varying bottom chord 7 dimensions. Since I-Joists 2 are generally made from wood, the dimensions of the I-Joist 2 can change somewhat due
35 to their relative moisture content. Further, I-Joists 2 from different manufacturers, although designed with the same nominal dimensions will vary in dimension somewhat.

In the preferred embodiment, shown in figure 19, this downwardly sloping portion is actually the side surfaces or edges of the opening 27. The lower tapering surface or surfaces of the inwardly projecting guide 17 allows the guide 5 to interface with chords of different heights. As shown in 2B, taller bottom chords 7 can reach up farther on the lower tapering surface of the inwardly projecting guides 17 and 18. In comparison, as shown in 7, shorter bottom chords 7 will interface lower down on the lower tapering surface.

10 The inwardly projecting guides 17 and 18 need not be primarily formed as embossed members to provide a lower tapering surface. As shown in figure 17, the inwardly projecting guides 17 and 18 can be formed as tabs substantially separated from the opposed side walls 11 and 12, 15 the tabs have a first bend 29 that causes them to project inwardly and a second bend 30 at the point 24 where the inwardly projecting guide is farthest away from the side wall 11 or 12 of which it is a part, which directs the tab back towards the side wall 11 or 12 of which it is a part.

20 The tab of figure 17 is shown with a lateral curve that strengthens it. This curve is not like the embossment 19 in the preferred guides 17 and 18 shown in figure 1, wherein the embossment is connected to the side wall 11 or 12 by the bracketing transition areas 22 and 23

25 The embodiments of the inwardly projecting guides 17 and 18 shown in figures 1 and 6 are formed primarily by embossing the metal of the side walls 11 and 12. In the first embodiment shown in figure 1, the side walls 11 and 12 remain completely intact except for the opening 27. In the second 30 embodiment shown in figure 6, described above, no openings are formed in making the inwardly projection guides 17 and 18.

However, while it is preferred to primarily use a single embossment to form the inwardly projecting guides 17 and 18, other operations could be used to form the inwardly projecting 35 guides 17 and 18 as already discussed above with respect to the embodiment shown in figure 17.

Further alternatives include making a v-shaped cut in each side wall. The point of the "v" would be directed

downwardly. The embossed portion could start above the v-shaped cut creating a sharpened tab at the end of the embossed portion. Although this is not preferred. In the preferred form the inwardly projecting guides 17 and 18 are formed without any edges of the inwardly projecting guides 17 and 18 coming together at a downwardly directed point or tip. Compared to the embodiment with a v-shaped, sharpened tab described above, the preferred embodiments are comparatively blunt.

10 In the preferred form of the guides 17 and 18, shown in figure 1, which is formed primarily by embossing and has an opening 27, the side and top edges 26 of the opening 27 which also define the base of the cone-shaped embossment 19 are fairly sharp which allows them to cut into the bottom chord 7
15 of the I-Joist 2 to better restrain it against uplift forces.

In still another embodiment, two substantially parallel slits could be made in the side walls and the portions of the side walls between the cuts could be embossed inwardly creating an arched inwardly projecting guide between the cuts.

20 The embossing of the inwardly projecting guides 17 and 18 provides strength when the hanger 1 is made out of light gauge steel, as in the preferred form.

As shown in figure 21, the inwardly projecting guide 17 can also be said to be formed with a compound curve. The
25 inwardly projecting guide 17 is formed so that a first curve at the bracketing transition area of the embossment 22 bends the inwardly projecting guide 17 at angle to the side wall 11 of which it forms a part, and a second curve bends the guide back toward the side wall 11.

30 In the preferred embodiment show in figure 1, when the joist hanger 1 is used with an I-Joist 2, the guides 17 and 18 formed in the side walls 11 and 12 are rigid members. Further, the guides 17 and 18 extend inwardly toward each other such that the guides 17 and 18 create a space between
35 them that is narrower than the width of the I-Joist 2 as defined by the space between the side walls 10 of the bottom chord 7. The guides 17 and 18 do not deflect when the bottom chord 7 of the I-Joist is pressed downward onto the seat 4.

Rather the guides 17 and 18 force the side walls 11 and 12 of the joist hanger 1 to flex and bow allowing the bottom chord 7 of the I-Joist 2 to pass by the guides 17 and 18.

In the preferred embodiment for use with an I-Joist 2, 5 the inwardly projecting guides 17 and 18 preferably extend 1/4" inwardly from the side walls 11 and 12 at points 24.

When installing an I-Joist 2, the force with which the side walls 11 and 12 spring back after the bottom chord 7 has bypassed the point 24 at which the guides 17 and 18 project 10 inwardly the farthest, helps to push the I-Joist 2 down on the upwardly extending projection 31 or 31' in the seat 4.

Alternate embodiments of the upwardly extending projection 31 and 31' in the seat 4 are best shown in figures 2A and 13.

Preferably, no nails are used to attach an I-Joist 2 to 15 the joist hanger 1. This eliminates another opportunity for rubbing to occur, that is rubbing between the nail and the I-Joist 2 or the nail and the joist hanger 1.

In the preferred embodiment, when the joist hanger 1 is used with a solid-sawn lumber joist 32, the guides 17 and 18 20 do not extend inwardly as far. Thus it does not take as much effort to push the joist 32 onto the seat 4 of the joist hanger 1. The guides 17 and 18, in this case, are also preferably rigid members, but rather than providing an interlocking fit with the top surface of the bottom chord of 25 an I-Joist they provide merely a friction fit with the sides 33 of the solid-sawn joist 32.

As shown in figure 8, in the embodiment designed to be used with a solid-sawn lumber joist 32, openings 34 are provided in the guides 17 and 18 so that nails 35 can be 30 driven into the solid-sawn joist 32 to connect it to the joist hanger 1, if it is desired to anchor the joist 32 against uplift forces.

In the preferred embodiment for use with solid-sawn lumber joists 32, the inwardly projecting guides 17 and 18 35 preferably extend 1/16" from the side walls 11 and 12 at points 24.

As shown in figure 2B, the side walls 11 and 12 are also kept away from the bottom chord 7 of the I-Joist 2 by spacing them from each other a selected distance, such that the only portion of the side walls 11 and 12 that is likely to come into contact with the I-Joist 2 or other type of joist member are the inwardly projecting guides 17 and 18 of the side members 11 and 12.

In the preferred embodiment, the bottom chord 7 of the I-Joist 2 is formed with substantially parallel opposed side walls 10 defining a first selected width for the I-Joist 2. These side faces 10 of the bottom chord 7 lie parallel with the side faces 10 of the top chord 6.

In the preferred embodiment, the opposed side walls 11 and 12 of the joist hanger 1 are substantially planar members disposed in parallel relationship, and spaced from each other a selected distance that is greater than the first selected width of the I-Joist 2. See figure 2B.

In the preferred embodiment, the inwardly projecting guides 17 and 18 of the side walls 11 and 12 are sufficiently rigid to hold the I-Joist 2 of said first selected width entirely away from the side walls 11 and 12 of the joist hanger 2 except at the inwardly projecting guides 17 and 18, when the side walls 10 of the I-Joist 2 are substantially parallel with the side walls 11 and 12 of the joist hanger 1.

As shown in figures 1 and 2A, to keep the side walls 11 and 12 from bending or warping and coming into contact with the side walls 10 of the I-Joist 2, additional embossments 36 can be formed in the joist hanger 1 to stiffen it. In the preferred form of the joist hanger 1, embossments 36 are formed that start in one side wall 11 run underneath the joist hanger 1 along the seat 4 and then up the other side wall 12. Preferably, the material of the joist hanger 1 is embossed downwardly in the seat 4 and outwardly in the side walls 11 and 12, keeping the material of the hanger away from the I-Joist 2 or other supported member.

As shown in figures 1, 2A, and 2B, preferably, the seat 4 is formed with an upwardly projecting, sharp member 31 for embedment into the bottom surface 5 of the I-Joist 2.

Preferably, the upwardly projecting member 31 or prong is formed out of material of the seat 4.

In the preferred embodiment, an opening 37 is formed by punching the seat 4 in such a manner that the material of the seat 4 is drawn by the punch upward from the seat 4 and out of the plane of the seat 4. As the material is drawn upward, it breaks, causing sharp edges to be formed at the edge of the opening 37. The member 31 formed thereby, is preferably curled 90 degrees out of the seat 4.

10 Thus, none of the material of the seat 4 is removed from the hanger 1, but rather portions of the seat 4 around the opening 37 are bent out of the plane of the seat. The upwardly-curved, jagged edges of the member 31 have led the inventors to give the preferred form a rather lyrical name -
15 the starburst locator. The jagged edges of the starburst locator 31 grab onto the I-Joist 2 or other member as it is being installed, such that it is fixed in the seat 4.

While the upwardly projecting portion 31 is preferably formed as above, it could also be formed as triangular tab 31' or any number of sharp projecting tabs known in the art. See
20 figures 12, 13, 14 and 15.

The inwardly projecting guides 17 and 18 of the side walls 11 and 12, and the upwardly extending member 31 of the seat 4 cooperate during installation to hold the I-Joist 2
25 away from the side walls 11 and 12, such that it is seated properly, as shown in figure 2B. The guides 17 and 18 direct the I-Joist 2 towards the center of the seat 4, and the starburst locator 31 grabs and holds it centered.

As shown in figure 1, preferably, the joist hanger 1 is
30 made with back flanges 38, for attaching the joist hanger 1 to the front surface 39 of the header 3. The hanger 1 is preferably attached to the header 3 by means of fasteners 40 driven through the back flanges 38 and into the header 3. See figure 8, where a nail 40 is driven through the back flange 38
35 and into the header 3. The back flanges 38 are preferably provided with openings 41 for facilitating the connection of the hanger 1 to the header 3. Arrows, also labeled as 40, in

figure 8, represent fasteners 40 that would be driven through the additional circular openings 41 in the back flange 38 shown. Those fasteners 41 are preferably nails, when the header 3 is made out of wood or engineered lumber.

5 As shown in figure 8, preferably, the back flanges 38 are made out of the same material as the seat 4 and side walls 11 and 12, and are formed by orthogonally bending the back flanges 38 out of each of the side walls 11 or 12. The back flanges 38, preferably, extend outwardly from the outward side
10 faces 15 and 16 of the side walls 11 and 12 of the hanger 1.

As shown in figure 8, preferably, the joist hanger 1 is only attached to the header 3 or support member by means of fasteners 40 that run through the back flanges 38 of the hanger 1 and directly into the header 3. Ideally, to reduce
15 floor squeak as much as possible, the hanger 1 would have no members or portions that were disposed above the top surface 42 of the header 3, when the hanger 1 is installed. See, for example, figure 16, which has no top flanges 43 for interfacing with the top surface 42 of the header 3.

20 Joist hangers 1 are broadly classified into four categories, face-mount hangers, top-flange hangers, wrap-around hangers and saddle hangers, depending, primarily, on how they are attached to the header 3. The improvements of the present invention relating to the inwardly projecting
25 guides 17 and 18 and the positioning of the I-Joist 2 can be used with all types of joist hangers 1.

The joist hanger 1 shown in figure 16, is considered a face-mount hanger. From the standpoint of reducing floor squeak, a face-mount hanger is preferred; however, they are
30 not easily installed. Face mount hangers attach to the header 3 only by means of fasteners 40 driven into the front surface 39 of the header 3, and they have no members disposed above the top surface 42 of the header 3 when installed.

Top flange hangers add a top flange 43 member to the
35 typical face-mount hanger, this top flange 43 is formed to engage the top surface 42 of the header 3, such that the hanger 1 can hang from the header 3. A hanger with typical top flanges 43 is shown in figure 17. The top flanges, as

shown in figure 17, are formed with embossments 44 for strengthening the top flanges 43 and with openings 45 for receiving fasteners. With most top-flange hangers 43, fasteners are used to attach the hanger 1 to both the front surface 39 of the header 3 and the top surface 42 of the header 3 through the top flange 43. Generally, less nails are driven into the front surface 39 of the header 3 with top-flange hangers than with face-mount hangers, because the top flange 43 can provide most of the support for the hanger 1.

Wrap-around hangers are similar to top-flange hangers. They add another member to the top flange that engages the back surface of the header, to make an even stronger connection. Saddle hangers consist of two joist receiving members that are connected by a member that wraps over the top of a header.

The joist hanger 1 of the present invention can be formed with top flanges 43 that hook over the top of the header 3; however, the inventors have found that squeaking in the connection can be lessened if no top flanges 43 are present. Top-flange hangers generally rely substantially on the top flange 43 hooked over the top surface 42 of the header 3 to carry the load. The inventors have found that top-flange hangers, having only a few nails in the back flanges near the top of the hangers, tend to stretch over time. This stretching is partly a result of the top flange digging into the header or rounding off the edge of the header. This stretching is also due to the straightening of the bend in the top flange and back flanges. This stretching creates a looseness in the connection that can lead to excess noise.

Furthermore, as shown in the Callies '248 and the Tschan '548 patents, with typical top flange hangers, the distance between the lowest nail in the back flange and the seat is quite far. This distance between the seat and the lowest anchor point of the hanger in the header allows the seat of the hanger quite a bit of play to pull away from the front surface of the header under load. This can also lead to squeaking.

In the present invention, by driving a plurality of spaced fasteners 40 through the back flanges 38 into the front surface 39 of the header 3, the opportunity for the hanger 1 or portions of the hanger 1 to stretch under load is reduced. See figure 2A. Reducing stretching of the hanger 1 also helps to eliminate squeaks caused by parts rubbing. The lowest fastener 40, preferably, attaches the back flange 38 to the header 3 at a point that is at least halfway down the length of the hanger 1 from the highest point of the hanger 1.

10 However, the inventors have also found that with the preferred rigid inwardly projecting guides 17 and 18, the lowest fastener 40 in the back flange 38 cannot be too close to the seat 4. See figure 2A. This is because if the fastener 40 is too close it will interfere too greatly with 15 the ability of the side walls 11 and 12 to flex outwardly, making it too difficult to push the I-Joist 2 onto the seat past the guides 17 and 18.

Another reason for removing the top flange is that top flanges, generally lift the floor sheathing away from the top 20 surface of the header. The inventors have found that a problem with the prior art is that using nails to attach the top flange of the hanger to the header lifts the floor sheathing or sub-flooring even higher above the surface of the header. This creates gaps or space between the top surface of 25 the header and the bottom surface of the floor sheathing. Forming the floor with these gaps can lead to looseness of fit over time and rubbing of parts as the building settles. Using relatively green lumber further exacerbates this problem.

However, installers like to use hangers with top flanges, 30 and the inventors have found a way to accommodate the needs of the installers with the needs to produce floors with minimal squeak.

As shown in figure 8, top flanges 43 are useful during installation, because that hook onto the top surface 42 of the 35 header 3, allowing the installer to hang the hanger 1 off the header 3 before he permanently attaches it with nails 40 or other fasteners. This makes it easier to install the hanger 1, because if the proper joist hanger 1 is selected for the

particular I-Joist 2 or other member, just by hanging the hanger 1 from the header 3, the seat 4 of the hanger 1 is set at the proper elevation for receiving the I-Joist 2. Further, the hanger 1 holds itself at the correct elevation, while the installer permanently attaches it to the header 3 with fasteners 40.

Recognizing this, the inventors have adopted a compromise solution by providing low-profile, top flanges 43 on the hanger 1 that are relatively thin and narrow, such that in some situations they can actually be pushed into and become flush with the top surface 42 of the header. See figures 6 and 7. Preferably, no embossments are formed in the top flanges 43. See figure 7, where narrow top flanges 43 are shown that are so thin that they are pushed into the top surface 42 of the header 3, such that the sub-flooring 46 can be fully supported by the top surface 42 of the header 3 and the top surface 47 of the top chord 6 of the I-Joist 2. Nails 48 are shown attaching the sub-flooring 46 to the header 3 and I-Joist 2.

The preferred shape for the top flanges 43 is shown in figure 18, with other embodiments of top flanges 43 shown in figures 1 and 12. All of the embodiments of top flanges 43 shown are characterized by being narrower than the back flanges 38 at their maximum width. As shown in figure 18, the preferred top flange 43 is fairly wide where it joins with the back flange 38. It is also fairly wide at the bend line 49 to direct it over the top surface 42 of the header 3. The top flange 43 then tapers as it nears its end. As shown in figure 18 weakening openings 50 can be made at the line where the top flange 43 meets the back flange 38 to facilitate the removal of the top flange 43 from the hanger 1, as is preferred. The top flange preferably extends inwardly $3/4$ " from the edge between the top surface 42 and the front surface 39 of the header 3. Preferably, the top flange 43 is no wider than $1/2$ " to minimize interference with the attachment of the sub-flooring 46.

The top flanges 43 can be formed so that they are small enough to be pushed into the top surface 42 of headers 3 made

from such lumber as Douglas Fir-Larch and Southern Pine. In some instances, the top flanges 43 may be pushed into the top surface 42 merely by installation of the sub-flooring 46. The installer could also pound the top flange 43 into the top surface, such that the top flange is flush with the top surface 43 of the header 3. See for example figures 6 and 7. At the same time, the top flanges 43 are large enough to support the weight of the hanger 1 while the installer is attaching it to the header 3.

10 The dimensions of the top flanges 43 or self-jigging tabs is dependent on a combination of factors, including the strength and thickness of the material from which the hanger 1 is made. As stronger materials are used to make the hanger 1 and the top flanges 43, the top flanges 43 can be made
15 smaller.

If desired, nail prongs could be added to the top flanges 43. These nail prongs could be used to more securely fasten the hanger 1 to the header 3 while the joist hanger 1 is being connected to the header 3 with nails 40 or other fasteners.
20 The nail prongs would be formed out of the metal of the top flanges 43. The nail prongs would be driven into the header by striking them with a hammer.

In the preferred embodiment, nail prongs 51 are added to the back flanges 38 of the hanger 1. See figures 1 and 18.
25 These nail prongs 51 help to more securely fasten the joist hanger 1 to the header 3 before the nails 40 or other fasteners are driven into the header 3.

It is preferred that after the joist hanger 1 has been attached to the header 3, the top flanges 43 are bent away from the top surface 42 of the header 3 so that no portion of the hanger 1 extends above the top surface 42 of the header 3. The top flanges 43 could be bent back with a screw driver or pliers, or even removed. If this is done, the top surface 42 of the header 3 is uncovered, presenting a completely flat
30 surface for the installation of the sub-flooring 46 or other spanning members. While the inventors prefer that the top flanges 43 be bent away from the top surface 42 of the header 3, the inventors realize that installers are usually time

pressured and may not take the time to bend the top flanges 43 back.

Notches 52 as shown in figures 1 can also be made to allow the installer to easily break-off the top flange. This feature also benefits the installer, if she chooses to set the joist hanger 1 at a different elevation on the header 3 than that provided by the self-jigging top flanges 43.

In the preferred embodiment, the back flanges 38 are formed with triangle-shaped openings 53 to indicate that extra fasteners may be added where additional loading of the joist hanger 1 is expected.

In the preferred embodiment, at the tops of the side walls 11 and 12 of the joist hanger 1, upper bend tabs 54 are formed that help guide the I-Joist 2 between the side walls 11 and 12. The upper tabs 54 at the tops of the side walls 11 and 12 flare outwardly to form a funnel for receiving the bottom 5 of the I-Joist 2.

In the preferred form, notches 55 are made between the bend tabs 54 and the back flanges 38 and portions of the side walls 11 and 12 and the back flanges 38 to allow the bend tabs 54 to more easily give, making it easier to initially slip the I-Joist 2 into the joist hanger 1 at a skewed angle.

In the preferred form of the invention, the seat 4 of the joist hanger 1 is 2" inches deep to provide an appropriate bearing surface for a typical light-frame I-Joist 2.

Preferably, the joist hanger 1 is constructed in a manner that allows it to be produced from a single strip of light gauge sheet metal bent and embossed at appropriate locations to form the completed joist hanger 1. This process is preferably accomplished on an automated, progressive die.

Preferably, the joist hangers 1 are die-formed from No. 18 gauge galvanized steel. The galvanizing and steel comply with ASTM A 653-97, G 60 specification or better. The steel has a minimum yield strength of 28,000 psi or better and a minimum tensile strength of 38,000 psi or better.

In use, the joist hanger 1 is mounted on the header 3 by appropriate fasteners 40. In light frame wood construction this would generally be nails 40 driven through openings 41

provided in the back flanges 38 for attaching the joist hanger 1 to the header 3. Thereafter, the I-Joist 2 is simply pressed into place onto the seat 4 and between the side walls 11 and 12 and the guides 17 and 18 on the side walls 11 and 12.

If the joist 32 is made from solid-sawn lumber it will generally need to be further fastened to the joist hanger 1 for resisting uplift forces, by appropriate fasteners 35. Again, in light frame wood construction, these would generally be nails 35 or screws. Again, openings 34 would generally be provided in the guides 17 and 18 to make this attachment more easily.

In the preferred embodiment, the joist hanger 1 is used to secure an I-Joist 2 to a solid-sawn wood header 3. The joist hanger 1 is first positioned on the header 3 by selecting where along the header 3 the I-Joist 2 is to be set and then hooking the top flanges 43 of the joist hanger 1 onto the top surface 42 of the header 3. The nail prongs 51 are then driven into the front surface 39 of the header 3. Nails 40 are then driven through openings 41 provided in the back flanges 38 of the joist hanger 1 and into the header 3.

Thereafter, the I-Joist 2 is pressed onto the seat 4. As the bottom chord 7 of the I-Joist 2 passes by the guides 17 and 18 in the side walls 11 and 12, the side walls 10 of the bottom chord 7 push on the guides 17 and 18, and the guides 17 and 18 push the side walls 11 and 12 outward, allowing passage of the bottom chord 7. When the upper surface 9 of the bottom chord 7 passes by the points 24 on the guides 17 and 18 where they extend inwardly the farthest, the side walls 11 and 12 of the hanger 1 spring back inwardly toward each other. The lower tapering portion of the guides 17 and 18 push on the top surface 9 and the edge between the top surface 9 and side walls 10 of the bottom chord 7, which in turn pushes the bottom surface 5 of the bottom chord 7 onto the seat 4 and the upward projection 31 of the seat 4. This spring-action has led the inventors to refer to the joist hanger 1 as a snap-in hanger. The connection of the I-joist 2 to the joist hanger 1

is then complete. Sub-flooring 46 or other materials to finish the floor diaphragm are then added.

During the making of the preferred connection of the present invention no nails are driven into the I-Joist 2.

5 Preferably, the joist hanger 1 is attached to the header 3 with 10d common nails.

The joist hangers 1 are preferably intended for use in conjunction with I-Joists 2. The I-Joist 2 is preferably made with either laminated veneer lumber top and bottom chords, 10 dimension lumber flanges or laminated strand lumber top and bottom chords.

The preferred I-Joists 2 manufactured by Trust Joist MacMillan Corporation, include model numbers TJI®/Pro- 150, 250, 350, representing different sizes. The dimensions of the 15 joist hanger 1 are modified to accommodate each different model of I-Joist listed above.

The header 3 is preferably made from Douglas Fir-Larch or Southern Pine lumber or structural composite lumber.

The preferred form of the present invention has been 20 described in terms of a standard joist hanger 1 wherein the seat 4 lies at what is substantially a right angle to the front surface 39 of the header 3, and the side walls 11 and 12 also lie orthogonally to both the seat 4 and the front surface 39 of the header 3. However, the formations of the present 25 invention have application also in slope and skew hangers.

We Claim

1. A joist hanger for attaching a joist to a support member, said joist hanger comprising:

- a. a seat;
- b. first and second opposed side walls attached to said seat, each of said side walls having an inwardly facing side surface, said inwardly facing side surfaces facing each other;
- c. each of said side walls further having one or more inwardly projecting guides projecting inwardly towards said other opposed side wall;
- d. said seat being formed with an upwardly extending, sharp projection;

wherein:

- a. said joist is formed with substantially parallel opposed side faces that define a selected width of said joist;
- b. said opposed side walls of said hanger are substantially planar members disposed in parallel relationship, and spaced from each other a selected distance that is greater than said selected width of said joist; and wherein
- c. said inwardly projecting guides of said side walls are sufficiently rigid to hold said joist of said selected width entirely away from said side walls except at said inwardly projecting guides, when said side faces of said joist are substantially parallel with said side walls of said hanger.

2. The joist hanger according to claim 1, wherein:

said upwardly extending, sharp projection in said seat is formed as sharp flanges around an opening in said seat.

3. The joist hanger according to claim 1 or claim 2, wherein a connection between the joist hanger, the joist, and the support member is provided, said joist having a bottom surface and the selected width, said connection comprising:

said support member;

said joist hanger attached to said support member, said joist hanger supporting said joist, and said joist hanger comprising:

said seat formed to receive a portion of said bottom surface of said joist; and

said inwardly projecting guides extending inwardly toward each other such that said inwardly projecting guides create a space between them that is narrower than said selected width of said joist, said inwardly projecting guides further being formed so that they are so rigid that when said joist is pushed down past said inwardly projecting guides to install said bottom surface of said joist on said seat, said side walls are pushed outwardly to allow said joist past said inwardly guides.

4. The joist hanger according to any one of claims 1 to 3, wherein:

said inwardly projecting guides are formed with an opening.

5. The joist hanger according to any one of claims 1 to 4, wherein:

each said inwardly projecting guide has a point where said inwardly projecting guide is farthest away from said side wall of which it is a part.

6. The joist hanger according to claim 4, wherein:

said opening in said inwardly projecting guide lies below said point farthest away from said side wall of which it is a part.

7. The joist hanger according to claim 3, wherein:
said inwardly projecting guides extending inwardly toward each other such that said inwardly projecting guides create a space between them that is narrower than said selected width of said joist, said inwardly projecting guides further being formed so that they are so rigid that when said joist is pushed down past said inwardly projecting guides to install said bottom surface of said joist on said seat, said side walls are pushed outwardly to allow said joist past said inwardly projecting guides.
8. The joist hanger according to any one of claims 1 to 7, wherein said joist hanger further comprises:
 - a. one or more back flange members connected to one or more of said first and second opposed side walls, said one or more back flange members each being connected to said support member by a plurality of fasteners; and wherein
 - b. said joist hanger is formed and attached to said support member in such a manner that no portion of said joist hanger extends above a top surface of said support member.
9. The joist hanger according to claim 8, wherein:
 - a. said seat of said joist hanger defines a lowest point of said joist hanger;
 - b. said side walls have top ends which are substantially a highest point of said joist hanger; and wherein
 - c. one of said plurality of fasteners connecting each of said one or more back flange members to said support member is substantially halfway down from said highest point towards said lowest point of said joist hanger.

10. The joist hanger according to any one of claims 1 to 9, wherein:

said opposed side walls are formed with upper tabs that flare outwardly from said side walls.

11. The joist hanger according to any one of claims 1 to 10, wherein:


one or more embossments are formed in said seat that also extend partially up said side walls, said one or more embossments projecting downwardly from said seat and outwardly from said side walls.

12. The joist hanger according to claim 1 or claim 2, wherein a connection between the joist hanger, the joist, and the support member is provided, said connection comprising:

- a. said support member;
- b. said joist hanger attached to said support member, said joist hanger supporting said joist; and wherein
- c. each of said side walls of said joist hanger has one or more inwardly projecting guides projecting inwardly towards said other opposed side wall;
- d. each said inwardly projecting guide further being formed with an inwardly raised embossed portion, said embossed portion having first and second bracketing transition areas where at least a portion of said embossed portion is joined to said side wall.

13. The joist hanger according to any one of claims 1, 2 and 12, wherein:

said joist hanger is supported by the support member, and said joist hanger supports the joist.

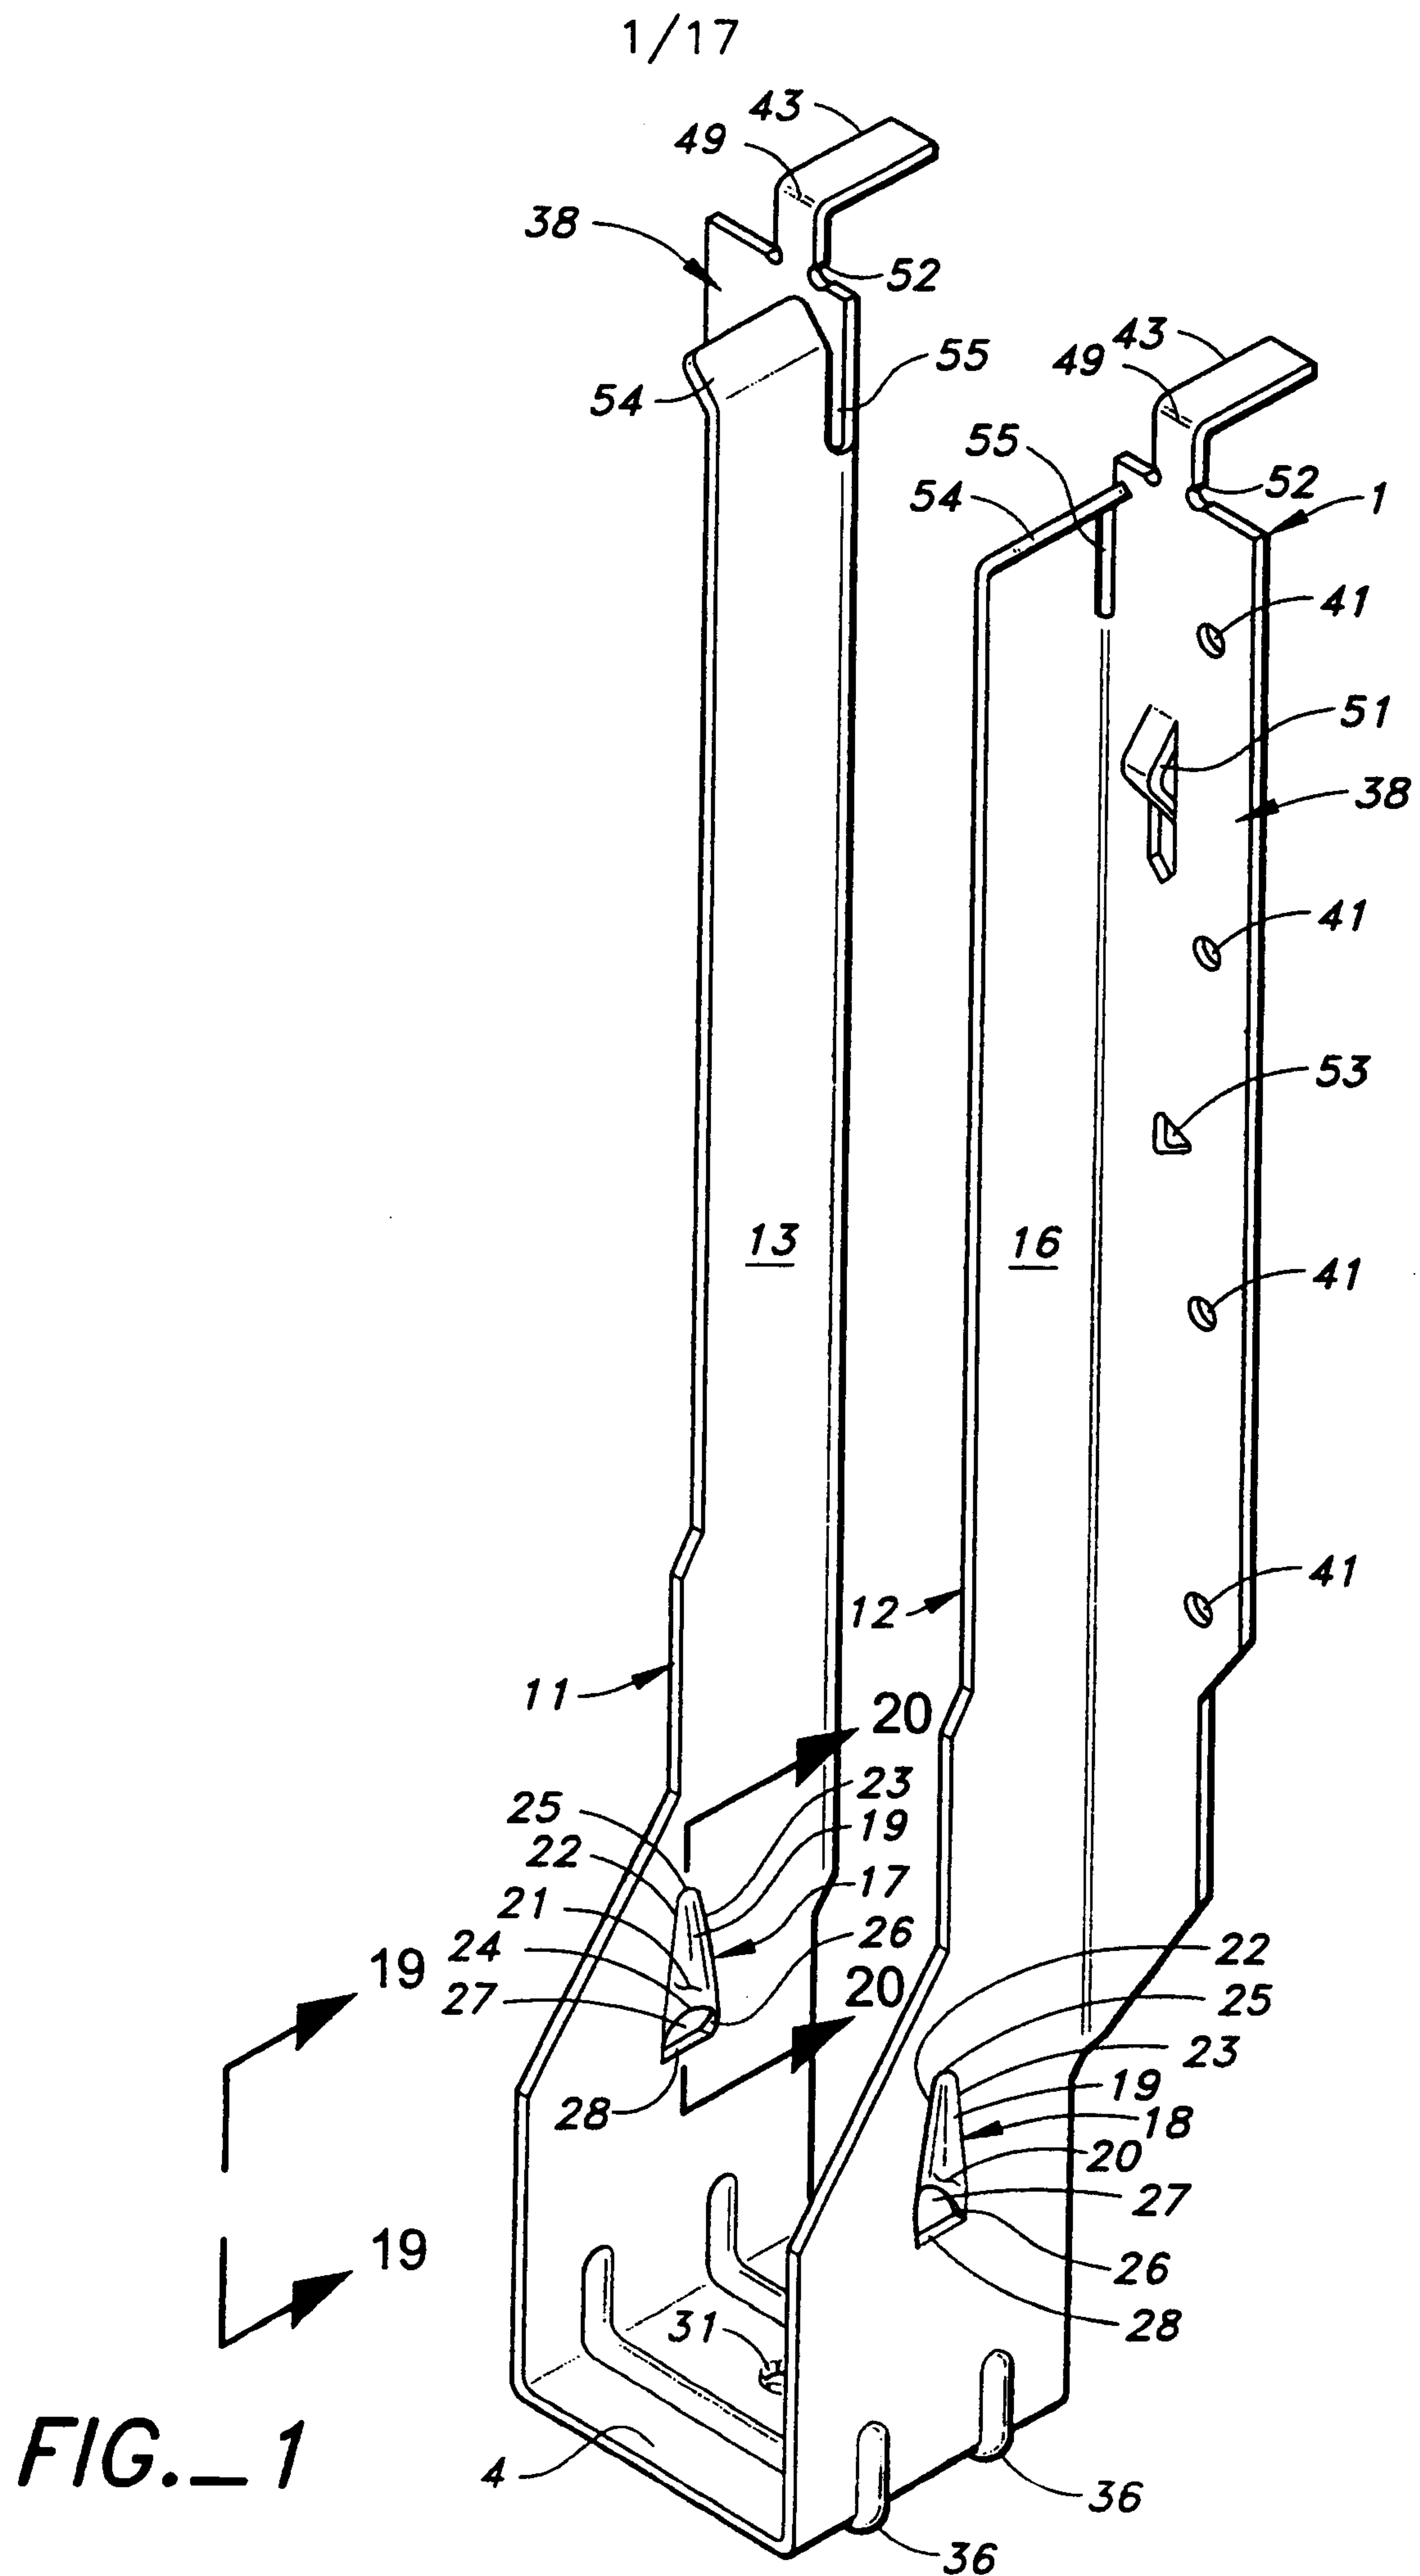

2/17

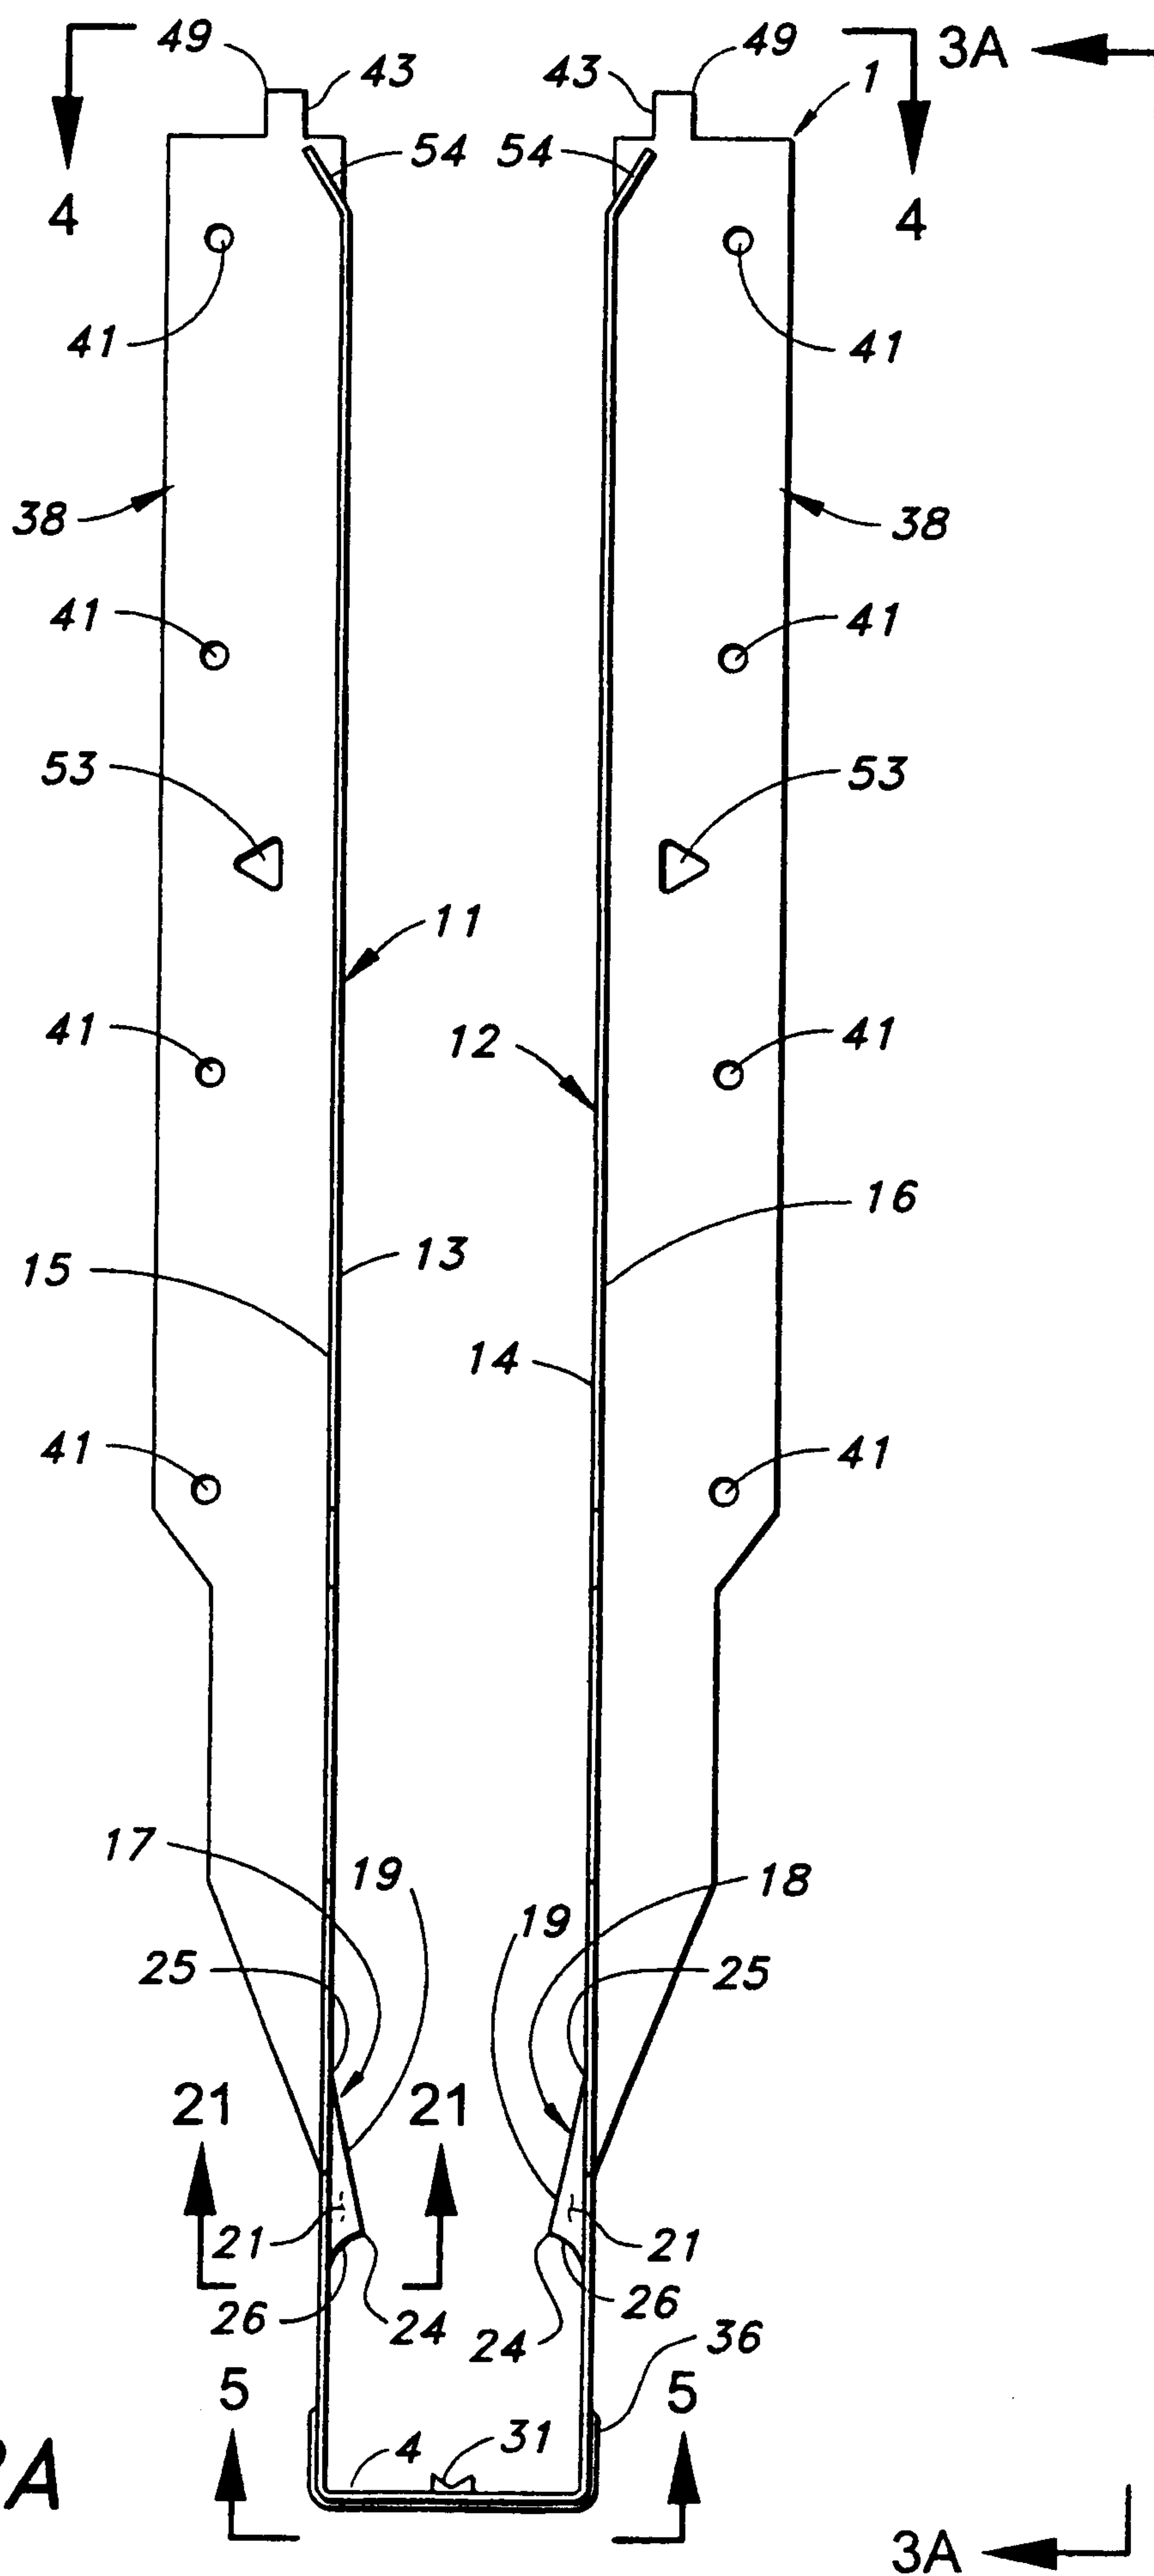
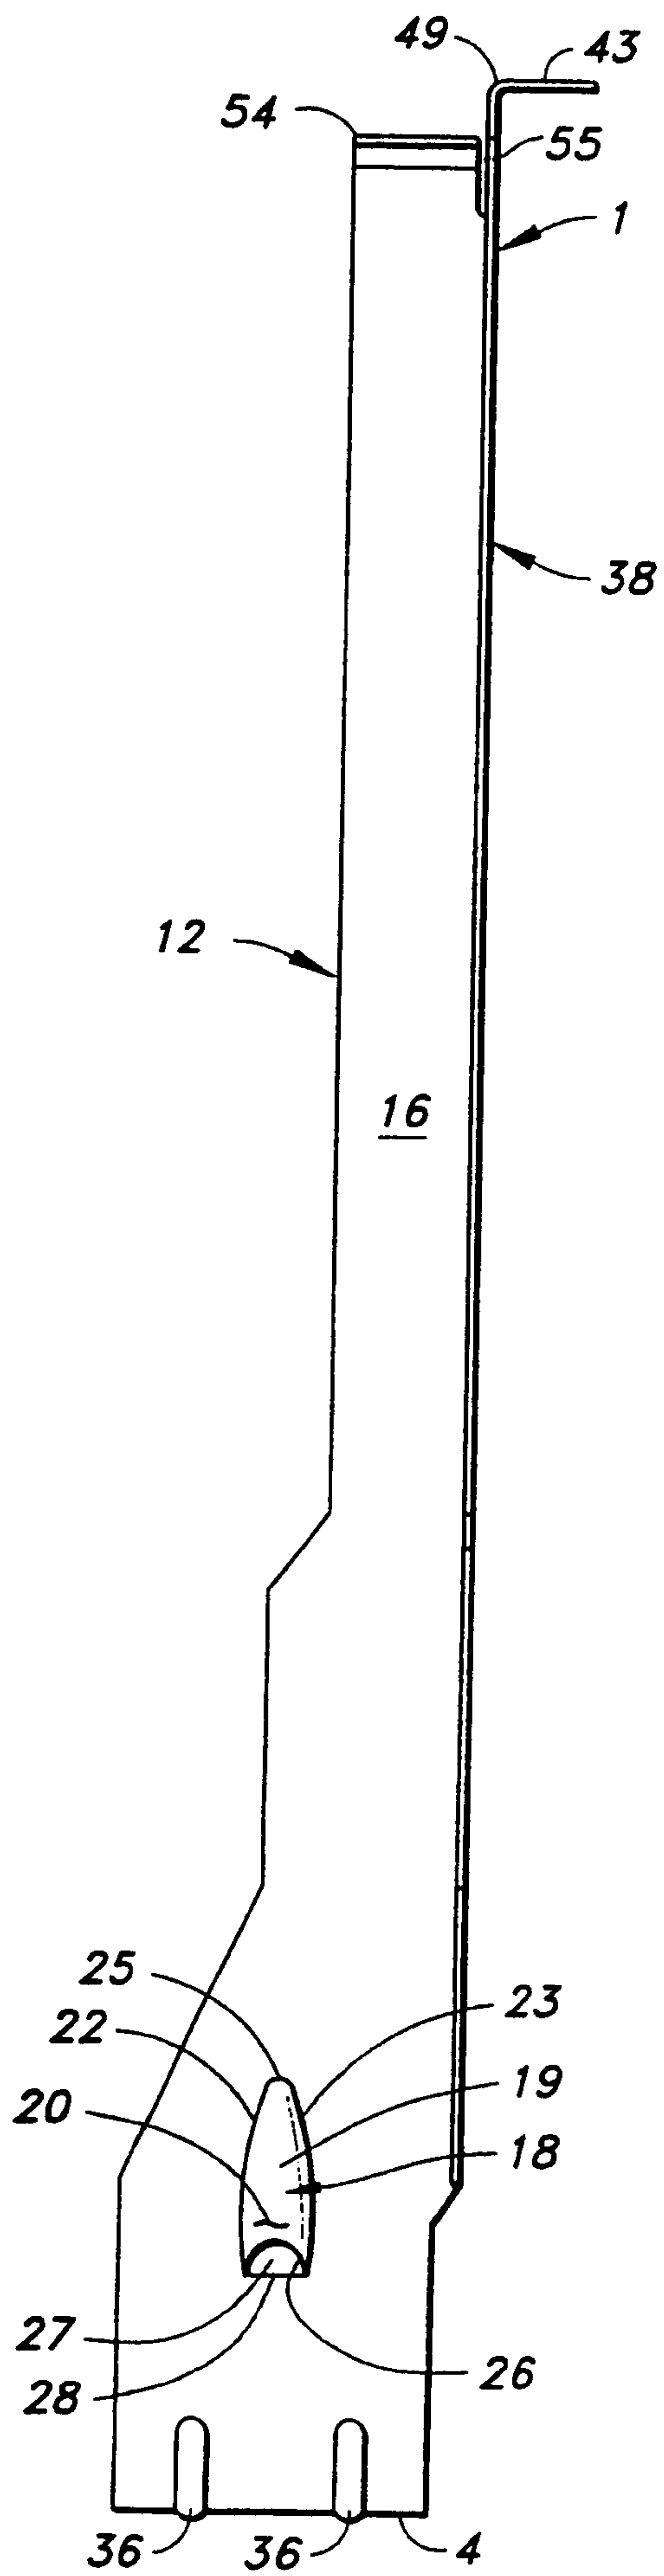


FIG. 2A

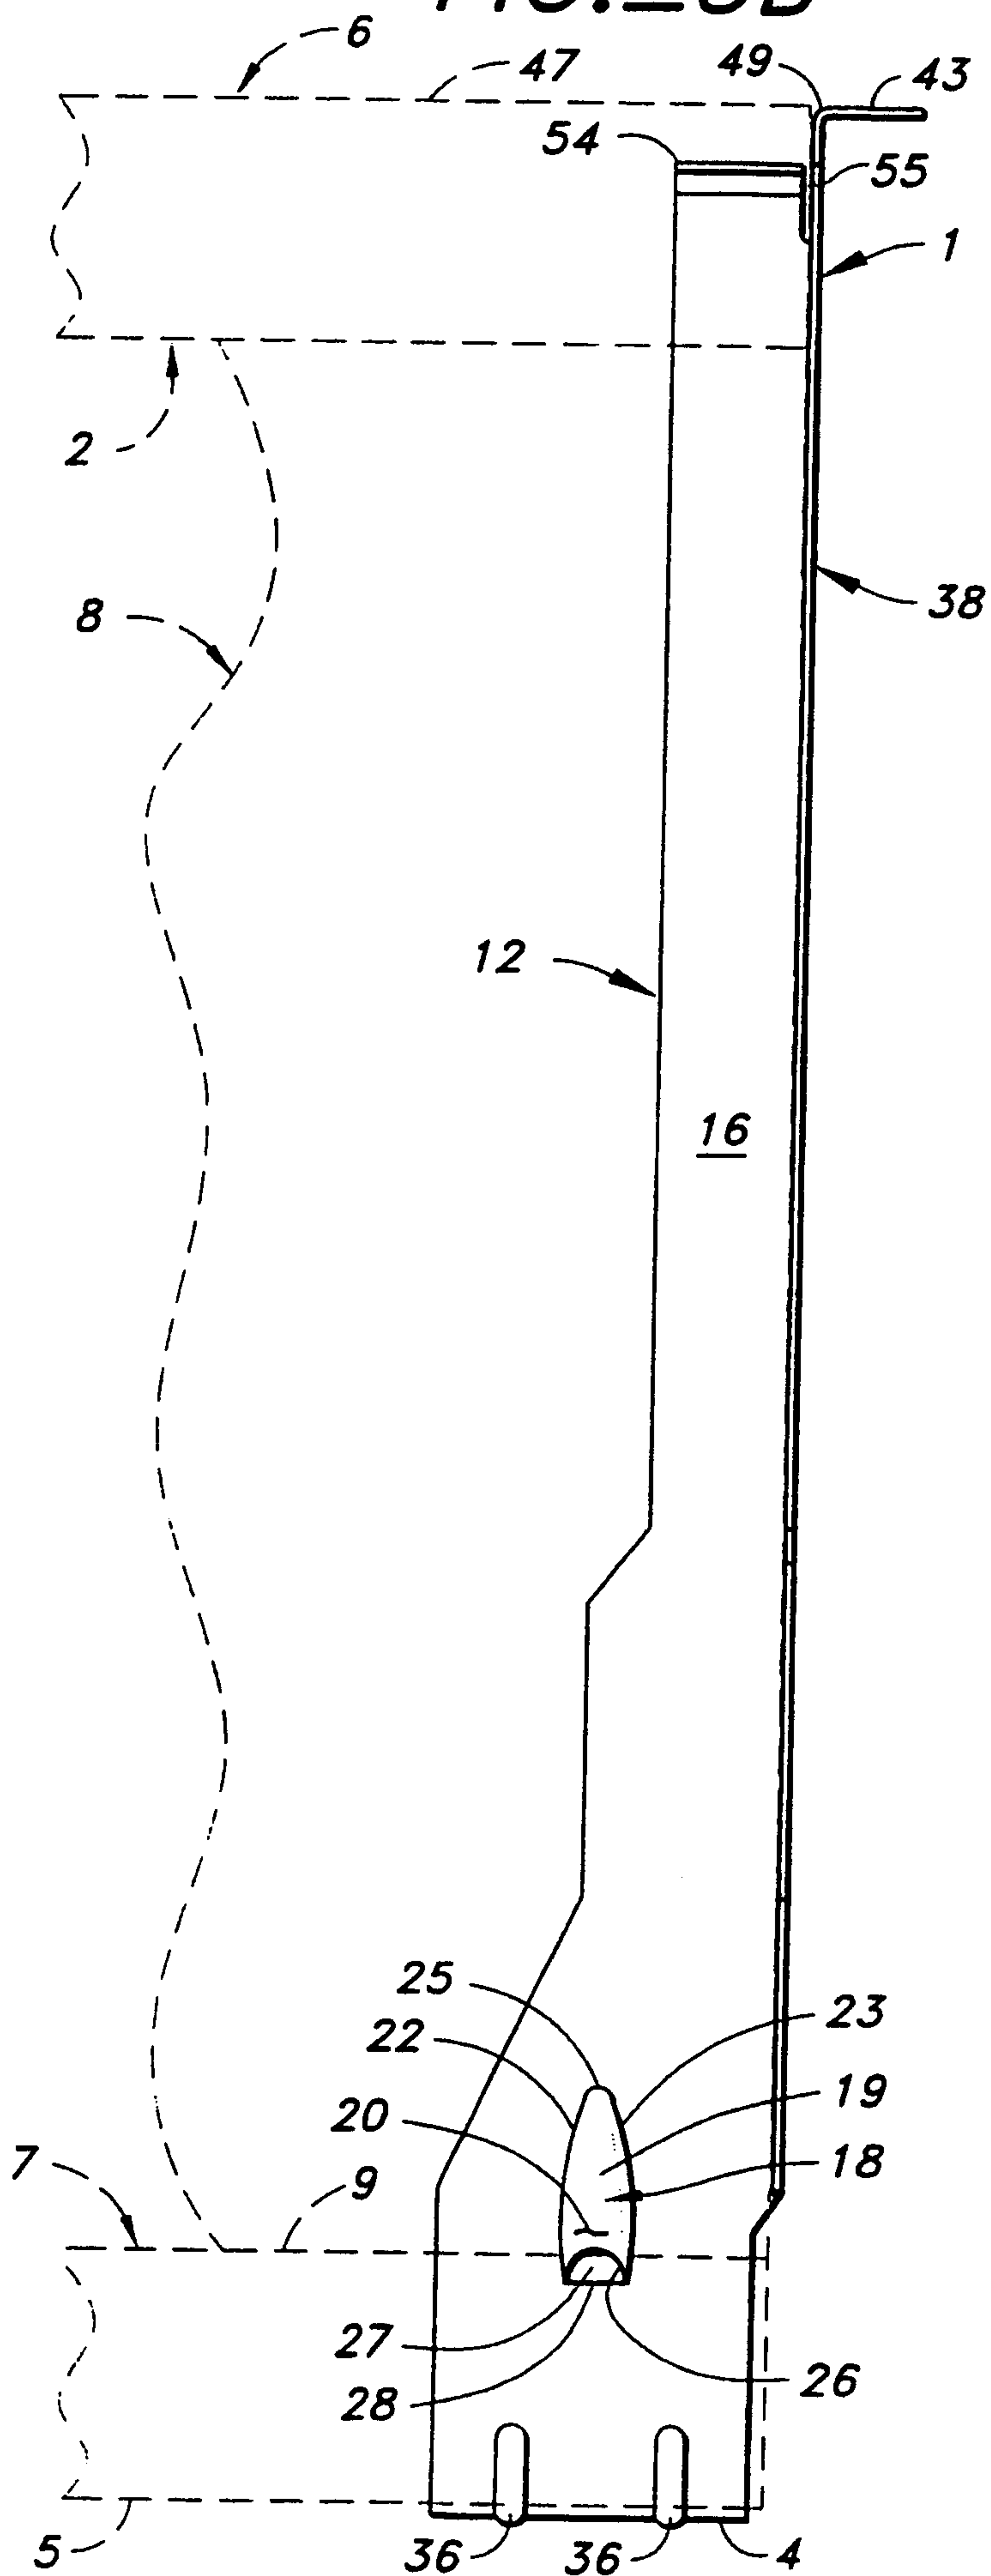


FIG. 3A





4/17


FIG. 3B



5/17

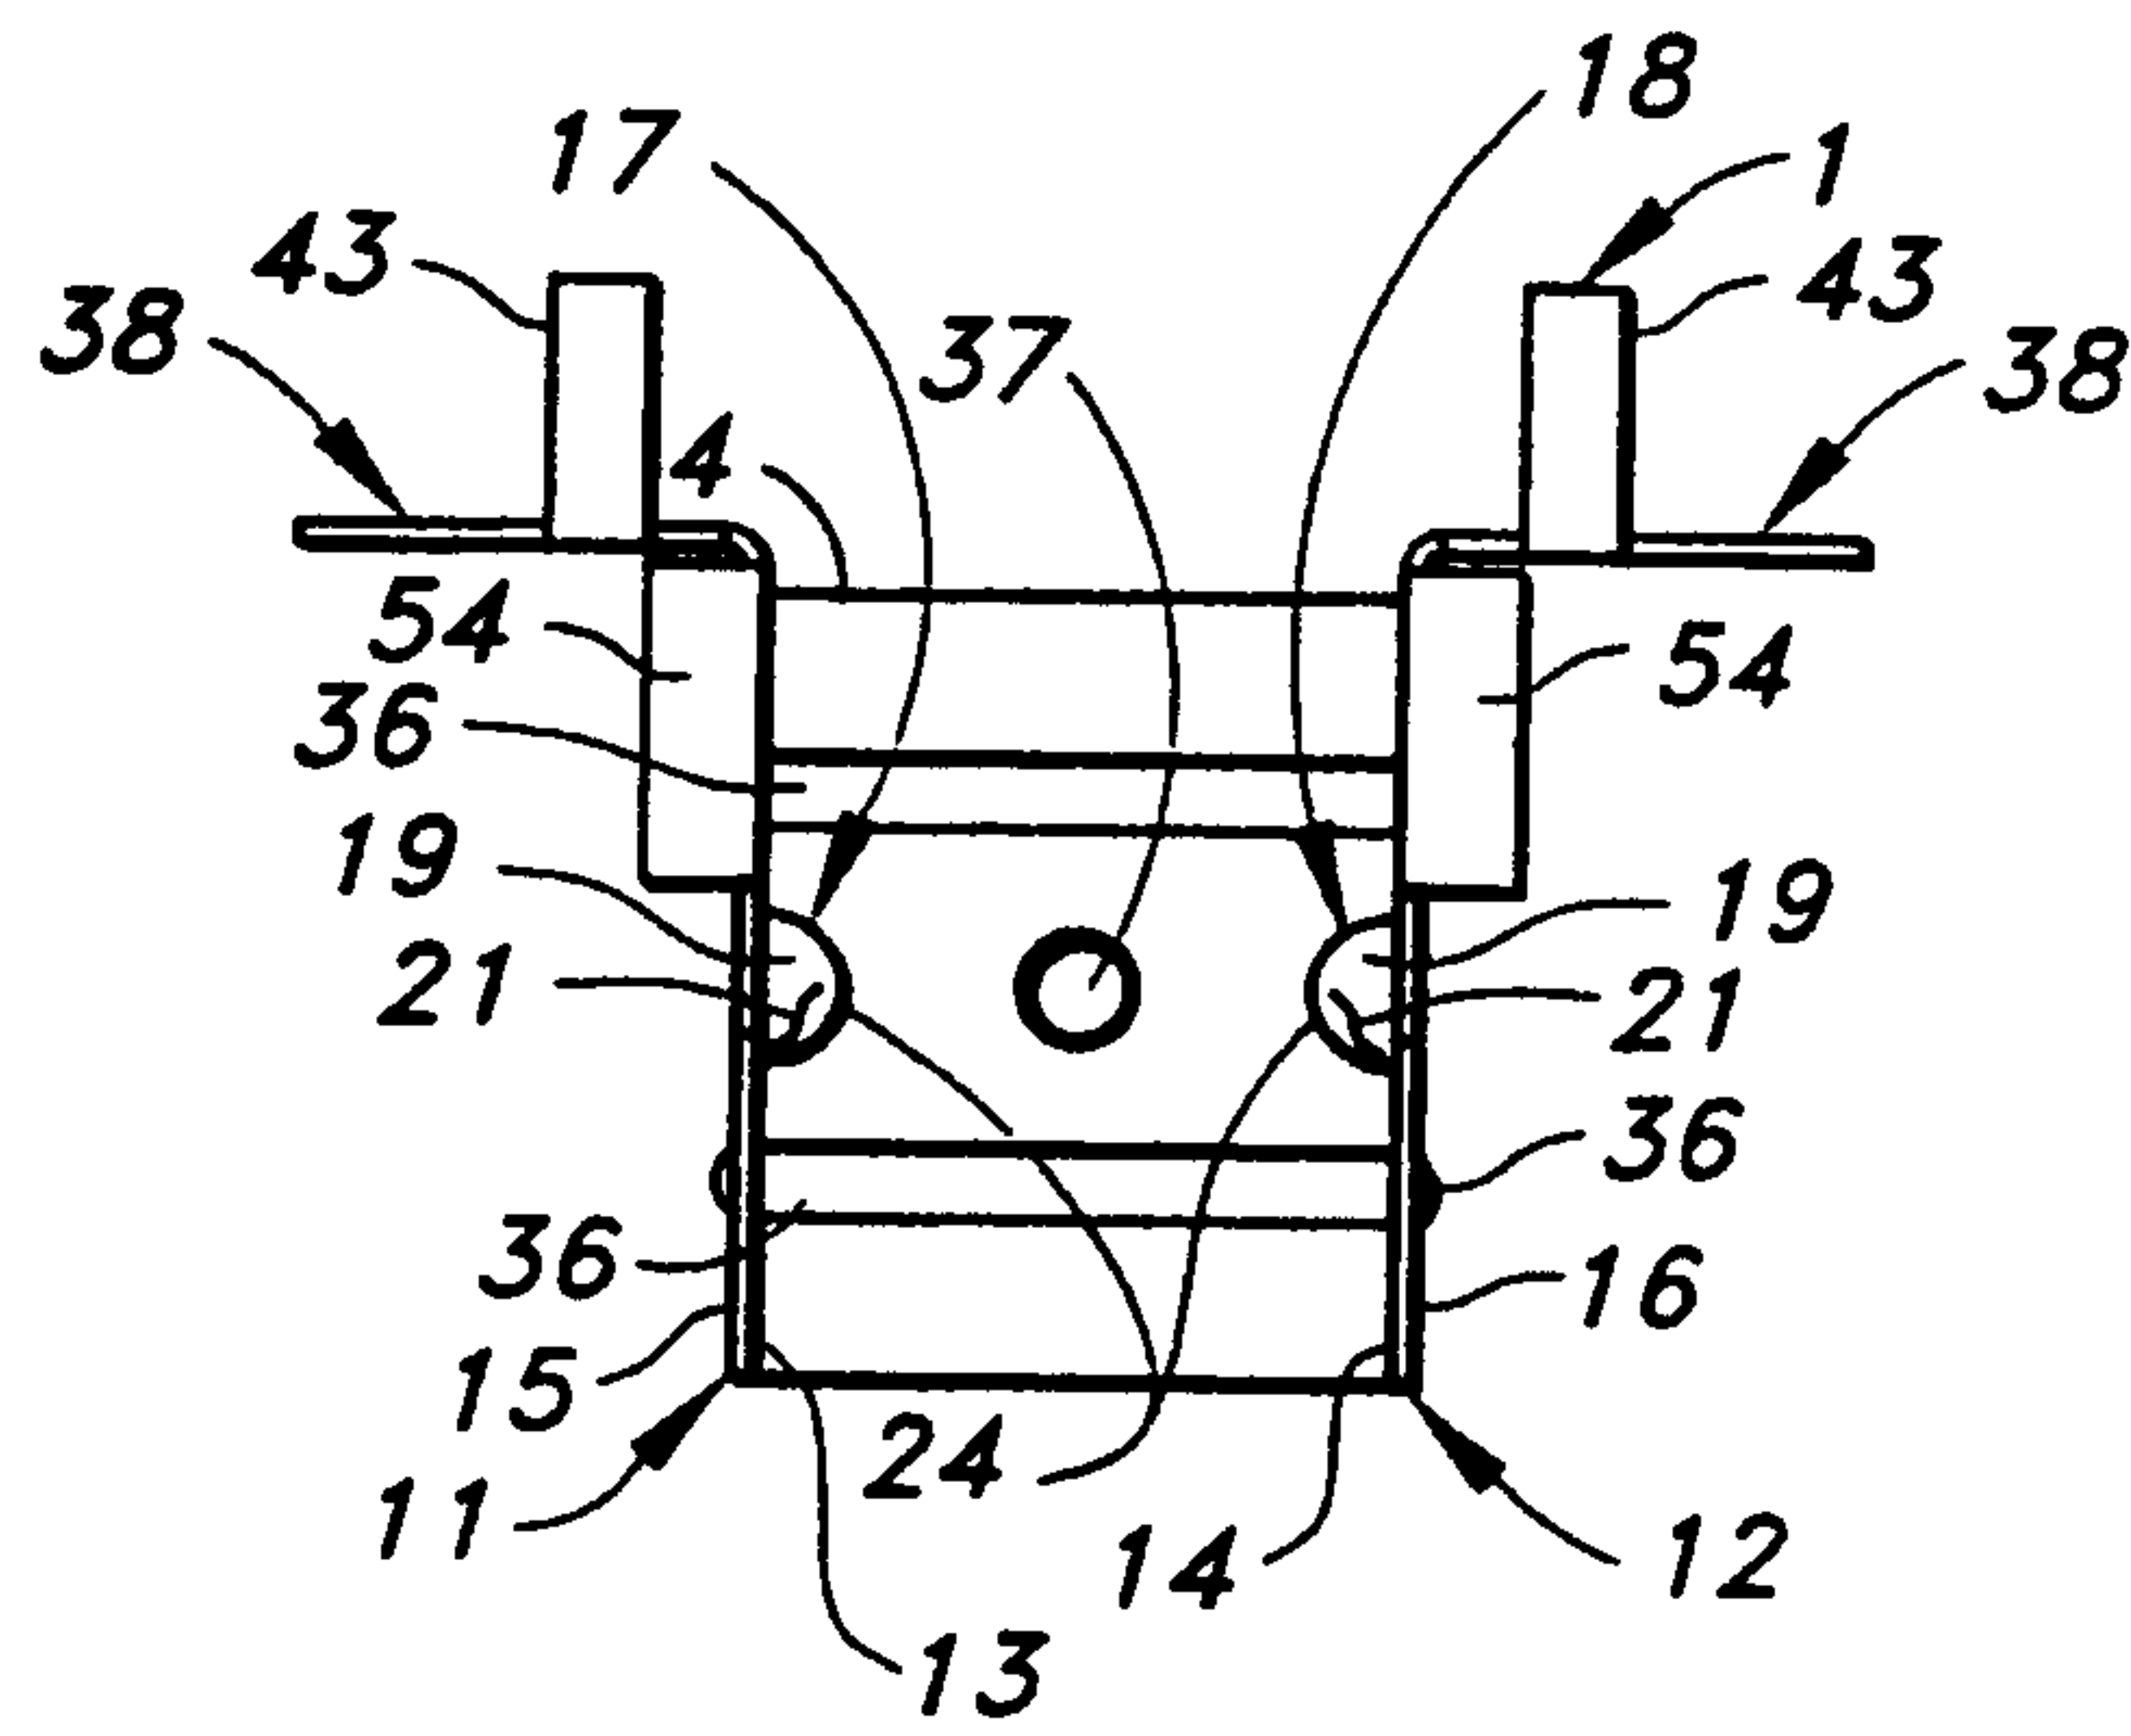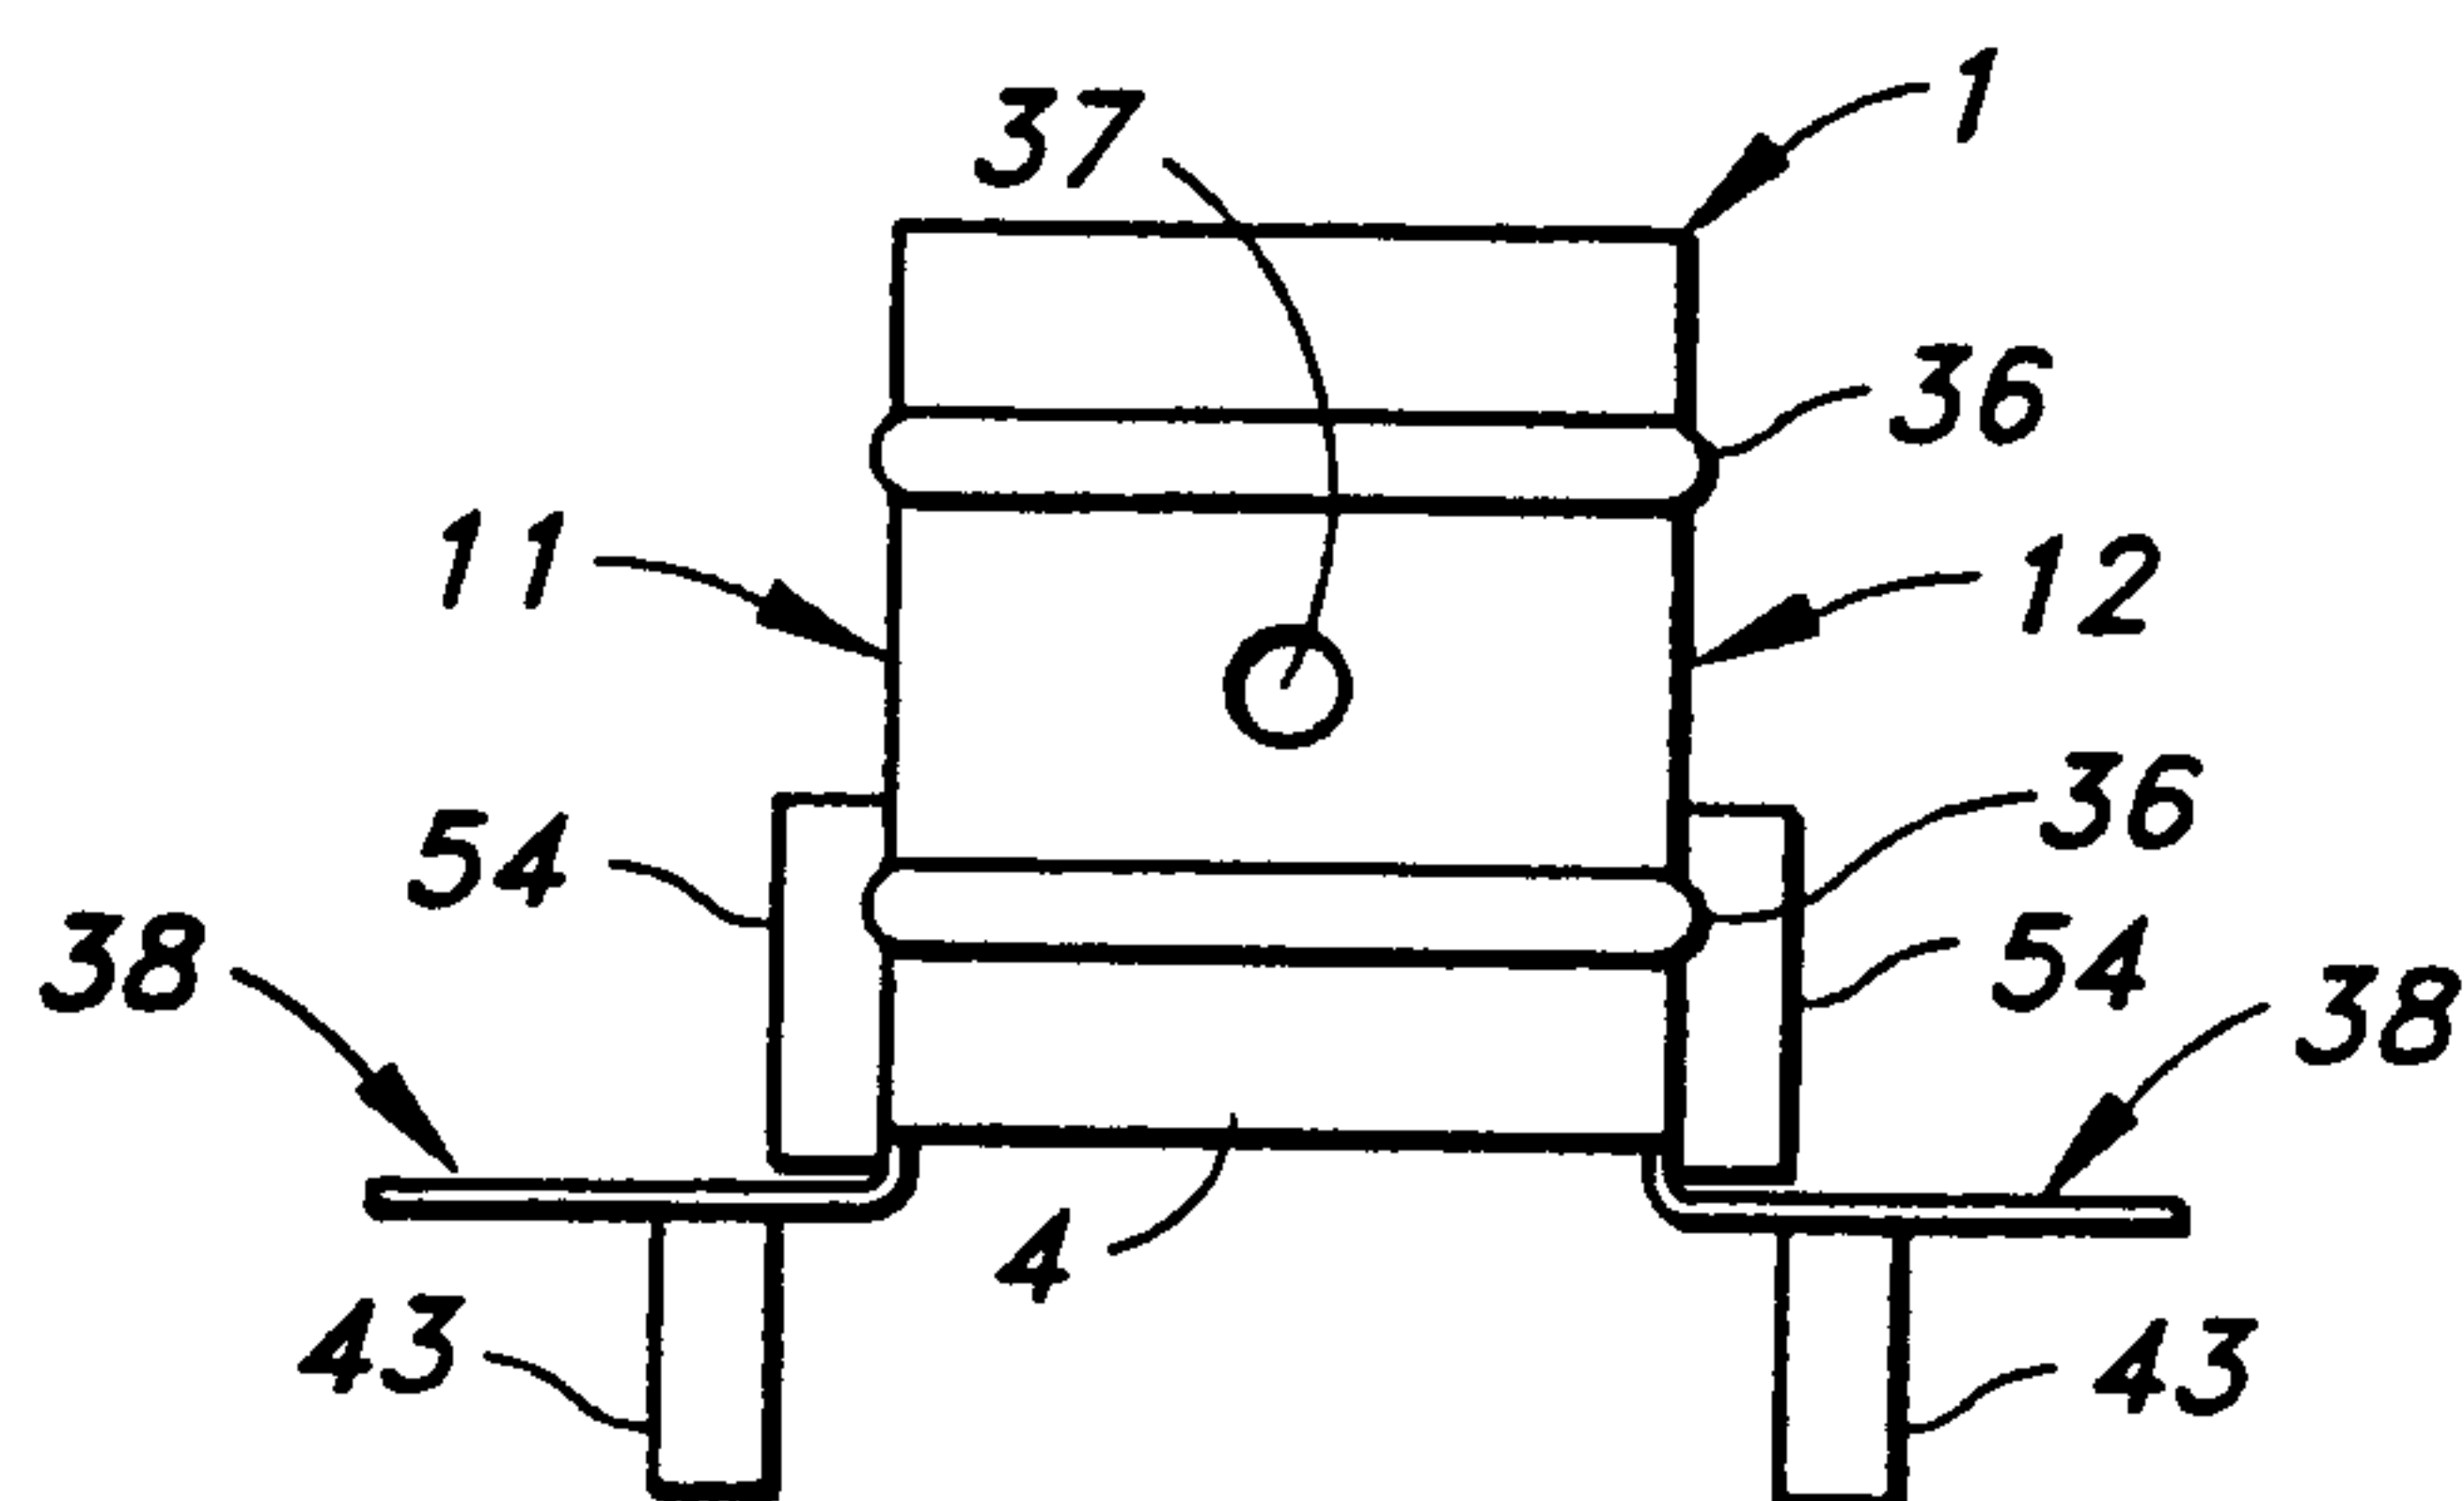**FIG. 4****FIG. 5**



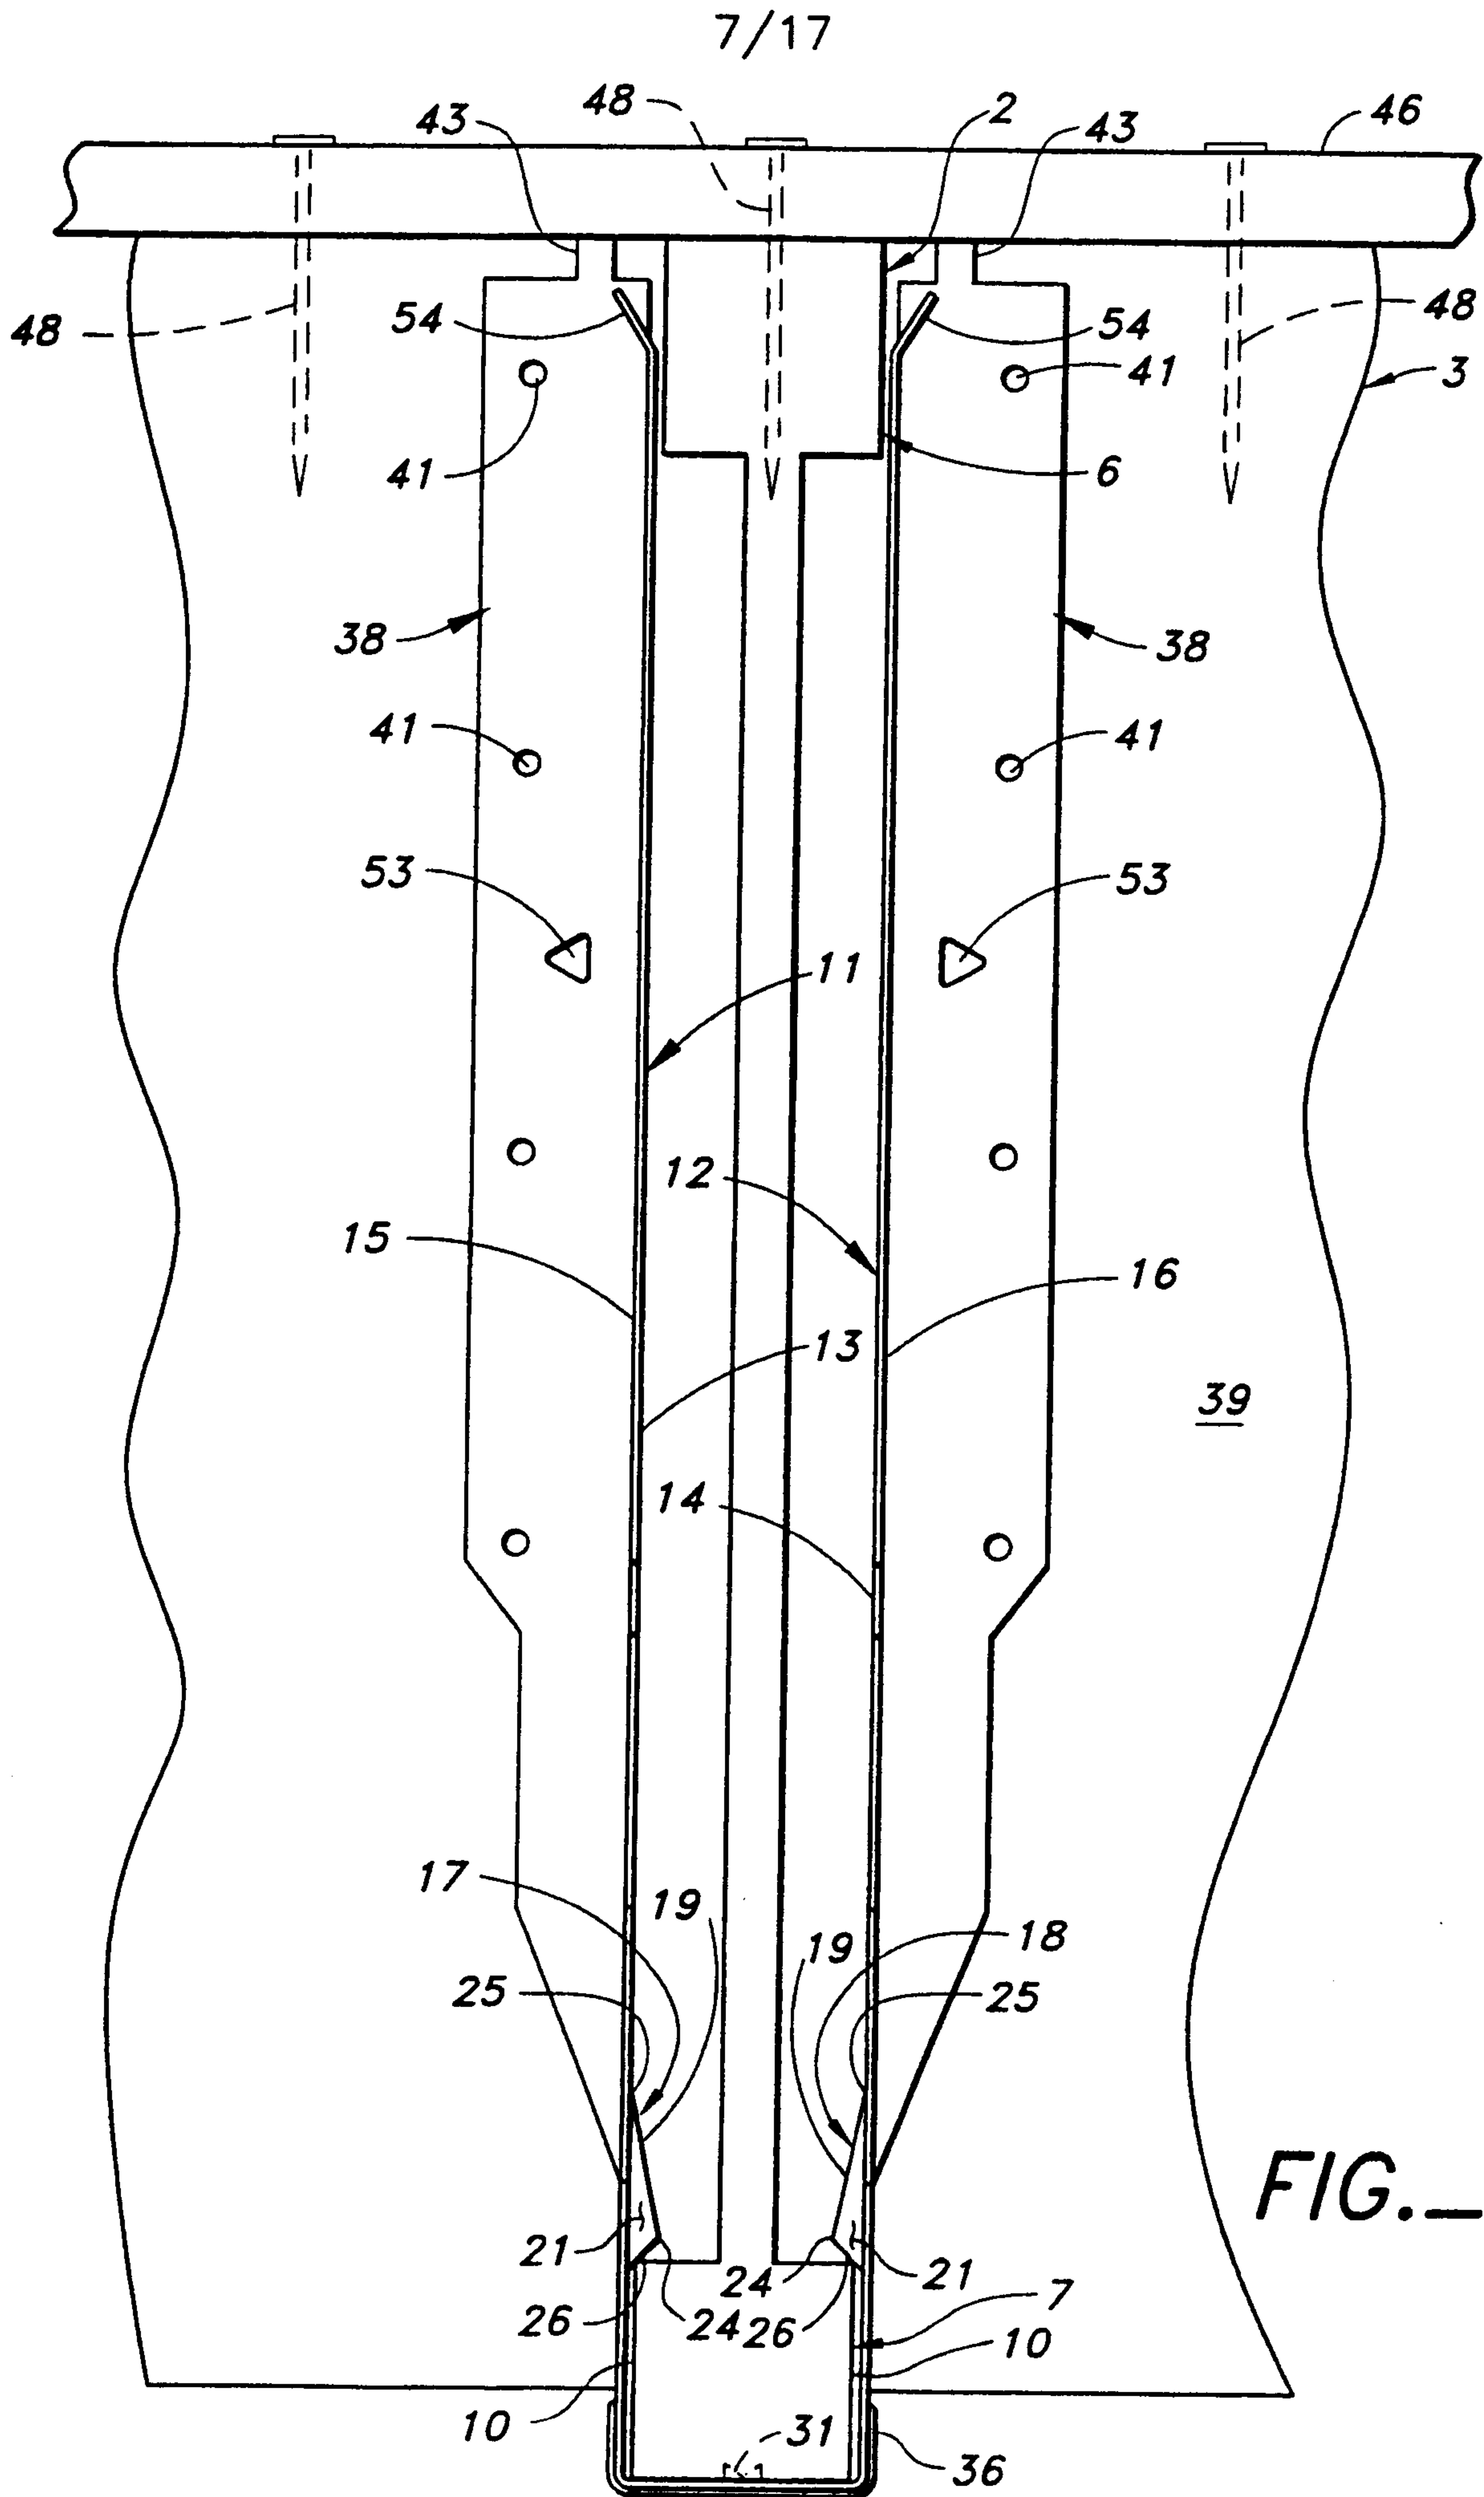

8/17


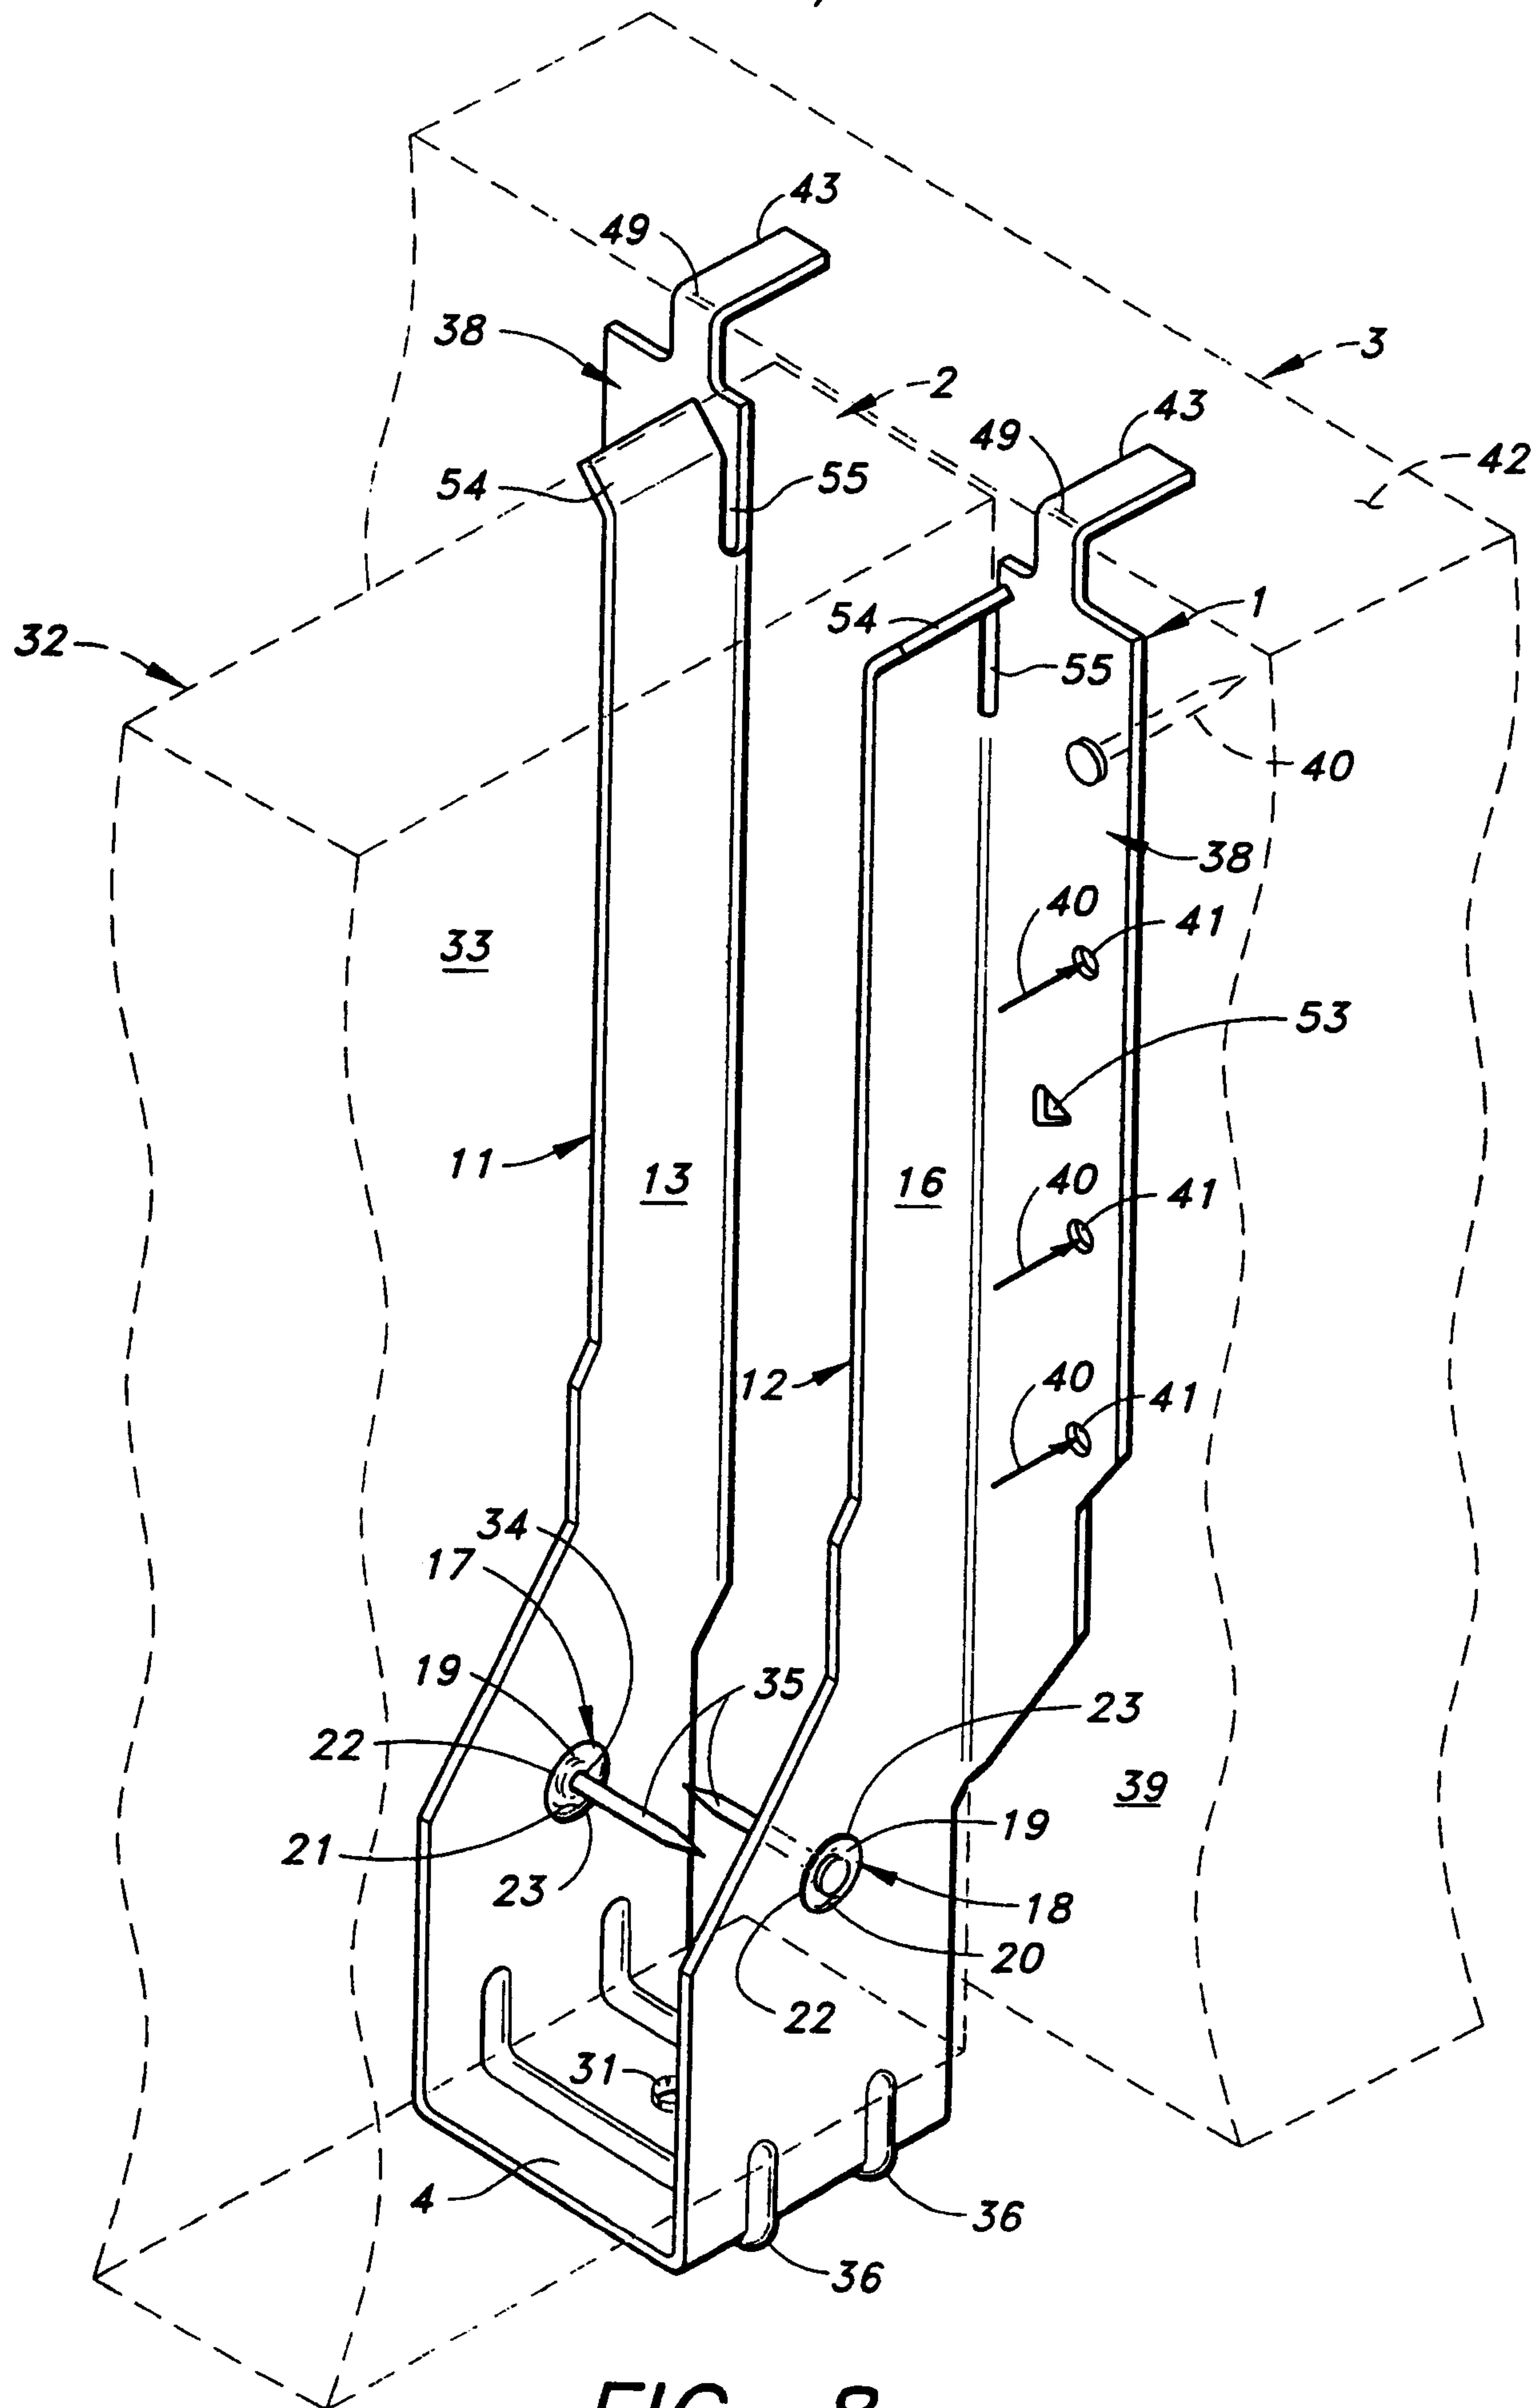


FIG. 8

9/17

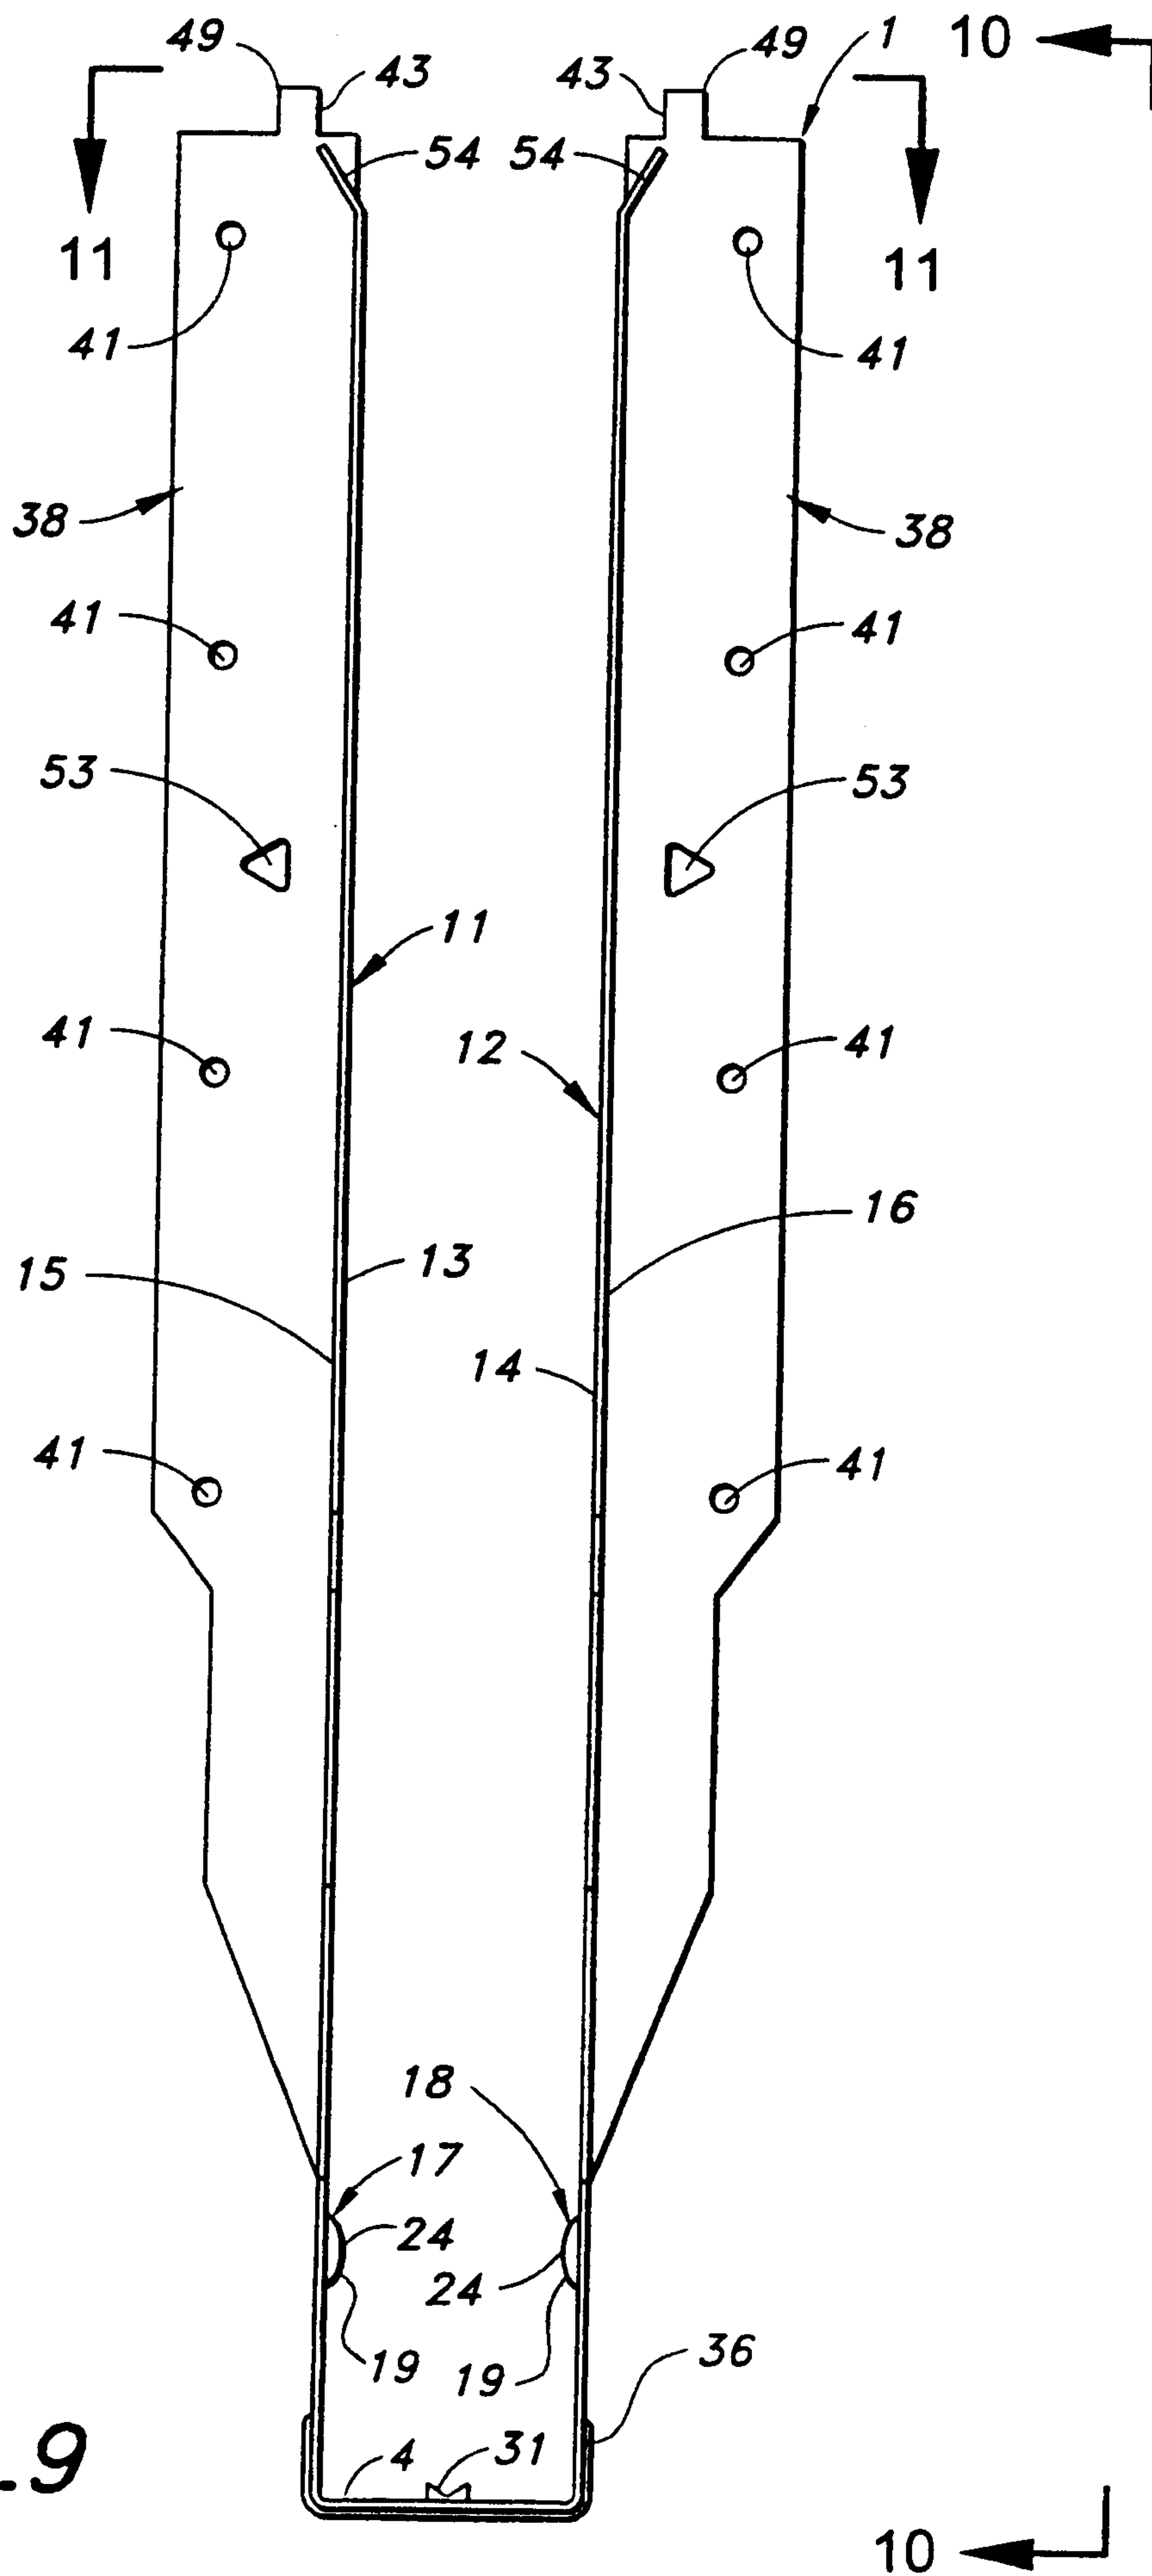

10/17





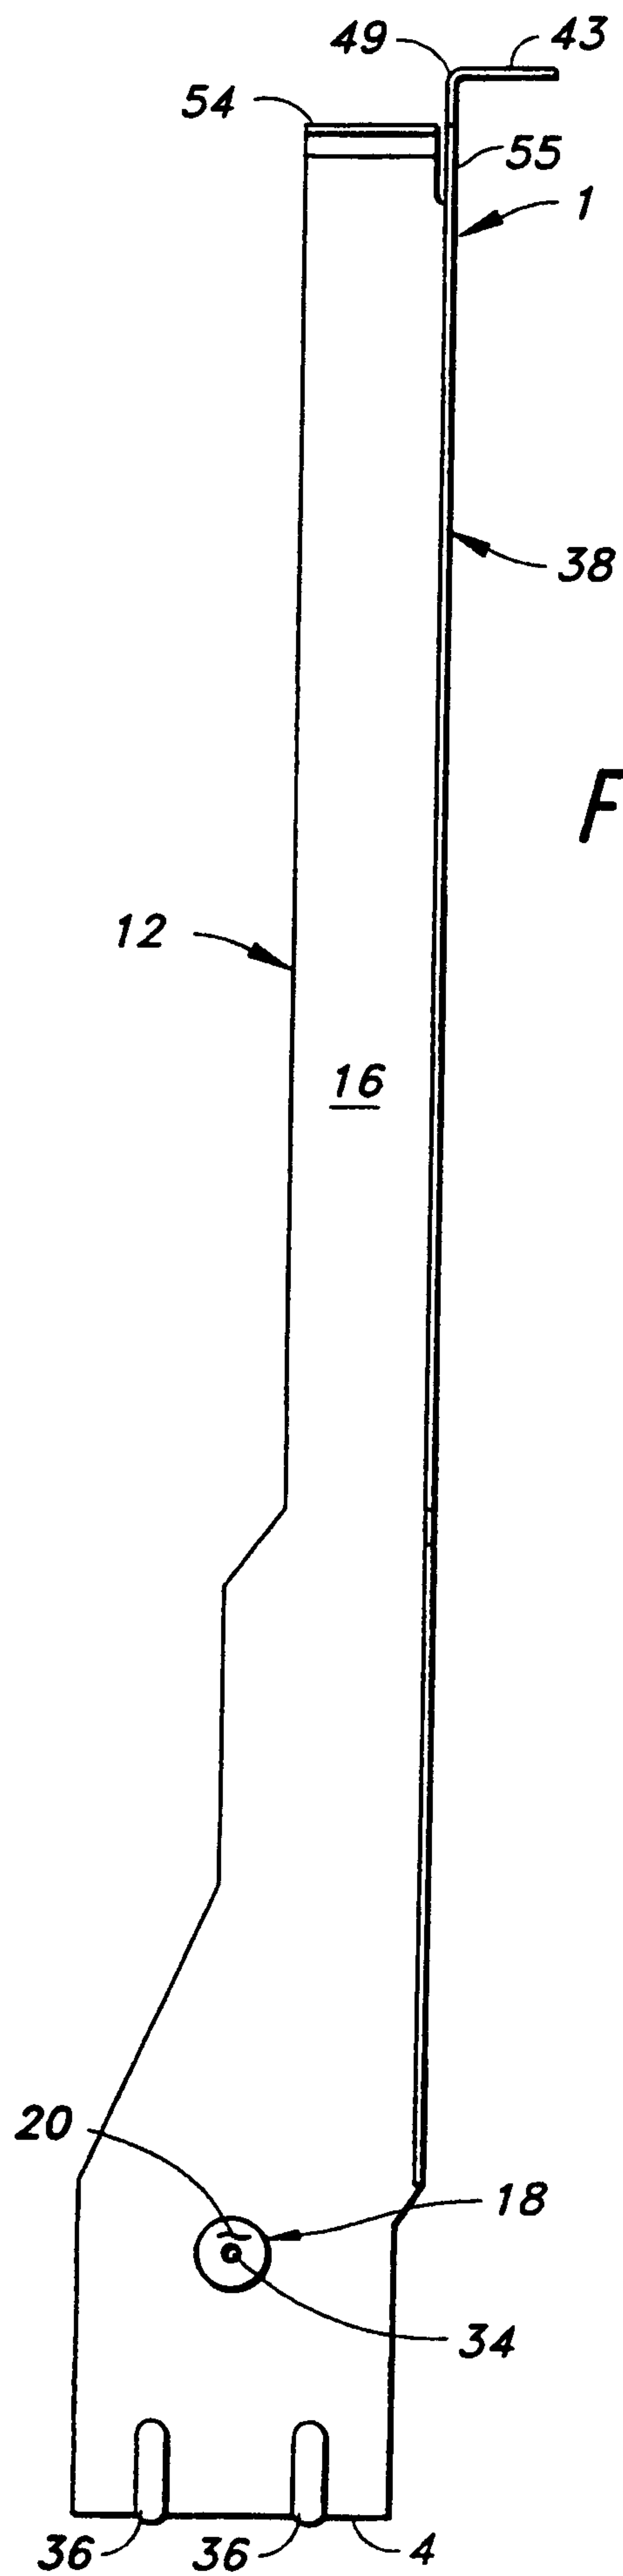
*FIG. 10**FIG. 11*

FIG. 12

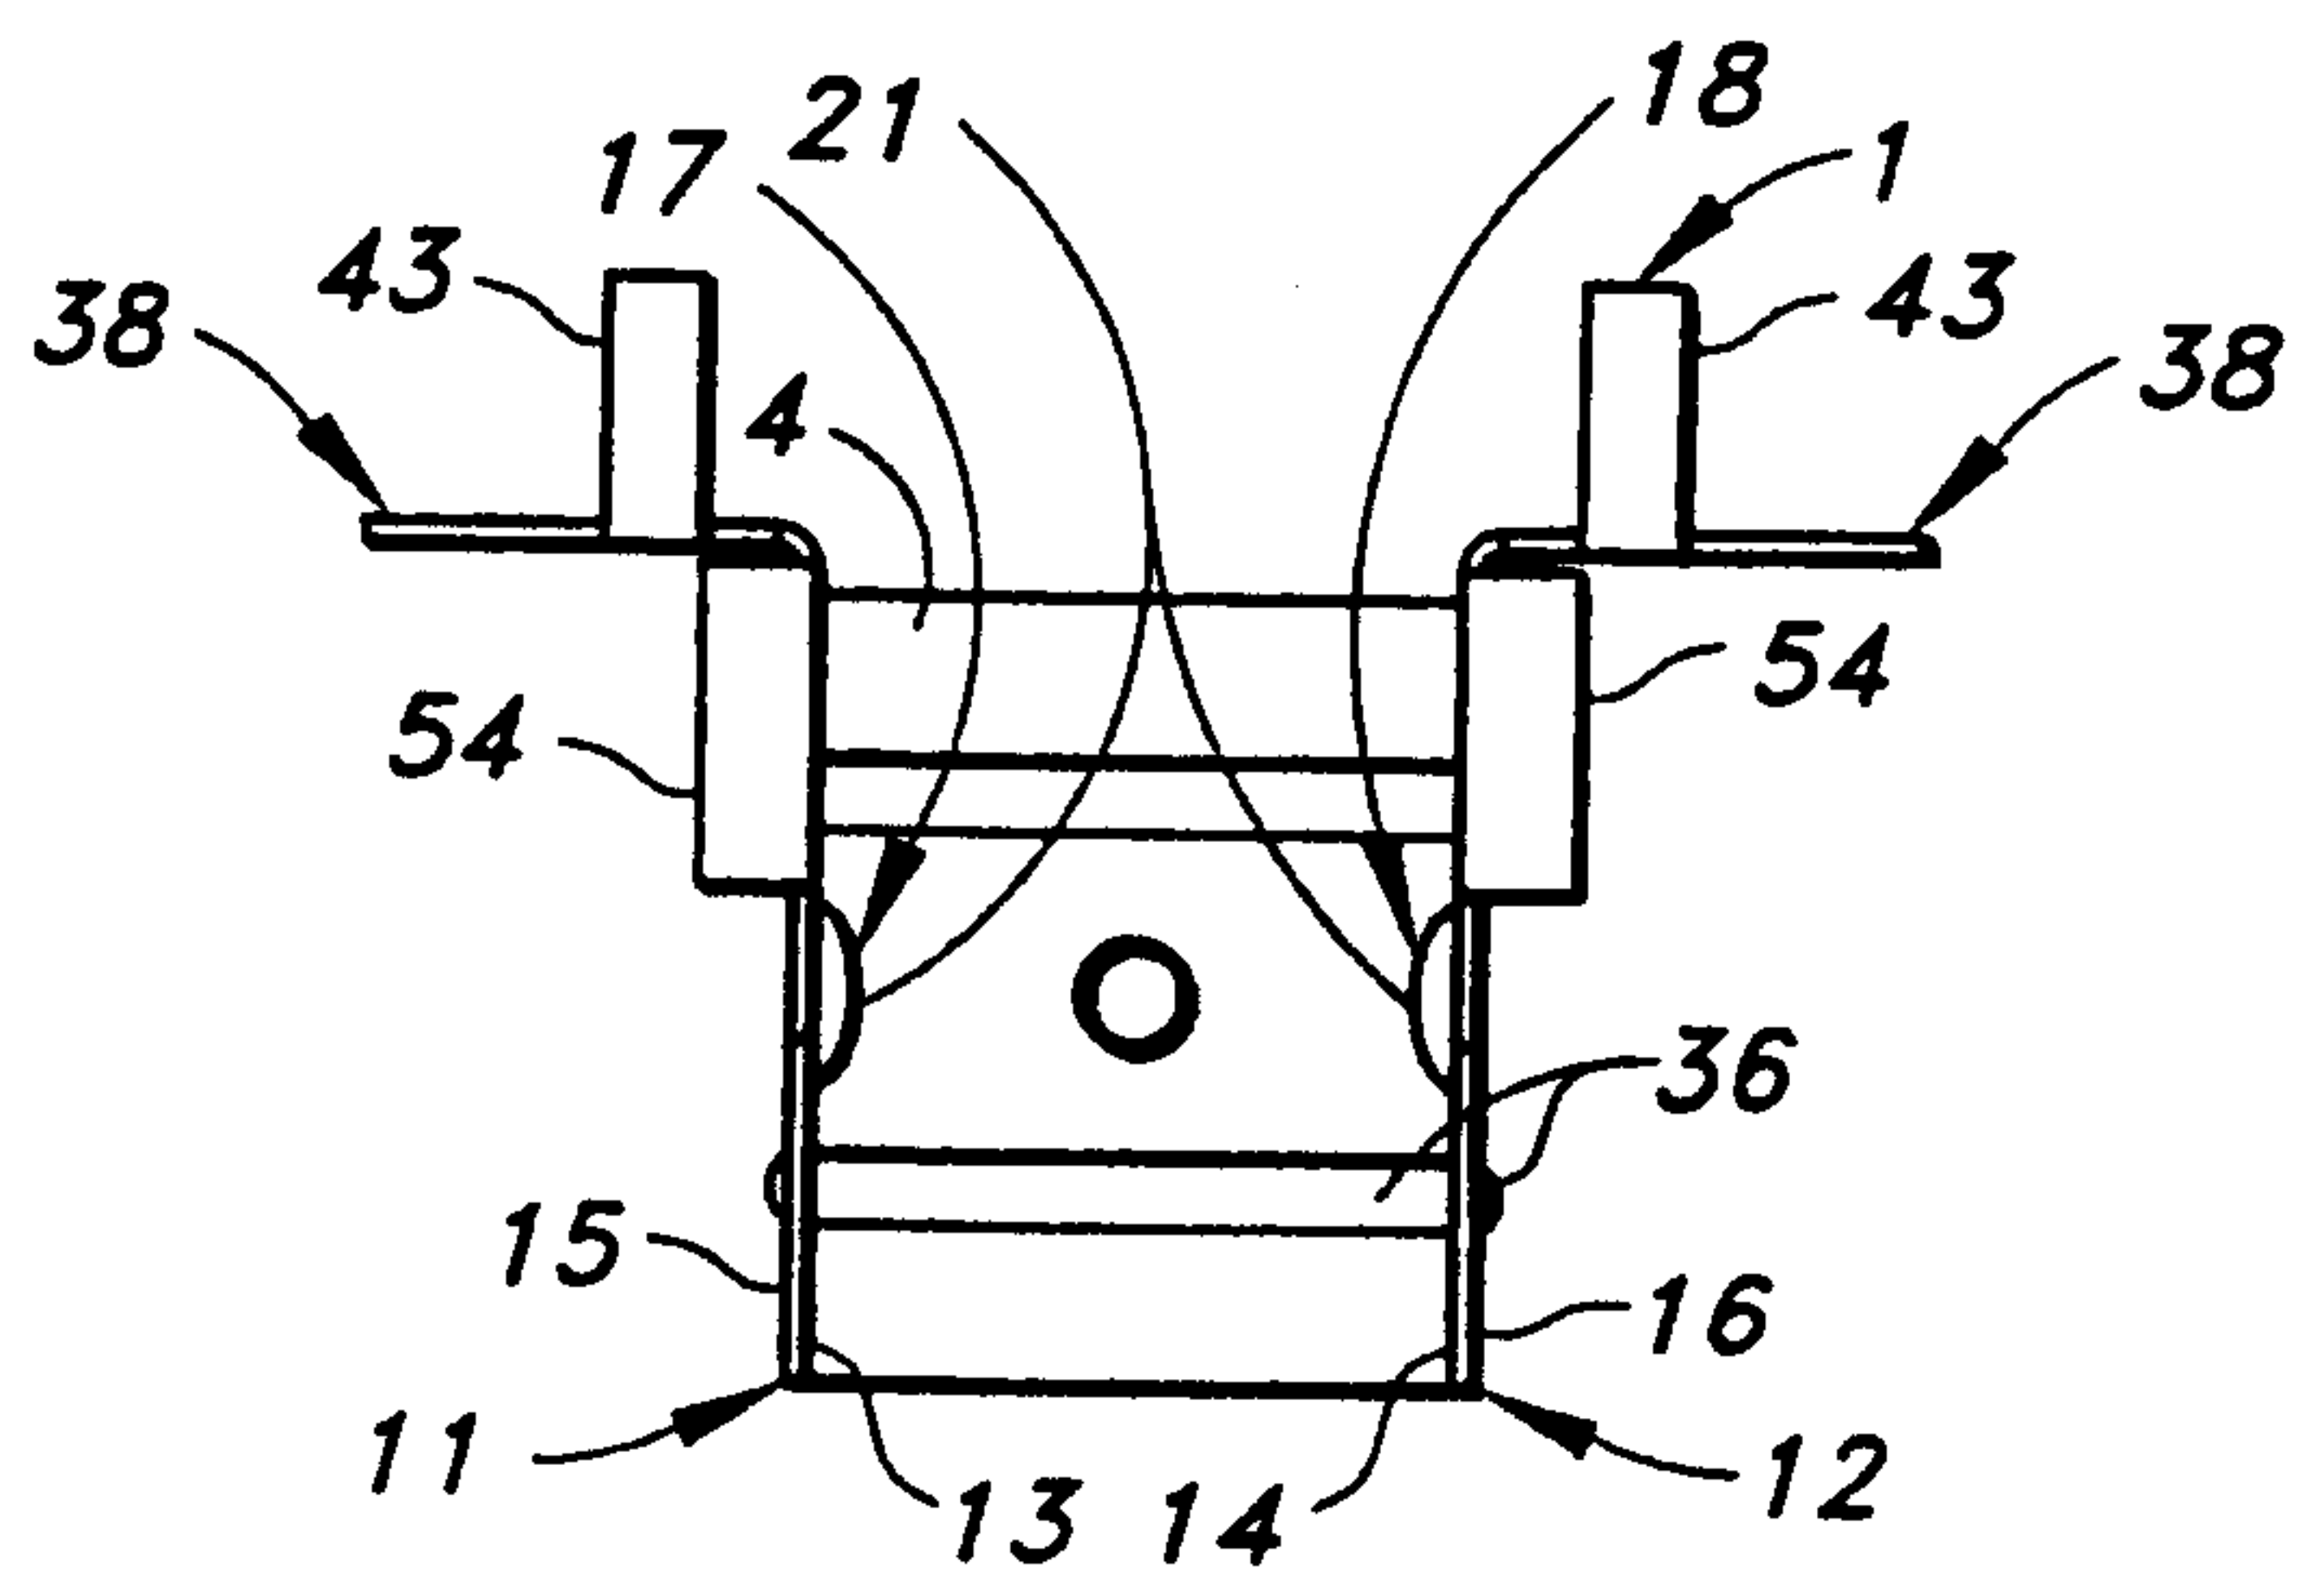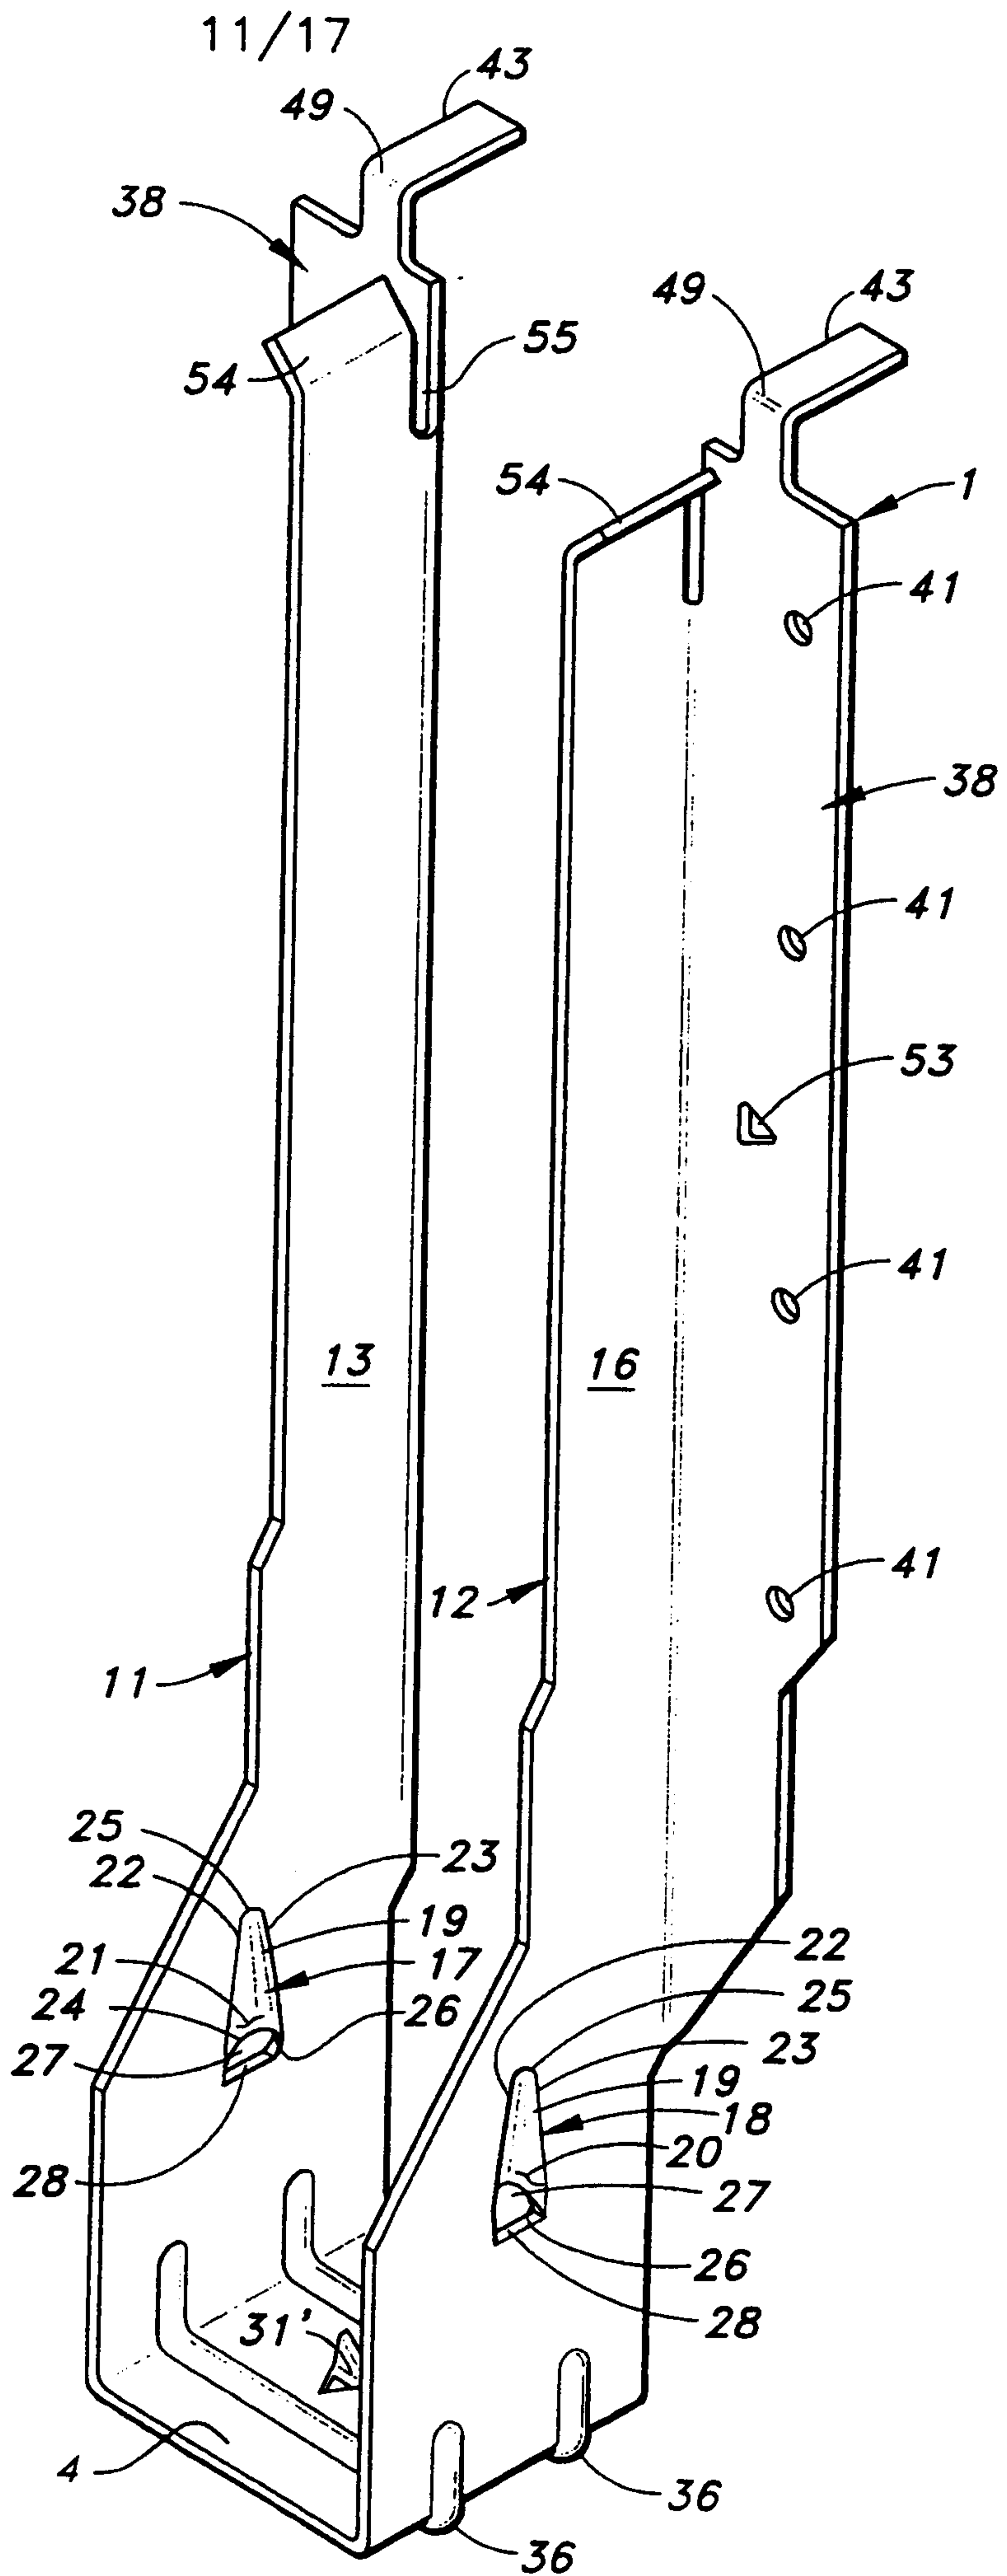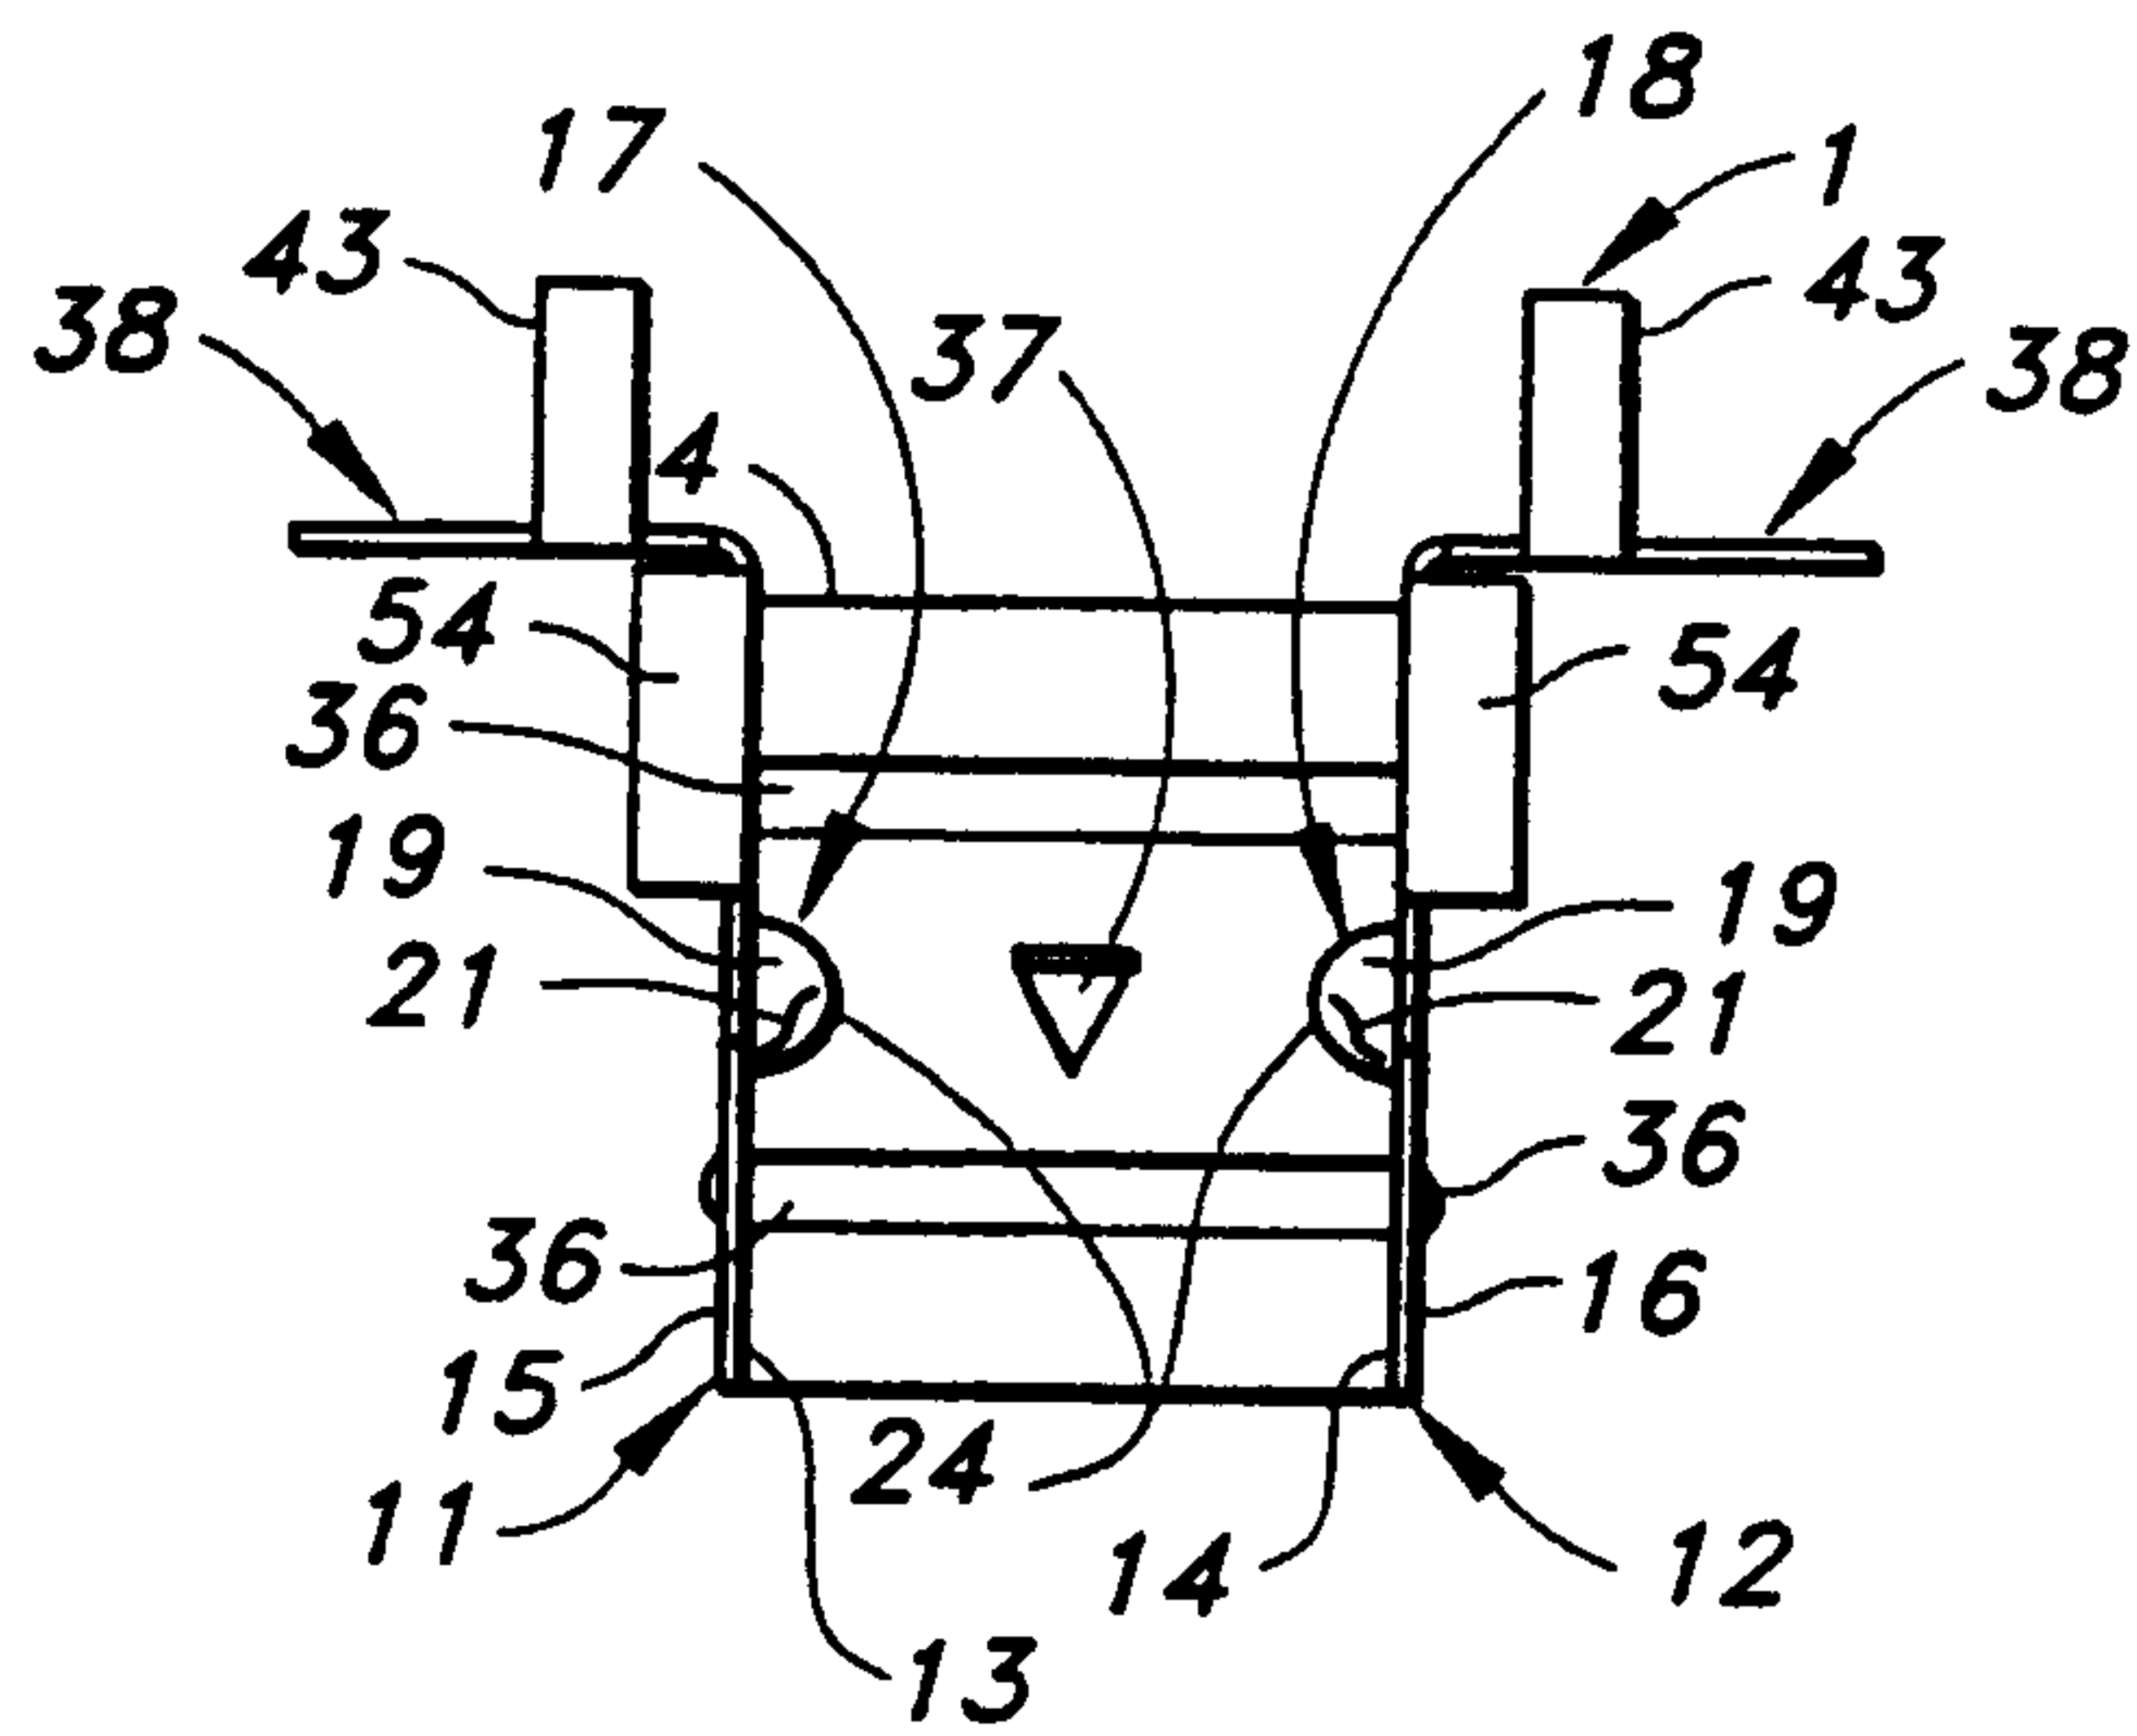


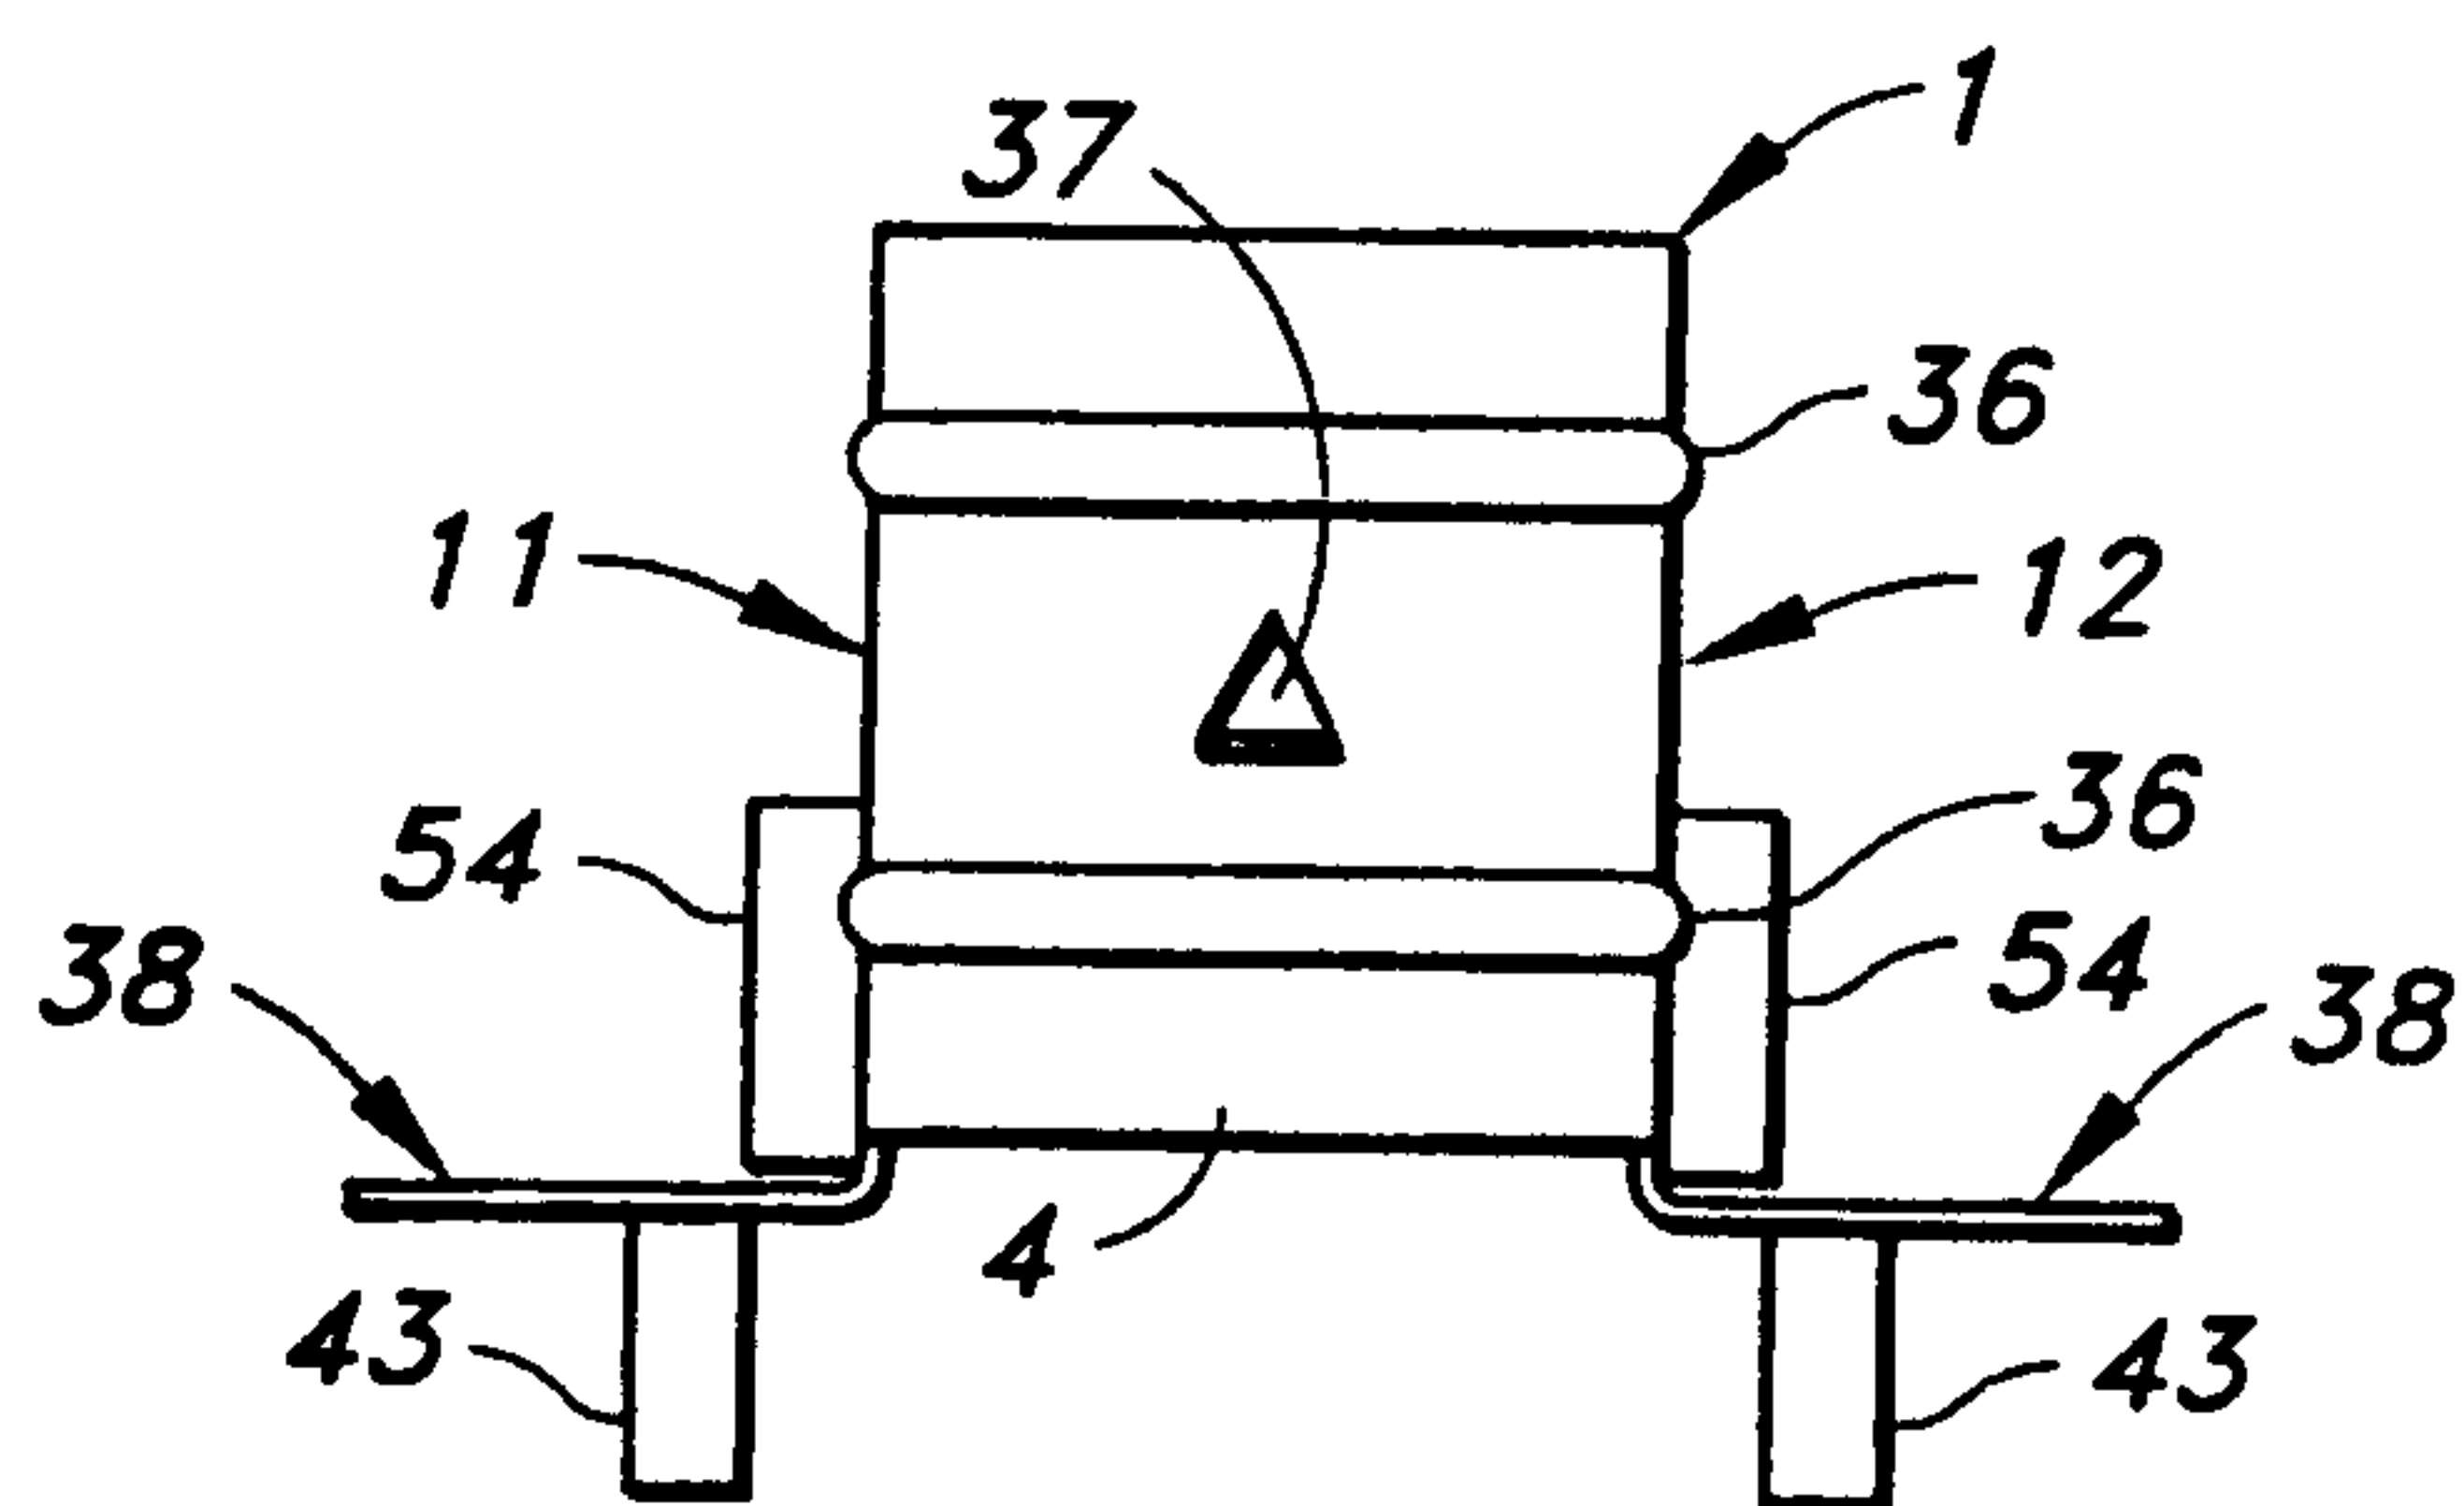


13/17

**FIG. 14****FIG. 15**

14/17

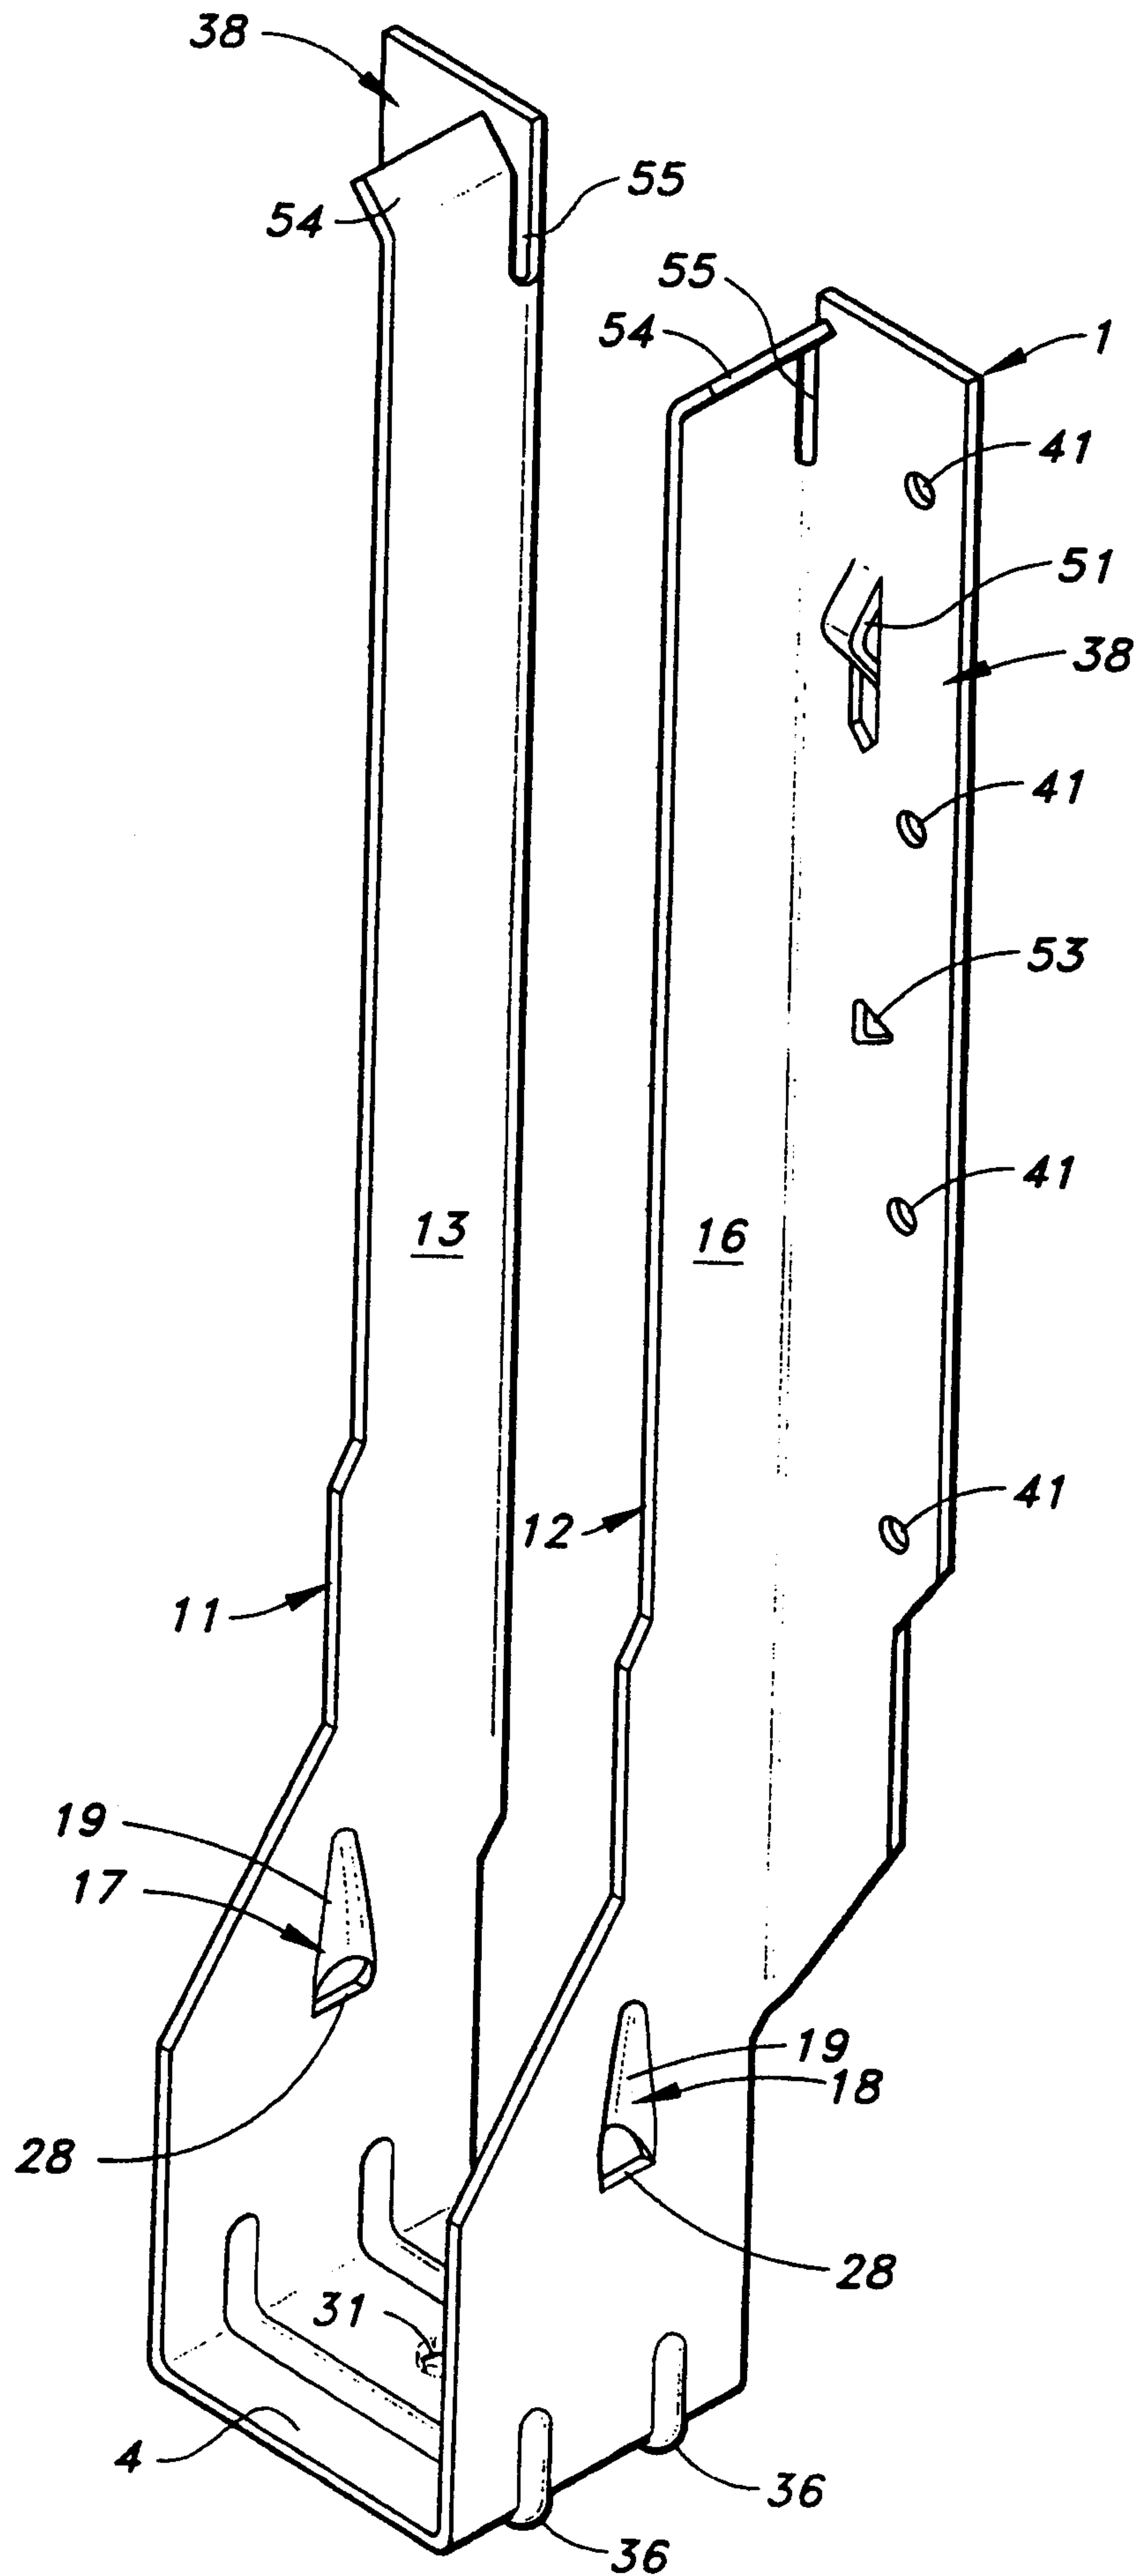

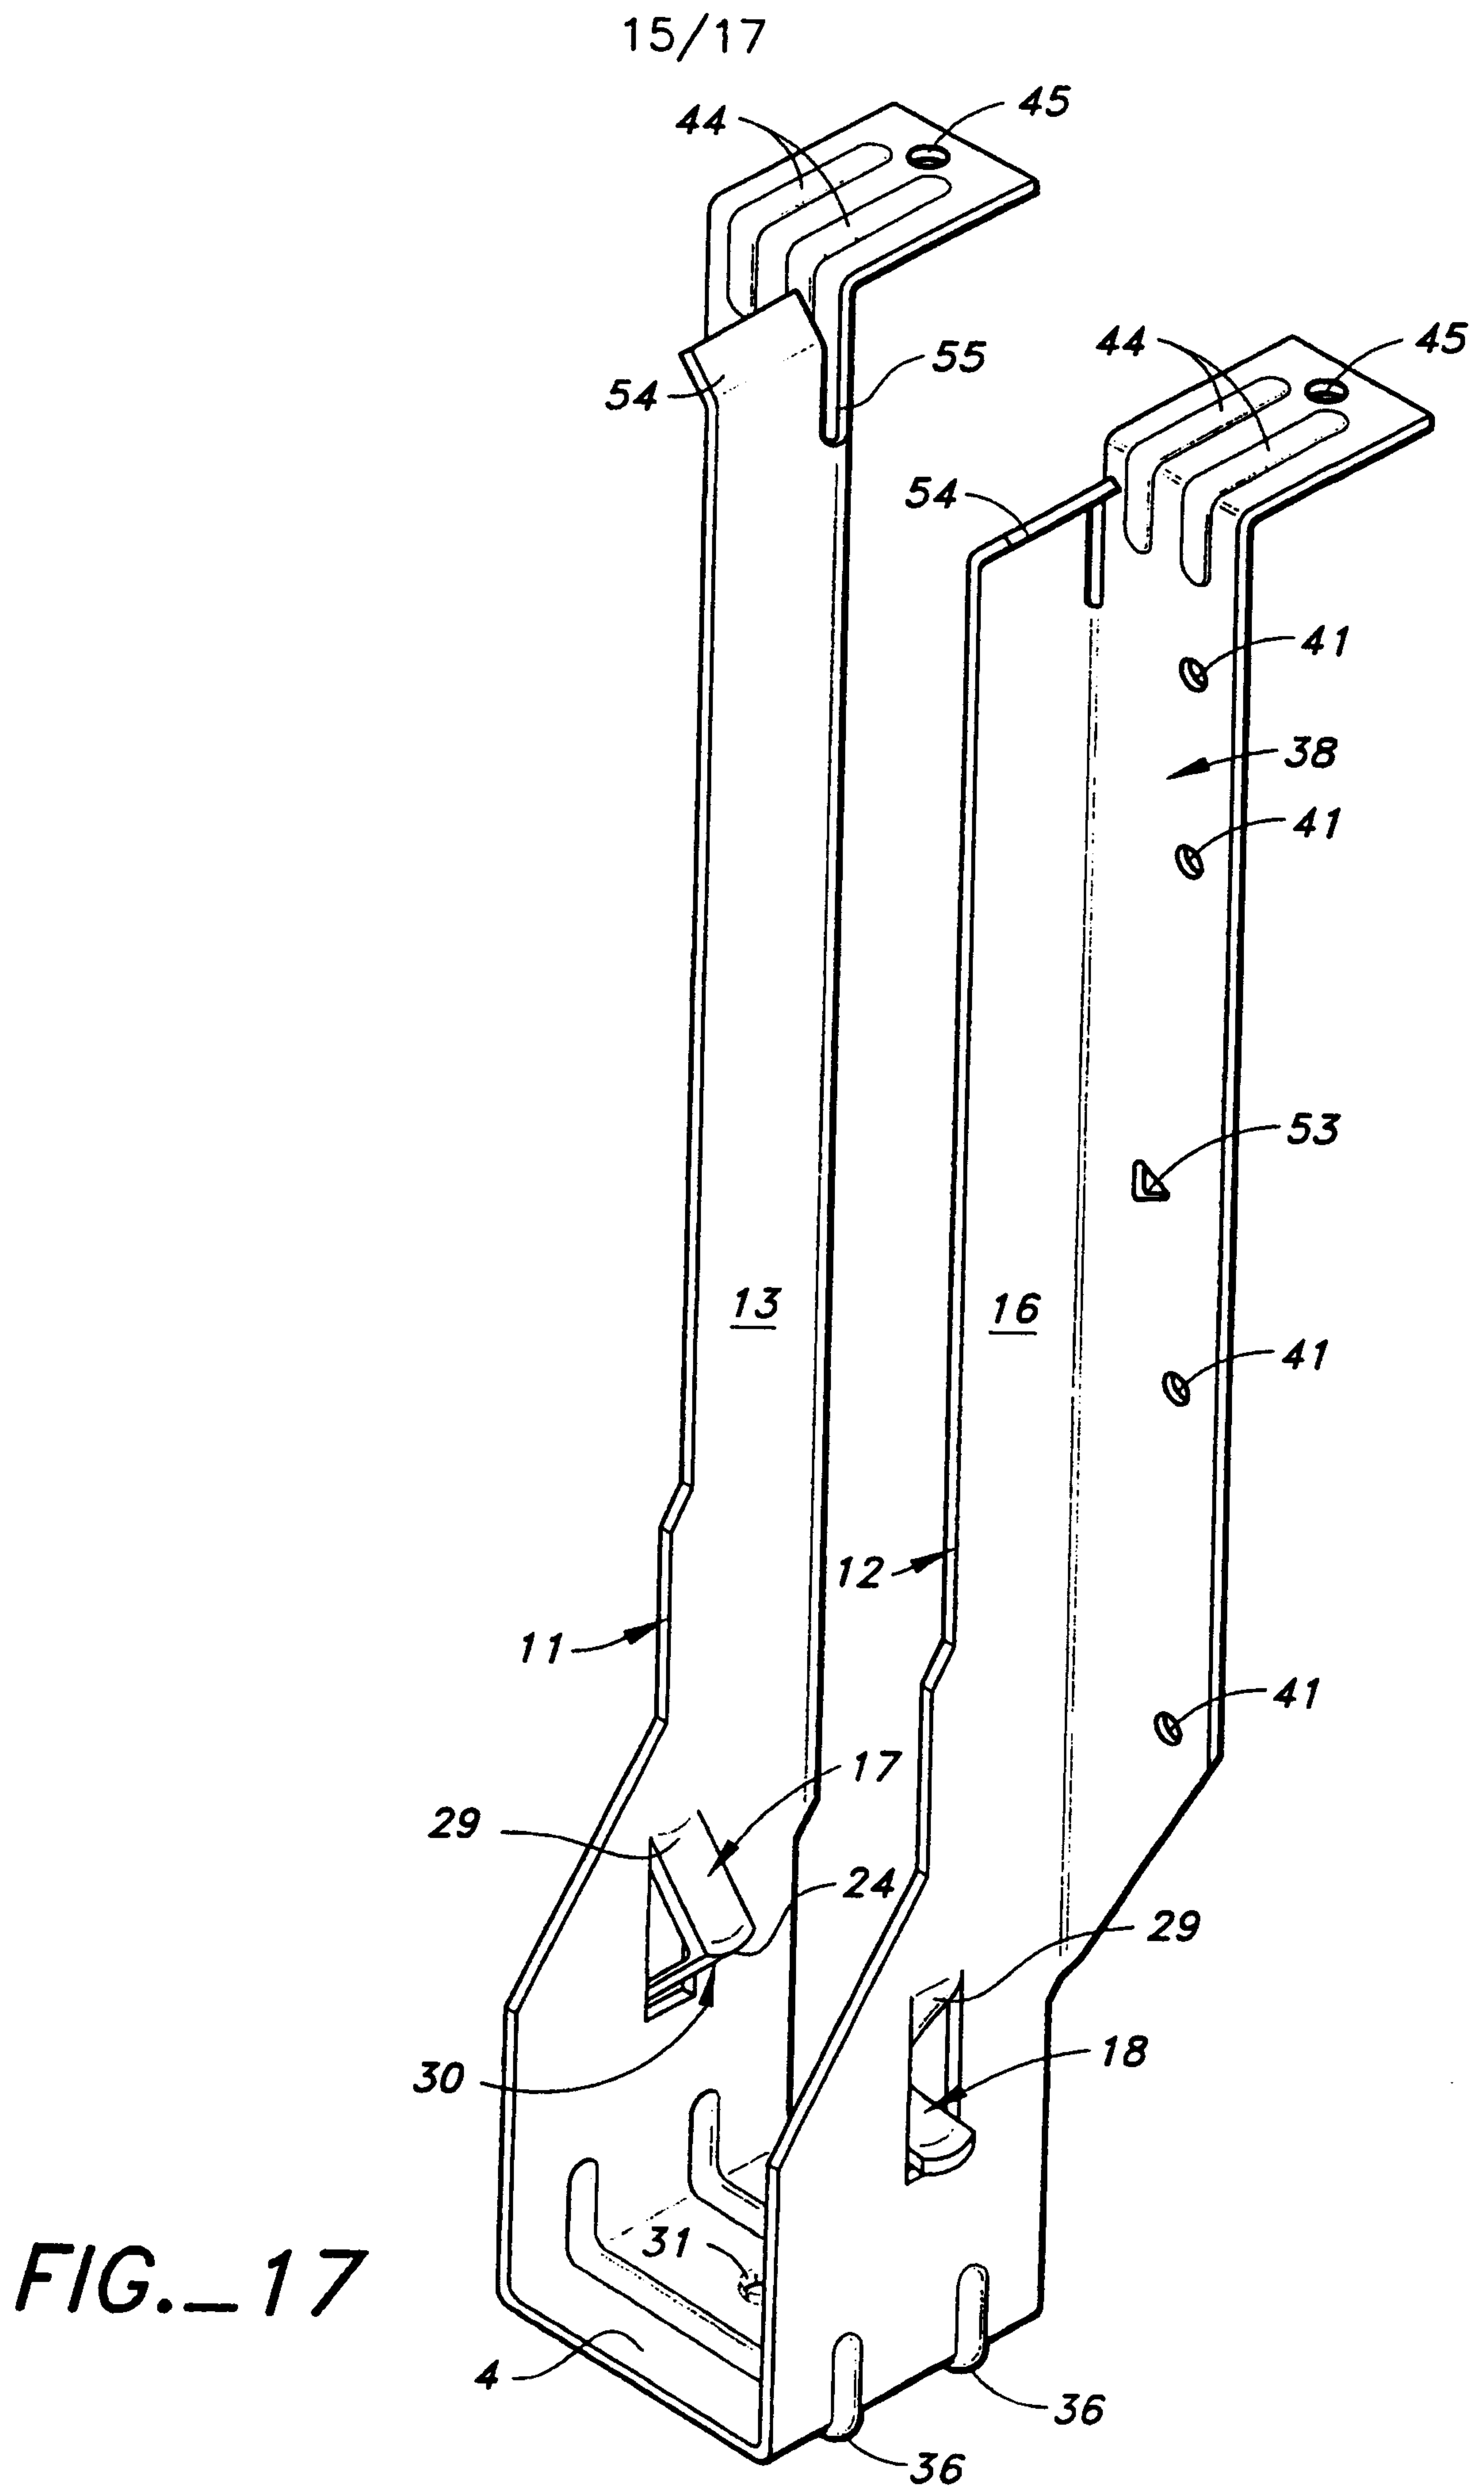

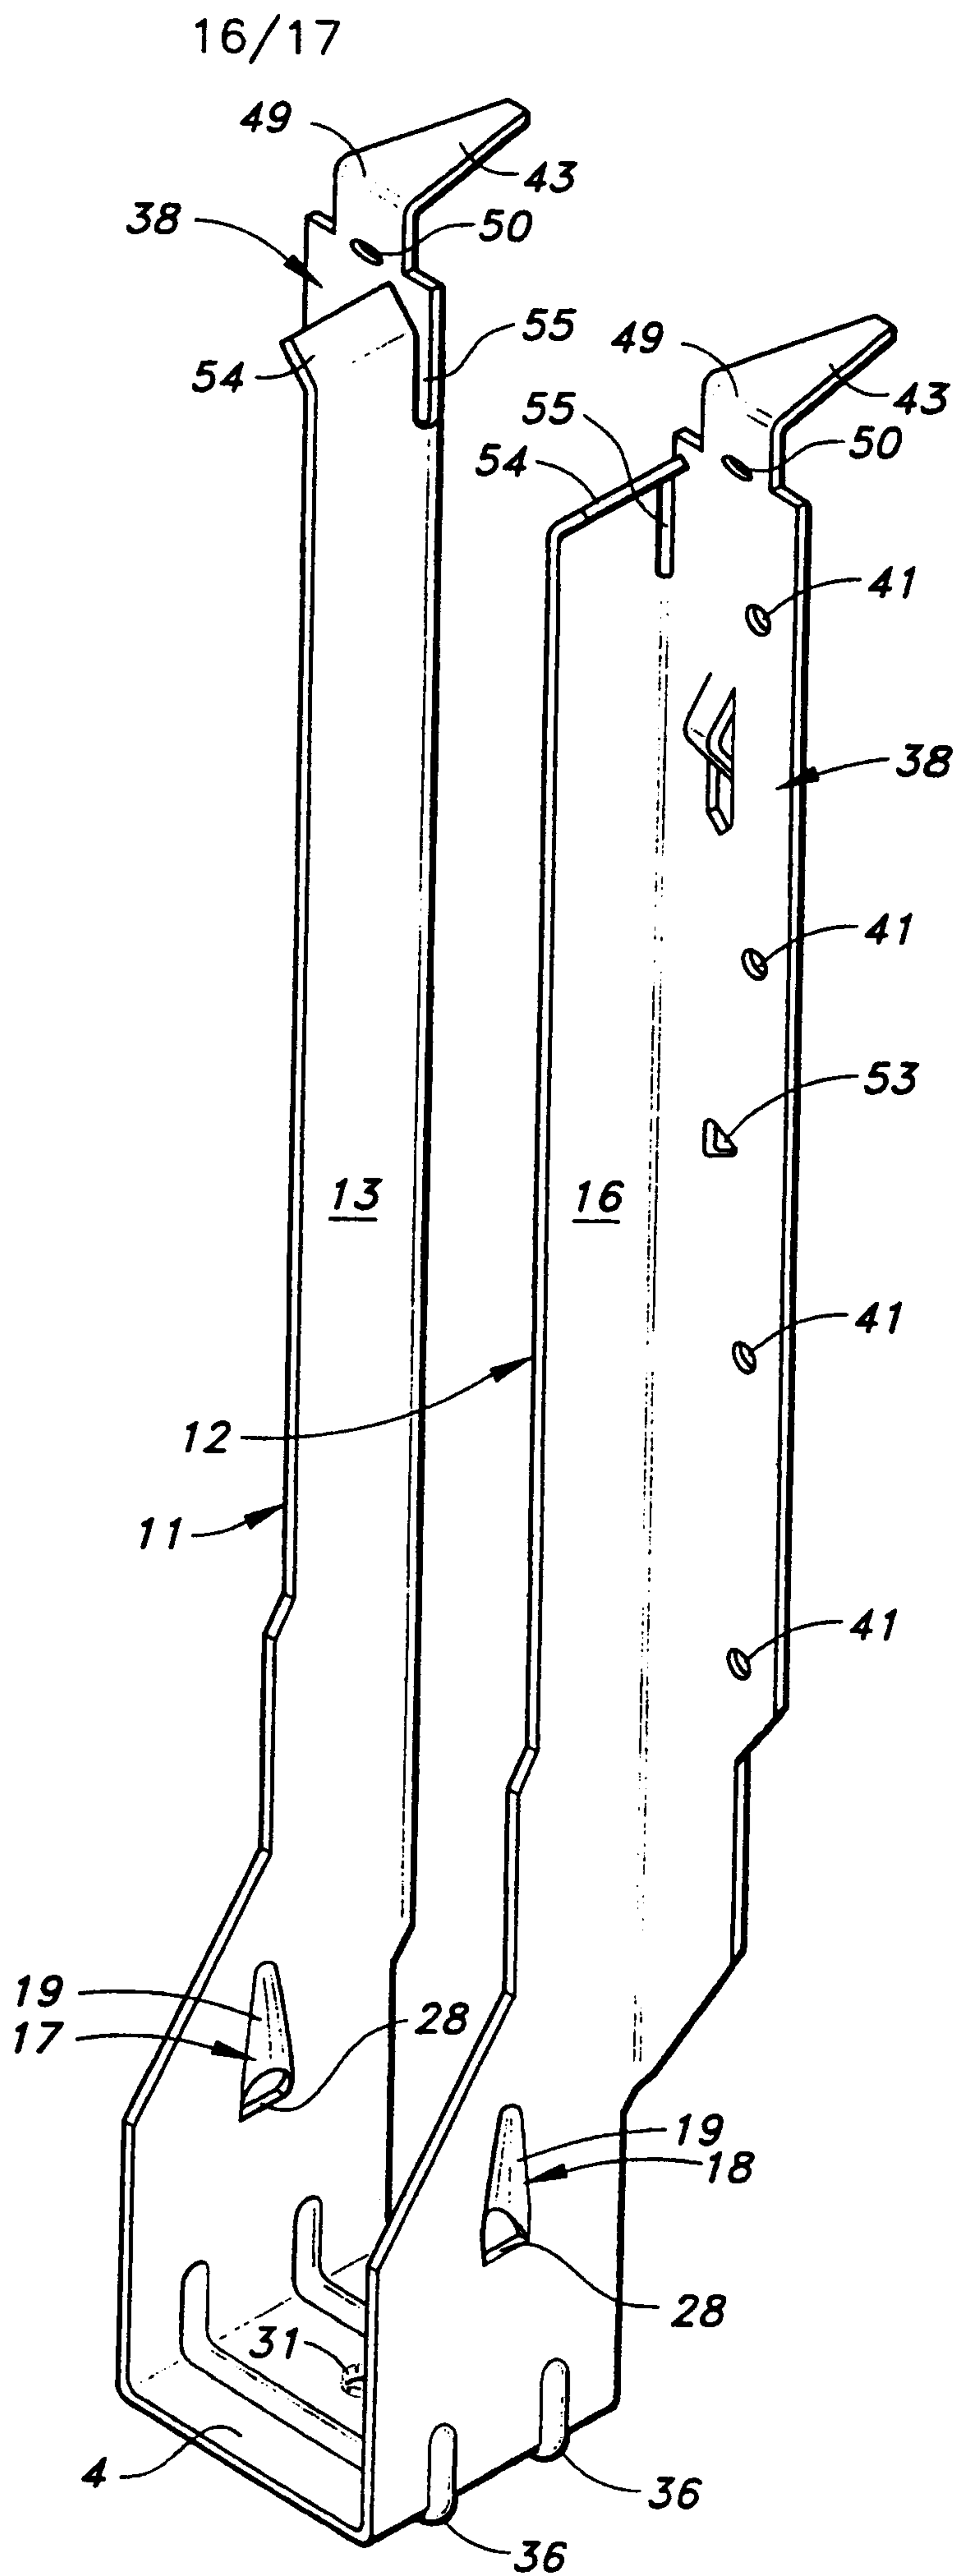


FIG. 18

17/17

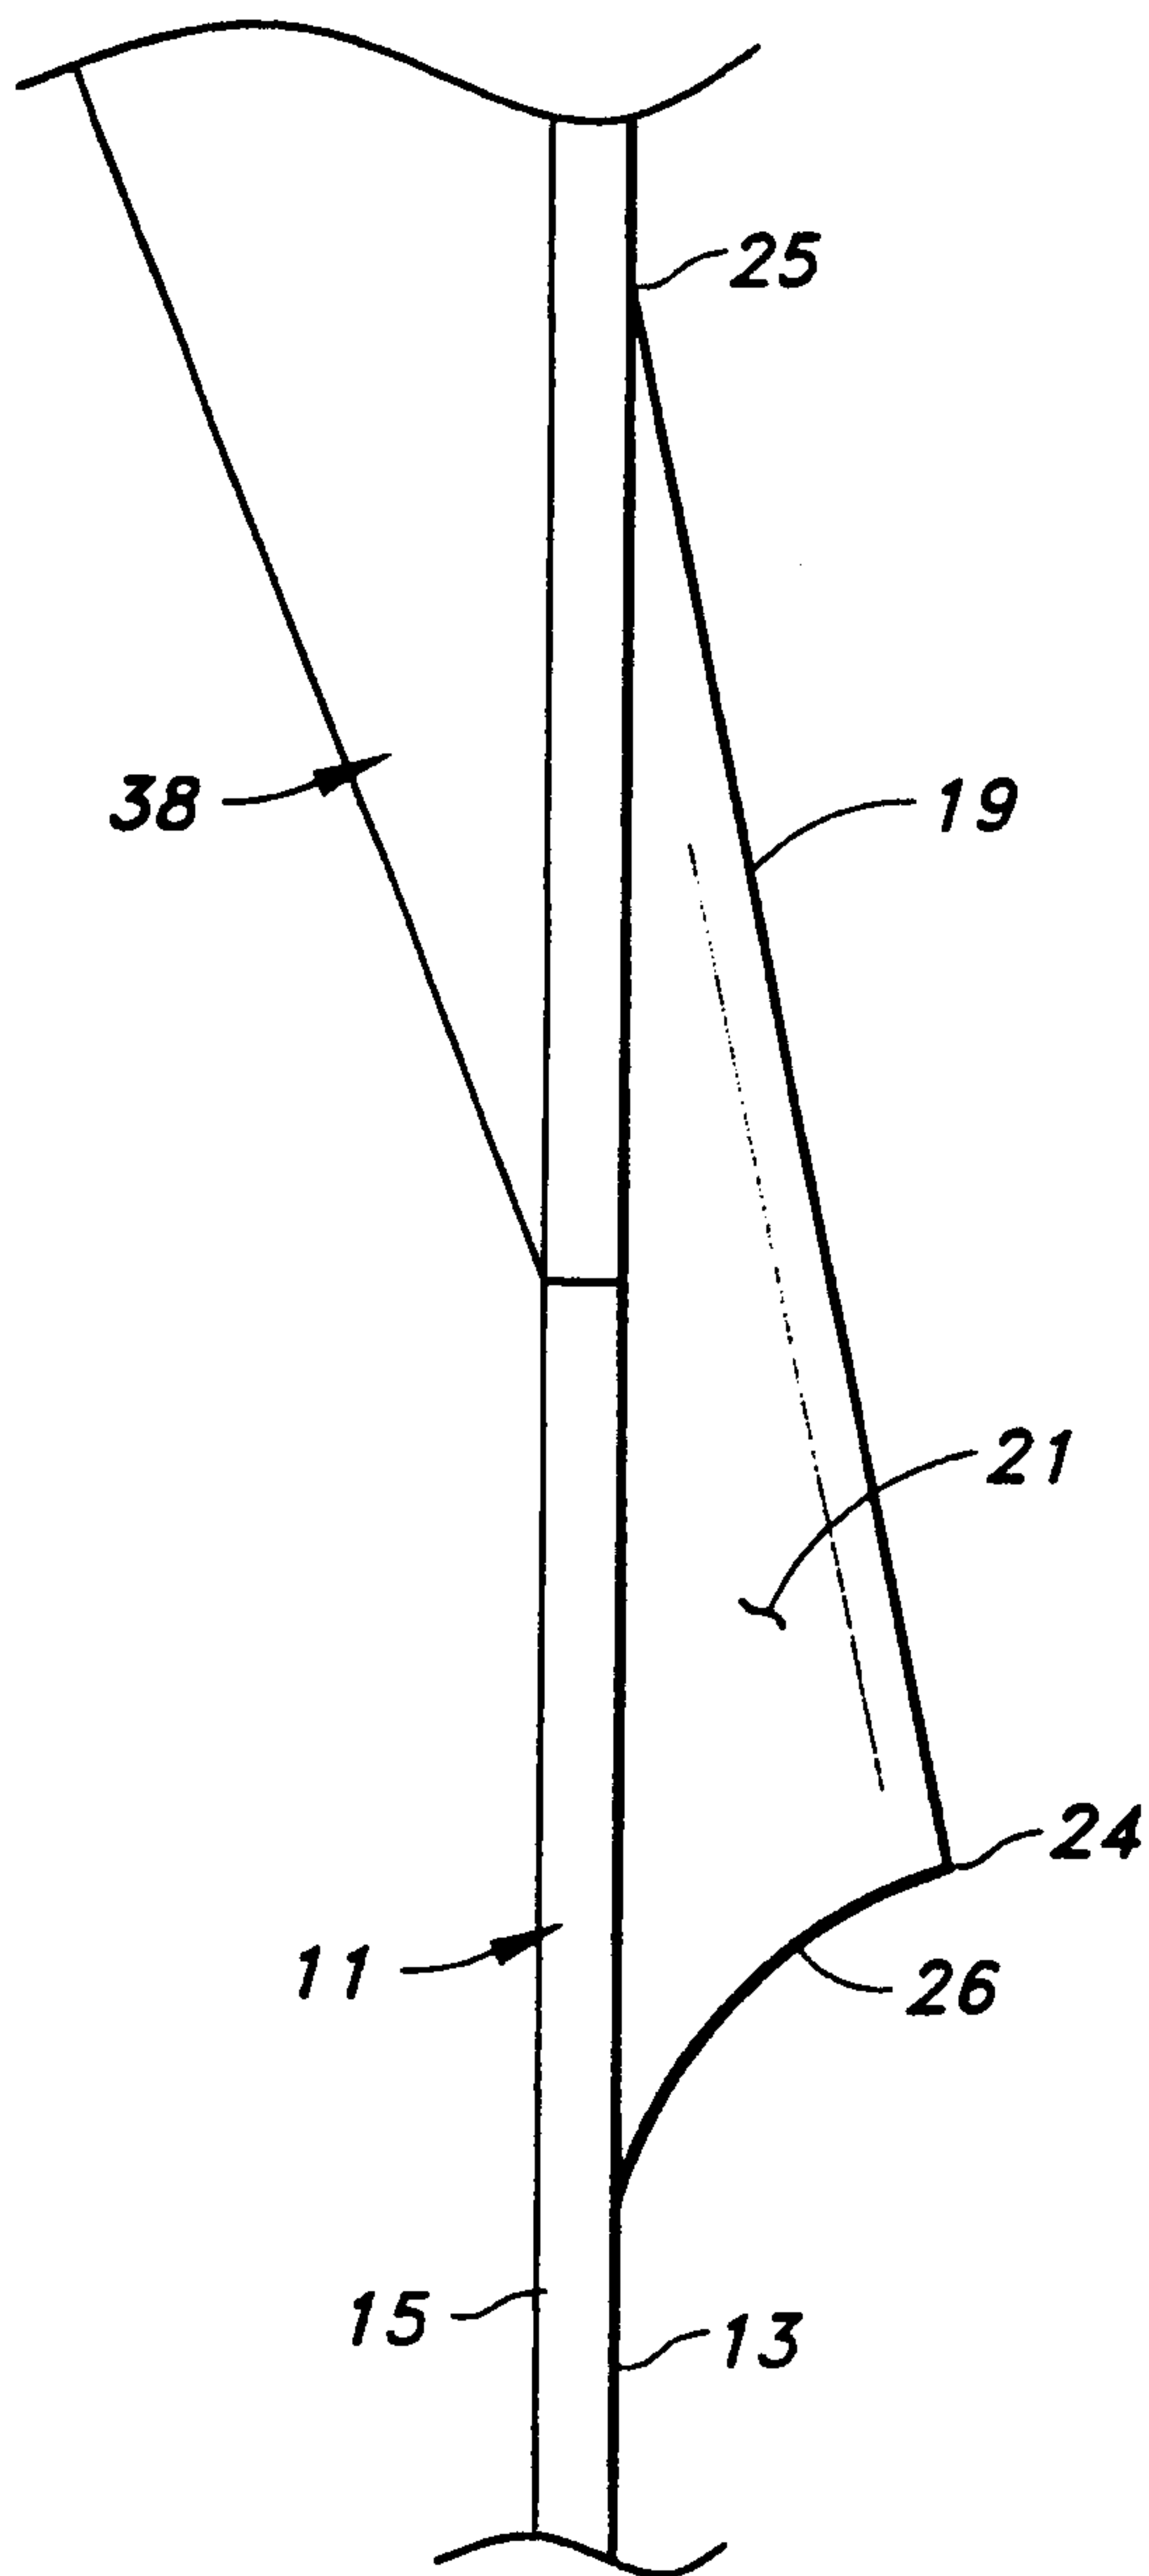


FIG. 19

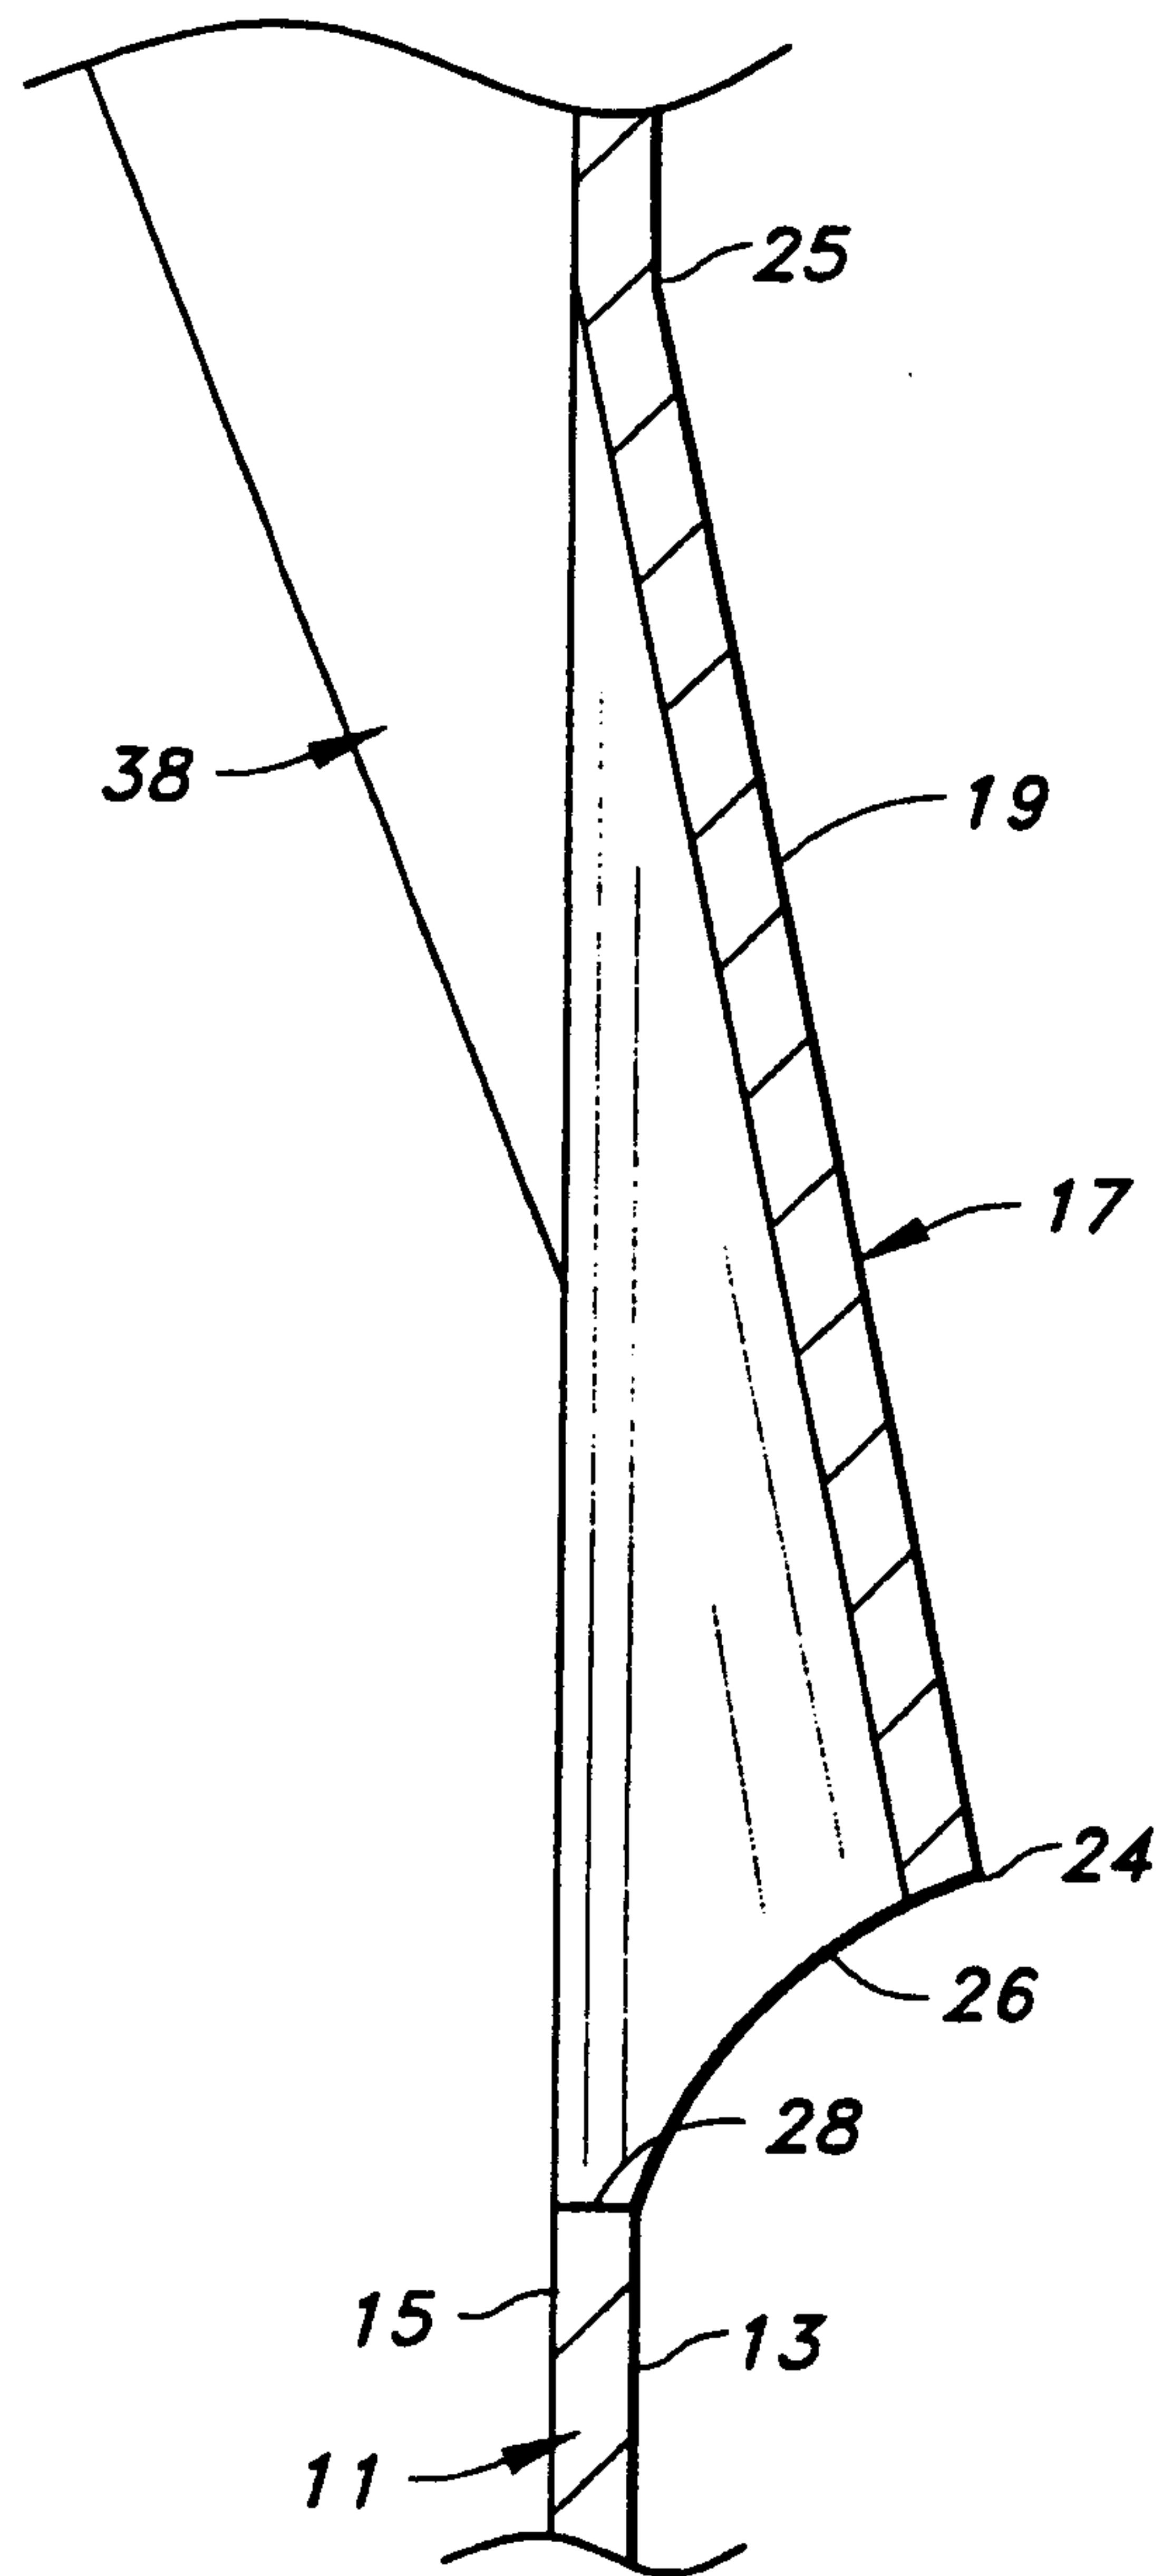


FIG. 20

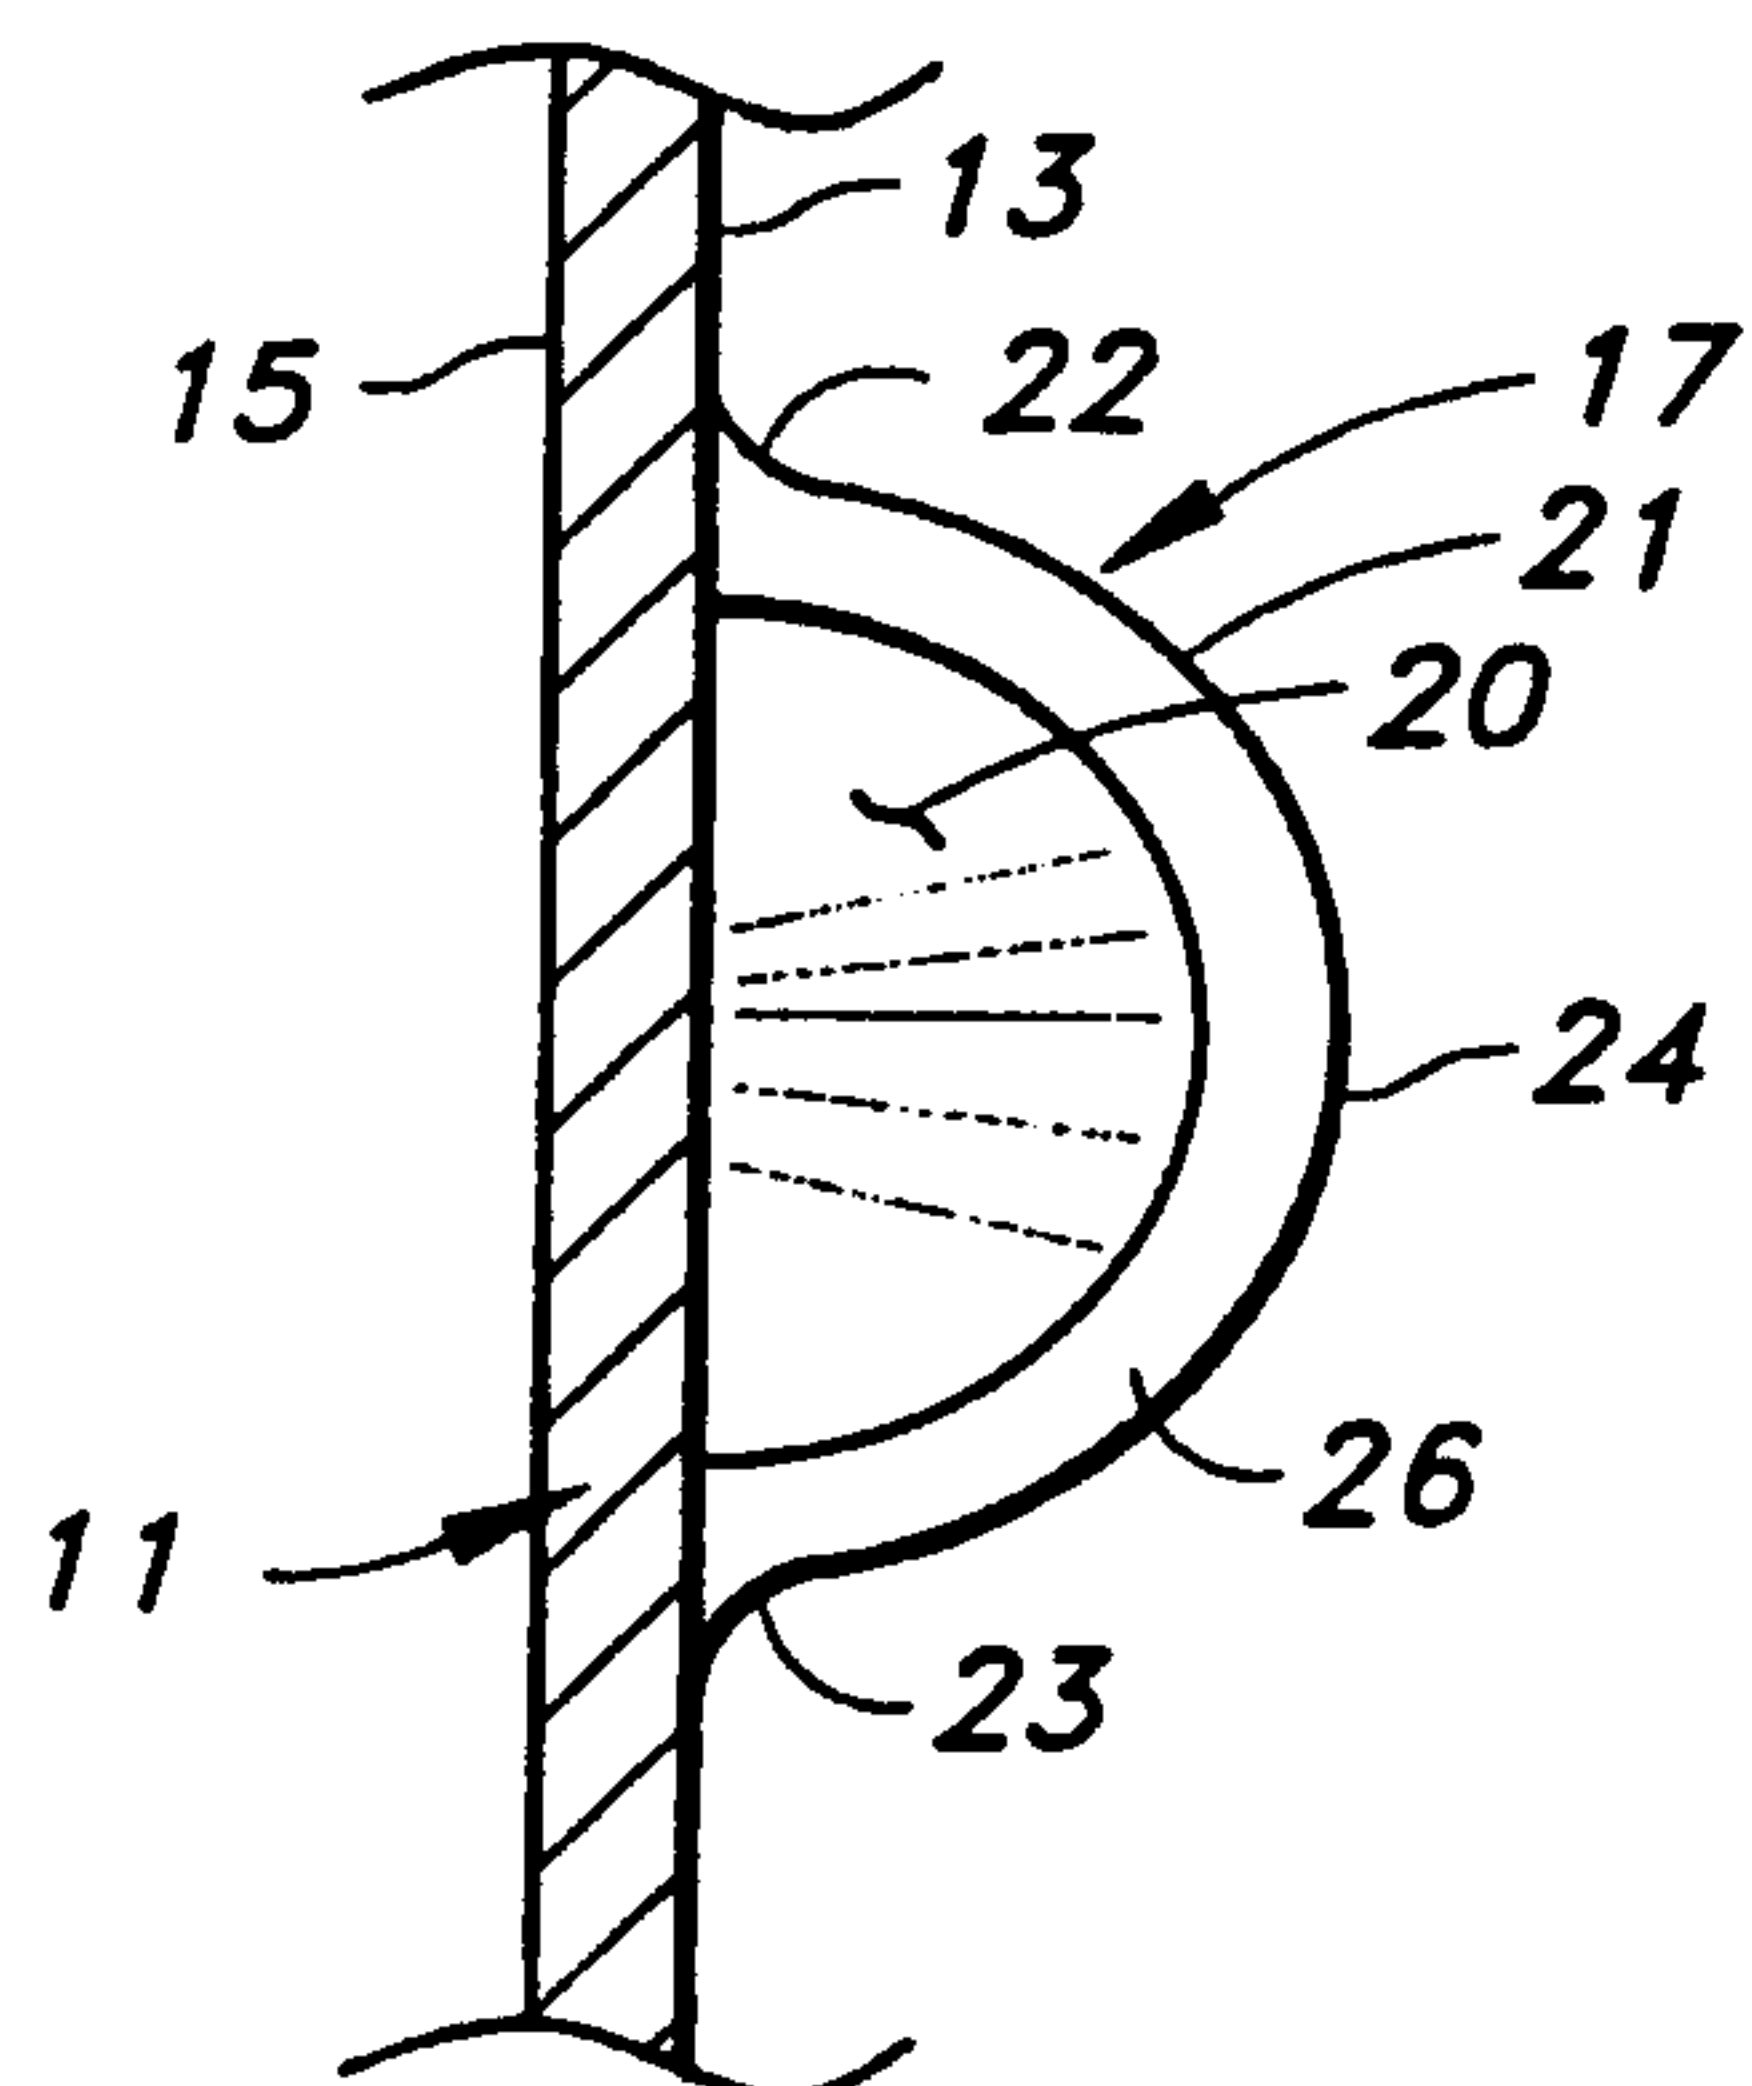


FIG. 21

