



- (51) International Patent Classification:
H01L 21/67 (2006.01)
- (21) International Application Number:
PCT/US2017/026022
- (22) International Filing Date:
4 April 2017 (04.04.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/318,202 4 April 2016 (04.04.2016) US
- (71) Applicant: **ICHOR SYSTEMS, INC.** [US/US]; 200-C
Parker Drive, Suite 600, Austin, Texas 78728 (US).
- (72) Inventors: **MELCER, Chris**; 3185 Laurelview Ct, Fremont, California 94538 (US). **BARROS, Philip Ryan**; 3185 Laurelview Ct, Fremont, California 94538 (US). **KUBOTA, Haruyuki**; 3185 Laurelview Ct, Fremont, California 94538 (US). **TREUR, Randolph**; 3185 Laurelview Ct, Fremont, California 94538 (US). **CUSHMAN, Todd**; 3185 Laurelview Ct, Fremont, California 94538 (US). **MULLIGAN, Greg Patrick**; 3185 Laurelview Ct, Fremont, California 94538 (US).
- (74) Agent: **GRINER, David**; 651 N. US Hwy 183, Suite 335-118, Leander, Texas 78641 (US).
- (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: LIQUID DELIVERY SYSTEM

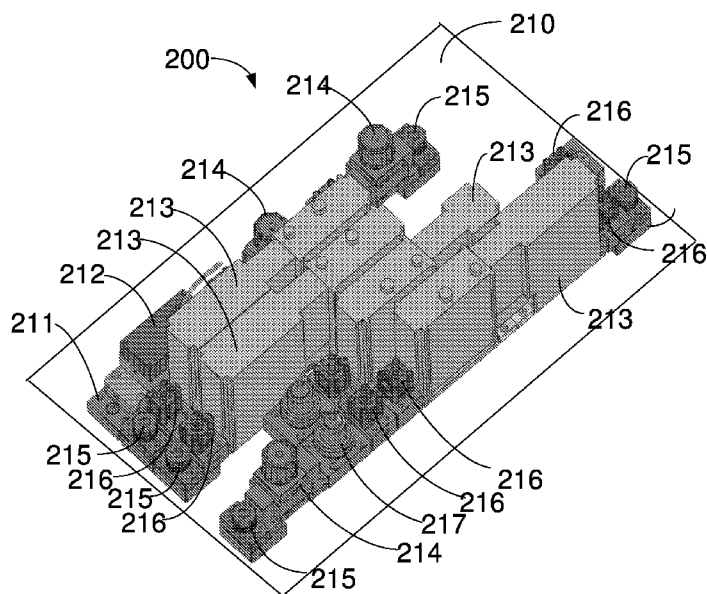


FIG. 2

(57) Abstract: A modular system for enabling a distribution of liquid chemicals comprising a substrate block that includes at least two ports formed in a first major surface of the block and a fluid passageway extending between the two ports. The fluid pathway is preferably a smooth, seamless path where the entire volume of the fluid pathway is directly in line with the desired fluid flow so that fluid flow completely sweeps the entire flow passageway and there are no dead volumes or areas of entrapment in said fluid passageway. A substrate block can be formed from a fluoropolymer using a novel composition and manufacturing process. A sealing assembly is provided that uses a combination of a replaceable insert-type seal with a tongue and groove seal formed into the modular components.



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

LIQUID DELIVERY SYSTEM

[0001] The present application claims priority from U.S. Provisional Patent Application Serial No. 62/318,202, filed April 4, 2016, entitled “LIQUID DELIVERY SYSTEM” by Chris Melcer et al., which is incorporated by reference herein in its entirety.

Technical Field of the Invention

[0002] The present invention is directed to liquid chemical delivery systems, and more particularly to a modular tubeless liquid chemical delivery systems having a substantially reduced footprint.

Background of the Invention

[0003] Liquid delivery and distribution systems are used in a variety of applications, including the manufacture of semiconductor devices, the manufacture of pharmaceutical compounds, etc. For example, semiconductor wafers are subjected to various liquid treatment processes such as etching, cleaning, polishing, drying and material deposition during their manufacturing process. Semiconductor substrate processing generally requires that liquid chemicals must be delivered in precise amounts on demand, be free of bubbles, be of a uniform thickness on the usable part of the substrate and minimize chemical waste due to cost and environmental concerns.

[0004] Various types of liquid delivery systems are used to deliver liquid chemicals from supply sources to processes using various types of active components such as flow controllers, pressure transducers, flow measurement sensors, pressure regulators, valves, etc. In many of these applications, the size of the liquid chemical distribution system can dramatically affect costs. For example, in the manufacture of semiconductor devices, it is typical for the liquid distribution system or certain portions thereof to be housed in an ultra-clean environment, such as a clean room. Further, because many of the liquid used in the manufacture of semiconductors are toxic, highly reactive, or both, such liquid distribution systems frequently require specialized containment and venting equipment. For such systems, any decrease in the size of the fluid distribution system is advantageous.

Summary of the Invention

[0005] According to embodiments of the present invention, a modular system for enabling a distribution of liquid chemicals is provided. The system comprises a substrate block that includes at least two ports formed in a first major surface of the block and a fluid

passageway extending between the two ports. The fluid pathway is preferably a smooth, seamless path where the entire volume of the fluid pathway is directly in line with the desired fluid flow so that fluid flow completely sweeps the entire flow passageway and there are no dead volumes or areas of entrapment in said fluid passageway.

[0006] According to another embodiment of the present invention, a substrate block can be formed from a fluoropolymer using a novel composition and manufacturing process.

[0007] According to another embodiment of the invention, a sealing assembly is provided that uses a combination of a replaceable insert-type seal with a tongue and groove seal formed into the modular components.

[0008] The foregoing has outlined rather broadly the features and technical advantages of the present invention in order that the detailed description of the invention that follows may be better understood. Additional features and advantages of the invention will be described hereinafter. It should be appreciated by those skilled in the art that the conception and specific embodiments disclosed may be readily utilized as a basis for modifying or designing other structures for carrying out the same purposes of the present invention. It should also be realized by those skilled in the art that such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims.

Brief Description of the Drawings

[0009] For a more thorough understanding of the present invention, and advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

[0010] FIG. 1 shows a prior art substrate block.

[0011] FIG. 2 is a perspective view of a modular liquid chemical delivery system according to an embodiment of the invention.

[0012] FIG. 3 is perspective bottom view of a modular liquid chemical delivery system of FIG. 1.

[0013] FIG. 4 shows a modular substrate block according to embodiments of the invention.

[0014] FIGS. 5A and 5B show an exploded view of the substrate block of FIG. 4.

[0015] FIGS. 6A and 6B show perspective views of a cross section of the substrate block of FIG. 4.

[0016] FIG. 7 shows a cross-sectional view of the substrate block of FIG. 4.

- [0017] FIGS. 8A and 8B show another embodiment of a modular substrate block according to embodiments of the invention.
- [0018] FIG. 9A shows a top (seal) side perspective view of another modular substrate block according to an embodiment.
- [0019] FIG. 9B shows a bottom side perspective view of the modular substrate block of FIG. 9A.
- [0020] FIG. 10A shows a top down view of the modular substrate block of FIG. 9A.
- [0021] FIG. 10B shows a cross-section view of the modular substrate block of FIG. 9A along line AA.
- [0022] FIG. 10C shows a cross-section view of the modular substrate block of FIG. 9A along line BB.
- [0023] FIG. 11A illustrates the fluid flow path through substrate blocks and an active component according to an embodiment.
- [0024] FIG. 11B is an enlarged view of the portion of FIG. 11A.
- [0025] FIGS. 12A and 12B show a replaceable insert seal according to an embodiment.
- [0026] FIG. 13A shows a replaceable insert seal according to an embodiment.
- [0027] FIG. 13B shows a cut-away of the seal of FIG. 13A.
- [0028] FIG. 14A shows a substrate block according to an embodiment.
- [0029] FIG. 14B shows another embodiment of a replaceable insert seal.
- [0030] FIG. 15A shows the replaceable insert seal of FIG. 14B.
- [0031] FIG. 15B shows a cut-away view of the replaceable insert seal of FIG. 14B.
- [0032] FIG. 16A shows a perspective view of another replaceable insert seal according to an embodiment.
- [0033] FIG. 16B is a cross section of the seal of FIG. 16A along line AA.
- [0034] FIG. 16C is a close-up view of the cross section of FIG. 16B.
- [0035] FIGS. 17A-17D show a variety of possible tongue and groove structures that could be used as either secondary or primary seal structures according to embodiments of the invention.
- [0036] FIG. 18 shows another embodiment of a liquid chemical delivery system according to an embodiment of the invention.
- [0037] FIG. 19 shows a transparent view of substrate block having embedded active components according to an embodiment.

[0038] The accompanying drawings are not intended to be drawn to scale. In the drawings, each identical or nearly identical component that is illustrated in various figures is represented by a like numeral. For purposes of clarity, not every component may be labeled in every drawing.

Detailed Description of Preferred Embodiments

[0039] Embodiments of the present invention provide a modular, tubeless liquid chemical delivery system with a substantially smaller footprint than prior art systems. Although modular fluid delivery systems are well known for use with gas delivery and distribution, there are a number of factors that make these prior art systems unsuitable for liquid chemical delivery systems. First, the prior art modular substrate blocks (which provide the fluid passageways) are typically made a solid from solid metal, such as stainless steel. Many of the liquid chemicals used in semiconductor manufacturing will cause metal to corrode. Also, metallic ions tend to be extracted into liquids in contact with the metal surfaces, which can result in a highly undesirable deposition of metal ions onto a wafer surface during the manufacturing process.

[0040] Also, fluid passageways and entrance and exit ports in prior art substrate blocks are formed by drilling into a block of material. Such a prior art substrate block 101 is shown in FIGS. 1A and 1B, with the interior passageways in FIG. 1B shown in phantom lines. As shown in FIG. 4B, drilling out the desired fluid passageways 106 results in a certain amount of “overshoot” (areas 107, 108) where the interior fluid passageway 106 joins with the entrance and exit ports 102. Drilling the interior fluid path (which runs in a direction that is parallel to the upper surface 104 of the substrate block (with ports 102) requires that the drill enter from the side 109 of the substrate block, which requires that a portion of the drilled passageway be filled with a plug 105 to isolate the desired fluid passageway. All of these factors result in some degree of undesirable dead volume within the fluid path.

[0041] Embodiments of the present invention make use of modular substrate blocks formed from a polymer or fluoropolymer such as polypropylene, PTFE, modified PTFE, or PFA. In preferred embodiments, a modular substrate block will be formed from a material that will meet the requirements found in SEMI F57 for Surface Extractable Ionic, Metallic, and Total Organic Carbon Contamination in a seven-day static leach test at 85 ± 5 °C in Ultra-Pure Water.

[0042] FIG. 4 shows a modular substrate block 401 according to embodiments of the present invention having a single fluid path 406 joining two ports 402 located on the upper

surface 404 of the block. In some embodiments, different sized blocks can be used, with some having multiple port pairs and multiple fluid passageways within the same block. Referring also to FIGS. 2-3, modular substrate block 401 can be termed a “jumper block” and can be used, for example, to fluidly connect two active components (an outlet of a first active component connected to an inlet of a second active component) or to connect one active component to another substrate block. As described below, in some embodiments substrate blocks having multiple flow passageways and inlet/outlet ports can also be used.

[0043] FIG. 2 is a perspective view of a modular liquid chemical delivery system 200 according to an embodiment of the invention. FIG. 3 is perspective bottom view of the modular liquid chemical delivery system 200 of FIG. 2, without the back plane and with some of the substrate blocks not shown for clarity. In the embodiment of FIG. 2, there are three layers to the system: a top layer of active components (such as flow controllers, pressure transducers, flow measurement sensors, pressure regulators, valves, etc.); a second middle layer of substrate blocks (which serve to form the fluid connections between active components); and a back plane serving as a support structure for the entire system.

[0044] Referring also to FIGS. 8A and 8B, substrate blocks 201 are mounted to the back plane 210, typically by way of screws or other similar fasteners extending from the upper surface of the substrate (the same surface containing the inlet/outlet port) down into the back plane via fastener holes 852 to hold the substrate blocks in place. In some embodiments, adjacent substrate blocks can also be attached to each other for added stability.

[0045] Each active component (212, 213, 214, 215, 216, 217) can be held in place on one (or more) substrate blocks 201 by way of at least two screws or similar fasteners, which serve to attach the active component to the substrate block and to hold the active component in position relative to the inlet/outlet ports on the surface of the substrate block(s). Typically, an active component can be attached to a first substrate block via two screw holes 854 straddling either side of an inlet/outlet port and to a second substrate block (and port) in the same fashion. In some embodiments, inserts having interior metal threads can be positioned appropriately within the polymer body of the substrate block for mating with the connecting screws from the active components. In the drawings herein, fastener holes and screw holes are not shown in most figures for clarity.

[0046] The modular approach of using substrate blocks still allows direct access to each component with mounting and removing of active components requiring only a manual hand tool such as but not limited to an Allen wrench. By providing direct access to active

components, it is possible to make repairs simply by removing only the damaged active component thereby reducing down time. Because the substrate blocks are standardized, active components can be placed anywhere within the system.

[0047] In the embodiment of FIG. 2, liquid connections to and from the liquid chemical delivery system are made via fittings 215. One or more liquid chemicals to be used in a process will typically flow through tubing from a storage tank (not shown). The tubing will be connected to system 200 via a fitting 215. Once the liquid chemicals enter system 200, it will flow through the various active components via the arranged substrate blocks, until it is delivered (also via fittings 215) to one or more delivery tubes to the desired processing site. In the embodiment of FIG. 2, active components include regulators 214, pressure transducers 217, valves 216, liquid flow controllers 213, and a flow meter 212. As used herein, the total area taken up by all the system components of a liquid delivery system (including active components and substrate blocks) and the free space between such components from the inlet fittings to the outlet fittings is referred to as the system “footprint.”

[0048] Although substrate blocks can be formed in virtually any desired size and configuration using the methods described herein, in the embodiment of FIG. 4 substrate blocks are approximately 55 mm wide and 25 mm (1 inch) thick. The internal diameter of the flow path can be any desired size, including for example 1/4”, 3/8”, or 1/2”. Significantly, in preferred embodiments, the interior fluid path is a smooth, substantially seamless passageway where the entire volume of the path is directly in line with the desired fluid flow. In other words, there are no dead volume areas or plugged portions as seen in the prior art structure of FIG. 1B. Especially for slurries, dead volumes can result in trapped particles and an undesirable increase in large particle counts. Substrate blocks according to embodiments of the present invention contribute <0.1 particle/ml (Particle size > 0.1 μm) within 300 liters of flushing.

[0049] FIG. 4 shows a modular substrate block 401 according to embodiments of the present invention. In some embodiments, the substrate block of FIG. 4 can be manufactured by machining two separate layers of fluoropolymer and then joining the layers together via fusion bonding at seam 426. FIGS. 5A and 5B show an exploded view showing an upper layer 522 and a lower layer 523; FIGS. 6A and 6B show perspective views of a cross section of the substrate block of FIG. 4 along line A-A; and FIG. 7 shows a cross-sectional view of the substrate block of FIG. 4 along line A-A. The upper surface of lower layer 523 can be

machined using known techniques to produce a smooth groove 528 at the desired location for the flow passageway. The bottom side of upper layer 522 can be machined to produce a corresponding groove (not shown). Entrance and exit ports 402 can also be drilled through upper layer 522 at each end of the flow passageway. When the two layers are placed together, the two corresponding grooves form the smooth flow passageway 606 seen in FIGS. 6A and 6B.

[0050] Once the two layers have been machined and properly positioned, the two layers can be bonded together using fusion bonding techniques by a combination of heat and pressure. The precise temperature/pressure/time combinations necessary for fusion bonding are known in the art and will vary with the particular fluoropolymer used to form the layers. In some embodiments, the two layers can be formed from modified PTFA and can be bonded together by heating the layers to a temperature of around 350° C to 380°C at a pressure of about 450 psi for at 1 hour (or longer). Under these conditions, the modified PTFE polymer chains within the two layers will become entangled causing the two surfaces to become permanently bonded at a molecular level and producing a solid homogeneous block of modified PTFE.

[0051] Although the substrate block of FIG. 4 has a very simple single flow passageway joining only two inlet/outlet ports, persons of skill in the art will recognize that these same techniques can be used to create much more complex flow passageways between any desired number of inlet/outlet ports. For example, FIGS. 8A and 8B show a substrate block with 4 different flow passageways 825 and 8 inlet/outlet ports 820. In some embodiments, more than two fluoropolymer layers can be used to create even more complex 3D flow paths. Substrate blocks can also be used as manifolds in which two or more inlet flow paths combine together with a single outlet flow path.

[0052] In other embodiments, a fluoropolymer block having the desired flow passageways and inlet/outlet ports can be created using known fluoropolymer molding techniques such as compression molding or isostatic molding. Some suitable fluoropolymers (such as PFA) are known to be melt-processable and can be molded using injection molding techniques. In other embodiments, a mold can be filled with PTFE or other fluoropolymer powder and then sintered under appropriate conditions to form two layers such as the ones shown in FIGS. 5A and 5B without any machining required to produce the one or more flow passageways. In similar fashion, a complete substrate block with one or more flow passageways can be directly produced by sintering the PTFE or other fluoropolymer powder.

Skilled persons will recognize that the use of some or all of these techniques, or any combination thereof, will also be within the scope of the invention.

[0053] FIGS. 9A and 9B show perspective views, from the top (seal) side and the bottom side respectively, of another modular substrate block 901 according to embodiments of the present invention. In some embodiments, the substrate block of FIGS. 9A and 9B can be manufactured by injection molding using a material such as PFA, although other suitable manufacturing methods and materials could also be used within the scope of the invention. FIG. 10A shows a top (seal) view of modular substrate block 901, while FIG. 10B shows a cross-section view along line AA and FIG. 10C shows a cross-section view along line BB.

[0054] In some embodiments, a multipart mold can be used to form the body of the modular substrate block, with a removable curved insert used to form the smooth fluid pathway 906. Regardless of the exact manufacturing method, embodiments of the modular substrate block contain one or more smooth and substantially seamless fluid pathways where the entire volume of the fluid pathway is directly in line with the desired fluid flow so that fluid flow completely sweeps the entire flow passageway and there are no dead volumes or areas of entrapment in said fluid passageway. In the embodiment of FIG. 10B, the fluid flow path forms a smooth arc with no corners or angular walls, which serves to largely eliminate dead volumes or areas of liquid entrapment.

[0055] The body of the modular substrate block can be formed as a substantially solid block of material except for the fluid pathway(s) and screw holes, as in the examples discussed above. In other embodiments, the body of the modular substrate block can be formed only with the necessary support walls 959 as shown in the example of FIGS. 9A to 11C. Such an embodiment is particularly advantageous for injection molding because all the different sections in the body have substantially the same thickness, which makes it easier to fill all sections of the mold evenly to avoid unwanted voids. Such an embodiment, as shown in FIG. 9B, has a greater surface area as compared to the solid structure of FIG. 4, which may allow the modular substrate block to withstand higher temperatures.

[0056] In some embodiments, after substrate blocks containing the desired flow paths have been formed, an abrasive material can be flushed through the substrate blocks to remove a pronounced seams or molding artifacts and to ensure that the flow passageways are smooth. Alternatively, a specially designed tool could be used to smooth interior flow paths, either manually or automatically.

[0057] Referring again to FIGS. 2-3, substrate blocks according to the present invention can be combined together to form a weldless and tubeless flow pathway connecting a liquid source to a process via virtually any desired arrangement of active components (e.g., valves, pressure transducers, flow controllers, etc.). Liquid flows through passageways within the substrate blocks themselves rather than through separate tubing. The present invention thus provides a solution to the problems of the prior art by providing a plurality of individual substrate blocks with each substrate block having at least one fluid passageway with an entrance and exit port accessing a common surface. The common surface can be used to mount standard active components such as flow controllers, pressure transducers, flow measurement sensors, pressure regulators, valves, etc. In some embodiments, the common surface for each of the respective adjacent manifold blocks being maintained in a common plane to facilitate sealing requirements. The active components will bridge or extend across adjacent substrate blocks with the substrate blocks being removably aligned and mounted (as described above) to operatively permit the respective fluid passageways to be positioned for a sealed interconnection.

[0058] Applicants have found that the use of these types of modular components, which is made possible by the novel systems and processes described herein, can result in a liquid chemical delivery system with a footprint that is less than ½ the size of a typical prior art liquid chemical delivery system. Unlike traditional liquid delivery systems where components are connected via fitting and tubing, in embodiments of the present system, components can be positioned with very little gap between components. In preferred embodiments, adjacent components can be positioned with a gap of less than 20 mm, such as less than 10 mm, less than 5 mm, approximately 1 mm, or even less than 1 mm. In some embodiments, the use of standardized widths for active components (for example, 55 mm) also allows the various components to be positioned with no wasted space between parallel liquid flow lines. In preferred embodiments, the ratio of wasted space to total system footprint can be as low as 30%, such as the ratio can be as low as 20%, as low as 10%, or even as low as 5%. The use of such modular components also serves to largely eliminate the design time and expense associated with custom parts and/or tube assemblies.

[0059] As described above, in some embodiments of the invention active components are mounted onto substrate blocks via screws or other fasteners. Screw holes 854 are positioned on either side of each inlet/outlet port. In some embodiments metal inserts are

placed inside screw holes 854 to provide metal threads and facilitate a tight connection. The underside of each active component thus has a corresponding inlet/outlet port that is held in position over the inlet/outlet port of the substrate block. In preferred embodiments, the housing for active component 962 is also formed from a polymer or fluoropolymer. FIG. 11A illustrates the fluid flow path (shown by arrows 1164) in one embodiment. Active component 1162 (in this example a valve) is mounted over an outlet port of a first substrate block 401A so that the fluid path inside active component 1162 is fluidly connected to the fluid path within substrate block 401A. Likewise, active component 1162 is also mounted to substrate block 401B so that the outlet port of active component 1162 is positioned over the inlet port of substrate block 401B and the fluid path out of active component 962 is fluidly connected to the fluid passageway within substrate block 401B.

[0060] FIG. 11B is an enlarged view of the portion of FIG. 11A inside dashed box 1170. As shown in FIG. 11B, the desired fluid path (line 1164) leads from substrate block 401A, through the inlet/outlet ports on the top surface of substrate block 401A and the underside of active component 1162, and into the component fluid passageway 1163. Even with a tight connection between the component and substrate block, leakage (in the direction shown by arrows 1166) is still a possibility. A face-to-face interface also has a potential for entrapping liquid which can lead to microbial proliferation or releases of large particle counts. Accordingly, in some embodiments one or more sealing assemblies are used to prevent any leakage at the connections between active components and substrate blocks.

[0061] Some embodiments of the present invention make use of tongue and groove structures and/or inserts to provide a seal between active components and substrate blocks. In some embodiments, similar seals could be used to form a fluid connection directly between substrate blocks or between active components. As shown in FIGS. 10B and 10C, tongue and groove connections (957 and 956 respectively) are formed directly into the bodies of the two components (i.e., a small protruding “tongue” on one surface fits into a “groove” formed into the corresponding surface.) Inserts are separately formed and replaceable sealing components that can be placed into channels formed in one or both connecting surfaces.

[0062] FIGS. 112 and 12B show one embodiment of the invention in which a replaceable insert seal 970 can be placed inside a shaped channel surrounding the fluid connection between a substrate block 401 and an active component 1162. In the cross-section views of FIG. 12A and 12B, the active component shown is a test fixture used to test flow and extractable particle requirements, but the seal arrangement would be the same for an

actual active component such as a valve or liquid flow meter, etc. FIG. 14A shows a substrate block 401 with line B-B illustrating the location of the cross-section of FIGS. 12A and 12B. FIG. 13A shows a perspective view of seal 970, while FIG. 13B shows a cut-away of seal 970 to illustrate the cross-section shape. In the embodiment shown, the chamfered horizontal section 972 of seal 970 aids in correct installation of the seal by providing a leading edge that can be easily inserted into the channel on one of the mounting surfaces (in the underside of the active component in this embodiment). Referring again to FIGS. 8A and 8B, seal channels 860 are machined or otherwise formed around each inlet/outlet port 820.

[0063] In preferred embodiments, seal 970 can also be made from a polymer or fluoropolymer. Applicants have discovered that, due to the increased tolerances required for structures machined or otherwise formed in polymer bodies, that the seal ring 970 should be sized so that there will always be interference on the leading edge 972 of the seal ring. In other words, the seal ring will be horizontally compressed during installation to ensure that a liquid seal is always formed. In contrast, in some embodiment, the seal will be sized so that there is little or no vertical interference or compression on the horizontal portion 971 of the ring.

[0064] FIG. 14B shows another embodiment of a replaceable seal ring 1280 in a cross-sectional view of an active component 1162 mounted onto a substrate block 401. Again, FIG. 14A shows a substrate block 401 with line B-B illustrating the location of the cross-section of FIG. 14A.

[0065] FIG. 15A shows a perspective view of 1280, while FIG. 15B shows a cut-away of seal 1280 to illustrate the cross-section shape. Seal ring 1280 features an interior conical sleeve 1283 with no horizontal portion (which can potentially allow leakage). Liquid thus sweeps through the interior of sleeve 1283 when the seal is in place. The outer ring 1282, connected to the conical sleeve section via horizontal bridge section 1284, provides an additional seal behind the conical seal section 1283 to act as a backup and to add in positioning. The tapered shape of the conical center section 1283 also serves to aid in installation of seal ring 1280. As with the seal ring embodiment described above, seal ring 1280 is sized so that, when installed, the channels cause horizontal interference but not vertical interference.

[0066] FIG. 16A shows a perspective view of another embodiment of a replaceable seal ring 1680 used to provide a liquid seal at the inlet and outlet ports of modular substrate blocks according to embodiments of the invention. FIG. 16B is a cross section of the seal of

FIG. 16A along line AA. FIG. 16C is a close-up view of one half of the cross section of FIG. 16B. Seal ring 1680 features an interior conical sleeve 1683. Conical sleeve 1683 has an outwardly sloped portion 1685 (sloped away from the port opening), and inwardly sloped portion 1686 (sloped toward the port opening), and an outer vertical portion 1687. In the embodiment of FIG. 16A, the conical sleeve portion of the seal has no horizontal surface (which can potentially allow leakage). In some embodiments, the slope of the outwardly sloped portion 1685 is at an angle of about 25 to 35 degrees, such as about 30 degrees, relative to the vertical axis (or the inner wall of the seal). In some embodiments, the slope of the inwardly sloped portion 1686 is at a greater angle relative to the vertical axis than the slope of the outwardly sloped portion, such as an angle of 40 to 50 degrees, such as an angle of about 45 degrees.

[0067] In some embodiments of a seal featuring an interior conical sleeve, the ratio of the height of the cone (indicated by arrows and reference number 1695) to the thickness of the cone wall (indicated by arrows and reference number 1976) will be in the range from about 0.5 to 2.5, such as about 1.0 to 2.0, 1.1 to 1.8, or 1.1 to 1.6.

[0068] In some embodiments, the seal is sized so that the outwardly sloped portion 1685 of the conical sleeve is compressed when the seal is installed, as indicated by arrow 1690. The seal is also sized so that the upper edge of the port opening (substrate mating part) will not be in contact with the outwardly sloped portion 1685 when the seal is installed. Instead, the edge of the port opening will slide past outer vertical portion 1687 with the seal in the area indicated by reference number 1688. The tapered shape of the conical center section 1683 also serves to aid in installation of seal ring 1680. Liquid thus sweeps through the interior of sleeve 1683 when the seal is in place.

[0069] The outer ring 1682 provides an additional seal behind the conical seal section 1683 to act as a backup and to serve as an additional aid in positioning. In some embodiments, seal ring 1680 is sized so that, when installed, the channels surrounding the port openings in the modular substrate blocks cause horizontal interference on the outer and inner surfaces of outer ring 1688 as indicated by arrows 1691 and 1692. In some embodiments, there is no vertical interference on the top or bottom sides of the ring, on horizontal bridge section or web 1684, and/or upon the conical center section 1683.

[0070] In some embodiments, tongue and groove inserts can be employed in addition to the removable inserts described above, both as a backup or secondary seal and as an additional aide in properly aligning the ports on active components and substrate blocks.

FIG. 17A illustrates the position of the tongue and groove secondary seal 1790 in relation to the primary seal insert 1770 according to an embodiment of the invention. In other embodiments, the tongue and groove structure could be the primary seal structure (closest to the desired flow path) and a seal insert could be the secondary seal. FIGS. 17B-17D show a variety of possible tongue and groove structures that could be used as either secondary or primary seal structures. FIG. 17B shows simple corresponding tongue and groove rings 1790. FIG. 17C shows the addition of a reversed concentric shoulder 1792 that acts to protect the tongue ring of FIG. 17B from damage. And FIG. 17D shows a double set of concentric tongue and groove rings (1793, 1794). In some embodiments, a leak detector can be embedded in the substrate between the primary and secondary seals.

[0071] FIG. 18 shows another embodiment of a liquid chemical delivery system 1800 in which substrate block 1801 has one or more active components embedded in the substrate block. FIG. 19 shows a transparent view of substrate block 1801 showing the interior structures. In the embodiment of FIG. 19, liquid enters the substrate block through inlets 1920A and proceeds through flow path 1925 to check valves 1992 to static mixer 1994. The two fluid streams are thus combined and exit the substrate block through outlet port 1920B. A substrate block 1401 can be formed from a polymer or fluoropolymer as described above for use with liquid chemicals. In some embodiments, substrate block 1401 can be formed from a metal such as stainless steel for use with gas mixtures. Substrate block 1401 can either be formed with the slots for active components or the slots/openings can be machined into the substrate block. Flow paths can be formed as described above, or machined using prior art methods. In some embodiments, embedded active components are replaceable and removably held in place by screws/fasteners 1991.

[0072] Many different aspects and embodiments are possible. Some of those aspects and embodiments are described herein. After reading this specification, skilled artisans will appreciate that those aspects and embodiments are only illustrative and do not limit the scope of the present invention. Embodiments may be in accordance with any one or more of the items as listed below:

[0073] Item 1. A liquid delivery system comprising: a substrate block including a first substrate port and a second substrate port formed in a first surface and a first liquid passageway that extends in a first direction and fluidly connects the first substrate port to the second substrate port; a first active component fluidly connected to the first substrate port and

a second active component, which is distinct from the first active component, fluidly connected to the second substrate port; and wherein the first liquid passageway has no dead volume or areas for liquid entrapment.

[0074] Item 2. A system for enabling a distribution of liquid chemicals, comprising: a substrate block including a first substrate port and a second substrate port formed in a first surface and a first liquid passageway that extends in a first direction and fluidly connects the first substrate port to the second substrate port; wherein the first substrate port is adapted to be fluidly connected to a first active component and the second substrate port is adapted to be fluidly connected to a second active component that is distinct from the first active component; and wherein the first liquid passageway is a smooth passageway having no dead volume or areas for entrapment of liquid.

[0075] Item 3. A system for enabling a distribution of liquid chemicals, comprising: a substrate block including a first substrate port and a second substrate port formed in a first surface and a first liquid passageway that extends in a first direction and fluidly connects the first substrate port to the second substrate port; wherein the first substrate port is adapted to be fluidly connected to a first active component and the second substrate port is adapted to be fluidly connected to a second active component that is distinct from the first active component; and wherein the entire volume of the first liquid passageway is in line with the fluid flow.

[0076] Item 4. Any one of the preceding items wherein the first liquid passageway is formed so that liquid flow sweeps through the entire volume of the liquid passageway.

[0077] Item 5. Any one of the preceding items wherein the entire volume of the first liquid passageway is in line with the fluid flow.

[0078] Item 6. Any one of the preceding items in which the substrate block comprises a polymer or fluoropolymer.

[0079] Item 7. Any one of the preceding items in which the substrate block comprises polypropylene, PTFE, modified PTFE, or PFA.

[0080] Item 8. Any one of the preceding items in which the substrate block comprises a third and a fourth substrate port formed in the first surface and a second liquid passageway fluidly connecting the third substrate port to the fourth substrate port.

[0081] Item 9. Any one of the preceding items in which the substrate block is formed by machining a smooth groove in an upper surface of a first substrate layer and a matching smooth groove in a bottom surface of a second substrate layer, positioning the second

substrate layer on the first substrate layer so that the matching grooves form a liquid passageway and bonding the two layers together.

[0082] Item 10. Item 9 further comprising drilling a first port and a second port through the second layer at either end of the formed groove.

[0083] Item 11. Any one of the preceding items in which bonding the two substrate layers comprises fusion bonding two polymer or fluoropolymer layers together by the application of heat and pressure.

[0084] Item 12. Any one of the preceding items in which the substrate block is formed by molding a polymer or fluoropolymer.

[0085] Item 13. Item 12 in which molding comprises compression molding, isostatic molding, melt-processing, or injection molding.

[0086] Item 14. Any one of the preceding items in which the substrate block is formed by sintering a fluoropolymer in a mold.

[0087] Item 15. Any one of the preceding items in which the substrate block is formed by sintering two separate substrate layers in molds and then fusion bonding the layers together.

[0088] Item 16. Any one of the preceding items in which the active components comprise one or more components selected from the group of flow controllers, pressure transducers, flow measurement sensors, pressure regulators, and valves.

[0089] Item 17. Any one of the preceding items in which the liquid delivery system has a footprint having a ratio of free space to system components that is no more than 30%, no more than 20%, no more than 10%, or no more than 5% free space.

[0090] Item 18. Any one of the preceding items in which the liquid delivery system has a plurality of active components mounted so that the space between active components is less than 20 mm, such as less than 10 mm, less than 5 mm, approximately 1 mm, or even less than 1 mm.

[0091] Item 19. A liquid delivery system comprising: a substrate block including a first substrate port and a second substrate port formed in a first surface and a first liquid passageway that extends in a first direction and fluidly connects the first substrate port to the second substrate port; a first active component having a lower surface fluidly connected to the first substrate port; and a seal assembly sealing the fluid connection, the seal assembly including a primary seal comprising a removable seal insert, and a secondary seal comprising

a tongue and groove structure formed in the first surface of the substrate block and in the lower surface of the active component.

[0092] Item 20. Item 19 in which the seal insert comprises a polymer or fluoropolymer.

[0093] Item 21. Any one of items 19-20 in which the seal assembly comprises a seal ring that, when installed, is compressed in the horizontal direction but not in the vertical direction.

[0094] Item 22. Any one of items 19-21, in which the secondary tongue and groove structure is a circular groove in one of the upper surface of the substrate block or the lower surface of the active component and a corresponding circular tongue extending from the other of either the upper surface of the substrate block or the lower surface of the active component.

[0095] Item 23. Any one of items 19-22 in which the tongue and groove structure comprises a circular structure having a larger diameter than the insert seal.

[0096] Item 24. Any one of items 19-23 in which the tongue and groove structure comprises at least two concentric circular tongue and groove structures.

[0097] Item 25. Any one of items 19-24 in which the seal comprises a conical center section through which liquid flows when the seal is in place.

[0098] Item 26. Item 25 in which the ratio of the height of the cone in the conical center section to the thickness of the seal wall in the conical center section is from about 0.5 to 2.5, such as about 1.0 to 2.0, 1.1 to 1.8, or 1.1 to 1.6.

[0099] The invention described herein has broad applicability and can provide many benefits as described and shown in the examples above. The embodiments will vary greatly depending upon the specific application, and not every embodiment will provide all the benefits and meet all the objectives that are achievable by the invention.

[00100] Whenever the terms "automatic," "automated," or similar terms are used herein, those terms will be understood to include manual initiation of the automatic or automated process or step. In the discussion and in the claims, the terms "including" and "comprising" are used in an open-ended fashion, and thus should be interpreted to mean "including, but not limited to" To the extent that any term is not specially defined in this specification, the intent is that the term is to be given its plain and ordinary meaning. The accompanying drawings are intended to aid in understanding the present invention and,

unless otherwise indicated, are not drawn to scale. As used herein, the words “right,” “left,” “lower,” “upper,” “bottom,” “horizontal,” “vertical,” and the like designate directions in the drawings to which reference is made. These terms are used for convenience only and are not limiting.

[00101] Further, it should be recognized that embodiments of the present invention can be implemented via computer hardware or software, or a combination of both. The methods can be implemented in computer programs using standard programming techniques—including a computer-readable storage medium configured with a computer program, where the storage medium so configured causes a computer to operate in a specific and predefined manner—according to the methods and figures described in this Specification. Each program may be implemented in a high level procedural or object oriented programming language to communicate with a computer system. However, the programs can be implemented in assembly or machine language, if desired. In any case, the language can be a compiled or interpreted language. Moreover, the program can run on dedicated integrated circuits programmed for that purpose.

[00102] The scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure of the present invention, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present invention. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps. The figures described herein are generally schematic and do not necessarily portray the embodiments of the invention in proper proportion or scale.

WHAT IS CLAIMED IS:

Claims

1. A liquid delivery system comprising:
a substrate block including a first substrate port and a second substrate port formed in a first surface and a first liquid passageway that extends in a first direction and fluidly connects the first substrate port to the second substrate port;
a first active component fluidly connected to the first substrate port and a second active component, which is distinct from the first active component, fluidly connected to the second substrate port; and
wherein the first liquid passageway has no dead volume or areas for liquid entrapment.
2. The liquid delivery system of claim 1 wherein the first liquid passageway is formed so that liquid flow sweeps through the entire volume of the liquid passageway.
3. The liquid delivery system of claim 1 wherein the entire volume of the first liquid passageway is in line with the fluid flow.
4. The liquid delivery system of claim 1 in which the substrate block comprises a polymer or fluoropolymer.
5. The liquid delivery system of claim 1 in which the substrate block comprises polypropylene, PTFE, modified PTFE, or PFA.
6. The liquid delivery system of claim 1 in which the substrate block comprises a third and a fourth substrate port formed in the first surface and a second liquid passageway fluidly connecting the third substrate port to the fourth substrate port.
7. The liquid delivery system of claim 1 in which the substrate block is formed by machining a smooth groove in an upper surface of a first substrate layer and a matching smooth groove in a bottom surface of a second substrate layer, positioning the second substrate layer on the first substrate layer so that the matching grooves form a liquid passageway and bonding the two layers together.
8. The liquid delivery system of claim 7 further comprising drilling a first port and a second port through the second layer at either end of the formed groove.
9. The liquid delivery system of claim 1 in which bonding the two substrate layers comprises fusion bonding two polymer or fluoropolymer layers together by the application of heat and pressure.

10. The liquid delivery system of claim 1 in which the substrate block is formed by molding a polymer or fluoropolymer.
11. The liquid delivery system of claim 10 in which molding comprises compression molding, isostatic molding, or melt-processing.
12. The liquid delivery system of claim 10 in which molding comprises injection molding.
13. The liquid delivery system of claim 1 in which the substrate block is formed by sintering a fluoropolymer in a mold.
14. The liquid delivery system of claim 1 in which the substrate block is formed by sintering two separate substrate layers in molds and then fusion bonding the layers together.
15. The liquid delivery system of claim 1 in which the first active component is a component selected from the group of a flow controllers, a pressure transducers, a flow measurement sensor, a pressure regulator, and a valve.
16. The liquid delivery system of claim 1 in which the liquid delivery system has a footprint having a ratio of free space to system components that is no more than 30%.
17. The liquid delivery system of claim 1 in which the liquid delivery system has a plurality of active components mounted so that the space between active components is less than 20 mm.
18. The liquid delivery system of claim 17 in which the plurality of active components comprises two or more components selected from the group of flow controllers, pressure transducers, flow measurement sensors, pressure regulators, and valves.
19. A system for enabling a distribution of liquid chemicals, comprising:
 - a substrate block including a first substrate port and a second substrate port formed in a first surface and a first liquid passageway that extends in a first direction and fluidly connects the first substrate port to the second substrate port;
 - wherein the first substrate port is adapted to be fluidly connected to a first active component and the second substrate port is adapted to be fluidly connected to a second active component that is distinct from the first active component; and
 - wherein the first liquid passageway is a smooth passageway having no dead volume or areas for entrapment of liquid.
20. A system for enabling a distribution of liquid chemicals, comprising:

a substrate block including a first substrate port and a second substrate port formed in a first surface and a first liquid passageway that extends in a first direction and fluidly connects the first substrate port to the second substrate port;
wherein the first substrate port is adapted to be fluidly connected to a first active component and the second substrate port is adapted to be fluidly connected to a second active component that is distinct from the first active component; and
wherein the entire volume of the first liquid passageway is in line with the fluid flow.

21. Any of the preceding claims wherein the first liquid passageway is formed so that liquid flow sweeps through the entire volume of the liquid passageway.
22. Any of the preceding claims wherein the entire volume of the first liquid passageway is in line with the fluid flow.
23. Any of the preceding claims in which the substrate block comprises a polymer or fluoropolymer.
24. Any of the preceding claims in which the substrate block comprises polypropylene, PTFE, modified PTFE, or PFA.
25. Any of the preceding claims in which the substrate block comprises a third and a fourth substrate port formed in the first surface and a second liquid passageway fluidly connecting the third substrate port to the fourth substrate port.
26. Any of the preceding claims in which the substrate block is formed by machining a smooth groove in an upper surface of a first substrate layer and a matching smooth groove in a bottom surface of a second substrate layer, positioning the second substrate layer on the first substrate layer so that the matching grooves form a liquid passageway and bonding the two layers together.
27. Claim 26 further comprising drilling a first port and a second port through the second layer at either end of the formed groove.
28. Any of the preceding claims in which bonding the two substrate layers comprises fusion bonding two polymer or fluoropolymer layers together by the application of heat and pressure.
29. Any of the preceding claims in which the substrate block is formed by molding a polymer or fluoropolymer.
30. Claim 29 in which molding comprises compression molding, isostatic molding, melt-processing, or injection molding.

31. Any of the preceding claims in which the substrate block is formed by sintering a fluoropolymer in a mold.
32. Any of the preceding claims in which the substrate block is formed by sintering two separate substrate layers in molds and then fusion bonding the layers together.
33. Any of the preceding claims in which the active components comprise one or more components selected from the group of flow controllers, pressure transducers, flow measurement sensors, pressure regulators, and valves.
34. Any of the preceding claims in which the liquid delivery system has a footprint having a ratio of free space to system components that is no more than 30%, no more than 20%, no more than 10%, or no more than 5% free space.
35. Any of the preceding claims in which the liquid delivery system has a plurality of active components mounted so that the space between active components is less than 20 mm, such as less than 10 mm, less than 5 mm, approximately 1 mm, or even less than 1 mm.
36. A liquid delivery system comprising:
a substrate block including a first substrate port and a second substrate port formed in a first surface and a first liquid passageway that extends in a first direction and fluidly connects the first substrate port to the second substrate port;
a first active component having a lower surface fluidly connected to the first substrate port; and
a seal assembly sealing the fluid connection, the seal assembly including a primary seal comprising a removable seal insert, and a secondary seal comprising a tongue and groove structure formed in the first surface of the substrate block and in the lower surface of the active component.
37. Claim 36 in which the seal insert comprises a polymer or fluoropolymer.
38. Any one of claims 36-37 in which the seal assembly comprises a seal ring that, when installed, is compressed in the horizontal direction but not in the vertical direction.
39. Any one of claims 36-38, in which the secondary tongue and groove structure is a circular groove in one of the upper surface of the substrate block or the lower surface of the active component and a corresponding circular tongue extending from the other of either the upper surface of the substrate block or the lower surface of the active component.
40. Any one of claims 36-39 in which the tongue and groove structure comprises a circular structure having a larger diameter than the insert seal.

41. Any one of claims 36-40 in which the tongue and groove structure comprises at least two concentric circular tongue and groove structures.
42. Any one of claims 36-41 in which the seal comprises a conical center section through which liquid flows when the seal is in place.
43. Claim 42 in which the ratio of the height of the cone in the conical center section to the thickness of the seal wall in the conical center section is from about 0.5 to 2.5, such as about 1.0 to 2.0, 1.1 to 1.8, or 1.1 to 1.6.

1 / 21

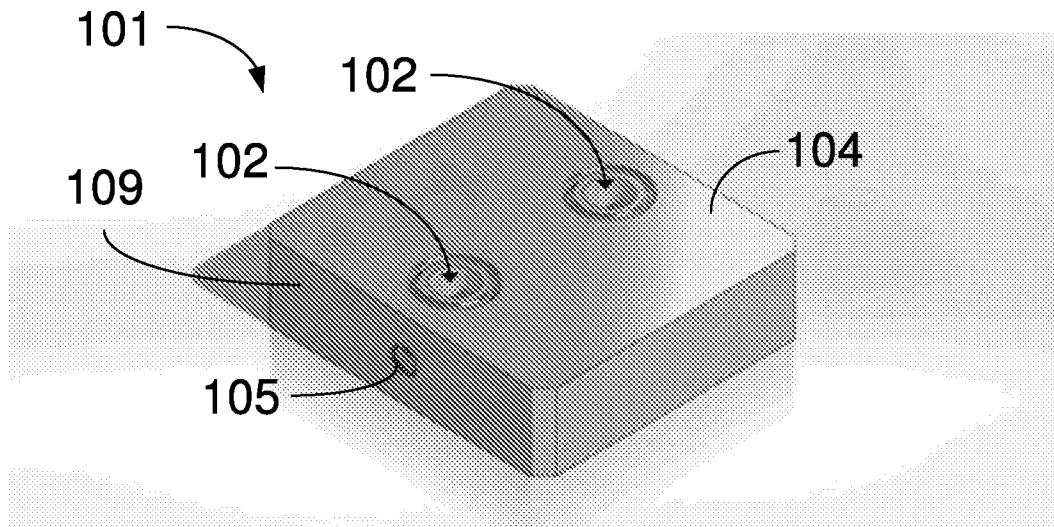


FIG. 1A
Prior Art

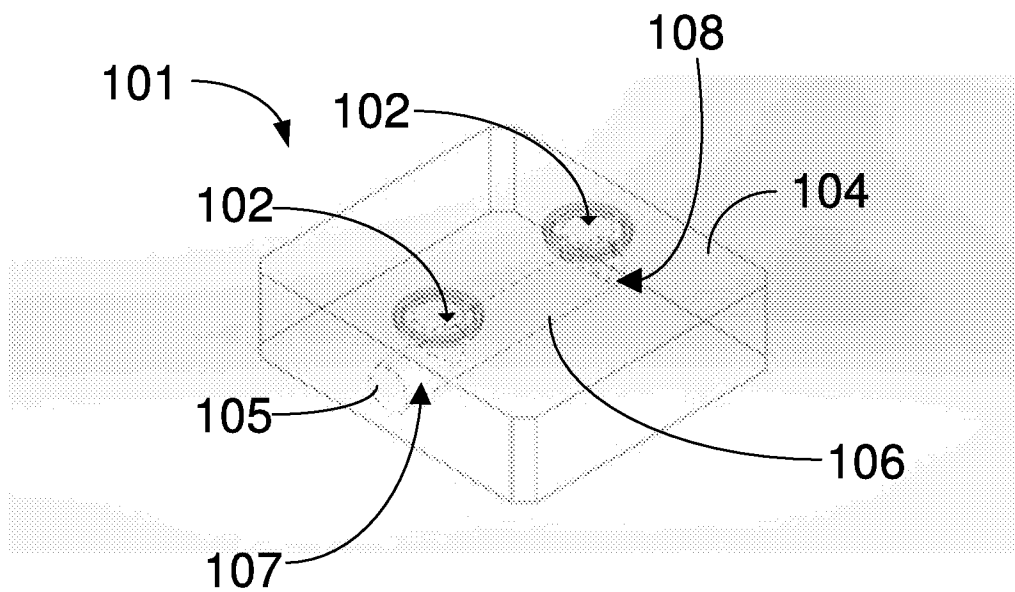


FIG. 1B
Prior Art

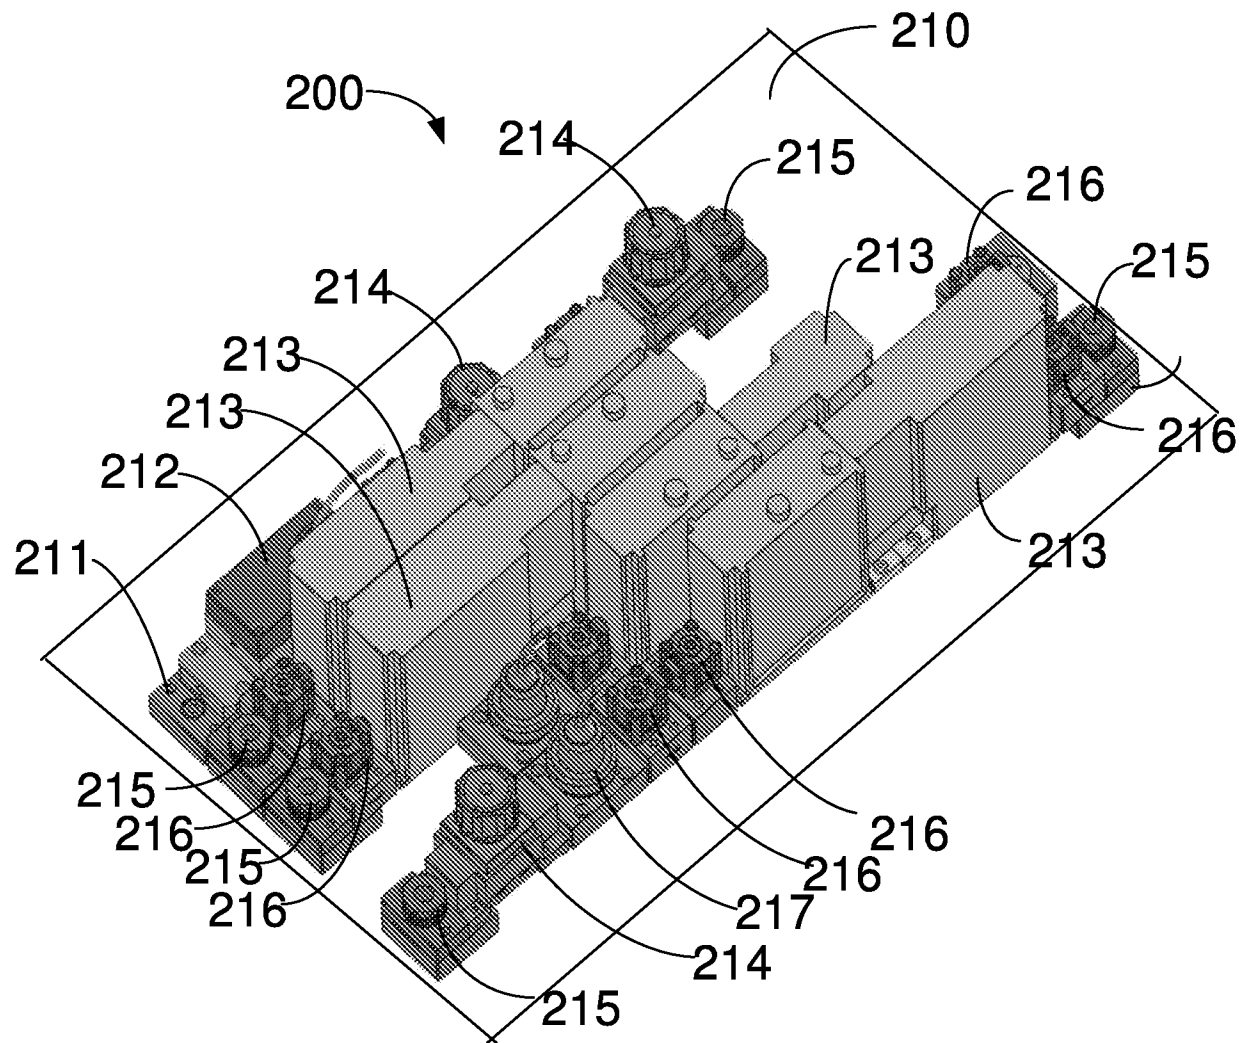


FIG. 2

3/21

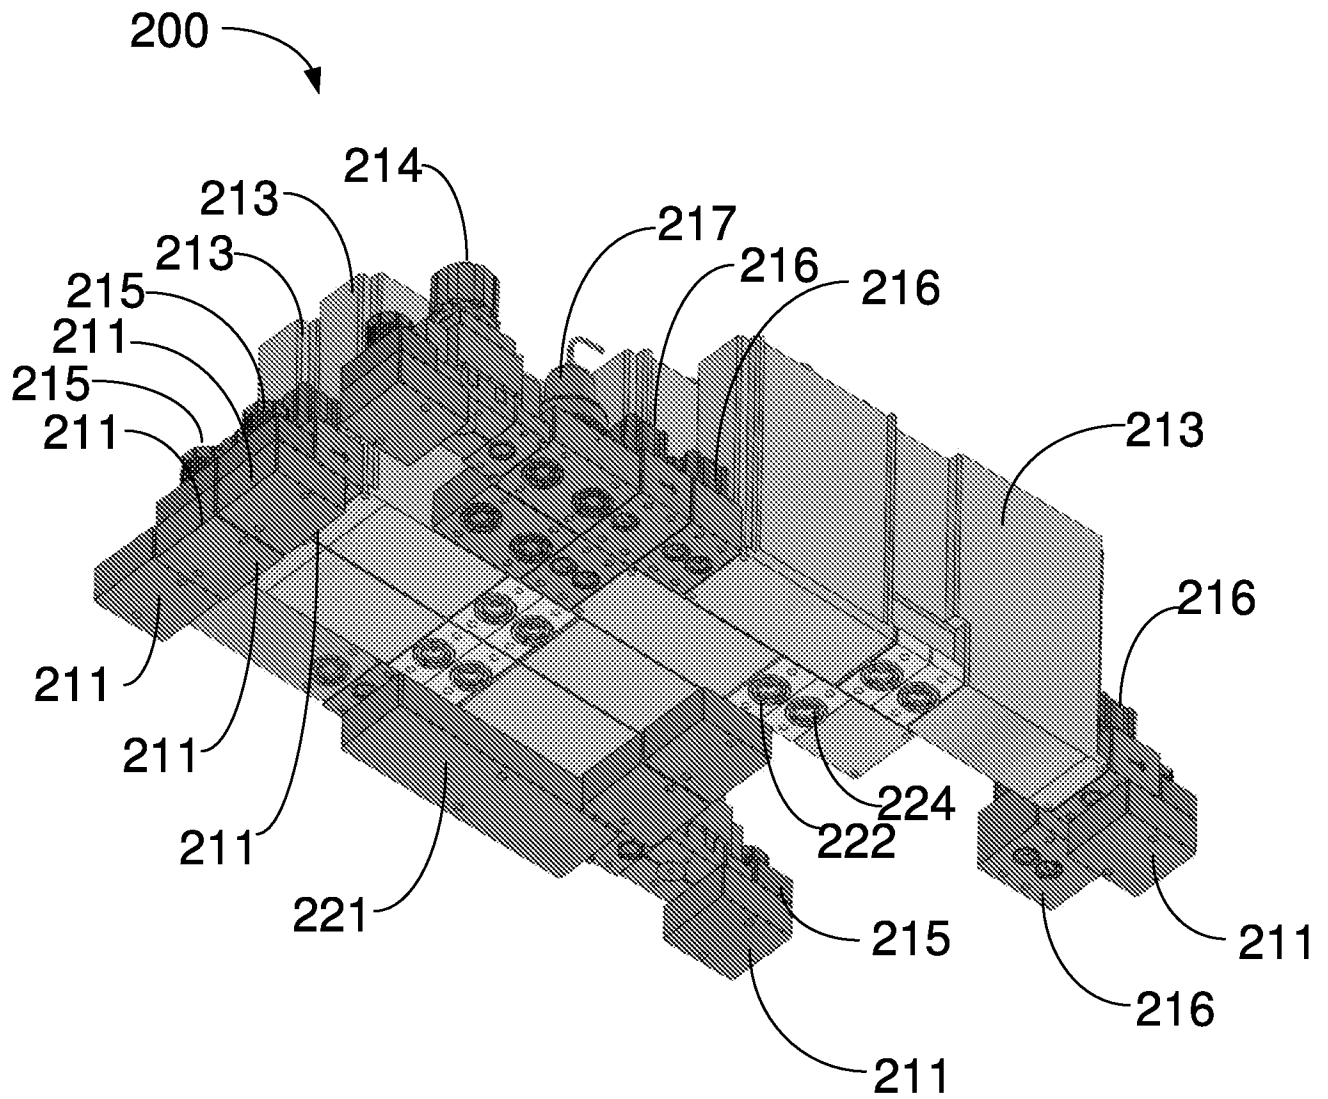


FIG. 3

4/21

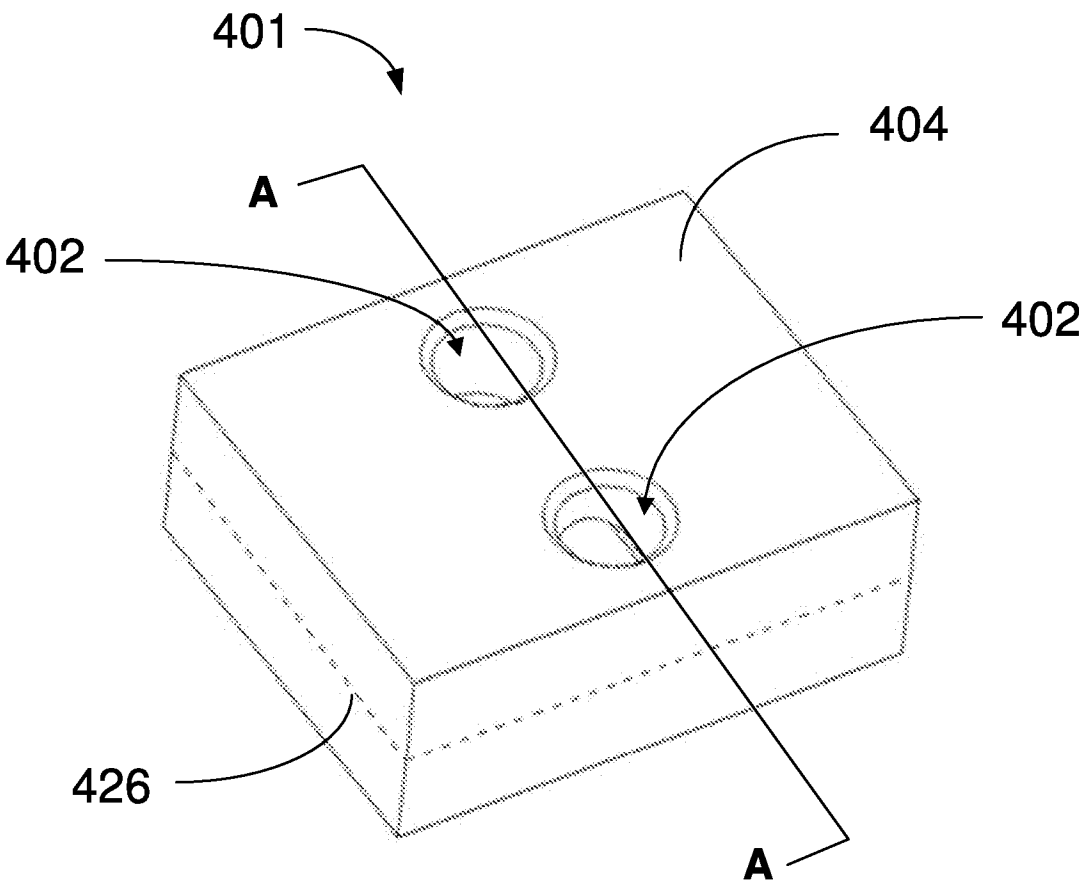


FIG. 4

5/21

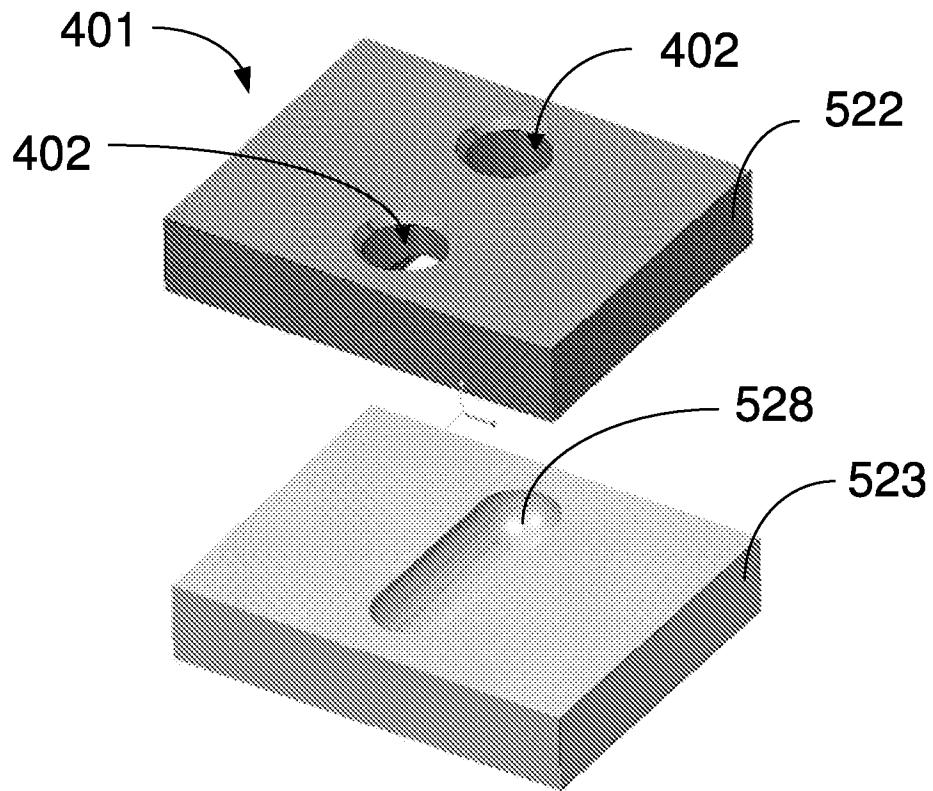


FIG. 5A

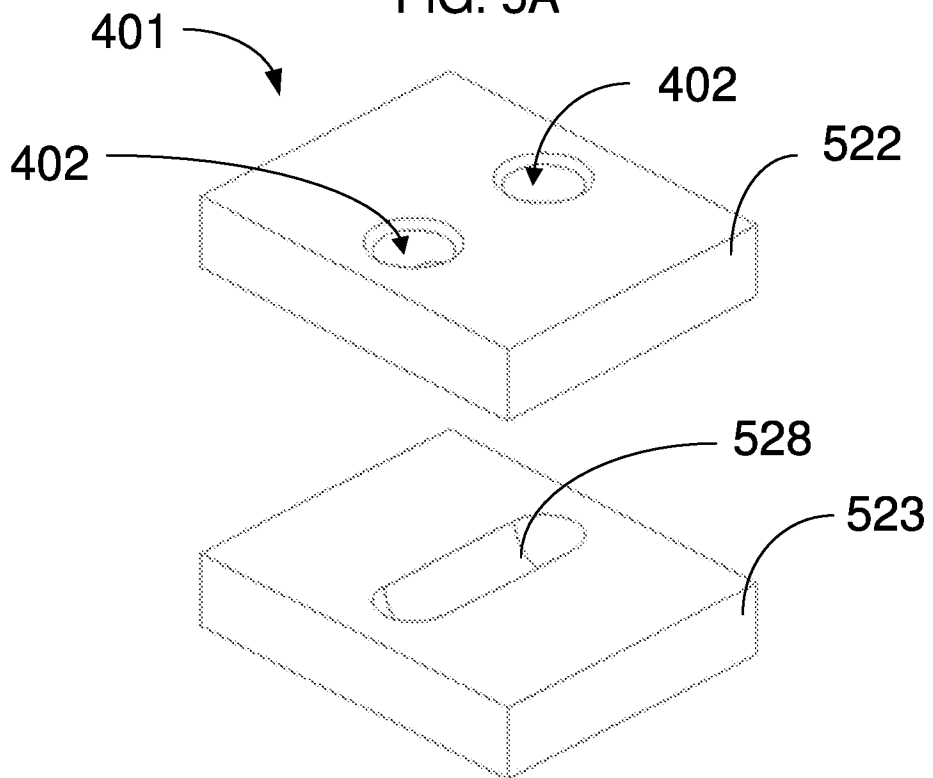


FIG. 5B

6/21

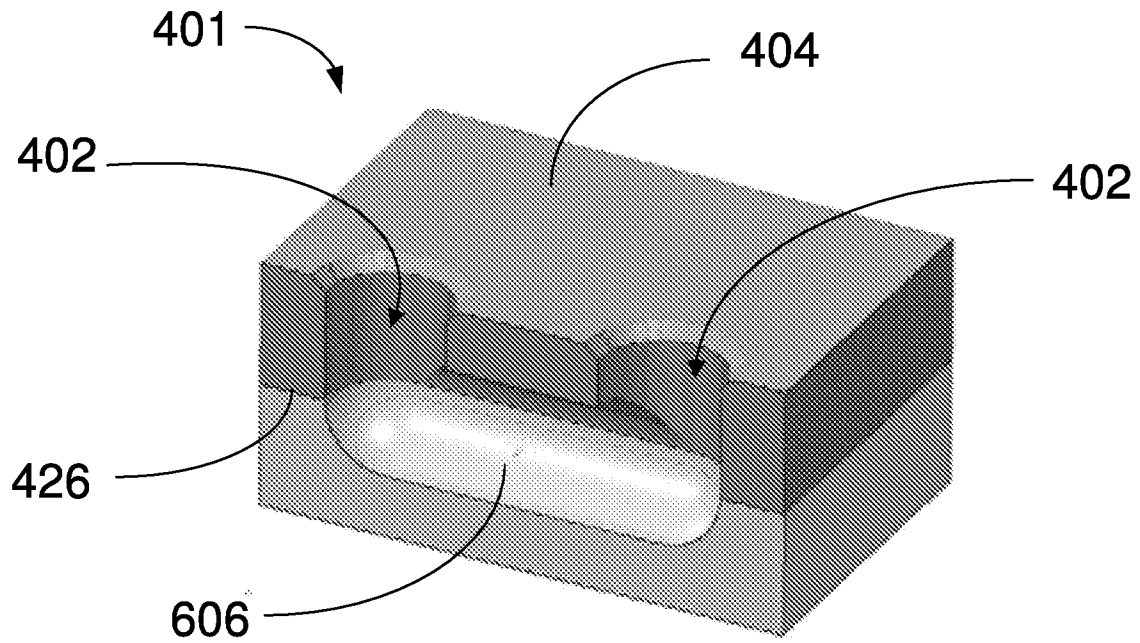


FIG. 6A

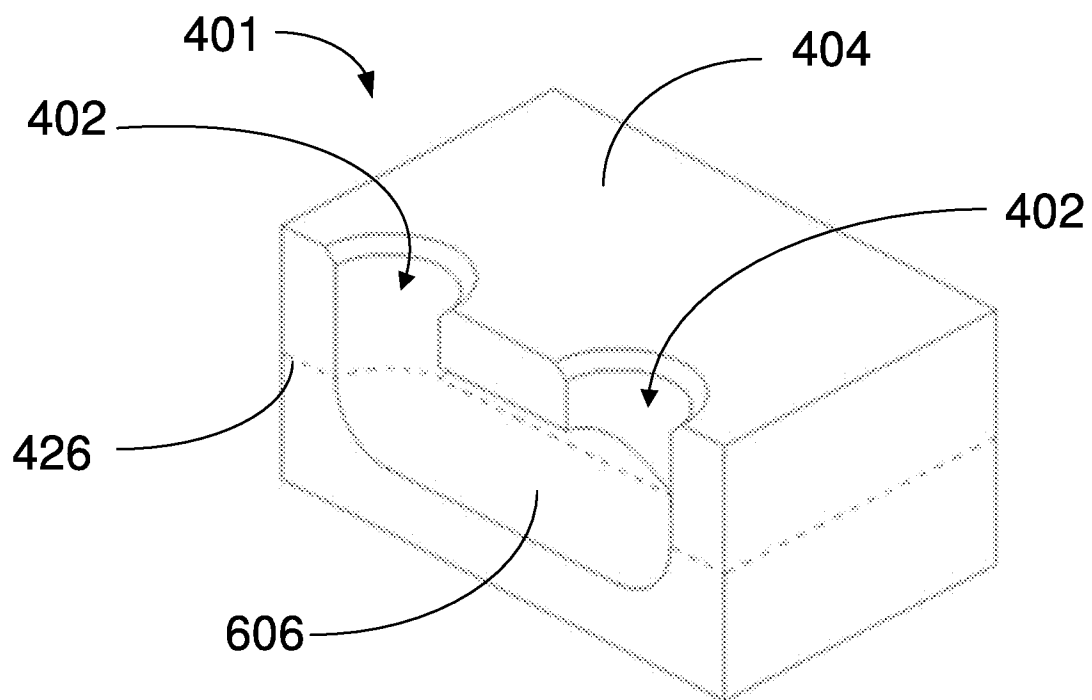


FIG. 6B

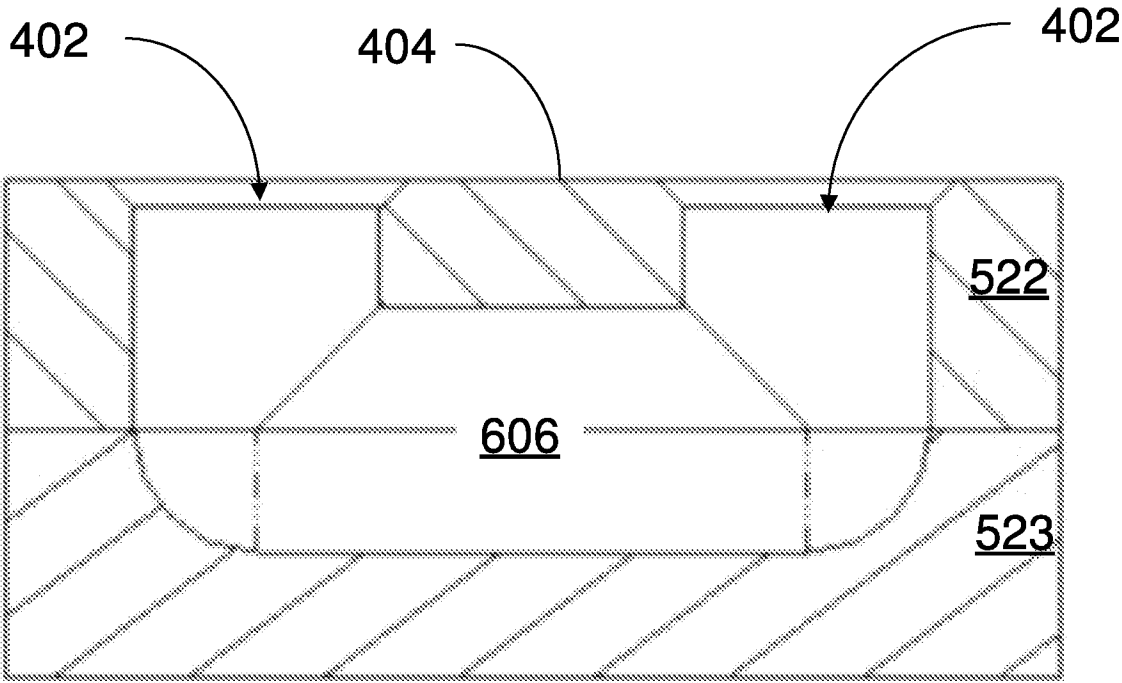


FIG. 7

8 / 21

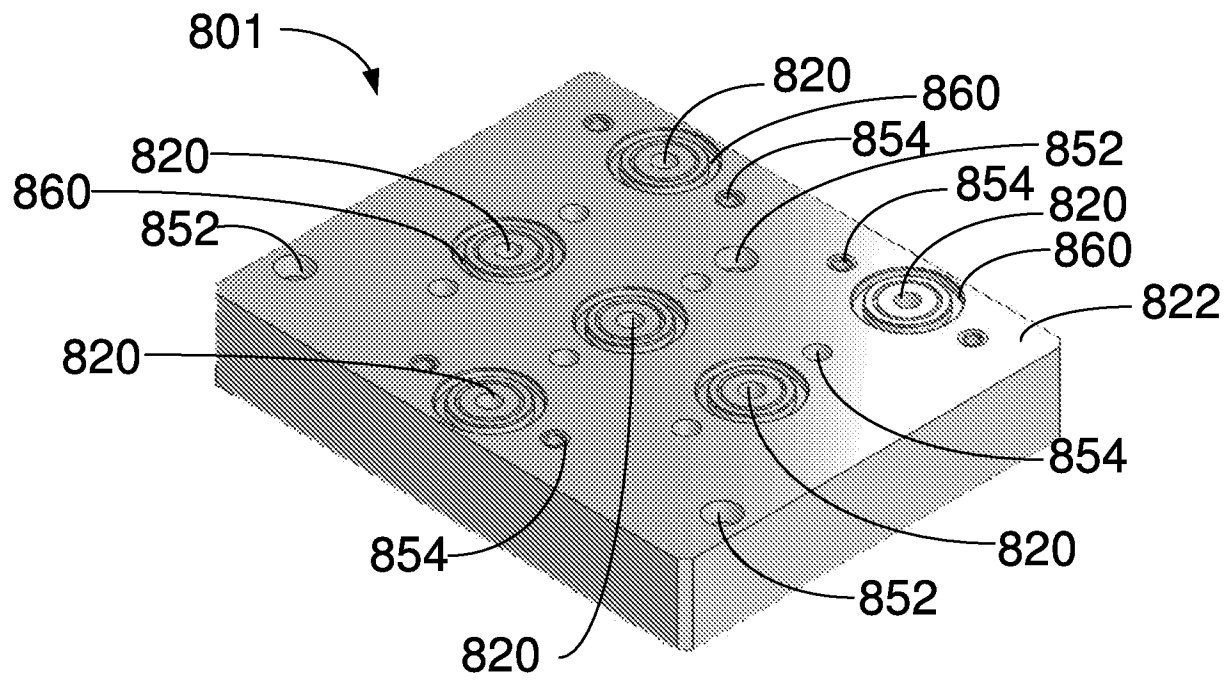


FIG. 8A

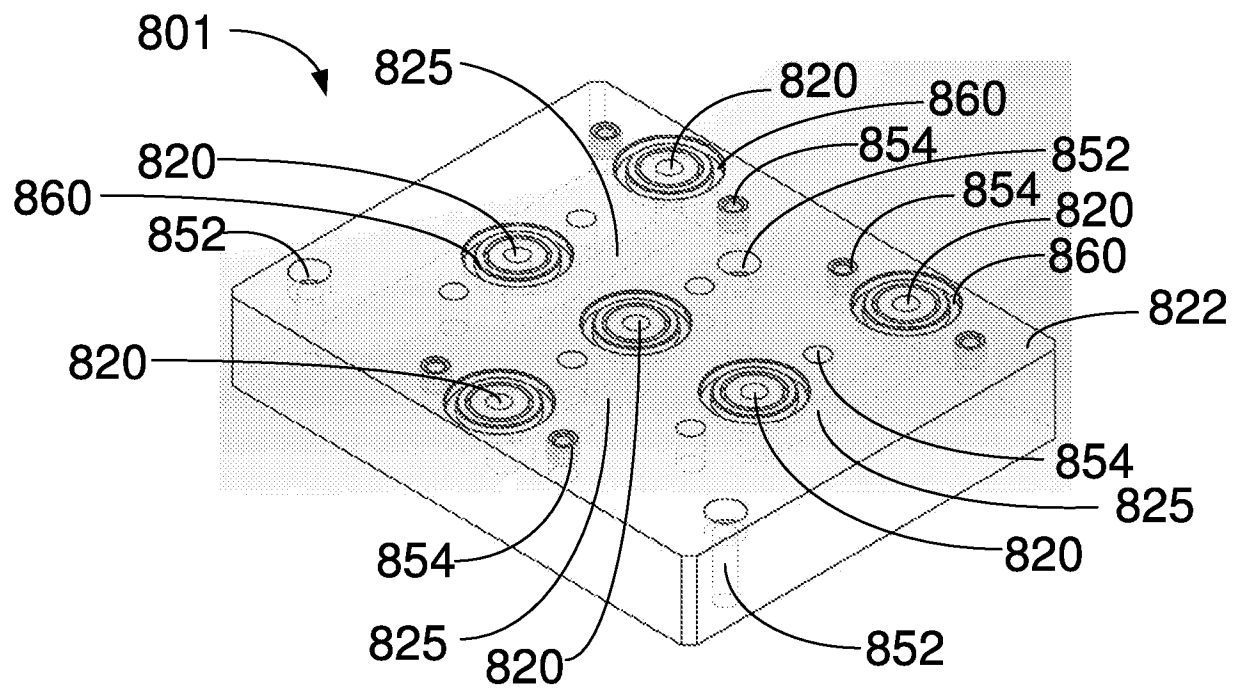


FIG. 8B

9/21

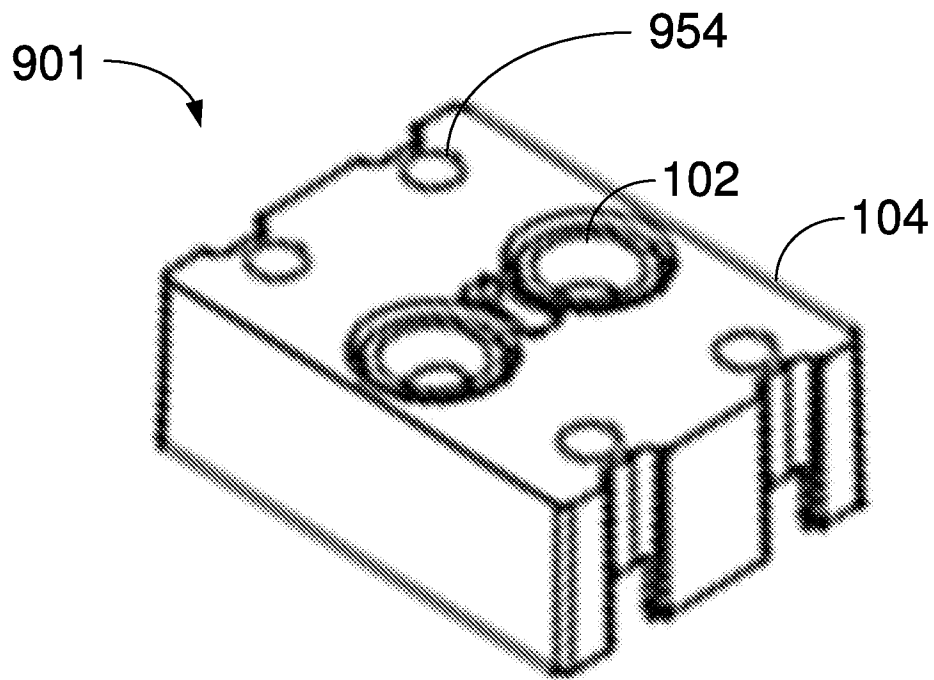


FIG. 9A

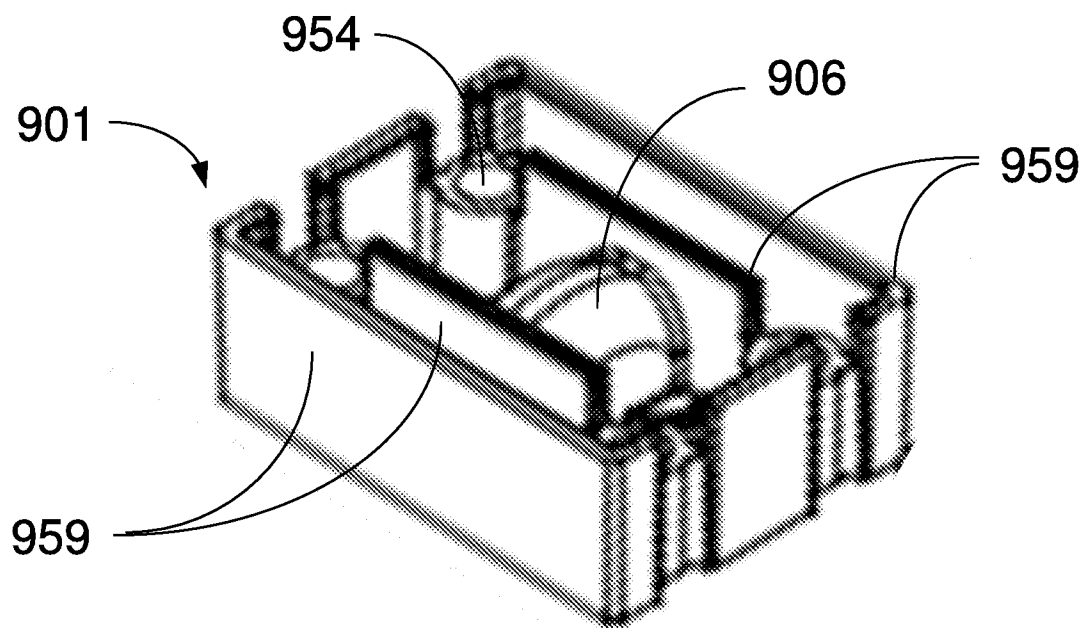


FIG. 9B

10/21

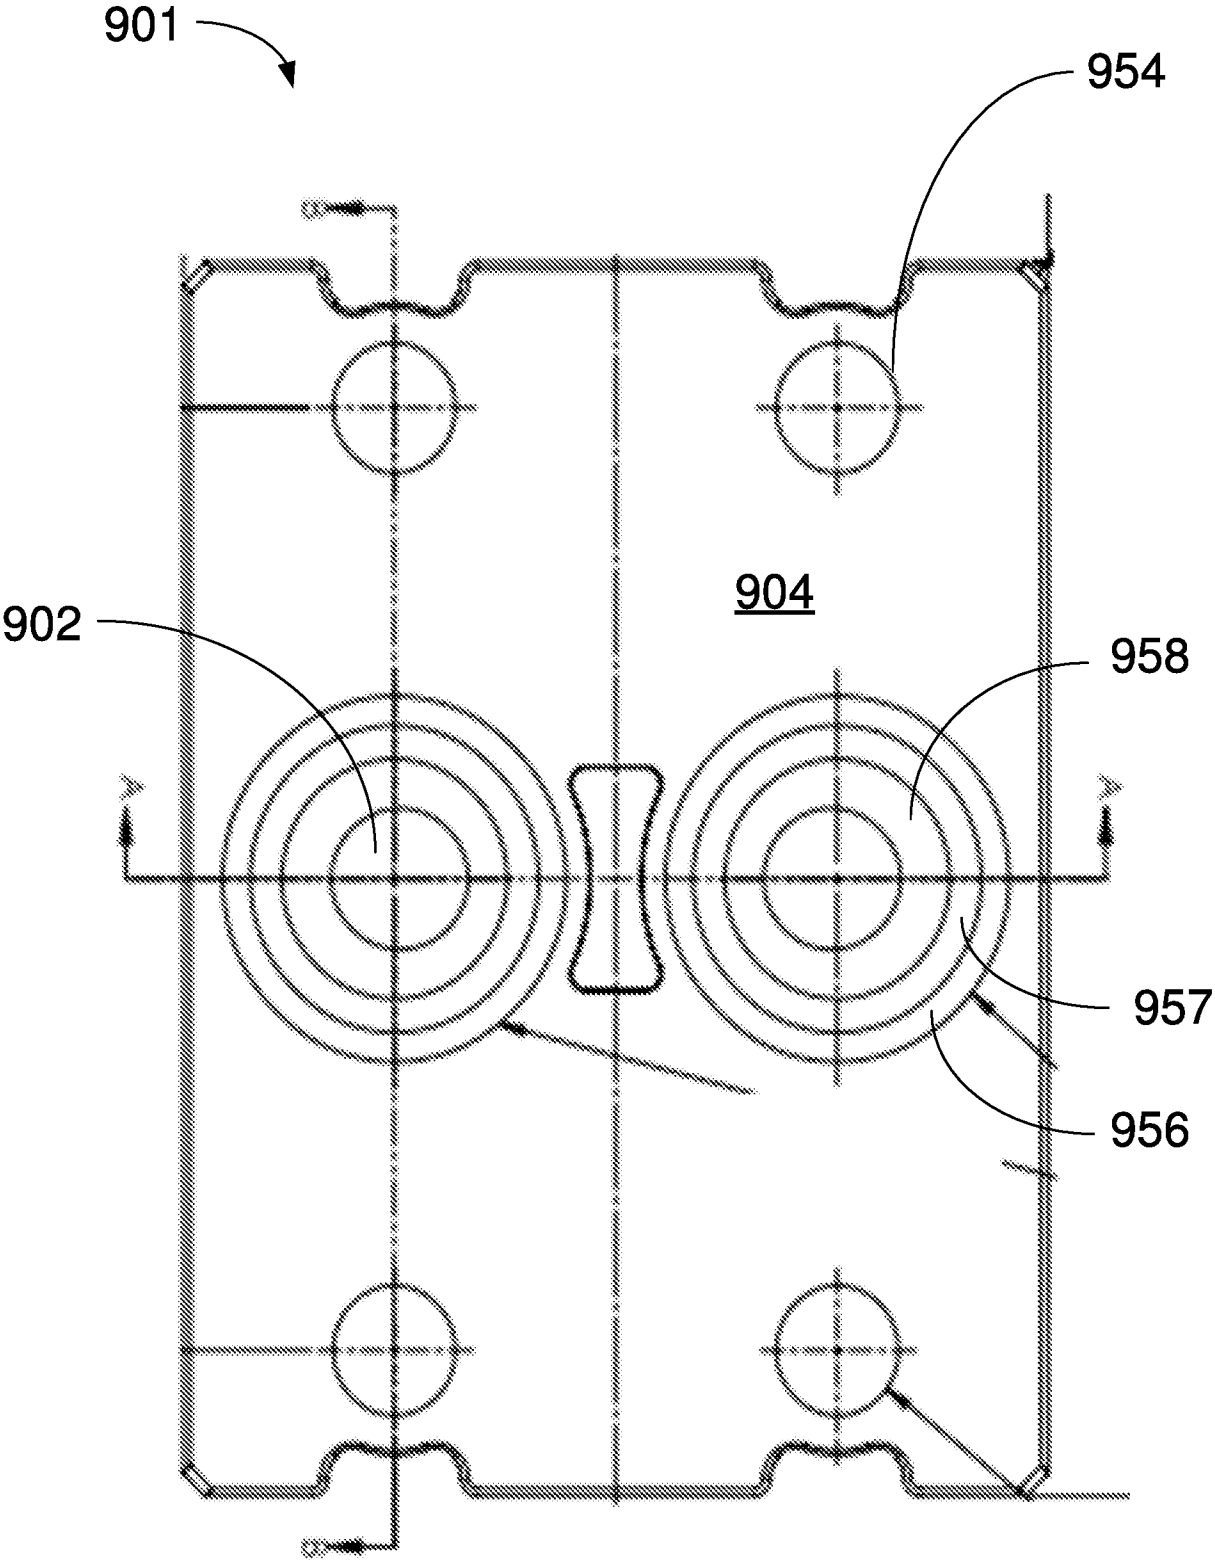


FIG. 10A

11/21

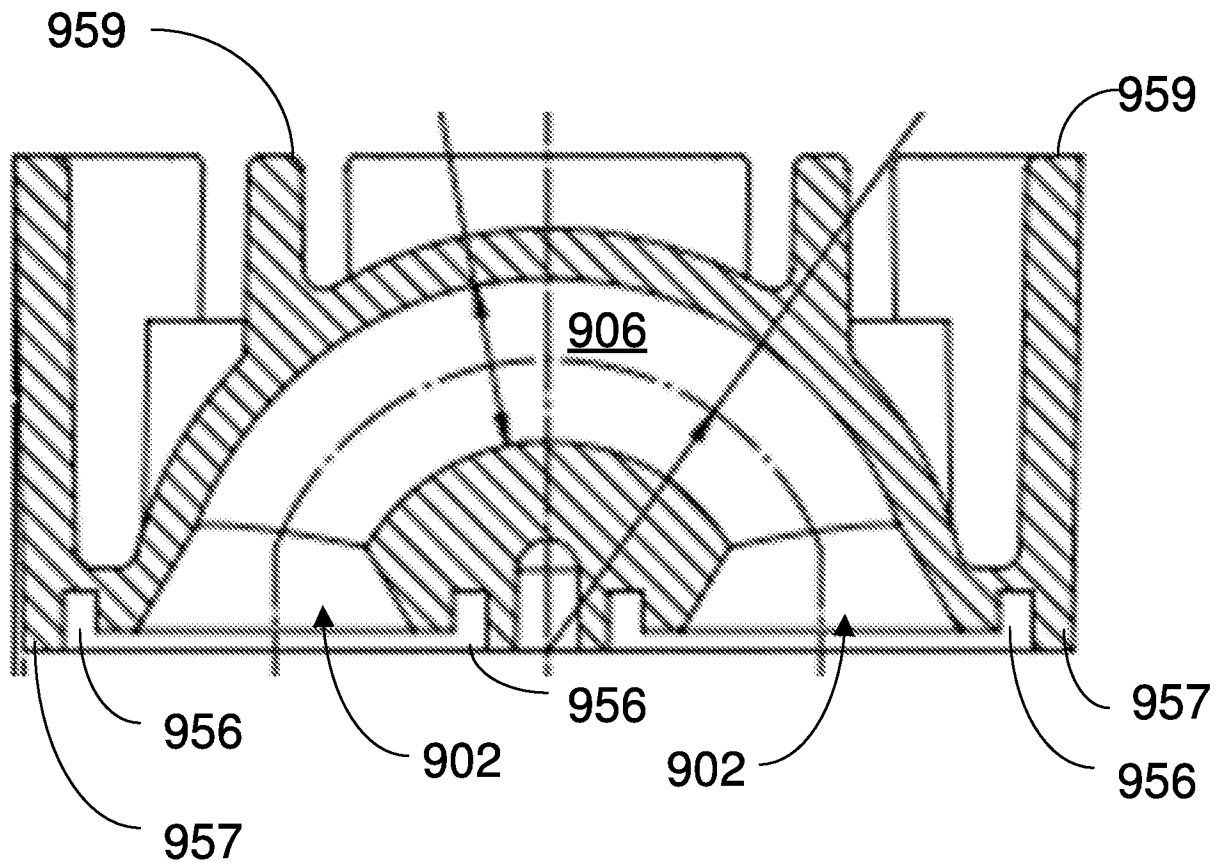


FIG. 10B

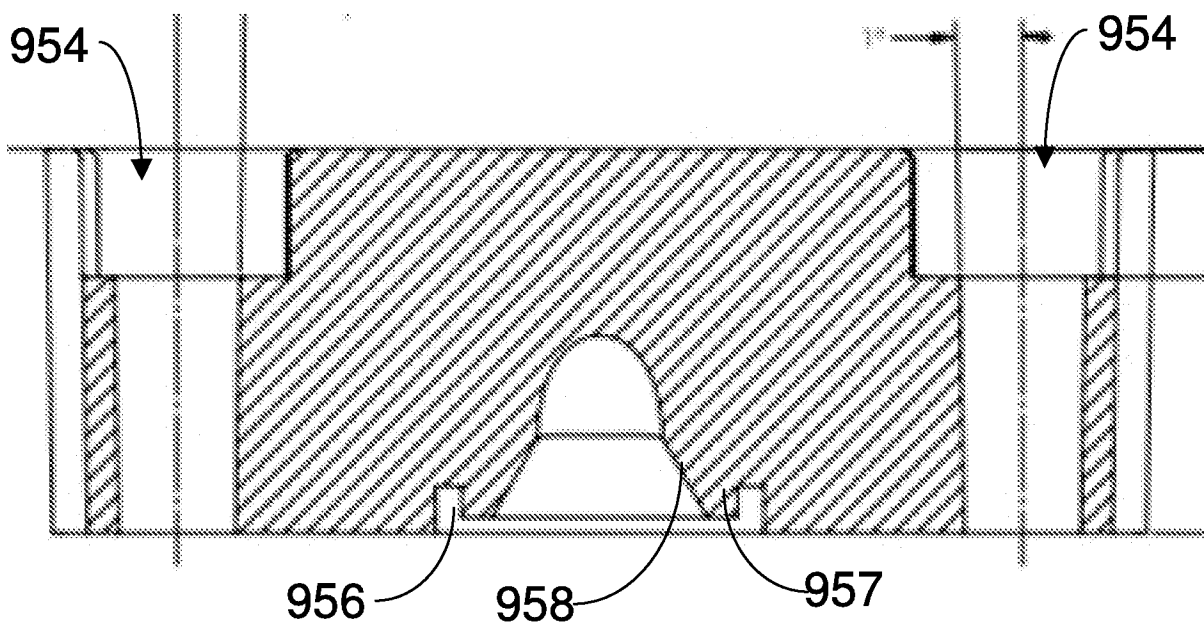


FIG. 10C

12 / 21

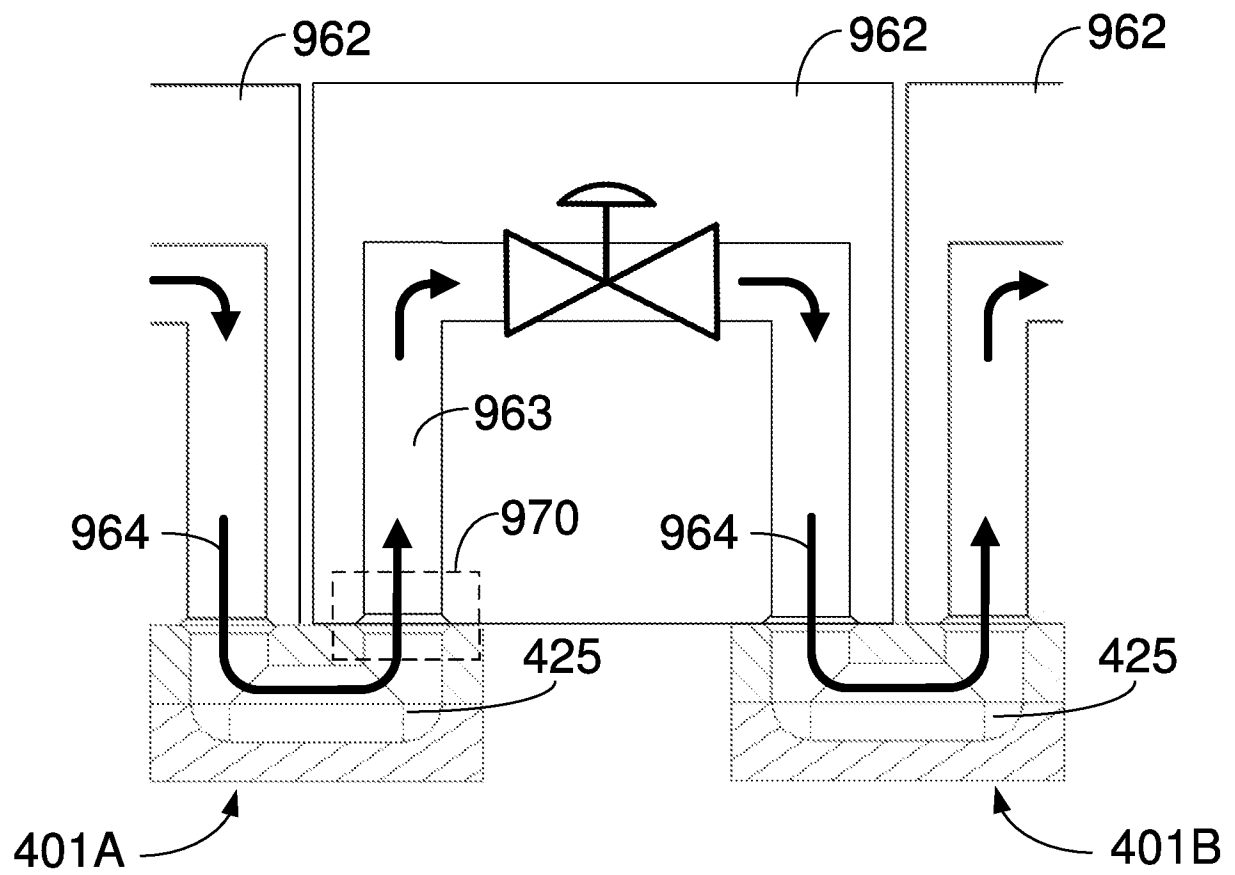


FIG. 11A

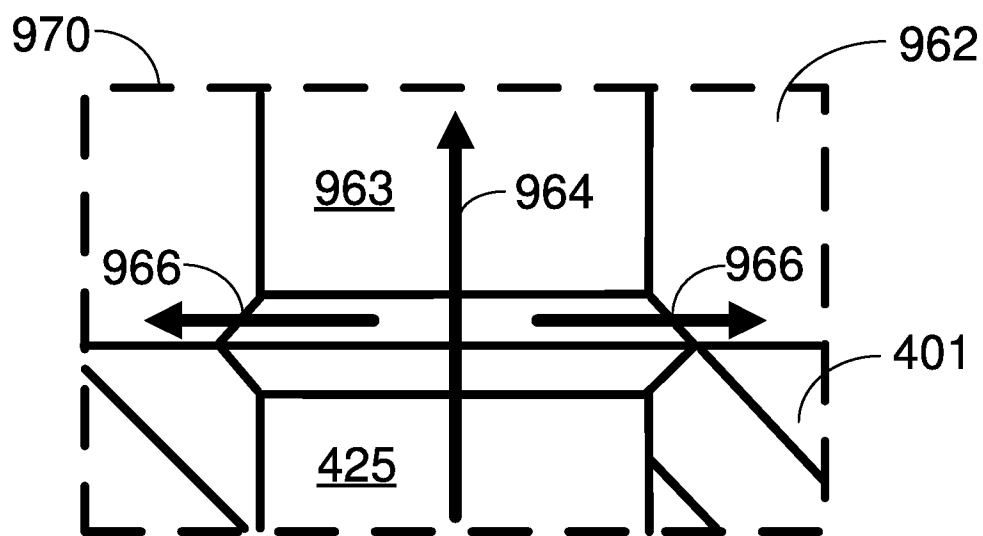


FIG. 11B

13/21

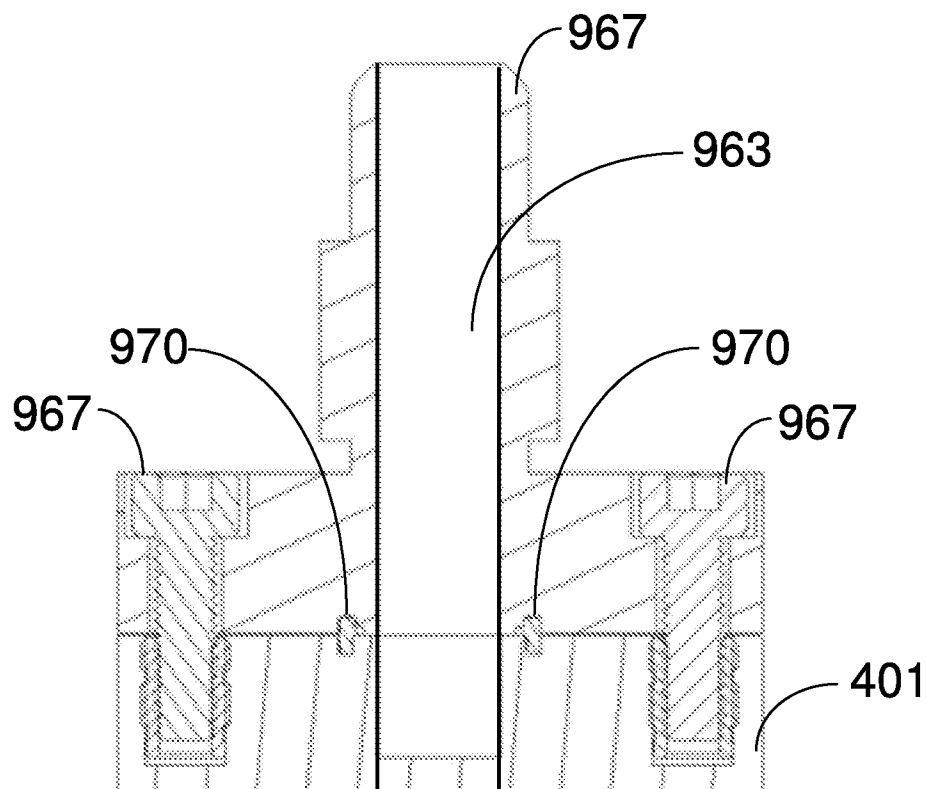


FIG. 12A

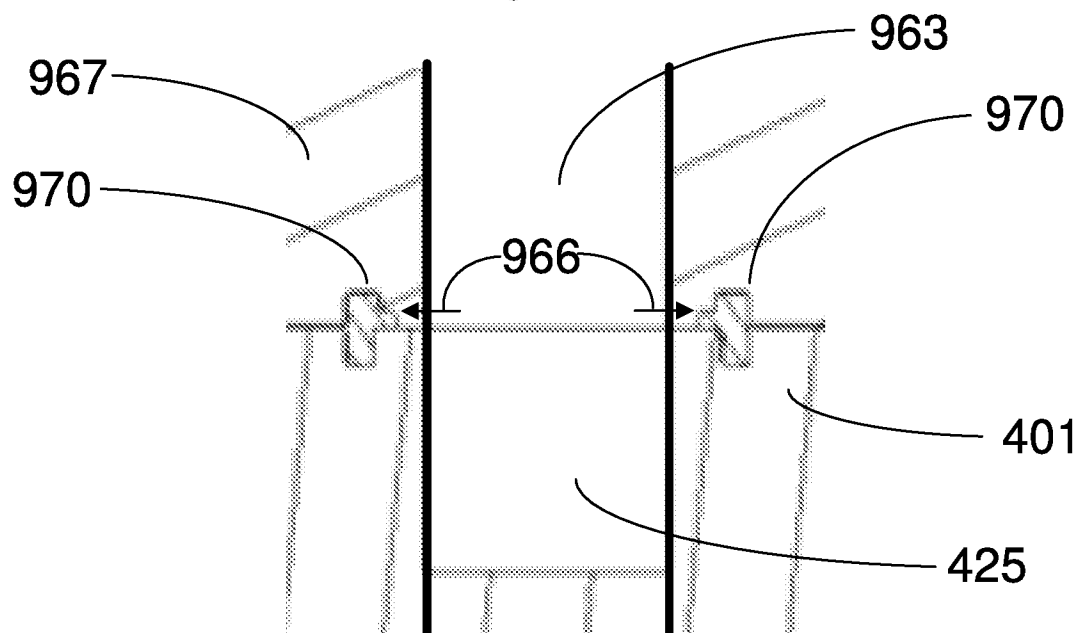


FIG. 12B

14/21

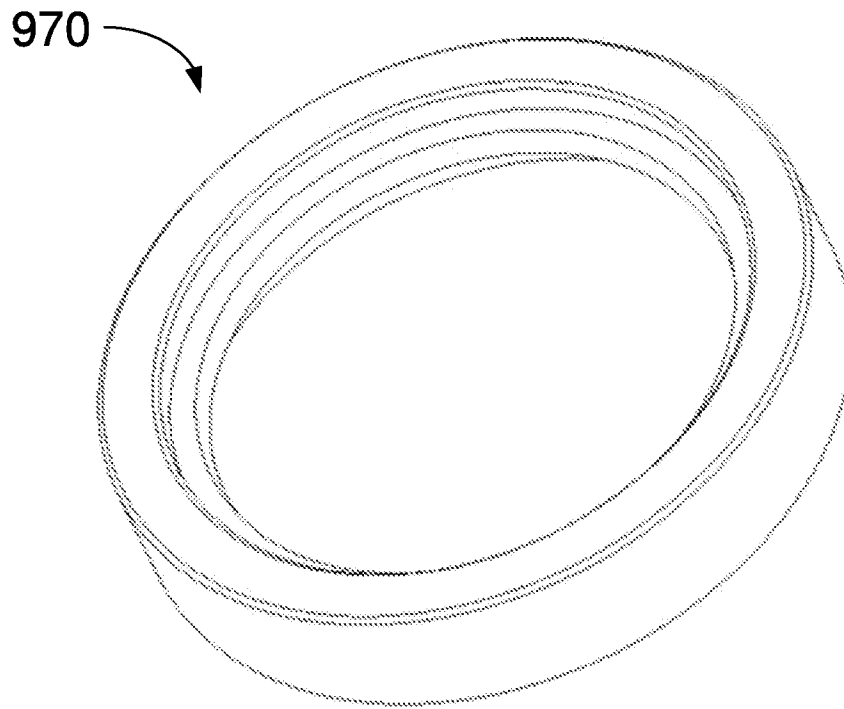


FIG. 13A

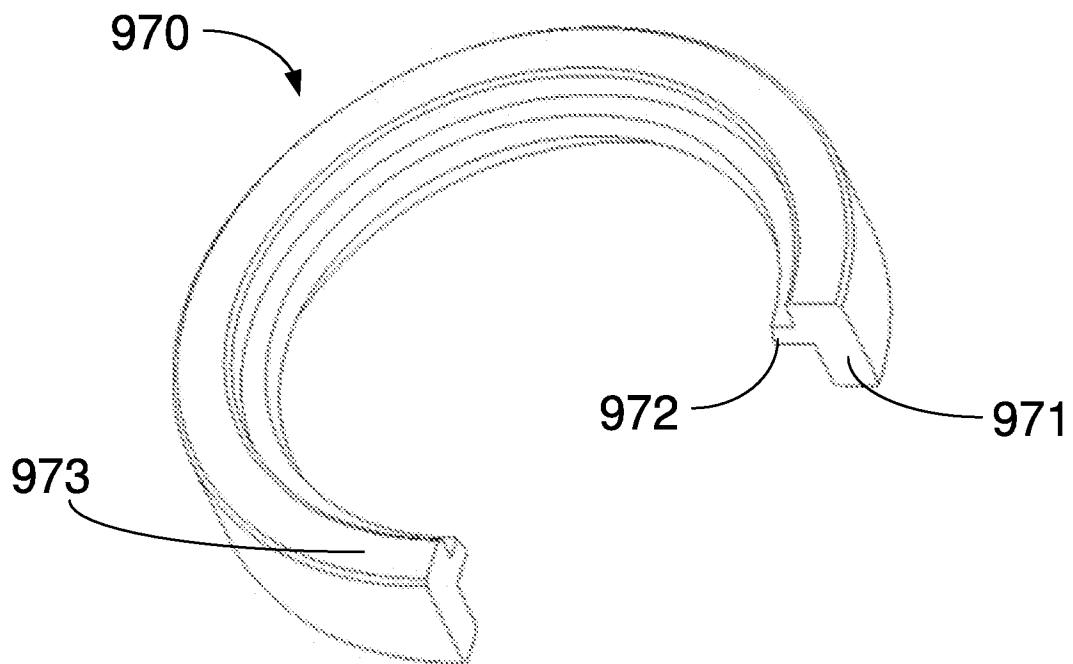


FIG. 13B

15/21

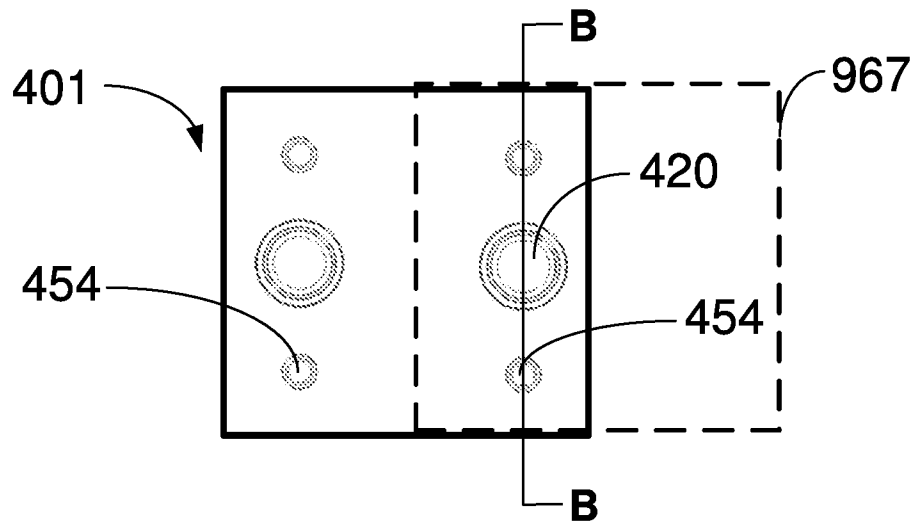


FIG. 14A

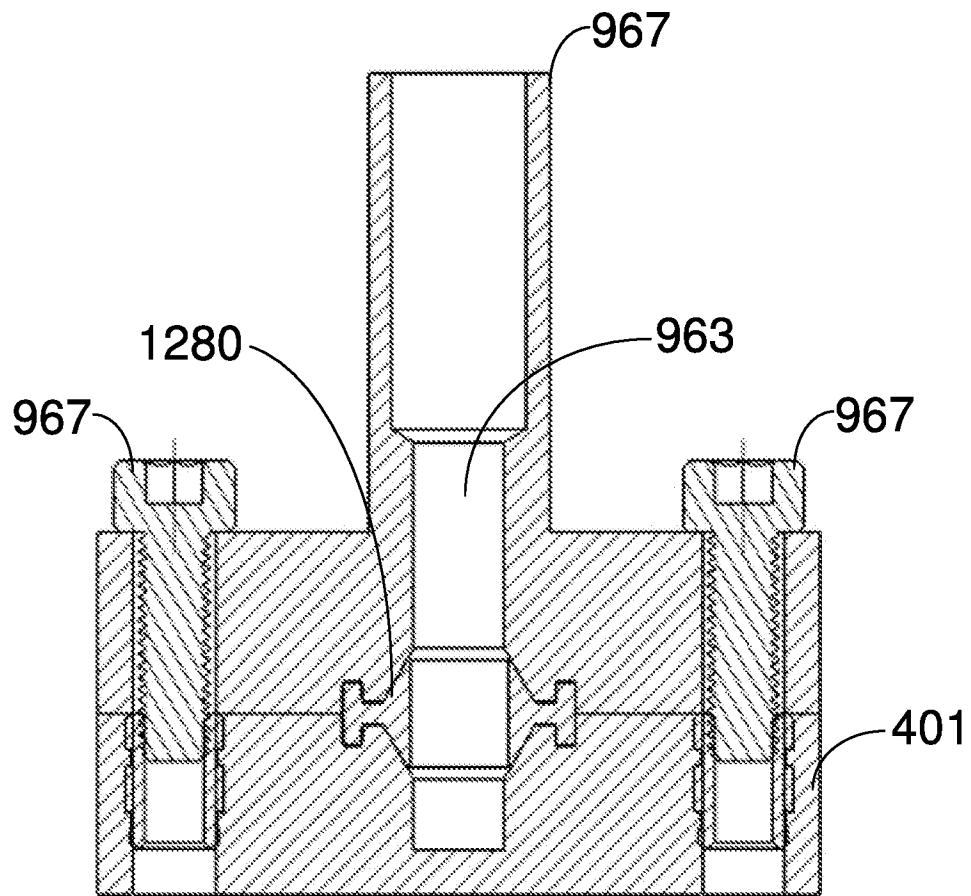


FIG. 14B

16/21

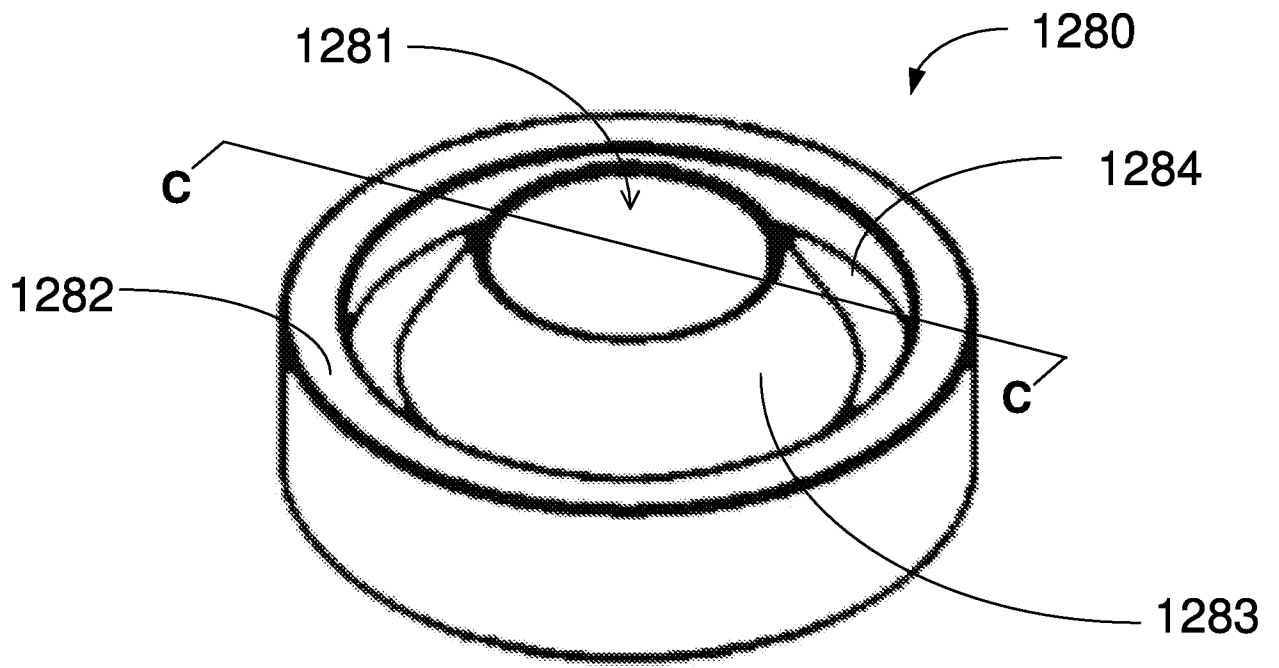


FIG. 15A

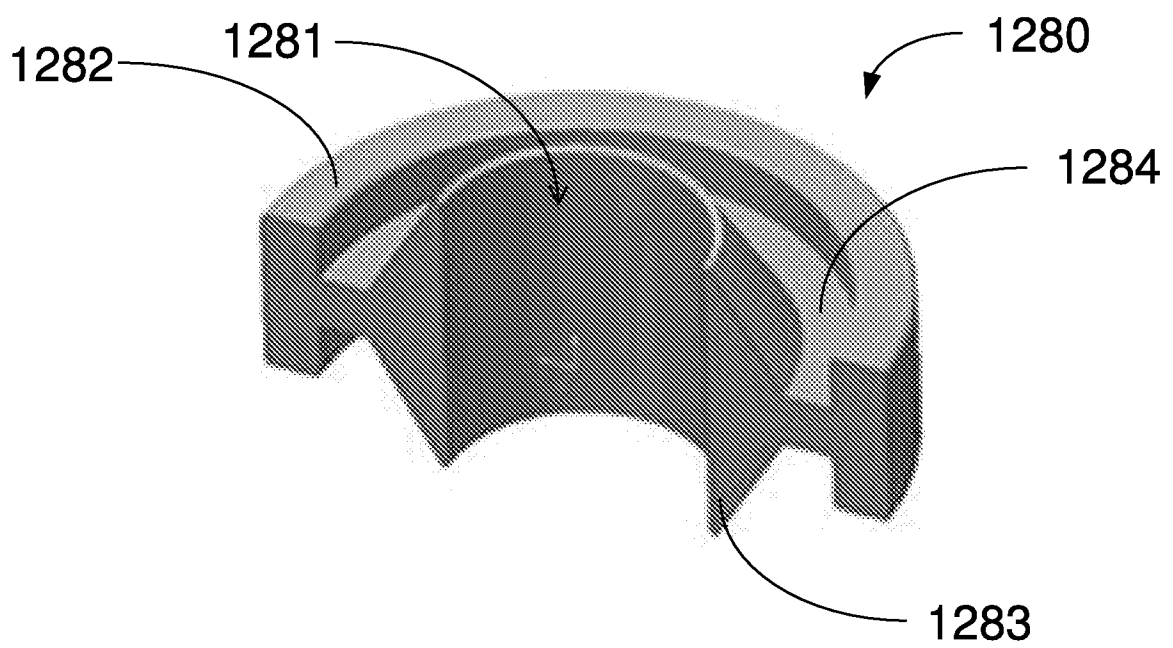


FIG. 15B

17/21

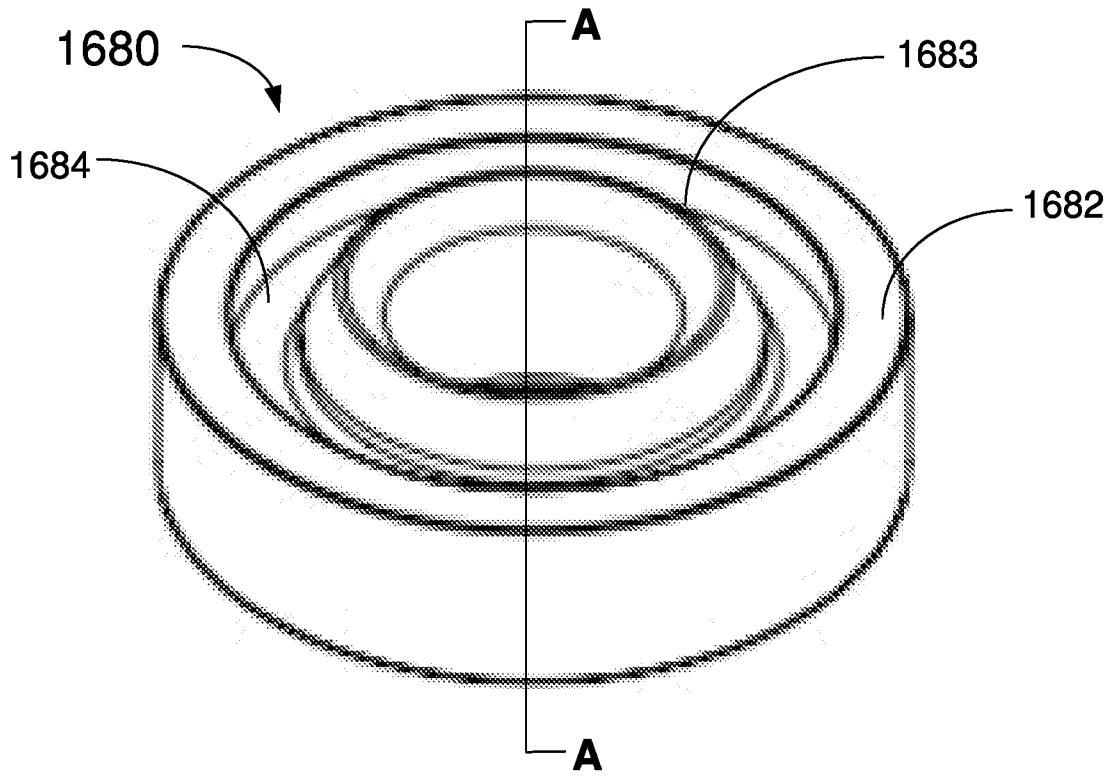


FIG. 16A

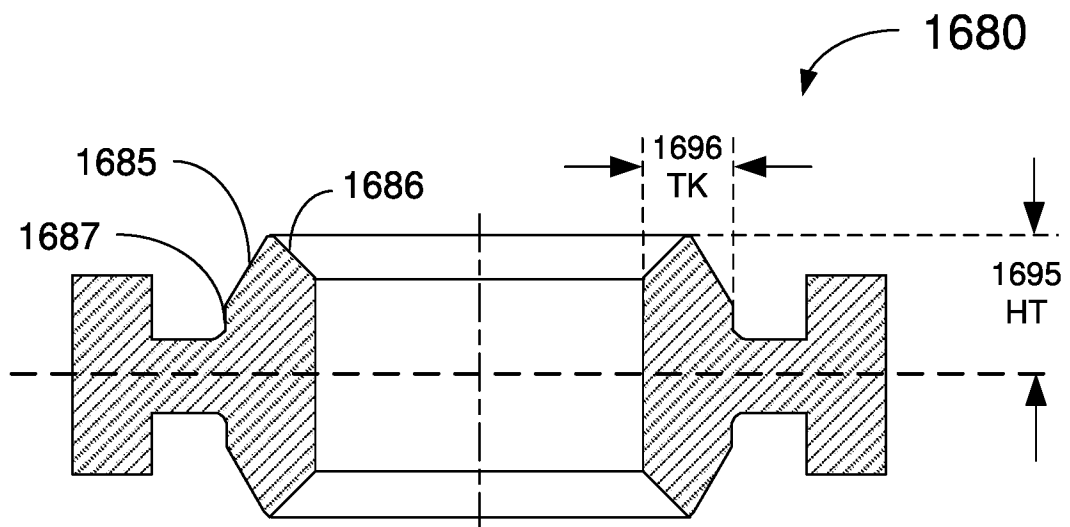


FIG. 16B

18/21

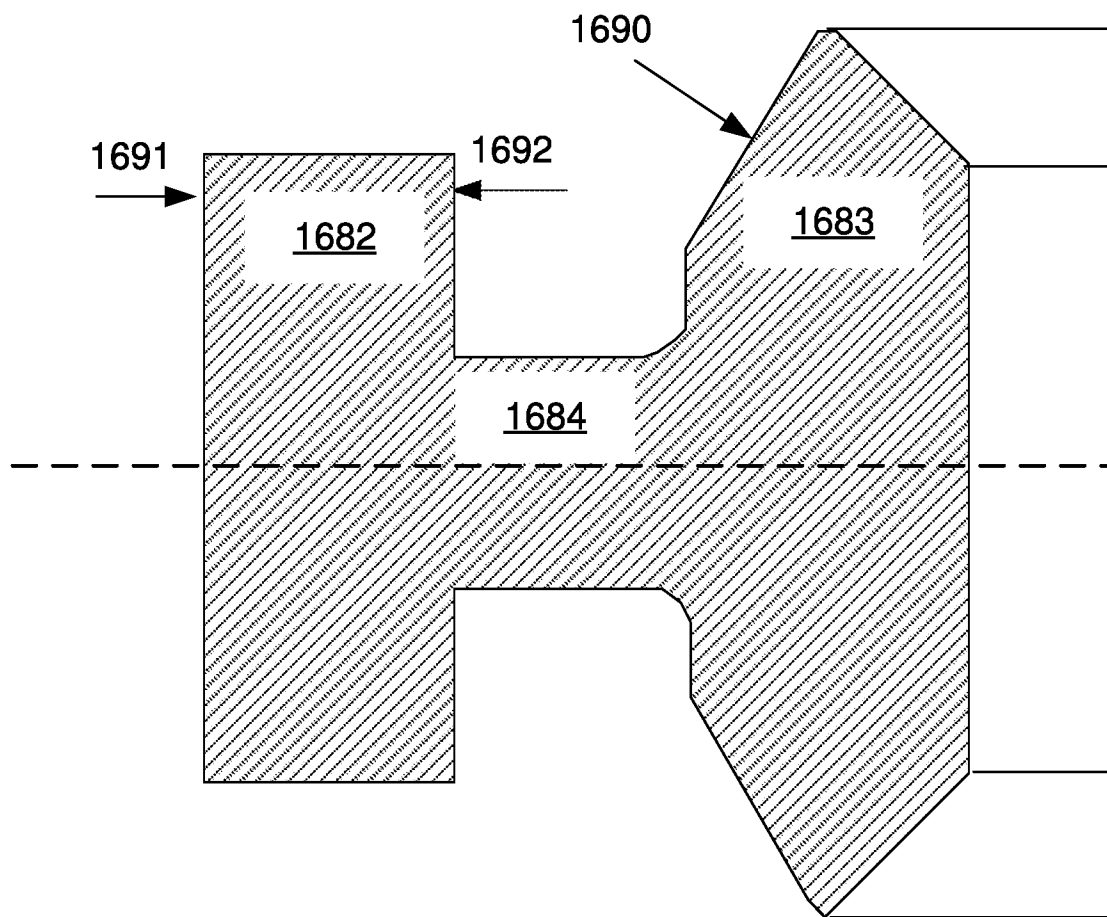


FIG. 16C

19/21

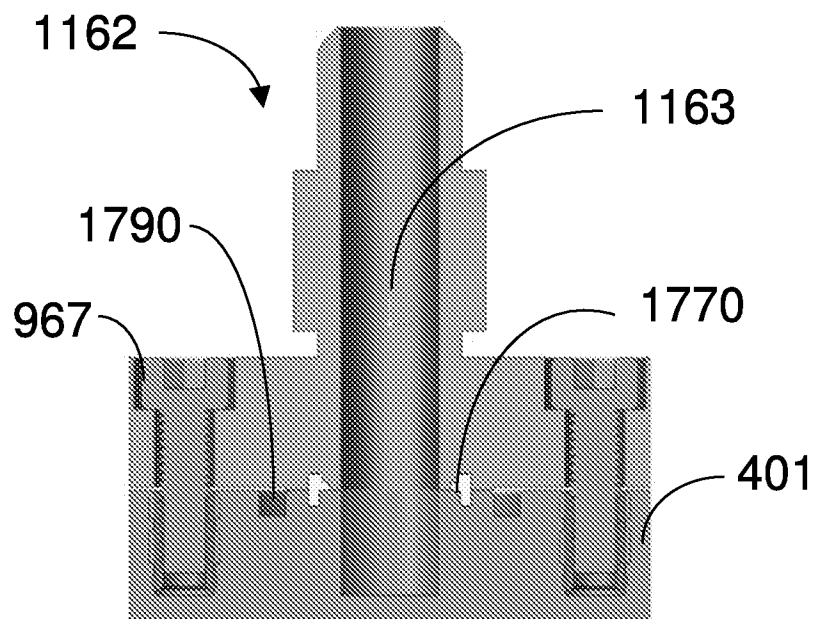


FIG. 17A

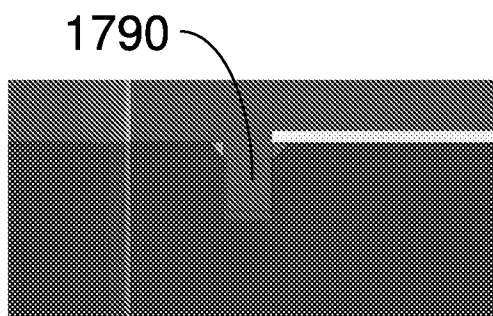


FIG. 17B

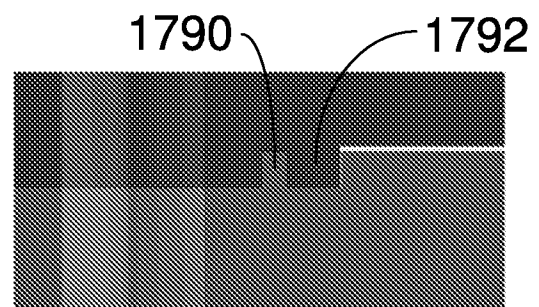


FIG. 17C

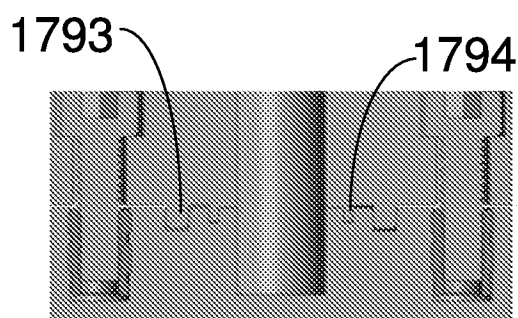


FIG. 17D

20/21

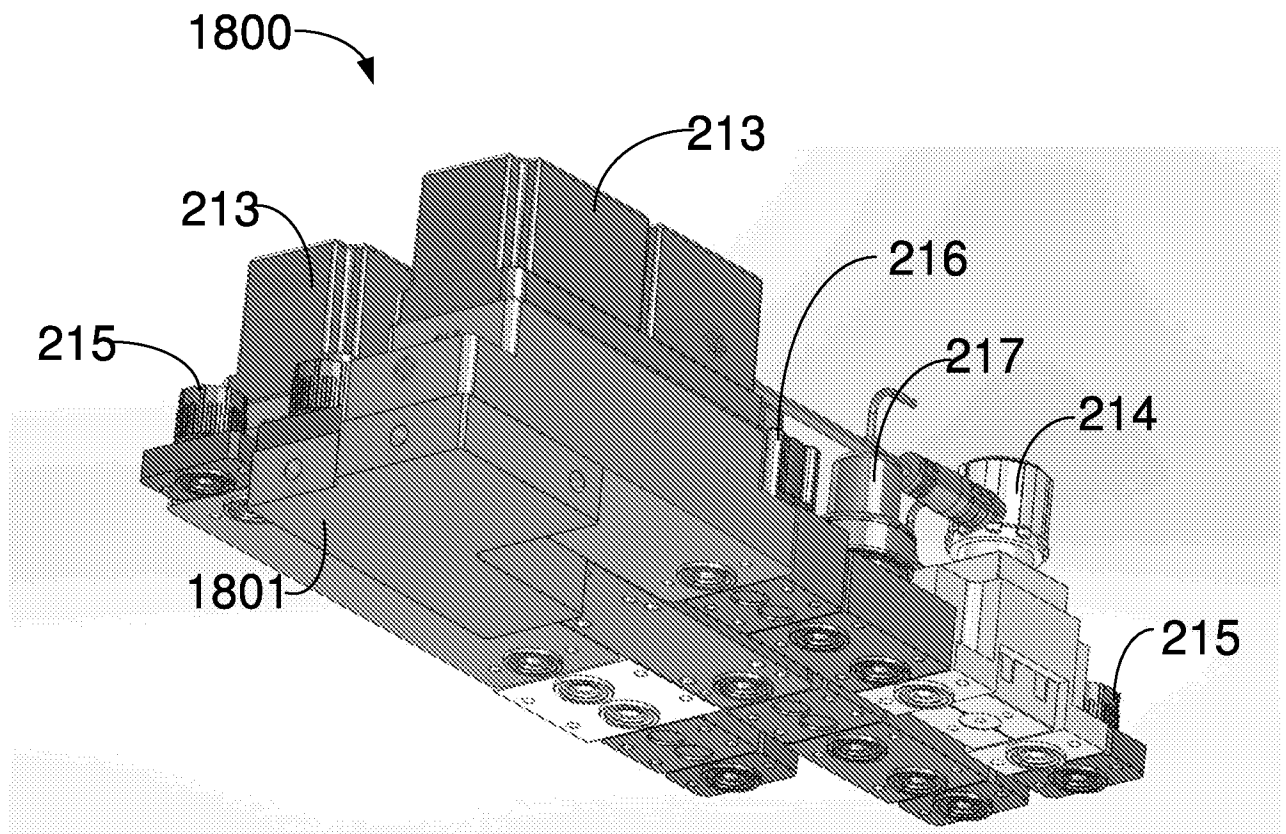


FIG. 18

21/21

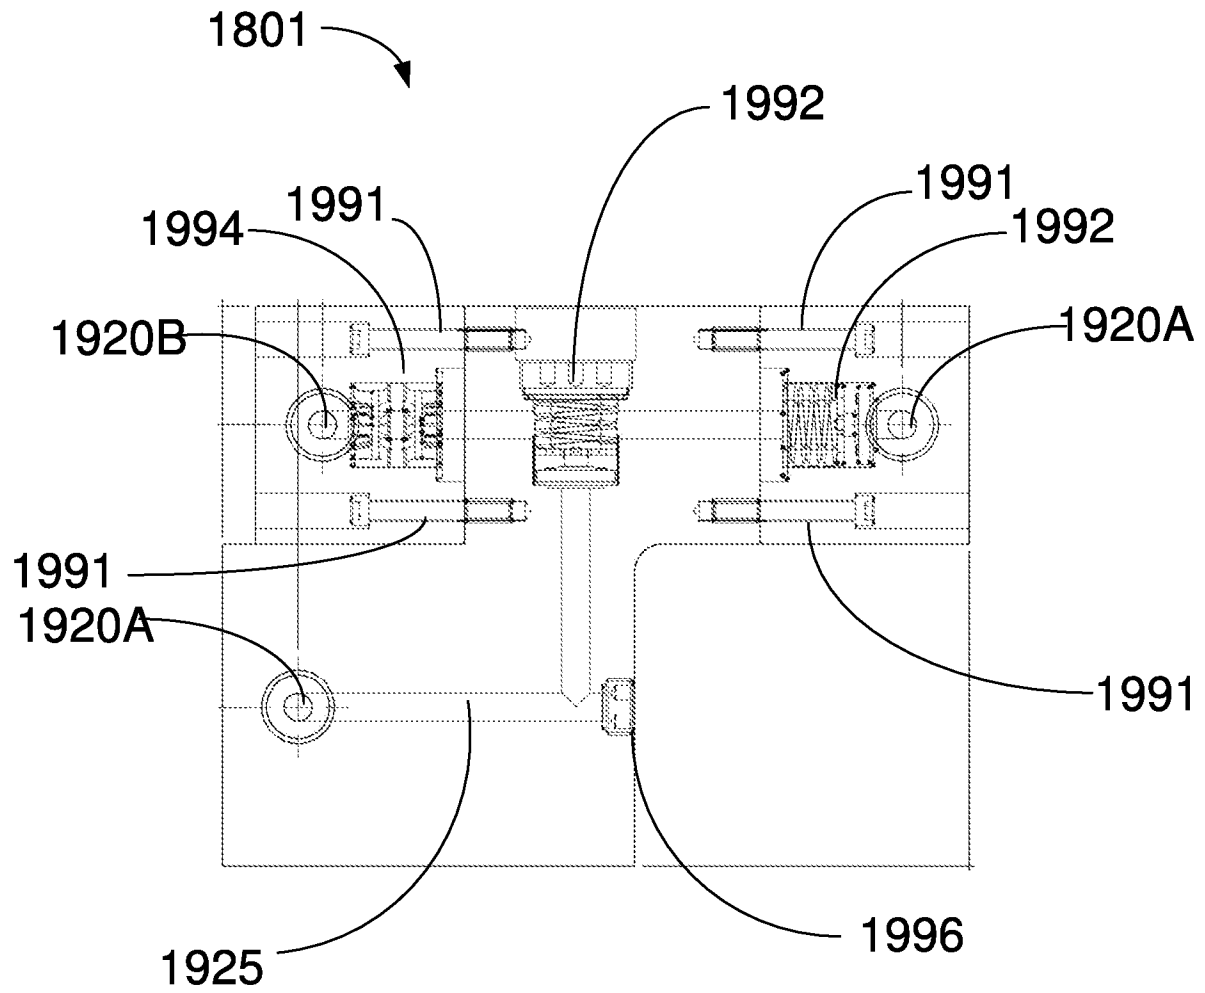


FIG. 19

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2017/026022**A. CLASSIFICATION OF SUBJECT MATTER****H01L 21/67(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 21/67; B23K 1/20; B23K 20/24; F16K 27/00; F16K 11/10; F16L 41/02; F16K 1/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: liquid delivery system, block, port, passageway, active component, polymer, groove, layer, fusion bonding

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6546961 B2 (FUKUSHIMA, YOSHITOMO) 15 April 2003 See column 2, lines 14-16, column 3, lines 38-51, column 4, lines 37-55, column 6, lines 51-58, claim 1, and figures 2-6, 9a-9c.	1-20,36-38
Y	US 2013-0276928 A1 (VISTADELTEK, LLC) 24 October 2013 See paragraphs [0101], [0115], [0120] and figures 2A-2G.	1-20,36-38
Y	US 2008-0202614 A1 (MAMYO et al.) 28 August 2008 See paragraphs [0079]-[0081], [0084] and figures 1-5.	7-9,14
A	US 2008-0296351 A1 (CROCKETT et al.) 04 December 2008 See paragraphs [0126]-[0130] and figures 2A-2C, 2F.	1-20,36-38
A	US 2005-0241707 A1 (HARRIS et al.) 03 November 2005 See paragraphs [0028]-[0029], [0040] and figures 4A-6.	1-20,36-38



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 September 2017 (21.09.2017)

Date of mailing of the international search report

22 September 2017 (22.09.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office

189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

LEE, Dal Kyong

Telephone No. +82-42-481-8440



International application No.
PCT/US2017/026022

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 21-35,43
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
Since claims 21-35 refer to a plurality of independent claims, it is difficult to determine the matter for which protection is sought.
Claim 43 is regarded to be unclear because the claims refer to multiple dependent claims which do not comply with PCT Rule 6.4(a).
3. ☒ Claims Nos.: 39-42
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/026022

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6546961 B2	15/04/2003	JP 2002-048299 A	15/02/2002
		JP 4156184 B2	24/09/2008
		KR 10-0718936 B1	16/05/2007
		KR 10-2002-0011331 A	08/02/2002
		US 2002-0017329 A1	14/02/2002
US 2013-0276928 A1	24/10/2013	CN 102804335 A	28/11/2012
		CN 102804335 B	21/10/2015
		HK 1177552 A1	30/09/2016
		KR 10-2012-0035157 A	13/04/2012
		SG 176152 A1	29/12/2011
		TW 201115672 A	01/05/2011
		TW I534922 B	21/05/2016
		US 2010-0313976 A1	16/12/2010
		US 2014-0020779 A1	23/01/2014
		US 8496029 B2	30/07/2013
		WO 2010-144541 A2	16/12/2010
		WO 2010-144541 A3	03/03/2011
US 2008-0202614 A1	28/08/2008	CN 101255929 A	03/09/2008
		CN 101255929 B	09/02/2011
		JP 2008-208900 A	11/09/2008
		JP 5183935 B2	17/04/2013
		KR 10-0961509 B1	08/06/2010
		KR 10-2008-0079197 A	29/08/2008
		US 2011-0277325 A1	17/11/2011
US 2008-0296351 A1	04/12/2008	CN 101681803 A	24/03/2010
		TW 200918221 A	01/05/2009
		US 2009-057375 A1	05/03/2009
		US 7798388 B2	21/09/2010
		WO 2008-150482 A2	11/12/2008
		WO 2008-150482 A3	29/01/2009
US 2005-0241707 A1	03/11/2005	CN 100497847 C	10/06/2009
		CN 1756876 A	05/04/2006
		EP 1601840 A2	07/12/2005
		EP 1601840 A4	14/11/2007
		EP 1601840 B1	22/04/2009
		JP 2006-519339 A	24/08/2006
		JP 4337058 B2	30/09/2009
		US 2004-0173270 A1	09/09/2004
		US 6907904 B2	21/06/2005
		US 7055550 B2	06/06/2006
		WO 2004-079785 A2	16/09/2004
		WO 2004-079785 A3	24/02/2005