



(86) Date de dépôt PCT/PCT Filing Date: 2017/01/05

(87) Date publication PCT/PCT Publication Date: 2017/07/13

(45) Date de délivrance/Issue Date: 2023/08/22

(85) Entrée phase nationale/National Entry: 2018/07/06

(86) N° demande PCT/PCT Application No.: EP 2017/050183

(87) N° publication PCT/PCT Publication No.: 2017/118686

(30) Priorité/Priority: 2016/01/07 (DK PA 2016 00008)

(51) Cl.Int./Int.Cl. *C07C 29/141* (2006.01),
C07C 29/145 (2006.01), *C07C 29/60* (2006.01),
C07C 31/20 (2006.01)


(72) Inventeurs/Inventors:
HOLM, MARTIN SPANGSBERG, DK;
OSMUNDSEN, CHRISTIAN MARUP, DK;
TAARNING, ESSEN, DK;
SOLVHOJ, AMANDA BIRGITTE, DK;
LARSEN, MORTEN BOBERG, DK

(73) Propriétaire/Owner:
TOPSOE A/S, DK

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : PROCÉDE POUR LA PRÉPARATION D'ETHYLENE GLYCOL A PARTIR DE SUCRES

(54) Title: PROCESS FOR THE PREPARATION OF ETHYLENE GLYCOL FROM SUGARS

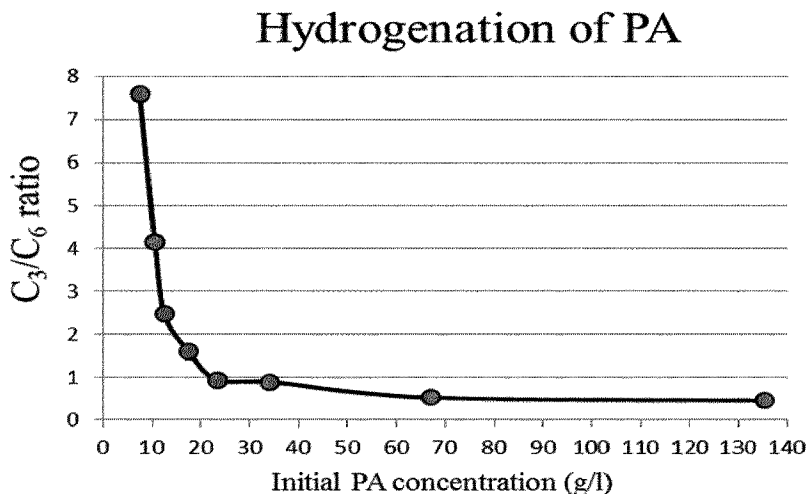

(57) Abrégé/Abstract:

A process for the preparation of ethylene glycol and other C₁-C₃ hydroxy compounds comprising the steps of hydrogenating a composition comprising C₁-C₃ oxygenate compounds. In particular the process is suitable for hydrogenating a composition comprising different C₁-C₃ oxygenate compounds, such as the product from a thermolytic fragmentation of a sugar composition.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2017/118686 A1

(43) International Publication Date
13 July 2017 (13.07.2017)

(51) International Patent Classification:

C07C 29/141 (2006.01) C07C 29/60 (2006.01)
C07C 29/145 (2006.01) C07C 31/20 (2006.01)

(21) International Application Number:

PCT/EP2017/050183

(22) International Filing Date:

5 January 2017 (05.01.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

PA 2016 00008 7 January 2016 (07.01.2016) DK

(71) Applicant: HALDOR TOPSØE A/S [DK/DK]; Haldor
Topsøes Allé 1, 2800 Kgs. Lyngby (DK).

(72) Inventors: HOLM, Martin Spangsberg; 33 Cave Street,
Oxford OX4 1BE (GB). MÅRUP OSMUNDSEN, Chris-
tian; Jægersborg Alle 247, 3.tv., 2820 Gentofte (DK).
TAARNING, Esben; Smallegade 24, 3th, 2000 Frederiks-
berg (DK). SØLVHØJ, Amanda Birgitte; Fensmarksgade
26, 4th, 2200 Copenhagen (DK). LARSEN, Morten
Boberg; Gammeldamsgård 7, 2765 Smørum (DK).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: PROCESS FOR THE PREPARATION OF ETHYLENE GLYCOL FROM SUGARS

Fig. 1

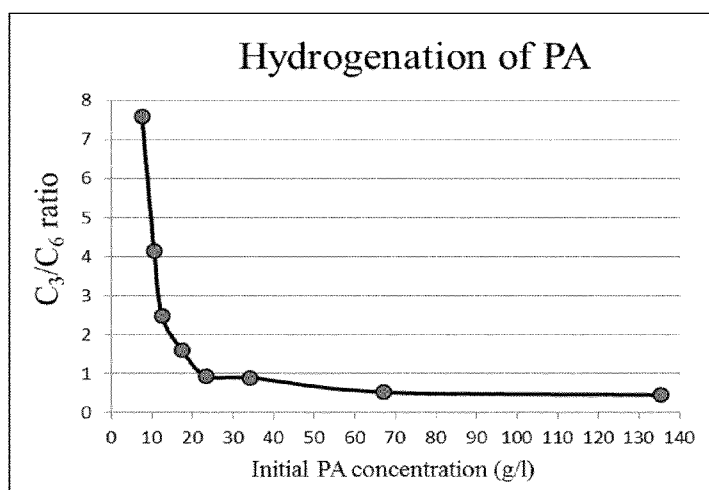

(57) Abstract: A process for the pre-
paration of ethylene glycol and other
C₁-C₃ hydroxy compounds comprising
the steps of hydrogenating a composi-
tion comprising C₁-C₃ oxygenate com-
pounds. In particular the process is
suitable for hydrogenating a composi-
tion comprising different C₁-C₃ oxy-
genate compounds, such as the product
from a thermolytic fragmentation of a
sugar composition.

WO 2017/118686 A1



-
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
- *of inventorship (Rule 4.17(iv))*
- Published:**
- *with international search report (Art. 21(3))*

Title: Process for the preparation of ethylene glycol from sugars**Technical field**

The invention regards an improved hydrogenation process for catalytic hydrogenation of low molecular weight oxygenate compounds to its hydroxyl counterparts. The method is suitable for converting a C₁-C₃-oxygenate composition obtained from thermolytic fragmentation of a sugar composition.

Background

Ethylene glycol can be prepared by a variety of routes including from sugars, e.g. monosaccharides, disaccharides or syrups, via fermentation and hydrogenolysis processes, or by hydroformylation of formaldehyde.

The fermentation route is a five-step process wherein glucose is fermented to ethanol and carbon dioxide, followed by conversion of ethanol to ethylene, ethylene to ethylene oxide and ethylene oxide to ethylene glycol. One disadvantage of this method is that per mole of glucose fermented, two moles of carbon dioxide are produced together with two moles of ethanol; this has the effect that a theoretical maximum 67% of the carbon present in the glucose can be transformed to ethanol.

The hydrogenolysis route is a two-step process wherein glucose is reduced to sorbitol followed by hydrogenolysis of sorbitol to ethylene glycol, as illustrated by US 6,297,409 B1 and US 2008/0228014 A1. Significant quantities of propylene glycol, compared to ethylene glycol, are formed via the hydrogenolysis process. Additionally, the amount of catalyst used is significant and appears difficult to regenerate in order to reuse. Furthermore, the byproducts formed, in particular butanediols, are difficult to separate from the desired product. In particular, the industrially favorable method of distillation for separation (purification) purposes is extremely difficult to apply as the byproducts have very similar boiling points to the final product, and the desired product may react further, as illustrated in US2014/0039224 A1 and US 5,393,542 B1.

The hydroformylation route is a two-step process wherein glycolaldehyde is prepared from formaldehyde, carbon monoxide and hydrogen, followed by hydrogenation of the glycolaldehyde to ethylene glycol, as illustrated in US 4,496,781 B1. There appears to

be several extraction steps present in order to separate formaldehyde from glycolaldehyde and proceed with the hydrogenation reaction.

5 It is known that sugars may be subjected to thermolytic fragmentation to obtain a fragmentation product composition comprising oxygenate compounds such as glycolaldehyde (US 7,094,932 B2); the crude fragmentation product composition comprises C₁-C₃ oxygenate compounds, including formaldehyde, glycolaldehyde, glyoxal, pyruvaldehyde and acetol. The main product of this reaction is glycolaldehyde [US 7,094,932
10 B2]. Water is the solvent of the reaction.

It is also known that pure glycolaldehyde may be hydrogenated to ethylene glycol. US 4,200,765 B1 discloses hydrogenation of glycolaldehyde under severe conditions: at
15 high pressure [3000 psi (ca. 202 bar)], high temperature [150°C], and with an organic solvent [N-methyl pyrrolidine] in the presence of a palladium on carbon [Pd/C] catalyst for an extended period [5 h]. US 4,321,414 B1 and US 4,317,946 B1 disclose the hydrogenation of glycolaldehyde with a homogenous ruthenium catalyst and US 4,496,781 B1 discloses a continuous flow hydrogenation at low pressure [500 psi (ca. 35 bar)], high temperature [160°C] with a ruthenium on carbon catalyst [Ru/C] in ethylene glycol and trace acetonitrile as solvent.
20

As illustrated, the two steps, pyrolysis of glucose to obtain, *inter alia* glycolaldehyde, and hydrogenation of pure glycolaldehyde in the liquid phase, appear to be independently feasible. However, in order for the pyrolysis product composition to be hydrogenated, laborious separation processes are employed to remove formaldehyde from
25 the pyrolysis product composition to avoid formaldehyde poisoning of the hydrogenation catalysts [US 5,210,337 B1]. US 5,393,542 B1 discloses an exemplary purification process comprising multiple distillation steps followed by a solvent-induced precipitation to obtain a glycolaldehyde composition free of formaldehyde.

30

With regard to hydrogenation of glycolaldehyde, although there is the provision of suitable reaction conditions to obtain a high yield in organic solvents, the reaction with water

as a solvent appears to be less successful. US 5,393,542 B1 discloses thermal degradation of glycolaldehyde (2-hydroxyacetaldehyde) when subjected to temperatures of 90 °C or higher and where water is the solvent.

5 EP 0 002 908 B1 discloses the variation in yield (conversion and selectivity) of the hydrogenation of glycolaldehyde with the use of various catalysts in an aqueous solution at 110°C: Raney Nickel [100% conversion 49.4% selectivity], 10% Pd/C [62% conversion, 61% selectivity] and 10% Pt/C [100% conversion, 73% selectivity]. A problem with catalysts used in liquid water is the strain on the catalyst. However, mild reaction conditions are favorable in order to ensure longevity of the catalyst on an industrial scale.

The choice of catalyst may affect the decomposition of glycolaldehyde when in the presence of the catalyst; US 5,210,337 B1 discloses the problem of glycolaldehyde 'un-zipping' to form formaldehyde and consequently poisoning the hydrogenation catalyst.

15 It is also possible that glycolaldehyde may self-condense or condense with another C₁-C₃ oxygenate compound, also illustrated in US 5,210,337 B1. Accordingly, both the choice of catalyst and the stability of the glycol product may affect the degree of reduction of the glycolaldehyde. E.g. some catalysts may reduce the glycolaldehyde to ethanol or ethane, i.e. over reduce the glycolaldehyde.

20 Additionally, it is known that an increase in temperature, pressure, concentration of substrate and/or concentration of product as well as the amount and identity of catalyst present may affect the yield (conversion and selectivity) of hydrogenation reactions of glycolaldehyde. Handbook of Heterogeneous Catalytic Hydrogenation for Organic Synthesis, Shigeo Nishimura, ISBN: 978-0-471-39698-7, April 2001.

In summary, the efforts to provide an industrial scale process for hydrogenation of the fragmentation product composition of an industrial scale thermolytic fragmentation of sugars to produce ethylene glycol have shown to be challenging. Formaldehyde

30 formed in the thermolytic fragmentation has shown to poison the hydrogenation catalyst, even at low concentrations. In addition, the reaction conditions have shown to unpredictably affect the selectivity, conversion rate and hydrogenation catalyst lifetime. Finally, formation of unwanted side products may complicate the subsequent purification of the hydrogenation product composition.

Consequently, there is still a need for improving the process of producing ethylene glycol from sugars via thermolytic fragmentation of sugars followed by catalytic hydrogenation of the resulting fragmentation product composition to avoid toxic compositions, obtain higher yields and higher selectivities and reduce the amount of undesirable side products at low costs to make it suitable for industrial scale production of ethylene glycol.

Summary of Invention

The catalytic hydrogenation processes available in the prior art have not been successful in achieving high selectivities for ethylene glycol and even worse for propylene glycol. Also the yields have not been satisfying. Thus the existing processes have not provided methods suitable for industrial scale production of ethylene glycol or propylene glycol. The inventors have found that having the complex composition containing different oxygenates and in addition many other components has made it problematic to conduct a catalytic hydrogenation according to prior art processes.

Process of producing C₁-C₃ hydroxy compounds from C₁-C₃ oxygenate compounds

According to the present invention a process is provided for the preparation of a C₁-C₃ hydroxy compound, comprising the steps of:

- a) Providing an oxygenate feed composition comprising a C₁-C₃ oxygenate compound in a total concentration of at least 20% by weight of oxygenate feed composition; and
- b) Providing a chemical reactor comprising
 - i. an inlet zone in fluid communication with
 - ii. a reaction zone comprising a heterogeneous hydrogenation catalyst material in fluid communication with
 - iii. an outlet zone;then
- c) feeding the oxygenate feed composition of step a) to the reactor inlet zone i) of step b) to obtain an initial total concentration of C₁-C₃ oxygenate compound of less than 20% by weight of reactor fluid in the reaction zone ii) of step b); and

- d) in the reaction zone ii) reacting the C₁-C₃ oxygenate compound with hydrogen in the presence of the catalyst material to obtain a C₁-C₃ hydroxy compound; and then
- e) Recovering from the outlet zone iii) the hydroxy product composition comprising the C₁-C₃ hydroxy compound.

The inventors found that lowering the concentration of C₁-C₃ oxygenate compounds in the reaction zone had surprisingly high impact on the selectivities, in particular for the ethylene glycol and the propylene glycol. In fact, an advantage of the process according to the invention is that the selectivity towards ethylene glycol is at least 80% (moles of ethylene glycol formed per mole C₂ oxygenate (glycolaldehyde, glyoxal) converted), preferably at least 85, 88, 90, 91, 92, 93, 94, 95, 96 or 97%, and the selectivity towards propylene glycol is at least 60% (moles of propylene glycol formed per mole C₃ oxygenate (pyruvaldehyde, acetol) converted), preferably at least at least 65, 70, 75, 80%, 85, 88, 90, 91, 92, 93, 94, 95, 96 or 97%. A selectivity of at least X% implicitly defines a range wherein the upper limit is a selectivity of 100%. Accordingly, a selectivity of ethylene glycol of at least 80% defines a range of from 80-100%, a selectivity of propylene glycol of at least 60% defines a range of from 60-100% and so forth.

Additional advantages include enabling the use of the oxygenate containing product of thermolytic fragmentation of sugar compositions as feed for the preparation of the corresponding hydroxy compounds at high selectivity and high yield; utilizing non-toxic solvents and cheaper catalysts; reducing byproduct production; enabling purification on an industrial scale; and being successful even in the presence of additional compounds such as formaldehyde. The ability to separate byproducts from the ethylene glycol product enables the ethylene glycol to be used in processes such as polymer production. Polymer production requires substrates to be in a highly pure form. All of these desirable advantages makes the production of in particular ethylene glycol from bio-materials such as sugar more attractive industrially and enable processes to become commercially feasible.

In one aspect, the process according to the present invention has a total concentration of C₁-C₃ oxygenate compound in the oxygenate feed composition of at least 25% by weight of oxygenate feed composition, such as at least 30% or 35% or 40% or 45% or

50% or 55% or 60% or 65% or 70% or 75% by weight of oxygenate feed composition. In an embodiment of the present invention, the C₁-C₃ oxygenate compound of the oxygenate feed composition of step a) is a C₂-C₃ oxygenate compound. In another embodiment of the present invention, the oxygenate feed composition of step a) comprises
5 two or more C₁-C₃ oxygenate compounds selected from the group consisting of glycolaldehyde, glyoxal, pyruvaldehyde, acetol and formaldehyde. Even with several different oxygenate compounds in the C₁-C₃ oxygenate feed composition the selectivities obtained are still very high. In a preferred embodiment, the oxygenate feed composition of step a) comprises at least 20% by weight of glycolaldehyde and at least 5% by
10 weight of pyruvaldehyde. Even with such high amounts of glycolaldehyde and in particular of pyruvaldehyde in the C₁-C₃ oxygenate feed composition the selectivities obtained are still very high.

In an aspect of the present invention, the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 50% by weight of the
15 total concentration of C₁-C₃ oxygenate compound in the oxygenate feed composition, such as at least 55% or 60% or 65% or 70% or 75% or 80% or 85% or 90% by weight of the total concentration of C₁-C₃ oxygenate compound in the oxygenate feed composition. Accordingly, the process according to the present invention allows to have a high concentration of C₁-C₃ oxygenate compound in the oxygenate feed composition, a
20 low concentration of C₁-C₃ oxygenate compound in the reaction zone and still a high concentration of C₁-C₃ hydroxy compound in the hydroxy product composition. In an embodiment according to the present invention, the C₁-C₃ hydroxy compound of the hydroxy product composition of step e) is a C₂-C₃ hydroxy compound. In another embodiment according to the present invention, the hydroxy product composition of step
25 e) comprises one or more C₁-C₃ hydroxy compounds selected from the group consisting of methanol, ethylene glycol and propylene glycol.

In an aspect of the present invention the catalyst material of step b) may comprise a metal component selected from the group consisting of ruthenium, ruthenium alloy, rhenium, rhodium, iridium, palladium, platinum, copper and nickel and the support material may be one or more selected from the group consisting of carbon, silica, alumina,
30 titania, and zirconia. Preferred catalyst materials comprises ruthenium on carbon or copper on carbon.

Step d) of the process according to the present invention may be conducted under an initial hydrogen partial pressure of at least 0.5 bar, such as at least 5 bar or at least 40 bar, or between 0.5 and 500 bar or between 0.5 and 200 bar, in particular between 0.5 and 5 bar or between 60 and 140 bar. The reaction of step d) may be conducted under
5 a total pressure of from 0.8-800 bar, such as from 3-500, in particular between 3 and 10 bar or between 40 and 150 bar. The reaction of step d) may be conducted at a temperature in the range of from 50-350°C, such as from 50-250°C, 60-120 °C, 200-250 °C or from 150-200°C.

10 The process according to the present invention may be conducted under conditions to provide liquid phase hydrogenation of the oxygenate compound and with a solvent present in the reaction zone of step d). The inventors have observed challenges in obtaining good selectivities towards ethylene glycol and propylene glycol in catalytic liquid phase hydrogenation of glycolaldehyde and pyruvaldehyde.

15 The reaction conditions of the process according to the present invention may be chosen so that the C₁-C₃ oxygenate compounds and the C₁-C₃ hydroxy compounds are essentially in the liquid phase or in the gas phase during the hydrogenation reaction.

When the hydrogenation is a liquid phase hydrogenation, the hydrogenation is preferably conducted at a temperature in the range of from 60-120°C and a hydrogen partial pressure in the range of from 60-140 bar. When the hydrogenation is a liquid phase hydrogenation, the partial pressure of hydrogen is the partial pressure in the gas phase
20 above, or interspersed with, the hydrogenation fluid, which is proportional to the concentration of hydrogen in the liquid phase.

When the hydrogenation is a gas phase hydrogenation, the hydrogenation is preferably conducted at a temperature in the range of from 200-250°C and a hydrogen partial
25 pressure in the range of from 0.5 and 5 bar.

According to an embodiment of the present invention, the solvent is selected from the group consisting of water, methanol, ethanol, ethylene glycol and propylene glycol; or mixtures thereof.

30 The process according to the present invention is even more advantageous when performed under continuous conditions. Preferably the chemical reactor comprises an inlet and an outlet to accommodate continuous operation of the process.

The hydrogenation may be conducted in a plug flow, or primarily plug flow, type reactor such as a packed bed reactor, a fixed bed reactor, a trickle bed reactor, a fluid bed reactor or a slurry phase reactor. In such reactors a fraction of the hydroxy product composition recovered in step e) may advantageously be transferred to the reaction zone ii) of step b). This recirculation of product to the reactor is a highly advantageous way of lowering the oxygenate concentration in the reaction zone. Not only is the oxygenate concentration lowered, but the glycols of the product stream have a further stabilizing effect on the oxygenates. On an industrial scale it is highly advantageous to use the product as a solvent/diluent in the reaction zone, since there is no need to remove the solvent after the hydrogenation reaction.

It may also be conducted in a stirred tank type reactor, such as a CSTR or a Berty reactor. In this case the back-mixing is so pronounced that upon entering the reaction zone, the oxygenate feed composition is mixed with high amounts of product thus lowering the concentration of oxygenates almost instantly.

As the hydrogenation reaction is highly exothermic, it is desirable to choose reactors having means to control the temperature rise in the hydrogenation reactors. Some reactors suitable for heat removal could be, but is not limited to, multitubular reactors, reactors having cooling between the different catalyst layers (interbed cooling) or recycle reactors.

For liquid phase hydrogenation, an industrially promising reactor approach could be a so called trickle bed reactor, where liquid flows downward over the catalyst bed, and gas is added in either co-current or counter-current flow. A recycle can be used to control the temperature increase in the reactor. In addition, the recycle will serve to dilute the reactants.

Another promising reactor configuration is the slurry-bed reactor (ebullating bed). In this reactor, hydrogen is fed from the bottom and 'bubbles' through the substrate liquid containing the suspended catalyst. A submerged cooling coil in the slurry bed can be used to control the temperature. Due to in-bed temperature control and higher degree of back-mixing, a smaller (or no) recycle is required in the slurry-bed compared to the trickle bed reactor.

Comparing the chemical reactor performance of the trickle bed and slurry reactor, the first will provide a higher degree of plug flow and the second reactor a higher degree of isothermal conditions.

5 The hydrogenation product composition of d) may be subjected to a purification step, such as distillation, filtration, adsorption and/or ion exchange to recover the hydroxyl compounds. Unreacted hydrogen recovered in the purification step, may be recycled to the reaction zone ii) of step b).

The oxygenate feed composition of step a) may be derived from a thermolytic fragmentation of a sugar composition.

10

Process of producing C₁-C₃ hydroxy compounds from sugar compositions

According to the present invention, a process for the preparation of a C₁-C₃ hydroxy compound from a sugar composition is provided, comprising the steps of:

- i. Providing a feedstock solution of a sugar composition;
- 15 ii. Exposing the feedstock of a) to thermolytic fragmentation to produce a fragmentation product composition comprising a C₁-C₃ oxygenate compound; and
- iii. Optionally conditioning the fragmentation product composition; and then
- iv. Subjecting the fragmentation product composition of step ii) or iii) to the hydrogenation process according to the present invention, wherein the fragmentation
20 product composition is the oxygenate feed composition of step a) of the hydrogenation process according to the present invention.

The optional conditioning of step iii) may comprise a distillation, filtration, adsorption and/or ion exchange to remove impurities prior to the hydrogenation.

25 The sugar composition of the feedstock solution for thermolytic fragmentation may be selected from one or more of the monosaccharides fructose, xylose, glucose, mannose, galactose arabinose; the disaccharides sucrose, lactose, maltose or from syrups such as corn syrup, cane sugar syrup or whey. The feedstock solution of step i) is generally a solution of a sugar in a solvent comprising from 20-95 wt.%, such as from 50-
30 90 wt% of sugar. The solvent may comprise one or more of the compounds selected from the group consisting of water, methanol, ethanol, ethylene glycol and propylene

glycol. It is an advantage in the fragmentation step to use solvents comprising alcohols, since the evaporation energy is lower than water.

C₁-C₃ hydroxy products such as ethylene glycol and propylene glycol obtained from bio materials, such as sugars, will have a significantly higher content of ¹⁴C than the same products obtained from petrochemical sources.

Accordingly, a product is provided according to the present invention, which is obtainable by the process for the preparation of a C₁-C₃ hydroxy compound from a sugar composition described above. Such a product is characteristic by having a ¹⁴C content above 0.5 parts per trillion of the total carbon content. The C₁-C₃ hydroxy compound may be ethylene glycol and at least 70% of the initial carbon may be recovered in the form of ethylene glycol or propylene glycol. According to an embodiment of the present invention, a product is provided which is obtainable by the process according to the present invention, which is characterized in that the product has a ¹⁴C content above 0.5 parts per trillion (weight by weight) of the total carbon content; and in that at least 70% of the initial carbon is recovered in the form of ethylene glycol or propylene glycol in the hydrogenation product composition.

The C₁-C₃ hydroxy compound prepared according to the invention, such as ethylene glycol or propylene glycol, may be used for the preparation of a polymer, such as polyethylene terephthalate, polyester resins, fibres or films. The polymer will have a ¹⁴C content reflecting the fraction of monomers which have been obtained from biomaterials.

The C₁-C₃ hydroxy compound prepared according to the invention, such as ethylene glycol or propylene glycol, may also be used as a de-icing agent, coolant, anti-freeze agent or solvent.

In and embodiment according to the present invention a system for continuously performing the process disclosed herein is provided, said system comprising a hydrogenation unit, such as a multi-tubular reactor, having an inlet and an outlet and a hydrogenation catalyst as defined herein, and a thermolytic fragmentation unit having an inlet and outlet, wherein the outlet of said thermolytic fragmentation unit is fluidly connected to the inlet of said hydrogenation unit. In an embodiment, the outlet of said thermolytic

fragmentation unit is directly, fluidly connected to the inlet of said hydrogenation unit. The fragmentation unit comprises a fragmentation reactor comprising a suitable inlet for the feedstock and an outlet for a fragmentation product composition (stream). The hydrogenation unit comprises a chemical reactor comprising suitable inlets for the oxygenate feed composition and hydrogen and outlets for a hydroxy product composition (stream) and excess hydrogen.

In an embodiment according to the present invention, the outlet of the fragmentation unit is directly, fluidly connected with the inlet of the hydrogenation unit by means of piping equipment suitable for conveying high temperature gases and liquids. "Directly" is intended to refer to a transfer from the fragmentation unit to the hydrogenation unit which is not interrupted by significant delays nor by purification. However, it may be condensed to accommodate liquid hydrogenation. An advantage of the direct transfer of fragmentation product to hydrogenation unit is that the heat remaining in the fragmentation product may be retained and if the hydrogenation is a gas phase hydrogenation a step of evaporating the feed may be dispensed with, since it is already in the gas phase.

In another embodiment according to the present invention, the system further has a hydrogen recycle from the outlet of the hydrogenation unit to the inlet or the hydrogen inlet of the hydrogenation unit. Accordingly, excess hydrogen may be recycled to the hydrogenation unit thus improving cost efficiency. The recycle may be connected with the hydrogen inlet or may be recycled directly into the chemical reactor.

Brief description of the drawings

Figure 1: C_3/C_6 ratio plotted as a function of initial pyruvaldehyde concentration (40 mg of Ru/C added as catalyst). C_3 comprises acetol and propylene glycol and C_6 comprises all C_6 byproducts formed by aldol condensation of pyruvaldehyde.

Definitions

The term "oxygenate feed composition" is meant to refer to the oxygenate containing fluid passing through the inlet of the reactor used for conducting the hydrogenation. When the oxygenate composition is obtained from a thermolytic fragmentation of a

sugar composition, it may in addition to the C₁-C₃ oxygenate compounds, contain other compounds e.g. organic acids such as acetic acid, formic acid, glycolic acid and/or lactic acid; furans such as furfural and/or 5-(hydroxymethyl)furfural; and solvents such as water.

5

In the present context, the term "C₁-C₃ oxygenate compound" is meant to refer to an organic compound containing between 1 and 3 carbon atoms and at least one carbonyl bond (ketone or aldehyde).

10

The term "oxygenate feed composition comprising a C₁-C₃ oxygenate compound" is meant to refer to an oxygenate feed composition comprising one or more C₁-C₃ oxygenate compounds. It may also comprise minor amounts of other organic compounds.

15

In the present context, a "gas phase hydrogenation" is meant to refer to a hydrogenation wherein the substrate (here the C₁-C₃ oxygenate compound) is essentially in a gaseous form in the reaction zone of the catalytic material. For example, at least 80 wt.%, such as at least 90, 92, 94 or 96 wt.%, is in the gaseous form. Accordingly, this means that 80-100 wt.%, such as 90-100, 92-100, 94-100 or 96-100 wt%, is in the gaseous form.

20

In the present context, a "liquid phase hydrogenation" is meant to refer to a hydrogenation wherein the substrate (here the C₁-C₃ oxygenate compound) is essentially in liquid solution in the reaction zone of the catalytic material. For example, at least 80 wt.%, such as at least 90, 92, 94 or 96 wt.%, is in the liquid form. Accordingly, this means that 80-100 wt.%, such as 90-100, 92-100, 94-100 or 96-100 wt.%, is in the liquid form.

25

30

In the present context, a "reaction zone" is meant to refer to the area around the catalyst wherein the oxygenate feed composition is brought into contact with the hydrogenation catalyst. In certain embodiments the reaction zone may be defined by the walls of the chemical reactor. In a continuous reactor, the reaction zone may be defined by the reactor walls and the inlet and the outlet. In liquid hydrogenation the reaction zone is the liquid reactor fluid. In gaseous hydrogenation the reaction zone is defined by the reactor walls and if inlet and outlet is present, by the end of the inlet and the beginning of the outlet.

The term "hydrogenation product composition" is meant to refer to the hydroxy containing fluid resulting from the hydrogenation reaction. When the hydrogenation product composition is obtained from hydrogenating the fragmentation product of a thermolytic fragmentation of a sugar composition, it may in addition to the C₁-C₃ hydroxy compounds, contain other compounds e.g. organic acids such as acetic acid, formic acid, glycolic acid and/or lactic acid; furans such as furfural and/or 5-(hydroxymethyl)furfural; and solvents such as water.

Concentrations given in percentages are to be understood as weight% (i.e. weight of x per total weight), where nothing else is stated.

In the present context, the term "C₁-C₃ hydroxy compound" is meant to refer to an organic compound which contains between 1 and 3 carbon atoms and at least one hydroxyl group (alcohol) and which may be produced by hydrogenation of a C₁-C₃ oxygenate compound.

The term "hydrogenation product composition comprising a C₁-C₃ hydroxy compound" is meant to refer a hydrogenation product composition comprising one or more C₁-C₃ hydroxy compounds.

The term "catalytic material" is to be understood as any material which is catalytically active. This is also the meaning of the term "catalyst". All terms may be used interchangeably.

The terms "Cu on carbon" and "Cu/C" are meant to refer to a catalytically active material having a support of carbon (such as activated carbon/carbon nanotubes/graphene/fullerenes) with copper particles deposited on the support. As the skilled person will know, it is mainly the surface of the Cu particles which provide the catalytic activity. Accordingly, a large Cu particle surface area is desirable.

The term "Recovering" is meant to refer either to collecting the hydrogenation product composition or to directing the hydrogenation product composition to a subsequent step, such as to a purification unit.

The term "yield" is in the present context meant to refer to the molar fraction of C₁-C₃ oxygenate compound which is converted into its corresponding C₁-C₃ hydroxy compound (i.e. C₁ to C₁; C₂ to C₂; and C₃ to C₃).

5

The term "conversion" is in the present context meant to refer to the molar fraction of C₁-C₃ oxygenate compound which has reacted during the hydrogenation process to form either the desired C₁-C₃ hydroxy compound or other products.

10

The term "selectivity" is meant to refer to the molar fraction of desired product formed per substrate converted. In the present context the substrate for a C₁ hydroxy compound is only considered to be the C₁ oxygenate compounds present in the oxygenate feed composition; for a C₂ hydroxy compound the substrate is only considered to be the C₂ oxygenate compounds present in the oxygenate feed composition; and for a C₃ hydroxy compound the substrate is only considered to be the C₃ oxygenate compounds present in the oxygenate feed composition. The selectivity may be calculated as yield divided by conversion.

15

20

The term "initial" (hydrogen partial pressure/oxygenate molar fraction/oxygenate concentration etc.) is meant to refer to the partial pressure or molar fraction at the time when it first meets the catalytic material.

25

The term "continuous conditions" is meant to refer to truly continuous conditions (such as in a fluid bed reactor or packed bed reactor, optionally with recycle of the hydrogenation product composition to the feed stream or to the reactor inlet) but it is also meant to refer to semi-continuous conditions such as repeatedly feeding small portions of the oxygenate feed composition to the reactor fluid and repeatedly collecting small portions of the hydroxy product composition from the reactor outlet.

30

The "reactor fluid" is meant to refer to the fluid present in the reaction zone, including both unreacted oxygenate compounds, the hydroxy compounds formed and any solvent or diluent present.

Example

Example 1: Effect of initial C₁-C₃ oxygenate concentration

The experiment was performed in an autoclave. 3.1 g C₁-C₃ oxygenate feed composition was fed to the autoclave. The concentration of C₁-C₃ oxygenates in the C₁-C₃ oxygenate feed composition varied according to Table 1 below. The C₁ oxygenates present in the C₁-C₃ oxygenate feed composition were mainly formaldehyde (FA). The C₂ oxygenates present in the C₁-C₃ oxygenate feed composition were mainly glycolaldehyde (GA) and glyoxal. The C₃ oxygenates present in the C₁-C₃ oxygenate feed composition were mainly pyruvaldehyde (PA) and acetol. Accordingly the initial glycolaldehyde (GA) concentration ranged from 16 g/l to 264 g/l. The C₁-C₃ oxygenate feed composition was hydrogenated for 16 hours at 80 °C and 90 bar H₂ with 0.040 g of 5% Ru/C catalyst. The catalyst amount was kept constant in all experiments meaning that the relative amount of catalyst compared to substrate increased with decreasing oxygenate concentration. After hydrogenation, the hydrogenation product composition was recovered and the content of ethylene glycol (EG) and propylene glycol (PG) was determined using standard methods. The yield of EG was calculated as moles of EG formed per mole of glycolaldehyde and glyoxal in the feed composition. The yield of PG was calculated as moles of PG formed per mole of pyruvaldehyde and acetol in the feed composition. Table 1 presents an overview of the results. Full conversion of GA was obtained at GA concentrations up to 129 g/l (entry 1-4). From these experiments it can be seen that the yield of ethylene glycol (EG) decreased with increasing oxygenate concentration. The higher GA concentrations of 196 g/l and 264 g/l did not reach full conversion after 16 hours (entry 5 and 6), the drop in EG selectivity was seen to continue to 82% and 74%, respectively. The trend observed with respect to EG yield was similar for the PG yield.

Table 1. Hydrogenation of C₁-C₃ oxygenate feed compositions of different oxygenate concentrations

Entry	C ₃ in feed	C ₂ in feed	C ₁ in feed	C ₂ conversion	EG yield	EG selectivity	PG yield
1	2.4 g/l	16 g/l	1.4 g/l	100%	96%	96%	71%
2	4.7 g/l	31 g/l	2.7 g/l	100%	95%	95%	68%
3	9 g/l	62 g/l	5.4 g/l	100%	93%	93%	61%
4	20 g/l	129 g/l	11 g/l	100%	85%	85%	50%

5	29 g/l	196 g/l	17 g/l	96%	78%	82%	45%
6	40 g/l	264 g/l	23 g/l	44%	33%	74%	n.a.

Example 2: continuous process

5 A continuously stirred tank reactor (CSTR) setup was used to perform the hydrogenation of an oxygenate mixture. The CSTR consisted of a 500 ml autoclave, with the possibility of feeding liquid and gas to the reactor, as well as withdrawing reaction liquid and gas from the reactor. The hydrogenation was performed by loading 20 g of a 5 wt.% Ru/C catalyst in a Robinson-Mahoney catalyst basket, which was mounted in the autoclave. The autoclave was then filled with 300 ml of water, sealed, and flushed with nitrogen. The reactor was pressurized to 80 bar, using hydrogen, and the temperature increased to 90°C. Hydrogen was supplied to the reactor at a rate of 80 Nml/min, while gas was withdrawn from the reactor at a rate sufficient to keep the pressure constant. An oxygenate feed with the composition given in Table 2 was fed to the reactor at a rate of 0.1 g/min, while liquid product was withdrawn at the same rate to give a constant amount of reaction liquid in the reactor. Due to the vigorous stirring of the reactor, the feed being supplied to the reactor was almost immediately completely mixed with the liquid in the reactor upon entering the reactor, essentially diluting the feed with the product composition. As the reactor, under these conditions, operate at high conversion (i.e. >95%), this means that the substrate concentration in the reaction zone is constantly low. When steady state had been achieved, the content of ethylene glycol (EG) and propylene glycol (PG) in the recovered hydrogenation product composition was determined using standard methods. A yield of EG of 85% was achieved. A yield of PG of 70% was achieved.

25 Table 2: Concentration of oxygenates in feed.

Compound	Concentration [g/L]
Glycolaldehyde	244
Formaldehyde	38
Pyruvaldehyde	22
Glyoxal	16
Acetol	14

CLAIMS:

1. A process for preparation of a C₁-C₃ hydroxy compound, comprising the steps of:

5 a) providing an oxygenate feed composition comprising a C₁-C₃ oxygenate compound in a total concentration of at least 20% by weight of oxygenate feed composition; and

b) providing a chemical reactor comprising
i. an inlet zone in fluid communication with
10 ii. a reaction zone comprising a heterogeneous hydrogenation catalyst material in fluid communication with
iii. an outlet zone;

then

c) feeding the oxygenate feed composition of step a) to the reactor inlet
15 zone i) of step b) to obtain an initial total concentration of C₁-C₃ oxygenate compound of less than 20% by weight of reactor fluid in the reaction zone ii) of step b); and

d) in the reaction zone ii) reacting the C₁-C₃-oxygenate compound with hydrogen in the presence of the catalyst material to obtain a C₁-C₃ hydroxy compound; and then

20 e) recovering from the outlet zone iii) a hydroxy product composition comprising the C₁-C₃ hydroxy compound.

2. The process according to claim 1, wherein the total concentration of C₁-C₃ oxygenate compound in the oxygenate feed composition is at least 25% by weight of
25 oxygenate feed composition.

3. The process according to claim 1, wherein the total concentration of C₁-C₃ oxygenate compound in the oxygenate feed composition is at least 30% by weight of oxygenate feed composition.
30

4. The process according to claim 1, wherein the total concentration of C₁-C₃ oxygenate compound in the oxygenate feed composition is at least 35% by weight of oxygenate feed composition.

5. The process according to claim 1, wherein the total concentration of C_1 - C_3 oxygenate compound in the oxygenate feed composition is at least 40% by weight of oxygenate feed composition.
- 5 6. The process according to claim 1, wherein the total concentration of C_1 - C_3 oxygenate compound in the oxygenate feed composition is at least 45% by weight of oxygenate feed composition.
- 10 7. The process according to claim 1, wherein the total concentration of C_1 - C_3 oxygenate compound in the oxygenate feed composition is at least 50% by weight of oxygenate feed composition.
- 15 8. The process according to claim 1, wherein the total concentration of C_1 - C_3 oxygenate compound in the oxygenate feed composition is at least 55% by weight of oxygenate feed composition.
- 20 9. The process according to claim 1, wherein the total concentration of C_1 - C_3 oxygenate compound in the oxygenate feed composition is at least 60% by weight of oxygenate feed composition.
- 25 10. The process according to claim 1, wherein the total concentration of C_1 - C_3 oxygenate compound in the oxygenate feed composition is at least 65% by weight of oxygenate feed composition.
- 30 11. The process according to claim 1, wherein the total concentration of C_1 - C_3 oxygenate compound in the oxygenate feed composition is at least 70% by weight of oxygenate feed composition.
12. The process according to claim 1, wherein the total concentration of C_1 - C_3 oxygenate compound in the oxygenate feed composition is at least 75% by weight of oxygenate feed composition.

13. The process according to any one of claims 7 to 12, wherein a change in the total concentration of C₁-C₃ oxygenate compound from greater than 50% by weight to less than 20% by weight is due to dilution by the reactor fluid.
- 5 14. The process according to any one of claims 1 to 13, wherein the oxygenate feed composition of step a) comprises two or more C₁-C₃ oxygenate compounds selected from the group consisting of glycolaldehyde, glyoxal, pyruvaldehyde, acetol, and formaldehyde.
- 10 15. The process according to any one of claims 1 to 14, wherein the oxygenate feed composition of step a) comprises at least 20% by weight of glycolaldehyde and at least 5% by weight of pyruvaldehyde.
- 15 16. The process according to any one of claims 1 to 15, wherein the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 50% by weight of the total concentration C₁-C₃ oxygenate compound in the oxygenate feed composition.
- 20 17. The process according to any one of claims 1 to 15, wherein the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 55% by weight of the total concentration C₁-C₃ oxygenate compound in the oxygenate feed composition.
- 25 18. The process according to any one of claims 1 to 15, wherein the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 60% by weight of the total concentration C₁-C₃ oxygenate compound in the oxygenate feed composition.
- 30 19. The process according to any one of claims 1 to 15, wherein the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 65% by weight of the total concentration C₁-C₃ oxygenate compound in the oxygenate feed composition.

20. The process according to any one of claims 1 to 15, wherein the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 70% by weight of the total concentration C₁-C₃ oxygenate compound in the oxygenate feed composition.

5

21. The process according to any one of claims 1 to 15, wherein the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 75% by weight of the total concentration C₁-C₃ oxygenate compound in the oxygenate feed composition.

10

22. The process according to any one of claims 1 to 15, wherein the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 80% by weight of the total concentration C₁-C₃ oxygenate compound in the oxygenate feed composition.

15

23. The process according to any one of claims 1 to 15, wherein the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 85% by weight of the total concentration C₁-C₃ oxygenate compound in the oxygenate feed composition.

20

24. The process according to any one of claims 1 to 15, wherein the total concentration by weight of C₁-C₃ hydroxy compound in the hydroxy product composition is at least 90% by weight of the total concentration C₁-C₃ oxygenate compound in the oxygenate feed composition.

25

25. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 80%.

30

26. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 85%.

27. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 88%.

28. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 90%.

5 29. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 91%.

30. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 92%.

10

31. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 93%.

15 32. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 94%.

33. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 95%.

20 34. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 96%.

35. The process according to any one of claims 1 to 24, wherein the selectivity of ethylene glycol (mol/mol C₂) is at least 97%.

25

36. The process according to any one of claims 1 to 35, wherein, the selectivity of propylene glycol (mol/mol C₃) is at least 60%.

30 37. The process according to any one of claims 1 to 35, wherein, the selectivity of propylene glycol (mol/mol C₃) is at least 65%.

38. The process according to any one of claims 1 to 35, wherein, the selectivity of propylene glycol (mol/mol C₃) is at least 70%.

39. The process according to any one of claims 1 to 35, wherein, the selectivity of propylene glycol (mol/mol C₃) is at least 75%.
- 5 40. The process according to any one of claims 1 to 35, wherein, the selectivity of propylene glycol (mol/mol C₃) is at least 80%.
41. The process according to any one of claims 1 to 40, wherein the hydroxy product composition of step e) comprises one or more C₁-C₃ hydroxy compound
10 selected from the group consisting of methanol, ethylene glycol, and propylene glycol.
42. The process according to any one of claims 1 to 41, wherein the C₁-C₃ oxygenate compound is a C₂-C₃ oxygenate compound.
- 15 43. The process according to any one of claims 1 to 42, wherein the C₁-C₃ hydroxy compound is a C₂-C₃ hydroxy compound.
44. The process according to any one of claims 1 to 43, wherein the catalyst material of step b) comprises a metal component selected from the group consisting
20 of ruthenium, ruthenium alloy, rhenium, rhodium, iridium, palladium, platinum, copper, and nickel.
45. The process according to any one of claims 1 to 44, wherein the catalyst material of step b) comprises a support material.
25
46. The process according to claim 45, wherein the support material is selected from the group consisting of carbon, silica, alumina, titania, zirconia, and combinations thereof.
- 30 47. The process according to any one of claims 1 to 46, wherein the catalyst material of step b) comprises ruthenium on carbon, or copper on carbon.

48. The process according to any one of claims 1 to 47, wherein the reaction of step d) is conducted at a temperature in the range of from 200-250°C and a hydrogen partial pressure in the range of from 0.5 to 5 bar.

5 49. The process according to any one of claims 1 to 47, wherein the reaction of step d) is conducted at a temperature in the range of from 60-120°C and a hydrogen partial pressure in the range of from 60 to 140 bar.

10 50. The process according to any one of claims 1 to 47, wherein the catalytic reaction of step d) is conducted under an initial hydrogen partial pressure of at least 0.5 bar.

15 51. The process according to any one of claims 1 to 47, wherein the catalytic reaction of step d) is conducted under an initial hydrogen partial pressure of at least 5 bar.

20 52. The process according to any one of claims 1 to 47, wherein the catalytic reaction of step d) is conducted under an initial hydrogen partial pressure of at least 40 bar.

53. The process according to any one of claims 1 to 47, wherein the catalytic reaction of step d) is conducted under an initial hydrogen partial pressure of between 0.5 and 500 bar.

25 54. The process according to any one of claims 1 to 47, wherein the catalytic reaction of step d) is conducted under an initial hydrogen partial pressure of between 0.5 and 200 bar.

30 55. The process according to any one of claims 1 to 47, wherein the catalytic reaction of step d) is conducted under an initial hydrogen partial pressure of between 0.5 and 5 bar.

56. The process according to any one of claims 1 to 47, wherein the catalytic reaction of step d) is conducted under an initial hydrogen partial pressure of between 60 and 140 bar.

5 57. The process according to any one of claims 1 to 47 and 50 to 56, wherein the reaction of step d) is conducted at a temperature in the range of from 50-350°C.

58. The process according to any one of claims 1 to 47 and 50 to 56, wherein the reaction of step d) is conducted at a temperature in the range of from 50-250°C.

10

59. The process according to any one of claims 1 to 47 and 50 to 56, wherein the reaction of step d) is conducted at a temperature in the range of from 60-120°C.

15

60. The process according to any one of claims 1 to 47 and 50 to 56, wherein the reaction of step d) is conducted at a temperature in the range of from 200-250°C.

61. The process according to any one of claims 1 to 47 and 50 to 56, wherein the reaction of step d) is conducted at a temperature in the range of from 150-200°C.

20

62. The process according to any one of claims 1 to 61, wherein step d) is conducted under conditions to provide liquid phase hydrogenation of the oxygenate compound and a solvent is present in the reaction zone of step d).

25

63. The process according to claim 62, wherein the solvent comprises a compound selected from the group consisting of water, methanol, ethanol, ethylene glycol, propylene glycol, and combinations thereof.

30

64. The process according to any one of claims 1 to 63, wherein the process is performed under continuous conditions.

65. The process according to any one of claims 1 to 64, wherein the reactor of step c) is a plug flow reactor.

66. The process according to claim 65, wherein the plug flow reactor is a packed bed reactor, a fixed bed reactor, a trickle bed reactor, a fluid bed reactor or a slurry phase reactor.

5

67. The process according to any one of claims 1 to 66, wherein a fraction of the hydroxy product composition recovered in step e) is transferred to the reaction zone ii) of step b).

10

68. The process according to any one of claims 1 to 64, wherein the reactor of step c) is a stirred tank reactor.

69. The process according to claim 68, wherein the stirred tank reactor is a continuously stirred tank reactor (CSTR) or a Bertly reactor.

15

70. The process according to any one of claims 1 to 69, wherein the hydrogenation product composition of step e) is subjected to a purification step to recover the C₁-C₃ hydroxy compound.

20

71. The process according to claim 70, wherein the purification step is distillation, filtration adsorption and/or ion exchange.

72. The process according to claim 70 or 71, wherein unreacted hydrogen recovered in the purification step, is recycled to the reaction zone ii) of step b).

25

73. A process for preparation of a C₁-C₃ hydroxy compound, comprising the steps of:

- i. providing a feedstock solution of a sugar composition;
 - ii. exposing the feedstock of a) to thermolytic fragmentation to produce a fragmentation product composition comprising a C₁-C₃ oxygenate compound; and
 - iii. optionally conditioning the fragmentation product composition; and
- then

iv. subjecting the fragmentation product composition of step ii) or iii) to the process according to any one of claims 1 to 72, wherein the fragmentation product composition is the oxygenate feed composition of claim 1 step a).

5 74. The process according to claim 73, wherein the sugar composition is selected from monosaccharides fructose, xylose, glucose, mannose, galactose, arabinose; and/or the disaccharides sucrose, lactose, maltose, and combinations thereof.

75. The process according to claim 73 or 74, wherein the feedstock solution of
10 step i) is a solution of a sugar in a solvent, the solution comprising from 20-95 wt% of sugar.

76. The process according to claim 73 or 74, wherein the feedstock solution of
15 step i) is a solution of a sugar in a solvent comprising from 50-90 wt.% of sugar.

77. The process according to any one of claims 1 to 64 and 67 to 76, wherein the chemical reactor is a continuously stirred tank reactor.

20 78. A use of a system for continuously performing the process according to any one of claims 1 to 77, said system comprising a hydrogenation unit having an inlet and an outlet and a catalyst as defined in any one of claims 1 to 77, and a thermolytic fragmentation unit having an inlet and outlet, wherein the outlet of said thermolytic fragmentation unit is fluidly connected to the inlet of said hydrogenation unit.


25 79. The use according to claim 78, wherein the hydrogenation unit is a multi-tubular reactor.

80. The use according to claim 78 or 79, wherein the outlet of said thermolytic
30 fragmentation unit is directly, fluidly connected to the inlet of said hydrogenation unit.

81. The use according to any one of claims 78 to 80, further having a hydrogen recycle from the outlet of the hydrogenation unit to the inlet of the hydrogenation unit.

1/1

Fig. 1

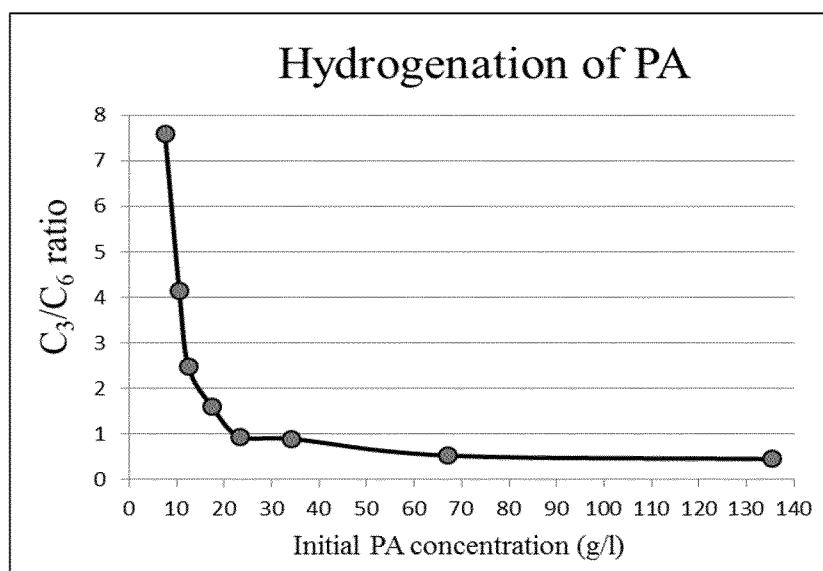

Hydrogenation of PA

