



(22) Date de dépôt/Filing Date: 2016/01/28

(41) Mise à la disp. pub./Open to Public Insp.: 2017/03/20

(45) Date de délivrance/Issue Date: 2022/10/11

(30) Priorité/Priority: 2015/09/20 (US62/221,064)

(51) Cl.Int./Int.Cl. *A63C 1/32* (2006.01),
A43B 5/16 (2006.01), *A63C 1/22* (2006.01)


(72) Inventeurs/Inventors:
DUBOIS, SEBASTIEN, CA;
DESROCHERS, CHARLES-ANTOINE, CA;
LEBLANC, ALEXANDRE, CA;
HARVEY, GUILLAUME, CA;
SEGUIN, ALEXIS, CA

(73) Propriétaire/Owner:
BAUER HOCKEY LTD., CA

(74) Agent: SMART & BIGGAR LLP

(54) Titre : PATINS DESTINES A UN GARDIEN DE BUT DE HOCKEY

(54) Title: SKATE FOR A HOCKEY GOALKEEPER

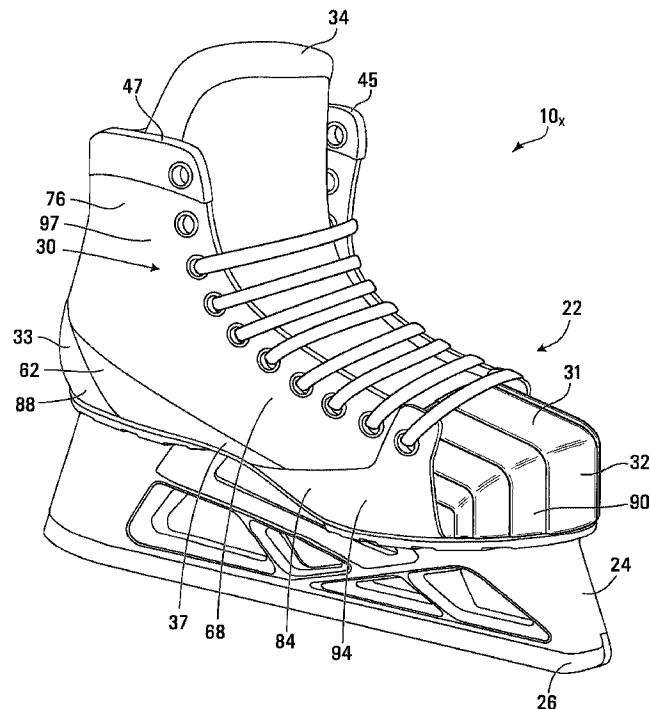

(57) **Abrégé/Abstract:**

A goalie skate for a hockey goalkeeper. The goalie skate may comprise a skate boot for receiving a foot of the hockey goalkeeper, a blade for contacting ice, and a blade holder between the skate boot and the blade. The skate boot comprises an outer shell comprising a synthetic material. The goalie skate may be cowlingless.



ABSTRACT

A goalie skate for a hockey goalkeeper. The goalie skate may comprise a skate boot for receiving a foot of the hockey goalkeeper, a blade for contacting ice, and a blade
5 holder between the skate boot and the blade. The skate boot comprises an outer shell comprising a synthetic material. The goalie skate may be cowlingless.

SKATE FOR A HOCKEY GOALKEEPER

FIELD

5

The invention generally relates to equipment for hockey goalkeepers and, more particularly, to skates for hockey goalkeepers.

BACKGROUND

10

Hockey goalkeepers (a.k.a. goalies) defend their team's goal in a hockey game. To that end, a hockey goalie wears various equipment, including goalie skates to move on a playing surface (e.g., ice), leg pads to protect his/her legs when used to stop a puck or ball and/or when moving (e.g., dropping) them onto the playing surface, and
15 a blocker and a catcher to stop the puck or ball with his/her arms and hands

20

A goalie skate typically comprises a skate boot for receiving a goalie's foot and a cowling that covers toe, heel, lower medial, and lower lateral areas of the skate boot. The cowling is a hard cover that extends over the toe, heel, lower medial, and lower
20 lateral areas of the skate boot for added protection in those areas. The cowling also carries a blade or set of inline wheels of the skate that engages the playing surface.

25

While the cowling imparts impact protection to the goalie skate, it may detrimentally affect other characteristics of the skate. For instance, a maximal angle of attack of
25 the goalie skate with the playing surface may be limited by the cowling as a medial side of the cowling will contact the playing surface first when the goalie skate is inclined. This can in turn affect how fast and how hard the goalie can push off the playing surface during play.

30

For these and/or other reasons, there is a need to improve skates for hockey goalies.

SUMMARY

In accordance with an aspect of the invention, there is provided a goalie skate for a
5 hockey goalkeeper. The goalie skate comprises a skate boot for receiving a foot of
the hockey goalkeeper, a blade for contacting ice, and a blade holder between the
skate boot and the blade. The skate boot comprises an outer shell comprising a
synthetic material. The goalie skate is cowlingless.

10 In accordance with another aspect of the invention, there is provided a goalie skate
for a hockey goalkeeper. The goalie skate comprises a skate boot for receiving a
foot of the hockey goalkeeper. The skate boot comprises an outer shell comprising a
synthetic material. The outer shell comprises a lateral side portion for facing a lateral
side of the foot of the hockey goalkeeper, a medial side portion for facing a medial
15 side of the foot of the hockey goalkeeper, and a heel portion for facing a heel of the
foot of the hockey goalkeeper. The goalie skate further comprises a blade for
contacting ice and a blade holder between the skate boot and the blade. A bottom
region of the lateral side portion of the outer shell, a bottom region of the medial side
portion of the outer shell, and a bottom region of the heel portion of the outer shell
20 are exposed.

In accordance with another aspect of the invention, there is provided a goalie skate
for a hockey goalkeeper. The goalie skate comprises a skate boot for receiving a
foot of the hockey goalkeeper. The skate boot comprises an outer shell comprising a
25 synthetic material. The goalie skate further comprises a blade for contacting ice and
a blade holder between the skate boot and the blade. The blade holder comprises a
blade-detachment mechanism configured to selectively detach and remove the
blade from the blade holder and attach the blade to the blade holder. The blade-
detachment mechanism comprises an actuator manually operable to detach and
30 remove the blade from the blade holder.

In accordance with another aspect of the invention, there is provided a goalie skate for a hockey goalkeeper. The goalie skate comprises a skate boot for receiving a foot of the hockey goalkeeper, a skating device for contacting a playing surface, and
5 a holder between the skate boot and the skating device. The skate boot comprises an outer shell comprising a synthetic material. The goalie skate is cowlingless.

In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the
10 hockey goalkeeper; a blade for contacting ice; and a blade holder between the skate boot and the blade. The skate boot comprises: an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing
15 a lateral side of the foot of the hockey goalkeeper; a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being affixed to the outer shell; and a tongue connected to the toe cap and defining a highest point of the skate boot; wherein the outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to
20 an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than the synthetic first material; wherein a bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell. At least one of the heel portion,
25 the ankle portion, the medial side portion and the lateral side portion of the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play and a non-reinforced portion. A ratio of a thickness of the reinforced portion over a thickness of the non- reinforced portion is at least 1.1.

30 In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the

hockey goalkeeper. The skate boot comprises: an outer shell, the outer shell comprising a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper, a medial side for facing a medial side of the foot of the hockey goalkeeper, a heel portion for facing a heel of the foot of the hockey goalkeeper, and
5 an ankle portion for receiving an ankle of the hockey goalkeeper; a toe cap affixed to the outer shell for facing toes of the foot of the hockey goalkeeper; and a tongue connected to the toe cap and defining a highest point of the skate boot; the skate boot being free of a tendon guard projecting upwardly from the ankle portion of the outer shell. The skate comprises: a blade for contacting ice; and a blade holder
10 between the skate boot and the blade, the blade holder comprising a support connected to the skate boot. The outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than
15 the synthetic first material; wherein a bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell.

In accordance with another aspect of the invention, there is provided a skate for a
20 hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the hockey goalkeeper. The skate boot comprises: an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing
25 a lateral side of the foot of the hockey goalkeeper; a toe cap affixed to the outer shell for facing toes of the foot of the hockey goalkeeper; and a tongue connected to the toe cap and defining a highest point of the skate boot; the skate boot having an upper edge, the tongue having an upper edge that is part of the upper edge of the skate boot, a rear of the ankle portion of the outer shell being configured to face at
30 least one of a rear of the ankle of the hockey goalkeeper and a lower part of an Achilles tendon of the hockey goalkeeper and having an upper edge that is part of

the upper edge of the skate boot and lower than the upper edge of the tongue in a height-wise direction of the skate when the skate is worn. The skate comprises: a blade for contacting ice; and a blade holder between the skate boot and the blade, the blade holder comprising a blade-detachment mechanism configured to
5 selectively detach and remove the blade from the blade holder and attach the blade to the blade holder, the blade-detachment mechanism comprising an actuator manually operable to detach and remove the blade from the blade holder, the blade holder comprising a support connected to the skate boot. The outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer
10 surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than the synthetic first material.

In accordance with another aspect of the invention, there is provided a skate for a
15 hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the hockey goalkeeper, the skate boot comprising an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing
20 a lateral side of the foot of the hockey goalkeeper; a blade for contacting ice; and a blade holder between the skate boot and the blade, the blade holder comprising a support connected to the skate boot. The outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell,
25 the overlay comprising a second material, the second material being less rigid than the synthetic first material; wherein the blade comprises an ice-contacting surface, the ice-contacting surface comprises a flat portion, and a ratio of a length of the flat portion of the ice-contacting surface over a length of the blade is at least 0.7. A bottom of the lateral side portion of the outer shell is exposed without any cowl
30 ing covering the bottom of the lateral side portion of the outer shell. At least one of the heel portion, the ankle portion, the medial side portion and the lateral side portion of

the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play and a non-reinforced portion. A ratio of a thickness of the reinforced portion over a thickness of the non-reinforced portion is at least 1.1.

- 5 In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the hockey goalkeeper. The skate boot comprises: an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a
- 10 medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper; a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being affixed to the outer shell; and a tongue connected to the toe cap and defining a highest point of the skate boot. The skate comprises: a
- 15 blade for contacting ice; and a blade holder between the skate boot and the blade; wherein a bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell. The outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the
- 20 lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than the synthetic first material. At least one of the heel portion, the ankle portion, the medial side portion and the lateral side portion of the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play and a non-reinforced portion. A ratio of a modulus of elasticity of
- 25 the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.1.

In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the

30 hockey goalkeeper. The skate boot comprises: an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for

receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper; a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being affixed to the outer shell; and a tongue connected to the toe cap and defining a highest point of the skate boot. The skate comprises: a blade for contacting ice; and a blade holder between the skate boot and the blade. A bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell. The skate boot has at least one reinforced portion configured for protecting the foot of the hockey goalkeeper against impact of a hockey puck during play; and wherein the outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than the synthetic first material.

In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the hockey goalkeeper; a blade for contacting ice; and a blade holder between the skate boot and the blade. The skate boot comprises: an outer shell; a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being distinct from the outer shell; and a tongue connected to the toe cap and defining a highest point of the skate boot. The skate is devoid of any cowling covering the toe cap. The toe cap comprises at least two synthetic materials of different stiffnesses.

In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the hockey goalkeeper. The skate boot comprises: a lateral side portion, for facing a lateral side of the foot of the hockey goalkeeper; a medial side portion, for facing a medial side of the foot of the hockey goalkeeper; a heel portion, for facing a heel of

the foot of the hockey goalkeeper; an ankle portion, for receiving an ankle of the hockey goalkeeper; a toe portion, for facing toes of the foot of the hockey goalkeeper; and a tongue connected to the toe cap and defining a highest point of the skate boot. The skate comprises: a blade for contacting ice; and a blade holder
5 between the skate boot and the blade. An outermost surface of the skate in the heel portion comprises a first synthetic material and the outermost surface of the skate in the toe portion comprises a second synthetic material different from the first synthetic material. The first synthetic material is a polymer.

10 In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the hockey goalkeeper; a blade for contacting ice; and a blade holder between the skate boot and the blade. The skate boot comprises: an outer shell; a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of
15 the hockey goalkeeper, the toe cap being distinct from the outer shell; and a tongue connected to the toe cap and defining a highest point of the skate boot. The skate is devoid of any cowling covering the toe cap. The toe cap comprises a first part and a second part, the first part being more likely to be impacted by a puck during play than the second part, the first part being reinforced such that the first part is
20 structurally stiffer than the second part.

In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper, the skate comprising: a skate boot for receiving a foot of the hockey goalkeeper; a blade for contacting ice; and a blade holder between the skate
25 boot and the blade; the skate boot comprising: an outer shell; a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being distinct from the outer shell; and a tongue connected to the toe cap and defining a highest point of the skate boot; wherein the skate is devoid of any cowling covering the toe cap; and wherein the toe cap
30 comprises at least two synthetic materials of different stiffnesses.

In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper, the skate comprising: a skate boot for receiving a foot of the hockey goalkeeper, the skate boot comprising: a lateral side portion, for facing a lateral side of the foot of the hockey goalkeeper; a medial side portion, for facing a medial side of the foot of the hockey goalkeeper; a heel portion, for facing a heel of the foot of the hockey goalkeeper; an ankle portion, for receiving an ankle of the hockey goalkeeper; a toe portion, for facing toes of the foot of the hockey goalkeeper; and a tongue connected to the toe cap and defining a highest point of the skate boot; a blade for contacting ice; and a blade holder between the skate boot and the blade; wherein an outermost surface of the skate in the heel portion comprises a first synthetic material and the outermost surface of the skate in the toe portion comprises a second synthetic material different from the first synthetic material.

In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper, the skate comprising: a skate boot for receiving a foot of the hockey goalkeeper; a blade for contacting ice; and a blade holder between the skate boot and the blade; the skate boot comprising: an outer shell; a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being distinct from the outer shell; and a tongue connected to the toe cap and defining a highest point of the skate boot; wherein the skate is devoid of any cowling covering the toe cap; wherein the toe cap comprises a first part and a second part, the first part being more likely to be impacted by a puck during play than the second part, the first part being reinforced such that the first part is structurally stiffer than the second part.

In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the hockey goalkeeper; a blade for contacting ice; and a blade holder between the skate boot and the blade. The skate boot comprises: an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for

receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper; a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper; and a tongue connected to the toe cap and defining a highest point of the skate boot. A bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell. At least one of the heel portion, the ankle portion, the medial side portion and the lateral side portion of the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play and a non-reinforced portion. The outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body, defining an outer surface of at least part of the lateral side portion of the outer shell and defining the reinforced portion, the overlay comprising a second material, the second material being less rigid than the synthetic first material.

In accordance with another aspect of the invention, there is provided a skate for a hockey goalkeeper. The skate comprises: a skate boot for receiving a foot of the hockey goalkeeper; a blade for contacting ice; and a blade holder between the skate boot and the blade. The skate boot comprises: an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper; a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being affixed to the outer shell; and a tongue connected to the toe cap and defining a highest point of the skate boot. A bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell. At least one of the heel portion, the ankle portion, the medial side portion and the lateral side portion of the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play

and a non-reinforced portion. The outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining the reinforced portion, the overlay comprising a second material, the second material being less rigid than the synthetic first material.

5

These and other aspects of the invention will now become apparent to those of ordinary skill in the art upon review of the following description of embodiments of the invention in conjunction with the accompanying drawings.

10

BRIEF DESCRIPTION OF DRAWINGS

A detailed description of embodiments of the invention is provided below, by way of example only, with reference to drawings annexed hereto, in which:

15

Figure 1 is an example of a hockey goalkeeper (i.e., goalie) wearing a goalie skate in accordance with an embodiment of the invention;

Figures 2 and 3 show perspective views of the goalie skate;

20

Figures 4 to 6 show a side view, a rear view and a top view of the goalie skate;

Figures 7 and 8 show lateral and medial side views of a typical goalie skate comprising a cowl;

25

Figure 9 shows a rear view of the goalie skate when the goalie skate engages a playing surface at a maximal attack angle;

Figure 10 shows a side view of a skate boot of the goalie skate;

30

Figure 11 shows an exploded view of the skate boot of the goalie skate, including an

outer shell, a tongue, a toe cap, and an inner lining of the skate boot;

Figure 12 shows a perspective view of the outer shell of the skate boot including a body and an overlay of the outer shell;

5

Figure 13 shows a closeup view of part of a lateral side portion of the outer shell including the overlay;

Figures 14A and 14B show a cross-sectional view of the outer shell taken along lines 14A-14A and 14B-14B respectively, as indicated in Figure 13;

10

Figure 15 shows a perspective view of a heel portion of the outer shell;

Figures 16 and 17 show perspective views of the toe cap of the skate boot;

15

Figure 18 shows a side view of the toe cap;

Figure 19 shows a cross-sectional view of the toe cap taken along line 19-19 as indicated in Figure 18;

20

Figure 20 shows a cross-sectional view of the toe cap where the toe cap comprises areas of increased thickness;

Figures 21 to 23 show a reinforcement of the toe cap in accordance with various embodiments;

25

Figures 24 and 25 show a perspective view and an exploded of the tongue of the skate boot;

Figure 26 shows a blade and a blade holder of the goalie skate;

30

Figures 27 and 28 show a top view and a bottom view of the blade holder, including a blade-detachment mechanism;

Figure 29 shows a side view of the blade;

5

Figures 30 to 33 show variants in which the blade is permanently affixed to the blade holder;

Figures 34 and 35 show a side view and front view of the blade in accordance with a
10 variant in which the blade comprises a runner and a body;

Figure 36 shows a three-point bending test being performed on a part of the outer shell of the skate boot to determine a stiffness of the outer shell;

15 Figure 37 shows a perspective view of a portion of the outer shell, including its lateral and medial side portions, in accordance with a variant in which a first area of the lateral side portion is stiffer than a second area of the lateral side portion;

Figure 38 shows a perspective view of a heel portion of the outer shell in accordance
20 with a variant in which a first area of the heel portion is stiffer than a second area of the heel portion;

Figure 39 shows a perspective view of the toe cap in accordance with a variant in which a first area of a lateral side portion of the toe cap is stiffer than a second area of
25 the lateral side portion of the toe cap;

Figure 40 shows a perspective view of the toe cap in accordance with a variant in which the toe cap comprises a first synthetic material and a second synthetic material;

30 Figure 41 shows a perspective view of the toe cap in accordance with a variant in which the toe cap comprises an overlay comprising the second synthetic material;

Figures 42 and 43 are side and front views of a right foot of the goalie with an integument of the foot shown in dotted lines and bones shown in solid lines.

- 5 In the drawings, embodiments of the invention are illustrated by way of example. It is to be expressly understood that the description and drawings are only for purposes of illustration and as an aid to understanding, and are not intended to be a definition of the limits of the invention.

10 DETAILED DESCRIPTION OF EMBODIMENTS

Figures 1 to 6 show an example of skates 10₁, 10₂ for a hockey goalkeeper 12 in accordance with an embodiment of the invention. The hockey goalkeeper 12, who will be referred to as a “goalie”, defends his/her team’s goal in a game of hockey played on
 15 a playing surface 14. The skates 10₁, 10₂ are worn by the goalie 12 to move on the playing surface 14 for goalkeeping. The goalie 12 also wears other equipment for goalkeeping, including, in this embodiment, leg pads 16₁, 16₂ to protect his/her legs when used to stop a projectile, i.e., a puck or ball, during play and/or when moving (e.g., dropping) them onto the playing surface 14, as well as a blocker 18 and a catcher
 20 20 to stop the puck or ball with his/her arms and hands. In this embodiment, a type of hockey played is ice hockey such that the playing surface 14 is ice and the skates 10₁, 10₂ are goalie skates.

The skates 10₁, 10₂ are designed specifically for goalkeeping by the goalie 12, as
 25 opposed to other skates for hockey players other than goalies (i.e., forwards and defensemen), and can thus be referred to as “goalie skates”. Each skate 10_x comprises a skate boot 22 for receiving a foot 11 of the goalie 12, a blade 26 for contacting the ice 14, and a blade holder 24 between the skate boot 22 and the blade 26. The skate 10_x has a longitudinal direction, a widthwise direction, and a height-wise
 30 direction.

In this embodiment, the skate 10_x is constructed to help enhance performance of the goalie 12, including, for example, by being lighter and facilitating pushing (e.g., quicker and harder pushes) against the ice 14, which may improve mobility on the ice 14. The skate 10_x also facilitates removal of the blade 26, such as to replace the blade 26 with
 5 another blade or to sharpen or perform another operation on the blade 26 before installing it back into the skate 10_x .

Notably, in this embodiment, this is achieved by the skate 10_x being cowlless, i.e., being free of (i.e., without) any cowling (i.e., hard cover) covering a toe area 31, a heel
 10 area 33, a lower medial area 35, and a lower lateral area 37 of the skate boot 22. This is in contrast to a conventional skate 510 for a hockey goalie, as shown in Figures 7 and 8, which comprises a cowling 515 covering a toe area 531, a heel area 533, a lower medial area 535, and a lower lateral area 537 of a skate boot 522.

15 In addition to being cowlless, in this embodiment, the skate 10_x supports the goalie's foot 11 relatively high relative to the ice 14. A support height H_s of the skate 10_x , which refers to a height from a bottom 50 of the blade 26 to a bottom 52 of the skate boot 22, may be relatively large. For example, in some embodiments, a ratio H_s/H of the
 20 support height H_s of the skate 10_x over an overall height H of the skate 10_x may be at least 0.25, in some cases 0.275, in some cases at least 0.30, in some cases at least 0.325, in some cases at least 0.35, and in some cases even more. The ratio of the support height H_s of the skate 10_x over the overall height H of the skate 10_x may have any other value in other embodiments. For instance, in some embodiments, the
 25 support height H_s of the skate 10_x may be at least 70 mm, in some cases at least 75 mm, in some cases at least 80 mm, in some cases at least 85 mm, and in some cases even more. The support height H_s of the skate 10_x may have any other value in other embodiments.

30 By being cowlless, in this embodiment, as shown in Figure 9, the skate 10_x allows an angle of attack θ_A with the ice 14 that can be larger (e.g., greater than for conventional hockey goalkeeper skates with cowlings). The angle of attack θ_A of the

skate 10_x with the ice 14 refers to an angle between the ice 14 and a plane 49 of the blade 26 when the skate 10_x is inclined relative to the ice 10 such that a medial surface of the skate 10_x touches the ice 14. Allowing the angle of attack Θ_A of the skate 10_x with the ice 14 to be larger may help the goalie 12 to execute quicker and harder
 5 pushes against the ice 14. For example, in some embodiments, the angle of attack Θ_A of the skate 10_x with the ice 14 may be at least 140°, in some cases at least 142°, in some cases at least 145°, in some cases at least 148°, in some cases at least 150°, and in some cases even more. The angle of attack Θ_A of the skate 10_x with the ice 14 may have any other value in other embodiments.

10

The skate boot 22 defines a cavity 54 for receiving the goalie's foot 11. With additional reference to Figures 42 and 43, the goalie's foot 11 includes toes T, a ball B, an arch ARC, a plantar surface PS, a top surface TS, a medial side MS, and a lateral side LS. The top surface TS of the goalie's foot 11 is continuous with a lower portion of a shin S
 15 of the goalie 12. In addition, the goalie 12 has a heel HL, an Achilles tendon AT, and an ankle A having a medial malleolus MM and a lateral malleolus LM that is at a lower position than the medial malleolus MM. The Achilles tendon AT has an upper part UP and a lower part LP projecting outwardly with relation to the upper part UP and merging with the heel HL. A forefoot of the goalie 12 includes the toes T and the ball B, a
 20 hindfoot of the goalie includes the heel HL, and a midfoot of the goalie is between the forefoot and the hindfoot.

The skate boot 22 comprises a front portion 56 for receiving the toes T of the goalie 12, a rear portion 58 for receiving the heel HL and at least part of the Achilles tendon AT
 25 and the ankle A of the goalie 12, and an intermediate portion 60 between the front portion 56 and the rear portion 58.

As it is for goalkeeping, the skate boot 22 may be shorter than skate boots of conventional skates for hockey players other than goalies. For example, in some
 30 embodiments, a ratio H_B/L_B of a height H_B of the skate boot 22 over a length L_B of the skate boot 22 may be no more than 0.8, in some cases no more than 0.775, in some

cases no more than 0.75, in some cases no more than 0.725, and in some cases even less.

5 More particularly, in this embodiment, the skate boot 22 comprises an outer shell 30, a toe cap 32, a tongue 34, an inner lining 36, a footbed 38, an insole 40, and an outsole 42. The skate boot 22 also comprises lace members 44₁, 44₂ and eyelets 46₁-46_E extending through (e.g., punched into) the lace members 44₁, 44₂, the outer shell 30 and the inner lining 36 vis-à-vis apertures 48 in order to receive laces for tying on the
10 skate 10. In some embodiments, the skate boot 22 may not comprise any lace members and the eyelets 46₁-46_E may extend directly through the outer shell 30 and the inner lining 36 via the apertures 48.

The outer shell 30 imparts strength to the skate 10_x to support the goalie's foot 11.
15 More particularly, in this embodiment, the outer shell 30 comprises a heel portion 62 for receiving the heel HL of the goalie 12, an ankle portion 64 for receiving the ankle A of the goalie 12, and medial and lateral side portions 66, 68 for facing the medial and lateral sides MS, LS of the goalie's foot 11, respectively. The medial and lateral side portions 66, 68 include upper edges 70, 72 which connect to the lace members 44₁,
20 44₂. The heel portion 62 may be formed such that it is substantially cup-shaped for following the contour of the heel HL of the goalie 12. The ankle portion 64 comprises medial and lateral ankle sides 74, 76. The medial ankle side 74 has a medial depression 78 for receiving the medial malleolus MM of the goalie 12 and the lateral ankle side 76 has a lateral depression 80 for receiving the lateral malleolus LM of the
25 goalie 12. The lateral depression 80 is located slightly lower than the medial depression 78 for conforming to the morphology of the goalie's foot 11. The ankle portion 64 further comprises a rear portion 82 facing the lower part LP of the Achilles tendon AT of the goalie 12. In this example, the skate boot 22 is free of (i.e., without) a tendon guard affixed to the rear portion 82 of the ankle portion 64 and extending
30 upwardly therefrom as is conventionally found in skates for hockey players other than goalies.

In this embodiment, the lateral ankle side 76 of the ankle portion 64 extends lower than the medial ankle side 74 of the ankle portion 64 in the height-wise direction of the skate 10_x. More specifically, the ankle portion 64 comprises a medial upper edge 45 facing a medial side of the ankle of the goalie's foot 11 and a lateral upper edge 47 facing a lateral side of the ankle of the goalie's foot 11. The lateral upper edge 47 extends lower than the medial upper edge 45 in the height-wise direction of the skate 10_x such that the medial upper edge 45 is higher than the lateral upper edge 47 by a vertical offset D_v . The lower lateral upper edge 47 may be helpful to relieve pressure on the lateral side LS of the goalie's foot 11 while allowing the goalie 12 to have a deeper stance (i.e., squat closer to the ice 14). Moreover, the higher medial upper edge 45 may provide additional protection and support to the goalie's foot 11. For example, the vertical offset D_v of the lateral upper edge 47 and the medial upper edge 45 of the ankle portion 64 may be at least 10 mm, in some cases at least 15 mm, in some cases at least 20 mm, and in some cases even more.

15

The vertical offset D_v may be significant relative to the overall height H of the skate 10_x. For instance, a ratio D_v/H of the vertical offset D_v of the lateral upper edge 47 and the medial upper edge 45 of the ankle portion 64 over the overall height H of the skate 10_x may be at least 0.02, in some cases at least 0.04, in some cases at least 0.06, in some cases at least 0.08, and in some cases even more.

20

As the skate 10_x is cowlingless, in this embodiment, a bottom region 84 of the lateral side portion 68 of the outer shell 30, a bottom region 86 of the medial side portion 66 of the outer shell 30, a bottom region 88 of the heel portion 62 of the outer shell 30, and a bottom region 90 of the toe cap 32 are exposed. This is in contrast to the conventional skate 510 for a hockey goalie, as shown in Figures 7 and 8, in which such bottom regions are covered by the cowling 515.

25

The outer shell 30 comprises a synthetic material 92 that makes up at least a substantial part (i.e., a substantial part or an entirety) of the outer shell 30. In this embodiment, the synthetic material 92 is a polymeric material. For example, in some

30

embodiments, the polymeric material 92 may include polypropylene. In some cases, the polymeric material 92 may be a foam. For instance, in some cases, the polymeric material 92 may include an ethylene-vinyl acetate (EVA) foam or any other suitable foam. The polymeric material 92 may include any other suitable polymer in other
5 embodiments (e.g., nylon, polyester, vinyl, polyvinyl chloride, an ionomer resin (e.g., Surlyn®), styrene-butadiene copolymer (e.g., K-Resin®) etc.). In some examples of implementation, the polymeric material 92 may be a polymer-matrix composite material (e.g., in which fibers are embedded in a polymer matrix). For instance, in some
10 embodiments, the polymeric material 92 may comprise a self-reinforced polymer composite, such as self-reinforced polypropylene composite (e.g., Curv®). The synthetic material 92 may be implemented in any other suitable way in other embodiments (e.g., other types of polymers, other types of composite material, etc.).

In this embodiment, the synthetic material 92 of the outer shell 30 constitutes at least
15 part of the heel portion 62, the ankle portion 64, and the medial and lateral side portions 66, 68 of the outer shell 30. In some examples, the synthetic material 92 of the outer shell 30 may constitute at least a majority (i.e., a majority or an entirety) of the heel portion 62, the ankle portion 64, and the medial and lateral side portions 66, 68 of the outer shell 30. In some embodiments, the synthetic material 92 of the outer shell 30
20 may constitute a given part of the outer shell 30, while the outer shell 30 may comprise one or more other synthetic materials, different from the synthetic material 92, that constitute one or more other parts of the outer shell 30.

In this example of implementation, the synthetic material 92 of the outer shell 30 is
25 molded material. That is, the synthetic material 92 of the outer shell 30 is formed by a molding process in a mold. A shape of the synthetic material 92 of the outer shell 30 is thus a molded shape imparted during the molding process. More particularly, in this example of implementation, the synthetic material 92 of the outer shell 30 is thermoformed material. For instance, a sheet of the synthetic material 92 may be
30 heated (e.g., in an oven) until it reaches a pliable forming temperature. The sheet of synthetic material 92 is then formed via a mold to have a shape of the outer shell 30.

Once the synthetic material 92 has cooled and any excess material has been trimmed, the outer shell 30 is complete and ready for assembly with other components of the skate 10_x. In other examples of implementation, the synthetic material 92 of the outer shell 30 may be molded in any other suitable way (i.e., injection molded).

5

The synthetic material 92 of the outer shell 30 may be relatively stiff. For instance, a stiffness of the synthetic material 92 of the outer shell 30 may be related to a modulus of elasticity (i.e., Young's modulus) of the synthetic material 92. For example, in some embodiments, the modulus of elasticity of the synthetic material 92 may be at least 4
10 GPa, in some cases at least 4.5 GPa, in some cases at least 5 GPa, in some cases at least 5.5 GPa, and in some cases even more. The modulus of elasticity of the synthetic material 92 of the outer shell 30 may have any other suitable value in other embodiments.

15 As the skate 10_x is cowlingless, in this embodiment, the outer shell 30 is reinforced where exposed to impact with a puck during play. That is, in view of an absence of a cowling in the skate 10_x, the outer shell 30 is reinforced in one or more regions of the outer shell 30 expected to be impacted by a puck during play in order to properly protect the goalie's foot 11. To that end, the outer shell 30 comprises a reinforced part
20 94 exposed to impact with a puck during play. The reinforced part 94 of the outer shell 30 is strengthened to take into account the absence of a cowling in the skate 10_x. For instance, the reinforced part 94 of the outer shell 30 may have a material composition (e.g., a stronger material or an additional material) and/or a shape (e.g., a thicker area) that makes that part of the outer shell 30 more protective. In this example of
25 implementation, the reinforced part 94 of the outer shell 30 does not extend over an entirety of the outer shell 30 such that the reinforced part 94, which may be more likely to be impacted by a puck during play, may provide more impact protection (e.g., be stronger and/or able to absorb more energy from impacts) than a non-reinforced part 97 of the outer shell 30 that is outside of the reinforced part 94 and that may be less
30 likely to be impacted by a puck during play.

In this embodiment, the reinforced part 94 of the outer shell 30 comprises at least part of the medial and lateral side portions 66, 68 of the outer shell 30 and at least part of the heel portion 62 of the outer shell 30. For instance, the reinforced part 94 comprises the bottom region 84 of the lateral side portion 68, the bottom region 86 of the medial
5 side portion 66, and the bottom region 88 of the heel portion 62 of the outer shell 30.

For instance, in this embodiment, the reinforced part 94 of the outer shell 30 has a thickness T_R that is greater than a thickness T_{NR} of the non-reinforced part 97 of the
10 outer shell 30. For instance, in some embodiments, a ratio T_R/T_{NR} of the thickness T_R of the reinforced part 94 of the outer shell 30 over the thickness T_{NR} of the non-reinforced part 97 of the outer shell 30 may be at least 1.1, in some cases at least 1.15, in some cases at least 1.2, in some cases at least 1.25, and in some cases even more. This ratio may have any other suitable value in other embodiments. For
15 example, in some embodiments, the thickness T_R of the reinforced part 94 of the outer shell 30 may be at least 7 mm, in some cases at least 8 mm, in some cases at least 9 mm, in some cases at least 10 mm, in some cases at least 11 mm, and in some cases even more. The thickness T_R of the reinforced part 94 of the outer shell 30 may have any other suitable value in other embodiments.

20 For example, in some embodiments, a thickness of the lateral side portion 68 of the outer shell 30 may be at least 7 mm, in some cases at least 8 mm, in some cases at least 9 mm, and in some cases even more. In some embodiments, the thickness of the lateral side portion 68 of the outer shell 30 may be greater than a thickness of
25 the medial side portion 66 of the outer shell 30. As another example, a thickness of the heel portion 62 of the outer shell 30 may be at least 7 mm, in some cases at least 8 mm, in some cases at least 9 mm, and in some cases even more. In some embodiments, the thickness of the heel portion 62 of the outer shell 30 may be greater than the thickness of the medial side portion 66 of the outer shell 30.

30 In some embodiments, only limited extents of the lateral side portion 68, the medial side portion 66, and/or the heel portion 62 of the outer shell 30 may be reinforced.

For example, in some embodiments, a thickness of the lateral side portion 68 may vary. For instance, as shown in Figure 14B, a thickness of a first area 113 of the lateral side portion 68 of the outer shell 30 may be greater than a thickness of a second area 117 of the lateral side portion 68 of the outer shell 30. The first area 113 of the lateral side portion 68 of the outer shell 30 may be lower than the second area 117 of the lateral side portion 68 in the height-wise direction of the skate 10_x. For instance, a ratio of the thickness of the first area 113 of the lateral side portion 68 over the thickness of the second area 117 of the lateral side portion 68 may be at least 1.1, in some cases at least 1.2, in some cases at least 1.3, and in some cases even more. For example, a thickness of the bottom region 84 of the lateral side portion 68 may be greater than a thickness of an upper region 87 of the lateral side portion 68 of the outer shell 30.

As another example, in some embodiments, as shown in Figure 15, a thickness of a first area 119 of the heel portion 62 of the outer shell 30 may be greater than a thickness of a second area 121 of the heel portion 62 of the outer shell 30. The first area 119 of the heel portion 62 of the outer shell 30 may be lower than the second area 121 of the heel portion 62 in the height-wise direction of the skate 10_x. For instance, a ratio of the thickness of the first area 119 of the heel portion 62 over the thickness of the second area 121 of the heel portion 62 may be at least 1.1, in some cases at least 1.2, in some cases at least 1.3, and in some cases even more. For example, a thickness of the bottom region 88 of the heel portion 62 may be greater than a thickness of an upper region 123 of the heel portion 62 of the outer shell 30.

While in this embodiment the thickness T_R of the reinforced part 94 of the outer shell 30 is greater than the thickness T_{NR} of the non-reinforced part 97 of the outer shell 30, the thickness T_R of the reinforced part 94 of the outer shell 30 is comparatively small in relation to a sum of thicknesses of the cowling 515 and an outer shell 530 of the skate boot 522 of the conventional goalie skate 510. In view of this relatively small thickness T_R of the reinforced part 94, a "lower foot-facing width" W_B of the

skate 10_x may be smaller than a lower-foot-facing width of the conventional goalie skate 510. The lower-foot-facing width W_B of the skate 10_x is a width of the skate 10_x measured in a lower portion of the skate boot 22 that faces the lateral and medial sides LS, MS of the goalie's foot 11. For instance, the lower-foot-facing width W_B of the skate 10_x may be measured at a bottommost two-inch extent of the skate boot 22. That is, the lower-foot-facing width W_B of the skate 10_x is a maximal width of the skate 10_x measured between the bottom 52 of the skate boot 22 and a point two inches above the bottom 52 of the skate boot 22 in the height-wise direction of the skate 10_x. For example, in some embodiments, for a North American size 8D senior goalie skate (i.e., a regular width size 8 senior goalie skate), the lower-foot-facing width W_B of the skate 10_x may be no more than 80 mm, in some cases no more than 70 mm, in some cases no more than 60 mm, and in some cases even less. Moreover, regardless of a size designation of the skate 10_x, in some embodiments, a ratio of the lower-foot-facing width W_B of the skate 10_x over the overall height H of the skate 10_x may be no more than 0.35, in some cases no more than 0.325, in some cases no more than 0.3, in some cases no more than 0.275, in some cases no more than 0.25, and in some cases even less.

In this embodiment, the outer shell 30 comprises a body 93 and an overlay 95 that defines the reinforced part 94 of the outer shell 30. The overlay 95 is affixed to an outer surface of the body 93. In this example, the overlay 95 extends continuously along at least a majority (i.e., a majority or an entirety) of a longitudinal extent of the outer shell 30. More particularly, in this embodiment, the overlay 95 extends over the bottom region 84 of the lateral side portion 68 of the outer shell 30, the bottom region 86 of the medial side portion 66 of the outer shell 30, and the bottom region 88 of the heel portion 62 of the outer shell 30.

In this embodiment, as shown in Figures 13 and 14, the overlay 95 is affixed to the body 93 of the outer shell 30 via a stitching 98. The overlay 95 may be affixed to the body 93 of the outer shell 30 in any other suitable way. For example, the overlay 95 may be bonded (e.g., adhesively bonded), stapled, welded (e.g., ultrasonically

welded), or overmolded onto the body 93 of the outer shell 30. Moreover, in this embodiment, the overlay 95 extends below the body 93 such that a portion of the overlay 95 (i.e., a bottom portion) extends between the body 93 and the outsole 42 of the skate boot 22. In other embodiments, the overlay 95 may not extend below
 5 the body 93 and may thus be affixed (e.g., via stitching) to the body 93 at a bottom portion of the overlay 95.

In this example of implementation, the overlay 95 comprises a plurality of overlay elements 102₁-102_v that make up the overlay 95. The overlay elements 102₁-102_v
 10 are positioned such that the overlay 95 is continuous (i.e., has no gaps). In other embodiments, the overlay 95 may comprise a single overlay element extending from the medial side 66 to the lateral side 68 of the outer shell 30.

The overlay 95 comprises a synthetic material 104 for imparting protection to the
 15 goalie's foot 11. More particularly, in this embodiment, the synthetic material 104 is more compliant (i.e., elastically deformable) than the synthetic material 92 making up the body 93 of the outer shell 30 such that the synthetic material 104 is capable of absorbing energy from impacts better than the synthetic material 92. To that end, a modulus of elasticity (i.e., Young's modulus) of the synthetic material 104 may be
 20 smaller than the modulus of elasticity of the synthetic material 92. For example, a ratio of the modulus of the synthetic material 104 of the overlay 95 over the modulus of the synthetic material 92 of the body 93 may be no more than a certain value.

Furthermore, in this embodiment, the synthetic material 104 of the overlay 95 has a
 25 thickness T_O that is different from a thickness T_B of the synthetic material 92 of the body 93 of the outer shell 30. More particularly, in this embodiment, the thickness T_O of the synthetic material 104 of the overlay 95 is less than the thickness T_B of the synthetic material 92 of the body 93. For instance, in some embodiments, a ratio T_O/T_B of the thickness T_O of the synthetic material 104 of the overlay 95 over the thickness T_B
 30 of the synthetic material 92 of the body 93 may be no more than 0.25, in some cases no more than 0.2, in some cases no more than 0.15, and in some cases even less.

The inner lining 36 is affixed to an inner surface of the outer shell 30 and comprises an inner surface 96 for facing the heel HL and medial and lateral sides MS, LS of the goalie's foot 11 and ankle A in use. The inner lining 36 may be made of a soft material
 5 (e.g., a fabric made of NYLON® fibers or any other suitable fabric). The footbed 38 is mounted inside the outer shell 30 and comprises an upper surface 106 for receiving the plantar surface PS of the goalie's foot 11 and a wall 108 projecting upwardly from the upper surface 106 to partially cup the heel HL and extend up to a medial line of the goalie's foot 11. The insole 40 has an upper surface 25 for facing the plantar surface
 10 PS of the goalie's foot 11 and a lower surface 23 on which the outer shell 30 may be affixed.

The toe cap 32 is configured to face and protect the toes T of the goalie's foot 11. In this example, the toe cap 32 is affixed to the inner surface of the outer shell 30 at the
 15 medial and lateral side portions 66, 68 of the outer shell 30 and extends along a longitudinal axis 110. The toe cap 32 comprises an outer surface 112 and an inner surface 114 opposite the outer surface 112. A thickness T_C of the toe cap 32 is measured between the outer and inner surfaces 112, 114 of the toe cap 32. The top cap 32 comprises a bottom portion 116 for at least partially covering a front portion of
 20 the lower surface 23 of the insole 40, a lateral side portion 118 for facing a small toe of the foot 11 of the goalie 12, a medial side portion 120 for facing a big toe of the foot 11 of the goalie 12, an end portion 122 between the lateral and medial side portions 118, 120, an upper portion 124 for facing a top of the toes T of the goalie's foot 11, and a top extension 126 for affixing the tongue 34 to the toe cap 32. The top extension 126 of
 25 the toe cap 32 may be affixed (e.g., glued and/or stitched) to a distal end portion of the tongue 34 in order to affix the tongue 34 to the toe cap 32.

The toe cap 32 comprises a synthetic material 105 that imparts stiffness to the toe cap 32. For instance, in various embodiments, the synthetic material 105 of the toe
 30 cap 32 may comprise nylon, polycarbonate materials (e.g., Lexan®), polyurethane, thermoplastics, thermosetting resins, reinforced thermoplastics, reinforced

thermosetting resins, polyethylene, polypropylene, high density polyethylene or any other suitable material. In some cases, the synthetic material 105 of the toe cap 140 may be a composite material comprising thermoset material, thermoplastic material, carbon fibers and/or fiberglass fibers. For example, the composite material may be a

5 fiber-matrix composite material that comprises a matrix in which fibers are embedded. The matrix may include any suitable polymeric resin, such as a thermosetting polymeric material (e.g., polyester, vinyl ester, vinyl ether, polyurethane, epoxy, cyanate ester, etc.), a thermoplastic polymeric material (e.g., polyethylene, polyurethane, polypropylene, acrylic resin, polyether ether ketone,

10 polyethylene terephthalate, polyvinyl chloride, polymethyl methacrylate, polycarbonate, acrylonitrile butadiene styrene, nylon, polyimide, polysulfone, polyamide-imide, self-reinforcing polyphenylene, etc.), or a hybrid thermosetting-thermoplastic polymeric material. The fibers may be made of any suitable material such as carbon fibers, polymeric fibers such as aramid fibers, boron fibers, glass

15 fibers, ceramic fibers, etc.

The synthetic material 105 of the toe cap 32 may be relatively stiff. For example, a stiffness of the synthetic material 105 of the toe cap 32 may be related to a modulus of elasticity (i.e., Young's modulus) of the synthetic material 105. For example, in

20 this embodiment, the modulus of the synthetic material 105 of the toe cap 32 may be at least 0.5 GPa, in some cases at least 2 GPa, in some cases at least 3 GPa, in some cases at least 4 GPa, and in some cases even more.]

The modulus of elasticity of the synthetic material 105 of the toe cap 32 may have

25 any other suitable value in other embodiments.

As the skate 10_x is cowlingless, in this embodiment, the toe cap 32 is reinforced. That is, in view of an absence of a cowling in the skate 10_x, the toe cap 32 is reinforced to properly protect the goalie's toes. The toe cap 32 is thus strengthened to take into

30 account the absence of a cowling in the skate 10_x. For instance, the toe cap 32 may have a material composition (e.g., a stronger material or an additional material) and/or

a shape (e.g., a thicker area) that makes the toe cap 32 more protective.

In this embodiment, the toe cap 32 is reinforced via an increase of a thickness T_C of the toe cap 32. For instance, the thickness T_C of the toe cap 32 may be greater than that of a toe cap 532 of the conventional goalie skate 510. For example, in some embodiments, the thickness T_C of the toe cap 32 may be at least 5 mm, in some cases at least 6 mm, in some cases at least 7 mm, and in some cases even more. The thickness T_C of the toe cap 32 may have any other suitable value in other embodiments.

10

Also, in this embodiment, the toe cap 32 comprises a reinforcement 132. In this example, the reinforcement 132 is disposed on the outer surface 112 of the toe cap 32. The reinforcement 132 may be provided on one or more of the lateral side portion 118, the medial side portion 120, the end portion 122 and the upper portion 124 of the toe cap 32.

In this example, the reinforcement 132 comprises a plurality of reinforcing elements 133₁-133_G distributed on the toe cap 32. More particularly, in this embodiment, each of the reinforcements 133₁-133_G extends along a front-to-rear direction of the toe cap 32 (i.e., generally along a direction of the longitudinal axis 110). In other embodiments, the reinforcements 133₁-133_G may extend in any other direction (e.g., a direction transversal to the longitudinal axis 110). In this case, each of the reinforcements 133₁-133_G comprises a projection 134 projecting on the outer surface 112 of the toe cap 132. For example, the projection 134 may be a rib, a ridge, or any other suitable projection. The reinforcements 133₁-133_G may form corrugations on the outer surface 112 of the toe cap 32.

The reinforcement 132 may be implemented in any other suitable way in other embodiments. For example, in other embodiments, as shown in Figure 22, each of the reinforcements 133₁-133_G may comprise a recess 136 on the outer surface 112 of the toe cap 32. For instance, the recess 136 may consist of a groove. As another example,

in some embodiments, as shown in Figure 23, the reinforcement 132 may have a single reinforcing element 133, such as a single projection 134.

The outsole 42 is affixed to an underside of the outer shell 30 for forming the skate
 5 boot 22. The outsole 42 comprises a rigid material for imparting rigidity to the outsole 42. More particularly, in this embodiment, the rigid material of the outsole 42 comprises a composite material. For example, the composite material may be a fiber-matrix composite material that comprises a matrix in which fibers are embedded. The matrix may include any suitable polymeric resin, such as a
 10 thermosetting polymeric material (e.g., polyester, vinyl ester, vinyl ether, polyurethane, epoxy, cyanate ester, etc.), a thermoplastic polymeric material (e.g., polyethylene, polypropylene, acrylic resin, polyether ether ketone, polyethylene terephthalate, polyvinyl chloride, polymethyl methacrylate, polycarbonate, acrylonitrile butadiene styrene, nylon, polyimide, polysulfone, polyamide-imide, self-
 15 reinforcing polyphenylene, etc.), or a hybrid thermosetting-thermoplastic polymeric material. The fibers may be made of any suitable material such as carbon fibers, polymeric fibers such as aramid fibers, boron fibers, glass fibers, ceramic fibers, etc. In other embodiments, the rigid material may comprise any other suitable material (e.g., nylon, polycarbonate materials, polyurethane, thermoplastics, thermosetting
 20 resins, reinforced thermoplastics, reinforced thermosetting resins, polyethylene, polypropylene, high density polyethylene).

The tongue 34 extends upwardly and rearwardly from the toe cap 32 for overlapping the top surface TS of the goalie's foot 11. In this embodiment, with additional
 25 reference to Figures 24 and 25, the tongue 34 comprises a core 140 defining a section of the tongue 34 with increased rigidity, a padding member 142 for absorbing impacts to the tongue 34, a peripheral member 144 for at least partially defining a periphery 145 of the tongue 34, and a cover member 146 configured to at least partially define a front surface of the tongue 34. The tongue 34 defines a lateral
 30 portion 147 overlying a lateral portion of the goalie's foot 11 and a medial portion 149 overlying a medial portion of the goalie's foot 11. The tongue 34 also defines a

distal end portion 151 for affixing to the toe cap 32 (e.g., via stitching) and a proximal end portion 153 that is nearest to the goalie's shin S.

The core 140 comprises one or more materials suitable for providing additional
5 rigidity to the tongue 34. For instance, in this embodiment, the core 140 comprises a padding reinforced with a rigid insert. The rigid insert of the core 140 may comprise any suitable material to provide additional rigidity to the tongue 34. For example, the rigid insert may comprise a plastic material (e.g., nylon) and/or a composite material (e.g., carbon fiber). The rigid insert may comprise any other suitable material in other
10 embodiments.

The padding member 142 is configured to surround the core 140 and is affixed thereto (e.g., via stitching). The padding member 142 comprises a material 148 suitable for absorbing impacts. For instance, in this embodiment, the material 148 comprises felt.
15 In other embodiments, the material 148 of the padding member 142 may comprise a foam material, a fibrous material, a non-woven material, a laminate material (e.g., foam "sandwiched" between layers of textile) or any other suitable material. The material 148 of the padding member 142 may be one of a plurality of materials of the padding member 142. For example, in some cases, the padding member 142 may comprise an
20 additional material (e.g., foam) that is layered on top of the material 148. Moreover, in this embodiment, the padding member 142 comprises a pair of padding elements 150₁, 150₂ that are affixed to one another to form the padding member 142. In this example, the padding elements 150₁, 150₂ are lateral and medial padding elements 150₁, 150₂.

25 The peripheral member 144 is affixed to the padding member 142 such as to define the periphery of the tongue 34. In this embodiment, the peripheral member 144 comprises a pair of peripheral elements 152₁, 152₂ that are affixed to one another, and to the padding member 142, to form the peripheral member 144. More particularly, in this embodiment, the peripheral elements 152₁, 152₂ are lateral and medial peripheral
30 elements 152₁, 152₂.

The cover member 146 constitutes an esthetic appearance of the front surface of the tongue 32. As such, the cover member 146 may comprise a variety of decorative features such as a textured surface (e.g., ridges, grooves, etc.), a trademark or logo stitched thereto or a section defining a different color. In some embodiments, the decorative features such as the logo may be printed or formed (e.g., embossed) on the cover member 146. In this embodiment, the cover member 146 comprises a plurality of cover elements 156₁-156_x that are affixed to one another (e.g., via stitching or gluing) in order to form the cover member 146. Moreover, in its assembled state, the cover member 146 defines an opening 154 for exposing the core 140.

10

In this embodiment, the tongue 34 is configured to be asymmetric. More particularly, the lateral and medial portions 147, 149 of the tongue 34 extend to different heights such that the proximal portion 153 of the tongue 34 is uneven in the height-wise direction of the skate 10_x. Specifically, the medial portion 149 of the tongue 34 extends higher than the lateral portion 147 of the tongue 34. To that end, the lateral and medial padding elements 150₁, 150₂ are shaped differently from one another and the lateral and medial peripheral elements 152₁, 152₂ are shaped differently from one another. Moreover, the cover member 146 is also configured such that its lateral portion is shaped differently from its medial portion. This asymmetric design of the tongue 34 may provide additional padding at a pressure point of the tongue 34 and may minimize interference with the goalie's leg (e.g., in butterfly style).

15

The skate boot 22 may be constructed in any other suitable way in other embodiments. For example, in other embodiments, various components of the skate boot 22 mentioned above may be configured differently or omitted and/or the skate boot 22 may comprise any other components that may be made of any other suitable materials and/or using any other suitable processes.

20

With additional reference to Figures 26 to 28, the blade holder 24 comprises a lower portion 162 comprising a blade-retaining base 164 that retains the blade 26 and an upper portion 166 comprising a support 168 that extends upwardly from the blade-

25

30

retaining base 164 towards the skate boot 22 to interconnect the blade holder 24 and the skate boot 22. A front portion 170 of the blade holder 24 and a rear portion 172 of the blade holder 24 define a longitudinal axis 174 of the blade holder 24. The front portion 170 of the blade holder 24 includes a frontmost point 176 of the blade holder 24 and extends beneath and along the skater's forefoot in use, while the rear portion 172 of the blade holder 24 includes a rearmost point 178 of the blade holder 24 and extends beneath and along the skater's hindfoot in use. An intermediate portion 180 of the blade holder 24 is between the front and rear portion 170, 172 of the blade holder 24 and extends beneath and along the skater's midfoot in use. A length L of the blade holder 24 can be measured from the frontmost point 176 to the rearmost point 178. The blade holder 24 comprises a medial side 182 and a lateral side 184 that are opposite one another. The blade holder 24 has a longitudinal direction (i.e., a direction generally parallel to its longitudinal axis 174) and transversal directions (i.e., directions transverse to its longitudinal axis 174), including a widthwise direction (i.e., a lateral direction generally perpendicular to its longitudinal axis 174). The blade holder 24 also has a height direction normal to its longitudinal and widthwise directions.

The blade-retaining base 164 is elongated in the longitudinal direction of the blade holder 24 and is configured to retain the blade 26 such that the blade 26 extends along a bottom portion 186 of the blade-retaining base 164 to contact the ice surface. To that end, the blade-retaining base 164 comprises a blade-retention portion 188 to face and retain the blade 26. In this embodiment, the blade-retention portion 188 comprises a recess 190 in which an upper portion of the blade 26 is disposed.

The blade holder 24 can retain the blade 26 in any suitable way. In this embodiment, the blade holder 24 comprises a blade-detachment mechanism 192 such that the blade 26 is selectively detachable and removable from, and attachable to, the blade holder 24 (e.g., when the blade 26 is worn out or otherwise needs to be replaced or removed from the blade holder 24). More particularly, in this embodiment, the blade

26 includes a plurality of projections 194, 196. The blade-detachment mechanism 192 includes an actuator 198 and a biasing element 200 which biases the actuator 198 in a direction towards the front portion 170 of the blade holder 24. In this embodiment, the actuator 198 comprises a trigger. To attach the blade 26 to the
5 blade holder 24, the front projection 194 is first positioned within a hollow space 202 (e.g., a recess or hole) of the blade holder 24. The rear projection 196 can then be pushed upwardly into a hollow space 204 (e.g., a recess or hole) of the blade holder 24, thereby causing the biasing element 200 to bend and the actuator 198 to move in a rearward direction. The rear projection 196 will eventually reach a position which
10 will allow the biasing element 200 to force the actuator 198 towards the front portion 170 of the blade holder 24, thereby locking the blade 26 in place. The blade 26 can then be removed by pushing against a finger-actuating surface 206 of the actuator 198 to release the rear projection 196 from the hollow space 204 of the blade holder 24. Thus, in this embodiment, the blade-detachment mechanism 192 is free of any
15 threaded fastener (e.g., a screw or bolt) to be manipulated to detach and remove the blade 26 from the blade holder 24 or to attach the blade 26 to the blade holder 24. Further information on examples of implementation of the blade-detachment mechanism 192 in some embodiments may be obtained from U.S. Patent 8,454,030 hereby incorporated by reference herein. The blade-detachment mechanism 192
20 may be configured in any other suitable way in other embodiments.

In this embodiment, the blade-retaining base 164 comprises a plurality of apertures 208₁-208₄ distributed in the longitudinal direction of the blade holder 24 and extending from the medial side 182 to the lateral side 184 of the blade holder 24. In
25 this example, respective ones of the apertures 208₁-208₄ differ in size. The apertures 208₁-208₄ may have any other suitable configuration, or may be omitted, in other embodiments.

The blade-retaining base 164 may be configured in any other suitable way in other
30 embodiments.

The support 168 is configured for supporting the skate boot 22 above the blade-retaining base 164 and transmit forces to and from the blade-retaining base 164 during skating. In this embodiment, the support 168 comprises a front pillar 210 and a rear pillar 212 which extend upwardly from the blade-retaining base 164 towards the skate boot 22. The front pillar 210 extends towards the front portion 56 of the skate boot 22 and the rear pillar 212 extends towards the rear portion 58 of the skate boot 22. The blade-retaining base 164 extends from the front pillar 210 to the rear pillar 212. More particularly, in this embodiment, the blade-retaining base 164 comprises a bridge 214 interconnecting the front and rear pillars 84, 86

10

The support 168 and the skate boot 22 can be connected to one another in any suitable way. In this embodiment, the support 168 is affixed to the skate boot 22. More particularly, in this embodiment, the front and rear pillars 210, 212 are fastened to the skate boot 22 by fasteners (e.g., rivets, screws, bolts). In this example, each of the front and rear pillars 210, 212 comprises a flange 216 including a plurality of apertures 218₁-218_F to receive respective ones of the fasteners that fasten the blade holder 24 to the skate boot 22. The support 168 may be affixed to the skate boot 22 in any other suitable manner in other embodiments (e.g., by an adhesive).

With additional reference to Figure 29, the blade 26 comprises an ice-contacting material 220 including an ice-contacting surface 222 for sliding on the ice surface while the goalie 12 skates. In this embodiment, the ice-contacting material 220 is a metallic material (e.g., stainless steel). The ice-contacting material 220 may be any other suitable material in other embodiments. Also, in this embodiment, an entirety of the blade 26 is made of the ice-contacting material 220. The blade 26 has a length L_T measured from a frontmost point 215 to a rearmost point 217 of the blade 26.

The ice-contacting surface 222 of the blade 26 comprises a flat portion 224 having a length L_F . The portion of the ice-contacting surface 222 that is not part of the flat portion 215 (i.e., on either side of the flat portion 125) diverges from the ice (e.g., is

generally curved away from the ice). The length L_F of the flat portion 224 is significant relative to the length L_T of the blade 26 as opposed to that of blades of other skates for hockey players other than goalies (i.e., forwards and defensemen). For instance, a ratio L_F/L_T of the length L_F of the flat portion 224 of the blade over the
 5 length L_T of the blade 26 may be at least 0.6, in some cases at least 0.65, in some cases at least 0.7, in some cases at least 0.75, in some cases at least 0.8, in some cases at least 0.85, and in some cases even more.

The blade 26 also has a width that is significant relative to a width of blades of other
 10 skates for hockey players other than goalies. For example, the width of the blade 26 may be at least 3 mm, in some cases at least 4 mm, in some cases at least 5 mm, and in some cases even more.

The blade holder 24 and the blade 26 may be designed to complementarily
 15 decrease a weight of the skate 10_x while simultaneously increasing its support height H_S . For instance, in this embodiment, the blade holder 24 has a relatively large height H_H . That is, the height H_H of the blade holder 24 is significant in comparison to the blade holder of conventional goalie skates. For example, a ratio H_H/H_S of the height H_H of the blade holder 24 over the support height H_S of the skate 10_x may be
 20 at least 0.7, in some cases at least 0.75, in some cases at least 0.8, in some cases at least 0.85, in some cases at least 0.9, and in some cases even more.

Simultaneously, the blade 26 may have a relatively small height H_P . That is, in this embodiment, the height H_P of the blade 26 is small in comparison to the blade of
 25 conventional goalie skates. For example, a ratio H_P/H_S of the height H_P of the blade 26 over the support height H_S of the skate 10_x may be at least 0.15, in some cases at least 0.2, in some cases at least 0.25, in some cases at least 0.3 and in some cases even more. Moreover, a ratio H_H/H_P of the height H_H of the blade holder 24 over the height H_P of the blade 26 may be at least 3, in some cases at least 3.5, in
 30 some cases at least 4, and in some cases even more.

As the blade 26 is typically denser than the blade holder 24, the increased height of the blade holder 24 and the decreased height of the blade 26 may cause a reduction in the weight of the skate 10_x. Moreover, the resulting increased support height H_S also may also allow an increase in the maximum angle of attack Θ_A of the skate 10_x.

5

The goalie skate 10_x may be implemented in any other suitable way in other embodiments.

For instance, in a variant, the blade holder 24 may retain the blade 26 in any other
 10 suitable way. For instance, instead of being selectively detachable and removable from and attachable to the blade holder 24, in other embodiments, the blade 26 may be permanently affixed to the blade holder 24 (i.e., not intended to be detached and removed from the blade holder 24). As an example, in some embodiments, as shown in Figures 30 and 31, the blade holder 24 may retain the blade 26 using an
 15 adhesive 226 and/or one or more fasteners 228. For instance, in some embodiments, as shown in Figure 30, the recess 190 of the blade holder 24 may receive the upper part of the blade 26 that is retained by the adhesive 226. The adhesive 226 may be an epoxy-based adhesive, a polyurethane-based adhesive, or any suitable adhesive. In some embodiments, instead of or in addition to using an
 20 adhesive, as shown in Figure 31, the recess 190 of the blade holder 24 may receive the upper part of the blade 26 that is retained by the one or more fasteners 228. Each fastener 228 may be a rivet, a screw, a bolt, or any other suitable mechanical fastener. Alternatively or additionally, in some embodiments, as shown in Figure 32, the blade-retention portion 188 of the blade holder 24 may extend into a recess 230
 25 of the upper part of the blade 26 to retain the blade 26 using the adhesive 226 and/or the one or more fasteners 228. For instance, in some cases, the blade-retention portion 188 of the blade holder 24 may comprise a projection 232 extending into the recess 230 of the blade 26. As another example, in some embodiments, as shown in Figure 33, the blade 26 and the blade-retaining base 164
 30 of the blade holder 24 may be mechanically interlocked via an interlocking portion 234 of one of the blade-retaining base 164 and the blade 26 that extends into an

interlocking void 236 of the other one of the blade-retaining base 164 and the blade 26. For instance, in some cases, the blade 26 can be positioned in a mold used for molding the blade holder 24 such that, during molding, the interlocking portion 234 of the blade-retaining base 164 flows into the interlocking void 236 of the blade 26 (i.e.,
5 the blade holder 24 is overmolded onto the blade 26).

The blade 26 may be implemented in any other suitable way in other embodiments. For example, in some embodiments, as shown in Figures 34 and 35, the blade 26 may comprise a runner 238 that is made of the ice-contacting material 220 and
10 includes the ice-contacting surface 222 and a body 240 connected to the runner 238 and made of a material 242 different from the ice-contacting material 220. The runner 238 and the body 240 of the blade 26 may be retained together in any suitable way. For example, in some cases, the runner 238 may be adhesively bonded to the body 240 using an adhesive. As another example, in addition to or
15 instead of being adhesively bonded, the runner 238 and the body 240 may be fastened using one or more fasteners (e.g., rivets, screws, bolts, etc.). As yet another example, the runner 238 and the body 240 may be mechanically interlocked by an interlocking portion of one of the runner 238 and the body 240 that extends into an interlocking space (e.g., one or more holes, one or more recesses, and/or
20 one or more other hollow areas) of the other one of the runner 238 and the body 240 (e.g., the body 240 may be overmolded onto the runner 238).

In other embodiments, the outer shell 30 of the skate boot 22 may be configured in various other ways such that a given part of the outer shell 30 that is more likely to be
25 impacted by a puck during play may be more protective than another part of the outer shell 30 that is less likely to be impacted by a puck during play. For example, in some embodiments, the lateral side portion 68 of the outer shell 30 may be more likely to be impacted during play than other portions of the outer shell 30 and may therefore be stiffer or otherwise provide better protection. For instance, in some embodiments, a
30 stiffness of the lateral side portion 68 of the outer shell 30 may be greater than a stiffness of the medial side portion 66 of the outer shell 30 such that a ratio of the

stiffness of the lateral side portion 68 of the outer shell 30 over the stiffness of the medial side portion 66 of the outer shell 30 may be at least a certain value.

In some embodiments, a given part of the outer shell 30 that is more likely to be impact
5 by a puck during play may have a hardness or an impact resistance that is greater than another part of the outer shell 30 that is less likely to be impacted by a puck during play. For instance, a hardness of the lateral side portion 68 of the outer shell 30 may be greater than a hardness of the medial side portion 66 of the outer shell 30 or an impact resistance of the lateral side portion 68 of the outer shell 30 may be greater
10 than an impact resistance of the medial side portion 66 of the outer shell 30.

To observe the stiffness of a part of the outer shell 30, as shown in Figure 36, the part of the outer shell 30 can be isolated from the remainder of the outer shell 30 (e.g., by cutting, or otherwise removing the part from the outer shell 30, or by producing the part
15 without the remainder of the outer shell 30) and a three-point bending test can be performed on the part to subject it to loading tending to bend the part in specified ways (along a defined direction of the part if the part is anisotropic) to observe the rigidity of the part and measure parameters indicative of the rigidity of the part. For instance in some embodiments, the three-point bending test may be based on conditions defined
20 in a standard test (e.g., ISO 178(2010)).

For example, to observe the rigidity of the outer shell 30, the three-point bending test may be performed to subject the outer shell 30 to loading tending to bend the outer shell 30 until a predetermined deflection of the outer shell 30 is reached and measure a
25 bending load at that predetermined deflection of the outer shell 30. The predetermined deflection of the outer shell 30 may be selected such as to correspond to a predetermined strain of the outer shell 30 at a specified point of the outer shell 30 (e.g., a point of the inner surface of the outer shell 30). For instance, in some embodiments, the predetermined strain of the outer shell 30 may be between 3% and 5%. The bending
30 load at the predetermined deflection of the outer shell 30 may be used to calculate a bending stress at the specified point of the outer shell 30. The bending stress at the

specified point of the outer shell 30 may be calculated as $\sigma = My/I$, where M is the moment about a neutral axis of the outer shell 30 caused by the bending load, y is the perpendicular distance from the specified point of the outer shell 30 to the neutral axis of the outer shell 30, and I is the second moment of area about the neutral axis of the
 5 outer shell 30. The rigidity of the outer shell 30 can be taken as the bending stress at the predetermined strain (i.e., at the predetermined deflection) of the outer shell 30. Alternatively, the rigidity of the outer shell 30 may be taken as the bending load at the predetermined deflection of the outer shell 30. Any other suitable test may be used in other embodiments (e.g., a charmin test or a forward flex test).

10

To provide a part of the outer shell 30 with more stiffness than another part of the outer shell 30, the modulus of elasticity of certain parts of the outer shell 30 may vary. For instance, in some cases, the modulus of elasticity of a given one of the heel portion 62, the ankle portion 64, the medial side portion 66 and the lateral side portion 68 of the
 15 outer shell 30 may be greater than the modulus of elasticity of another one of the heel portion 62, the ankle portion 64, the medial side portion 66 and the lateral side portion 68 of the outer shell 30. For instance, in some examples of implementation, the modulus of elasticity of the lateral side portion 68 of the outer shell 30 may be greater than the modulus of elasticity of the medial side portion 66 of the outer shell 30. In
 20 some examples of implementation, the modulus of elasticity of the heel portion 62 of the outer shell 30 may be greater than the modulus of elasticity of the medial side portion 68 of the outer shell 30. This may provide additional reinforcement at the lateral side portion 68 and/or the heel portion 62 of the outer shell 30 where impact by a puck may be more likely to occur during play.

25

In some cases, the modulus of elasticity of a given one of the heel portion 62, the ankle portion 64, the medial side portion 66 and the lateral side portion 68 of the outer shell 30 may vary. For instance, in some examples of implementation, as shown in Figure 37, the modulus of elasticity of a first area 250 of the lateral side portion 68 of the outer
 30 shell 30 may be greater than the modulus of elasticity of a second area 252 of the lateral side portion 68 of the outer shell 30. For example, a ratio of the modulus of

elasticity of the first area 250 of the lateral side portion 68 over the modulus of elasticity of the second area 252 of the lateral side portion 68 may be at least a certain value. In this example, the first area 250 is lower than the second area 252 in the height-wise direction of the skate 10_x. For example, the first area 250 may be part of the bottom
 5 region 84 of the lateral side portion 68. In another example of implementation, as shown in Figure 38, the modulus of elasticity of a first area 254 of the heel portion 62 of the outer shell 30 may be greater than the modulus of elasticity of a second area 256 of the heel portion 62 of the outer shell 30. For example, a ratio of the modulus of elasticity of the first area 254 of the heel portion 62 over the modulus of elasticity of the
 10 second area 256 of the heel portion 62 may be at least a certain value. In this example, the first area 254 is lower than the second area 256 in the height-wise direction of the skate 10_x. For example, the first area 254 may be part of the bottom region 88 of the heel portion 62.

15 In some cases, a given one of the heel portion 62, the ankle portion 64, the medial side portion 66 and the lateral side portion 68 of the outer shell 30 may be configured to be thicker than another one of the heel portion 62, the ankle portion 64, the medial side portion 66 and the lateral side portion 68 of the outer shell 30. For example, a ratio of a thickness of the lateral side portion 68 over a thickness of the medial side portion 66
 20 may be at least 1.2, in some cases at least 1.4, in some cases at least 1.6, in some cases at least 1.8, in some cases at least 2, and in some cases even more.

In another variant, the toe cap 32 of the skate boot 22 may be configured such that a first part of the toe cap 32 that is more likely to be impacted by a puck during play may
 25 be more protective (e.g., stiffer) than a second part of the toe cap 32 that is less likely to be impacted by a puck during play.

For instance, a given one of the lateral side portion 118, the medial side portion 120, the end portion 122 and the upper portion 124 of the toe cap 32 may be configured to
 30 be stiffer than another one of the lateral side portion 118, the medial side portion 120, the end portion 122 and the upper portion 124 of the toe cap 32. For example, a ratio

of a stiffness of the lateral side portion 118 of the toe cap 32 over a stiffness of the medial side portion 120 of the toe cap 32 may be at least a certain value.

To provide a part of the toe cap 32 with more stiffness than another part of the toe cap 32, the modulus of elasticity of certain parts of the toe cap 32 may vary. For instance, in some cases, the modulus of elasticity of a given one of the lateral side portion 118, the medial side portion 120, the end portion 122 and the upper portion 124 of the toe cap 32 may be greater than the modulus of elasticity of another one of the lateral side portion 118, the medial side portion 120, the end portion 122 and the upper portion 124 of the toe cap 32. For instance, in some examples of implementation, the modulus of elasticity of the lateral side portion 118 of the toe cap 32 may be greater than the modulus of elasticity of the medial side portion 120 of the toe cap 32. In some examples of implementation, the modulus of elasticity of the end portion 122 of the toe cap 32 may be greater than the modulus of elasticity of the medial side portion 120 of the toe cap 32. This may provide additional reinforcement at the lateral side portion 118 and/or the end portion 122 of the toe cap 32 where impact by a puck may be more likely to occur during play.

In some cases, the modulus of elasticity of a given one of the lateral side portion 118, the medial side portion 120, the end portion 122 and the upper portion 124 of the toe cap 32 may vary. For instance, in one example of implementation, as shown in Figure 39, the modulus of elasticity of a first area 258 of the lateral side portion 118 of the toe cap 32 may be greater than the modulus of elasticity of a second area 260 of the lateral side portion 118 of the toe cap 32. For example, a ratio of the modulus of elasticity of the first area 258 of the lateral side portion 118 over the modulus of elasticity of the second area 260 of the lateral side portion 118 may be at least a certain value. In this example, the first area 258 is lower than the second area 260 in the height-wise direction of the skate 10_x. For example, the first area 258 may be part of the bottom region 90 of the toe cap 32.

30

To implement different stiffnesses at different parts of the toe cap 32, the toe cap 32

may comprise a plurality of materials having different properties. For example, with additional reference to Figure 40, the toe cap 32 may comprise a second synthetic material 115 different from the first synthetic material 105 of the toe cap 32. The second synthetic material 115 of the toe cap 32 may be stiffer than the first synthetic material 105 of the toe cap 32. For example, a ratio of the modulus of elasticity of the second synthetic material 115 of the toe cap 32 over the modulus of elasticity of the first synthetic material 105 of the toe cap 32 may be at least a certain value.

In one example of implementation, with additional reference to Figure 41, an overlay 135 comprising the second synthetic material 115 of the toe cap 32 may be disposed over the first synthetic material 105 of the toe cap 32. For instance, the second synthetic material 115 of the toe cap 32 may be bonded to the first synthetic material 105 of the toe cap 32 in any suitable way. For example, the second synthetic material 115 of the toe cap 32 may be adhesively bonded, stitched, welded (e.g., ultrasonically welded) or overmolded onto the first synthetic material 105 of the toe cap 32.

In another example of implementation, in order to make a part of the toe cap 32 stiffer, the toe cap 32 may be configured such that its thickness T_C varies. For example, a given one of the lateral side portion 118, the medial side portion 120, the end portion 122 and the upper portion 124 of the toe cap 32 may have a thickness that is greater than a thickness of another one of the lateral side portion 118, the medial side portion 120, the end portion 122 and the upper portion 124 of the toe cap 32. This may impart reinforcement at selected portion(s) of the toe cap 32 that are more likely to be impacted during play.

In one example of implementation, the bottom region 90 of the toe cap 32 may have a thickness that is greater than a remainder of the toe cap 90. As another example, a thickness of the lateral side portion 118 of the toe cap 32 may be greater than a thickness of the medial side portion 120 of the toe cap 32. In some cases, a thickness of the end portion 122 of the toe cap 32 may be greater than the thickness of the medial side portion 120 of the toe cap 32. The thickness of the toe cap 32 may vary in

any other suitable way.

Furthermore, in some embodiments, the thickness of a given one of the lateral side portion 118, the medial side portion 120, the end portion 122 and the upper portion 124 of the toe cap 32 may vary. For instance, as shown in Figure 20, a thickness T_{C1} of a first area 128 of the lateral side portion 118 may be greater than a thickness T_{C2} of a second area 130 of the lateral side portion 118. A ratio of the thickness T_{C1} of the first area 128 over the thickness T_{C2} of the second area 130 may be at least 1.1, in some cases at least 1.2, in some cases at least 1.3, and in some cases even more. In this example, the first area 128 is lower than the second area 130 in the height-wise direction of the skate 10_x such that a lower area of the lateral side portion 118 is thicker than an upper area of the lateral side portion 118.

In one example of implementation, the different thicknesses at different parts of the toe cap 32 may be provided through the second synthetic material 115 of the toe cap 32 when it is used as an overlay that is disposed over the first synthetic material 105 of the toe cap 32. For instance, the second synthetic material 115 of the toe cap 32 may have a thickness different from a thickness of the first synthetic material 105 of the toe cap 32. For example, the thickness of the second synthetic material 115 of the toe cap 32 may be less than the thickness of the first synthetic material 105 of the toe cap 32.

Although in embodiments considered above the skate 10_x is designed for playing ice hockey on the playing surface 12 which is ice, in other embodiments, the skate 10_x may be constructed using principles described herein for playing roller hockey or another type of hockey (e.g., field or street hockey) on the playing surface 12 which is a dry playing surface (e.g., a polymeric, concrete, wooden, or turf playing surface or any other dry playing surface on which roller hockey or field or street hockey is played). Thus, in other embodiments, instead of comprising a skating device that comprises the blade 26, the skate 10_x may comprise a skating device that comprises a set of wheels to roll on the dry playing surface 12.

In some embodiments, any feature of any embodiment described herein may be used in combination with any feature of any other embodiment described herein.

5 Certain additional elements that may be needed for operation of certain embodiments have not been described or illustrated as they are assumed to be within the purview of those of ordinary skill in the art. Moreover, certain embodiments may be free of, may lack and/or may function without any element that is not specifically disclosed herein.

10 To facilitate the description, any reference numeral designating an element in one figure designates the same element if used in any other figures. In describing the embodiments, specific terminology has been resorted to for the sake of description but the invention is not intended to be limited to the specific terms so selected, and it is understood that each specific term comprises all equivalents.

15

Although various embodiments have been illustrated, this was for the purpose of describing, but not limiting, the invention. Various modifications will become apparent to those skilled in the art and are within the scope of this invention, which is defined more particularly by the attached claims.

20

1. A skate for a hockey goalkeeper, the skate comprising:

- a skate boot for receiving a foot of the hockey goalkeeper;
- a blade for contacting ice; and
- a blade holder between the skate boot and the blade;

5 the skate boot comprising:

- an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing a

10 lateral side of the foot of the hockey goalkeeper;

- a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being affixed to the outer shell; and

- a tongue connected to the toe cap and defining a highest point of the skate boot; wherein the outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than the synthetic first material; wherein
- 20 a bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell;

wherein at least one of the heel portion, the ankle portion, the medial side portion and the lateral side portion of the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play and a non-reinforced portion;

25 and

wherein a ratio of a thickness of the reinforced portion over a thickness of the non-reinforced portion is at least 1.1.

30 2. The skate of claim 1, wherein the skate allows an angle of attack with the ice of at least 140°.

3. The skate of claim 1, wherein the skate allows an angle of attack with the ice of at least 145°.
- 5 4. The skate of any one of claims 1 to 3, wherein a support height of the skate is at least 70 mm.
5. The skate of any one of claims 1 to 3, wherein a support height of the skate is at least 75 mm.
- 10 6. The skate of any one of claims 1 to 5, wherein a thickness of the lateral side portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
- 15 7. The skate of any one of claims 1 to 5, wherein a thickness of the lateral side portion of the outer shell varies such that the thickness of a first area of the lateral side portion of the outer shell is greater than the thickness of a second area of the lateral side portion of the outer shell.
- 20 8. The skate of claim 7, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer in the height-wise direction of the skate.
9. The skate of any one of claims 1 to 5, wherein a thickness of the heel portion
25 of the outer shell is greater than a thickness of the medial side portion of the outer shell.
10. The skate of any one of claims 1 to 3, wherein a modulus of elasticity of the lateral side portion of the outer shell is greater than a modulus of elasticity of
30 the medial side portion of the outer shell.

11. The skate of any one of claims 1 to 3, wherein a modulus of elasticity of the lateral side portion of the outer shell varies such that the modulus of elasticity of a first area of the lateral side portion of the outer shell is greater than the modulus of elasticity of a second area of the lateral side portion of the outer shell.
12. The skate of claim 11, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer shell in the height-wise direction of the skate.
13. The skate of any one of claims 1 to 3, wherein a modulus of elasticity of the heel portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.
14. The skate of any one of claims 1 to 3, wherein the synthetic first material of the outer shell is molded material.
15. The skate of claim 14, wherein the molded material of the outer shell is thermoformed material.
16. The skate of any one of claims 1 to 14, wherein the synthetic first material comprises a composite material.
17. The skate of claim 16, wherein the composite material comprises fibers in a polymeric matrix.
18. The skate of any one of claims 1 to 17, wherein the second material comprises at least one of polypropylene, nylon, polyester, polyvinyl chloride, styrene-butadiene copolymer, and ionomer resin.

19. The skate of any one of claims 1 to 18, wherein the second material is bonded to the synthetic first material.
- 5 20. The skate of any one of claims 1 to 19, wherein the second material is overmolded onto synthetic first material.
- 10 21. The skate of any one of claims 1 to 20, wherein a thickness of the second material of the outer shell is different from a thickness of the synthetic first material of the outer shell.
- 15 22. The skate of any one of claims 1 to 21, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side portion for facing a big toe of the foot of the hockey goalkeeper; and a thickness of the lateral side portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.
- 20 23. The skate of any one of claims 1 to 21, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side portion for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; and a thickness of the end portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.
- 25 24. The skate of any one of claims 1 to 21, wherein the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, and a thickness of the lateral side portion of the toe cap varies such that the thickness of a first area of the lateral side portion of the toe cap is greater than the thickness of a second area of the lateral side portion of the toe cap.

25. The skate of claim 24, wherein the first area of the lateral side portion of the toe cap is lower than the second area of the lateral side portion of the toe cap in the height-wise direction of the skate.
- 5 26. The skate of any one of claims 1 to 25, wherein a first part of the toe cap is stiffer than a second part of the toe cap.
27. The skate of claim 26, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side
10 for facing a big toe of the foot of the hockey goalkeeper; the first part of the toe cap comprises at least part of the lateral side portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.
- 15 28. The skate of claim 26, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; the first part of the toe cap comprises at least part of the end portion of the toe
20 cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.
29. The skate of any one of claims 26 to 28, wherein the first part of the toe cap is thicker than the second part of the toe cap.
- 25 30. The skate of any one of claims 1 to 29, wherein the toe cap comprises a reinforcement.
31. The skate of claim 30, wherein the reinforcement of the toe cap comprises a
30 projection.

32. The skate of claim 30, wherein the reinforcement of the toe cap comprises a plurality of reinforcing elements distributed on the toe cap.
- 5 33. The skate of any one of claims 1 to 32, wherein the ankle portion of the outer shell comprises a medial upper edge for facing a medial side of the ankle of the hockey goalkeeper and a lateral upper edge for facing a lateral side of the ankle of the hockey goalkeeper, and the lateral upper edge of the ankle portion of the outer shell extends lower than the medial upper edge of the ankle portion of the outer shell.
- 10 34. The skate of any one of claims 1 to 33, wherein the blade holder comprises a blade-detachment mechanism configured to selectively detach and remove the blade from the blade holder and attach the blade to the blade holder.
- 15 35. The skate of any one of claims 1 to 34, wherein a ratio of a height of the skate boot over a length of the skate boot is no more than 0.8.
- 20 36. The skate of any one of claims 1 to 35, wherein an underside portion of the skate boot is exposed without any cowling covering the underside portion of the skate boot.
- 25 37. The skate of any one of claims 1 to 36, wherein a bottom of the medial side portion of the outer shell is exposed without any cowling covering the bottom of the medial side portion of the outer shell.
- 30 38. The skate of claim 37, wherein a bottom of the heel portion of the outer shell is exposed without any cowling covering the bottom of the heel portion of the outer shell.
39. The skate of any one of claims 1 to 38, wherein the reinforced portion of the outer shell includes the bottom of the lateral side portion of the outer shell.

40. The skate of claim 39, wherein the reinforced portion of the outer shell includes the bottom of the lateral side portion of the outer shell and the bottom of the medial side portion of the outer shell.

5

41. The skate of claim 40, wherein the reinforced portion of the outer shell includes the bottom of the lateral side portion of the outer shell, the bottom of the medial side portion of the outer shell, and the bottom of the heel portion of the outer shell.

10

42. The skate of any one of claims 1 to 41, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.15.

15 43. The skate of any one of claims 1 to 41, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.20.

20 44. The skate of any one of claims 1 to 41, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.25.

25 45. The skate of any one of claims 1 to 44, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.1.

30 46. The skate of any one of claims 1 to 44, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.5.

47. The skate of any one of claims 1 to 44, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 2.
- 5 48. The skate of any one of claims 1 to 47, wherein the blade holder comprises a support connected to the skate boot.
49. The skate of claim 48, wherein the support is affixed to the skate boot.
- 10 50. The skate of claim 49, wherein the support is fastened to the skate boot via a fastener.
51. A skate for a hockey goalkeeper, the skate comprising:
- 15 a. a skate boot for receiving a foot of the hockey goalkeeper, the skate boot comprising:
- an outer shell, the outer shell comprising a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper, a medial side for facing a medial side of the foot of the hockey goalkeeper, a heel portion for facing a heel of the foot of the hockey goalkeeper, and an ankle portion for receiving an ankle of the hockey goalkeeper;

20 - a toe cap affixed to the outer shell for facing toes of the foot of the hockey goalkeeper; and

- a tongue connected to the toe cap and defining a highest point of the skate boot; the skate boot being free of a tendon guard projecting

25 upwardly from the ankle portion of the outer shell;
- b. a blade for contacting ice;
- c. a blade holder between the skate boot and the blade, the blade holder comprising a support connected to the skate boot;
- wherein the outer shell comprises (i) a body made of a synthetic first material and
- 30 (ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay

comprising a second material, the second material being less rigid than the synthetic first material; wherein a bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell.

5

52. The skate of claim 51, wherein the skate allows an angle of attack with the ice of at least 140° .

53. The skate of claim 51, wherein the skate allows an angle of attack with the ice
10 of at least 145° .

54. The skate of any one of claims 51 to 53, wherein a support height of the skate is at least 70 mm.

15 55. The skate of any one of claims 51 to 53, wherein a support height of the skate is at least 75 mm.

56. The skate of any one of claims 51 to 55, wherein the outer shell comprises a reinforced part exposed to impact with a puck during play.

20

57. The skate of claim 56, wherein the reinforced part of the outer shell comprises at least part of the lateral side portion of the outer shell.

58. The skate of claim 57, wherein the reinforced part of the outer shell comprises
25 a lower region of the lateral side portion of the outer shell.

59. The skate of claim 57, wherein the reinforced part of the outer shell comprises at least part of the medial side portion of the outer shell.

30 60. The skate of claim 56, wherein the reinforced part of the outer shell comprises at least part of the heel portion of the outer shell.

61. The skate of claim 60, wherein the reinforced part of the outer shell comprises at least part of the lateral side portion of the outer shell.
- 5 62. The skate of claim 56, wherein the outer shell also comprises a non-reinforced part.
63. The skate of claim 62, wherein the ratio of the thickness of the reinforced part over the thickness of the non-reinforced part of the outer shell is at least 1.15.
- 10 64. The skate of claim 62, wherein the ratio of the thickness of the reinforced part over the thickness of the non-reinforced part of the outer shell is at least 1.20.
- 15 65. The skate of claim 62, wherein the ratio of the thickness of the reinforced part over the thickness of the non-reinforced part of the outer shell is at least 1.25.
66. The skate of any one of claims claim 62 to 65, wherein a ratio of a modulus of elasticity of the reinforced part over a modulus of elasticity of the non-reinforced part of the outer shell is at least 1.1.
- 20 67. The skate of any one of claims claim 62 to 65, wherein a ratio of a modulus of elasticity of the reinforced part over a modulus of elasticity of the non-reinforced part of the outer shell is at least 1.5.
- 25 68. The skate of any one of claims claim 62 to 65, wherein a ratio of a modulus of elasticity of the reinforced part over a modulus of elasticity of the non-reinforced part of the outer shell is at least 2.
- 30 69. The skate of any one of claims 51 to 68, wherein a thickness of the lateral side portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.

- 5 70. The skate of any one of claims 51 to 68, wherein a thickness of the lateral side portion of the outer shell varies such that the thickness of a first area of the lateral side portion of the outer shell is greater than the thickness of a second area of the lateral side portion of the outer shell.
- 10 71. The skate of any one of claims 51 to 68, wherein a thickness of the heel portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
- 15 72. The skate of any one of claims 51 to 71, wherein a modulus of elasticity of the lateral side portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.
- 20 73. The skate of any one of claims 51 to 71, wherein a modulus of elasticity of the lateral side portion of the outer shell varies such that the modulus of elasticity of a first area of the lateral side portion of the outer shell is greater than the modulus of elasticity of a second area of the lateral side portion of the outer shell.
- 25 74. The skate of claim 73, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer shell in the height-wise direction of the skate.
- 30 75. The skate of any one of claims 51 to 71, wherein a modulus of elasticity of the heel portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.
76. The skate of any one of claims 51 to 75, wherein the synthetic first material of the outer shell is molded material.

77. The skate of claim 76, wherein the molded material of the outer shell is thermoformed material.
- 5 78. The skate of any one of claims 51 to 77, wherein the synthetic first material comprises a composite material.
79. The skate of claim 78, wherein the composite material comprises fibers in a polymeric matrix.
- 10 80. The skate of any one of claims 51 to 79, wherein the second material comprises at least one of polypropylene, nylon, polyester, polyvinyl chloride, styrene-butadiene copolymer, and ionomer resin.
- 15 81. The skate of any one of claims 51 to 80, wherein the second material is bonded to the synthetic first material.
82. The skate of any one of claims 51 to 81, wherein the second material is overmolded onto synthetic first material.
- 20 83. The skate of any one of claims 51 to 82, wherein a thickness of the second material of the outer shell is different from a thickness of the synthetic first material of the outer shell.
- 25 84. The skate of any one of claims 51 to 82, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side portion for facing a big toe of the foot of the hockey goalkeeper; and a thickness of the lateral side portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.
- 30 85. The skate of any one of claims 51 to 82, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a

a medial side portion for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; and a thickness of the end portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.

5

86. The skate of any one of claims 51 to 82, wherein the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, and a thickness of the lateral side portion of the toe cap varies such that the thickness of a first area of the lateral side portion of the toe cap is greater than the thickness of a second area of the lateral side portion of the toe cap.

10

87. The skate of claim 86, wherein the first area of the lateral side portion of the toe cap is lower than the second area of the lateral side portion of the toe cap in the height-wise direction of the skate.

15

88. The skate of any one of claims 51 to 87, wherein a first part of the toe cap is stiffer than a second part of the toe cap.

20

89. The skate of claim 88, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side for facing a big toe of the foot of the hockey goalkeeper; the first part of the toe cap comprises at least part of the lateral side portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.

25

90. The skate of claim 88, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; the first part of the toe cap comprises at least part of the end portion of the toe

30

cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.

- 5 91. The skate of any one of claims 88 to 90, wherein the first part of the toe cap is thicker than the second part of the toe cap.
92. The skate of any one of claims 51 to 91, wherein the toe cap comprises a reinforcement.
- 10 93. The skate of claim 92, wherein the reinforcement of the toe cap comprises a projection.
94. The skate of claim 92, wherein the reinforcement of the toe cap comprises a plurality of reinforcing elements distributed on the toe cap.
- 15 95. The skate of any one of claims 51 to 94, wherein the ankle portion of the outer shell comprises a medial upper edge for facing a medial side of the ankle of the hockey goalkeeper and a lateral upper edge for facing a lateral side of the ankle of the hockey goalkeeper, and the lateral upper edge of the ankle portion of the outer shell extends lower than the medial upper edge of the ankle portion of the outer shell.
- 20 96. The skate of any one of claims 51 to 95, wherein the blade holder comprises a blade-detachment mechanism configured to selectively detach and remove the blade from the blade holder and attach the blade to the blade holder.
- 25 97. The skate of any one of claims 51 to 96, wherein a ratio of a height of the skate boot over a length of the skate boot is no more than 0.8.

98. The skate of any one of claims 51 to 97, wherein an underside portion of the skate boot is exposed without any cowling covering the underside portion of the skate boot.
- 5 99. The skate of any one of claims 51 to 98, wherein a bottom of the medial side portion of the outer shell is exposed without any cowling covering the bottom of the medial side portion of the outer shell.
100. The skate of claim 99, wherein a bottom of the heel portion of the outer shell
10 is exposed without any cowling covering the bottom of the heel portion of the outer shell.
101. The skate of any one of claims 51 to 100, wherein the support is affixed to the skate boot.
- 15 102. The skate of claim 101, wherein the support is fastened to the skate boot via a fastener.
103. A skate for a hockey goalkeeper, the skate comprising:
- 20 a. a skate boot for receiving a foot of the hockey goalkeeper, the skate boot comprising:
- an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the
25 foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper;
 - a toe cap affixed to the outer shell for facing toes of the foot of the hockey goalkeeper; and
 - a tongue connected to the toe cap and defining a highest point of the
30 skate boot; the skate boot having an upper edge, the tongue having an upper edge that is part of the upper edge of the skate boot, a rear of the

ankle portion of the outer shell being configured to face at least one of a rear of the ankle of the hockey goalkeeper and a lower part of an Achilles tendon of the hockey goalkeeper and having an upper edge that is part of the upper edge of the skate boot and lower than the upper edge of the tongue in a height-wise direction of the skate when the skate is worn;

- b. a blade for contacting ice; and
- c. a blade holder between the skate boot and the blade, the blade holder comprising a blade-detachment mechanism configured to selectively detach and remove the blade from the blade holder and attach the blade to the blade holder, the blade-detachment mechanism comprising an actuator manually operable to detach and remove the blade from the blade holder, the blade holder comprising a support connected to the skate boot;

wherein the outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than the synthetic first material.

104. The skate of claim 103, wherein the skate allows an angle of attack with the ice of at least 140° .

105. The skate of claim 103, wherein the skate allows an angle of attack with the ice of at least 145° .

106. The skate of any one of claims 103 to 105, wherein a support height of the skate is at least 70 mm.

107. The skate of any one of claims 103 to 105, wherein a support height of the skate is at least 75 mm.

108. The skate of any one of claims 103 to 107, wherein the outer shell comprises a reinforced part exposed to impact with a puck during play.
- 5 109. The skate of claim 108, wherein the reinforced part of the outer shell comprises at least part of the lateral side portion of the outer shell.
110. The skate of claim 109, wherein the reinforced part of the outer shell comprises a lower region of the lateral side portion of the outer shell.
- 10 111. The skate of claim 108, wherein the reinforced part of the outer shell comprises at least part of the medial side portion of the outer shell.
112. The skate of claim 108, wherein the reinforced part of the outer shell comprises at least part of the heel portion of the outer shell.
- 15 113. The skate of claim 112, wherein the reinforced part of the outer shell comprises at least part of the lateral side portion of the outer shell.
114. The skate of claim 108, wherein the outer shell also comprises a non-reinforced part.
- 20 115. The skate of claim 114, wherein a ratio of a thickness of the reinforced part over a thickness of the non-reinforced part of the outer shell is at least 1.15.
- 25 116. The skate of claim 108, wherein a ratio of a thickness of the reinforced part over a thickness of the non-reinforced part of the outer shell is at least 1.20.
117. The skate of claim 108, wherein a ratio of a thickness of the reinforced part over a thickness of the non-reinforced part of the outer shell is at least 1.25.

30

118. The skate of any one of claims claim 108 to 117, wherein a ratio of a modulus of elasticity of the reinforced part over a modulus of elasticity of the non-reinforced part of the outer shell is at least 1.1.
- 5 119. The skate of any one of claims claim 108 to 117, wherein a ratio of a modulus of elasticity of the reinforced part over a modulus of elasticity of the non-reinforced part of the outer shell is at least 1.5.
- 10 120. The skate of any one of claims claim 108 to 117, wherein a ratio of a modulus of elasticity of the reinforced part over a modulus of elasticity of the non-reinforced part of the outer shell is at least 2.
- 15 121. The skate of any one of claims 103 to 120, wherein a thickness of the lateral side portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
- 20 122. The skate of any one of claims 103 to 117, wherein a thickness of the lateral side portion of the outer shell varies such that the thickness of a first area of the lateral side portion of the outer shell is greater than the thickness of a second area of the lateral side portion of the outer shell.
- 25 123. The skate of any one of claims 103 to 117, wherein a thickness of the heel portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
- 30 124. The skate of any one of claims 103 to 124, wherein a modulus of elasticity of the lateral side portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.
125. The skate of any one of claims 103 to 124, wherein a modulus of elasticity of the lateral side portion of the outer shell varies such that the modulus of

elasticity of a first area of the lateral side portion of the outer shell is greater than the modulus of elasticity of a second area of the lateral side portion of the outer shell.

5 126. The skate of claim 125, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer shell in the height-wise direction of the skate.

10 127. The skate of any one of claims 103 to 124, wherein a modulus of elasticity of the heel portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.

128. The skate of any one of claims 103 to 127, wherein the synthetic first material of the outer shell is molded material.

15

129. The skate of claim 128, wherein the molded material of the outer shell is thermoformed material.

20 130. The skate of any one of claims 103 to 129, wherein the synthetic first material comprises a composite material.

131. The skate of claim 130, wherein the composite material comprises fibers in a polymeric matrix.

25 132. The skate of any one of claims 103 to 131, wherein the second material comprises at least one of polypropylene, nylon, polyester, polyvinyl chloride, styrene-butadiene copolymer, and ionomer resin.

30 133. The skate of any one of claims 103 to 132, wherein the second material is bonded to the synthetic first material.

134. The skate of any one of claims 103 to 133, wherein the second material is overmolded onto synthetic first material.
- 5 135. The skate of any one of claims 103 to 134, wherein a thickness of the second material of the outer shell is different from a thickness of the synthetic first material of the outer shell.
- 10 136. The skate of any one of claims 103 to 135, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side portion for facing a big toe of the foot of the hockey goalkeeper; and a thickness of the lateral side portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.
- 15 137. The skate of any one of claims 103 to 135, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side portion for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; and a thickness of the end portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.
- 20 138. The skate of any one of claims 103 to 135, wherein the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, and a thickness of the lateral side portion of the toe cap varies such that the thickness of a first area of the lateral side portion of the toe cap is greater than the thickness of a second area of the lateral side portion of the toe cap.
- 25 139. The skate of claim 138, wherein the first area of the lateral side portion of the toe cap is lower than the second area of the lateral side portion of the toe cap in the height-wise direction of the skate.
- 30

140. The skate of any one of claims 103 to 139, wherein a first part of the toe cap is stiffer than a second part of the toe cap.

141. The skate of claim 140, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side for facing a big toe of the foot of the hockey goalkeeper; the first part of the toe cap comprises at least part of the lateral side portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.

142. The skate of claim 135, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; the first part of the toe cap comprises at least part of the end portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.

143. The skate of any one of claims 140 to 142, wherein the first part of the toe cap is thicker than the second part of the toe cap.

144. The skate of any one of claims 103 to 143, wherein the toe cap comprises a reinforcement.

145. The skate of claim 144, wherein the reinforcement of the toe cap comprises a projection.

146. The skate of claim 144, wherein the reinforcement of the toe cap comprises a plurality of reinforcing elements distributed on the toe cap.

147. The skate of any one of claims 103 to 146, wherein a ratio of a height of the skate boot over a length of the skate boot is no more than 0.8.
- 5 148. The skate of any one of claims 103 to 147, wherein an underside portion of the skate boot is exposed without any cowling covering the underside portion of the skate boot.
- 10 149. The skate of any one of claims 103 to 148, wherein a bottom of the medial side portion of the outer shell is exposed without any cowling covering the bottom of the medial side portion of the outer shell.
- 15 150. The skate of claim 149, wherein a bottom of the heel portion of the outer shell is exposed without any cowling covering the bottom of the heel portion of the outer shell.
151. The skate of any one of claims 103 to 150, wherein the support is affixed to the skate boot.
- 20 152. The skate of claim 151, wherein the support is fastened to the skate boot via a fastener.
153. A skate for a hockey goalkeeper, the skate comprising:
- 25 a. a skate boot for receiving a foot of the hockey goalkeeper, the skate boot comprising an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper;
- 30 b. a blade for contacting ice; and
- c. a blade holder between the skate boot and the blade, the blade holder comprising a support connected to the skate boot;

wherein the outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than the synthetic first material; wherein the blade comprises an ice-contacting surface, the ice-contacting surface comprises a flat portion, and a ratio of a length of the flat portion of the ice-contacting surface over a length of the blade is at least 0.7; wherein a bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell; wherein at least one of the heel portion, the ankle portion, the medial side portion and the lateral side portion of the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play and a non-reinforced portion; and wherein a ratio of a thickness of the reinforced portion over a thickness of the non-reinforced portion is at least 1.1.

154. The skate of claim 153, wherein the skate allows an angle of attack with the ice of at least 140° .

155. The skate of claim 153, wherein the skate allows an angle of attack with the ice of at least 145° .

156. The skate of any one of claims 153 to 155, wherein a support height of the skate is at least 70 mm.

157. The skate of any one of claims 153 to 156, wherein a support height of the skate is at least 75 mm.

158. The skate of any one of claims 153 to 157, wherein the reinforced portion of the outer shell comprises at least part of the lateral side portion of the outer shell.

159. The skate of any one of claims 153 to 157, wherein the reinforced portion of the outer shell comprises a lower region of the lateral side portion of the outer shell.

5

160. The skate of any one of claims 153 to 157, wherein the reinforced portion of the outer shell comprises at least part of the medial side portion of the outer shell.

10 161. The skate of any one of claims 153 to 157, wherein the reinforced portion of the outer shell comprises at least part of the heel portion of the outer shell.

162. The skate of claim 161, wherein the reinforced portion of the outer shell comprises at least part of the lateral side portion of the outer shell.

15

163. The skate of any one of claims 153 to 162, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.15.

20 164. The skate of any one of claims 153 to 162, wherein the ratio of the thickness of the reinforced part over the thickness of the non-reinforced part of the outer shell is at least 1.20.

25 165. The skate of any one of claims 153 to 162, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.25.

30 166. The skate of any one of claims claim 153 to 165, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.1.

167. The skate of any one of claims claim 153 to 165, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.5.
- 5 168. The skate of any one of claims claim 153 to 165, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 2.
- 10 169. The skate of any one of claims 153 to 168, wherein a thickness of the lateral side portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
- 15 170. The skate of any one of claims 153 to 168, wherein a thickness of the lateral side portion of the outer shell varies such that the thickness of a first area of the lateral side portion of the outer shell is greater than the thickness of a second area of the lateral side portion of the outer shell.
- 20 171. The skate of any one of claims 153 to 168, wherein a thickness of the heel portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
- 25 172. The skate of any one of claims 153 to 171, wherein a modulus of elasticity of the lateral side portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.
- 30 173. The skate of any one of claims 153 to 171, wherein a modulus of elasticity of the lateral side portion of the outer shell varies such that the modulus of elasticity of a first area of the lateral side portion of the outer shell is greater than the modulus of elasticity of a second area of the lateral side portion of the outer shell.

174. The skate of claim 173, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer shell in the height-wise direction of the skate.
- 5 175. The skate of any one of claims 153 to 171, wherein a modulus of elasticity of the heel portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.
- 10 176. The skate of any one of claims 153 to 175, wherein the synthetic first material of the outer shell is molded material.
177. The skate of claim 176, wherein the molded material of the outer shell is thermoformed material.
- 15 178. The skate of any one of claims 153 to 177, wherein the synthetic first material comprises a composite material.
179. The skate of claim 178, wherein the composite material comprises fibers in a polymeric matrix.
- 20 180. The skate of any one of claims 153 to 179, wherein the second material comprises at least one of polypropylene, nylon, polyester, polyvinyl chloride, styrene-butadiene copolymer, and ionomer resin.
- 25 181. The skate of any one of claims 153 to 180, wherein the second material is bonded to the synthetic first material.
182. The skate of any one of claims 153 to 181, wherein the second material is overmolded onto synthetic first material.
- 30

183. The skate of any one of claims 153 to 182, wherein a thickness of the second material of the outer shell is different from a thickness of the synthetic first material of the outer shell.

5 184. The skate of any one of claims 153 to 182, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side portion for facing a big toe of the foot of the hockey goalkeeper; and a thickness of the lateral side portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.

10

185. The skate of any one of claims 153 to 182, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side portion for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side
15 portion of the toe cap; and a thickness of the end portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.

20

186. The skate of any one of claims 153 to 182, wherein the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, and a thickness of the lateral side portion of the toe cap varies such that the
thickness of a first area of the lateral side portion of the toe cap is greater than the thickness of a second area of the lateral side portion of the toe cap.

25

187. The skate of claim 186, wherein the first area of the lateral side portion of the toe cap is lower than the second area of the lateral side portion of the toe cap in the height-wise direction of the skate.

30

188. The skate of any one of claims 153 to 187, wherein a first part of the toe cap is stiffer than a second part of the toe cap.

189. The skate of claim 188, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side for facing a big toe of the foot of the hockey goalkeeper; the first part of the toe cap comprises at least part of the lateral side portion of the toe cap; and
5 the second part of the toe cap comprises at least part of the medial side portion of the toe cap.
190. The skate of claim 188, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side for
10 facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; the first part of the toe cap comprises at least part of the end portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.
- 15 191. The skate of any one of claims 188 to 190, wherein the first part of the toe cap is thicker than the second part of the toe cap.
192. The skate of any one of claims 153 to 191, wherein the toe cap comprises a
20 reinforcement.
193. The skate of claim 192, wherein the reinforcement of the toe cap comprises a projection.
- 25 194. The skate of claim 192, wherein the reinforcement of the toe cap comprises a plurality of reinforcing elements distributed on the toe cap.
195. The skate of any one of claims 153 to 194, wherein the ankle portion of the outer shell comprises a medial upper edge for facing a medial side of the
30 ankle of the hockey goalkeeper and a lateral upper edge for facing a lateral side of the ankle of the hockey goalkeeper, and the lateral upper edge of the

ankle portion of the outer shell extends lower than the medial upper edge of the ankle portion of the outer shell.

5 196. The skate of any one of claims 153 to 195, wherein the blade holder comprises a blade-detachment mechanism configured to selectively detach and remove the blade from the blade holder and attach the blade to the blade holder.

10 197. The skate of any one of claims 153 to 196, wherein a ratio of a height of the skate boot over a length of the skate boot is no more than 0.8.

15 198. The skate of any one of claims 153 to 197, wherein an underside portion of the skate boot is exposed without any cowling covering the underside portion of the skate boot.

199. The skate of any one of claims 153 to 198, wherein a bottom of the medial side portion of the outer shell is exposed without any cowling covering the bottom of the medial side portion of the outer shell.

20 200. The skate of claim 199, wherein a bottom of the heel portion of the outer shell is exposed without any cowling covering the bottom of the heel portion of the outer shell.

25 201. The skate of any one of claims 153 to 200, wherein the support is affixed to the skate boot.

202. The skate of claim 201, wherein the support is fastened to the skate boot via a fastener.

30 203. A skate for a hockey goalkeeper, the skate comprising:

- a. a skate boot for receiving a foot of the hockey goalkeeper, the skate boot comprising:
- an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper;
 - a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being affixed to the outer shell; and
 - a tongue connected to the toe cap and defining a highest point of the skate boot;
- b. a blade for contacting ice; and
- c. a blade holder between the skate boot and the blade; wherein a bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell;
- wherein the outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than the synthetic first material;
- wherein at least one of the heel portion, the ankle portion, the medial side portion and the lateral side portion of the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play and a non-reinforced portion; and
- wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.1.

204. The skate of claim 203, wherein the skate allows an angle of attack with the ice of at least 140° .

205. The skate of claim 203, wherein the skate allows an angle of attack with the ice of at least 145° .
- 5 206. The skate of any one of claims 203 to 205, wherein a support height of the skate is at least 70 mm.
207. The skate of any one of claims 203 to 206, wherein a support height of the skate is at least 75 mm.
- 10 208. The skate of any one of claims 203 to 207, wherein the reinforced portion of the outer shell comprises at least part of the lateral side portion of the outer shell.
- 15 209. The skate of claim 208, wherein the reinforced portion of the outer shell comprises a lower region of the lateral side portion of the outer shell.
210. The skate of claim 208, wherein the reinforced portion of the outer shell comprises at least part of the medial side portion of the outer shell.
- 20 211. The skate of any one of claims 203 to 207, wherein the reinforced portion of the outer shell comprises at least part of the heel portion of the outer shell.
212. The skate of any one of claims 203 to 207, wherein the reinforced portion of the outer shell comprises at least part of the lateral side portion of the outer shell.
- 25 213. The skate of any one of claims 203 to 212, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.10.

30

214. The skate of any one of claims 203 to 212, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.15.
- 5 215. The skate of any one of claims 203 to 212, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.20.
- 10 216. The skate of any one of claims 203 to 212, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.25.
- 15 217. The skate of any one of claims 203 to 216, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.5.
- 20 218. The skate of any one of claims 203 to 216, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 2.
- 25 219. The skate of any one of claims 203 to 218, wherein a thickness of the lateral side portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
220. The skate of any one of claims 203 to 218, wherein a thickness of the lateral side portion of the outer shell varies such that the thickness of a first area of the lateral side portion of the outer shell is greater than the thickness of a second area of the lateral side portion of the outer shell.

221. The skate of any one of claims 203 to 218, wherein a thickness of the heel portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
- 5 222. The skate of any one of claims 203 to 221, wherein a modulus of elasticity of the lateral side portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.
- 10 223. The skate of any one of claims 203 to 221, wherein a modulus of elasticity of the lateral side portion of the outer shell varies such that the modulus of elasticity of a first area of the lateral side portion of the outer shell is greater than the modulus of elasticity of a second area of the lateral side portion of the outer shell.
- 15 224. The skate of claim 223, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer shell in the height-wise direction of the skate.
- 20 225. The skate of any one of claims 203 to 221, wherein a modulus of elasticity of the heel portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.
- 25 226. The skate of any one of claims 203 to 225, wherein the synthetic first material of the outer shell is molded material.
227. The skate of claim 226, wherein the molded material of the outer shell is thermoformed material.
- 30 228. The skate of any one of claims 203 to 227, wherein the synthetic first material comprises a composite material.

229. The skate of claim 228, wherein the composite material comprises fibers in a polymeric matrix.
230. The skate of any one of claims 203 to 229, wherein the second material comprises at least one of polypropylene, nylon, polyester, polyvinyl chloride, styrene-butadiene copolymer, and ionomer resin.
231. The skate of any one of claims 203 to 230, wherein the second material is bonded to the synthetic first material.
232. The skate of any one of claims 203 to 231, wherein the second material is overmolded onto synthetic first material.
233. The skate of any one of claims 203 to 232, wherein a thickness of the second material of the outer shell is different from a thickness of the synthetic first material of the outer shell.
234. The skate of any one of claims 203 to 232, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side portion for facing a big toe of the foot of the hockey goalkeeper; and a thickness of the lateral side portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.
235. The skate of any one of claims 203 to 232, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side portion for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; and a thickness of the end portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.

236. The skate of any one of claims 203 to 232, wherein the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, and a thickness of the lateral side portion of the toe cap varies such that the thickness of a first area of the lateral side portion of the toe cap is greater than the thickness of a second area of the lateral side portion of the toe cap.
237. The skate of claim 236, wherein the first area of the lateral side portion of the toe cap is lower than the second area of the lateral side portion of the toe cap in the height-wise direction of the skate.
238. The skate of any one of claims 203 to 237, wherein a first part of the toe cap is stiffer than a second part of the toe cap.
239. The skate of claim 238, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side for facing a big toe of the foot of the hockey goalkeeper; the first part of the toe cap comprises at least part of the lateral side portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.
240. The skate of claim 239, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; the first part of the toe cap comprises at least part of the end portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.
241. The skate of any one of claims 240 to 240, wherein the first part of the toe cap is thicker than the second part of the toe cap.

242. The skate of any one of claims 203 to 241, wherein the toe cap comprises a reinforcement.
- 5 243. The skate of claim 242, wherein the reinforcement of the toe cap comprises a projection.
244. The skate of claim 242, wherein the reinforcement of the toe cap comprises a plurality of reinforcing elements distributed on the toe cap.
- 10 245. The skate of any one of claims 203 to 244, wherein the ankle portion of the outer shell comprises a medial upper edge for facing a medial side of the ankle of the hockey goalkeeper and a lateral upper edge for facing a lateral side of the ankle of the hockey goalkeeper, and the lateral upper edge of the ankle portion of the outer shell extends lower than the medial upper edge of the ankle portion of the outer shell.
- 15 246. The skate of any one of claims 203 to 245, wherein the blade holder comprises a blade-detachment mechanism configured to selectively detach and remove the blade from the blade holder and attach the blade to the blade holder.
- 20 247. The skate of any one of claims 203 to 246, wherein a ratio of a height of the skate boot over a length of the skate boot is no more than 0.8.
- 25 248. The skate of any one of claims 203 to 247, wherein an underside portion of the skate boot is exposed without any cowling covering the underside portion of the skate boot.
- 30 249. The skate of any one of claims 203 to 248, wherein a bottom of the medial side portion of the outer shell is exposed without any cowling covering the bottom of the medial side portion of the outer shell.

250. The skate of claim 249, wherein a bottom of the heel portion of the outer shell is exposed without any cowling covering the bottom of the heel portion of the outer shell.
- 5
251. The skate of any one of claims 203 to 250, wherein the support is affixed to the skate boot.
252. The skate of claim 251, wherein the support is fastened to the skate boot via a fastener.
- 10
253. A skate for a hockey goalkeeper, the skate comprising:
- a skate boot for receiving a foot of the hockey goalkeeper, the skate boot comprising:
 - 15 - an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper;
 - 20 - a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper, the toe cap being affixed to the outer shell; and
 - a tongue connected to the toe cap and defining a highest point of the skate boot;
 - 25 - a blade for contacting ice; and
 - a blade holder between the skate boot and the blade;
- a bottom of the lateral side portion of the outer shell being exposed without any cowling covering the bottom of the lateral side portion of the outer shell;
- the skate boot having at least one reinforced portion configured for protecting the
- 30 foot of the hockey goalkeeper against impact of a hockey puck during play; and wherein the outer shell comprises (i) a body made of a synthetic first material and

(ii) an overlay affixed to an outer surface of the body and defining an outer surface of at least part of the lateral side portion of the outer shell, the overlay comprising a second material, the second material being less rigid than the synthetic first material.

5

254. The skate of claim 253, wherein the skate allows an angle of attack with the ice of at least 140° .

10 255. The skate of claim 253, wherein the skate allows an angle of attack with the ice of at least 145° .

256. The skate of any one of claims 253 to 255, wherein a support height of the skate is at least 70 mm.

15 257. The skate of any one of claims 253 to 255, wherein a support height of the skate is at least 75 mm.

20 258. The skate of any one of claims 253 to 257, wherein the reinforced portion of the outer shell comprises at least portion of the lateral side portion of the outer shell.

259. The skate of claim 259, wherein the reinforced portion of the outer shell comprises a lower region of the lateral side portion of the outer shell.

25 260. The skate of any one of claims 253 to 257, wherein the reinforced portion of the outer shell comprises at least portion of the medial side portion of the outer shell.

30 261. The skate of any one of claims 253 to 257, wherein the reinforced portion of the outer shell comprises at least portion of the heel portion of the outer shell.

262. The skate of claim 261, wherein the reinforced portion of the outer shell comprises at least portion of the lateral side portion of the outer shell.
- 5 263. The skate of any one of claims 253 to 262, wherein the outer shell also comprises a non-reinforced portion.
264. The skate of claim 263, wherein a ratio of a thickness of the reinforced portion over a thickness of the non-reinforced portion of the outer shell is at least 1.15.
- 10 265. The skate of claim 263, wherein a ratio of a thickness of the reinforced portion over a thickness of the non-reinforced portion of the outer shell is at least 1.20.
- 15 266. The skate of claim 263, wherein a ratio of a thickness of the reinforced portion over a thickness of the non-reinforced portion of the outer shell is at least 1.25.
- 20 267. The skate of any one of claims claim 263 to 266, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.1.
- 25 268. The skate of any one of claims claim 263 to 266, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.5.
- 30 269. The skate of any one of claims claim 263 to 266, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 2.

270. The skate of any one of claims 253 to 269, wherein a thickness of the lateral side portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
- 5 271. The skate of any one of claims 253 to 269, wherein a thickness of the lateral side portion of the outer shell varies such that the thickness of a first area of the lateral side portion of the outer shell is greater than the thickness of a second area of the lateral side portion of the outer shell.
- 10 272. The skate of any one of claims 253 to 269, wherein a thickness of the heel portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.
- 15 273. The skate of any one of claims 253 to 272, wherein a modulus of elasticity of the lateral side portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.
- 20 274. The skate of any one of claims 253 to 272, wherein a modulus of elasticity of the lateral side portion of the outer shell varies such that the modulus of elasticity of a first area of the lateral side portion of the outer shell is greater than the modulus of elasticity of a second area of the lateral side portion of the outer shell.
- 25 275. The skate of claim 274, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer shell in the height-wise direction of the skate.
- 30 276. The skate of any one of claims 253 to 272, wherein a modulus of elasticity of the heel portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.

277. The skate of any one of claims 253 to 276, wherein the synthetic first material of the outer shell is molded material.
- 5 278. The skate of claim 277, wherein the molded material of the outer shell is thermoformed material.
279. The skate of any one of claims 253 to 278, wherein the synthetic first material comprises a composite material.
- 10 280. The skate of claim 279, wherein the composite material comprises fibers in a polymeric matrix.
281. The skate of any one of claims 253 to 280, wherein the second material comprises at least one of polypropylene, nylon, polyester, polyvinyl chloride, styrene-butadiene copolymer, and ionomer resin.
- 15 282. The skate of any one of claims 253 to 281, wherein the second material is bonded to the synthetic first material.
- 20 283. The skate of any one of claims 253 to 282, wherein the second material is overmolded onto synthetic first material.
284. The skate of any one of claims 253 to 283, wherein a thickness of the second material of the outer shell is different from a thickness of the synthetic first material of the outer shell.
- 25 285. The skate of any one of claims 253 to 284, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side portion for facing a big toe of the foot of the hockey goalkeeper; and a thickness of the lateral side portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.
- 30

286. The skate of any one of claims 253 to 284, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side portion for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; and a thickness of the end portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.
287. The skate of any one of claims 253 to 284, wherein the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, and a thickness of the lateral side portion of the toe cap varies such that the thickness of a first area of the lateral side portion of the toe cap is greater than the thickness of a second area of the lateral side portion of the toe cap.
288. The skate of claim 287, wherein the first area of the lateral side portion of the toe cap is lower than the second area of the lateral side portion of the toe cap in the height-wise direction of the skate.
289. The skate of any one of claims 253 to 288, wherein a first part of the toe cap is stiffer than a second part of the toe cap.
290. The skate of claim 289, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side for facing a big toe of the foot of the hockey goalkeeper; the first part of the toe cap comprises at least part of the lateral side portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.
291. The skate of claim 290, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side for facing a big toe of the foot of the hockey goalkeeper, and an end portion

between the lateral side portion and the medial side portion of the toe cap; the first part of the toe cap comprises at least part of the end portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.

5

292. The skate of any one of claims 289 to 291, wherein the first part of the toe cap is thicker than the second part of the toe cap.

10

293. The skate of any one of claims 253 to 292, wherein the toe cap comprises a reinforcement.

294. The skate of claim 293, wherein the reinforcement of the toe cap comprises a projection.

15

295. The skate of claim 293, wherein the reinforcement of the toe cap comprises a plurality of reinforcing elements distributed on the toe cap.

296. The skate of any one of claims 253 to 295, wherein a ratio of a height of the skate boot over a length of the skate boot is no more than 0.8.

20

297. The skate of any one of claims 253 to 296, wherein an underside portion of the skate boot is exposed without any cowling covering the underside portion of the skate boot.

25

298. The skate of any one of claims 253 to 297, wherein a bottom of the medial side portion of the outer shell is exposed without any cowling covering the bottom of the medial side portion of the outer shell.

30

299. The skate of claim 298, wherein a bottom of the heel portion of the outer shell is exposed without any cowling covering the bottom of the heel portion of the outer shell.

300. The skate of any one of claims 253 to 299, wherein the support is affixed to the skate boot.

301. The skate of claim 300, wherein the support is fastened to the skate boot via a fastener.

302. A skate for a hockey goalkeeper, the skate comprising:

- a skate boot for receiving a foot of the hockey goalkeeper;
- a blade for contacting ice; and
- a blade holder between the skate boot and the blade;

the skate boot comprising:

- an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side of the foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper;
- a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper; and
- a tongue connected to the toe cap and defining a highest point of the skate boot;

wherein a bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell;

wherein at least one of the heel portion, the ankle portion, the medial side portion and the lateral side portion of the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play and a non-reinforced portion; and

wherein the outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body, defining an outer surface of at least part of the lateral side portion of the outer shell and defining

the reinforced portion, the overlay comprising a second material, the second material being less rigid than the synthetic first material.

5 303. The skate of claim 302, wherein the skate allows an angle of attack with the ice of at least 140°.

304. The skate of claim 302, wherein the skate allows an angle of attack with the ice of at least 145°.

10 305. The skate of any one of claims 302 to 304, wherein a support height of the skate is at least 70 mm.

306. The skate of any one of claims 302 to 304, wherein a support height of the skate is at least 75 mm.

15

307. The skate of any one of claims 302 to 306, wherein a thickness of the lateral side portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.

20 308. The skate of any one of claims 302 to 306, wherein a thickness of the lateral side portion of the outer shell varies such that the thickness of a first area of the lateral side portion of the outer shell is greater than the thickness of a second area of the lateral side portion of the outer shell.

25 309. The skate of claim 308, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer in the height-wise direction of the skate.

30 310. The skate of any one of claims 302 to 306, wherein a thickness of the heel portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.

311. The skate of any one of claims 302 to 304, wherein a modulus of elasticity of the lateral side portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.

5

312. The skate of any one of claims 302 to 304, wherein a modulus of elasticity of the lateral side portion of the outer shell varies such that the modulus of elasticity of a first area of the lateral side portion of the outer shell is greater than the modulus of elasticity of a second area of the lateral side portion of the outer shell.

10

313. The skate of claim 312, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer shell in the height-wise direction of the skate.

15

314. The skate of any one of claims 302 to 304, wherein a modulus of elasticity of the heel portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.

20 315. The skate of any one of claims 302 to 304, wherein the synthetic first material of the outer shell is molded material.

316. The skate of claim 315, wherein the molded material of the outer shell is thermoformed material.

25

317. The skate of any one of claims 302 to 315, wherein the synthetic first material comprises a composite material.

318. The skate of claim 317, wherein the composite material comprises fibers in a polymeric matrix.

30

319. The skate of any one of claims 302 to 318, wherein the second material comprises at least one of polypropylene, nylon, polyester, polyvinyl chloride, styrene-butadiene copolymer, and ionomer resin.

5 320. The skate of any one of claims 302 to 319, wherein the second material is bonded to the synthetic first material.

321. The skate of any one of claims 302 to 320, wherein the second material is overmolded onto synthetic first material.

10

322. The skate of any one of claims 302 to 321, wherein a thickness of the second material of the outer shell is different from a thickness of the synthetic first material of the outer shell.

15 323. The skate of any one of claims 302 to 322, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side portion for facing a big toe of the foot of the hockey goalkeeper; and a thickness of the lateral side portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.

20

324. The skate of any one of claims 302 to 322, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side portion for facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side
25 portion of the toe cap; and a thickness of the end portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.

25

325. The skate of any one of claims 302 to 322, wherein the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper,
30 and a thickness of the lateral side portion of the toe cap varies such that the

30

thickness of a first area of the lateral side portion of the toe cap is greater than the thickness of a second area of the lateral side portion of the toe cap.

5 326. The skate of claim 325, wherein the first area of the lateral side portion of the toe cap is lower than the second area of the lateral side portion of the toe cap in the height-wise direction of the skate.

327. The skate of any one of claims 302 to 326, wherein a first part of the toe cap is stiffer than a second part of the toe cap.

10

328. The skate of claim 327, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side for facing a big toe of the foot of the hockey goalkeeper; the first part of the toe cap comprises at least part of the lateral side portion of the toe cap; and the
15 second part of the toe cap comprises at least part of the medial side portion of the toe cap.

329. The skate of claim 327, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side for
20 facing a big toe of the foot of the hockey goalkeeper, and an end portion between the lateral side portion and the medial side portion of the toe cap; the first part of the toe cap comprises at least part of the end portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.

25

330. The skate of any one of claims 327 to 329, wherein the first part of the toe cap is thicker than the second part of the toe cap.

331. The skate of any one of claims 302 to 330, wherein the toe cap comprises a
30 reinforcement.

332. The skate of claim 331, wherein the reinforcement of the toe cap comprises a projection.
333. The skate of claim 331, wherein the reinforcement of the toe cap comprises a plurality of reinforcing elements distributed on the toe cap.
334. The skate of any one of claims 302 to 330, wherein the ankle portion of the outer shell comprises a medial upper edge for facing a medial side of the ankle of the hockey goalkeeper and a lateral upper edge for facing a lateral side of the ankle of the hockey goalkeeper, and the lateral upper edge of the ankle portion of the outer shell extends lower than the medial upper edge of the ankle portion of the outer shell.
335. The skate of any one of claims 302 to 334, wherein the blade holder comprises a blade-detachment mechanism configured to selectively detach and remove the blade from the blade holder and attach the blade to the blade holder.
336. The skate of any one of claims 302 to 335, wherein a ratio of a height of the skate boot over a length of the skate boot is no more than 0.8.
337. The skate of any one of claims 302 to 336, wherein an underside portion of the skate boot is exposed without any cowling covering the underside portion of the skate boot.
338. The skate of any one of claims 302 to 337, wherein a bottom of the medial side portion of the outer shell is exposed without any cowling covering the bottom of the medial side portion of the outer shell.
339. The skate of claim 338, wherein a bottom of the heel portion of the outer shell is exposed without any cowling covering the bottom of the heel portion of the outer shell.

340. The skate of any one of claims 302 to 339, wherein the reinforced portion of the outer shell includes the bottom of the lateral side portion of the outer shell.

5 341. The skate of claim 340, wherein the reinforced portion of the outer shell includes the bottom of the lateral side portion of the outer shell and the bottom of the medial side portion of the outer shell.

342. The skate of claim 341, wherein the reinforced portion of the outer shell
10 includes the bottom of the lateral side portion of the outer shell, the bottom of the medial side portion of the outer shell, and the bottom of the heel portion of the outer shell.

343. The skate of any one of claims 302 to 342, wherein the ratio of the thickness of
15 the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.15.

344. The skate of any one of claims 302 to 342, wherein the ratio of the thickness of
20 the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.20.

345. The skate of any one of claims 302 to 342, wherein the ratio of the thickness of
the reinforced portion over the thickness of the non-reinforced portion of the
outer shell is at least 1.25.

25

346. The skate of any one of claims 302 to 345, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.1.

347. The skate of any one of claims 302 to 345, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.5.
- 5 348. The skate of any one of claims 302 to 345, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 2.
349. The skate of any one of claims 302 to 348, wherein the blade holder comprises
10 a support connected to the skate boot.
350. The skate of claim 349, wherein the support is affixed to the skate boot.
351. The skate of claim 350, wherein the support is fastened to the skate boot via a
15 fastener.
352. A skate for a hockey goalkeeper, the skate comprising:
- a skate boot for receiving a foot of the hockey goalkeeper;
 - a blade for contacting ice; and
 - 20 - a blade holder between the skate boot and the blade;
- the skate boot comprising:
- an outer shell including a heel portion for receiving a heel of the foot of the hockey goalkeeper, an ankle portion for receiving an ankle of the hockey goalkeeper, a medial side portion for facing a medial side
25 of the foot of the hockey goalkeeper, and a lateral side portion for facing a lateral side of the foot of the hockey goalkeeper;
 - a toe cap defining a frontmost surface of the skate above the blade holder for facing toes of the foot of the hockey goalkeeper; and
 - a tongue connected to the toe cap and defining a highest point of the
30 skate boot;

wherein a bottom of the lateral side portion of the outer shell is exposed without any cowling covering the bottom of the lateral side portion of the outer shell;

5 wherein at least one of the heel portion, the ankle portion, the medial side portion and the lateral side portion of the outer shell comprises a reinforced portion for protecting the goalkeeper from pucks during play and a non-reinforced portion; and

10 wherein the outer shell comprises (i) a body made of a synthetic first material and (ii) an overlay affixed to an outer surface of the body and defining the reinforced portion, the overlay comprising a second material, the second material being less rigid than the synthetic first material.

353. The skate of claim 352, wherein the toe cap is affixed to the outer shell.

15 354. The skate of any one of claims 352 and 353, wherein the skate allows an angle of attack with the ice of at least 140°.

355. The skate of any one of claims 352 and 353, wherein the skate allows an angle of attack with the ice of at least 145°.

20

356. The skate of any one of claims 352 to 355, wherein a support height of the skate is at least 70 mm.

25 357. The skate of any one of claims 352 to 355, wherein a support height of the skate is at least 75 mm.

358. The skate of any one of claims 352 to 357, wherein a thickness of the lateral side portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.

30

359. The skate of any one of claims 352 to 357, wherein a thickness of the lateral side portion of the outer shell varies such that the thickness of a first area of the lateral side portion of the outer shell is greater than the thickness of a second area of the lateral side portion of the outer shell.

5

360. The skate of claim 359, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer in the height-wise direction of the skate.

10 361. The skate of any one of claims 352 to 357, wherein a thickness of the heel portion of the outer shell is greater than a thickness of the medial side portion of the outer shell.

15 362. The skate of any one of claims 352 to 355, wherein a modulus of elasticity of the lateral side portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.

20 363. The skate of any one of claims 352 to 355, wherein a modulus of elasticity of the lateral side portion of the outer shell varies such that the modulus of elasticity of a first area of the lateral side portion of the outer shell is greater than the modulus of elasticity of a second area of the lateral side portion of the outer shell.

25 364. The skate of claim 363, wherein the first area of the lateral side portion of the outer shell is lower than the second area of the lateral side portion of the outer shell in the height-wise direction of the skate.

30 365. The skate of any one of claims 352 to 355, wherein a modulus of elasticity of the heel portion of the outer shell is greater than a modulus of elasticity of the medial side portion of the outer shell.

366. The skate of any one of claims 352 to 355, wherein the synthetic first material of the outer shell is molded material.
367. The skate of claim 366, wherein the molded material of the outer shell is thermoformed material.
368. The skate of any one of claims 352 to 366, wherein the synthetic first material comprises a composite material.
369. The skate of claim 368, wherein the composite material comprises fibers in a polymeric matrix.
370. The skate of any one of claims 352 to 369, wherein the second material comprises at least one of polypropylene, nylon, polyester, polyvinyl chloride, styrene-butadiene copolymer, and ionomer resin.
371. The skate of any one of claims 352 to 370, wherein the second material is bonded to the synthetic first material.
372. The skate of any one of claims 352 to 371, wherein the second material is overmolded onto synthetic first material.
373. The skate of any one of claims 352 to 372, wherein a thickness of the second material of the outer shell is different from a thickness of the synthetic first material of the outer shell.
374. The skate of any one of claims 352 to 373, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side portion for facing a big toe of the foot of the hockey goalkeeper; and a thickness of the lateral side portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.

375. The skate of any one of claims 352 to 373, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side portion for facing a big toe of the foot of the hockey goalkeeper,
5 and an end portion between the lateral side portion and the medial side portion of the toe cap; and a thickness of the end portion of the toe cap is greater than a thickness of the medial side portion of the toe cap.

376. The skate of any one of claims 352 to 373, wherein the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper,
10 and a thickness of the lateral side portion of the toe cap varies such that the thickness of a first area of the lateral side portion of the toe cap is greater than the thickness of a second area of the lateral side portion of the toe cap.

15 377. The skate of claim 376, wherein the first area of the lateral side portion of the toe cap is lower than the second area of the lateral side portion of the toe cap in the height-wise direction of the skate.

378. The skate of any one of claims 352 to 377, wherein a first part of the toe cap is
20 stiffer than a second part of the toe cap.

379. The skate of claim 378, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper and a medial side for facing a big toe of the foot of the hockey goalkeeper; the first part of the toe cap comprises at least part of the lateral side portion of the toe cap; and the
25 second part of the toe cap comprises at least part of the medial side portion of the toe cap.

380. The skate of claim 378, wherein: the toe cap comprises a lateral side portion for facing a small toe of the foot of the hockey goalkeeper, a medial side for facing a big toe of the foot of the hockey goalkeeper, and an end portion
30

between the lateral side portion and the medial side portion of the toe cap; the first part of the toe cap comprises at least part of the end portion of the toe cap; and the second part of the toe cap comprises at least part of the medial side portion of the toe cap.

5

381. The skate of any one of claims 26 to 380, wherein the first part of the toe cap is thicker than the second part of the toe cap.

10

382. The skate of any one of claims 352 to 381, wherein the toe cap comprises a reinforcement.

383. The skate of claim 382, wherein the reinforcement of the toe cap comprises a projection.

15

384. The skate of claim 382, wherein the reinforcement of the toe cap comprises a plurality of reinforcing elements distributed on the toe cap.

20

385. The skate of any one of claims 352 to 384, wherein the ankle portion of the outer shell comprises a medial upper edge for facing a medial side of the ankle of the hockey goalkeeper and a lateral upper edge for facing a lateral side of the ankle of the hockey goalkeeper, and the lateral upper edge of the ankle portion of the outer shell extends lower than the medial upper edge of the ankle portion of the outer shell.

25

386. The skate of any one of claims 352 to 385, wherein the blade holder comprises a blade-detachment mechanism configured to selectively detach and remove the blade from the blade holder and attach the blade to the blade holder.

30

387. The skate of any one of claims 352 to 386, wherein a ratio of a height of the skate boot over a length of the skate boot is no more than 0.8.

388. The skate of any one of claims 352 to 388, wherein an underside portion of the skate boot is exposed without any cowling covering the underside portion of the skate boot.
- 5 389. The skate of any one of claims 352 to 388, wherein a bottom of the medial side portion of the outer shell is exposed without any cowling covering the bottom of the medial side portion of the outer shell.
390. The skate of claim 389, wherein a bottom of the heel portion of the outer shell is
10 exposed without any cowling covering the bottom of the heel portion of the outer shell.
391. The skate of any one of claims 352 to 390, wherein the reinforced portion of the outer shell includes the bottom of the lateral side portion of the outer shell.
15
392. The skate of claim 391, wherein the reinforced portion of the outer shell includes the bottom of the lateral side portion of the outer shell and the bottom of the medial side portion of the outer shell.
- 20 393. The skate of claim 392, wherein the reinforced portion of the outer shell includes the bottom of the lateral side portion of the outer shell, the bottom of the medial side portion of the outer shell, and the bottom of the heel portion of the outer shell.
- 25 394. The skate of any one of claims 352 to 393, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.15.
395. The skate of any one of claims 352 to 393, wherein the ratio of the thickness of
30 the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.20.

396. The skate of any one of claims 352 to 393, wherein the ratio of the thickness of the reinforced portion over the thickness of the non-reinforced portion of the outer shell is at least 1.25.

5

397. The skate of any one of claims 352 to 396, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.1.

10 398. The skate of any one of claims 352 to 396, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 1.5.

15 399. The skate of any one of claims 352 to 396, wherein a ratio of a modulus of elasticity of the reinforced portion over a modulus of elasticity of the non-reinforced portion of the outer shell is at least 2.

400. The skate of any one of claims 352 to 399, wherein the blade holder comprises a support connected to the skate boot.

20

401. The skate of claim 400, wherein the support is affixed to the skate boot.

402. The skate of claim 401, wherein the support is fastened to the skate boot via a fastener.

25

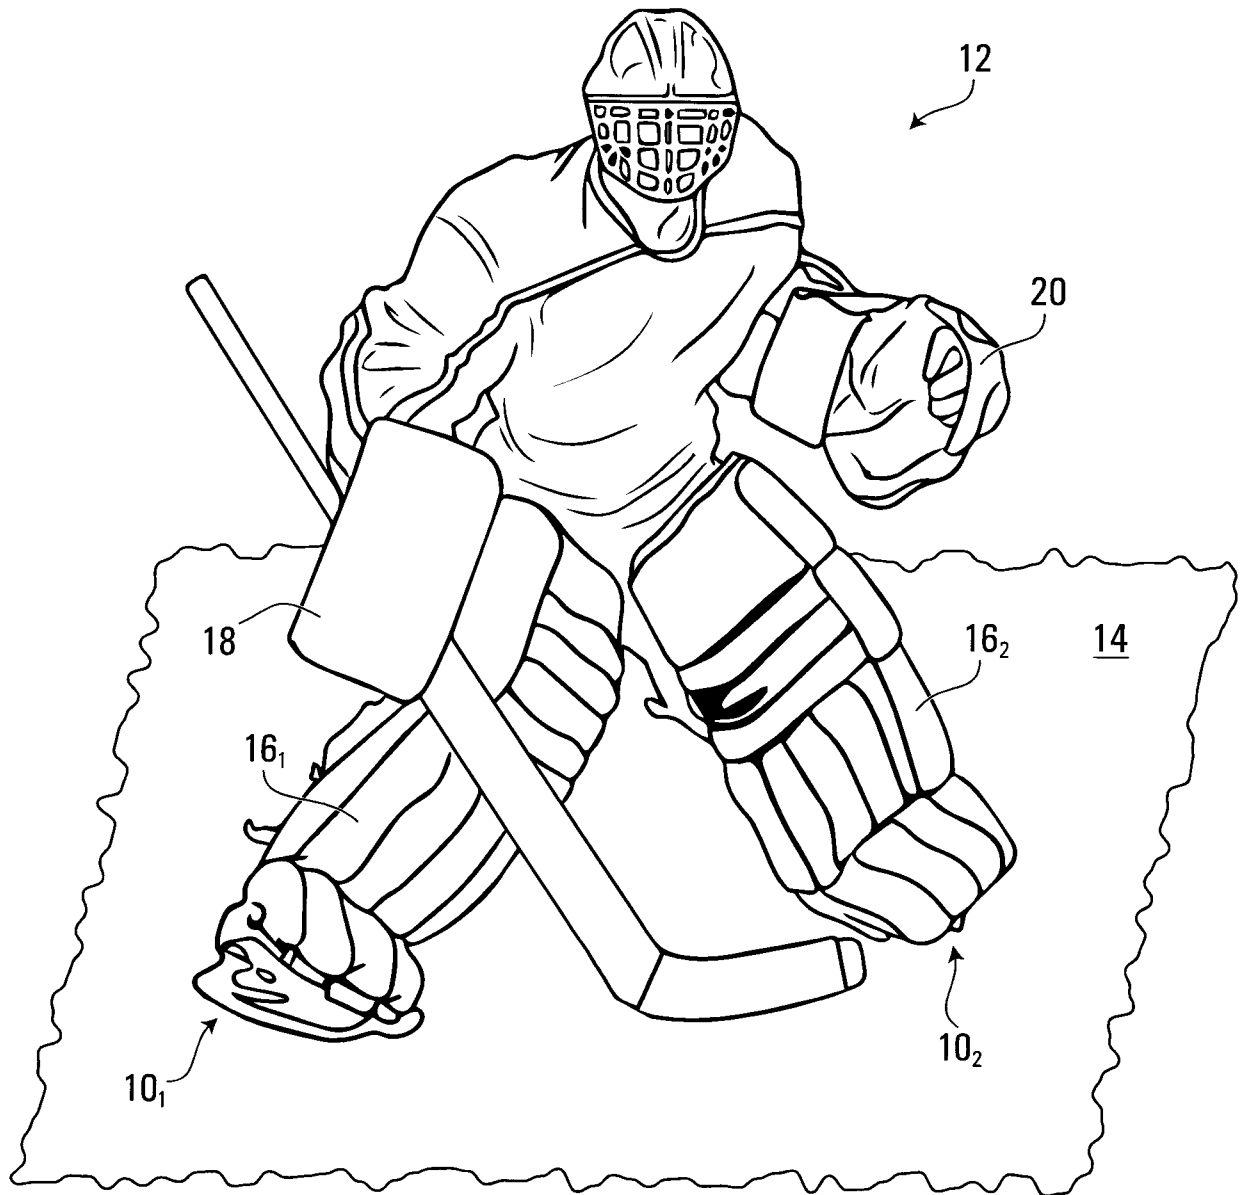
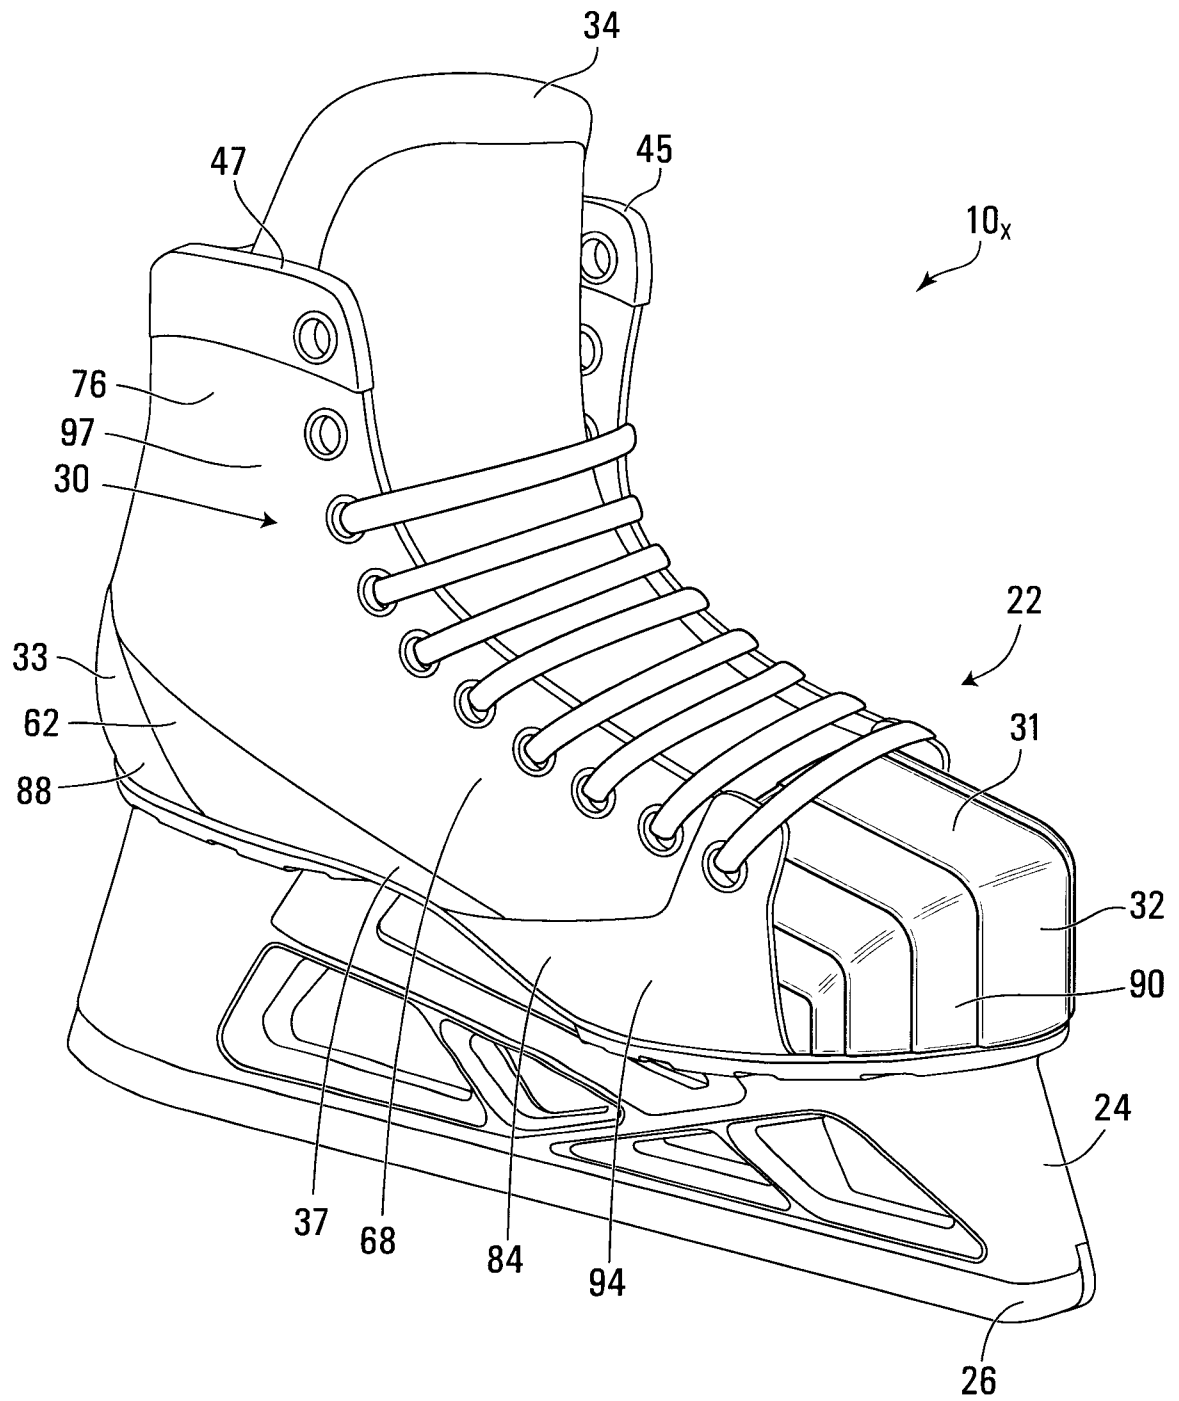
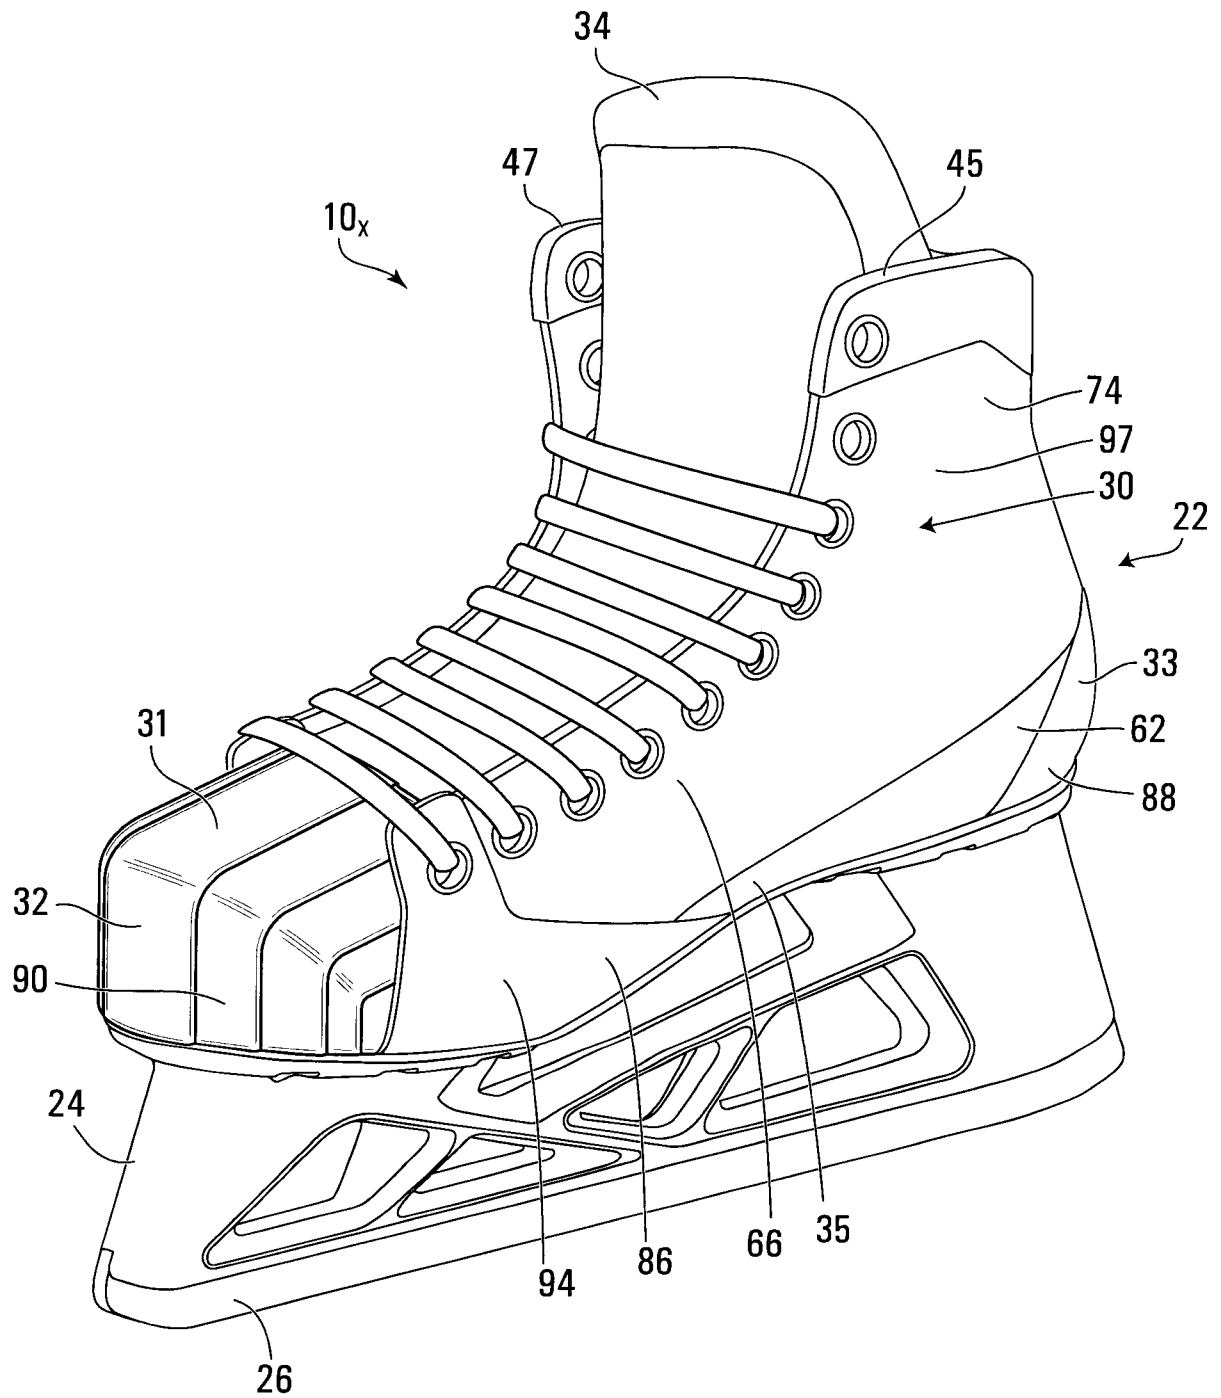


FIG. 1

+

**FIG. 2**

+

**FIG. 3**

+

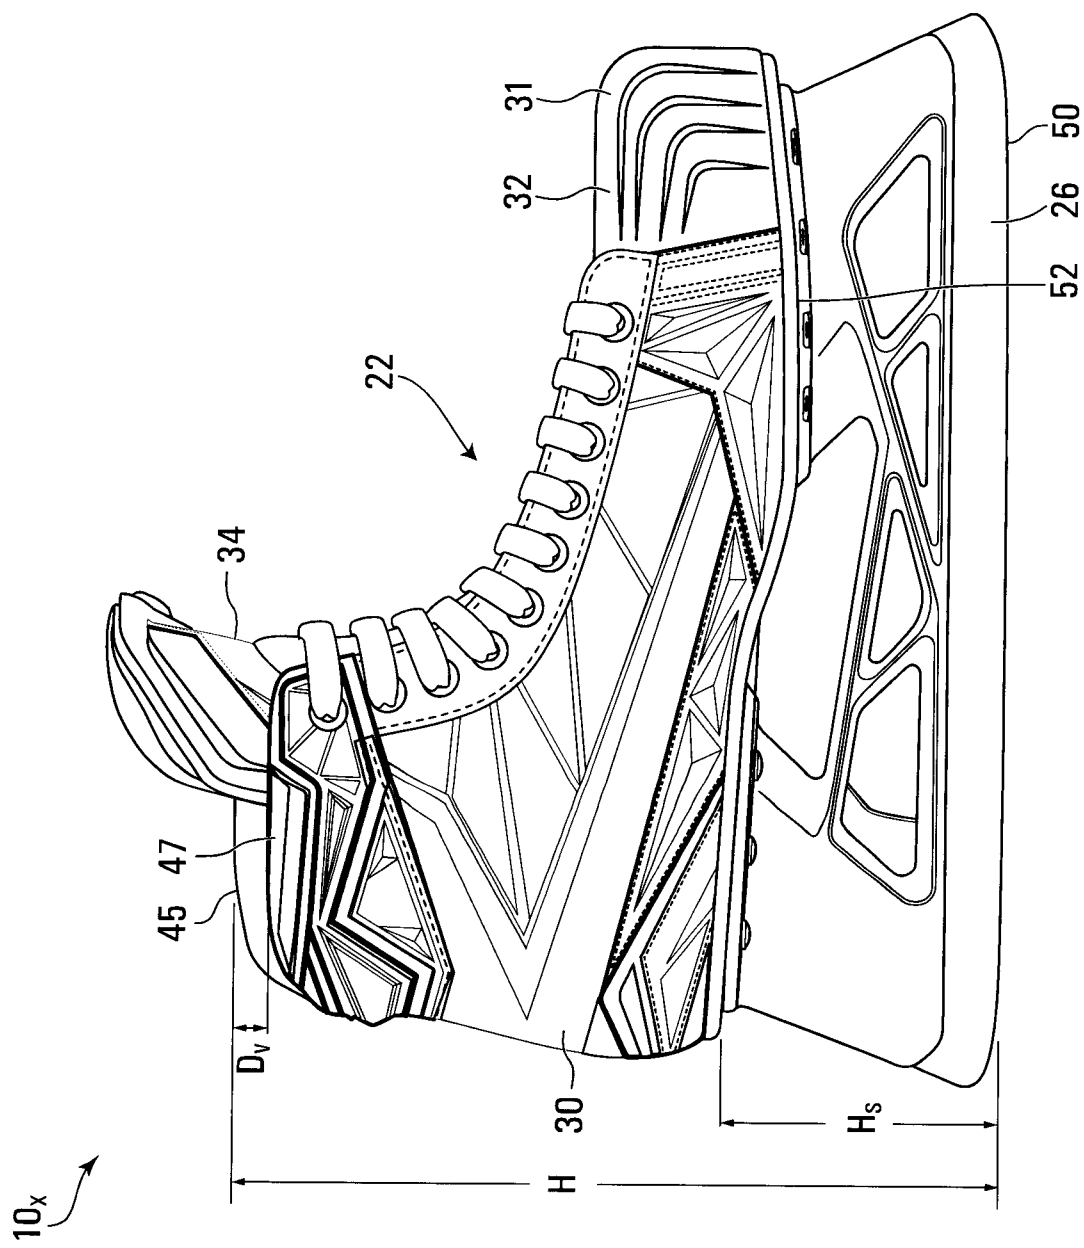


FIG. 4

+

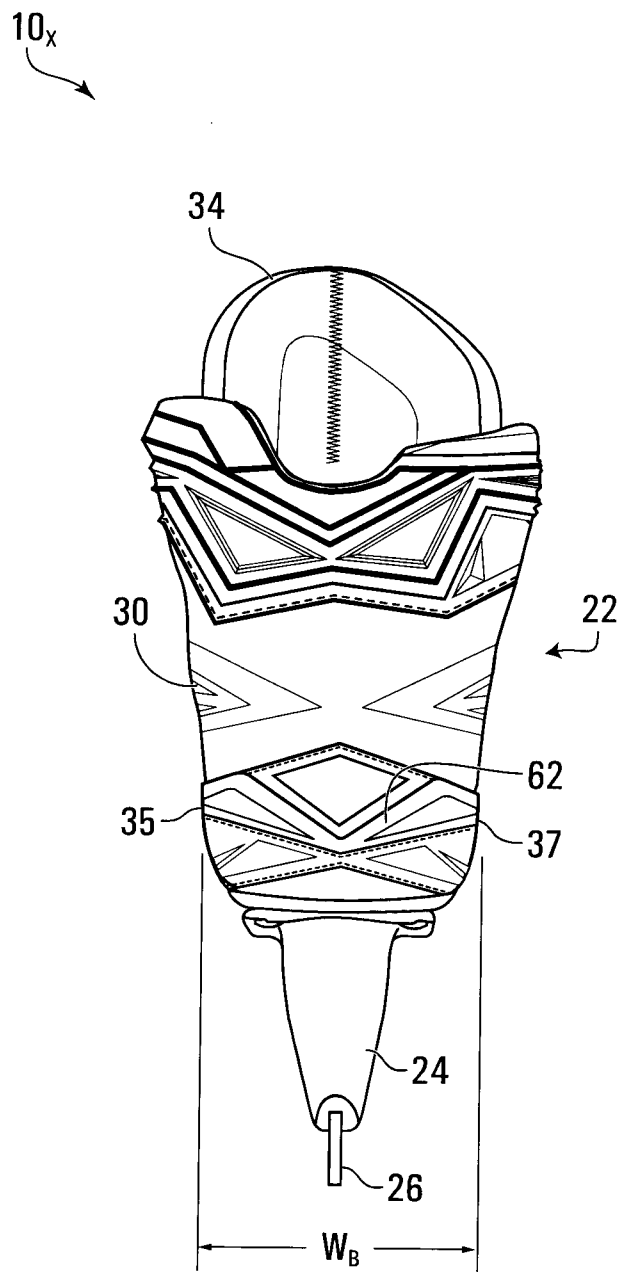


FIG. 5

+

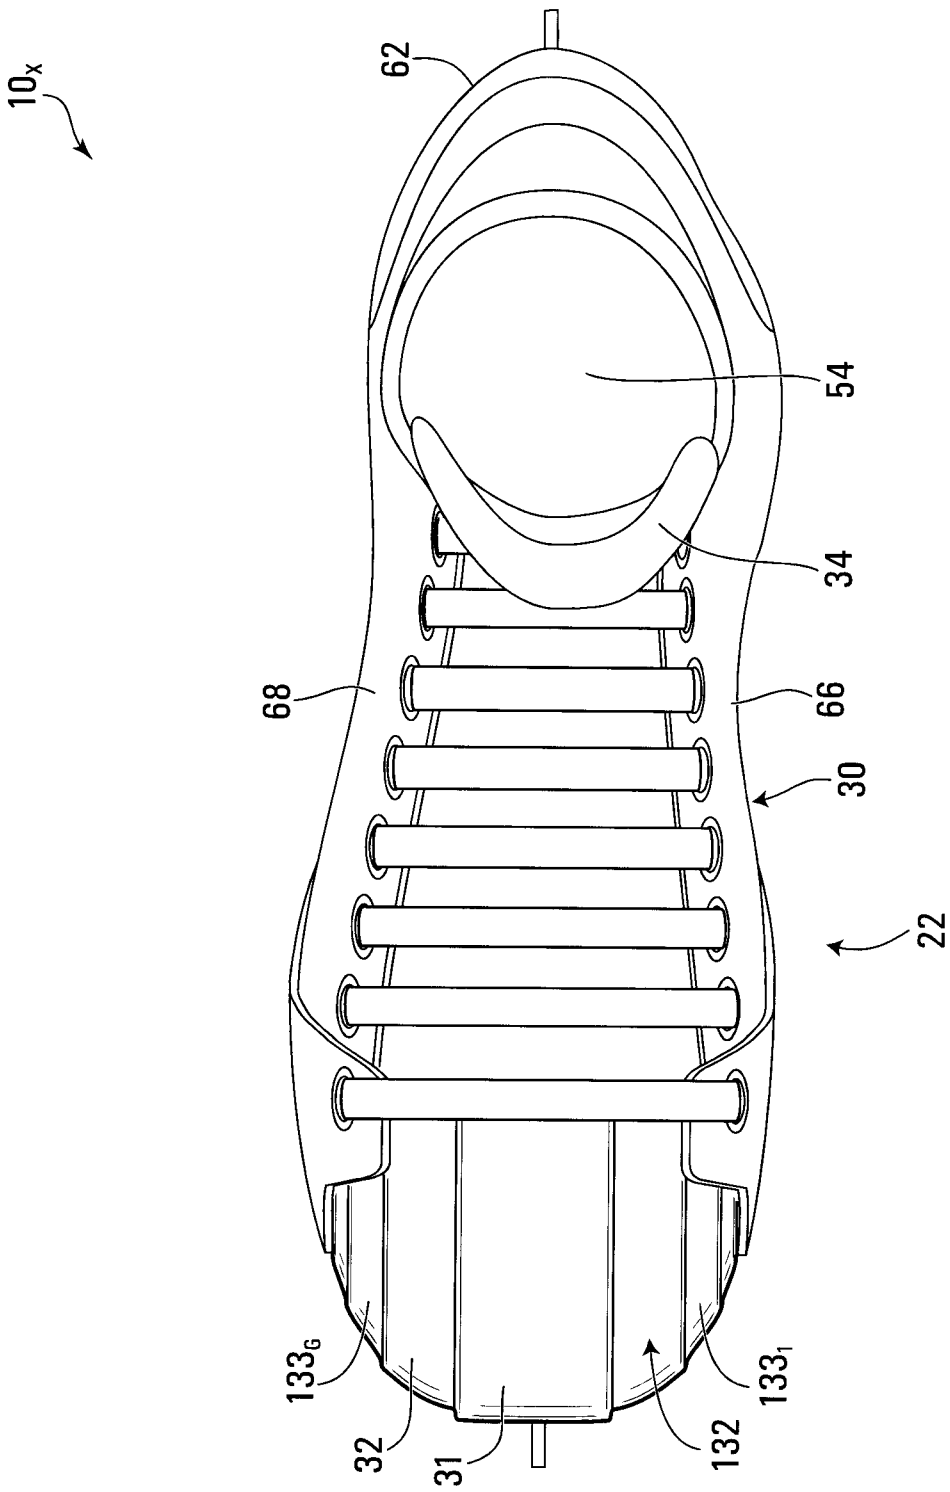


FIG. 6

+

+

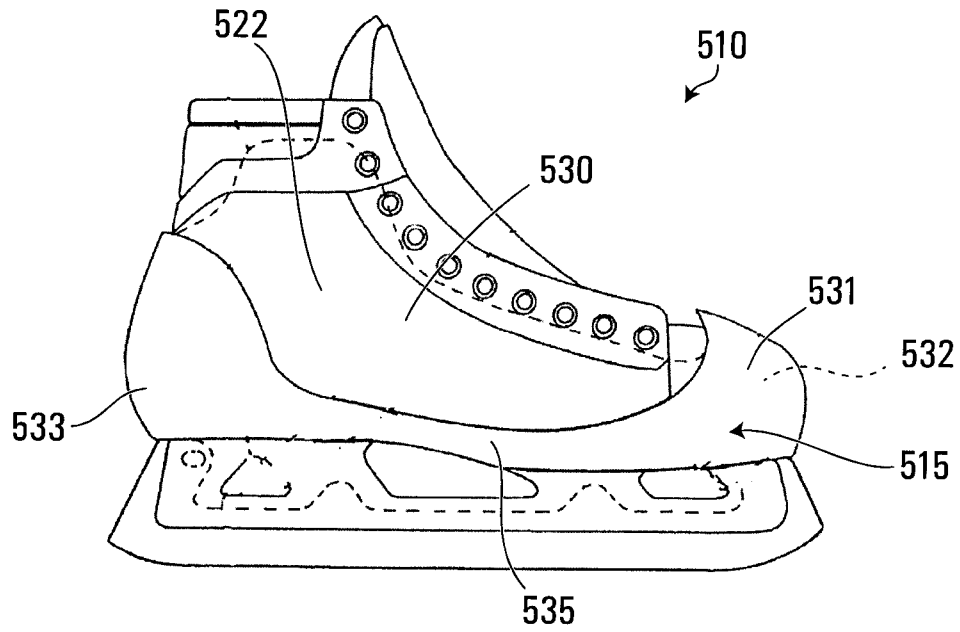


FIG. 7
Prior Art

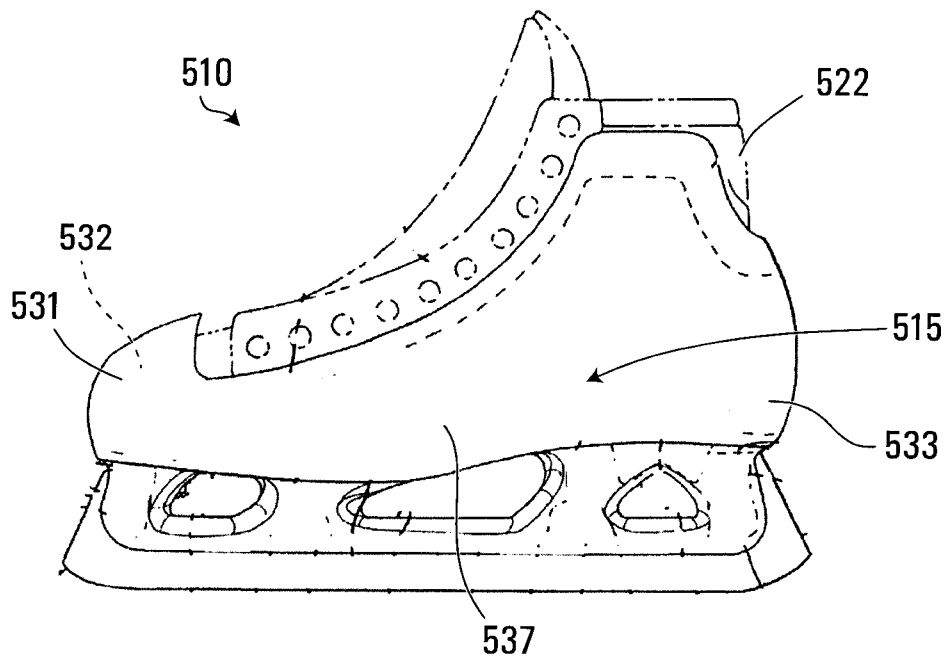


FIG. 8
Prior Art

+

+

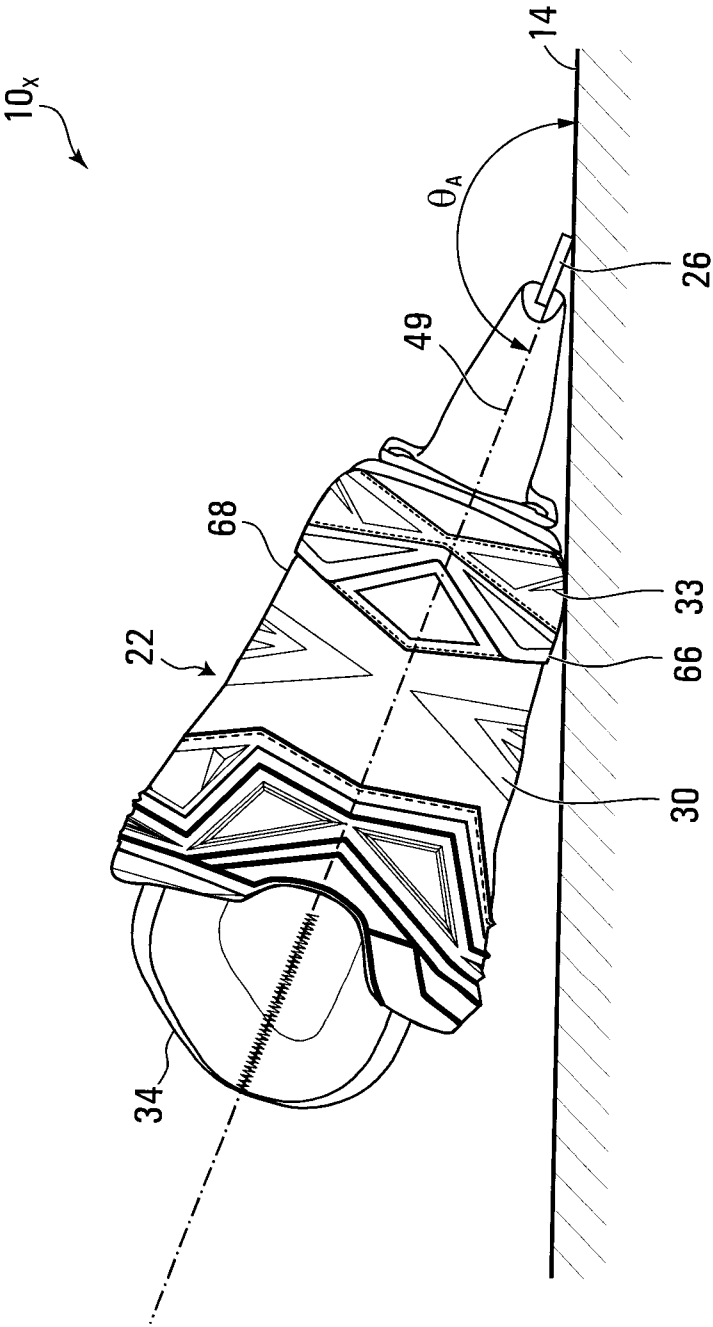


FIG. 9

+

+

22

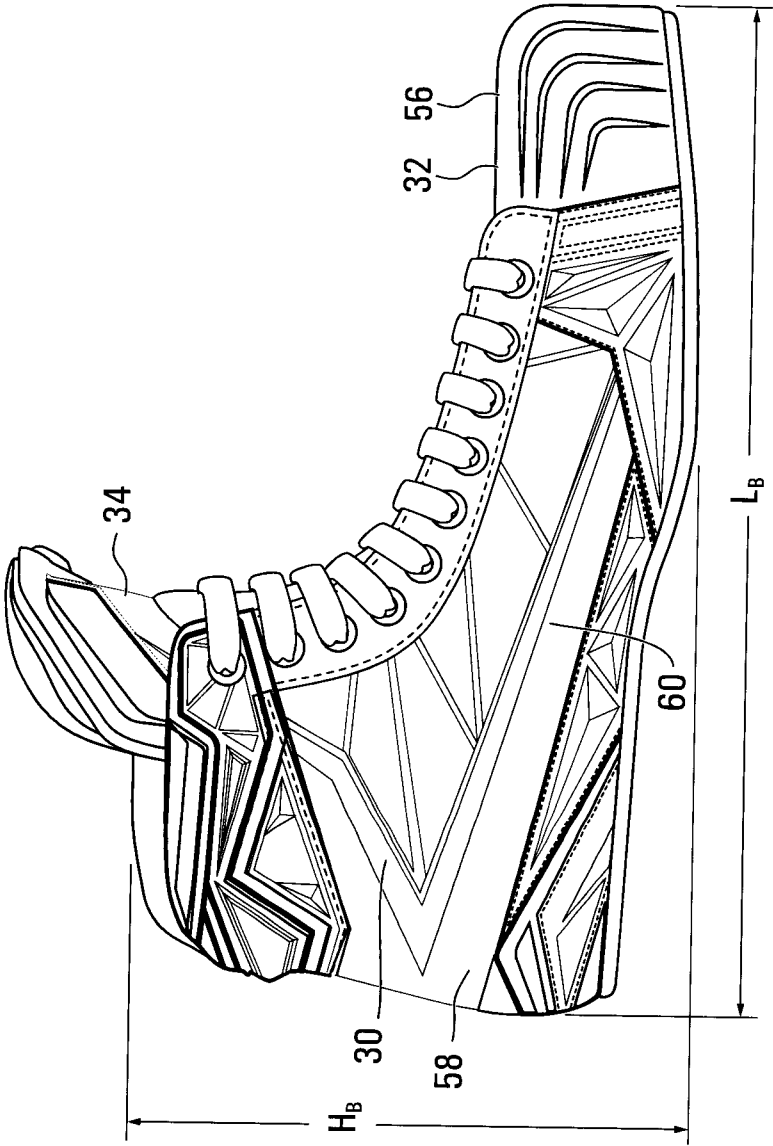


FIG. 10

+

+

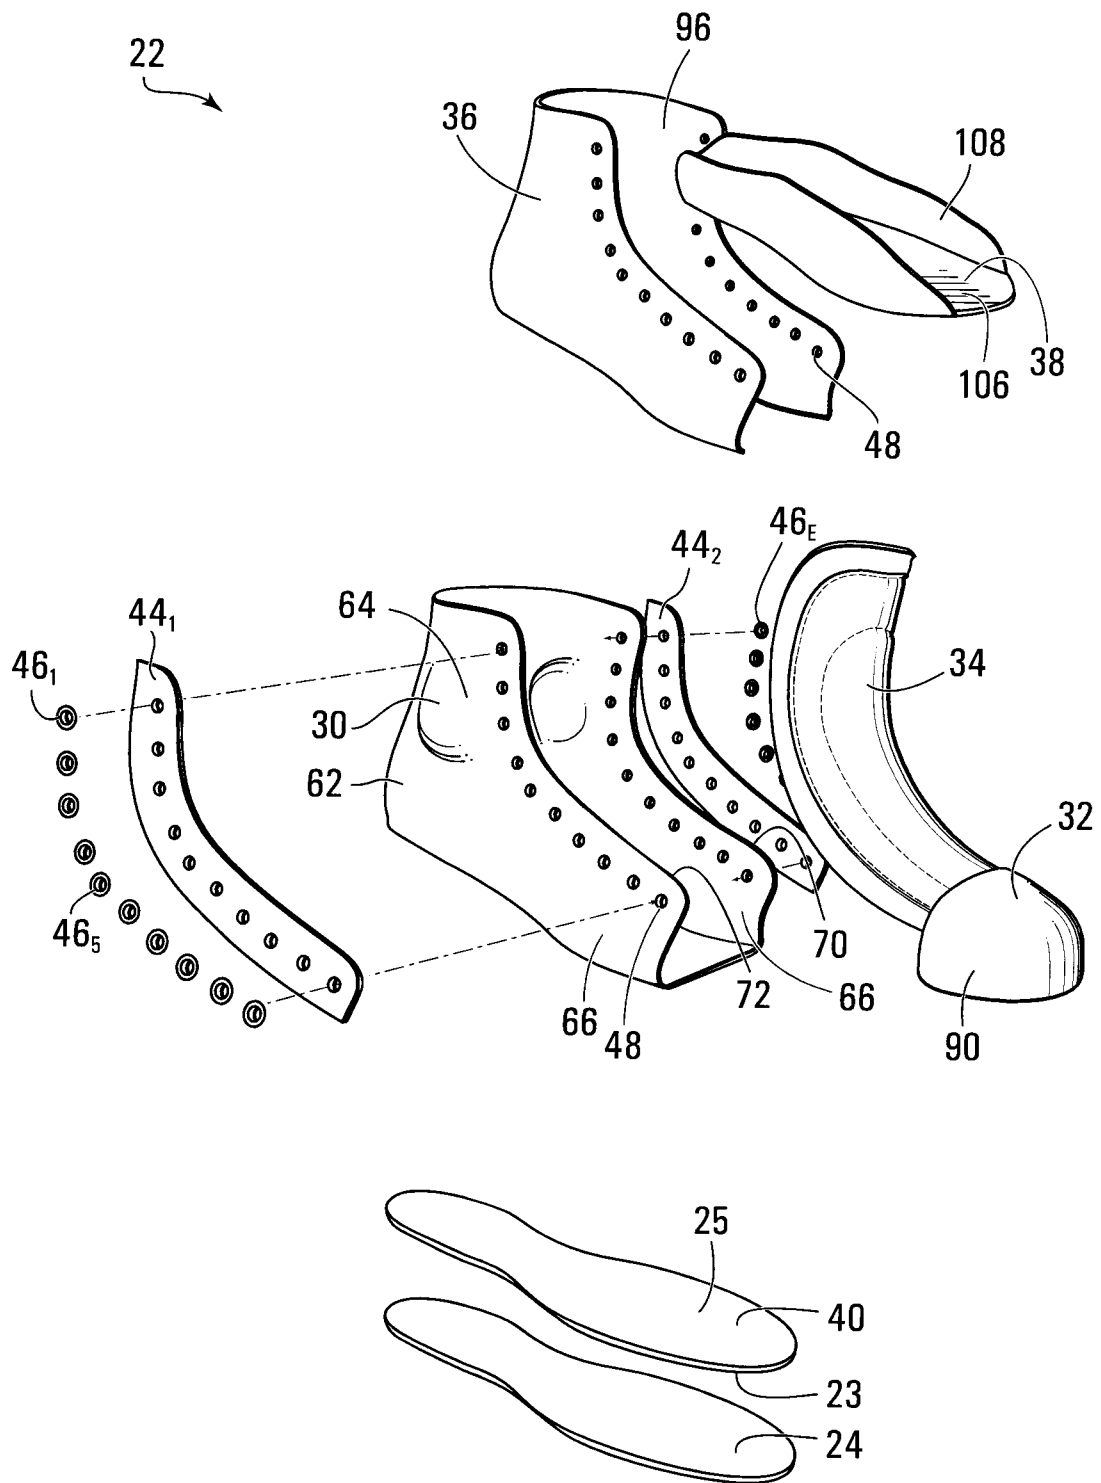
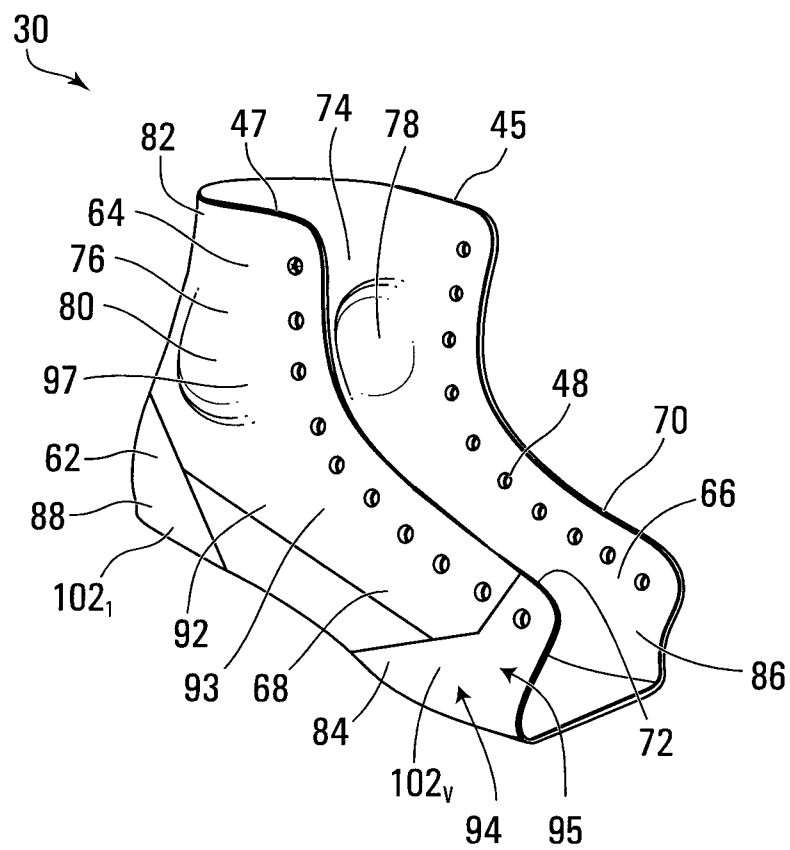


FIG. 11

+

**FIG. 12**

+

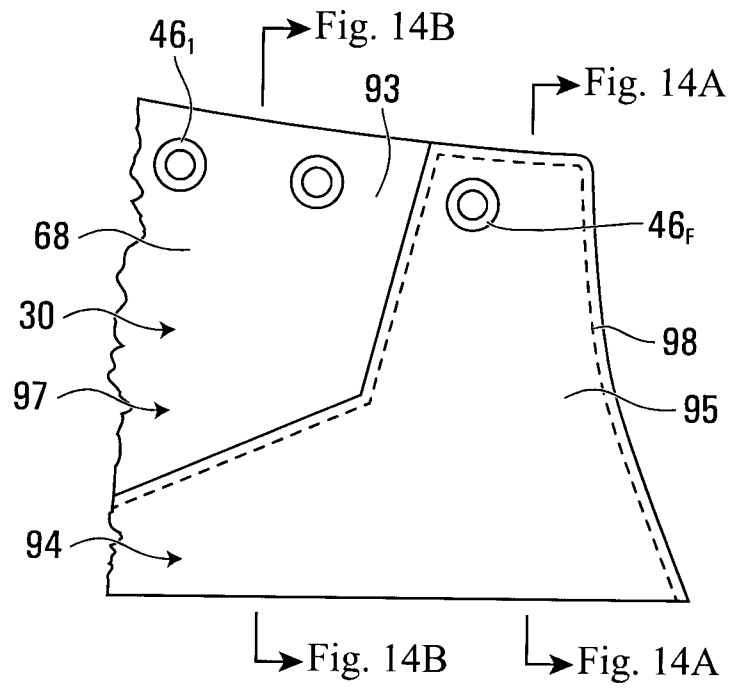


FIG. 13

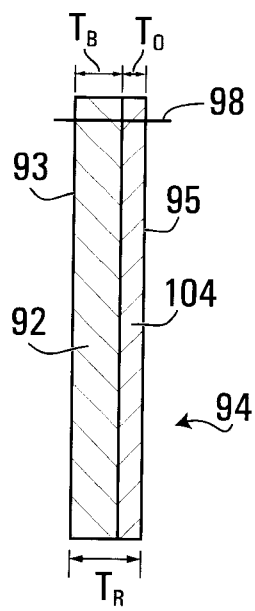


FIG. 14A

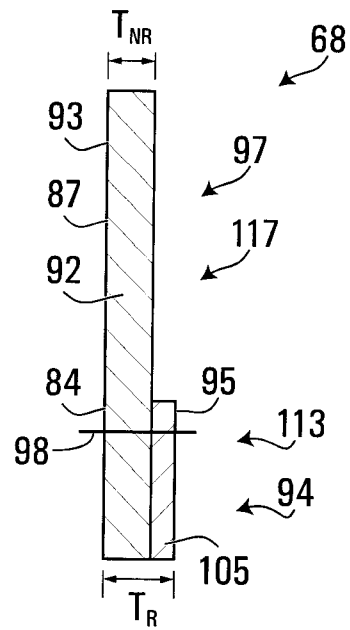


FIG. 14B

+

+

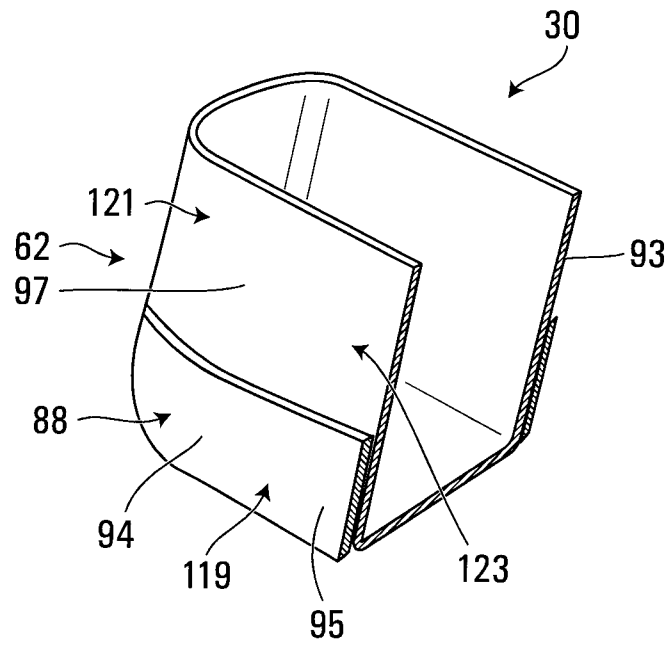
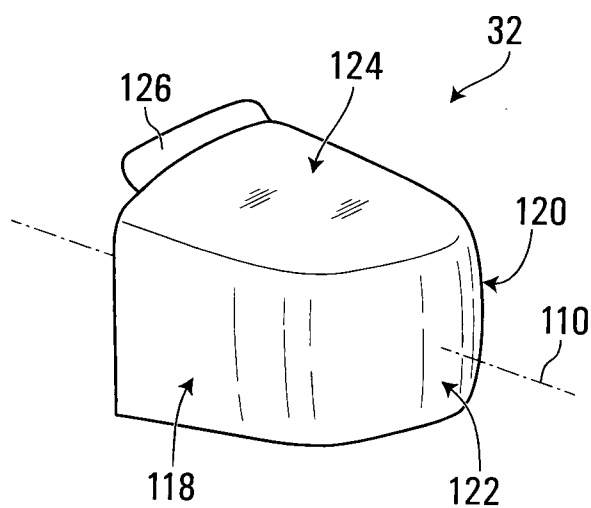
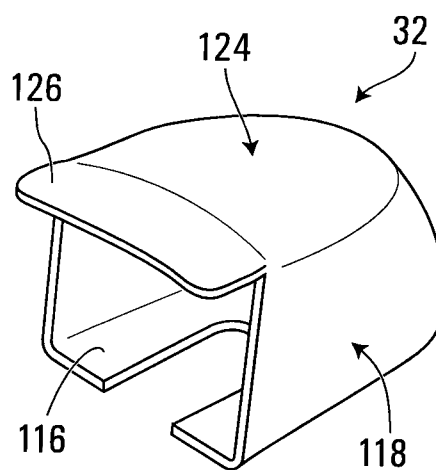
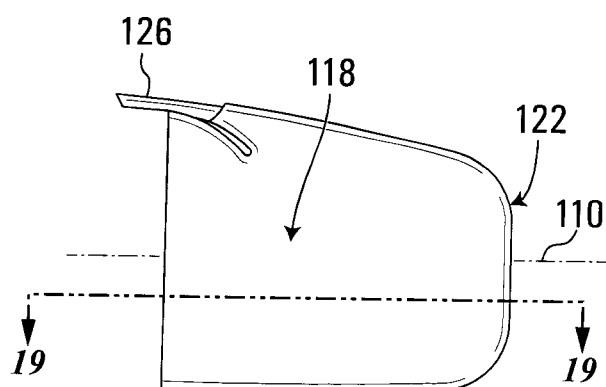
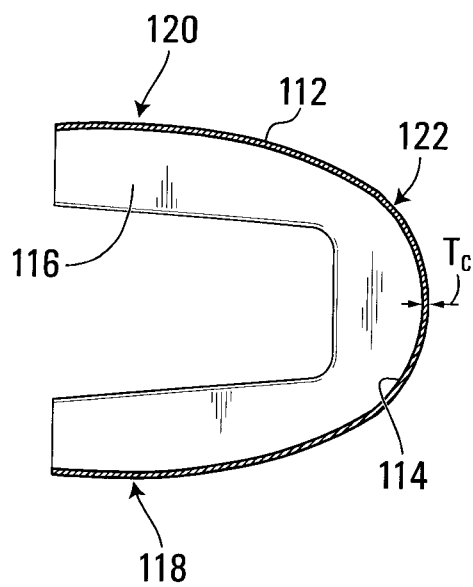



FIG. 15

+

+

**FIG. 16****FIG. 17****FIG. 18****FIG. 19**

+

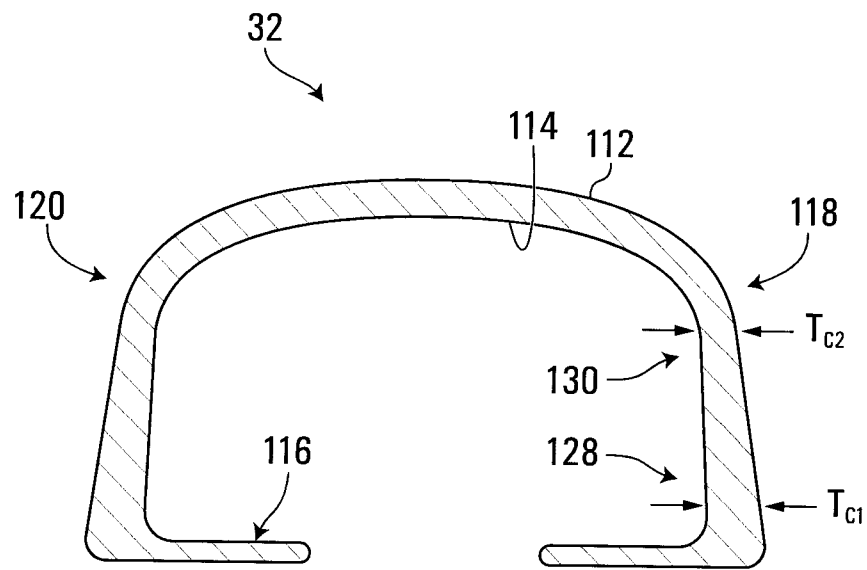**FIG. 20**

+

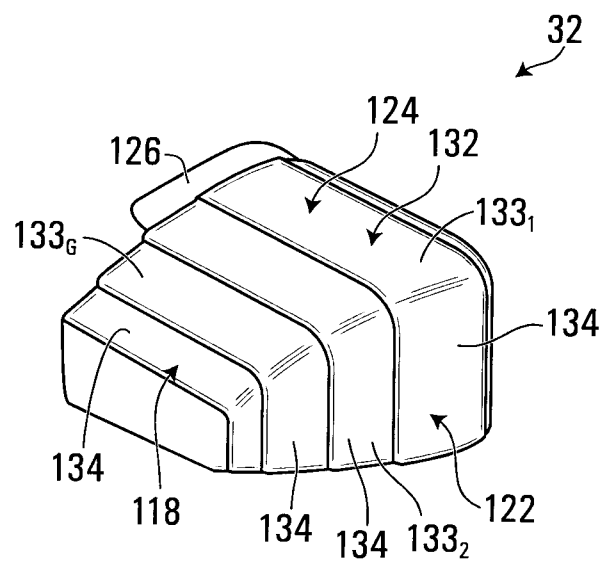


FIG. 21

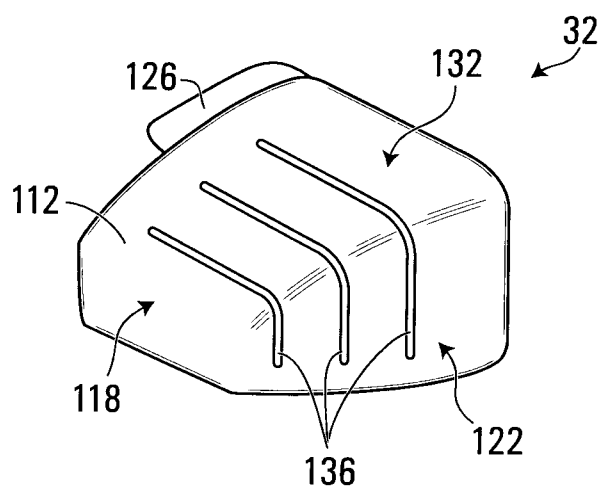


FIG. 22

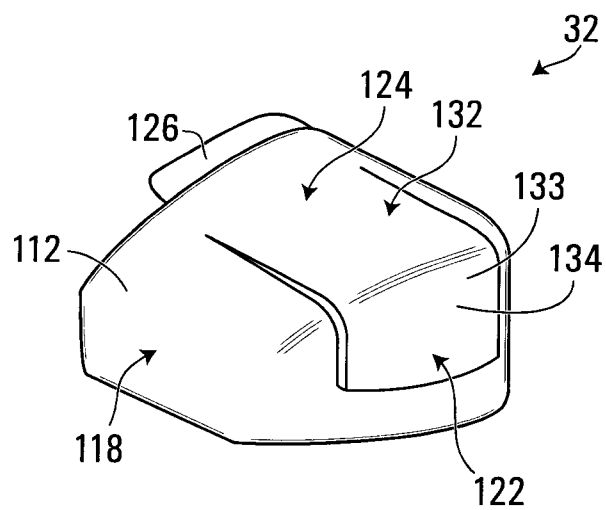
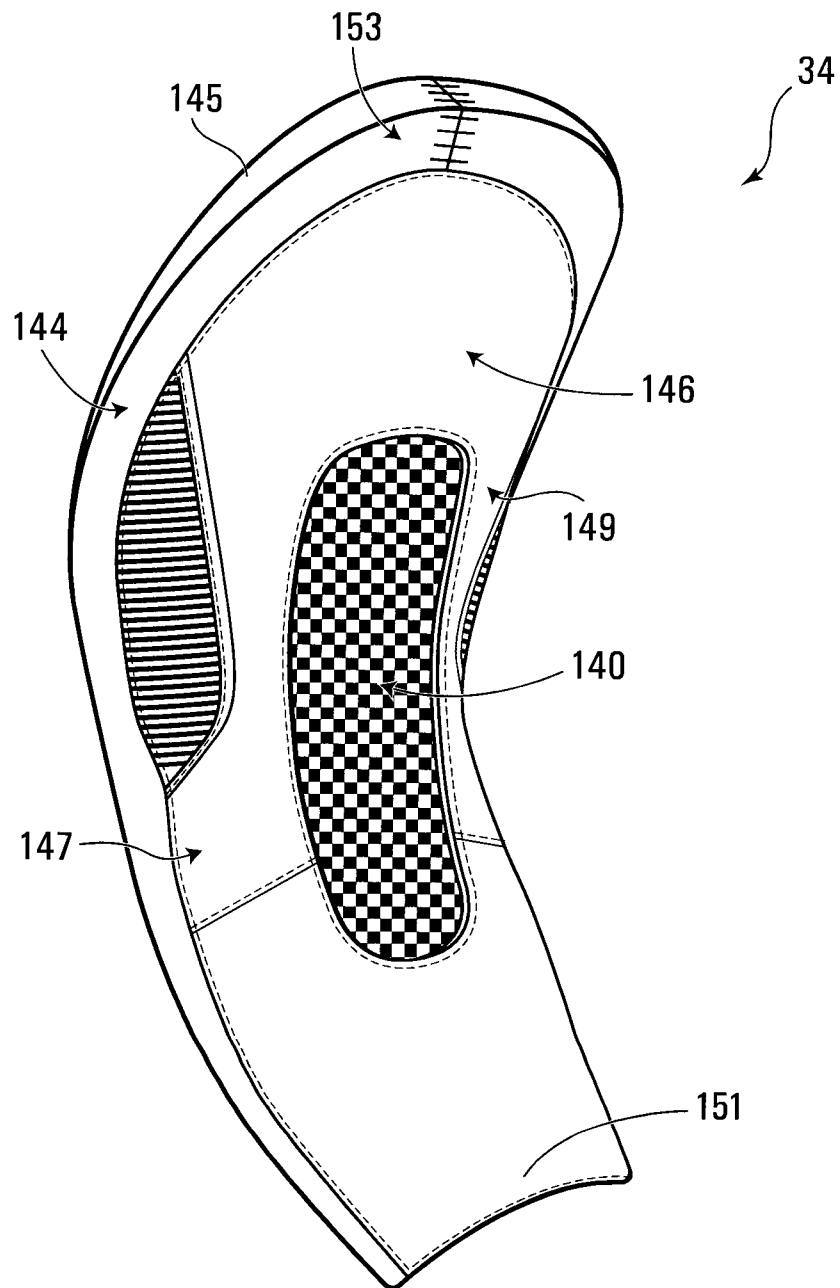


FIG. 23

+

**FIG. 24**

+

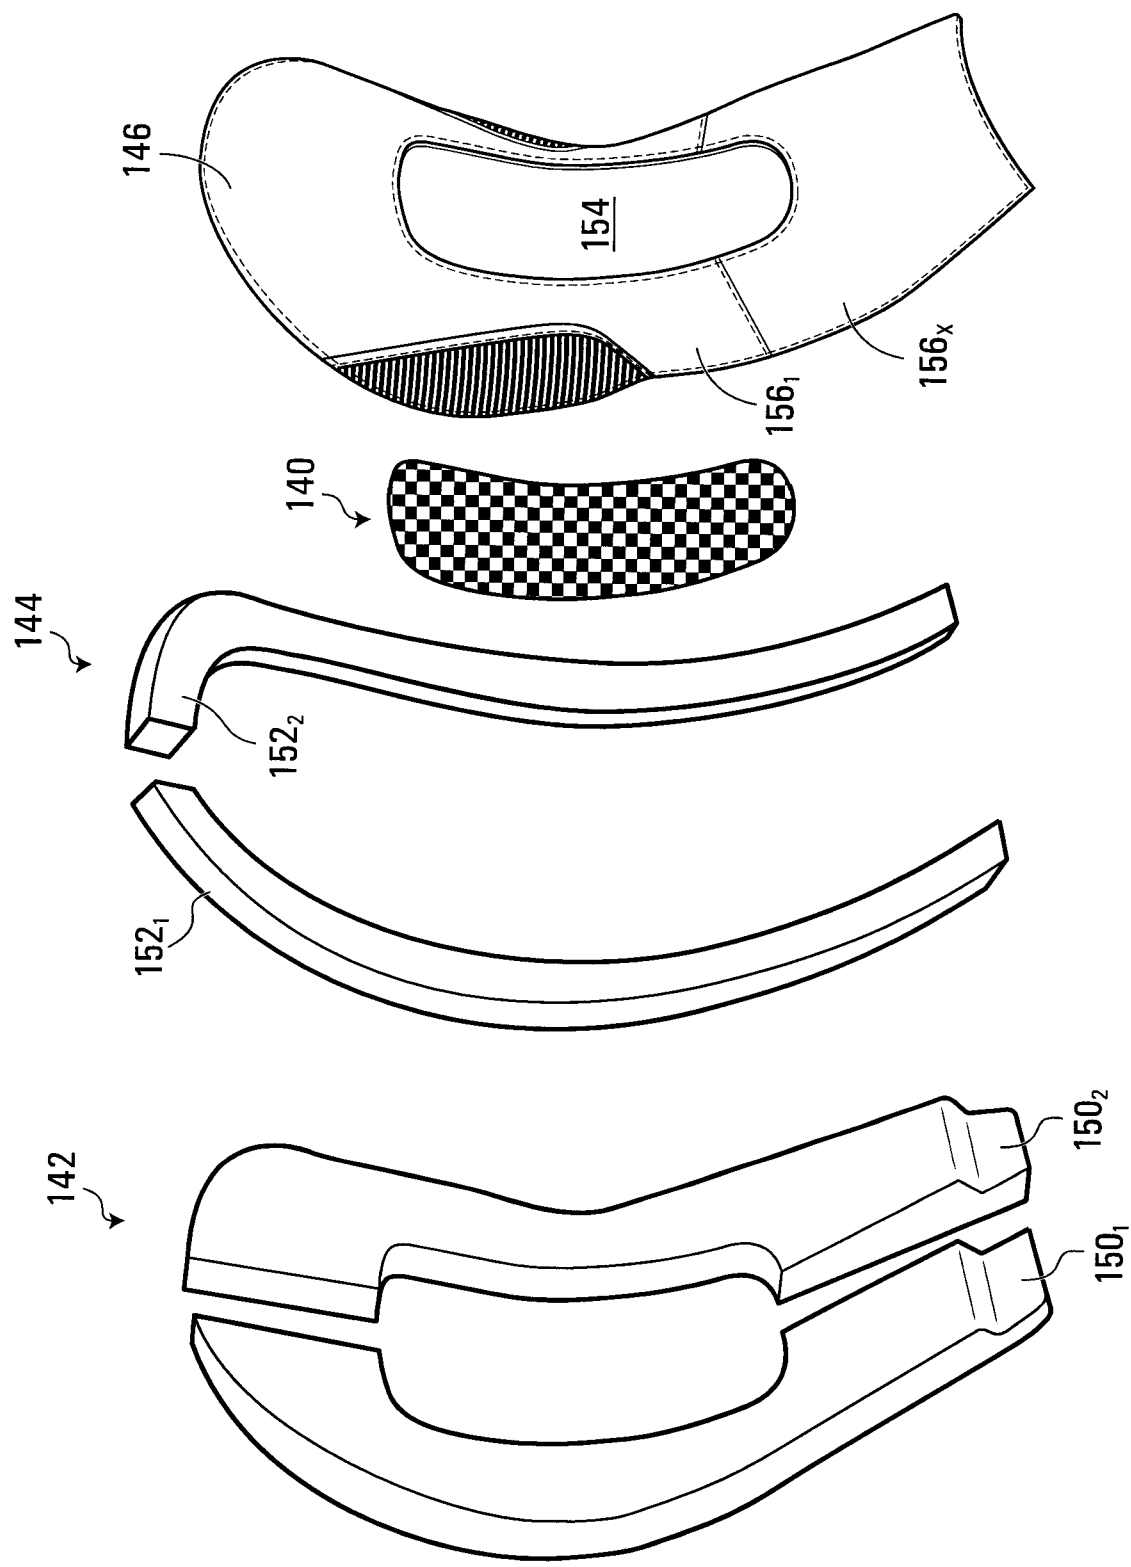


FIG. 25

+



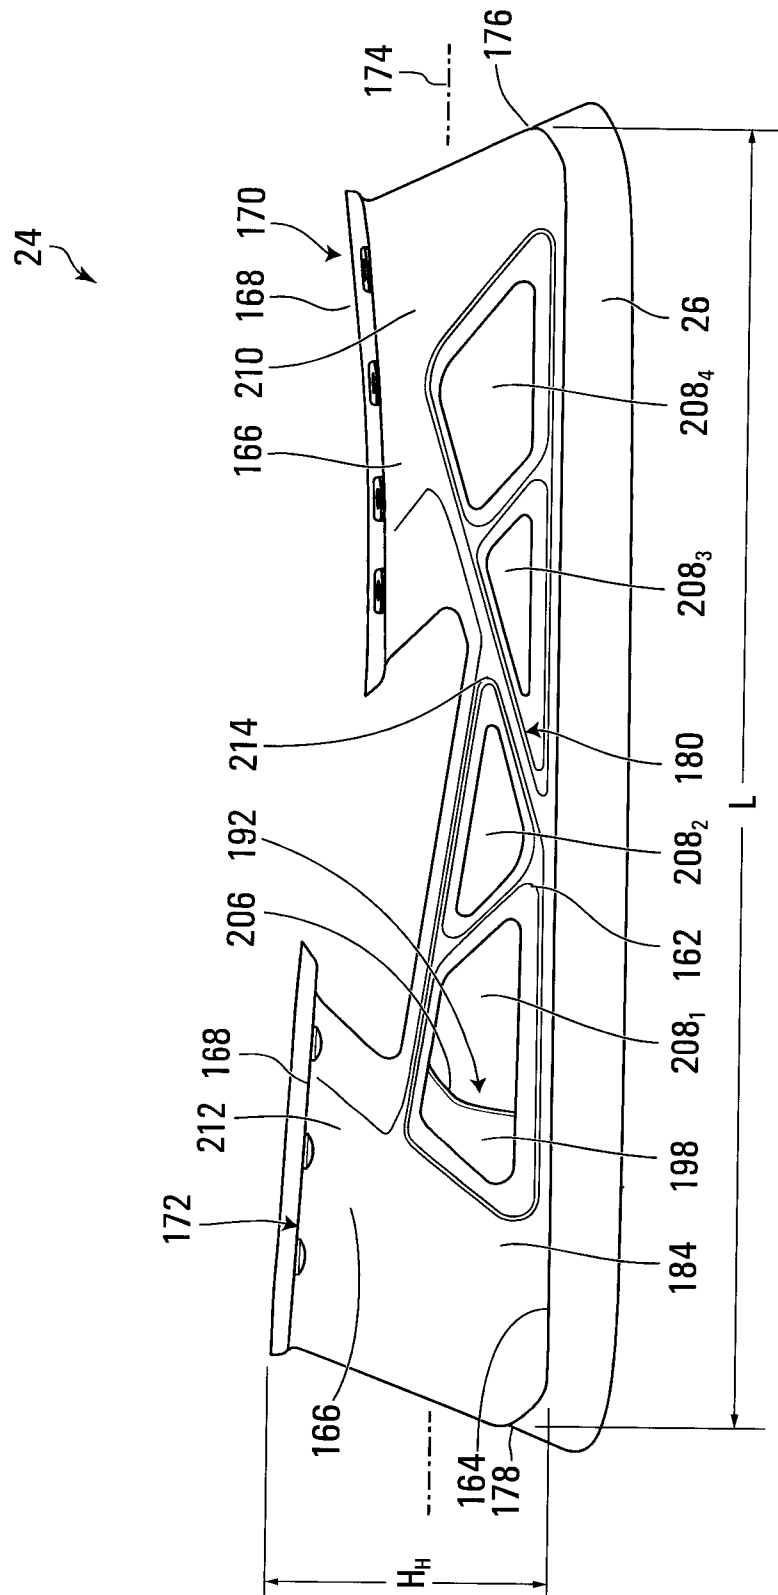


FIG. 26

+

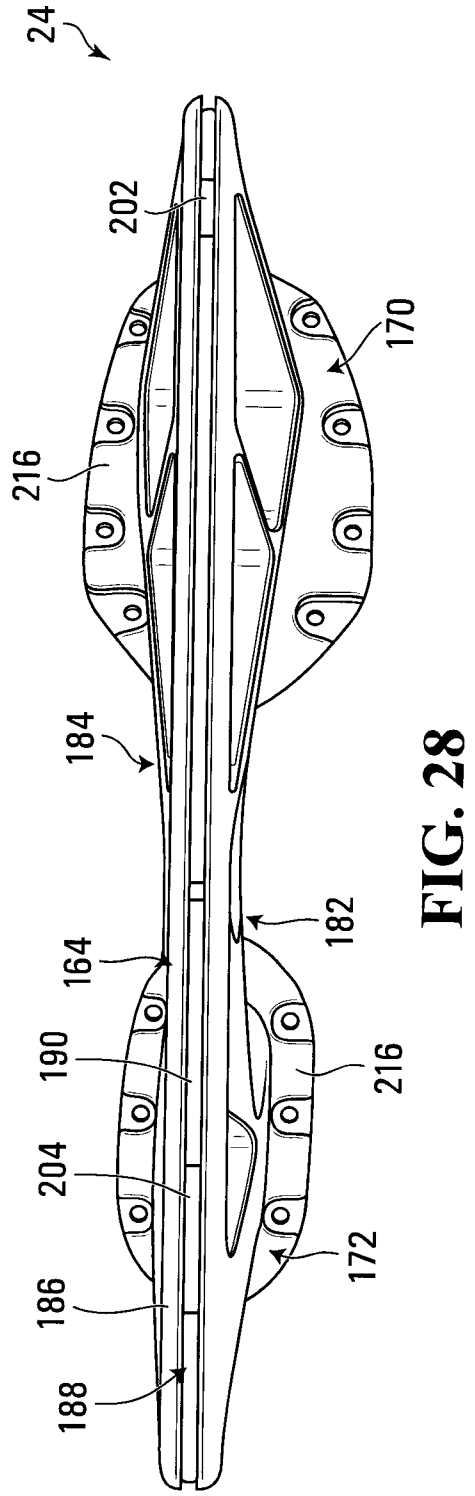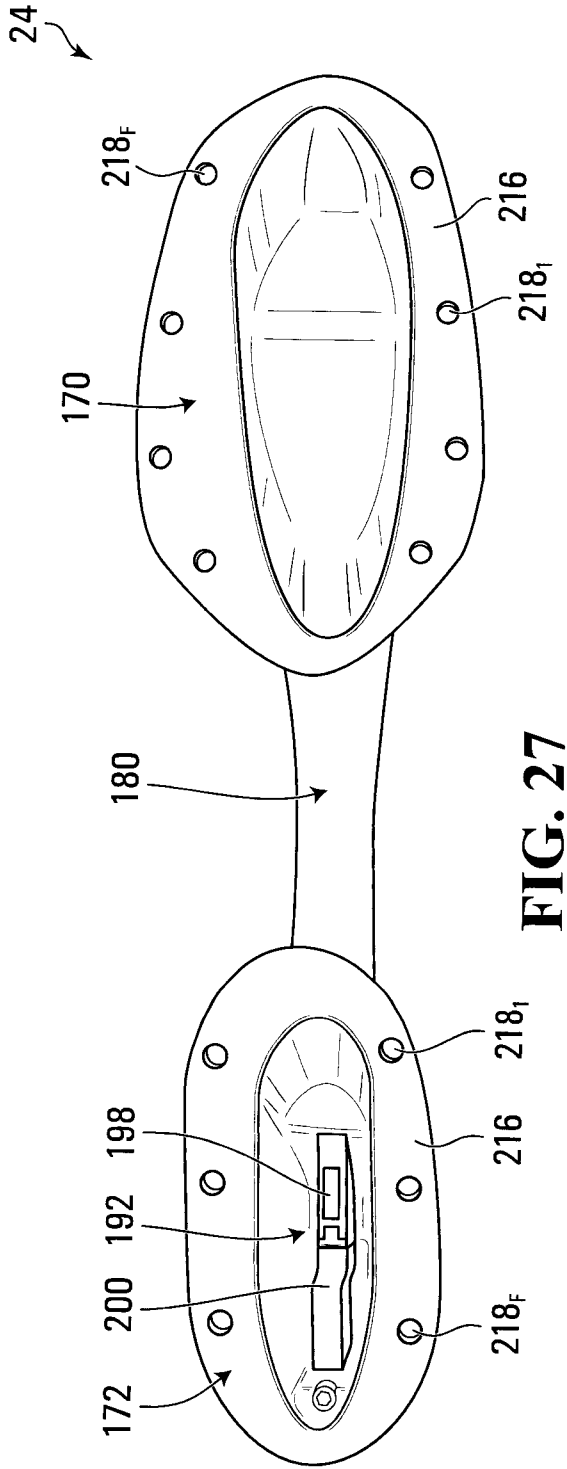

+

+

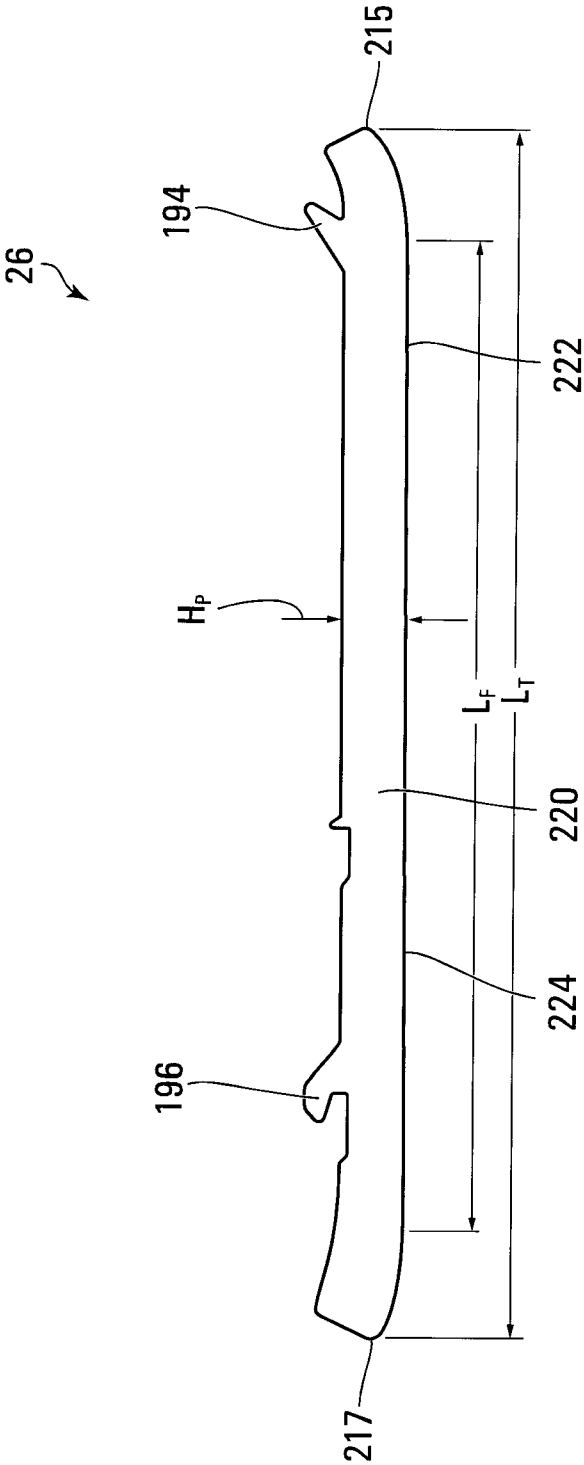


FIG. 29

+

+

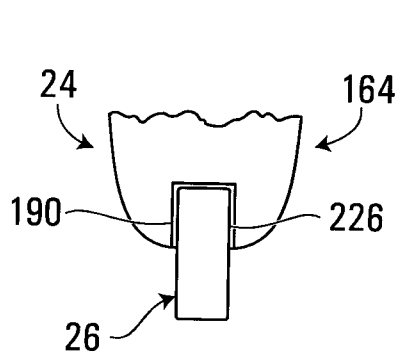


FIG. 30

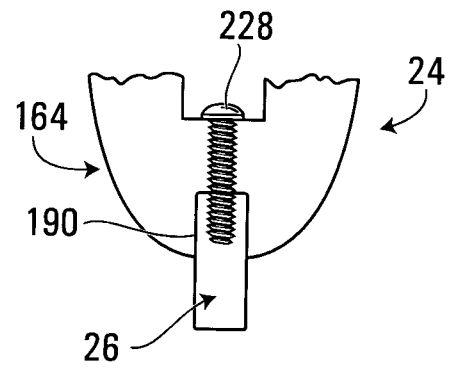


FIG. 31

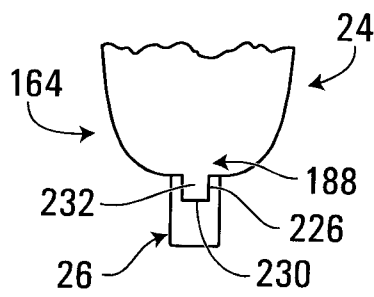


FIG. 32

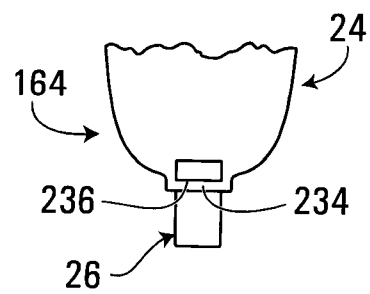


FIG. 33

+

+

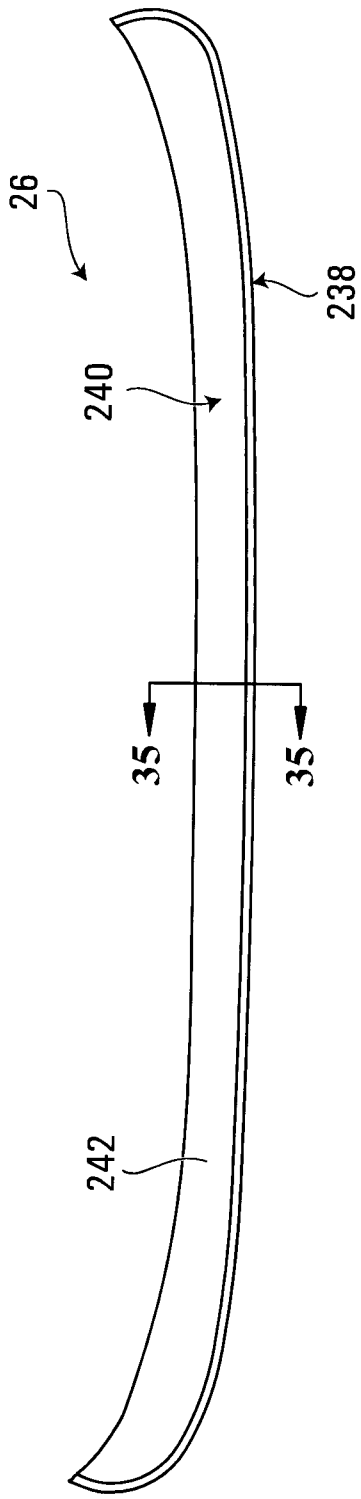


FIG. 34




FIG. 35

+

+

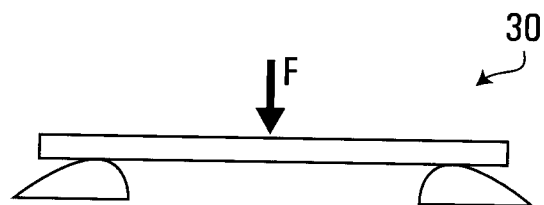


FIG. 36

+

+

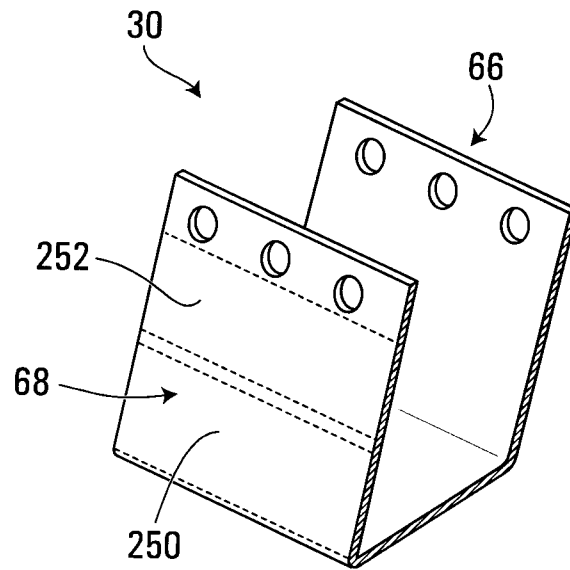


FIG. 37

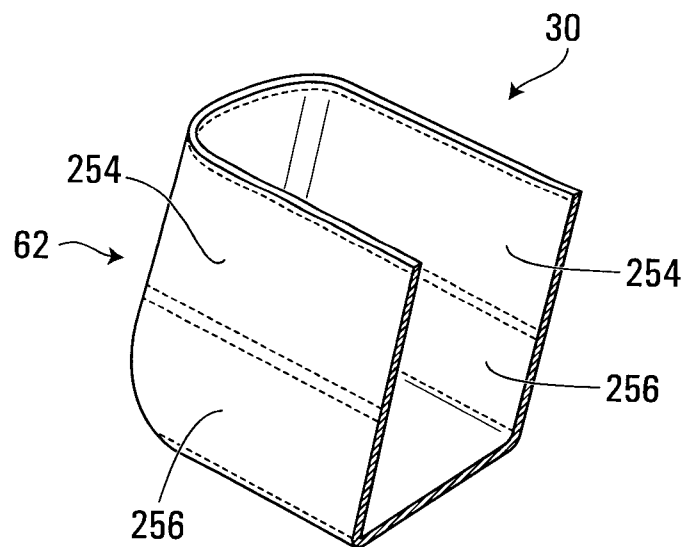


FIG. 38

+

+

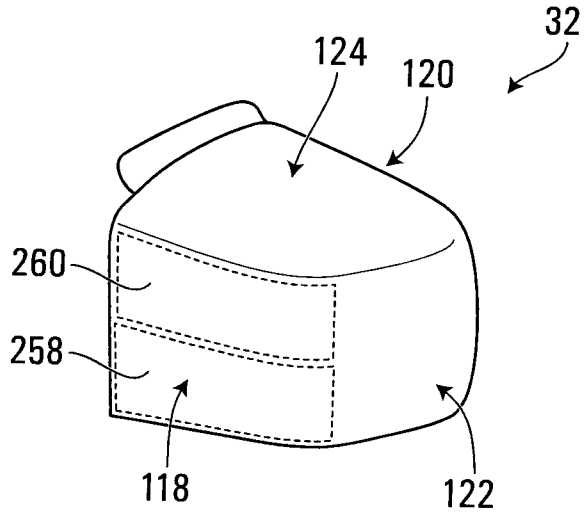


FIG. 39

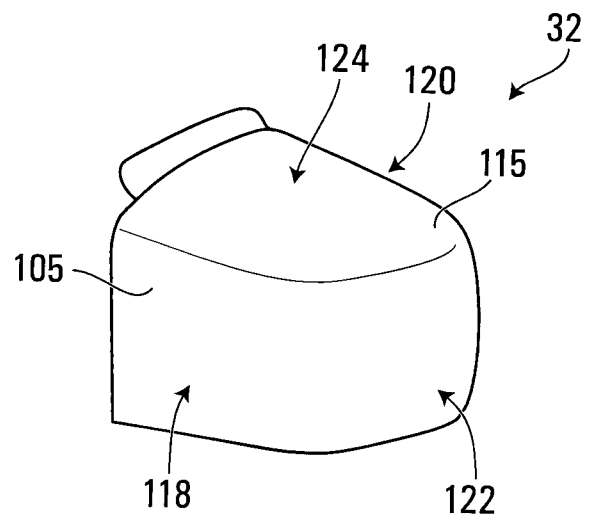


FIG. 40

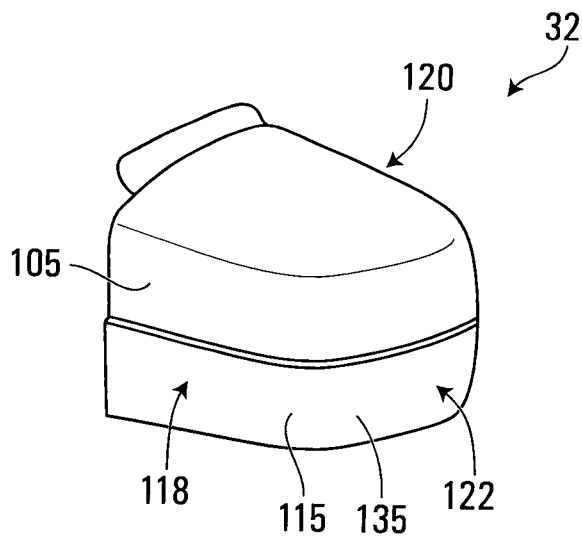


FIG. 41

+

+

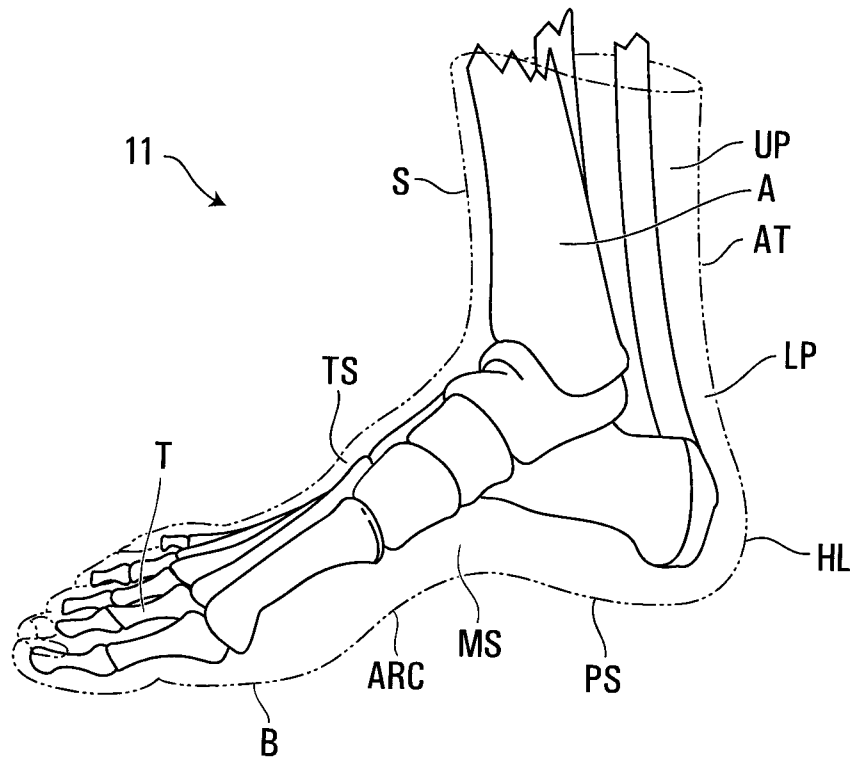


FIG. 42

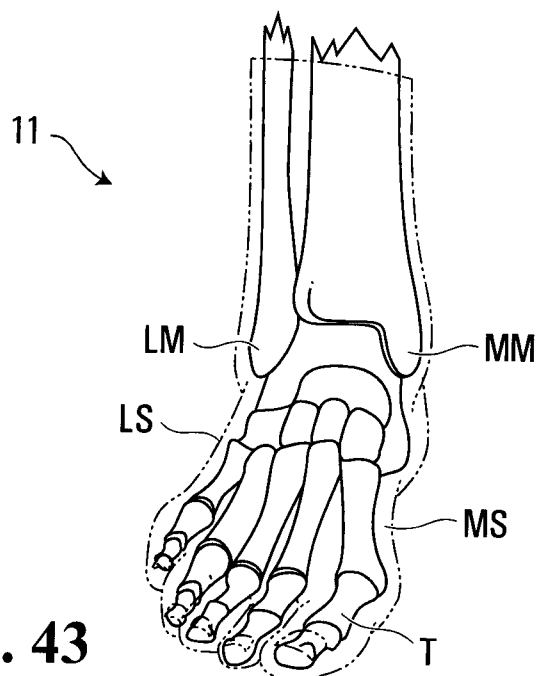


FIG. 43

+

