




(86) Date de dépôt PCT/PCT Filing Date: 2010/11/22
(87) Date publication PCT/PCT Publication Date: 2011/06/30
(45) Date de délivrance/Issue Date: 2018/02/27
(85) Entrée phase nationale/National Entry: 2012/06/20
(86) N° demande PCT/PCT Application No.: IB 2010/055340
(87) N° publication PCT/PCT Publication No.: 2011/077285
(30) Priorité/Priority: 2009/12/23 (US61/289,482)

(51) Cl.Int./Int.Cl. *A61C 17/34* (2006.01)
(72) Inventeurs/Inventors:
KLOSTER, TYLER G., US;
BENNING, WOLTER F., US;
CHANG, YU-WEN, US
(73) Propriétaire/Owner:
KONINKLIJKE PHILIPS ELECTRONICS N.V., NL
(74) Agent: SMART & BIGGAR

(54) Titre : TRANSMISSION RESONANTE ENTRAINEE MECANIQUEMENT POUR UNE BROSSE A DENTS ELECTRIQUE
(54) Title: MECHANICALLY DRIVEN RESONANT DRIVE TRAIN FOR A POWER TOOTHBRUSH

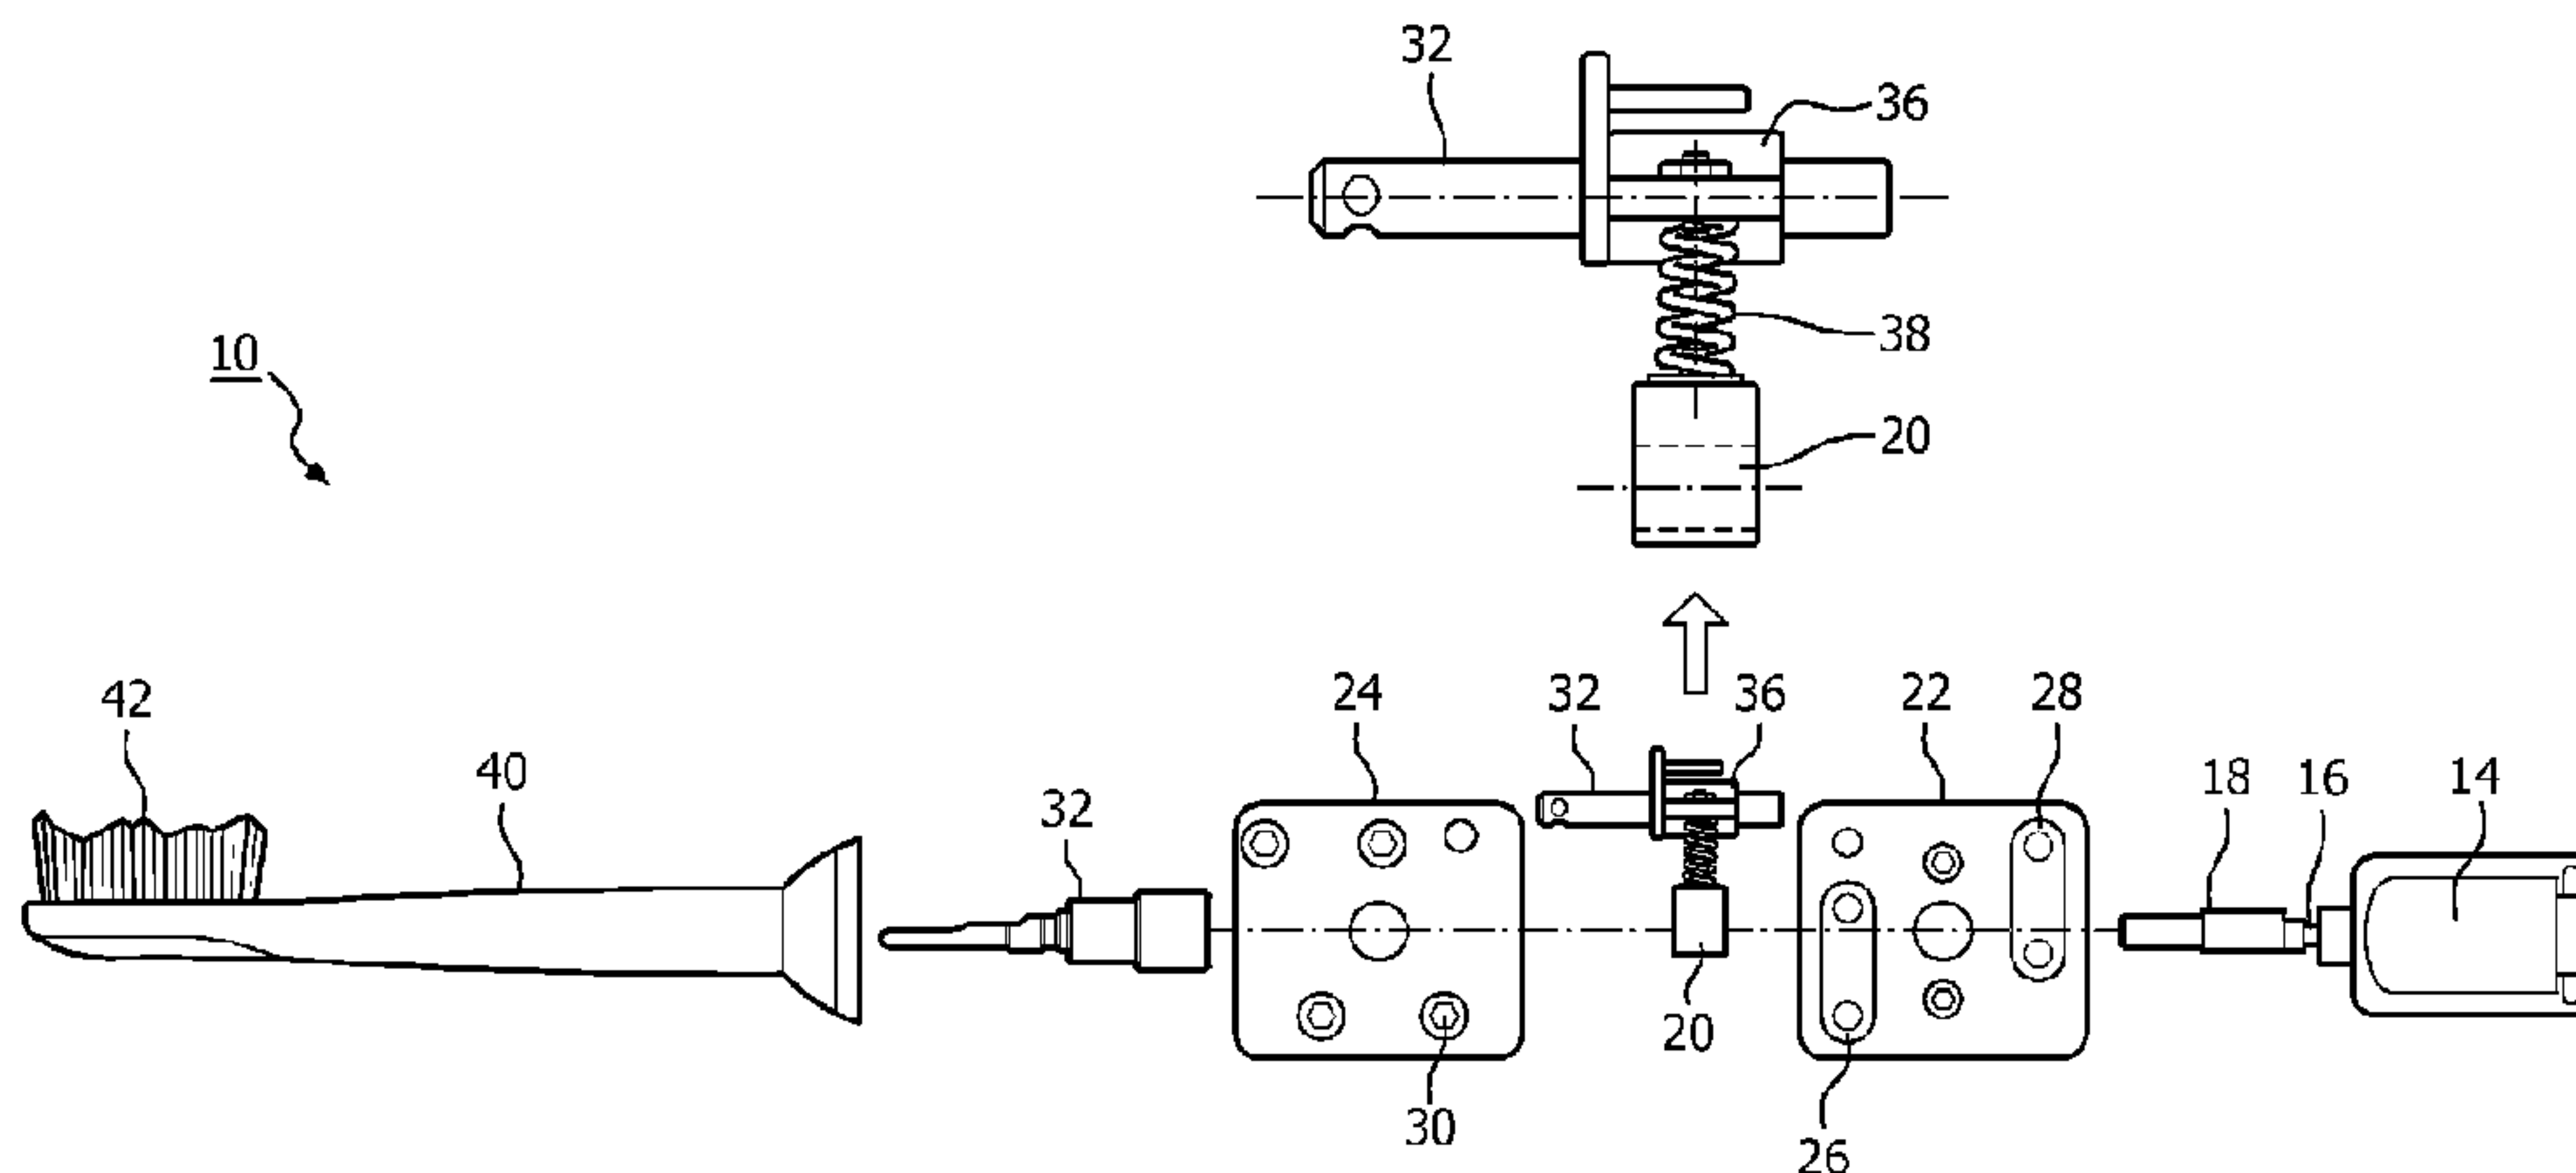

(57) Abrégé/Abstract:

The power toothbrush includes a driving assembly which in turn includes a DC motor (14) and a battery. The DC motor has a rotating drive shaft (16), supported at its free end. The drive shaft has an eccentric portion (18). Mounted on the eccentric portion is a plastic sleeve (20) having an extending portion which engages one end of a spring member (38). The other end of the spring member is secured to a yoke (36) which is secured to a brushhead shaft (32). Rotation of the drive shaft results in the extending portion of the plastic sleeve, moving the spring between a compressed state and an extended state. The action of the DC motor excites the spring to produce an oscillating action of the brushhead shaft and a brushhead assembly (40) mounted thereon.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
30 June 2011 (30.06.2011)(10) International Publication Number
WO 2011/077285 A3(51) International Patent Classification:
A61C 17/34 (2006.01)(21) International Application Number:
PCT/IB2010/055340(22) International Filing Date:
22 November 2010 (22.11.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/289,482 23 December 2009 (23.12.2009) US(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KLOSTER, Tyler, G.** [US/US]; P.O. Box 3001, 345 Scarborough Road, Briarcliff Manor, NY 10510-8001 (US). **BENNING, Wolter, F.** [US/US]; P.O. Box 3001, 345 Scarborough Road, Briarcliff Manor, NY 10510-8001 (US). **CHANG, Yu-wen** [CA/US]; P.O. Box 3001, 345 Scarborough Road, Briarcliff Manor, NY 10510-8001 (US).(74) Agent: **DAMEN, Daniel, M.**; Philips Intellectual Property & Standards, High Tech Campus 44, P.O. Box 220, NL-5600 AE Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:
1 September 2011

(54) Title: MECHANICALLY DRIVEN RESONANT DRIVE TRAIN FOR A POWER TOOTHBRUSH

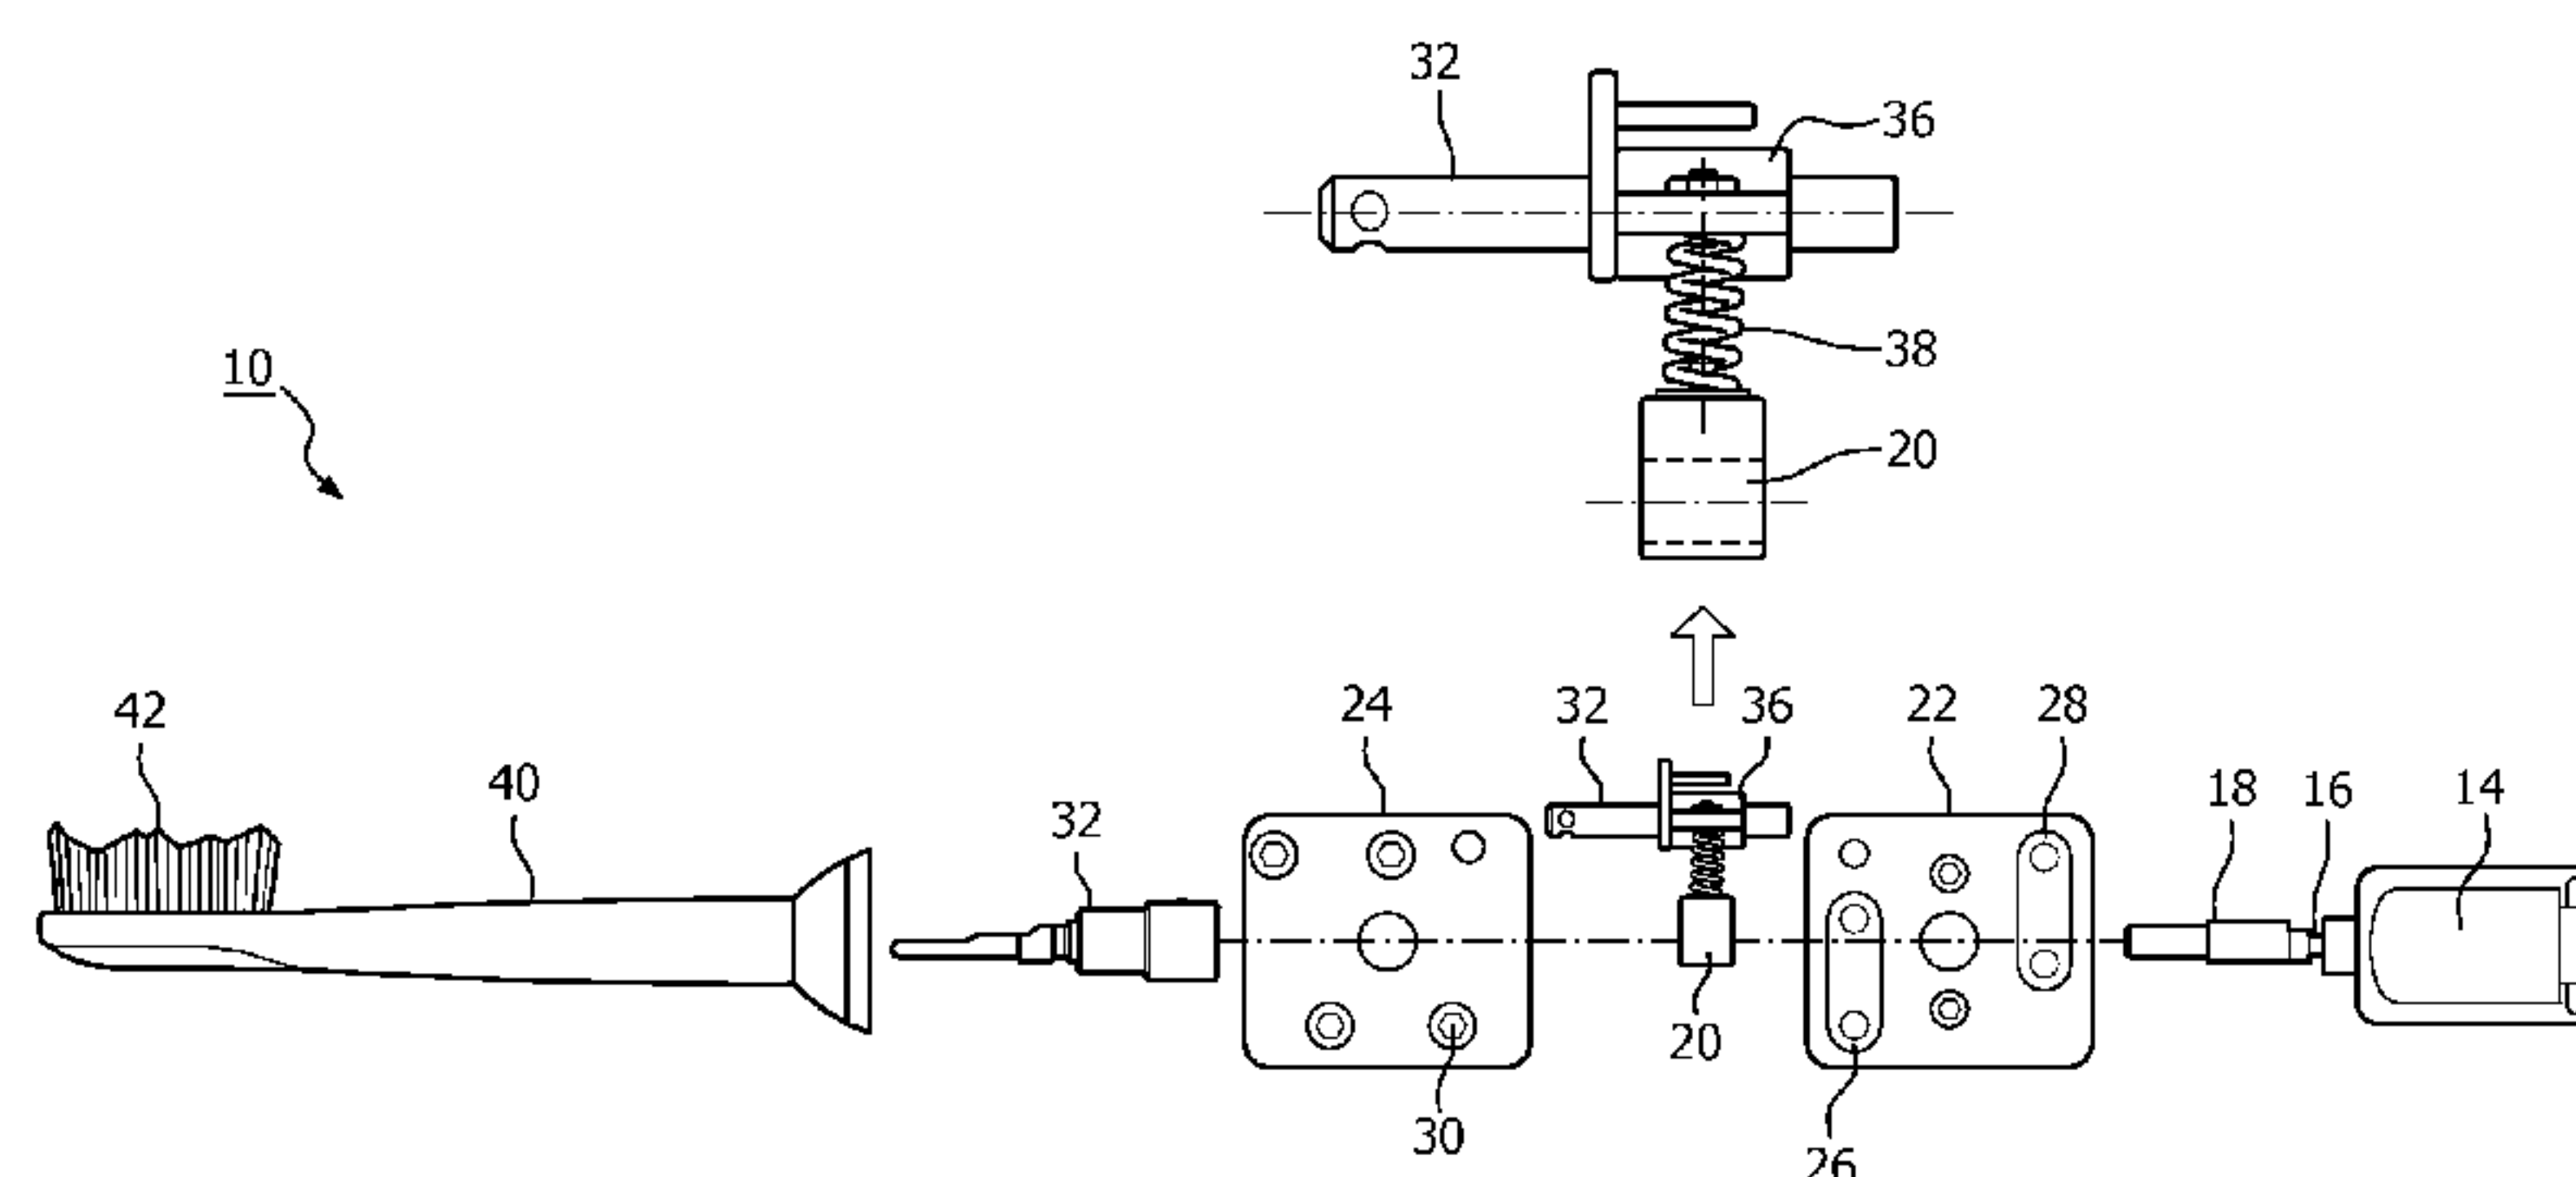


FIG. 2

(57) Abstract: The power toothbrush includes a driving assembly which in turn includes a DC motor (14) and a battery. The DC motor has a rotating drive shaft (16), supported at its free end. The drive shaft has an eccentric portion (18). Mounted on the eccentric portion is a plastic sleeve (20) having an extending portion which engages one end of a spring member (38). The other end of the spring member is secured to a yoke (36) which is secured to a brushhead shaft (32). Rotation of the drive shaft results in the extending portion of the plastic sleeve, moving the spring between a compressed state and an extended state. The action of the DC motor excites the spring to produce an oscillating action of the brushhead shaft and a brushhead assembly (40) mounted thereon.

WO 2011/077285 A3

81669230

1

MECHANICALLY DRIVEN RESONANT DRIVE TRAIN
FOR A POWER TOOTHBRUSH

[0001] This invention relates generally to power toothbrushes, and more specifically concerns a drive train for a power toothbrush.

5 [0002] In one form of a drive train for a power toothbrush, a sinusoidal signal is used to drive a spring assembly which in turn drives the portion of the toothbrush in a desired oscillating motion. However, the stators necessary to produce the required sinusoidal signal to create the magnetic field to drive the spring system are custom-made and, combined with the electronics required for such a drive system,
10 substantially increase the overall expense of such a power toothbrush.

[0003] Alternatively, DC motors have been used in a power toothbrush drive train for simplicity and to decrease overall expense. In order to produce an oscillating brushhead action, which is generally the most effective for teeth cleaning, a crank arm and linkage has been used with the DC motor to generate the required oscillating
15 brushhead motion and amplitude. As the frequency of the brushhead motion is increased to an effective value, however, the torque requirements for the motor operating with a crank and linkage mechanism increase.

[0004] It is hence desirable to have a drive train system which for simplicity and economy uses a DC motor, but does not have the disadvantages of a direct
20 crank and linkage assembly to produce the desired brushhead motion.

[0005] Accordingly, in one aspect, there is provided a power toothbrush, comprising: a driving assembly, including a battery and a DC motor, the DC motor having a rotating drive shaft extending therefrom, the drive shaft having a free end rotationally mounted in a support member, the drive shaft having an eccentric portion
25 located proximally from the free end thereof; a spring assembly extending from the eccentric portion, the spring assembly including a spring member which in operation moves alternately between compression and extension as the eccentric portion rotates, or which includes two spring member portions connected so that the two

81669230

2

spring member portions are always in compression as the eccentric portion rotates; a brushhead shaft member wherein the brushhead shaft member has a yoke member secured thereto and extending away from therefrom, the yoke member also being secured to the spring member, wherein in operation, an oscillating action of the brushhead shaft is produced as the eccentric portion of the drive shaft rotates, with the spring member alternating between its two conditions; and a brushhead assembly with bristles mounted on the brushhead shaft for cleaning a user's teeth.

[0006] Figure 1 is an exploded view of the toothbrush with the drive train disclosed herein.

10 [0007] Figure 2 is another exploded view of the toothbrush.

[0008] Figure 3 is a cross-sectional view showing the spring assembly portion of the drive train in compression.

[0009] Figure 4 is a cross-sectional view showing the spring assembly portion in extension.

15 [00010] Figure 5 is a side elevational view showing a portion of the toothbrush of Figures 1-4.

[00011] Figure 6 is a side elevational view showing an alternative embodiment to that of Figures 1-5.

[00012] Figure 7 is a cross-sectional view of an alternative embodiment to the
20 spring arrangement of Figures 1-6.

[00013] Referring to Figures 1 and 2, a power toothbrush is shown at 10. The toothbrush 10 includes a conventional handle 12 in which is positioned a DC motor 14. In the embodiment shown, the DC motor is high-speed (5K-20K rpm, or approximately 80-320 revolutions per second) and low torque (0.2 milliNewton-meters to 1.5 milliNewton-meters), although these values can be varied. Extending
25 from DC motor 14 is the motor (drive) shaft 16, which includes an eccentric portion

81669230

2a

18. The eccentric portion in the embodiment shown is located approximately 8 mm along the shaft 16, is approximately 18 mm long, and has an eccentricity of 0.5 mm. Mounted on eccentric portion 18 is a plastic sleeve 20.

[00014] Motor shaft 16 extends through an opening in and is supported by a
5 support plate 22 which is proximal to DC motor 14 and which is secured to handle 12 of the toothbrush, such that it does not move. A second support plate 24 in which the distal end of drive shaft 16 is mounted away from support plate 22 in a direction away from motor 14. Positioned between the two support plates 22 and 24 are standoff members 26 and 28. Support plates 22 and 24 and

standoff members 26 and 28 are connected together by screws 30-30, with two spaced screws for each standoff member. Standoff members 26 and 28 are located adjacent opposing sides of the support plates, with one standoff member being positioned toward one orthogonal side adjacent and the other standoff member being positioned toward the other orthogonal side adjacent, as shown in Figures 3 and 4 most clearly. This specific arrangement could be varied, however. In the embodiment shown, support plates 22 and 24 and the standoff members 26 and 28 are made from a hard plastic.

[00015] A plastic sleeve 20 is coupled to the eccentric portion 18 of the motor shaft, so that sleeve 20 rotates with action of the motor shaft. Extending also between support plates 22 and 24 and rotatable therein is a brushhead shaft 32. Attached fixedly to brushhead shaft 32 between support plates 22 and 24 and positioned longitudinally in line with sleeve 20 along brushhead shaft 32 is a yoke member 36. Secured to and between a free end 35 of sleeve 20 and a free end 37 of yoke member 36 is a spring member 38. Spring member 38 is a compression spring in the embodiment shown which, in one position, shown in Figure 3, is compressed, and in another position, shown in Figure 4, is released (extended), which occurs alternately as motor shaft 16 rotates. The sleeve 20 alternately compresses and releases spring 38 as the motor shaft rotates. Spring 38 has a spring rate of 10-30 Newtons/mm, preferably approximately 18.8 Newtons/mm. In the embodiment shown in Figures 1 and 2, brushhead shaft 32 is shown in two parts, the proximal part extending between and supported by the two support plates 22 and 24, while the distal part, onto which a brushhead 38 is removably connected, extends away from support plate 24. At the distal end of brushhead assembly 40 is a set of bristles 42.

[00016] In operation, spring 38 acts as a link between the eccentric portion 18 of motor shaft 16 and the brushhead shaft 32. When operated at the correct frequency, the excited spring operates to produce a sweeping alternating motion of brushhead shaft 32. In the embodiment shown, the angle of motion is between 6°-18°, while the frequency is between 150-300 Hz. The sweeping action is produced by the action of the spring 38 on yoke 36. The distance between the spring/yoke connection and the axis of the brushhead shaft is referred to as a moment arm. The moment arm in the embodiment shown is preferably 7.5 mm long, but can vary between 2 and 15 mm.

[00017] The drive train shown in operation uses a mechanical excitation of spring member 38, to produce a resonant response of the spring member and the brushhead near to or at the resonant frequency of the dynamic system. The force generated by the plastic sleeve 20 by means of the rotating eccentric shaft excites spring 38. At the distal end of spring 38, the force applied to the moment arm provides the required torque to the brushhead shaft to produce the sweeping motion of the brushhead assembly 40 and the bristles 42.

[00018] Depending upon the voltage supplied to DC motor 14, the stiffness of the spring member 38 and the inertia of the overall system, the desired resonant mode of the spring can be controlled. The amplitude of the bristle motion can be controlled by varying the eccentricity of the eccentric portion 18 of the drive shaft, the frequency of operation and the length of the moment arm. Amplitude is also affected by the moment of inertia of the oscillating components, including the brushhead shaft and the brushhead assembly.

[00019] In the arrangement of Figures 1-5, the spring member 38 serves two purposes; (1) it constrains the motion of the plastic sleeve 20 to a sweeping alternating motion (instead of a rotating action), which is effective for teeth cleaning, and (2) it facilitates the overall resonant frequency of the dynamic system. Depending upon the stiffness of the compression spring and the system inertia, the resonant frequency of the oscillating system for the sweeping motion can be adjusted.

[00020] Figure 6 shows an alternate embodiment, in which the toothbrush motor 50 motor drives a first gear 52 which in turn drives a mating gear 54 to which is mounted an eccentric shaft 56 on which a plastic sleeve 58 is positioned. With this drive train arrangement, it is possible to provide a lower cost toothbrush, primarily because the speed multiplying effect of the gear arrangement permits the use of a lower speed and hence lower cost motor. It may also be used to vary the frequency of the brushhead motion. The embodiment of Figure 6, as with the other embodiments described above, is suitable for use in other personal care appliances, such as for instance electric shavers, which may require a different operating frequency.

[00021] Figure 7 shows an alternative spring embodiment for the embodiments of Figures 1-6, includes two springs 60 and 62 in an otherwise similar drive train arrangement. The springs have a pre-load such that the two springs stay in some state of compression at all times, instead

of alternating between compression and extension. This arrangement results in reduced fatigue and reduced noise for the appliance.

[00022] Hence, a drive train for a power toothbrush has been disclosed which uses a mechanical drive arrangement operating on a spring assembly, in which an eccentric portion of the drive shaft is used to excite the spring member and produce the desired resonant sweeping motion of the brushhead.

[00023] Although a preferred embodiment of the invention has been disclosed for purposes of illustration, it should be understood that various changes, modifications and substitutions may be incorporated in the embodiment without departing from the spirit of the invention, which is defined by the claims which follow.

81669230

6

CLAIMS:

1. A power toothbrush, comprising:

a driving assembly, including a battery and a DC motor, the DC motor having a rotating drive shaft extending therefrom, the drive shaft having a free end
5 rotationally mounted in a support member, the drive shaft having an eccentric portion located proximally from the free end thereof;

a spring assembly extending from the eccentric portion, the spring assembly including a spring member which in operation moves alternately between compression and extension as the eccentric portion rotates, or which includes two
10 spring member portions connected so that the two spring member portions are always in compression as the eccentric portion rotates;

a brushhead shaft member wherein the brushhead shaft member has a yoke member secured thereto and extending away from therefrom, the yoke member also being secured to the spring member, wherein in operation, an oscillating action
15 of the brushhead shaft is produced as the eccentric portion of the drive shaft rotates, with the spring member alternating between its two conditions; and

a brushhead assembly with bristles mounted on the brushhead shaft for cleaning a user's teeth.

2. The toothbrush of claim 1, wherein the spring assembly includes a
20 plastic sleeve member which is positioned on the eccentric portion, the plastic sleeve member having such a configuration that as the drive shaft of the motor rotates, the spring member moves between said two conditions.

3. The toothbrush of claim 1, wherein the DC motor has a speed within the range of 5,000-20,000 rpm and a torque within the range of 0.2-1.5 mNm.

25 4. The toothbrush of claim 1, wherein the spring has a spring rate in the range of 10 Newtons/mm to 30 Newtons/mm.

81669230

7

5. The toothbrush of claim 1, wherein there is a moment arm between the spring contact with the yoke member and the brushhead shaft axis, having a length in the range of 2-15 mm.

6. The toothbrush of claim 1, wherein the drive shaft includes a gear
5 assembly prior to the eccentric portion, wherein changing the gear assembly produces at least one of a change in frequency of operation of the toothbrush, and a change in the speed of the drive shaft.


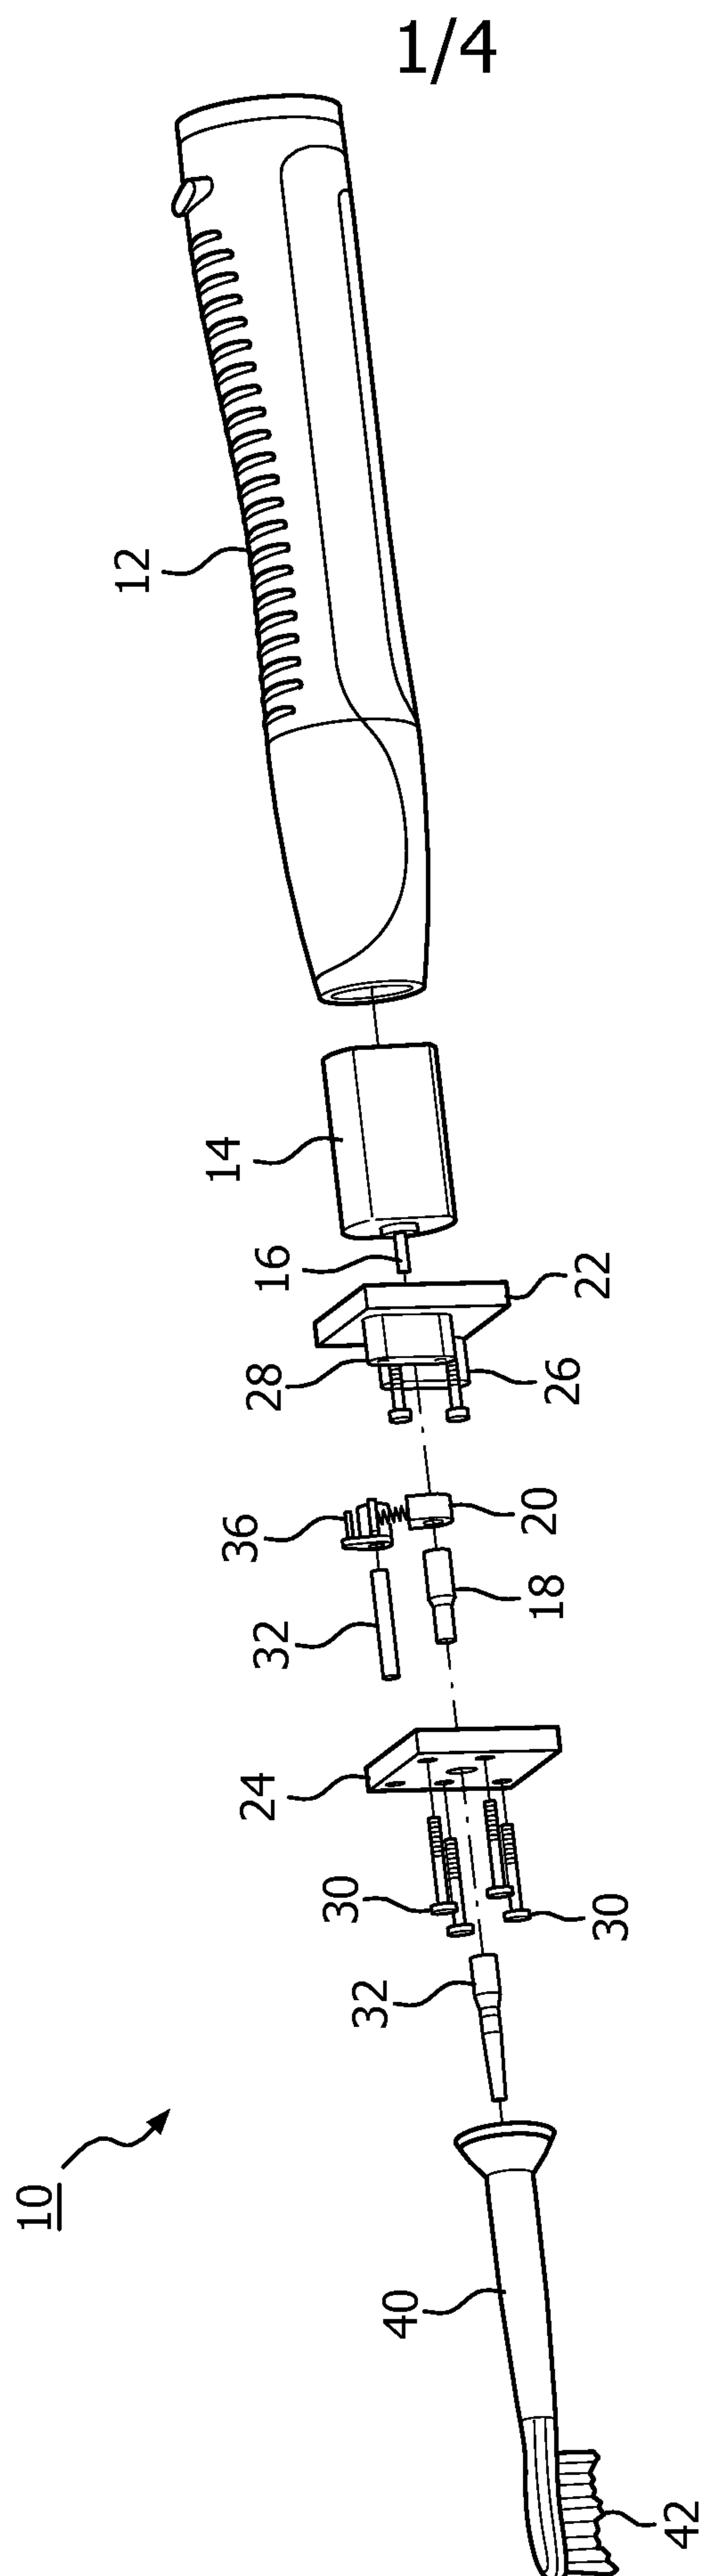


FIG. 1

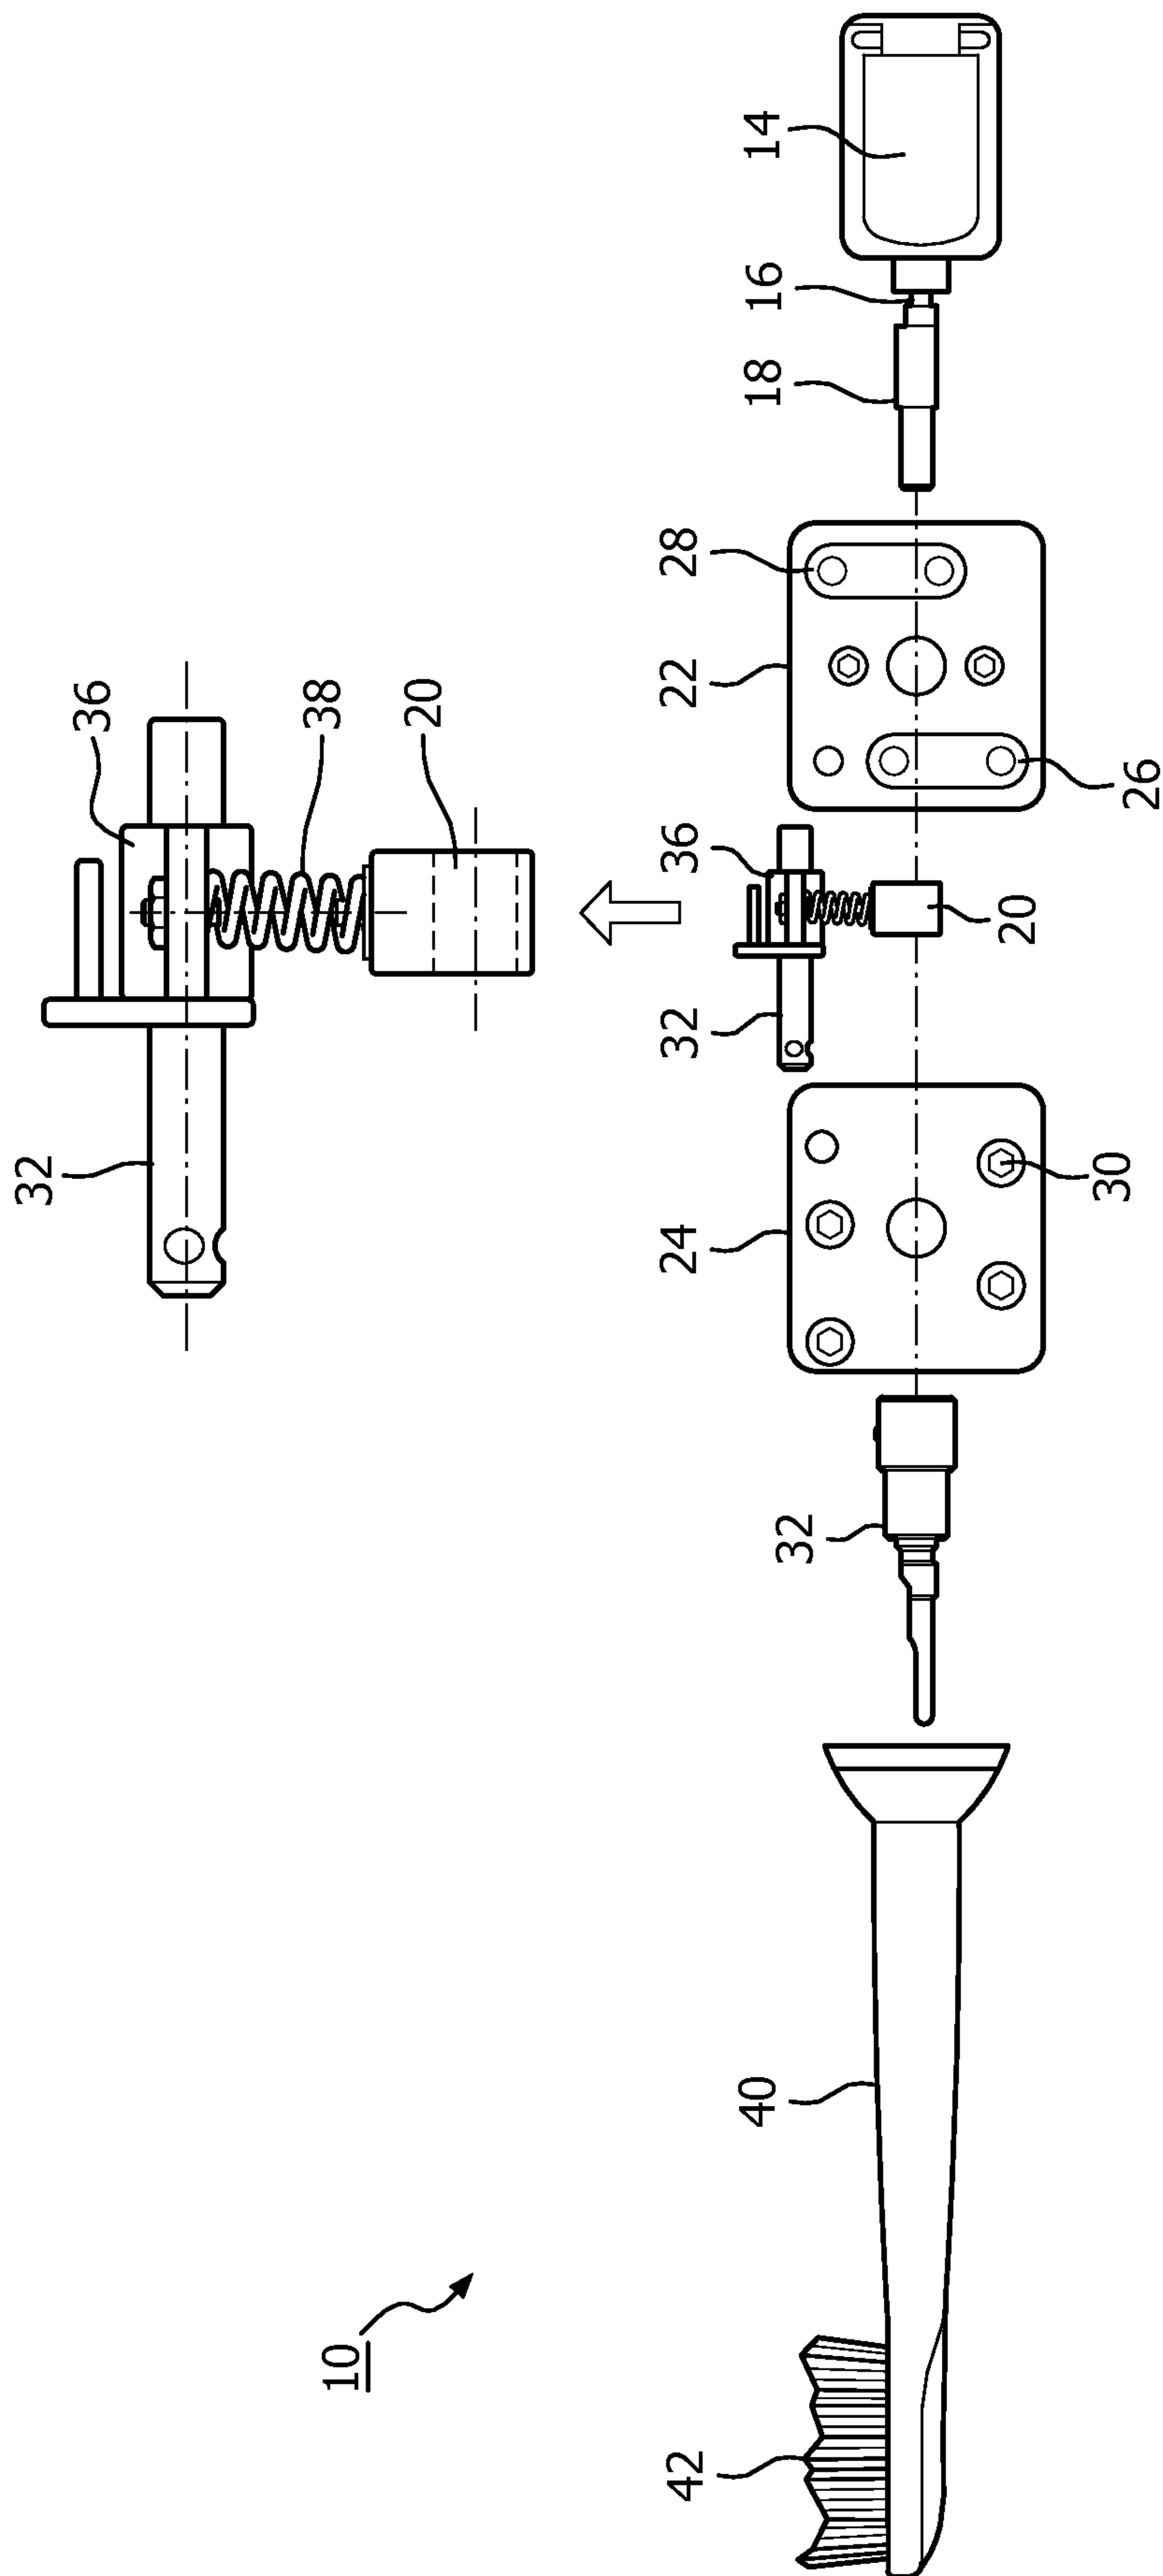

3/4

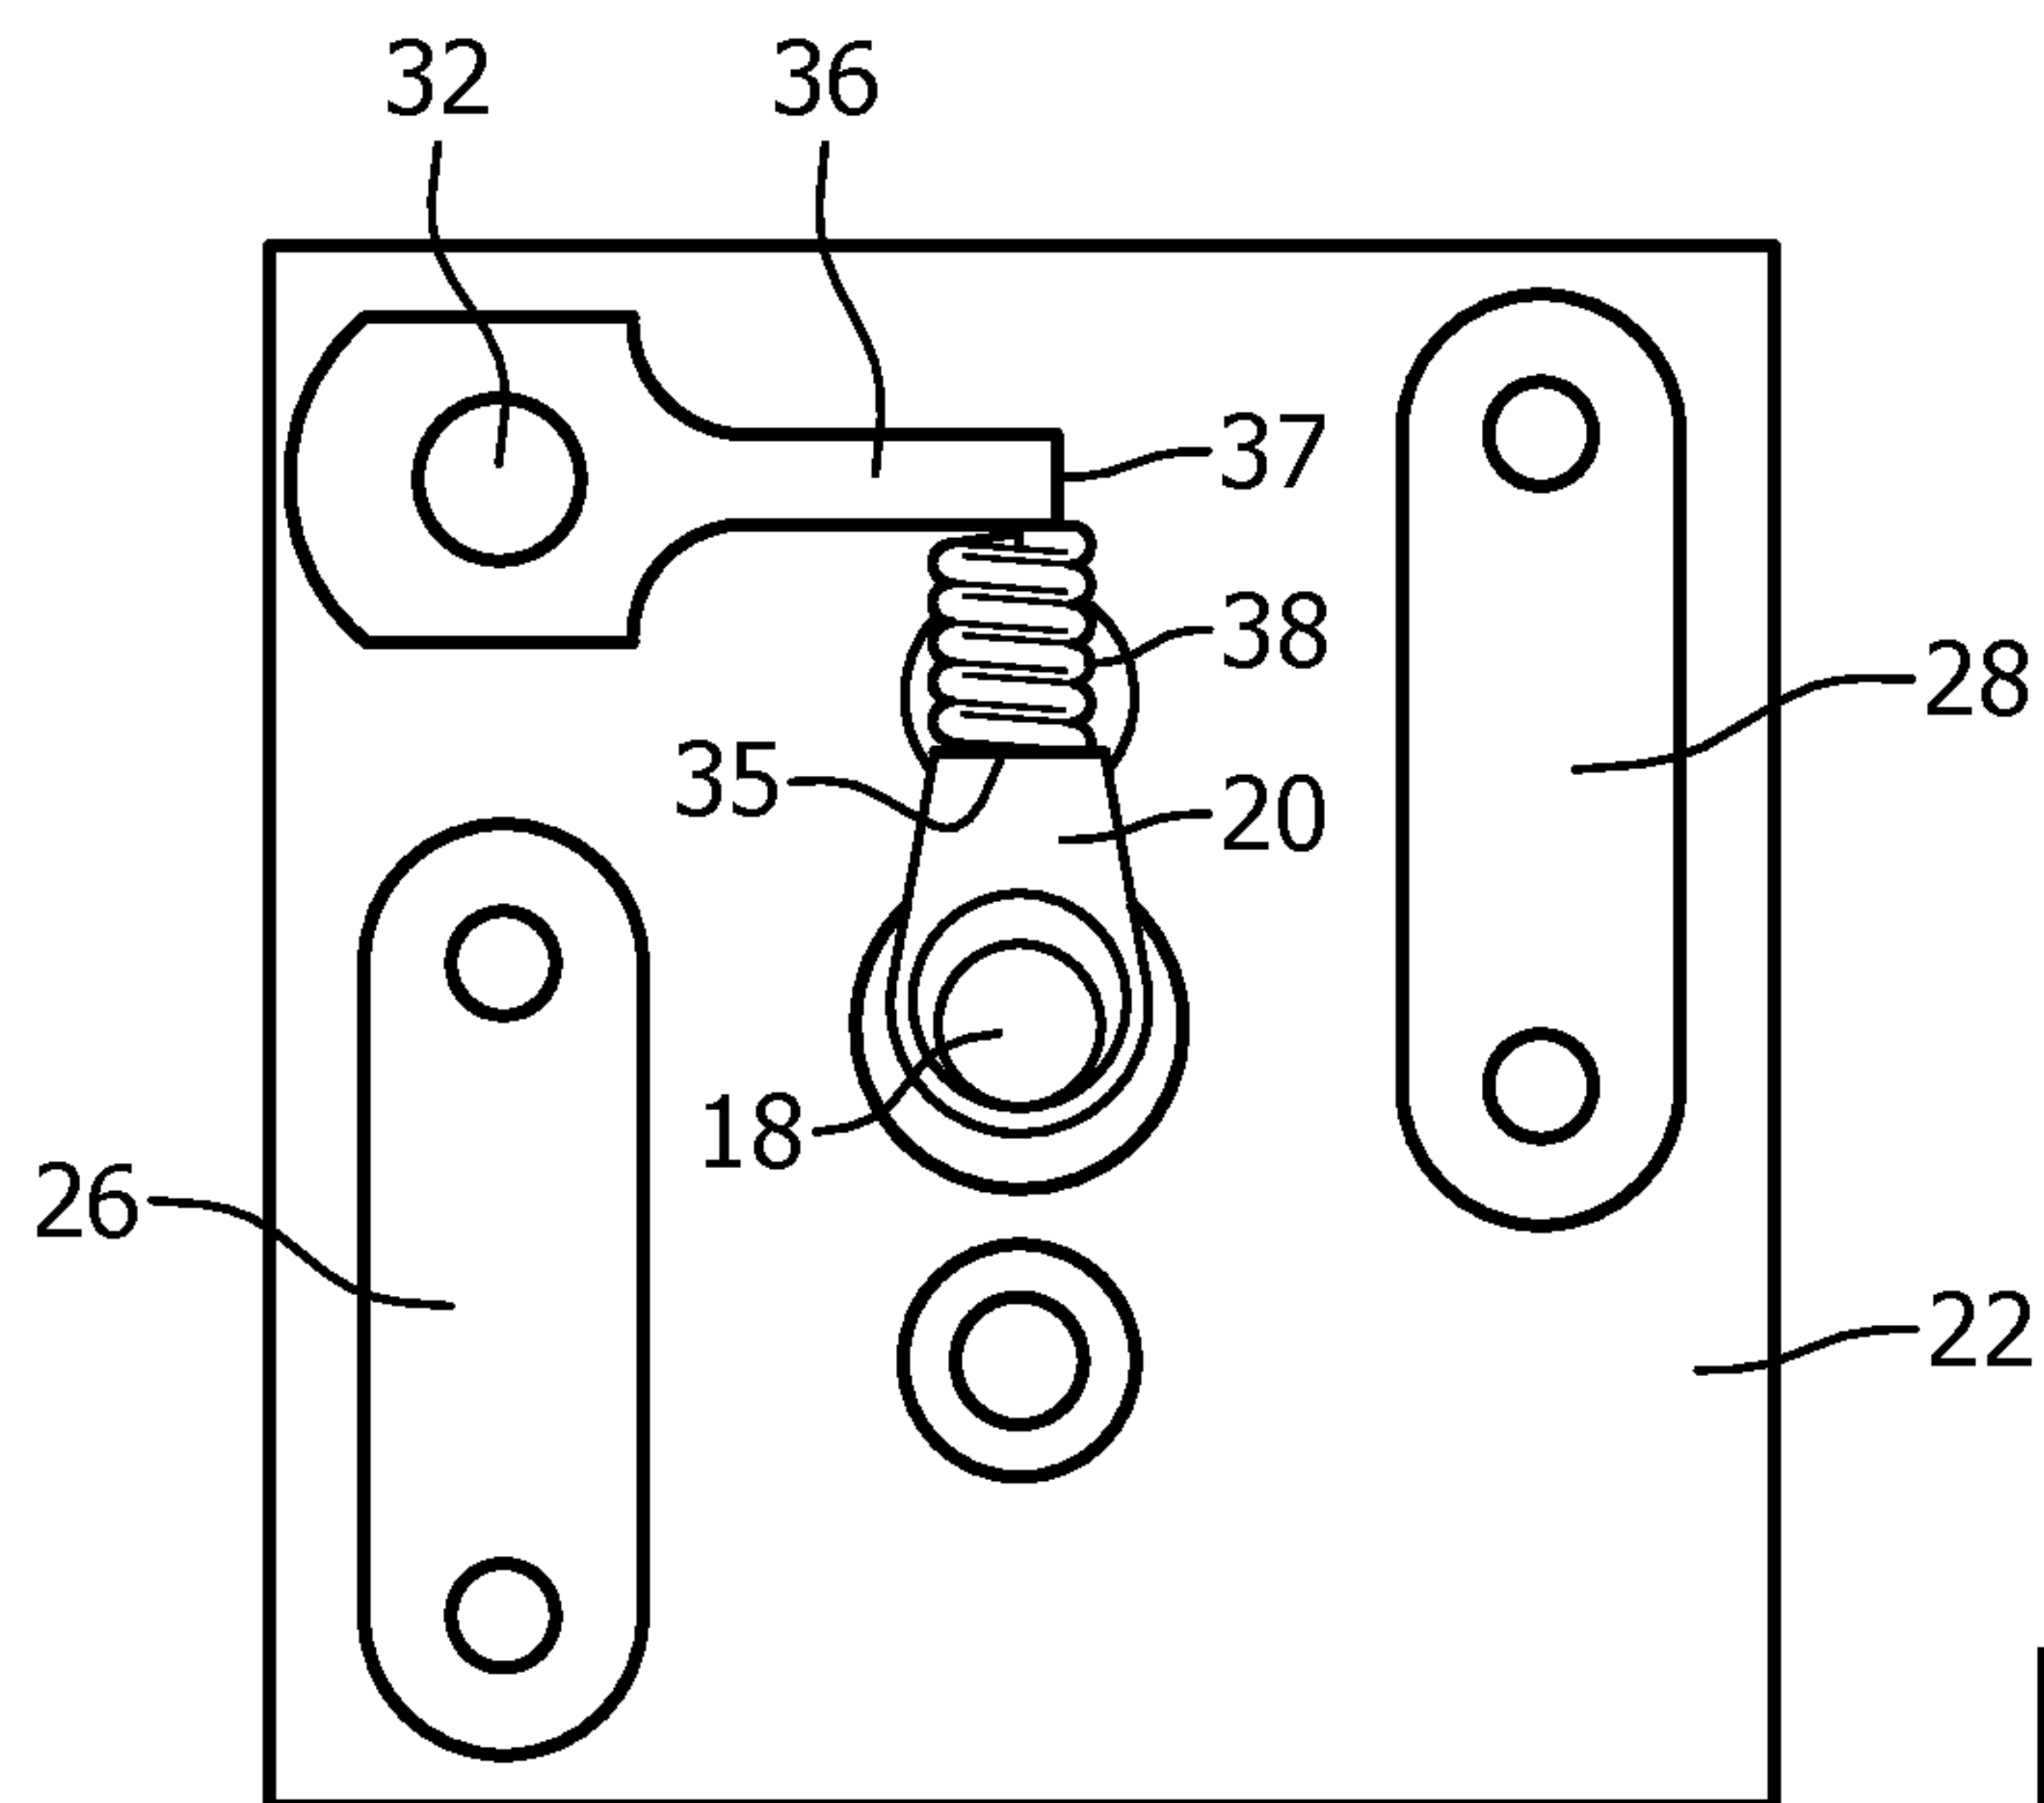


FIG. 3

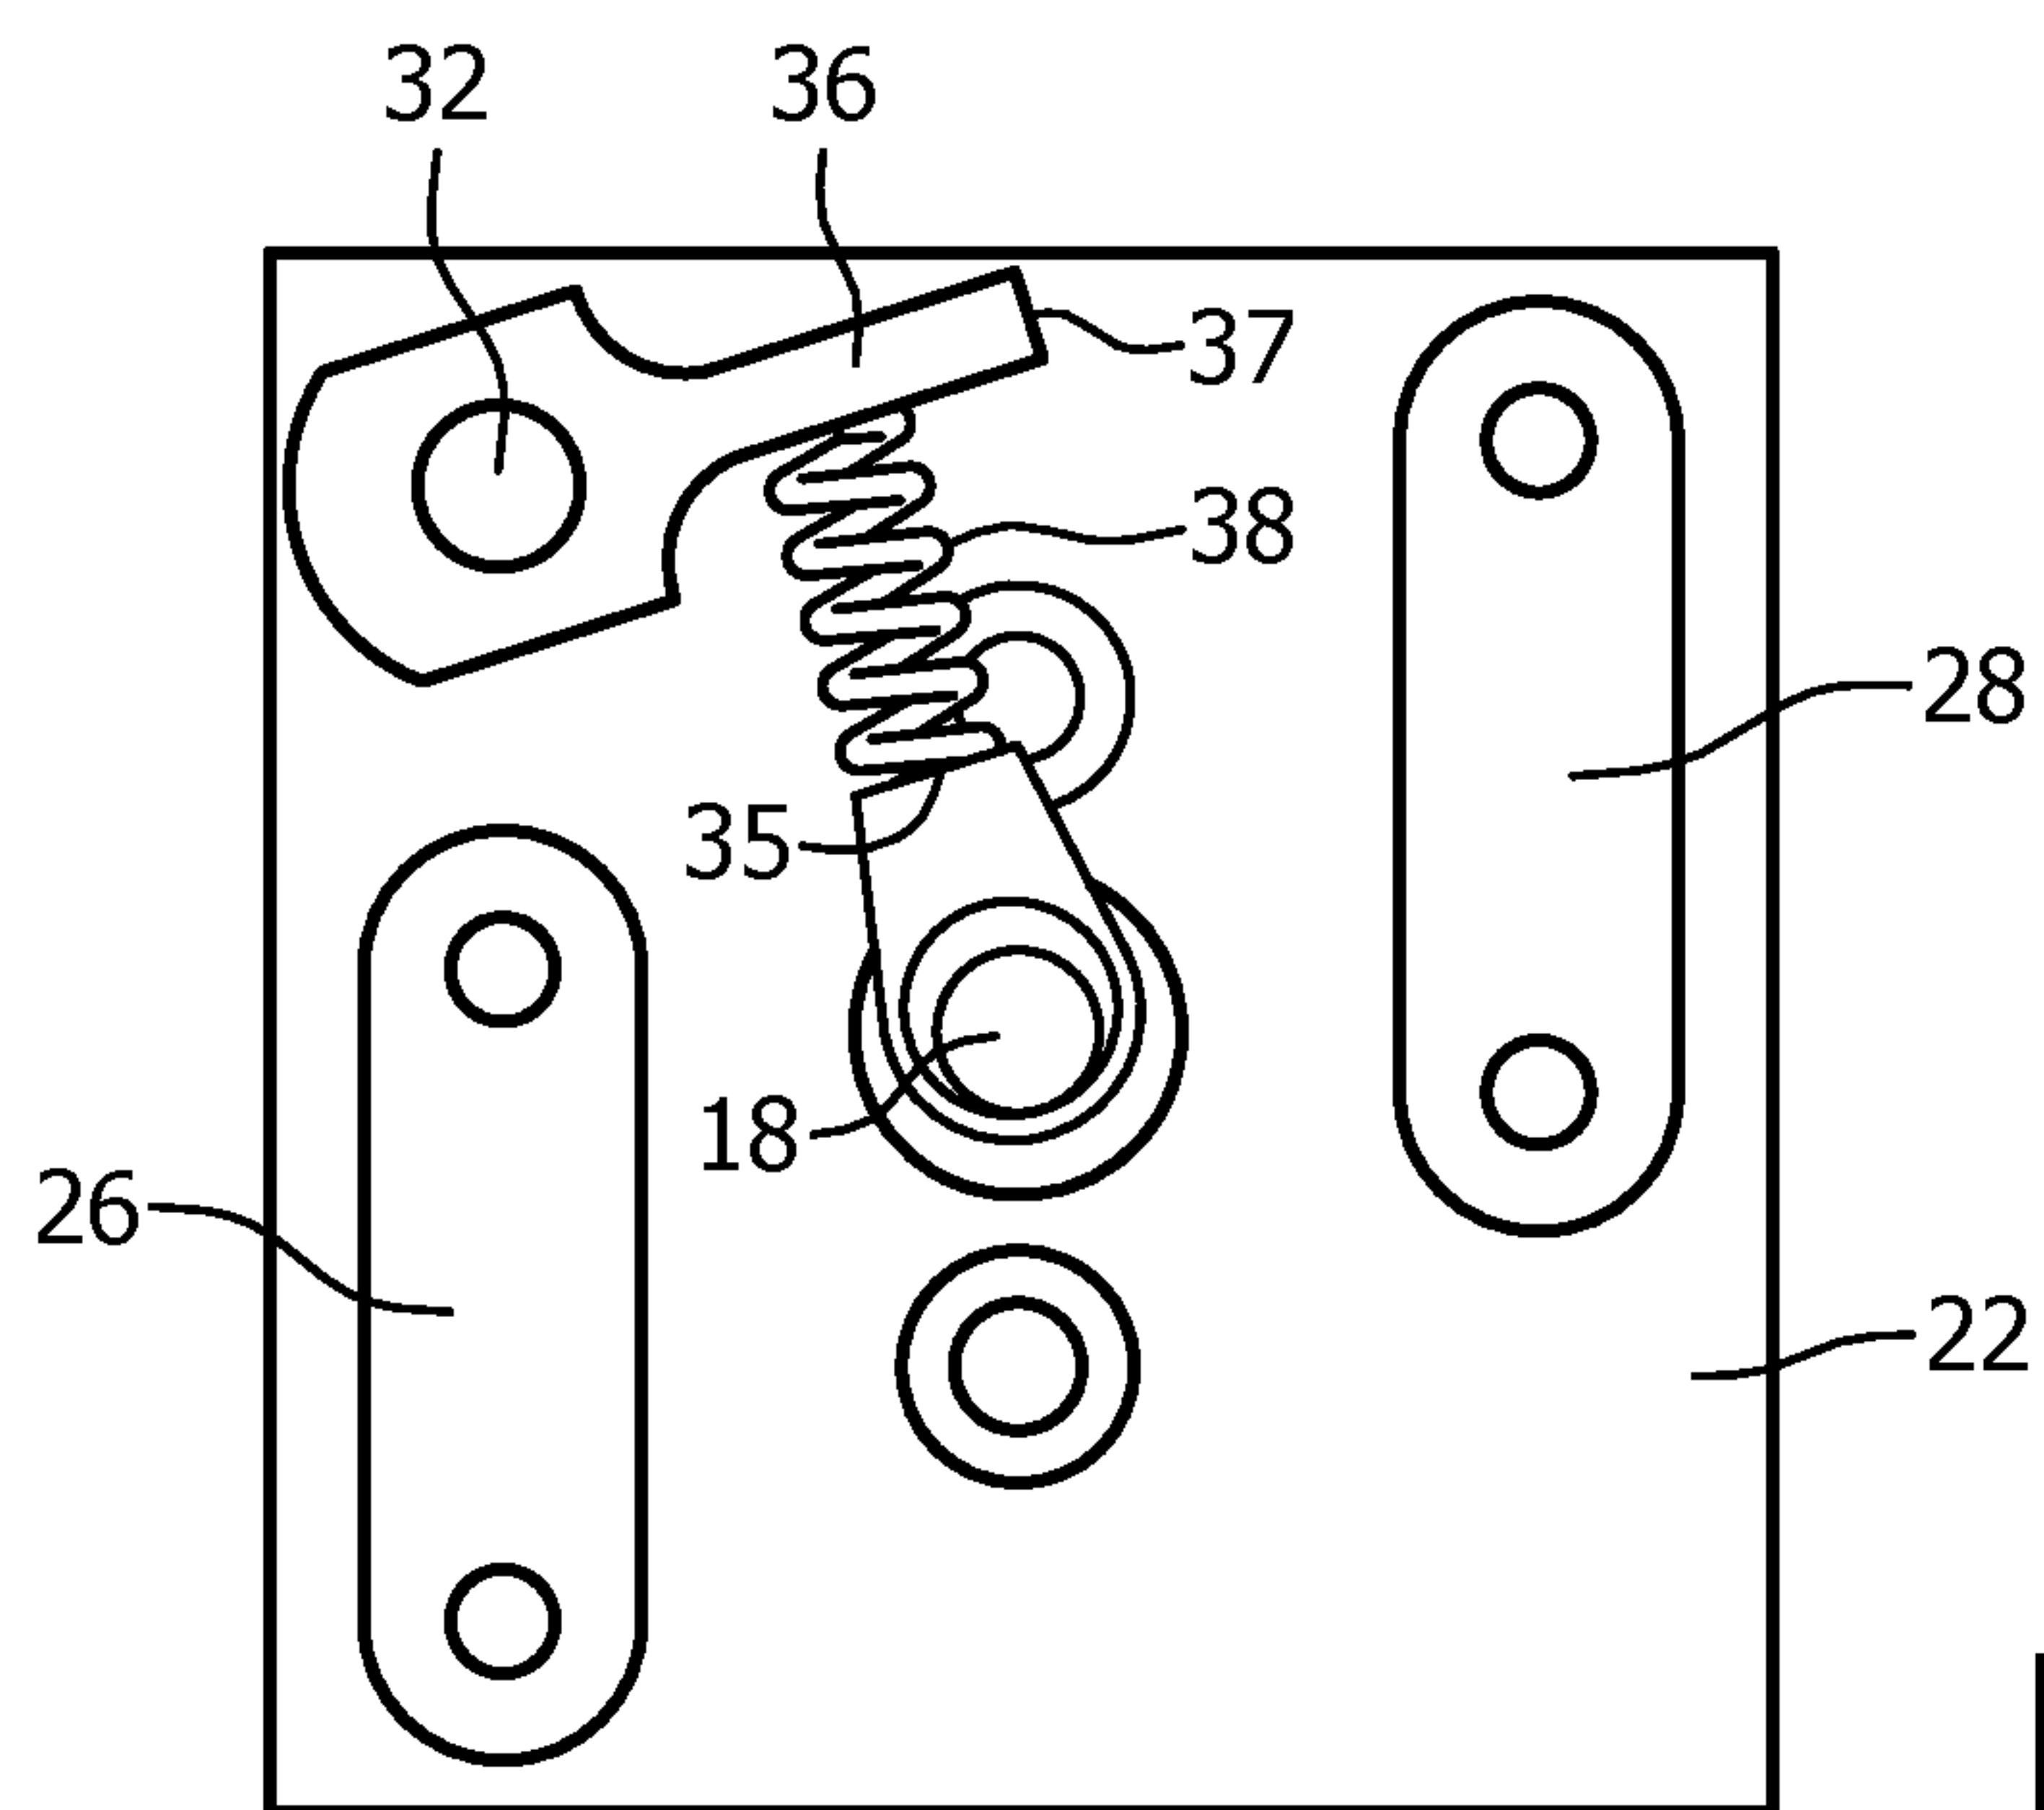


FIG. 4

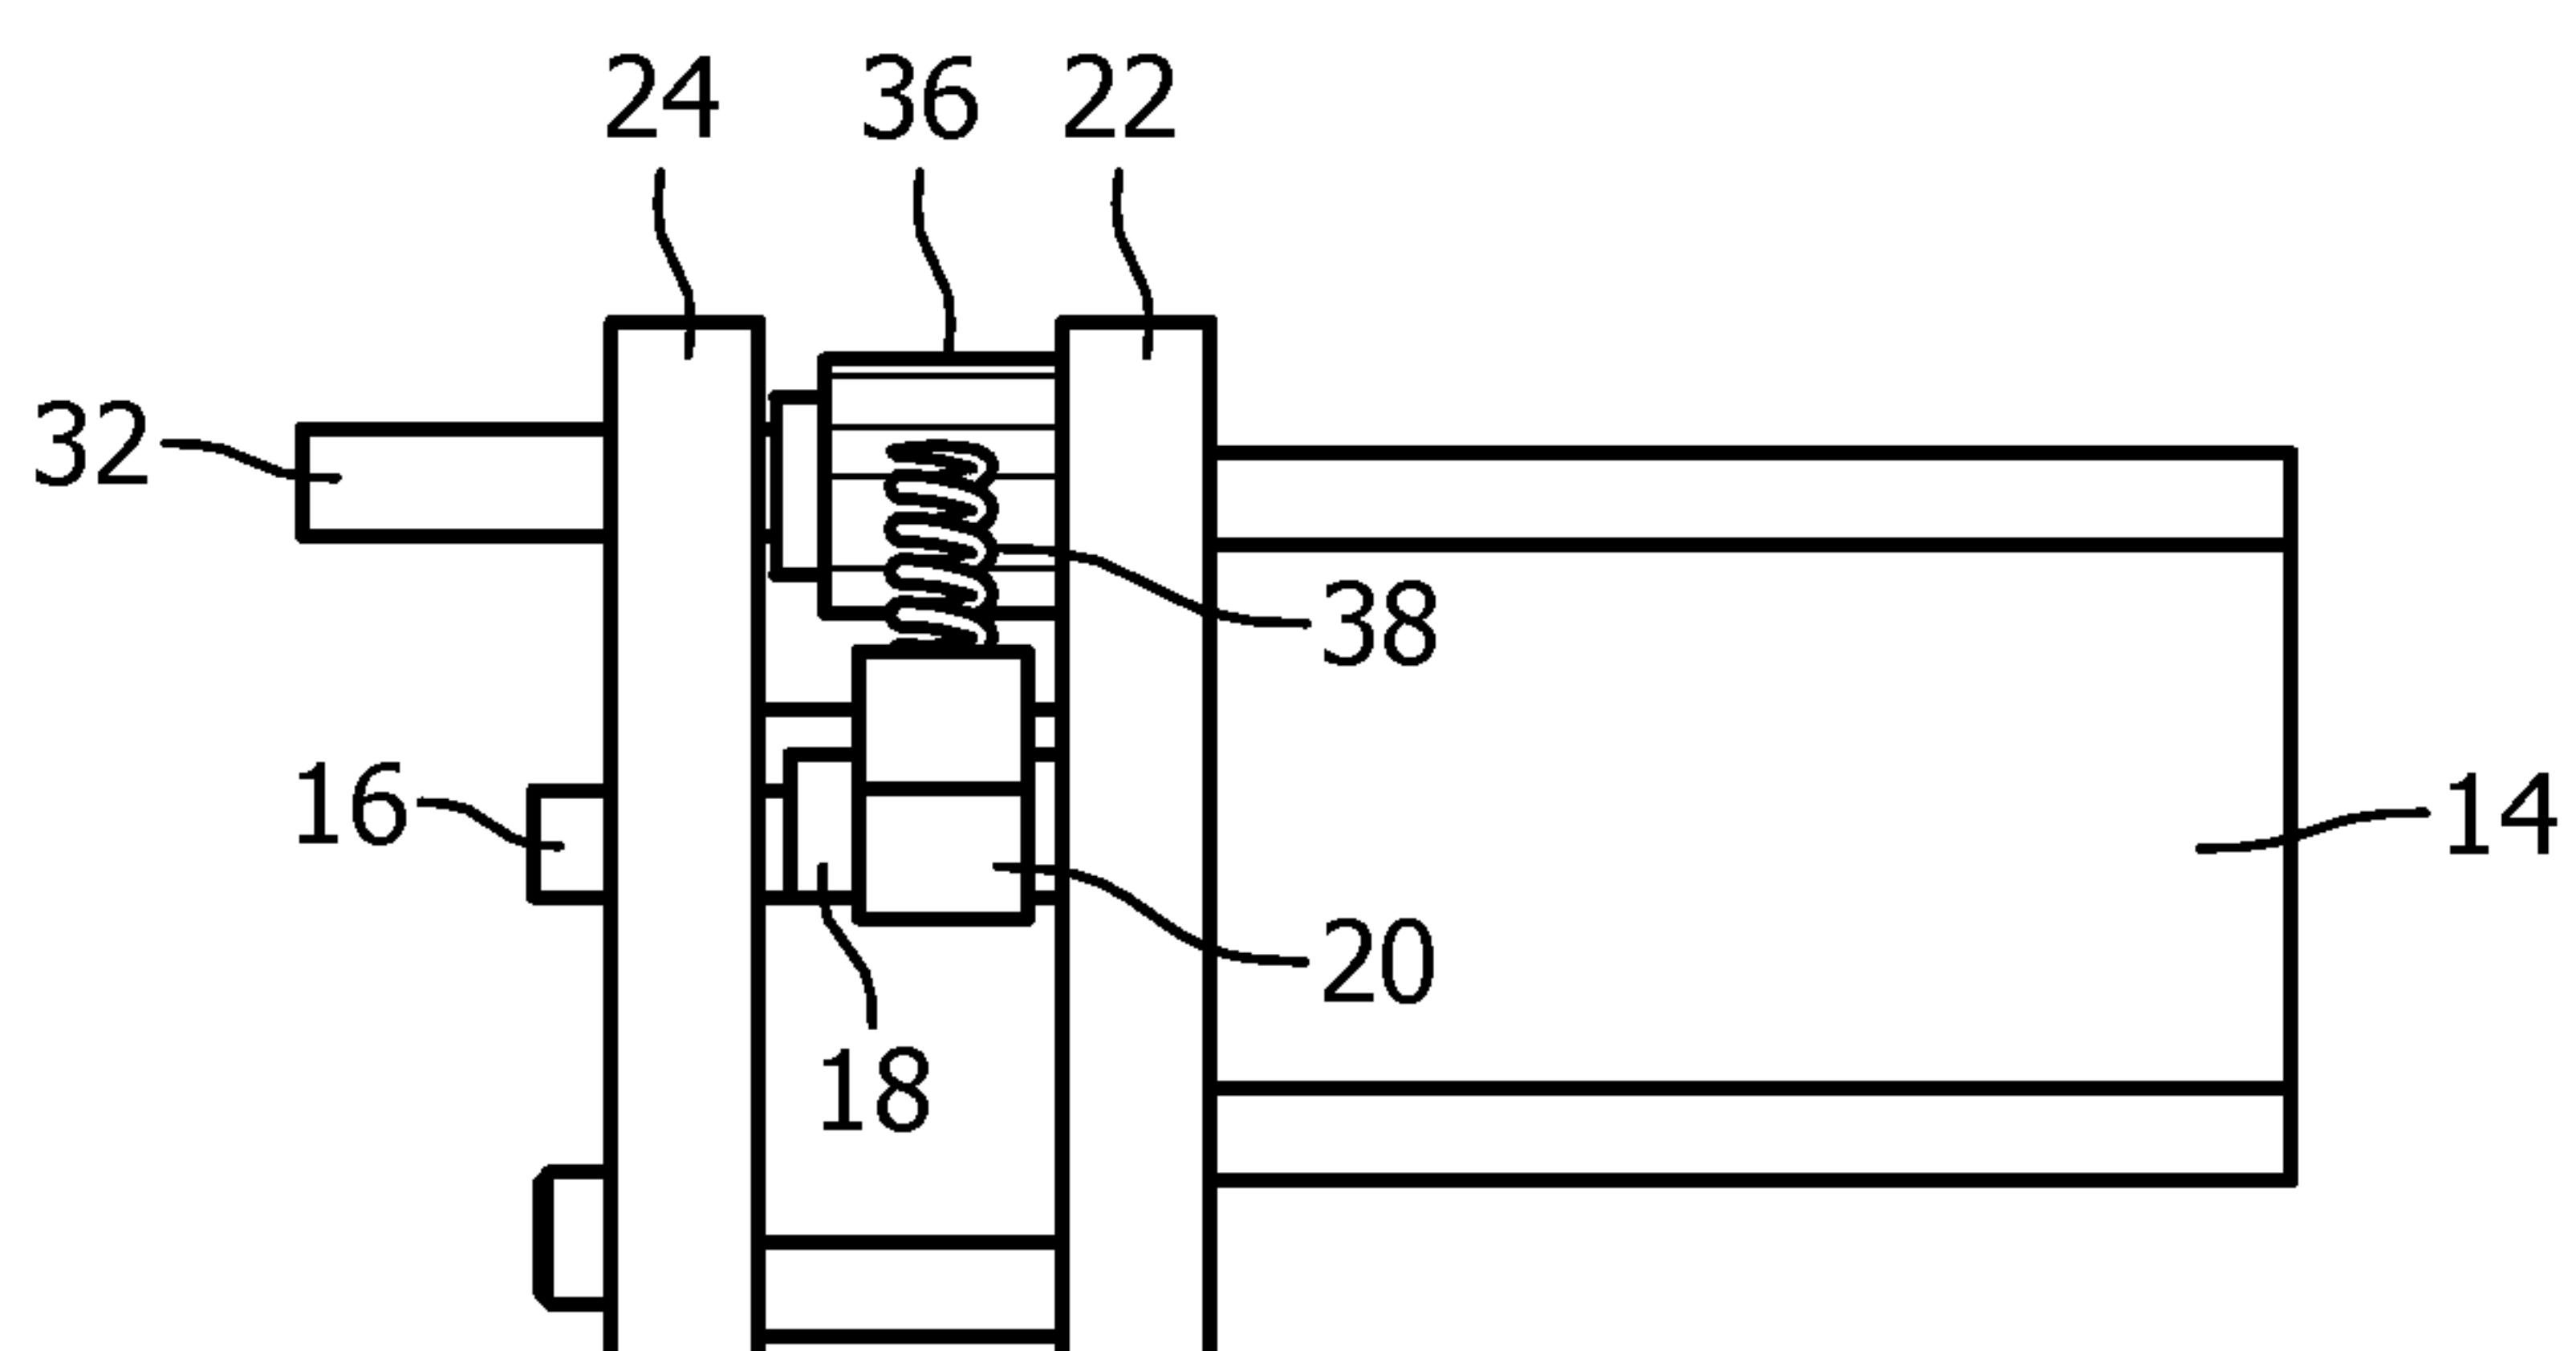


FIG. 5

4/4

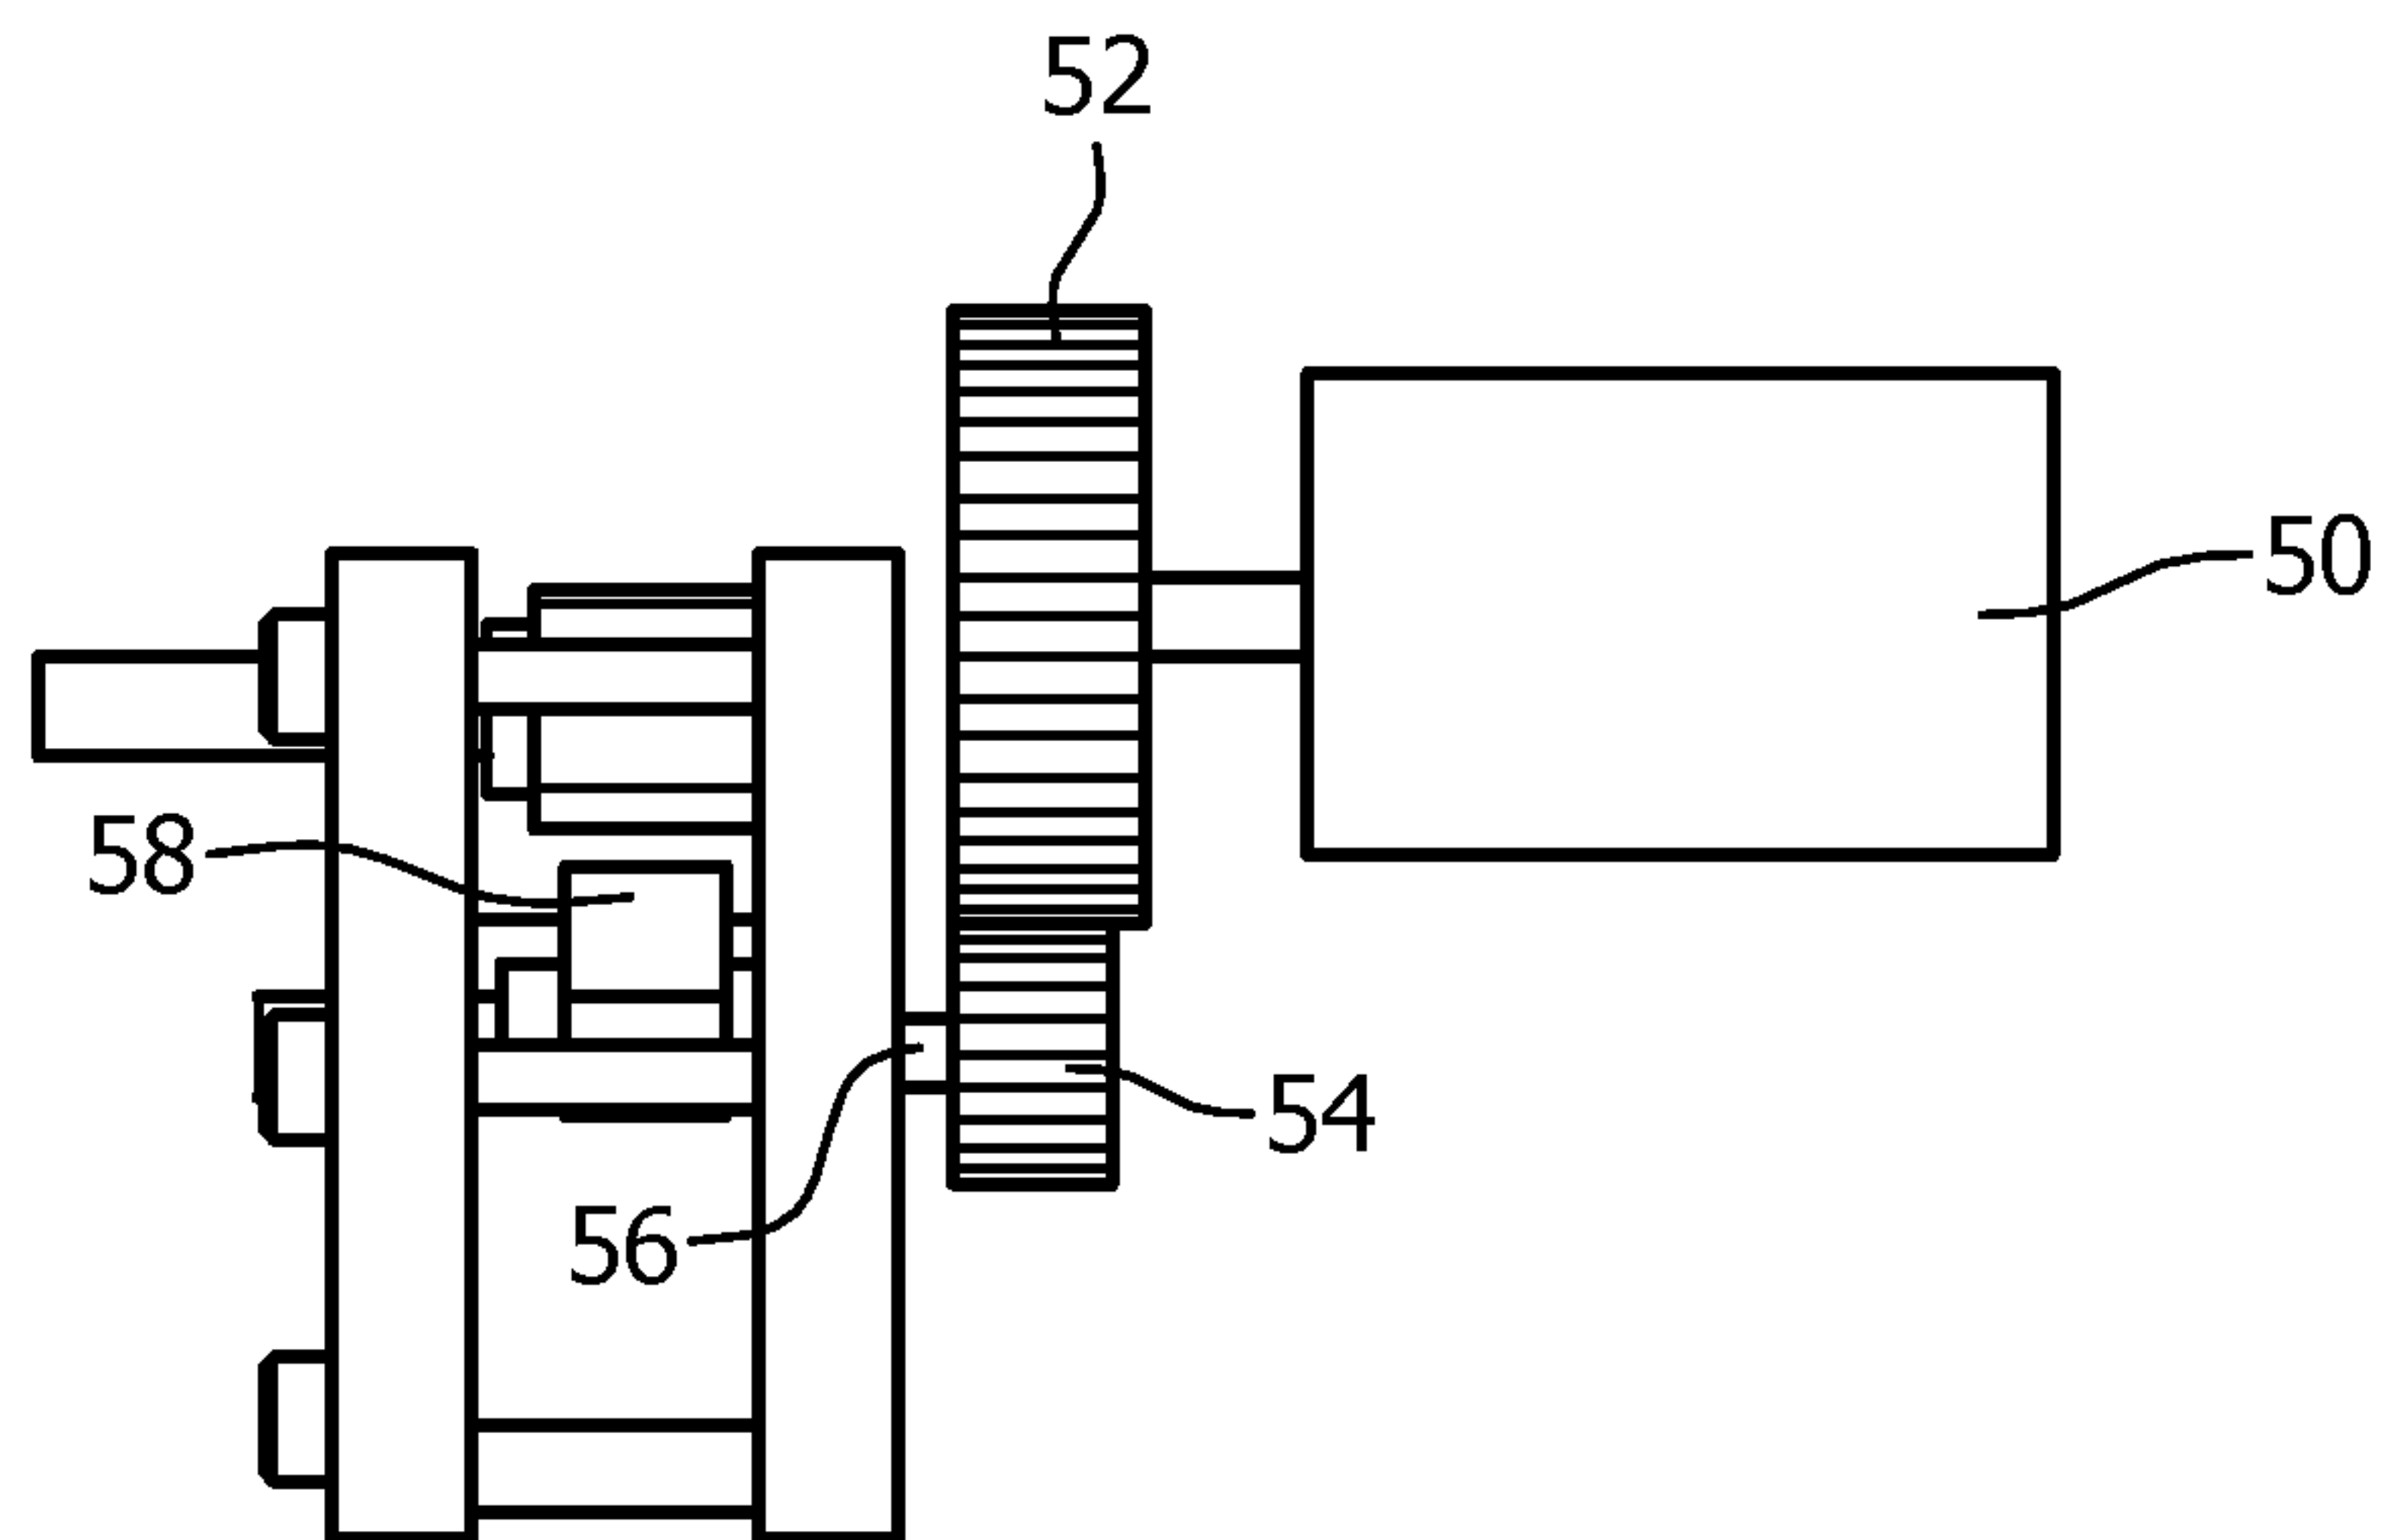


FIG. 6

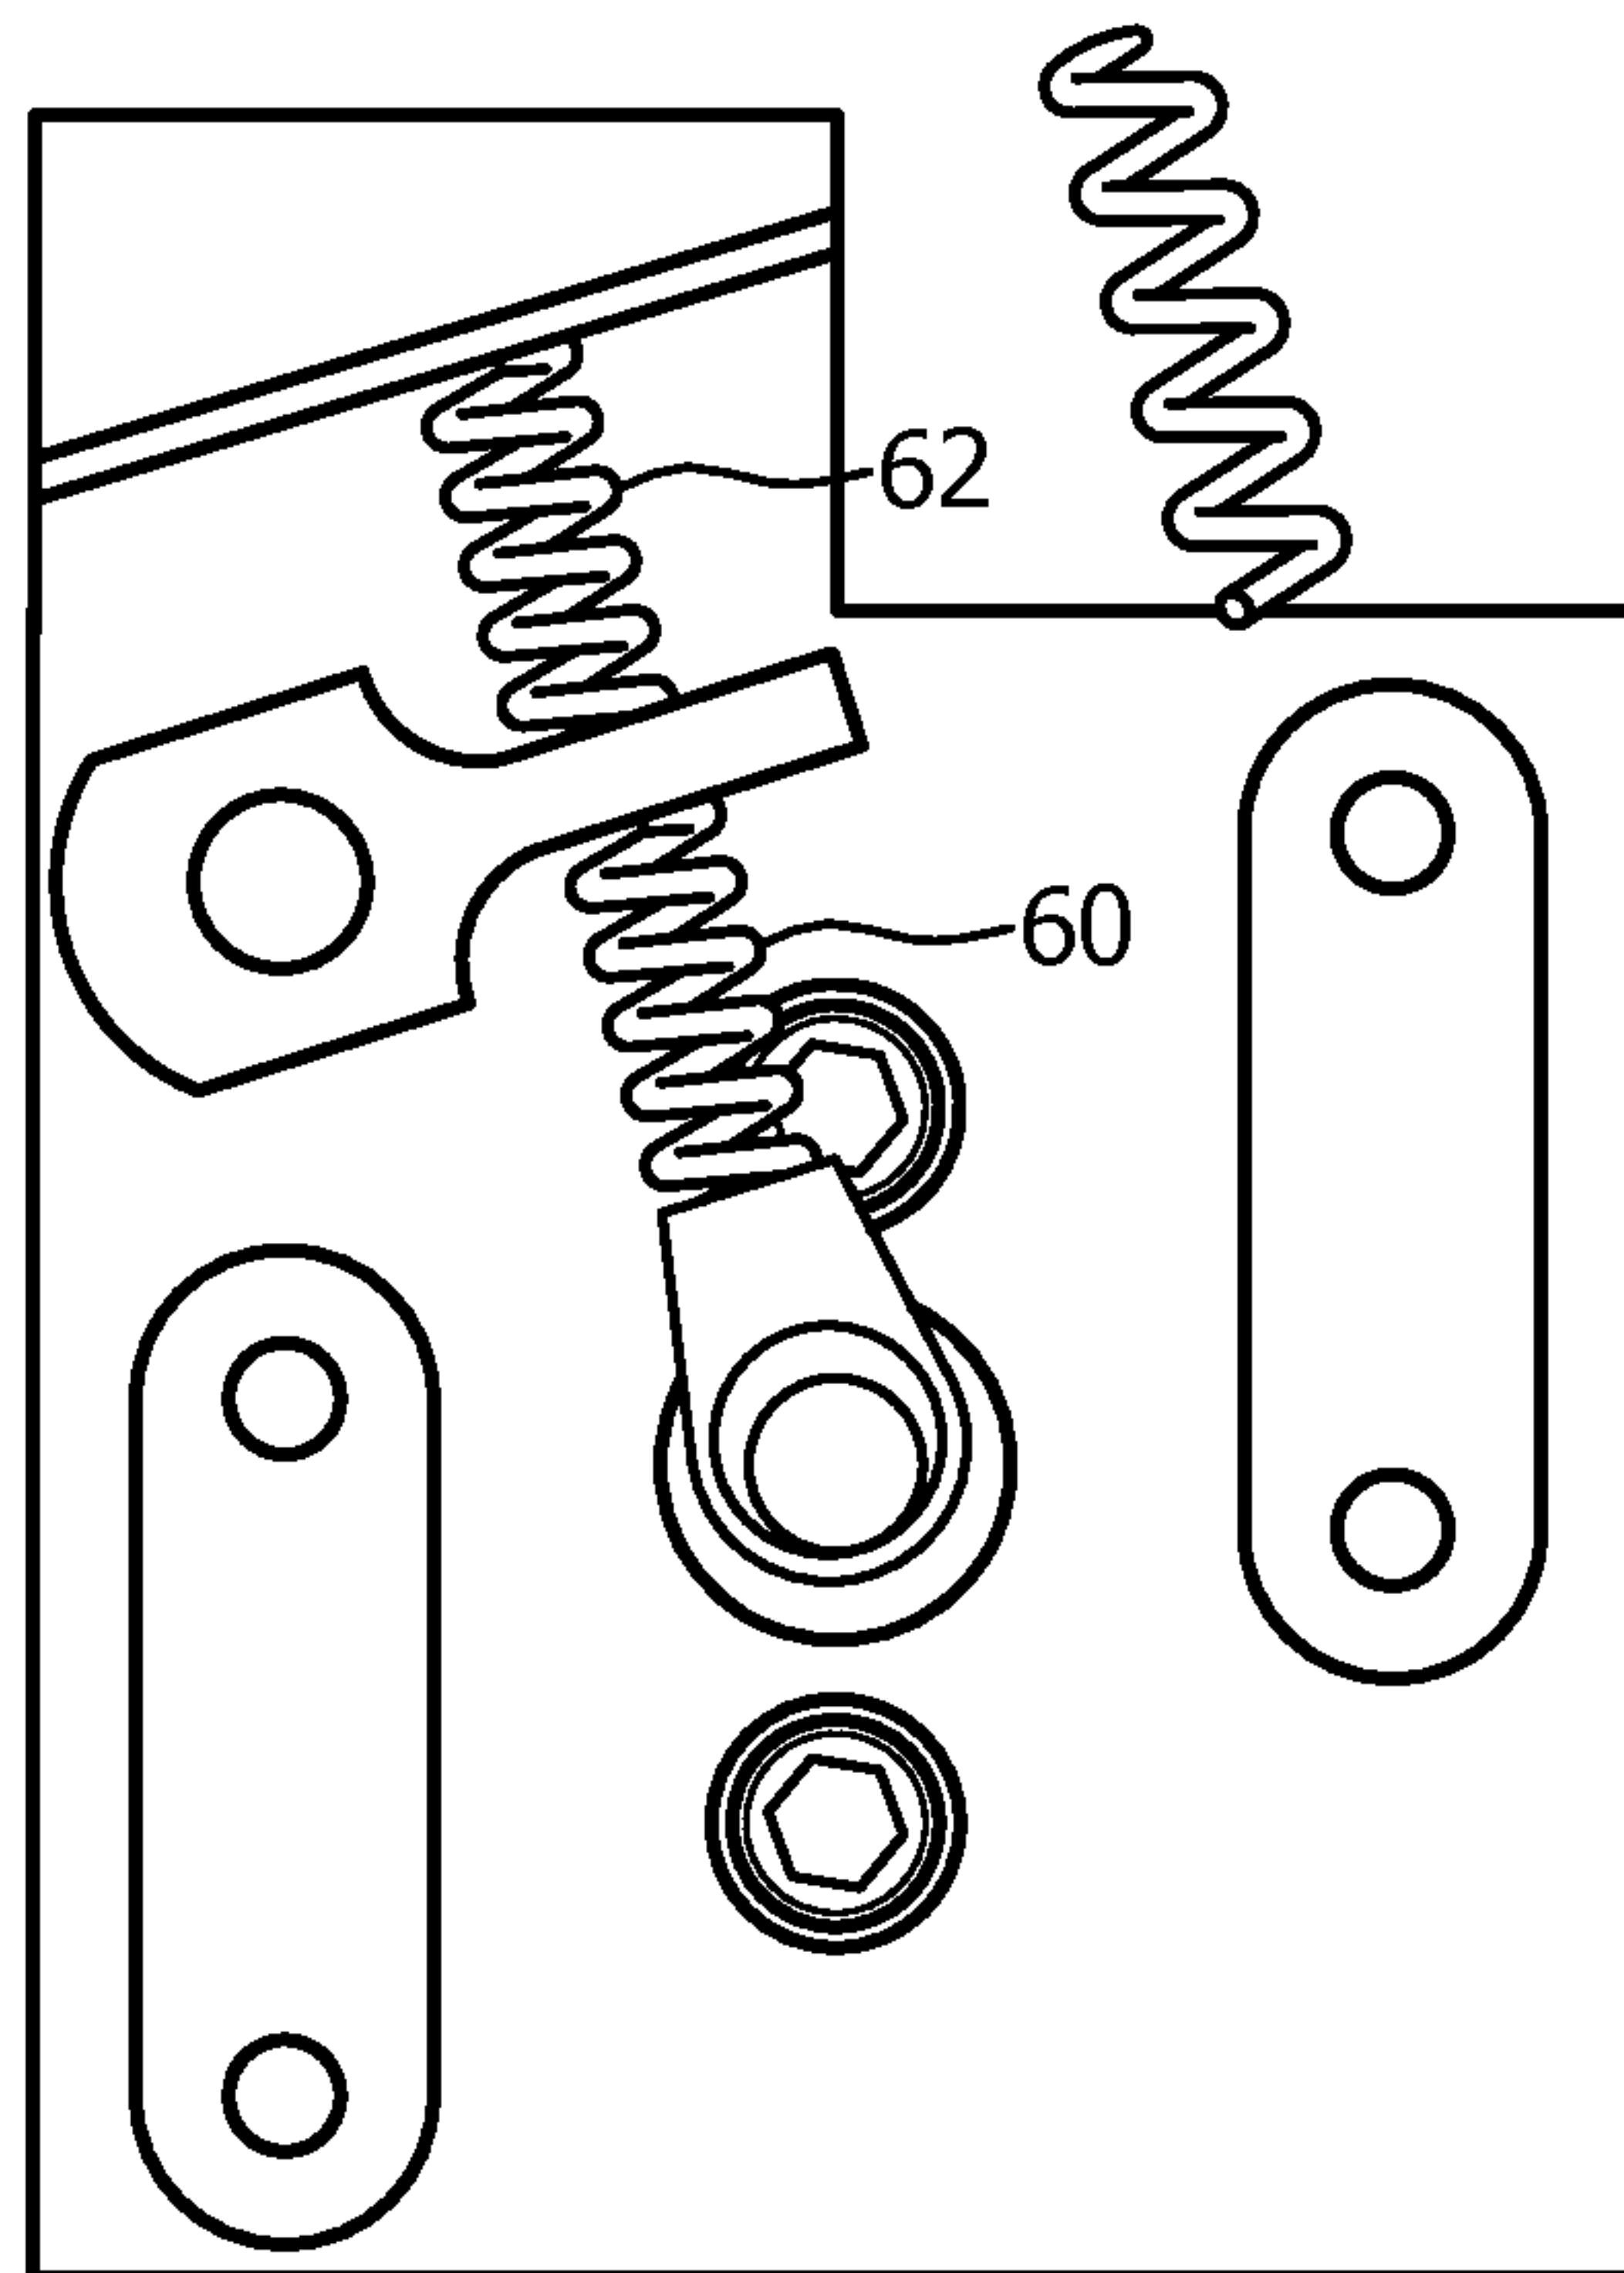


FIG. 7

