



(86) Date de dépôt PCT/PCT Filing Date: 2006/06/12

(87) Date publication PCT/PCT Publication Date: 2006/12/21

(45) Date de délivrance/Issue Date: 2014/05/13

(85) Entrée phase nationale/National Entry: 2007/12/07

(86) N° demande PCT/PCT Application No.: US 2006/022742

(87) N° publication PCT/PCT Publication No.: 2006/135851

(30) Priorités/Priorities: 2005/06/10 (US11/149,858);
2006/06/12 (US11/423,632)

(51) Cl.Int./Int.Cl. *A61F 2/80* (2006.01)

(72) Inventeurs/Inventors:

HAINES, WILBUR A., US;
COLVIN, JAMES M., US;
HAYNES, MICHAEL L., US;
KELLEY, CHRISTOPHER T., US;
FORD, MARK W., US;
GROVES, MARK W., US;
DENUNE, JEFFREY A., US


(73) Propriétaire/Owner:

THE OHIO WILLOW WOOD COMPANY, US

(74) Agent: GASTLE AND ASSOCIATES

(54) Titre : DISPOSITIF PROTHETIQUE DANS LEQUEL EST UTILISEE UNE POMPE A VIDE ELECTRIQUE

(54) Title: PROSTHETIC DEVICE UTILIZING ELECTRIC VACUUM PUMP

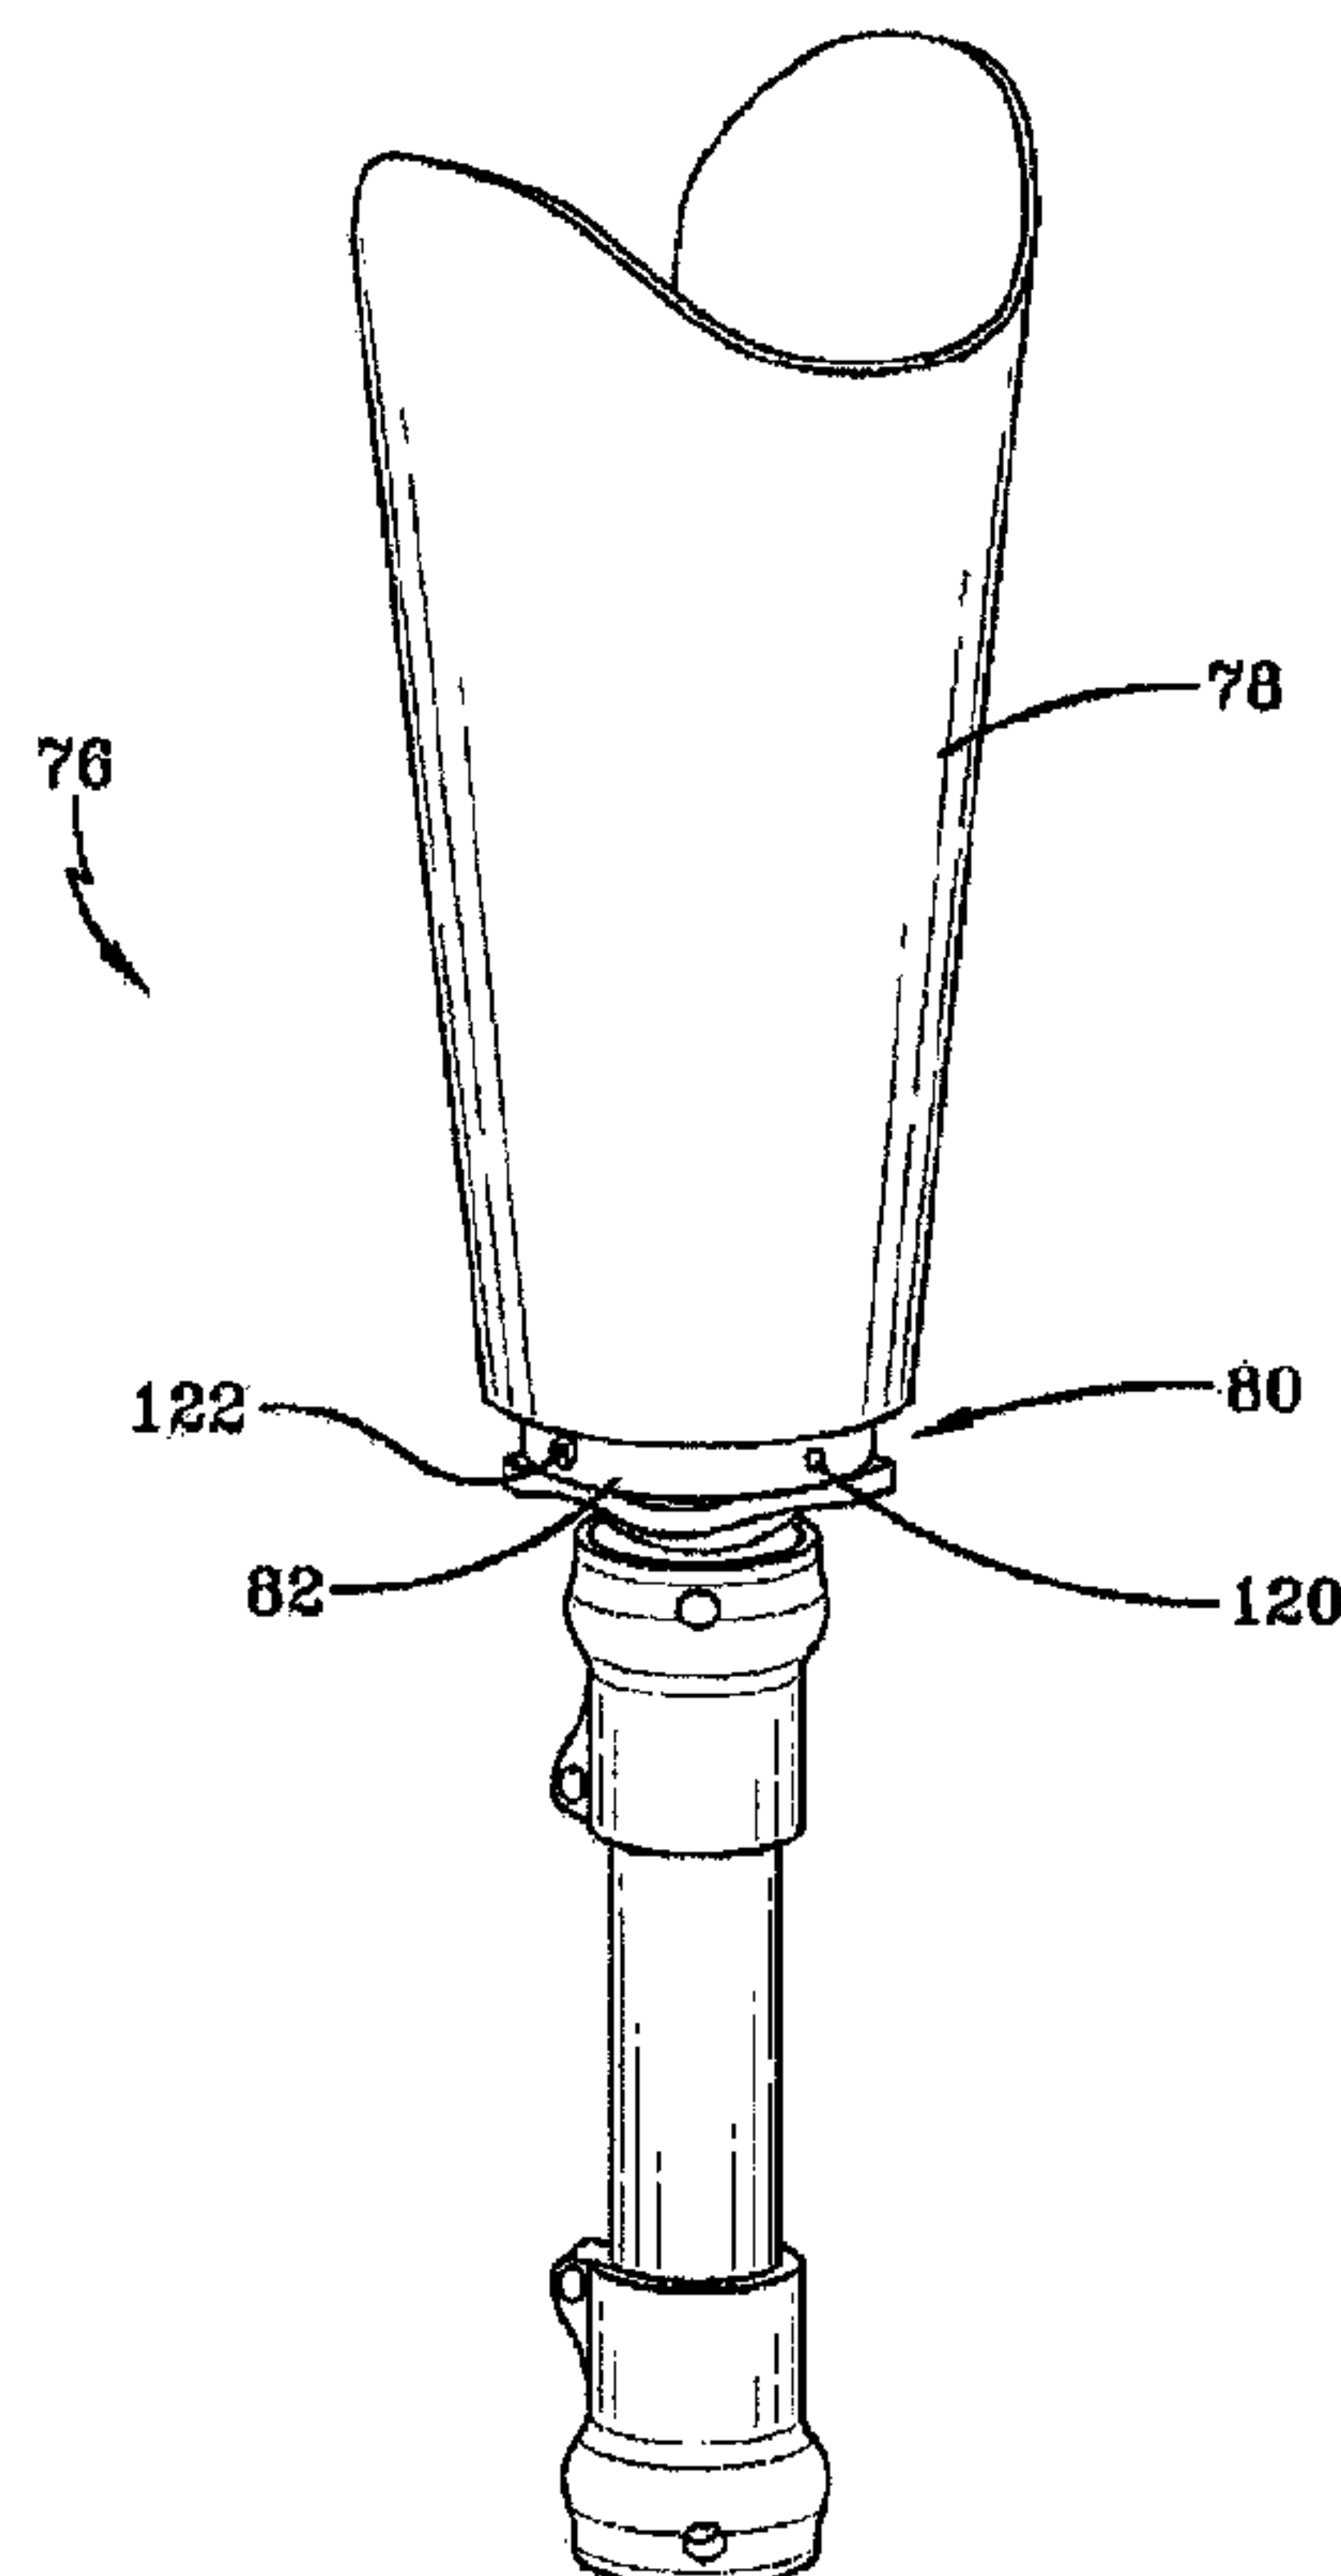

(57) Abrégé/Abstract:

Evacuation devices for evacuating the socket of a prosthetic limb, and prosthetic limb systems employing such vacuum devices. The evacuation devices each preferably include at least an electrically powered vacuum pump and a power source. Such evacuation devices can be attached at various locations on or in a prosthetic limb. Because the electrically powered pump does not require manual manipulation to create vacuum, it is substantially easier to use than a manual pump. Due to the small size and small power source required by such an electrically powered pump, an evacuation device may be readily incorporated into a prosthesis.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
21 December 2006 (21.12.2006)

PCT

(10) International Publication Number
WO 2006/135851 A3(51) International Patent Classification:
A61F 2/80 (2006.01)(21) International Application Number:
PCT/US2006/022742

(22) International Filing Date: 12 June 2006 (12.06.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/149,858 10 June 2005 (10.06.2005) US
11/423,632 12 June 2006 (12.06.2006) US(71) Applicant (for all designated States except US): **THE OHIO WILLOW WOOD COMPANY** [US/US]; 15441 SCIOTO DARBY ROAD, P.O. Box 130, Mount Sterling, OH 43143 (US).(72) Inventors: **HAINES, Wilbur, A.**; 2080 Oldfield Circle North Drive, Indianapolis, IN 46228-3354 (US).


COLVIN, James, M.; 3454 Anchorage Lane, Columbus OH 43026 (US). **HAYNES, Michael, L.**; 36 Coolidge Avenue, Columbus OH 43228 (US). **KELLEY, Christopher, T.**; 947 Palmer Road, Grandview Heights, OH 43212 (US). **FORD, Mark, W.**; 15441 Scioto Darby Road, Mount Sterling, OH 43143 (US). **GROVES, Mark, W.**; 15441 Scioto Darby Road, Mount Sterling, OH 43143 (US). **DENUNE, Jeffrey, A.**; 1245 Muman Road, Galloway, OH 43119 (US).

(74) Agent: **STANDLEY, Jeffrey, S.**; STANDLEY LAW GROUP LLP, 495 Metro Place South, Suite 210, Dublin, OH 43017-5319 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG,

[Continued on next page]

(54) Title: PROSTHETIC DEVICE UTILIZING ELECTRIC VACUUM PUMP

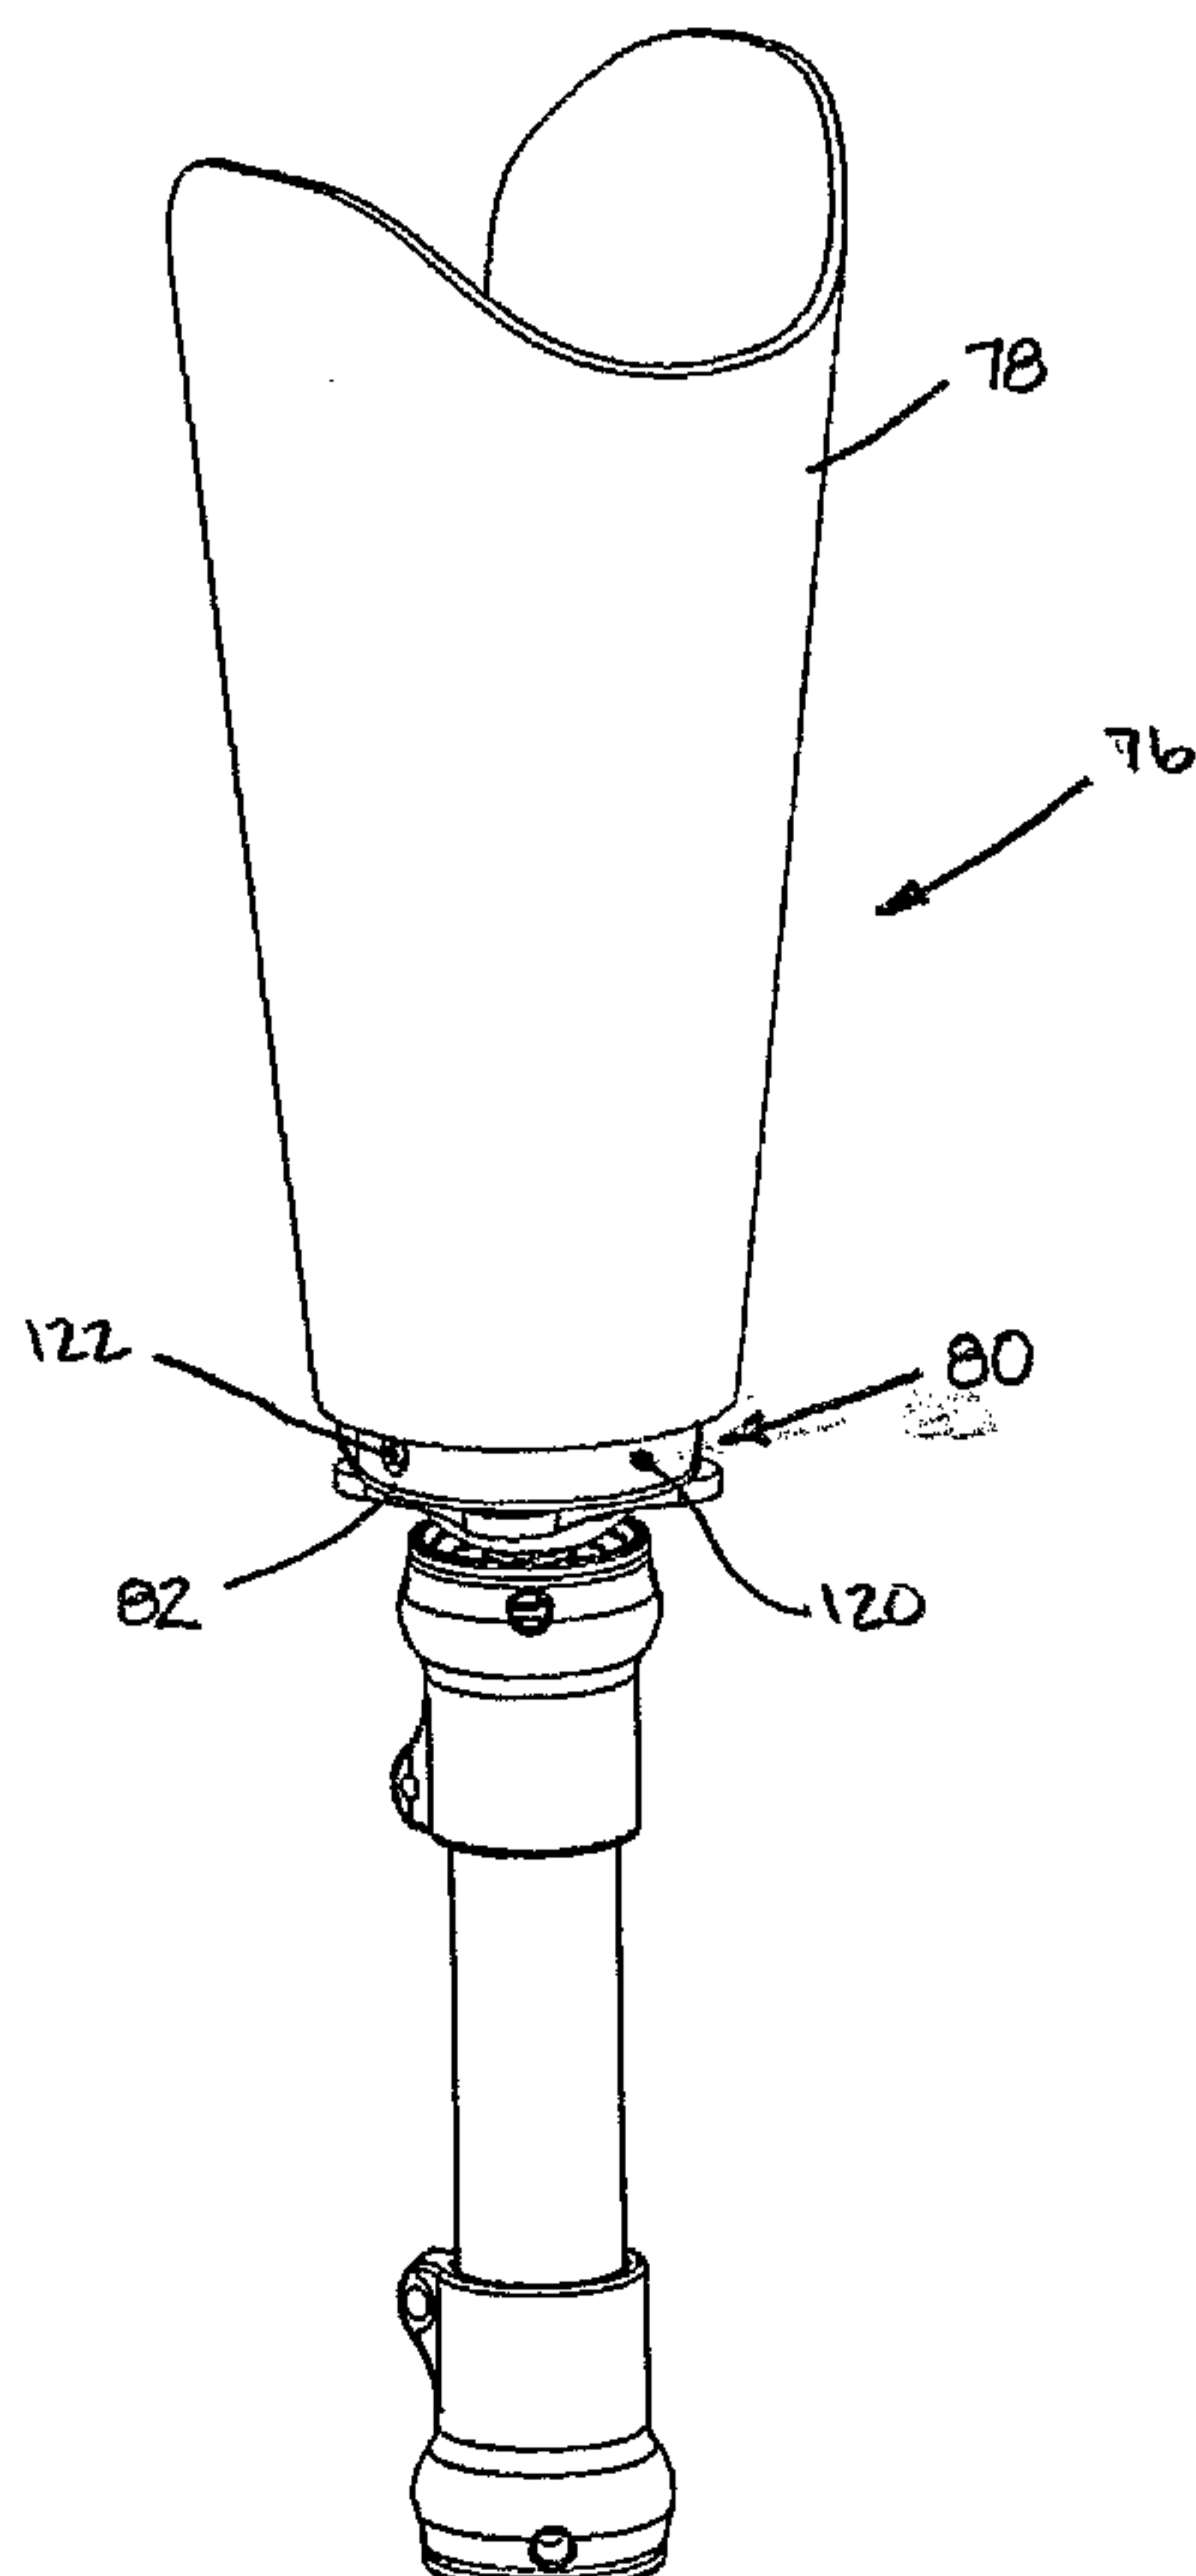

(57) Abstract: Evacuation devices for evacuating the socket of a prosthetic limb, and prosthetic limb systems employing such vacuum devices. The evacuation devices each preferably include at least an electrically powered vacuum pump and a power source. Such evacuation devices can be attached at various locations on or in a prosthetic limb. Because the electrically powered pump does not require manual manipulation to create vacuum, it is substantially easier to use than a manual pump. Due to the small size and small power source required by such an electrically powered pump, an evacuation device may be readily incorporated into a prosthesis.

WO 2006/135851 A3

WO 2006/135851 A3

SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:

1 March 2007

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PROSTHETIC DEVICE UTILIZING ELECTRIC VACUUM PUMP

BACKGROUND OF THE INVENTION

[0001] The present invention is directed to electrically-powered evacuation devices for use in evacuating a prosthetic socket and/or to prosthetic limbs incorporating such electrically-powered evacuation devices. The present invention is also directed to various systems and methods for monitoring, performing, and controlling such devices.

[0002] Artificial limbs have been in use throughout history, having been first recorded circa 2750 B.C. During that period of time, interfacing and suspending an artificial limb has been a continuing challenge. Various and numerous theories and anatomical constructs have been used over time in an evolving manner, and these have revealed a number of key factors in maximizing comfort and functional potential for persons who wear artificial limbs.

[0003] Firstly, the surgical procedure used to perform limb amputation is an important factor. The size and shaping of the patient's residual limb is often important to the comfort the patient will later have with a prosthesis. Stated simply, it is critical that the residual limb and prosthesis interface tightly

and couple and distribute pressure evenly across the surface of the residual limb.

[0004] Early versions of artificial limbs required the use of leather or equivalent straps or belts to suspend the artificial limb upon the person. Later systems employed linkage techniques such as condylar wedges, rubber or synthetic elastic tubing, thermoplastic roll-on sleeves with pin locking systems, and sub-atmospheric pressure. Of these, sub atmospheric pressure is typically often preferred, because it creates a linkage that provides maximum proprioceptive feedback and control for the artificial limb user. It also provides the best linkage between the user's limb and the prosthetic device.

[0005] Creating a reliable sub atmospheric pressure chamber between the residual limb and prosthetic device has, however, proved to be a challenge. As new airtight thermoplastic and thermo set materials have evolved, along with airtight thermoplastic roll-on liners, the potential for creating a sub-atmospheric pressure within the prosthetic chamber (socket) has improved. Specifically, the patient's residual limb is covered with a roll-on urethane or other thermoplastic liner, which helps to protect the user's tissue from unwanted isolated high negative pressure values, and provides cushioning for the tissue at the same time. The liner also helps to distribute the sub-atmospheric pressure applied to the user's limb in a more uniform manner.

[0006] Several mechanical means for creating an elevated negative pressure chamber within a prosthetic socket have emerged. One method disclosed in U.S. Patent 6,554,868, utilizes a weight activated pump, in which

sub atmospheric pressure is maintained strategically within the socket as the user walks. Under this approach, vacuum is maintained as the patient ambulates with the artificial limb.

[0007] This method of evacuating a prosthetic socket has several disadvantages, however. First, the weight activated pump is heavy, and cannot be removed even in the case of a pump failure. The weight activated pump also requires a certain minimum space between the user's limb and prosthetic foot, which may be more than is available if the patient has a relatively long residual limb. This prohibits the use of this technology for many artificial limb users. Further, a weight-activated pump system requires some number of weight activated strokes before becoming effective.

[0008] Another evacuation method disclosed in the above-referenced patent uses a hand-held sub-atmospheric pressure pump, much like that used to bleed brake systems on an automobile. This method provides for acceptable socket evacuation, but requires the individual to carry the hand-held pump upon their person for use in case of vacuum failure. The hand-held pump is also awkward for many individuals to use and requires a certain amount of dexterity and strength to operate. This is a common problem for elderly individuals.

[0009] As can be understood from the foregoing discussion, known mechanical systems for evacuating a prosthetic socket have several disadvantages. Aside from those specific disadvantages detailed above, such mechanical systems are further burdened with other general problems.

Primarily, the evacuation pump associated with such systems is active only when the user is ambulating, and then is activated with every step - regardless of the wishes of the user.

[0010] Therefore, one general disadvantage to such a mechanical systems is that the pump is unable to draw vacuum when the user is sedentary. This means that absent the carrying and use of a separate hand-held pump, there is no way to properly don an associated prosthesis without standing up and walking on the prosthesis in a partially donned (i.e., non-evacuated) state. Similarly, if the socket loses pressure while the user is sitting or otherwise non-ambulatory, there is no way (aside from a separate hand-held pump) to re-evacuate the socket other than walking or bouncing on the now improperly suspended prosthesis.

[0011] Yet another disadvantage to such mechanical evacuation systems is that a weight-activated pump will always eventually evacuate the prosthetic socket to some predetermined level. As such, there is no way for a user to adjust the level of vacuum to coincide with a particular activity or comfort level. For example, a user would not be able to increase the vacuum level over some typical vacuum level during a period of increased activity, nor decrease the vacuum level to compensate for a particularly sore or sensitive residual limb.

[0012] Thus, there is a need for improved means of achieving sub-atmospheric pressure within a prosthetic socket. The present invention satisfies this need.

SUMMARY OF THE INVENTION

[0013] The present invention overcomes the disadvantages inherent to known prosthetic socket evacuation devices using mechanical (e.g., weight-activated) pumps. Rather, the present invention is directed to socket evacuation device employing an electrically-activated pump. Because the electrically-activated pump does not require manual manipulation to create vacuum, it is substantially easier to use than a manual pump. Further, due to the compact size and minimal power consumption associated with an evacuation device of the present invention, it may be readily incorporated into/onto a prosthesis.

[0014] A device of the present invention thus affords substantial general advantages over the manual pumps and gait-driven pumps of the prior art, and the inventors are believed to be the first to present a practical approach to providing an electrically evacuated prosthetic device. The '868 patent referenced above suggests the inclusion of a generically drawn "vacuum source" and "power source", and a regulator for automatic vacuum maintenance, into an outer socket of a prosthesis (see, e.g., Figs. 7 and 9 and discuss thereof); however, there is no specific reference therein to a vacuum source or power source that is of suitable size and weight for such an application, as is provided by the inventors hereof. The present invention thus represents an advance and an enabled approach to providing an electrically actuated, portable vacuum pump in a prosthesis.

[0015] An electrically-activated evacuation device of the present invention offers additional advantages not possible with a manual or gait-driven device. For example, in addition to embodiments wherein the vacuum level is directly controlled by the user, the present invention may also possess semi-automatic or automatic vacuum level control and/or semi-automatic or automatic vacuum regulation.

[0015A] In one exemplary embodiment, there is provided a prosthetic device, comprising:

- a socket for receiving a residual limb;
- a housing adapted for attachment to said socket at a connection; a vacuum passageway for evacuation of air from said socket, the vacuum passageway extending from the socket through the connection and into the housing; and
- an evacuation device comprising an electrically powered vacuum pump and a source of electric power, said vacuum pump in communication with said vacuum passageway; wherein said vacuum pump is activated to evacuate said socket by drawing air therefrom while said residual limb is located within said socket.

[0015B] In another exemplary embodiment, there is provided a prosthetic device, comprising

- a socket for receiving a residual limb;
- a pylon extending from said socket at a connection therebetween;
- a vacuum passage extending from the pylon through the connection and into said socket for evacuation of air therefrom;

WO 2006/135851

PCT/US2006/022742

an electrically powered vacuum pump in communication with said vacuum passage , and

an electric power source connected to said vacuum pump;

wherein said vacuum pump is activated to evacuate said socket by drawing air therefrom while said residual limb is located within said socket.

[0015C] In yet another exemplary embodiment, there is provided a prosthetic device having a distally-located vacuum passage, comprising:

a distal adapter for installation into an interior distal end of the prosthetic socket;

a vacuum passage in the distal adapter, the vacuum passage allowing for the evacuation of air from an interior of the prosthetic socket and through the distal adapter after the distal adapter is installed thereto;

an evacuation device comprising at least an electrically powered vacuum pump contained within a housing, the housing configured for coupling to a bottom surface of the distal adapter with a bottom wall of the prosthetic socket trapped therebetween;

a power source in communication with the vacuum pump; and

a vacuum passage through the evacuation device housing, the vacuum passage in the evacuation device housing aligned with the vacuum passage in the distal adapter when the evacuation device is properly coupled thereto, and wherein, after coupling to the distal adapter, the vacuum pump of the evacuation device is operable to evacuate air from an interior of the prosthetic socket by drawing air therefrom through a passageway formed by the vacuum

passage in the distal adapter, a vacuum passage in the prosthetic socket, and the vacuum passage in the evacuation device housing.

[0016] The above and other objects and advantages of the present invention shall be made apparent from the accompanying drawings and the description thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] In addition to the features mentioned above, other aspects of the present invention will be readily apparent from the following descriptions of the drawings and exemplary embodiments, wherein like reference numerals across the several views refer to identical or equivalent features, and wherein:

[0018] Fig. 1 illustrates a prosthetic limb incorporating an electric vacuum pump according to one embodiment of the present invention;

[0019] Figure 2 is a disassembled view of the prosthetic limb of Fig. 1, illustrating internal components thereof;

[0020] Figure 3 is a cutaway view of the prosthetic limb of Fig. 1 showing the internal components as positioned when the limb is in use;

[0021] Figs. 4A and 4B are cutaway views of the prosthetic limb of Fig. 1 showing its use in creating vacuum engagement of a limb with a socket;

[0022] Fig. 5 illustrates another embodiment of the present invention, in which the electric pump and power source are housed in a separate portable evacuation device;

[0023] Fig. 6 depicts another embodiment of the present invention, wherein the electric pump and power source are placed into a sleeve that is subsequently installed into a pylon;

[0024] Fig. 7 illustrates a prosthetic limb employing another embodiment of the present invention, wherein an evacuation device includes a vacuum pump and power source that are located within a housing designed for attachment to a universal distal adapter that is built into the distal end of a prosthetic socket;

[0025] Fig. 8 is a plan view into the socket of the prosthetic limb of Fig. 7, wherein a portion of the universal distal adapter and a portion of the housing are visible;

[0026] Fig. 9 is a section view of a portion of the prosthetic limb of Figure 7, taken along line C-C of Fig. 8;

[0027] Fig. 10A is an enlarged view of the detailed area called out in Fig. 9;

[0028] Fig. 10B is a bottom plan view of the universal distal adapter;

[0029] Fig. 11 is a section view of a portion of the prosthetic limb of Figure 7, taken along line D-D of Fig. 8;

[0030] Fig. 12 is an enlarged view of the detailed area called out in Fig. 11;

[0031] Fig. 13 depicts another embodiment of the present invention, wherein an evacuation device includes a vacuum pump and power source located within a housing that is mounted around the pylon of a prosthetic limb;

[0032] Fig. 14A shows another embodiment of the present invention, wherein an evacuation device includes a vacuum pump and power source located in a housing that is attached to an adapter integrated into a side wall of a prosthetic socket;

[0033] Fig. 14B shows another embodiment of the present invention, wherein an evacuation device includes a vacuum pump and power source located in a chamber that is integral to and protrudes from the side wall of a prosthetic socket;

[0034] Fig. 15 illustrates another embodiment of the present invention, wherein an evacuation device includes a vacuum pump and power source located in a housing that is positioned within an exoskeletal prosthetic device;

[0035] Fig. 16 depicts another embodiment of the present invention, wherein an evacuation device includes a vacuum pump and power source located in a housing that is affixed to a mounting plate designed to be mounted between adjacent components of a prosthetic limb;

[0036] Fig. 17 shows another embodiment of the present invention wherein an evacuation device includes a vacuum pump and power source located in a prosthetic foot or within a housing that is positioned in a prosthetic foot;

[0037] Fig. 18 illustrates another embodiment of the present invention, wherein an evacuation device includes a vacuum pump and power source

located within a housing that is located on the user's person and provided to evacuate the socket of a prosthetic limb;

[0038] Fig. 19 depicts yet another embodiment of the present invention, wherein a manifold connects a vacuum source to the interior of a prosthetic socket; and

[0039] Fig. 20 shows a magnetic switch that can be used to initiate the energizing of a vacuum pump in any embodiment of the present invention.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENT(S)

[0040] Fig. 1 illustrates one embodiment of a prosthesis **10** in accordance with principles of the present invention. The prosthesis includes a socket **12** for receiving an amputee's residual limb, a column (pylon) **14**, which is typically a cylindrical section of lightweight metal such as aluminum, and an artificial foot **17**. As can be seen in Fig. 1, the pylon **14** includes a vacuum actuator button **16** used to actuate an electric vacuum pump within the pylon that draws air from the socket **12** and, as a result, draws the residual limb into intimate contact with the interior of the socket **12**.

[0041] Fig. 2 illustrates the prosthesis of Fig. 1 in a disassembled state to show the component parts within the pylon **14**. Internal to the pylon **14** is a power source **20**, such as a capacitor or a conventional 9-volt battery, a vacuum pump **22**, and electrical lines **24** for delivering electrical power from power source **20** to vacuum pump **22**, and vacuum line **26** for drawing vacuum from socket **12** through a check valve **27**. The power source **20**,

vacuum pump **22**, electrical lines **24**, vacuum line **26** and check valve **27** components are inserted into the pylon **14** after insertion of a ribbon **28**, so that the ribbon **28** may be subsequently used to extract the components (e.g., for changing or recharging the power source **20**).

[0042] One suitable type of vacuum pump for use in the present invention is the model VMP 1624 Series of vacuum pumps, available from Virtual Industries, Inc., 2130 Vector Place, Colorado Springs Colorado. A specific model that has been found to be particularly suitable for application as shown herein is model 1624-009-S. This family of pumps is capable of drawing vacuum up to 18 inches of mercury (-594 millibar), which is sufficient for use in a prosthesis. The pump flow rate is as large as 1300 mm per minute. The voltage for the specific model identified above is 9 volts, permitting use of the pump with a conventional disposable or rechargeable 9-volt battery. A rechargeable 8 volt lithium ion polymer battery (model LIPBA-300-8, rated at 300mAh/8v) available from OPRA-TECH Engineering in Warren, Ohio may also be used.

[0043] Another line of pumps suitable for use in any embodiment of the present invention are available from the Oken Seiko Co., Ltd. in Tokyo, Japan. One particular pump model that has shown itself acceptable in this regard is model S02R6331, which can operate on between 1.5-3.0 volts. Consequently, such a pump may be powered by a small capacitor, 1-2, 1.5v AAA disposable or rechargeable batteries, or any other acceptable standard batteries.

[0044] Therefore, it can be seen that electrically-powered vacuum pumps are available having a size and weight that permits their installation on or within the pylon **14**, a housing, or another component of a prosthesis without substantially increasing the effort and drain on the patient using the prosthesis. Similarly, such pumps can be easily incorporated into a portable inflation pump such as is illustrated in Fig. 5 below.

[0045] Fig. 3 is a cross-sectional view of the prosthetic device **10** illustrating the components of Fig. 2 after insertion into the pylon **14**. As can be seen in Fig. 3, the ribbon **28** forms a loop surrounding the power source **20** and the vacuum pump **22** so that those components may be withdrawn from the pylon **14** by pulling at the ends **28a** and **28b** of ribbon which extend to the bottom end of pylon. Fig. 3 further illustrates the vacuum and electrical circuits formed by the various components of the prosthetic device **10**. Specifically, an electrical circuit is formed by the electrical connections **24**, the positive and negative contacts of the power source **20** and the positive and negative terminals of vacuum pump **22**. As can be seen, one electrical connection directly connects one terminal of the power source **20** to one terminal of vacuum pump **22**, while further electrical connections connect the other terminal of the power source to the other terminal of vacuum pump via electrical switch **16**. Thus, by closing electrical switch **16**, electrical power is supplied to the vacuum pump **22**, causing the vacuum pump to operate and evacuate the socket **12**.

[0046] A user of a prosthetic device as thus described can readily create elevated vacuum to any level desired, at least to the limits of vacuum that can be drawn by the vacuum pump **22**. No particular vacuum level is required or contemplated by this particular embodiment of the present invention, as individual patients may have specific preferences and physical and/or physiological needs that dictate the level of vacuum drawn. The described exemplary vacuum pumps each have a flow rate sufficient to evacuate a typical socket to the desired vacuum level within about 30 seconds of vacuum pump operation. Some users will require very little vacuum within the socket **12**, whereas others will desire a higher level of vacuum and may, therefore, operate the vacuum pump for a longer period of time. For example, certain levels of vacuum may be desirable due to their potential to reduce the risk of ulceration and improve vascular flow. Furthermore, the amputee may readily re-apply vacuum using the pump as described above as needed.

[0047] As can be further seen in Fig. 3, the vacuum line **26** connects the vacuum pump **22** to a vacuum orifice **30** located in the socket **12** so that the socket may be evacuated by operation of the vacuum pump. As seen in Fig. 2, air drawn through the vacuum line **26** in this embodiment of the present invention is expelled via an outlet port **22b** on vacuum pump **22** into the interior of the pylon **14**. Air expelled into the pylon **14** is vented to the atmosphere, as the interior of a typical pylon is not generally sealed from the atmosphere.

[0048] As can be seen in Fig. 2 and in Fig. 3, the vacuum line **26** includes a check valve **27** for permitting airflow through the vacuum tube **26** to the vacuum pump **22** but preventing reverse airflow from the vacuum pump through the vacuum tube and into the socket **12**. The check-valve **27** may be a duckbill-valve or another known type of one-way valve.

[0049] Referring now to Fig. 4A, use of the inventive prosthetic device **10** in connection with a patient's residual limb is illustrated in further detail. As seen in Fig. 4A, a patient's residual limb **40**, typically having a liner donned thereon, is inserted into the socket **12**, commonly leaving a cavity **42** filled with air. In an application wherein a liner without an outer fabric covering is used, an air wick sheath such as a fabric can be used to prevent the urethane or thermoplastic liner from sealing the vacuum orifice and thus limiting the vacuum to the opening of the orifice only. Use of an air wick sheath over such a liner can allow air to be evacuated over a larger area of the residual limb. In applications wherein a fabric covered liner, such as one of the Alpha[®] family of liners available from The Ohio Willow Wood Company in Mt. Sterling, Ohio is used, the use of an air wick sheath is unnecessary.

[0050] With the liner-covered residual limb inserted into the socket **12**, the patient depresses the actuator button **16**, activating the vacuum pump **22** and causing air from the cavity **42** to be drawn through the vacuum tube **26** and the check valve **27** to the vacuum pump **22**, whereafter the air is expelled into the interior of the pylon **14**. The resulting vacuum in the cavity **42** draws the residual limb **40** into tight coupling with the interior of the socket **12**, and

permits use of the prosthetic device **10** for various ambulatory activities. The vacuum induced coupling between the residual limb **40** and the interior of the socket **12** can be best observed in Fig. 4B.

[0051] Referring now to Fig. 5, an alternative embodiment of the present invention is described. In this alternative embodiment, the pylon **14** is simplified by not including therein the vacuum pump **22** or the power source **20**. Rather, the pylon **14** contains only the vacuum line **26** that is coupled to the interior of the socket **12**. The vacuum line **26** connects to a vacuum orifice coupler **50/52**, which includes two parts. A first part of the coupler **50/52** is a check valve **50** that permits airflow from the socket **12** through the vacuum line **26**, but blocks reverse airflow from the exterior environment into the vacuum line and socket. As shown, the coupler **50/52** may also include an orifice **52** for receiving a vacuum line from an external portable vacuum pump **56**.

[0052] A portable evacuation device **56** includes its own vacuum line **54** with a coupler **55** on the end thereof for connection to the vacuum orifice coupler **52**. The interior of the portable evacuation device **56** includes a power source **60**, such as a capacitor or battery, a vacuum pump **62**, and a control switch **66**. The power source **60** is electrically connected to the vacuum pump **62** via electrical connections similar or identical to those described above with reference to Figs. 2-4B, and the vacuum line **54** is connected to the inlet port of the vacuum pump **62**. The portable evacuation device can thus be used to draw air from the socket **12** by connecting the

coupler **55** to the coupler **52**, then actuating switch **66** to activate vacuum pump **62** and draw the air through the vacuum line **54**.

[0053] One advantage of a portable evacuation device as shown in Fig. 5 is that the weight of the power source **60** and the vacuum pump **62**, although minimal, is removed from the prosthesis. Also, a patient with a relatively long residual limb and, therefore, a short pylon **14**, may not have sufficient volume in the pylon to enclose the motor and/or power source therein as shown in the preceding drawings. Similarly, above-knee amputees may not have enough room to incorporate a vacuum system between a prosthetic knee coupler and the end of the user's socket. In such cases, a portable evacuation device may be utilized to provide a portable vacuum source for the amputee.

[0054] Another embodiment of the present invention is illustrated in Figure 6. In this embodiment, a vacuum pump and power source are again installed to a pylon. The vacuum pump, power source and pylon may be the vacuum pump **22**, power source **20** and pylon **14** shown in Figs. 2-4B, for example, or may be entirely different components.

[0055] Unlike the installation shown in Figs. 2-4B, this embodiment of the present invention makes use of a special sleeve **68** into which the vacuum pump **22** and power source **20** are installed prior to insertion into the pylon **14**. Preferably, the sleeve **68** is formed from a thin and lightweight material that may substantially conform to the shape of the pylon interior. As shown, the sleeve **68** consists of a thin plastic tube, although the use of other materials is certainly also possible. One or both ends of the sleeve **68** may be open, or

the end(s) may be closed but for small access openings required for vacuum lines or electrical wiring.

[0056] The vacuum pump **22** and power source **20** may be retained within the sleeve **68** simply by a tight fit between the components and the interior of the sleeve. In an alternate embodiment of the sleeve (not shown), the sleeve interior may be provided with a special geometry designed to mate with and retain the vacuum pump **22** and/or power source **20**.

[0057] With the vacuum pump **22** and power source **20** installed in the sleeve **68**, the housing is inserted into the pylon as shown in Fig. 6. Retention of the sleeve **68** within the pylon **14** can be achieved by a tight fit between the sleeve and the pylon interior or, preferably, a retention means may be provided. Such a retention means may take many forms such as, for example, a pin, fastener, tab or other retainer that releasably affixes the sleeve **68** to the pylon **14**. Various types of releasable adhesive, such as one or more pieces of double-stick tape or Velcro[®] may also be used for this purpose. As shown in Fig. 6, however, retention of the sleeve **68** is accomplished by means of a detent **70**. More specifically, when the sleeve **68** is properly inserted into the pylon **14**, a projection **72** located on the exterior of the housing engages a hole or aperture **74** provided in the wall of the pylon. The interaction between the projection **72** and the aperture **74** is sufficient to retain the sleeve **68** during normal use of an associated prosthesis, while also allowing for disengagement and deliberate removal of the sleeve if desired. The sleeve **68** may be used in any embodiment of the present invention

wherein a vacuum pump and power source are installed within a pylon or other hollow prosthetic component.

[0058] Another embodiment of the present invention is shown in Figs. 7-12. In this embodiment, a prosthetic limb **76** includes an evacuation device **80** having at least a vacuum pump **84** and power source **86** located in a housing **82** that is specially designed to mate with a universal distal adapter **88** that is affixed to or integrated into a prosthetic socket **78**. Such a distal adapter **88** is shown to be substantially located in the distal end of the prosthetic socket **78** in Figs. 8-12, and may employ the four-hole attachment pattern common to the prosthetics industry.

[0059] A proximal (mounting) face **88a** of the distal adapter **88** that resides interior to the socket **78** is preferably, but not necessarily, concave, to better receive the distal end of the residual limb. The distal adapter **88** also has an aperture **90** passing axially therethrough. The aperture **90** allows for the passage of various suspension components such as, for example, locking pins and lanyards, and also receives a portion of the evacuation device housing **82** when the evacuation device **80** is used. Suspension devices associated with such suspension components can be designed to mate with the distal adapter **88** in the same manner as the evacuation device **80**, and these devices may be made to be interchangeable.

[0060] At least in the embodiment shown, wherein a suction seal is desired, the distal adapter **88** is optionally, but not necessarily, equipped with one or more o-rings **92** or similar sealing elements that traverse its periphery

and assist with providing an air-tight seal between the outer surface of the distal adapter **88** and the interior of the socket **78**. Other sealing means may also be employed.

[0061] As can be best observed in Fig. 10B, a number of mounting projections **94**, each having a flat mounting surface **96**, extend downward from a bottom (connecting) face **88b** of this distal adapter **88** and are exposed along the bottom of the distal end **78b** of the socket **78**. This can be achieved during lamination of the socket **78** by employing a temporary cover plate to protect the mounting surfaces **96** and the aperture **90**, while simultaneously allowing socket material to fill the channels formed between the mounting projections **94**. The end result of this technique is a substantially flat mounting area at the distal end **78b** of the socket **78**, with an aperture that connects the interior of the socket to the atmosphere via the aperture **90** in the distal adapter **88**. In other embodiments, a distal adapter having a single uniform mounting surface that is exposed along the distal end **78b** of the socket **78** may alternatively be used in place of an adapter having mounting projections.

[0062] In this particular embodiment, each mounting surface **96** has a threaded mounting hole **98** for receiving a like-threaded fastener. The mounting surfaces **96** mate with the proximal (mounting) side **82a** of the evacuation device housing **82** when the evacuation device **80** is affixed to the distal end of the socket **78**. As shown, the housing **82** has a number of thru-holes **100** that are arranged to align with the mounting holes **98** located in the

mounting surfaces **96** of the distal adapter **88**. Fasteners may be passed through the thru-holes **100** in the housing **82** and threaded into the distal adapter mounting holes **98** to secure the evacuation device **80** to the distal end of the socket **78**.

[0063] Various prosthetic components may be affixed to the distal (connecting) side **82b** of the evacuation device housing **82** by the same fasteners. These prosthetic components may include, for example, pyramid adapters, Symes adapters, prosthetic ankles, prosthetic feet, prosthetic knees, and other components forming the remainder of a prosthesis.

[0064] In the embodiment shown, a sealing extension **102** projects upward from the mounting face **82a** of the evacuation device housing **82** through the aperture **90** in the distal end **78b** of the socket **78** and into the aperture **90** in the distal adapter **88**. The sealing extension **102** preferably carries an o-ring **104** that acts to seal the aperture **90** in the distal adapter **88**.

[0065] With the above-described construction, the distal end **78b** of the socket **78** is made air tight. As such, mating vacuum passages **106**, **108** extend through the distal adapter **88** and the distal end **78b** of the socket **78**. The vacuum passage **108** in the socket **78** may be created during lamination by means of a projection on the cover plate used to expose the mounting faces **96** of the mounting projections **94**. Alternatively, the vacuum passage **108** may be bored through the distal end **78b** of the socket **78** after lamination thereof. The interface of the vacuum passages **106**, **108** may be further

WO 2006/135851

PCT/US2006/022742

sealed with an o-ring 110 if desired. Such an o-ring 110 may be installed into a recess or counterbore 112 in the distal adapter 88.

[0066] In this particular embodiment, an evacuation device vacuum passage 114 extends from the vacuum pump 84 through the mounting surface 82a of the evacuation device housing 82. The evacuation device vacuum passage 114 is aligned and mates with the vacuum passages 108, 106 in the socket 78 and distal adapter 88 when the evacuation device 80 is properly mounted to the distal end 78b of the socket 78. An o-ring 116 or similar sealing element may be located in the mounting face 82a of the evacuation device housing 82 and around the evacuation device vacuum passage 114 to ensure a good seal. The connected vacuum passages 106, 108, 114 essentially form one continuous vacuum passageway 118 that allows the vacuum pump 84 of the evacuation device 80 to evacuate air from the interior of the socket 78. A one way valve may be placed in any of the vacuum passages 106, 108, 114 to ensure that air cannot flow into the socket 78.

[0067] Air evacuated from the socket may be discharged by the vacuum pump 84 through an exhaust port 120. The exhaust port 120 may reside at various locations in the housing 82. The evacuated air may be discharged directly to the atmosphere, or into another prosthetic component, such as a pylon, where it can thereafter leak to the atmosphere. A one-way valve and/or muffler can be associated with the exhaust port 120.

[0068] In an alternate, but similar embodiment of the present invention, an evacuation device vacuum passage may pass from a vacuum pump through the sealing extension **102** - instead of through the mounting face **82a** of the housing **82**. In this case, communication with the socket interior occurs through the aperture **90** in the distal adapter **88** and, therefore, the distal adapter vacuum passage **106** and socket vacuum passage **108** can be eliminated or plugged.

[0069] In this embodiment of the evacuation device **80**, an actuator button **122** protrudes through the housing **82** for easy access by the user. Other actuating means may also be used, some of which are described in more detail below.

[0070] Access to the vacuum pump **84**, power source **86** and/or other components located within the evacuation device **80** may be accomplished through one or more access holes or panels (not shown) located in a side(s) of the evacuation device housing **82**. Alternatively, the connecting face **82b** of the evacuation device housing **82** may comprise a removable plate **124** that can be detached as needed to provide access to the vacuum pump **84**, power source **86**, and/or other components located within the evacuation device housing **82**.

[0071] It should be noted that another novel and beneficial feature of this embodiment of the present invention is the use of the universal distal adapter **88**. As mentioned briefly above, such a distal adapter can allow for the interchangeability of various suspension devices, such as the evacuation

device, a pin lock device, or a locking lanyard device. Each such device employs the same hole pattern so as to properly mate with the distal adapter **88**. The aperture **90** in the distal adapter is of sufficient size to allow the passage of a suspension component (e.g., a locking pin or lanyard), but can also be sealed (as described above) when suction suspension is employed.

[0072] Another embodiment of the present invention is illustrated in Fig. 13. In this embodiment, a prosthetic limb **126** includes an evacuation device **130** for evacuating a prosthetic socket **128**. The evacuation device **130** includes a housing **132** containing at least a vacuum pump **134** and power source **136**. The housing **132** is designed to fit around a prosthetic pylon **138**. As shown, the housing **132** may have two halves that can be fastened together around the pylon **138**. In a variation of such an evacuation device, a housing may be of substantially one-piece construction having a passageway therethrough for receiving a pylon. Such a housing may be retained on the pylon through an interference fit, or by a clamping means, for example.

[0073] Although shown to be substantially rectangular in cross-section in Fig. 13, the housing **132** may be contoured. For example, the housing **132** may be contoured in a similar fashion to a human calf, or some other appropriate or pleasing shape.

[0074] In this embodiment of the present invention, the vacuum pump **134** may be connected to the interior of the socket **128** by a vacuum line **140** that runs through the pylon **138** - in which case an aperture is provided through the pylon for passage of the vacuum line. Alternatively, and as shown, the

vacuum line **140** may extend from the vacuum pump **134**, through the housing **132** and distal end of the socket **128**, and into the socket interior. As yet another alternative, a vacuum line **140** may extend from the vacuum pump **134**, through the housing **132**, and to a manifold (such as the manifold **290** described in detail below), which manifold provides for communication with the socket interior so that air can be drawn therefrom.

[0075] An actuator button **146** may extend through the housing for easy access by the user. Other actuating means may also be, some of which are described in more detail below.

[0076] Air evacuated from the socket may be discharged by the vacuum pump **134** through an exhaust port **148**. The exhaust port **148** may reside at various locations in the housing **132**. A one-way valve and/or muffler can be associated with the exhaust port **148**.

[0077] Access to the vacuum pump **134**, power source **136** and/or other components located within the evacuation device housing **132** may be accomplished by separating the halves of the evacuation device housing.

[0078] Another embodiment of the present invention is shown in Fig. 14A. In this embodiment, an evacuation device **154** includes at least a vacuum pump **166** and power source **168** contained within a housing **156** that is attached to a side wall of a socket **152** of a prosthetic limb **150**. Preferably, the housing **156** is affixed to a mounting adapter **158** that is built directly into the socket **152**, such as during the lamination thereof.

[0079] A vacuum passage **160** may extend through the mounting adapter **158** and socket sidewall, and into to the interior of the socket **152**. Air may be evacuated from the socket interior by drawing it through the vacuum passage **160** using the vacuum pump **166**.

[0080] Air evacuated from the socket **152** may be discharged by the vacuum pump **166** through an exhaust port **170**. The exhaust port **170** may reside at various locations in the housing **156** or in the mounting adapter **158**. When a manifold is used, an exhaust port may be located therein. A one-way valve and/or muffler can be associated with the exhaust port **170** regardless of its location.

[0081] A similar but additional embodiment of the present invention can be observed in Fig. 14B. In this embodiment, a prosthetic limb **172** is provided with an evacuation device **176** comprised of at least a vacuum pump **182** and power source **184** residing within a housing **180** that is integral to a side wall of a prosthetic socket **174**. The housing **180** protrudes from the side wall of the socket **174** and forms a chamber **186** within which the vacuum pump **182** and power source **184** are retained. The housing **180** may be a separate component that is laminated or otherwise bonded to the socket **174** after the socket is formed. Preferably, however, the housing **180** is formed along with the socket **174**.

[0082] The vacuum pump **182** and power source **184** may be permanently sealed within the chamber **186**. Alternatively, a removable interior cover **188** may be provided to ensure that the vacuum pump **182**, power source **184**,

and any other associated components remain within the chamber **186**, while allowing access thereto when required.

[0083] A vacuum passage **190** or vacuum line may extend into the interior of the socket **174**. When an interior cover **188** is present, the vacuum passage **190** or a vacuum line may extend therethrough. Air is evacuated from the socket interior by the vacuum pump **182** via the vacuum passage **190**.

[0084] Air evacuated from the socket may be discharged by the vacuum pump **182** through an exhaust port **192**. The exhaust port **192** may reside at various locations in the housing **180**. A one-way valve and/or muffler can be associated with the exhaust port **192**.

[0085] In a variation of the embodiments shown and described with respect to Figs. 14A and 14B, a vacuum line may run from the vacuum pump **166, 182**, through the housing **156, 180**, and to a manifold connected to the socket **152, 174**, such as, for example, the manifold **290** depicted in Fig. 19. The manifold provides access to the interior of the socket **152, 174**, such that air may be drawn therefrom by the vacuum pump **166, 182**. In yet another variation, a vacuum line may run from the vacuum pump **166, 182**, through the housing **156, 180**, and to a vacuum passage located more remotely from the evacuation device, such as on the bottom surface of the socket.

[0086] Another alternative embodiment of the present invention can be seen in Fig. 15. In this embodiment, an evacuation device **196** including at least a vacuum pump **200** and power source **202** located in a housing **198**, is

positioned within an exoskeletal prosthetic device **194**. More specifically, the housing **198** is located within a cavity **204** between a socket portion **206** and distal end **208** of the exoskeletal prosthetic device **194**. Such an exoskeletal prosthetic device **194** may account for a majority of a prosthetic leg or prosthetic arm, for example.

[0087] The evacuation device **196** may be secured within the exoskeletal prosthetic device **194** in any number of ways. For example, when the evacuation device **196** includes a housing **198**, straps, clips, tabs, releasable adhesives, Velcro[®], and any number of other types of retainers may be secured to the interior of the exoskeletal prosthetic device **194** and used to engage and retain the housing. Such retainers can also be provided to individually secure the vacuum pump **200** and power source **202** within the exoskeletal prosthetic device **194** in embodiments of the present invention wherein no evacuation device housing is used.

[0088] In a variation of this embodiment, a mounting pad, plate or other such structure may be fabricated or otherwise secured within the cavity **204** of the exoskeletal prosthetic device **194** to provide an attaching surface **210** for the housing. The housing **198** may be secured to the attaching surface **210** using any of the retainers mentioned above, or by screws, double-sided tape, or any other known means.

[0089] A vacuum passage **212** extends into the interior of the socket **206**. A vacuum line **214** connects the vacuum pump **200** of the evacuation device **196** to the socket interior via the vacuum passage **212**. Air is evacuated from

the socket interior by the vacuum pump **200** using the vacuum passage **212** and vacuum line **214**.

[0090] Air drawn from the socket interior may be discharged by the vacuum pump **200** directly to the atmosphere through an exhaust port **216** in the exoskeletal prosthetic device **194**. Alternatively, air evacuated from the socket interior may be discharged into the cavity **204** in the exoskeletal prosthetic device **194**, where it may thereafter leak to the atmosphere through one or more component interfaces or be released through the exhaust port **216** which, in this case, may be manually or automatically actuable. Any exhaust port associated with any variation of this embodiment of the present invention may include a one-way valve and/or muffler.

[0091] Fig. 16 depicts another embodiment of the present invention, wherein an evacuation device **222** is affixed to a mounting plate **230** that is designed to be mounted between adjacent components of a prosthetic limb **218**. Preferably, the evacuation device **222** includes a housing **224** that contains at least a vacuum pump **226** and power source **228**, the housing adapted for affixation to an attachment face **232** of the mounting plate **230**. Alternatively, the vacuum pump **226** and power source **228** may be individually affixed to the attachment face **232** of the mounting plate **230** without a housing.

[0092] The mounting plate **230** is preferably L-shaped, such that a mounting portion **234** thereof can be located between adjacent components of the prosthetic limb **218**, while the attachment face **232** extends substantially

parallel to the length of the prosthetic limb. The mounting plate **230** may be located between for example, without limitation, a prosthetic ankle and foot, or a prosthetic socket **220** and a pyramid adapter **236**.

[0093] A vacuum line **238** may run from the vacuum pump **226**, through the housing **224**, if present, and into a vacuum passage **240** located in the socket **220** of the prosthetic limb **218**. The vacuum line **238** may run between the vacuum pump **226** and socket **220** completely exterior to the prosthetic limb **218**, as shown, or may be routed at least partially within the mounting portion **234**, a pylon **242**, and/or other components of the prosthetic limb. Those portions of the vacuum line **238** that run exterior to the prosthetic limb **218** are preferably, but not necessarily, releasably secured to neighboring limb components.

[0094] In a variation of this embodiment, a vacuum line may run from the vacuum pump **226** (through the housing **224**, if present) to a manifold connected to the socket **220**, such as, for example, the manifold **290** depicted in Fig. 19. The manifold provides access to the interior of the socket **220**, such that air can be drawn therefrom. When a manifold is used, any of the above-described routings of the vacuum line **238** may be employed.

[0095] Air evacuated from the socket **220** may be discharged to the atmosphere by the vacuum pump **226**. The evacuated air may be discharged through an exhaust port **244**, which may be located in/on the vacuum pump **226**, or at various locations in the housing **224** (if present). When a manifold

is used, an exhaust port may be located therein. A one-way valve and/or muffler can be associated with the exhaust port, regardless of its location.

[0096] Fig. 17 shows another embodiment of the present invention wherein an evacuation device **250** is located within a prosthetic foot **246** (which may be a solid prosthetic foot or a hollow foot covering). For example, the evacuation device **250** may consist of a vacuum pump **254** and associated power source **256** that reside within a cavity **248** in the foot **246**. Preferably, however, the evacuation device **250** also includes a housing **252** that contains the vacuum pump **254** and power source **256** and is located in the prosthetic foot cavity **248**.

[0097] A vacuum line **258** may run from the vacuum pump **254**, through the prosthetic foot **246**, and into a vacuum passage **260** located in the socket **262** of the prosthetic limb **264**. The vacuum line **258** may run between the vacuum pump **254** and socket **262** completely exterior to the prosthetic limb **264**, as shown, or may be routed at least partially within a pylon **266** and/or other components of the prosthetic limb. As an example of this latter construction, the vacuum line **258** might be routed from within the foot through a prosthetic ankle and pylon, and into the distal end of the socket. Those portions of the vacuum line **258** that run exterior to the prosthetic limb **264** are preferably, but not necessarily, releasably secured to neighboring limb components.

[0098] In a variation of this embodiment, the vacuum line **258** may run from the vacuum pump **254** to a manifold connected to the socket **262**, such

as, for example, the manifold **290** depicted in Fig. 19. The manifold provides access to the interior of the socket **262**, such that air can be drawn therefrom. When a manifold is used, either of the above-described routings of the vacuum line **258** may be employed.

[0099] Air evacuated from the socket by the vacuum pump **254** may be discharged to the atmosphere, preferably through an exhaust port **268** located in the prosthetic foot **246**. When a manifold is used, an exhaust port may be located therein. A one-way valve and/or muffler can be associated with the exhaust port, regardless of its location.

[00100] Fig. 18 illustrates another alternative embodiment of the present invention, wherein an evacuation device **270** includes a housing **272** containing at least a vacuum pump **274** and power source **276**, the evacuation device being located on the user's person and provided to evacuate a socket **278** of a prosthetic limb **280**.

[00101] As shown in Fig. 18, this embodiment of the evacuation device **270** may be clipped or otherwise attached to a user's belt **282**. Alternatively, the evacuation device **270** may be placed in a pocket or temporarily attached to some other piece of a user's attire. The housing **272** may have an attachment mechanism such as a spring-loaded clip integral thereto or, alternatively, the housing may fit into a sleeve or similar holder that acts to temporarily secure the evacuation device **270** to a user's attire. Such a holder may operate, for example, much like a clip-on cell phone holder.

[00102] A vacuum line **284** may run from the vacuum pump **274**, through the housing **272**, and into a vacuum passage **286** located in the socket **278** of the prosthetic limb **280**. The vacuum line **284** may be routed at least partially under the user's clothing. Those portions of the vacuum line **284** that run exterior to the prosthetic limb **280** are preferably, but not necessarily, releasably secured to the prosthetic socket **278**.

[00103] In a variation of this embodiment, the vacuum line **284** may run from the vacuum pump **274** to a manifold connected to the socket **278**, such as, for example, the manifold **290** depicted in Fig. 19. The manifold provides access to the interior of the socket **278**, such that air can be drawn therefrom.

[00104] Air evacuated from the socket **278** by the vacuum pump **274** may be discharged to the atmosphere, preferably through an exhaust port **288** located in the housing **272**. When a manifold is used, an exhaust port may be located therein. A one-way valve and/or muffler can be associated with the exhaust port, regardless of its location.

[00105] Fig. 19 depicts yet another embodiment of the present invention, wherein a manifold **290** is provided to connect a vacuum source **292** to the interior of a prosthetic socket **294**. The vacuum source **292** may be an evacuation device of the present invention, a hand-operated vacuum pump, or some other vacuum device that can be connected to the manifold **290**.

[00106] In the particular embodiment shown in Fig. 19, the manifold **290** is associated with and attached to the distal end of the prosthetic socket **294**. It should be realized, however, that it would also be possible to attach such a

manifold to other portions of the prosthetic socket **294**, as long as the attached location permits access to the interior portion of the socket that is to be evacuated.

[00107] As can be observed, a vacuum passageway **296** extends through the manifold **290**. One end **298** of the vacuum passageway **296** is adapted to connect with or receive a vacuum line **302** that connects the manifold **290** to the vacuum source **292**. The other end **300** of the vacuum passageway **296** is adapted to align with a vacuum passage **304** that extends through the socket wall. In this embodiment, the vacuum passage **304** extends through the distal end of the socket **294**, but could be located elsewhere in other embodiments. An o-ring **306** or other sealing element may be located at the interface of the vacuum passageway **296** and the vacuum passage **304** to help ensure an air-tight seal.

[00108] The manifold **290** may be attached to the socket **294** in a number of different ways. For example, the manifold **290** may be laminated or otherwise bonded to the socket **294**. Alternatively, the manifold **290** may be secured to a mounting plate **308** that has been integrated into the socket **294**. The manifold **290** could also be affixed to the universal distal adapter **88** shown in Figs. 8-12.

[00109] Using the vacuum source **292**, air is drawn from the socket interior through the manifold **290**. The evacuated air may be discharged through an exhaust port associated with the vacuum source **292** or from some other

location. As described above, a one-way valve and/or muffler can be associated with the exhaust port, regardless of its location.

[00110] As generally illustrated in Fig. 20, a magnetic switch **310** may be used in place of an actuator button or other vacuum pump actuator that requires direct contact by the user. As shown, the magnetic switch **310** resides between a power source **312** and a motor of a vacuum pump **314**. When actuated, the magnetic switch **310** allows current to flow from the power source **312** to the motor, activating the vacuum pump **314** and initiating the evacuation process.

[00111] Unlike a protruding pushbutton or switch, however, actuation of the magnetic switch **310** can often take place through the material forming, for example, an evacuation device housing (see above), a prosthetic socket **316**, or a prosthetic pylon **318** (as shown). More specifically, in many embodiments of the present invention, a user can activate and deactivate the evacuation device simply by holding a small magnetic activator **320** in close proximity to the magnetic switch **310**. Magnetic attraction between the magnetic activator **320** and the magnetic switch **310** either activates or deactivates the evacuation device as desired. Selective activation and deactivation can be accomplished, for example, by reversing the field of the magnetic activator **320** or by changing the location thereof with respect to the magnetic switch **310**.

[00112] As mentioned previously, a vacuum pump of the present invention may be operated by various power sources, such as one or more batteries or

capacitors. As one of the main detractors to the use of electronic devices in prosthetics is the need to eventually replace the power source, however, evacuation devices of the present invention are preferably provided with easy access to the power source(s) and/or, more preferably, employ a rechargeable power source(s).

[00113] When employing a rechargeable power source, recharging can be accomplished by either direct or inductive charging. In the most simplistic form of direct charging, the power source is connected to a plug-in charger that transfers electrical energy to the power source using the electrical circuitry of the evacuation device. For example, an evacuation device may have a housing that includes a charging jack that is connected to the contacts of the power source. The power source of such an embodiment can then be recharged simply by plugging an external charger into the charging jack.

[00114] Ideally, it is desirable for the user of an evacuation device of the present invention to never have to worry about charging of the power source. That is, even when a simplistic means for direct charging is provided, a user would still have to monitor or otherwise be informed of the charge status of the power source, and act accordingly if the charge level reaches a sufficiently low level.

[00115] To eliminate this requirement, it is possible to provide an evacuation device of the present invention with self-charging capabilities. For example, a small inductive generator may be located on the prosthetic limb and placed in electrical communication with the evacuation device power source. Such a

generator may be constructed and located on the prosthetic limb such that movement of the prosthetic limb during ambulation of the amputee will generate electric power by causing relative motion of coils within a magnetic field. Electrical energy produced by the generator is then provided to the evacuation device power source to maintain the power source in an acceptably charged state.

[00116] Other types of electric power generators may be employed for the same purpose. For example, an electro active polymer (EAP) generator could be associated with the prosthetic limb. EAP materials have evolved into a very viable alternative to other energy generation methods, and although EAP generators do have some limitations, these limitations are not insurmountable in a prosthetic device application. Alternatively, sufficient charging energy could also be generated using piezoelectric element generators. Piezoelectric elements generate a voltage in response to applied mechanical stress and, therefore, can be caused to generate electrical energy by movement of a prosthetic limb to which they are attached.

[00117] Consequently, any evacuation device embodiment of the present invention can be provided with such self-charging capability. When so equipped, an evacuation device of the present invention also includes any electrical circuitry necessary to receive electrical energy from the generator(s), and may also include circuitry and/or other elements to prevent over-charging of the power source(s).

[00118] With respect to the operational aspects of the evacuation devices of the present invention, each embodiment may include basic through advanced versions thereof. More particularly, each embodiment of an evacuation device of the present invention may include a basic version that provides for manual operation only, an advanced version that is fully automatic, and one or more versions having operational features that fall somewhere therebetween.

[00119] At the basic level, each embodiment of an evacuation device of the present invention can provide for manual operation. Manual operation essentially involves a user engaging an actuator that results in activation of a vacuum pump and evacuation of the prosthetic socket. The vacuum pump will continue to evacuate the socket until the user releases the actuator or the vacuum level reaches the maximum level that can be achieved by the pump. Thus, manual operation allows a user to select a vacuum level that best corresponds to his/her current activity level or desired comfort level. Vacuum can be periodically increased or decreased as desired by the user.

[00120] Each embodiment of an evacuation device of the present invention may also operate in a semi-automatic mode. This can be achieved by adding certain types of sensors to the vacuum system, thereby requiring only minimal user interaction. For example, in a simplistic embodiment of semi-automatic operation, a pressure switch may be provided and simply configured to prevent the vacuum level from exceeding some level previously found to be uncomfortable or otherwise inappropriate for the user.

WO 2006/135851

PCT/US2006/022742

[00121] In another particular embodiment of semi-automatic operation, a vacuum pump is preset to draw a particular level of vacuum once activated. Therefore, the single intermittent push of a push-button or other actuator will cause the vacuum pump to operate until an associated pressure sensor determines that the desired pressure has been met. It is also possible to mix modes of operation by allowing the user to enter a semi-automatic mode with a quick contact of the actuator, but to enter a manual mode by prolonged contact with the actuator.

[00122] Operation of an evacuation device of the present invention can be further enhanced by adding either logic or a microprocessor 400. With such an addition, it is possible to monitor socket pressure and automatically maintain the socket pressure within a patient or practitioner defined range of acceptable pressures. This automatic mode of operation completely eliminates the need for the user to monitor the socket pressure, and the prosthetic limb then becomes a device that can simply be donned and forgotten until removal thereof is desired. It can be appreciated that such a vacuum suspension system will be able to automatically react to conditions within the socket in a manner appropriate for the user, and in ways not possible for a mechanical pump design.

[00123] The addition of sensors and a microprocessor 400 to an evacuation device of the present invention and/or to a prosthetic limb equipped with such an evacuation device, permits the monitoring of various conditions or parameters of the prosthetic limb and/or the user. For example, by appropriately locating a basic pressure transducer in the prosthetic socket, the measuring and tracking of

WO 2006/135851

PCT/US2006/022742

various pressure values associated with the prosthetic socket becomes possible. Pressure values of interest may include maximum or minimum socket pressure, the average pressure in the socket over some period of time, and the Root Mean Square (RMS) pressure over a defined period of time.

[00124] With respect to these latter values, the period of time monitored might depend on the conditions that the user or a practitioner is evaluating. For initial setup and function testing, for example, the time period might be set to a single step. For evaluation on more complicated tasks such as engaging in a sport or ascending/descending stairs, the time period might be extended to obtain a target range for all of the various ways that the activity at issue might be performed. The test period might even be extended to a period of days to track values for the user's entire range of activities. Another parameter that may be tracked is some measure of the amount of pressure the user is exposed to over the course of a period of time. Measure of this parameter would be the integral of pressure as a function of time, or the integral of the pressure squared as a function of time. With an appropriate link to the microprocessor 400, such data can then be displayed on a PC, a key fob device, or some other display unit for viewing and analysis by the user and/or practitioner. Of course, the data may also be saved for later reference.

[00125] Because a concern with any vacuum-based prosthetic suspension system is the quality of the seal, this is another condition that may be

monitored. While it is difficult to directly monitor the seal, it is possible to monitor the duty cycle of an automatically-controlled vacuum pump motor as the vacuum pump acts to maintain the vacuum level within the prosthetic socket. Increases in the duty cycle indicate increases in air leaks and a degradation of the seal. To properly monitor this condition, a base line vacuum pump duty cycle can be obtained during setup of the associated prosthesis. Monitoring the duty cycle and comparing it to this baseline will then provide a measure of the seal and allow its quality to be monitored.

[00126] Another mode of monitoring the prosthetic socket is a high speed real time mode. In this mode, vacuum level variations within the socket can be monitored in real time, as they occur. Data is then recorded relative to a known time base and allows vacuum fluctuations to be ascribed to specific events during the user's activities. This mode also allows graphical displays to be constructed that can be used to visualize the relationship between a user's activities and the vacuum level within the socket.

[00127] In microprocessor-equipped embodiments of the present invention wherein vacuum level within the socket is or can be monitored, it is also possible to monitor the range or variation of the vacuum level and make some judgments as to the user's activity level based thereon. In this manner, it is possible to then automatically adjust the level of vacuum to the level of activity of the user. For example, the vacuum level may be increased over the typical level for a user who becomes very active. Similarly, vacuum level may be automatically decreased if a user is substantially sedentary or non-ambulatory

for some period of time, and then may be automatically increased when the user becomes more active. This method of monitoring the level of user activity and automatically adjusting the vacuum to a correlating level results in a system that continually attempts to keep the vacuum level in the socket at an appropriate level.

[00128] As would be understood to one skilled in the art, different phases of an amputee's gait cycle subject the socket of a prosthetic leg to different stresses, strains, accelerations, and impacts (this is similarly true during use of a prosthetic arm). The result is that during different phases of the gait cycle, the pressure in the socket and the sensations that the amputee experiences differ. For example, a level of vibration that would be noticeable during the free swing phase of gait, where vibrations are at a minimum, may not be noticeable if it occurs at the point of heel strike where other masking sensations are present.

[00129] Also, drawing a vacuum during the free swing phase of the gait cycle is more difficult to achieve and requires more electrical energy than does drawing a vacuum during the stance phase of the gait cycle. This is due primarily to the fact that the socket is in tension during the swing phase, while during the stance phase the socket is being driven back onto the amputee's residual limb - thereby effectively forcing air from the socket. For at least these of reasons, it is advantageous to monitor a lower limb amputee's gait cycle. Movement of the upper limb of an upper extremity amputee can be similarly monitored. Simple tracking can be achieved by observing the

pressure fluctuations in the socket and reacting thereto. When more reliable gait or other movement synchronization is desired, more complex evaluations can be achieved through the addition of accelerometers, gyroscopes, force sensors, or some combination thereof.

[00130] The use of a pushbutton, magnetic switch, and other simplistic actuators has been described above with respect to manually operable evacuation device embodiments of the present invention. However, other forms of evacuation device interfaces may also be used, whether in conjunction with such actuators or in place thereof.

[00131] In one very simplistic information-only interface, basic power, pressure, and functional information can be communicated to the user through simple LED indicators. Such an interface may continually display information, or it may display information only when the patient requests it in order to conserve power. Such a display can be built into the evacuation device housing, if present.

[00132] In another information-only interface, basic information regarding evacuation device function, etc., can be communicated to the user by means of an audio transducer. One benefit of this design is that it does not require the user to view the evacuation device or some other display unit associated therewith.

[00133] Pushbuttons (and similar switch-type devices) may be used in a very basic operating and/or programming interface. Pushbuttons are simple, easy to understand, and draw no power when they are not active. Used with

a properly designed low-power microprocessor, pushbuttons account for very little power consumption. There are a number of types of switches or switch-type devices that could actually be used. Standard contact switches are one choice. Membrane-type switches may be a reliable, attractive, and space efficient alternative. Also, proximity or capacitive detection switches have recently become available that are able to detect "touches" through a closed container and, as such, would eliminate the need for a passage from the outside of an evacuation device housing or prosthetic component to the inside. Another possibility is a Hall-type device that operates by using some sort of magnetic key. Such a device might be used to provide simple on/off control, perhaps as a backup to other more advanced interfaces.

[00134] More complex interfaces may be associated with more complex evacuation devices of the present invention, such as the semi-automatic and automatic versions described above. One such interface may be comprised of a series of pushbuttons associated with the evacuation. These pushbuttons may be located, for example, on an evacuation device housing. The disadvantage to such an interface, however, is that it requires the patient to remove clothing, or possibly cosmetic fittings, to activate the vacuum pump, update a program, or make changes to the vacuum settings.

[00135] A more convenient method of interfacing with an advanced evacuation device of the present invention is through a wireless link. Thus, an evacuation device of the present invention may include a radio, cellular or

WO 2006/135851

PCT/US2006/022742

some other form of wireless transmitter/receiver 402. A wireless link with the transmitter may then be established in any of several ways.

[00136] In one embodiment, a stand-alone communication device is used to communicate with the evacuation device. Such a stand-alone communication device may be embodied in a key fob, which may include, for example, an integrated transmitter/receiver, input keys, and an alphanumeric and/or graphical display. This design would allow a user to keep the key fob in their pocket and to communicate with the evacuation device easily and inconspicuously. This also allows the user to observe actual operating conditions and parameters associated with the evacuation device and/or prosthesis, and to optimize evacuation device operation to best suit their needs.

[00137] In another embodiment, a transmitter/receiver may be integrated into a communication device having a computer compatible interface, such as a serial or USB interface. This design would allow the use of a computer's (e.g., a PC, laptop, pen computer, PDA, etc.) display and computational capabilities. More particularly, the communication device could be connected to a computer and thereafter used to wirelessly communicate with the evacuation device. This would be especially useful to a practitioner, who could then easily observe variations in a user's socket pressure through a step, and from step to step, so as to evaluate the function of the evacuation device. A practitioner could also adjust the evacuation device settings, and then save the settings to a hard disk or other storage medium.

[00138] Obviously, these are just a few examples of the types of wireless communication devices that may be used in conjunction with an evacuation device of the present invention. Such wireless communication devices could also be used to interact with an evacuation device in more complex ways, such as in troubleshooting and programming, for example. It is intended that all interactions capable of being performed locally could also be performed using a wireless link.

[00139] It can be understood that in versions of the present invention wherein an evacuation device is not provided with self-charging capabilities, or wherein a user wearing a prosthetic limb having a self-charging capable evacuation device is non-ambulatory for an extended period of time, it is possible to discharge the power source(s) to an unacceptable level. As such, it is desirable that an evacuation device of the present invention be equipped with a means to notify the user of a low power state and/or to take action(s) directed to preserving the power remaining in the power source.

[00140] One method of alerting a user to a low power state is by cycling the vacuum pump. That is, by repeatedly turning the vacuum pump on and off during the evacuation process, additional vibration and noise will be generated. While such cycling is unlikely to appreciably decrease the amount of power consumed, the additional vibration and noise can serve as a cue to the user that there is a problem. A user may be similarly alerted to a low power situation by running the vacuum pump motor at a higher speed than

normal. This would increase motor and/or vacuum pump noise, helping to alert the user is aware to the low power situation.

[00141] Upon detection of a low power state, a reduction in power consumption can be achieved in several ways. First, reducing the required vacuum level can be practiced. This method may be employed directly by a user with a manually operable evacuation device, or automatically by a microprocessor controlled device. An automatic reduction in vacuum level may also serve to notify the user of a low power situation.

[00142] With respect to evacuation devices of the present invention where such are present, the wireless (radio) link may be disabled once a low power state is detected. Although minimal, such a radio link does draw some power from the power source when enabled. Disabling the radio link would also force the user to manually activate the evacuation device, thus making the low power state very apparent.

[00143] Yet another method of conserving electric power would be to disable the automatic control system, if present. This would prevent the possibly frequent cycling of the evacuation device, especially if the user's activity level is increasing. This action would also force the user to interact with the evacuation device in an alternate fashion that would make the low power condition apparent. Disabling the automatic control system could also allow a user to temporarily disable the evacuation device if the user's current activity level does not necessitate suction suspension – thereby preserving power to adjust the vacuum level should the user's activity level change.

[00144] Other means of alerting a user to a low power condition are certainly also possible. For example, a visual and/or audible alert may be employed, such as through the use of the LED or audio transducer interfaces described above.

[00145] As mentioned previously, sensors, a microprocessor, and other devices may be associated with an evacuation device to form a more advanced prosthetic evacuation system. Such systems may provide for a number of operational modes that offer various advantages in function, convenience, and privacy.

[00146] One such operational mode is a multi-speed vacuum mode. At lower levels of power consumption, the vacuum pump motor operates at a reduced level of performance, but also at a reduced noise level. Therefore, in this multi-speed vacuum mode of operation, the user may choose between one of several predetermined levels of vacuum pump performance - with lower performance levels producing less noise and higher performance levels producing more noise. Thus, for example, if the user is in a noise sensitive environment (e.g., the theater, a library, etc.) and their activity level is relatively low, the user may choose a lower performance level to minimize noise. If noise is of little or no concern, then the user might select a higher performance level.

[00147] In addition to vacuum pump performance level selection by the user, another way to take advantage of the multi-speed vacuum mode of operation would be to use a level of activity monitor, as described above.

Such a level of activity monitor could be used to detect the level of activity of the user and to subsequently adjust the performance of the vacuum pump to an appropriate level. This would have the additional advantage of reducing power consumption when the user is substantially sedentary.

[00148] An evacuation device of the present invention may also be used to assist with doffing (removal) of the prosthesis to which it is installed. When removal is desired, the user first typically removes a sealing sleeve, if present, and subsequently releases the vacuum in the socket by either placing a tool therein to open a passageway along the socket interior or by opening or otherwise activating an air valve. With the vacuum released, the prosthesis can then be removed from the residual limb. To assist with the removal process, an evacuation device of the present invention may employ a reversible vacuum pump to pump air back into the distal end of the socket and encourage its dislodgement from the residual limb. Alternatively, an evacuation device of the present invention may use two pumps; one to evacuate the socket during donning of a prosthesis and one to pressurize the socket during doffing of the prosthesis.

[00149] In addition to simply evacuating a prosthetic socket to impart suction suspension to a prosthesis, an evacuation device of the present invention can also have therapeutic uses. Amputees are often the victims of chronic wounds that seemingly will not heal. These wounds are sometimes the result of operations, and sometimes result from pressure sores. One of the dilemmas frequently faced by amputees is how to let their stump heal

when its use is often necessary to their daily activities. While this dilemma is not unique to upper or lower limb amputees, it may be more problematic for lower limb amputees because they must rely on their residual limbs for ambulation and because their residual limbs are generally subjected to more forces and pressures than are those of upper limb amputees.

[00150] Research since about 1993 has indicated that sub-atmospheric pressure can be of benefit to the healing of chronic wounds. Blood flow has been found to be augmented by treatment at reduced pressures of around 125 mmHg. Healing has been shown to be further improved by cycling the reduced pressure; such as by repeatedly applying vacuum for approximately 5 minutes, removing the vacuum for 2 minutes, and repeating.

[00151] An evacuation device of the present invention can be used with a sealable socket to provide such a vacuum therapy regimen. The socket may be for treatment use only and may be disposable to obviate any concerns relating to the seepage of wound fluids during treatment. Such a socket may be especially useful for the treatment of new amputees. Alternatively, the socket may be part of a prosthesis. When incorporated into the stump socket of a prosthesis, the evacuation device may be programmed to enter a therapy mode when the amputee is inactive. This may be useful when the amputee has a wound(s) or other condition(s) that will benefit from vacuum therapy.

[00152] In this embodiment of the present invention, the evacuation device is programmed or otherwise set to achieve the desired vacuum level when operated. The evacuation device is further programmed to cycle on and off in

order to repeatedly apply and release the vacuum, and to maintain the vacuum level for the necessary time - whatever that time is determined to be.

[00153] In conjunction with the above discussion, it is worth noting that one of the primary causes of sores on a residual limb is excessive motion of the residual limb within a prosthetic socket. An evacuated socket helps to maintain residual limb volume, thereby greatly reducing the tendency of the residual limb to move within a prosthetic socket. However, it is difficult to know what level of vacuum is actually necessary for a given patient at a given activity level, on a specific day. To help make such a determination, a residual limb motion sensor can be integrated into a prosthetic socket, and used to adjust the vacuum level therein. If motion over some period of time is too high, more vacuum is drawn. If the vacuum level has been maintained, but the user's activity level has declined, the vacuum level can be slowly reduced until motion is detected. The vacuum level can then be increased as necessary until the motion ends or is maintained at a level for which the current vacuum level is appropriate. Over time, a map of activity level vs. pressure (vacuum level) can be constructed and referenced to allow for quicker vacuum adjustments.

[00154] Several types of sensors can acceptably serve as the motion sensor described above. For example, the motion sensor may be comprised of a Hall sensor placed in the base of a prosthetic socket and a small magnet fastened to the tip of a prosthetic liner worn over the residual limb. Alternatively, the motion sensor may be comprised of a mutual inductance

device that measures the mutual inductance between a coil in the base of a prosthetic socket, and a small coil placed on the tip of a prosthetic liner worn over the residual limb. In another embodiment, the motion sensor may be comprised of an ultrasonic sensor that is tuned to detect a small metal plate mounted on the tip of a prosthetic liner worn over the residual limb. Placing this sensor in the prosthetic socket could directly detect a residual limb or prosthetic liner. In yet another embodiment, the motion sensor may be comprised of a force sensor placed in the bottom of a prosthetic socket. Intermittent contact of the residual limb with the force sensor will indicate the occurrence of residual limb motion within the socket.

[00155] While various embodiments of the present invention have been illustrated primarily with respect to the case of lower limb prostheses, the present invention also applies to upper limb prostheses. Additional advantages and modifications will readily appear to those skilled in the art and are considered to be within the scope of the present invention.

[00156] Therefore, while certain embodiments of the present invention are described in detail above, the scope of the invention is not to be considered limited by such disclosure, and modifications are possible without departing from the spirit of the invention as evidenced by the following claims:

WO 2006/135851

PCT/US2006/022742

WHAT IS CLAIMED IS:

1. A prosthetic device, comprising:
 - a socket for receiving a residual limb;
 - a housing adapted for attachment to said socket at a connection;
 - a vacuum passageway for evacuation of air from said socket, the vacuum passageway extending from the socket through the connection and into the housing; and
 - an evacuation device comprising an electrically powered vacuum pump and a source of electric power, said vacuum pump in communication with said vacuum passageway;wherein said vacuum pump is activated to evacuate said socket by drawing air therefrom while said residual limb is located within said socket.
2. The prosthetic device of claim 1, the connection further comprising an adapter associated with said socket and located at a distal end thereof.
3. The prosthetic device of claim 2, wherein said adapter is an integral part of said socket.
4. The prosthetic device of claim 2, wherein a vacuum passage in said adapter and a vacuum passage in said socket cooperate to form said vacuum passageway.
5. The prosthetic device of claim 2, further comprising a vacuum passage in said housing, said vacuum passage connected to said vacuum pump and located to align with said vacuum passageway when said housing is installed on said adapter.

WO 2006/135851

PCT/US2006/022742

6. The prosthetic device of claim 5, further comprising an o-ring between said vacuum passage in said adapter and said vacuum passage in said socket.
7. The prosthetic device of claim 2, wherein said evacuation device is attached to said adapter by passing a number of threaded fasteners through receiving holes in said housing and threading said fasteners into like-threaded mounting holes in said adapter.
8. The prosthetic device of claim 7, wherein each mounting hole resides in a corresponding adapter mounting surface that is exposed along a bottom of said socket.
9. The prosthetic device of claim 2, wherein said adapter includes an axial aperture for allowing passage therethrough of various prosthetic suspension components.
10. The prosthetic device of claim 1, wherein said housing is further adapted for connection to one of a plurality of prosthetic connecting adapters.
11. The prosthetic device of claim 10, wherein said prosthetic connecting adapter is a pyramid adapter.
12. The prosthetic device of claim 1, further comprising an exhaust port in said housing through which evacuated air is exhausted.
13. The prosthetic device of claim 12, further comprising a one-way valve and/or muffler associated with said exhaust port.

WO 2006/135851

PCT/US2006/022742

14. The prosthetic device of claim 1, further comprising an actuator extending through said housing for allowing a user to activate said vacuum pump by continued contact with said actuator.
15. The prosthetic device of claim 1, further comprising a magnetic switch between said power source and said vacuum pump, said magnetic switch allowing for remote activation of said vacuum pump.
16. The prosthetic device of claim 1, further comprising one or more sensors and a microprocessor in communication with said evacuation device.
17. The prosthetic device of claim 16, wherein at least one sensor is a vacuum level sensor that monitors vacuum level within said socket.
18. The prosthetic device of claim 17, wherein said microprocessor uses input from said vacuum level sensor to operate said vacuum pump such that said socket is automatically evacuated to some predetermined level once said vacuum pump is initially activated by a user.
19. The prosthetic device of claim 17, wherein said microprocessor uses said vacuum level sensor to continually monitor vacuum level within said socket and automatically operates said vacuum pump as necessary to maintain said socket at some predetermined vacuum level.
20. The prosthetic device of claim 17, wherein said microprocessor uses said vacuum level sensor to monitor vacuum level within said socket

WO 2006/135851

PCT/US2006/022742

and operates said vacuum pump as necessary to automatically adjust said vacuum level to correspond to changes in a user's activity level.

21. The prosthetic device of claim 1, further comprising a means of indicating a low power condition to a user.
22. The prosthetic device of claim 1, wherein said vacuum pump is reversible to pressurize said socket during doffing of an associated prosthetic limb.
23. The prosthetic device of claim 1, further comprising a second vacuum pump to pressurize said socket during doffing of an associated prosthetic limb.
24. The prosthetic device of claim 1, further comprising a wireless receiver/transmitter associated with said evacuation device for allowing wireless communication therewith.
25. The prosthetic device of claim 1, wherein said power source is rechargeable.
26. The prosthetic device of claim 25, further comprising a generator mounted to a prosthetic limb with which said prosthetic device is used, said generator recharging said power source with electrical energy automatically produced by said generator as a result of movement of said prosthetic limb.
27. The prosthetic device of claim 26, wherein said generator is comprised of an inductance device, a piezoelectric element, or an electroactive polymer.

WO 2006/135851

PCT/US2006/022742

28. The prosthetic device of claim 1, wherein said vacuum pump is configured to cycle to repeatedly draw and release a vacuum within said socket, thereby providing vacuum therapy to said residual limb.
29. The prosthetic device of claim 1, the evacuation device being located within the housing.
30. The prosthetic device of claim 29, the housing including a pylon.
31. The prosthetic device of claim 29, the housing including a prosthetic foot cavity.
32. A prosthetic device, comprising
 - a socket for receiving a residual limb;
 - a pylon extending from said socket at a connection therebetween;
 - a vacuum passage extending from the pylon through the connection and into said socket for evacuation of air therefrom;
 - an electrically powered vacuum pump in communication with said vacuum passage, and
 - an electric power source connected to said vacuum pump;
 - wherein said vacuum pump is activated to evacuate said socket by drawing air therefrom while said residual limb is located within said socket.
33. The prosthetic device of claim 32, the vacuum pump being located within the pylon.
34. The prosthetic device of claim 32, wherein said electric power source is located within said pylon.

WO 2006/135851

PCT/US2006/022742

35. The prosthetic device of claim 33, wherein said vacuum pump and said electric power source are placed into a sleeve that is subsequently inserted into said pylon.
36. The prosthetic device of claim 32, further comprising an electrical switch electrically interposed between said electric power source and said vacuum pump.
37. The prosthetic device of claim 36, wherein said switch extends through said pylon.
38. The prosthetic device of claim 36, wherein said switch is a magnetic switch.
39. The prosthetic device of claim 32, wherein said electric power source is a battery.
40. The prosthetic device of claim 39, wherein said battery is rechargeable.
41. The prosthetic device of claim 32, wherein air from said socket is evacuated through an exhaust port.
42. The prosthetic device of claim 41, further comprising a one-way valve and/or muffler associated with said exhaust port.
43. The prosthetic device of claim 32, further comprising one or more sensors and a microprocessor that allow said vacuum pump to operate in an automatic or semi-automatic mode.
44. A device for evacuating a prosthetic socket having a distally-located vacuum passage, comprising:

WO 2006/135851

PCT/US2006/022742

a distal adapter for installation into an interior distal end of the prosthetic socket;

a vacuum passage in said distal adapter, said vacuum passage allowing for the evacuation of air from an interior of said prosthetic socket and through said distal adapter after said distal adapter is installed thereto;

an evacuation device comprising at least an electrically powered vacuum pump contained within a housing, said housing configured for coupling to a bottom surface of said distal adapter with a bottom wall of said prosthetic socket trapped therebetween;

a power source in communication with said vacuum pump; and

a vacuum passage through said evacuation device housing, said vacuum passage in the evacuation device housing aligned with said vacuum passage in said distal adapter when said evacuation device is properly coupled thereto, and wherein, after coupling to said distal adapter, the vacuum pump of said evacuation device is operable to evacuate air from an interior of said prosthetic socket by drawing air therefrom through a passageway formed by said vacuum passage in said distal adapter, a vacuum passage in the prosthetic socket, and said vacuum passage in said evacuation device housing.

45. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, wherein said power source is located within said housing.

WO 2006/135851

PCT/US2006/022742

46. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 45, further comprising a cable in electronic communication with said power source and extending from said housing to a remote location on a prosthetic limb to which said device is installed, said cable allowing for remote charging of said power source.
47. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, wherein said power source is rechargeable.
48. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, further comprising a microprocessor located within said housing.
49. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 48, further comprising a cable in electronic communication with said microprocessor and extending from said housing to a remote location on a prosthetic limb to which said device is installed, said cable allowing for remote communication with and/or remote programming of said microprocessor.
50. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, wherein said housing is further adapted for connection to one of a plurality of prosthetic connecting adapters.

WO 2006/135851

PCT/US2006/022742


51. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, wherein said evacuation device is attached to said distal adapter by passing a number of threaded fasteners through mounting holes in said housing and threading said fasteners into like-threaded mounting holes in said distal adapter.
52. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, further comprising an exhaust port in said housing through which evacuated air is exhausted.
53. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 52, further comprising a one-way valve and/or muffler in communication with said exhaust port such that air expelled through said exhaust port passes through said one-way valve and/or muffler.
54. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, further comprising one or more sensors, said sensor(s) used by said evacuation device to monitor the vacuum level within a prosthetic socket.
55. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, further comprising a means of indicating a low power condition to a user.
56. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, wherein a flow of air produced


WO 2006/135851


PCT/US2006/022742

by said vacuum pump is reversible to pressurize a prosthetic socket during doffing of a prosthetic limb to which said device is installed.

57. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, further comprising a wireless receiver-transmitter on or in said evacuation device for allowing wireless communication therewith.
58. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 57, said device for evacuating a prosthetic socket having a hand held controller associated therewith, said hand held controller for communicating with said wireless receiver-transmitter and including a display.
59. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, wherein said vacuum pump is operable to repeatedly draw and release air so as to repeatedly create and release a vacuum within said prosthetic socket.
60. The device for evacuating a prosthetic socket having a distally-located vacuum passage as defined in claim 44, further comprising a number of mounting projections extending from said bottom surface of said distal adapter, each mounting projection having a mounting surface that is designed to be exposed along a bottom surface of a prosthetic socket once said distal adapter is installed thereto.

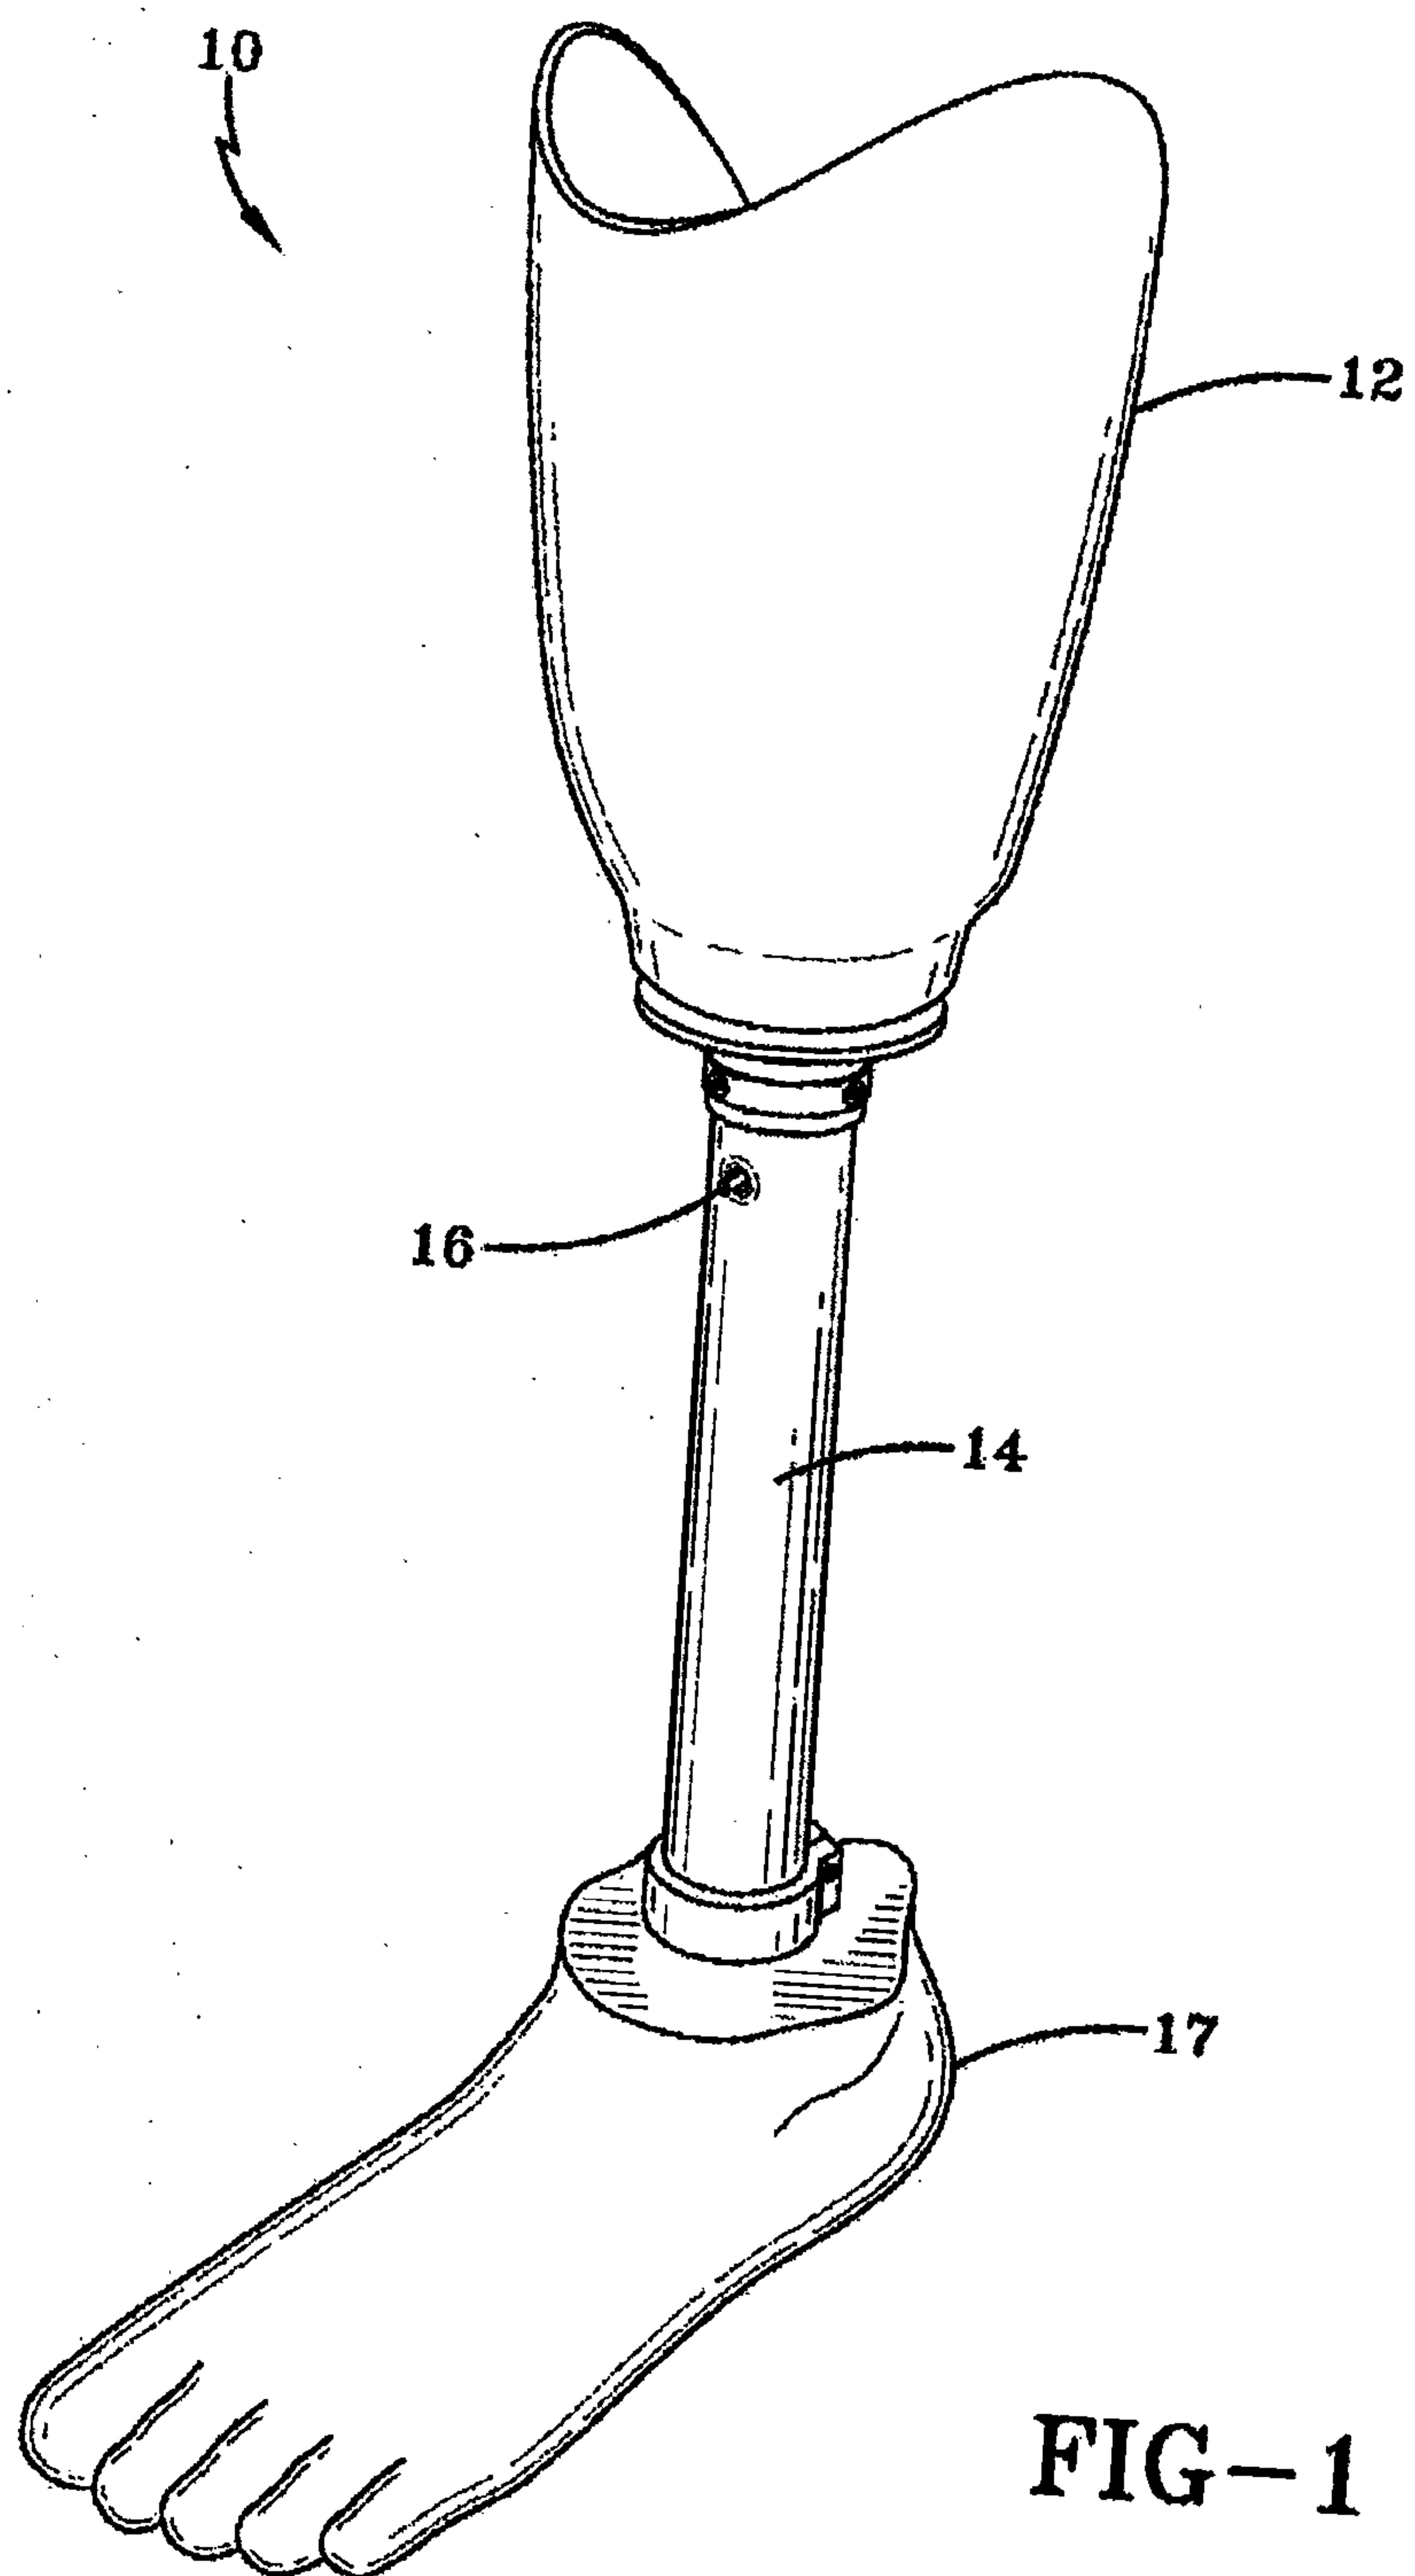

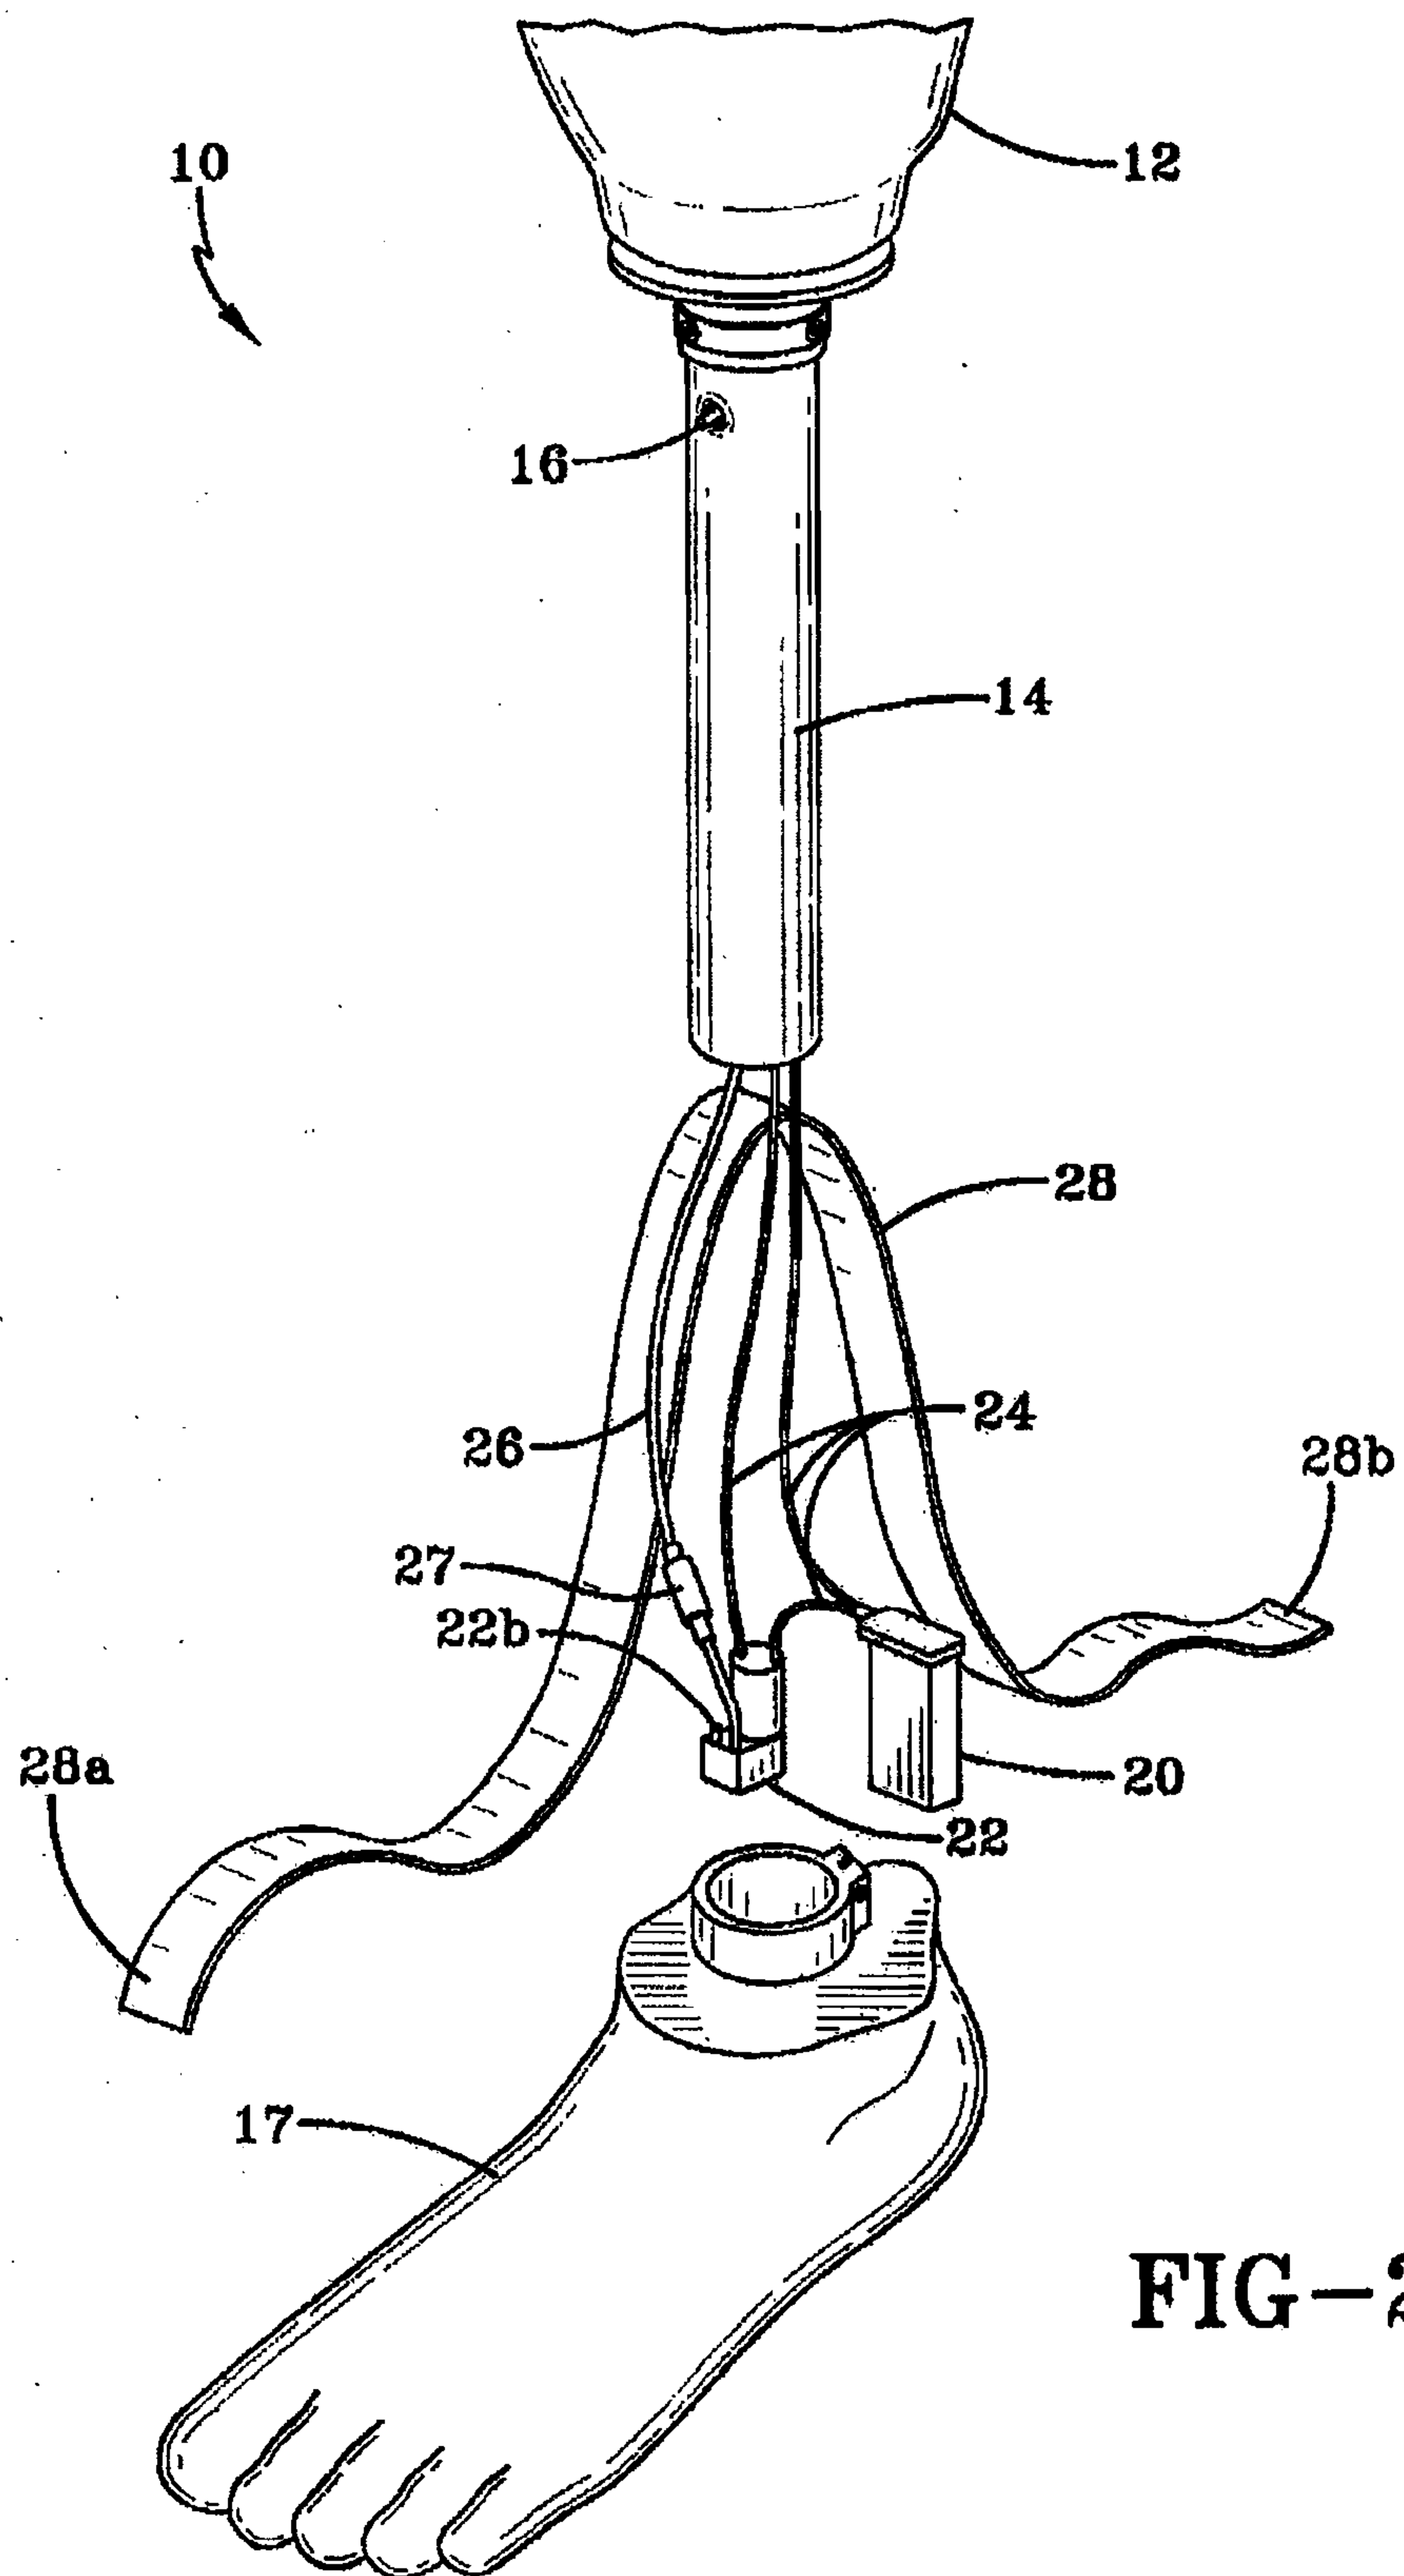

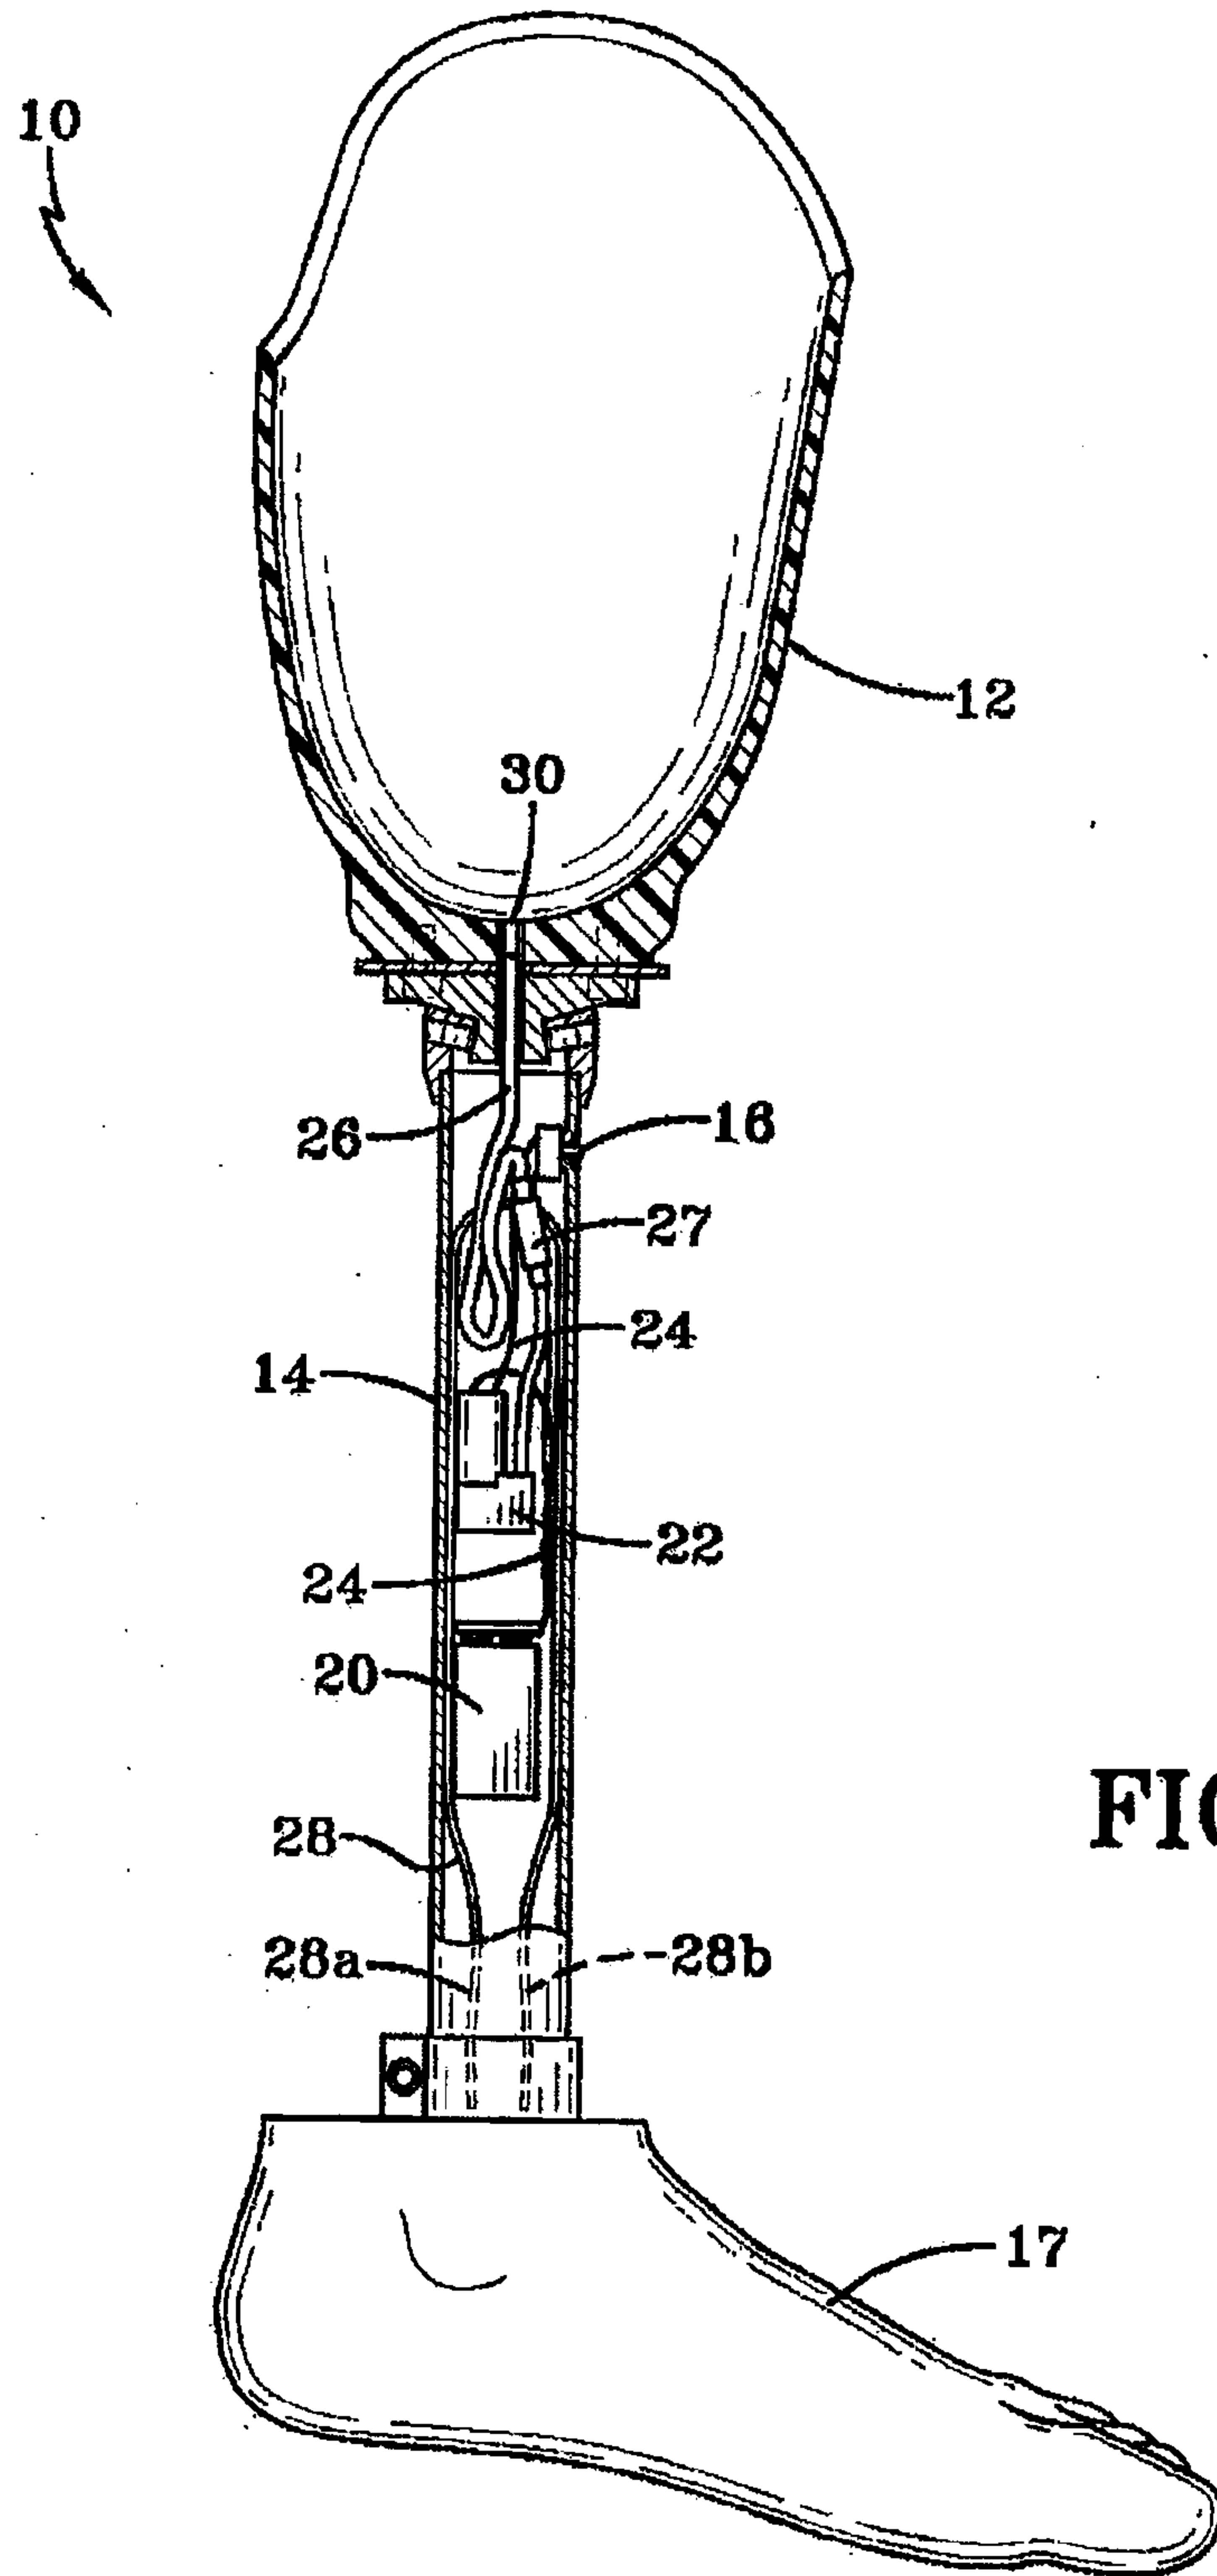

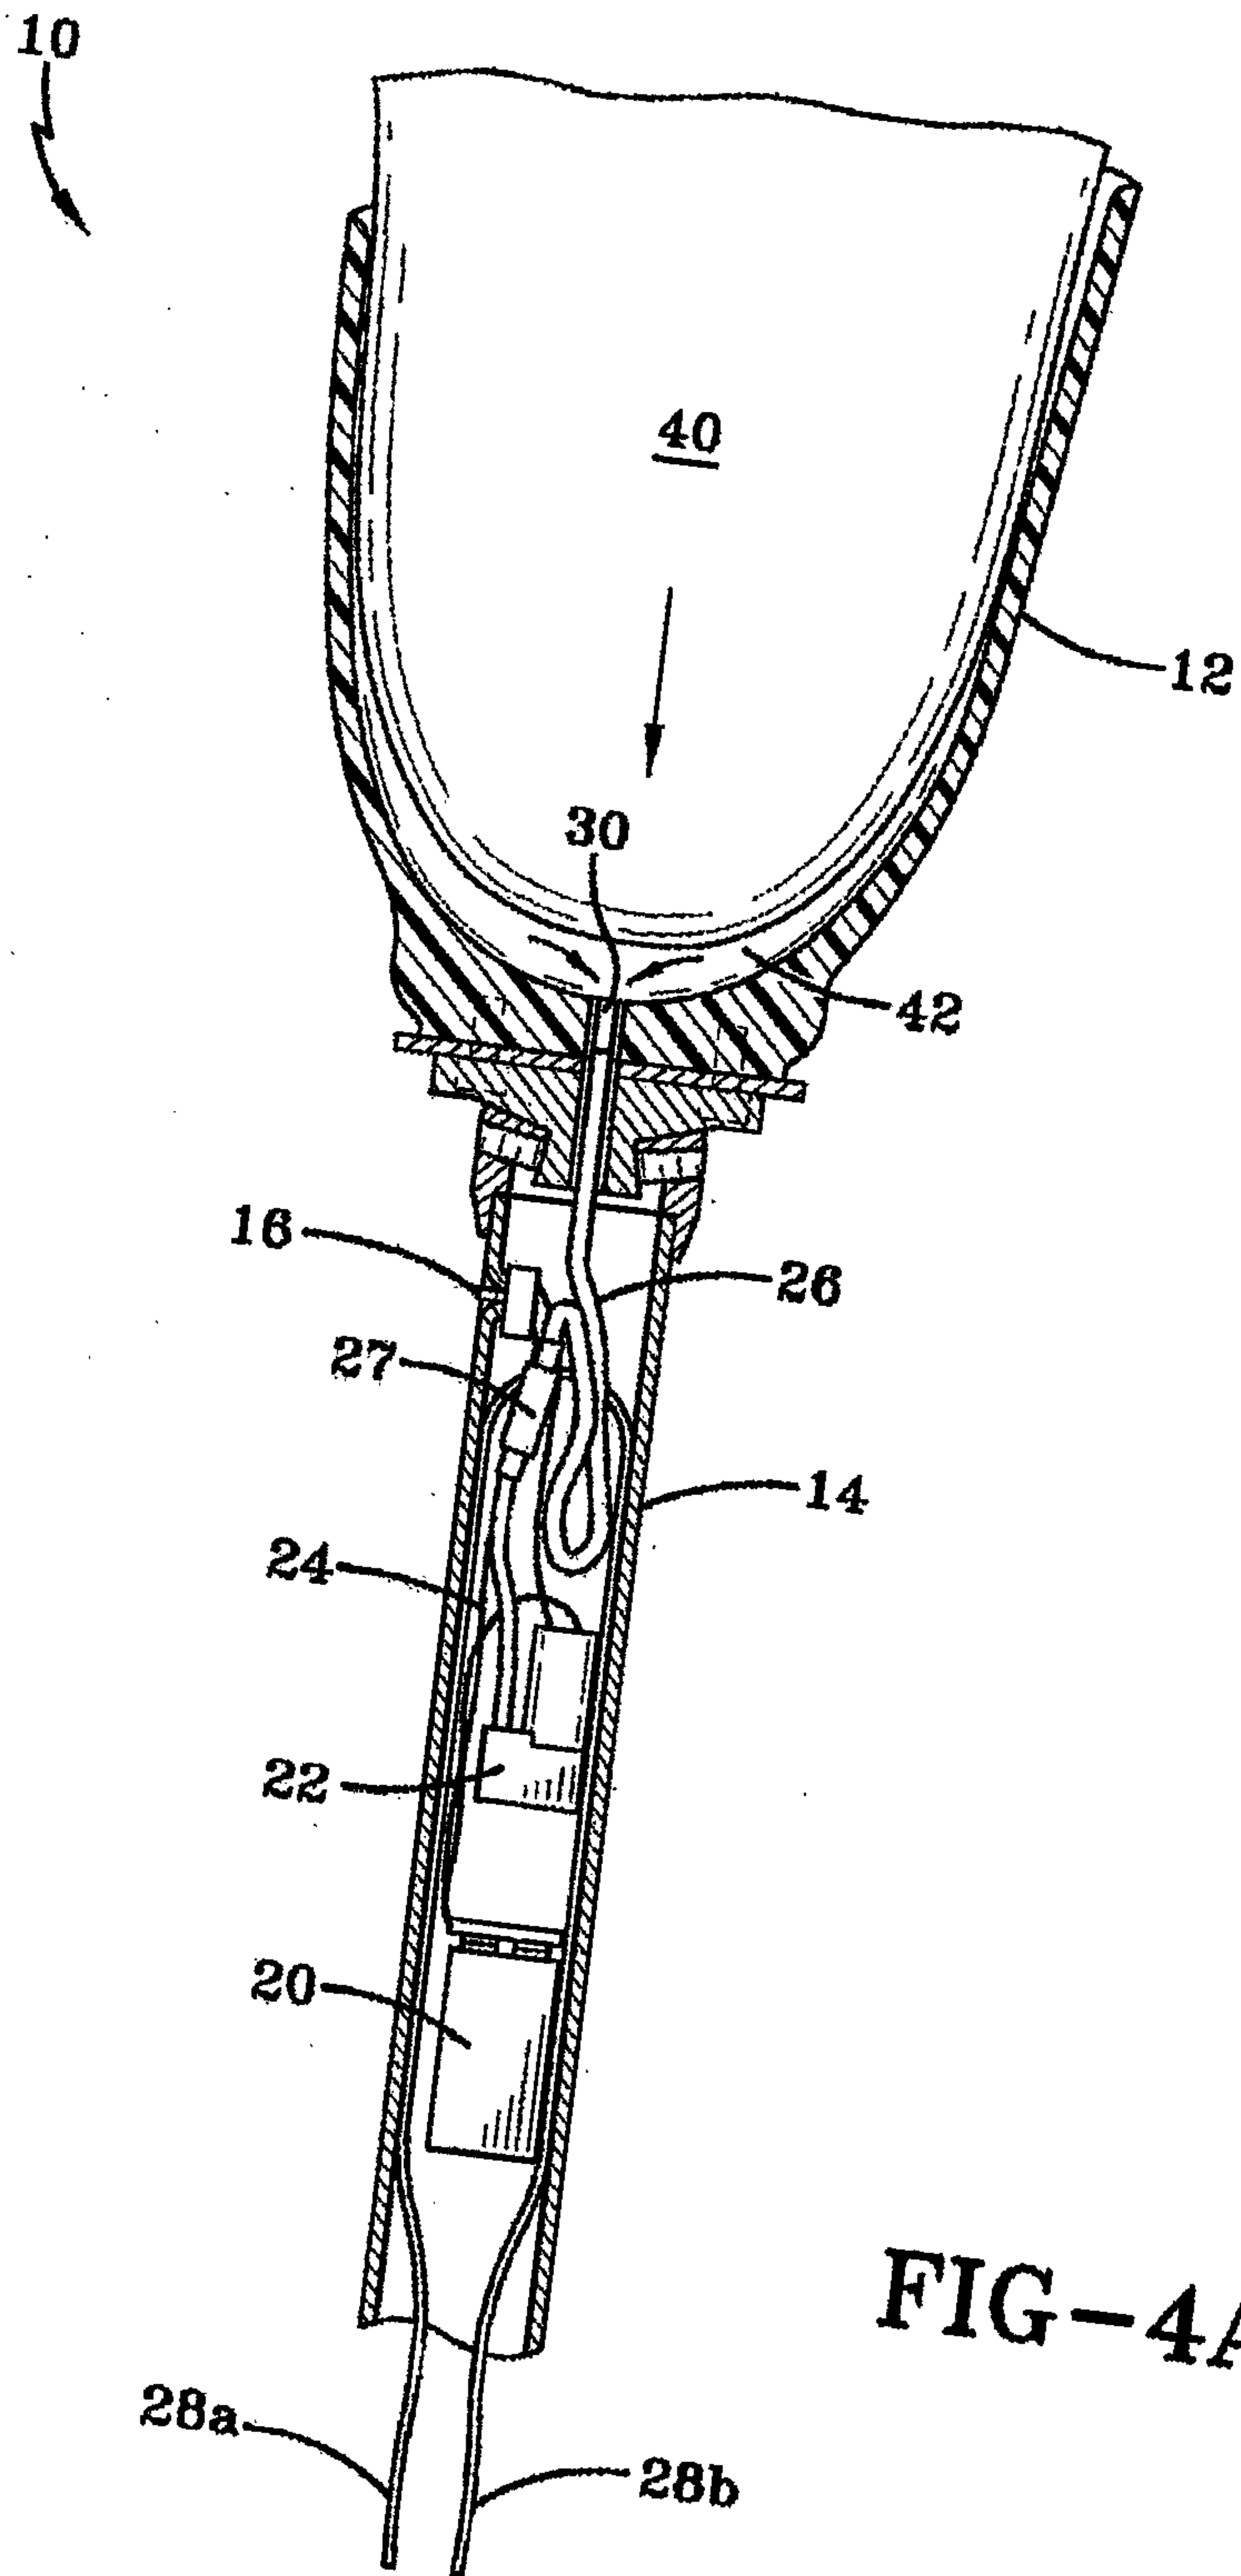


FIG-4A

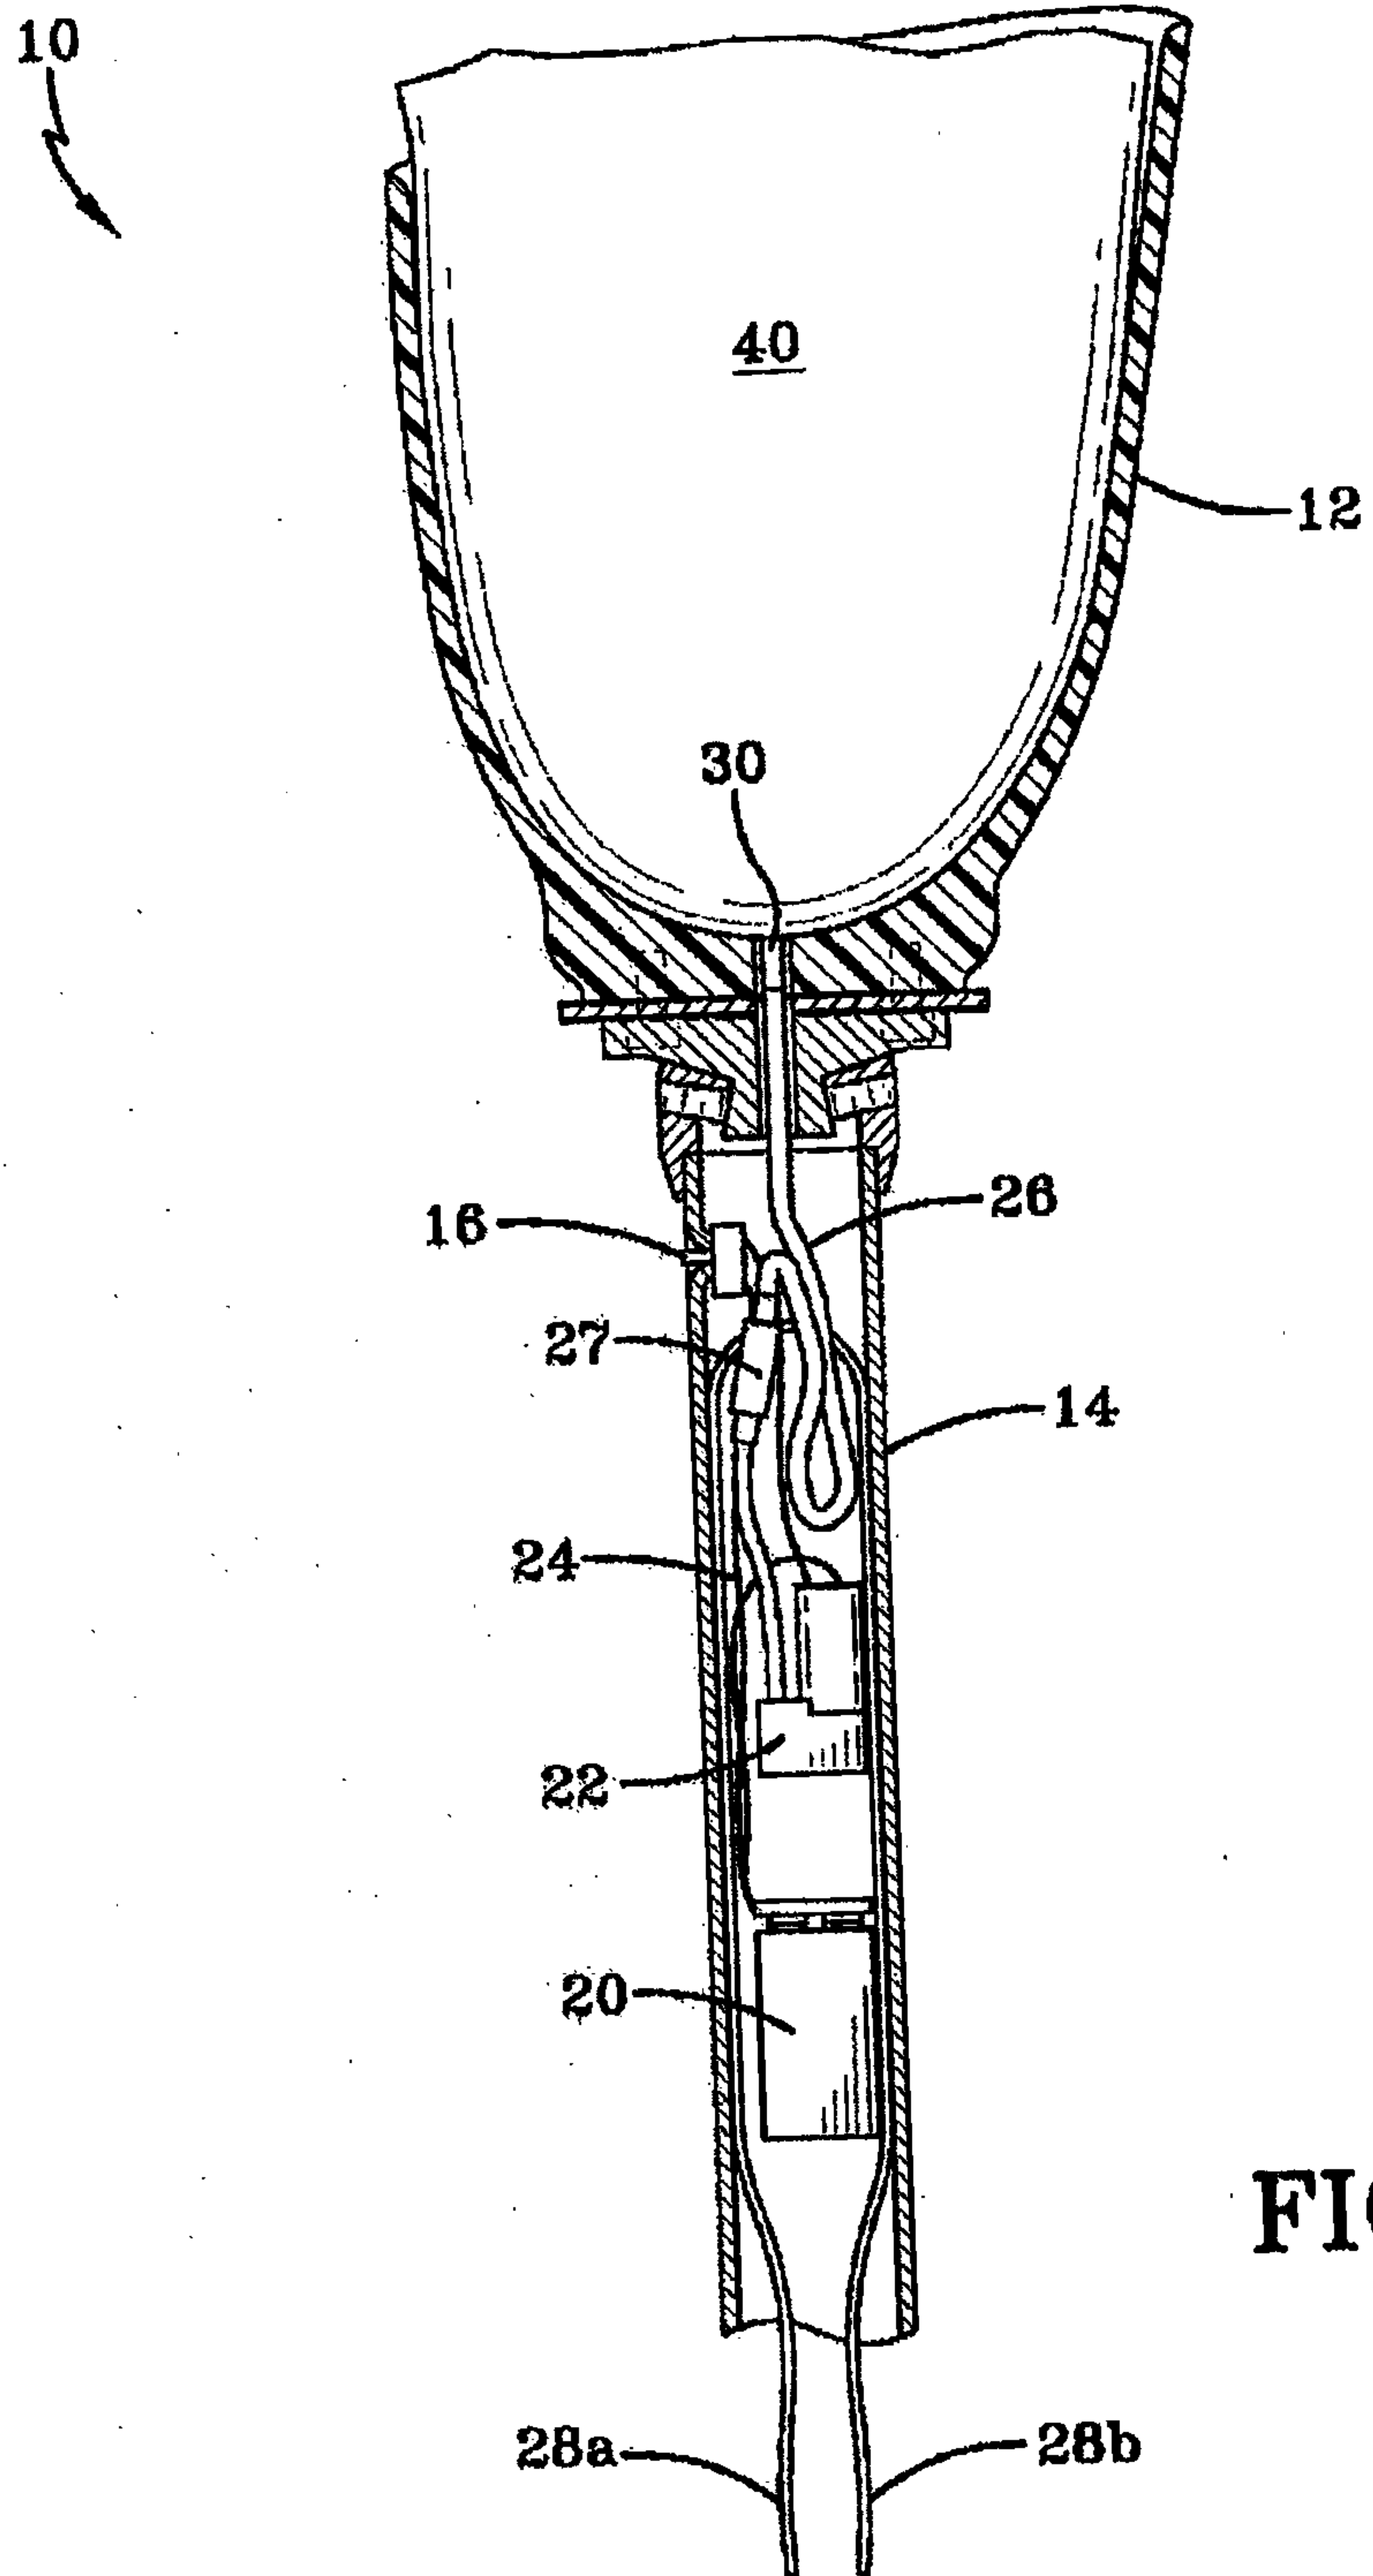
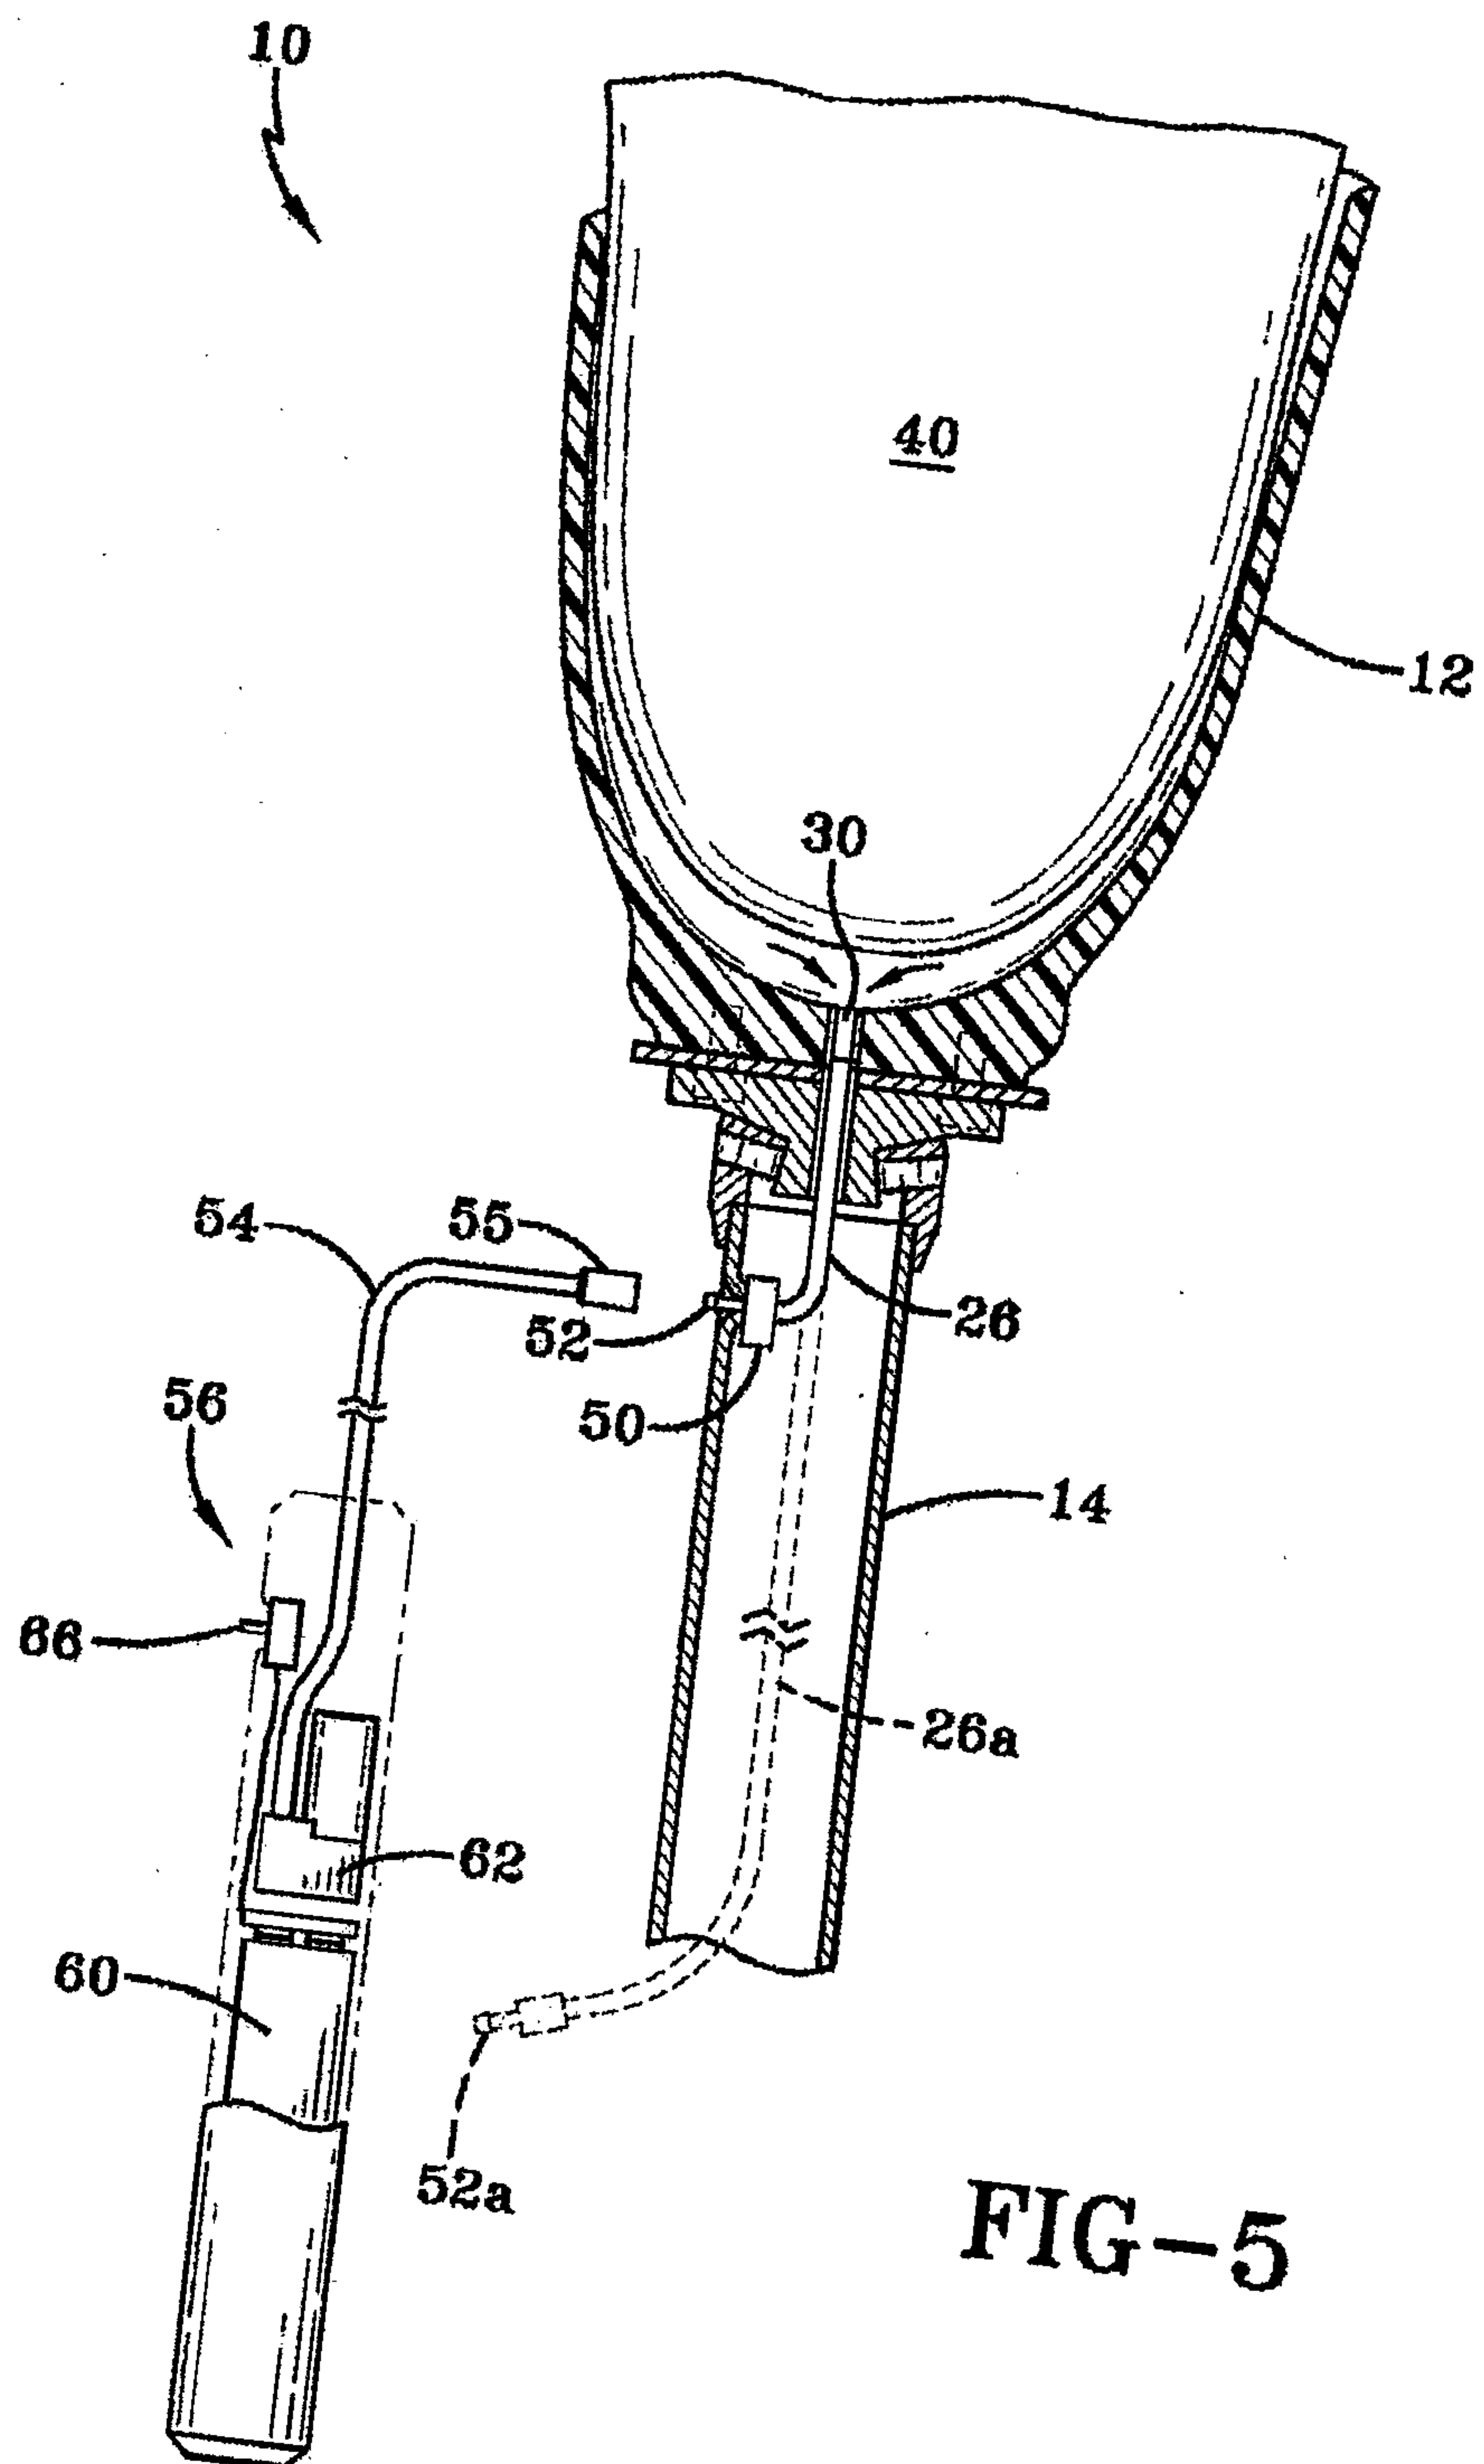


FIG-4B



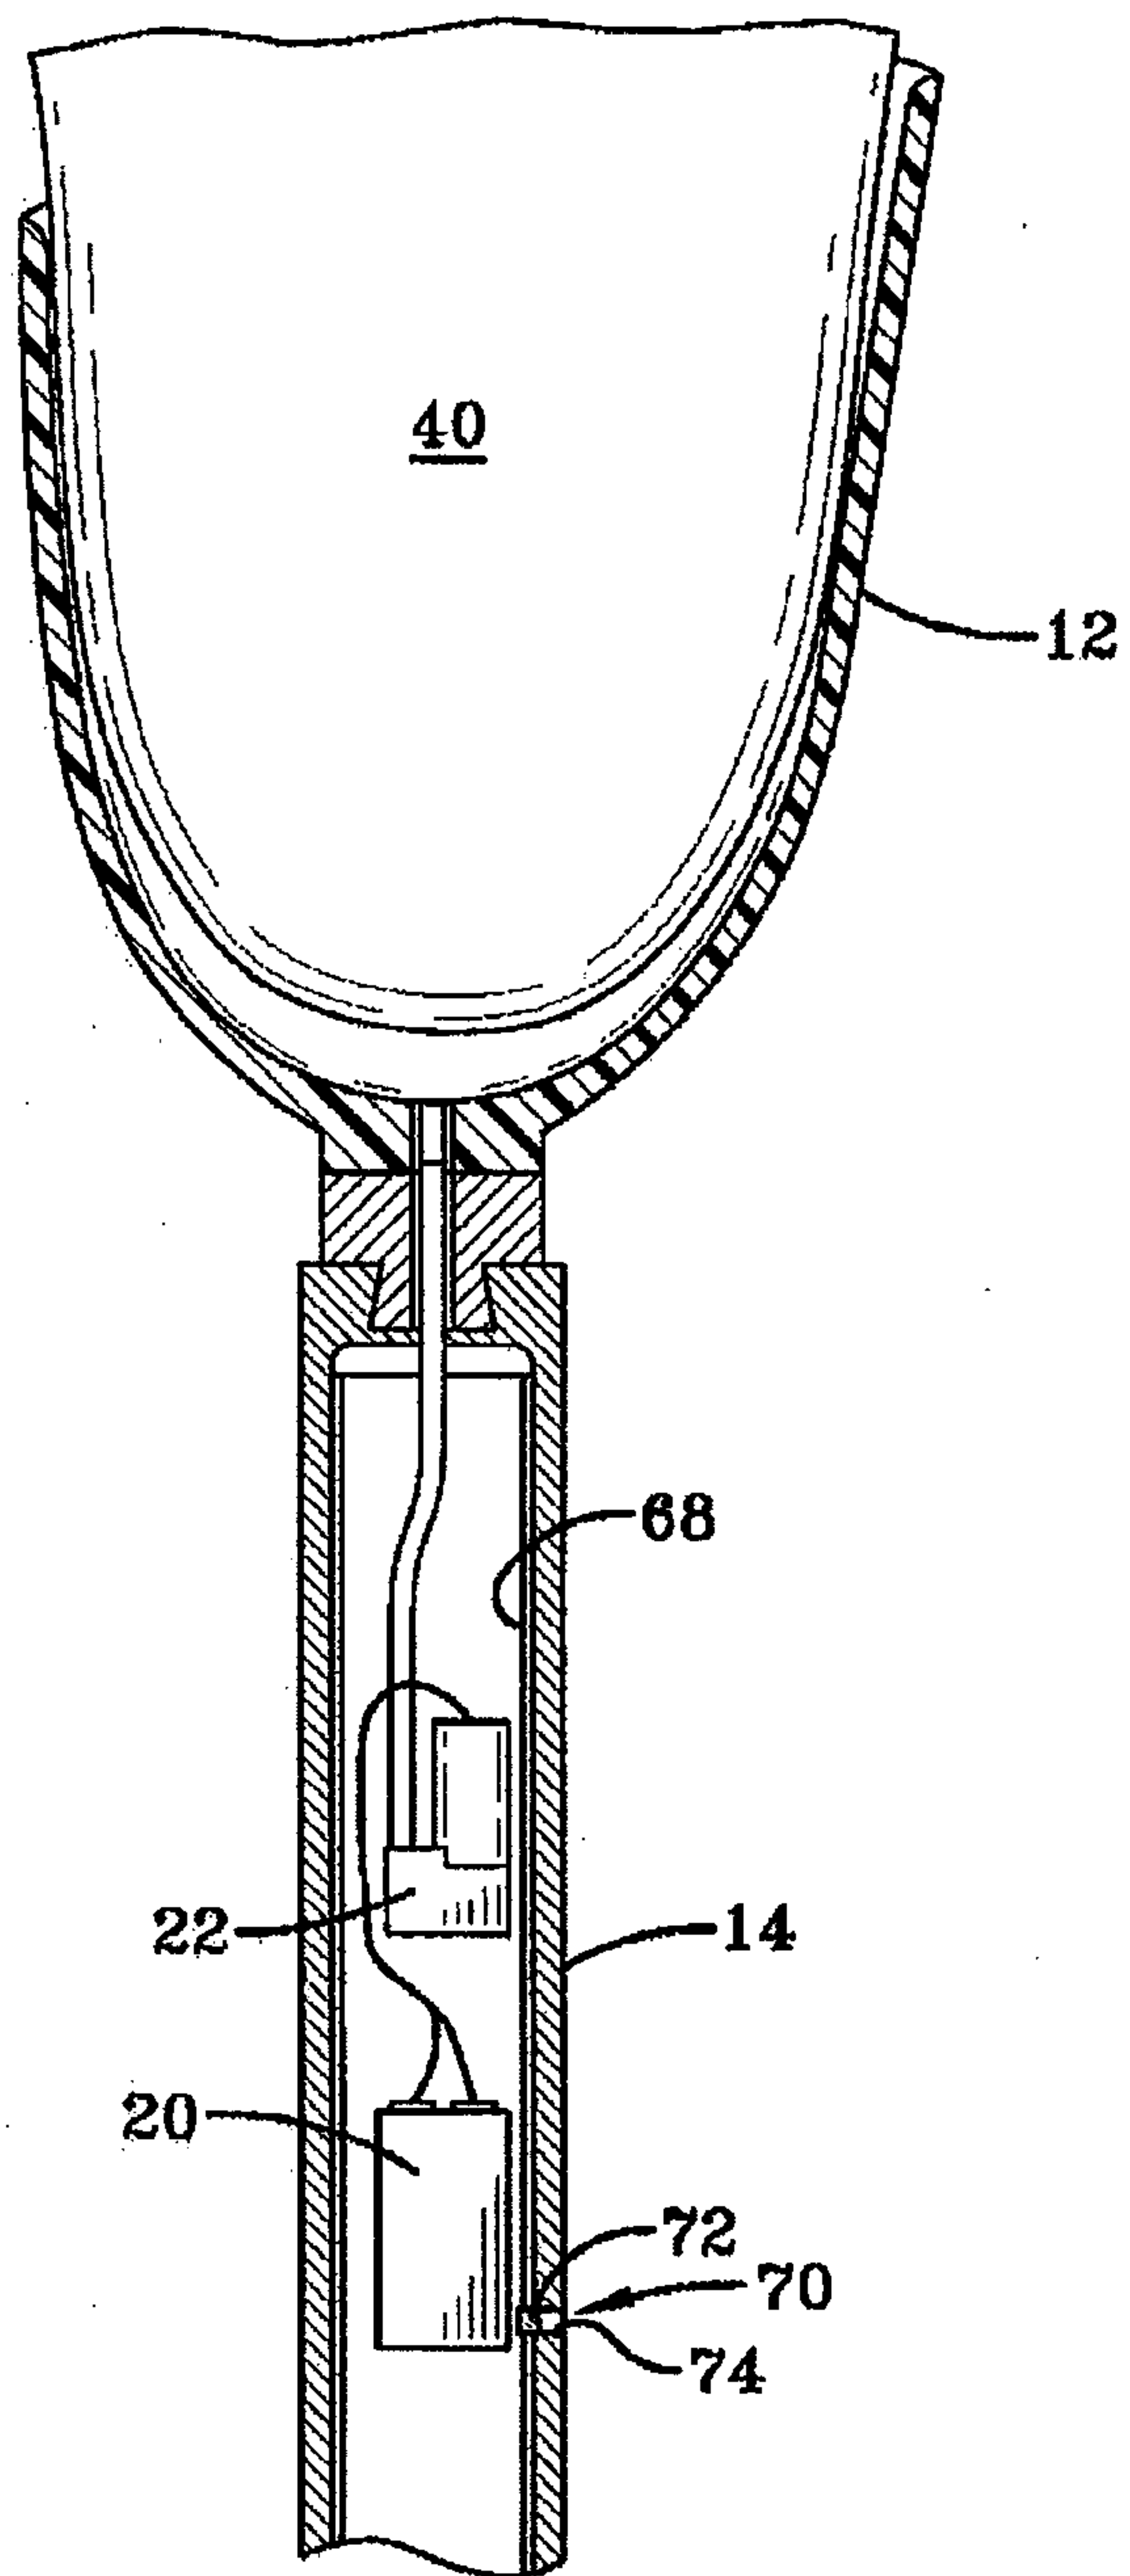


FIG-6

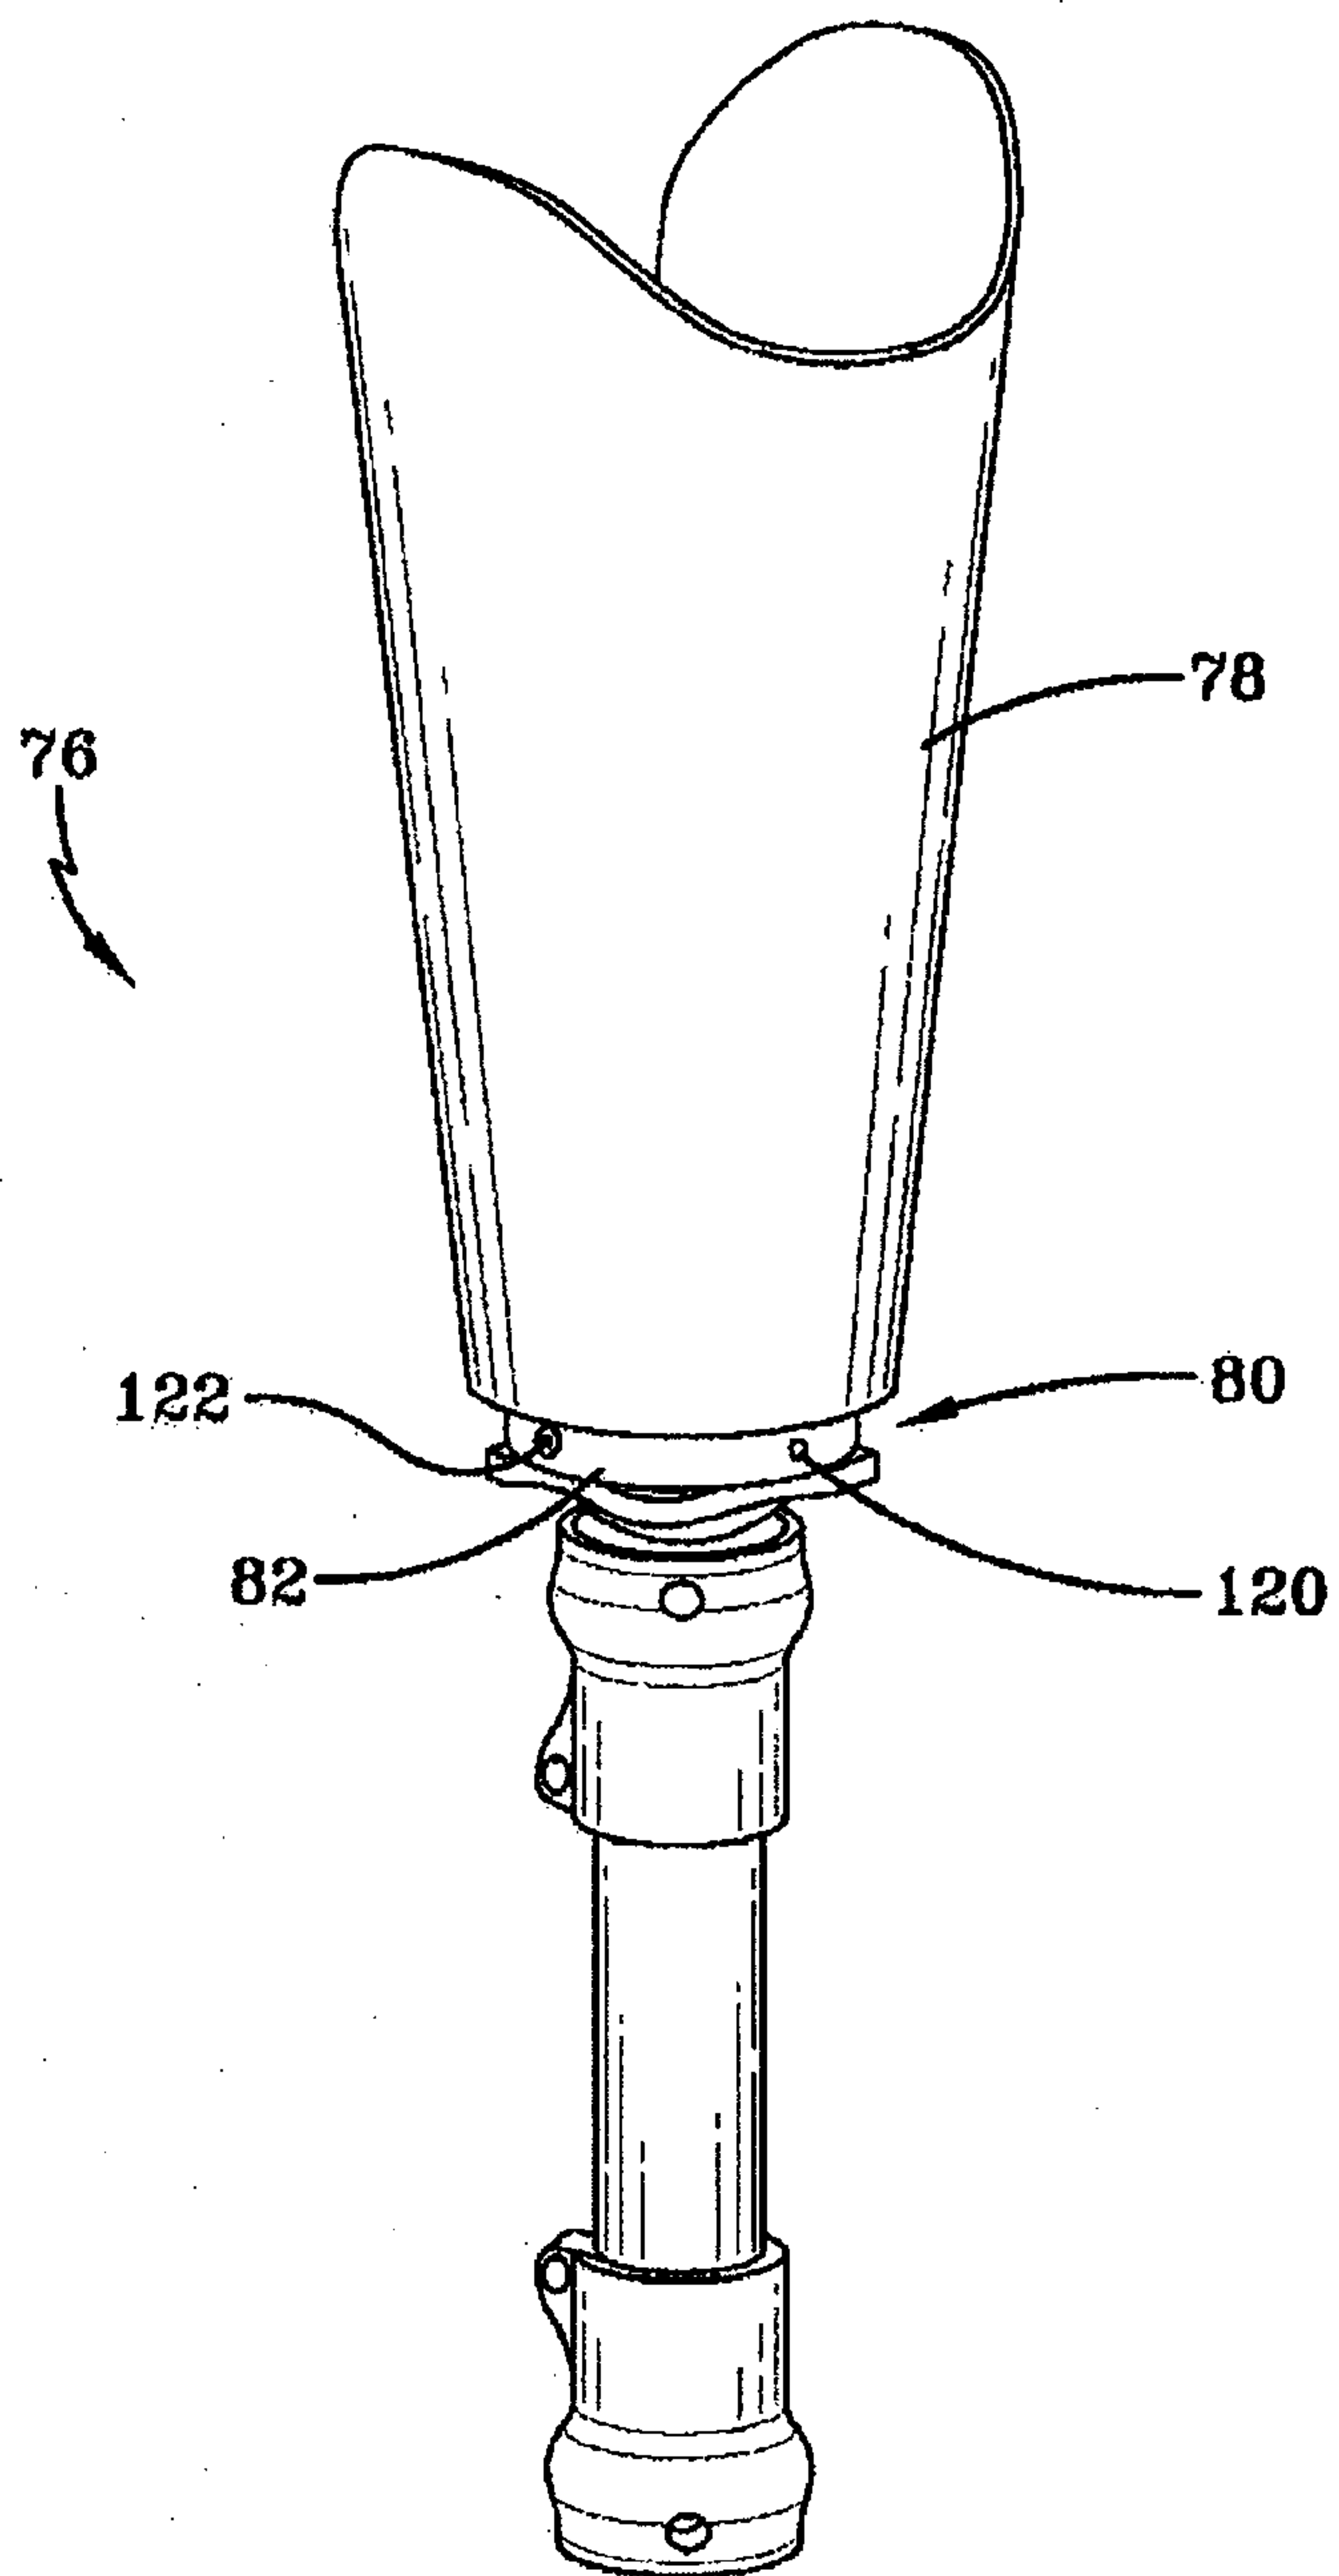


FIG-7

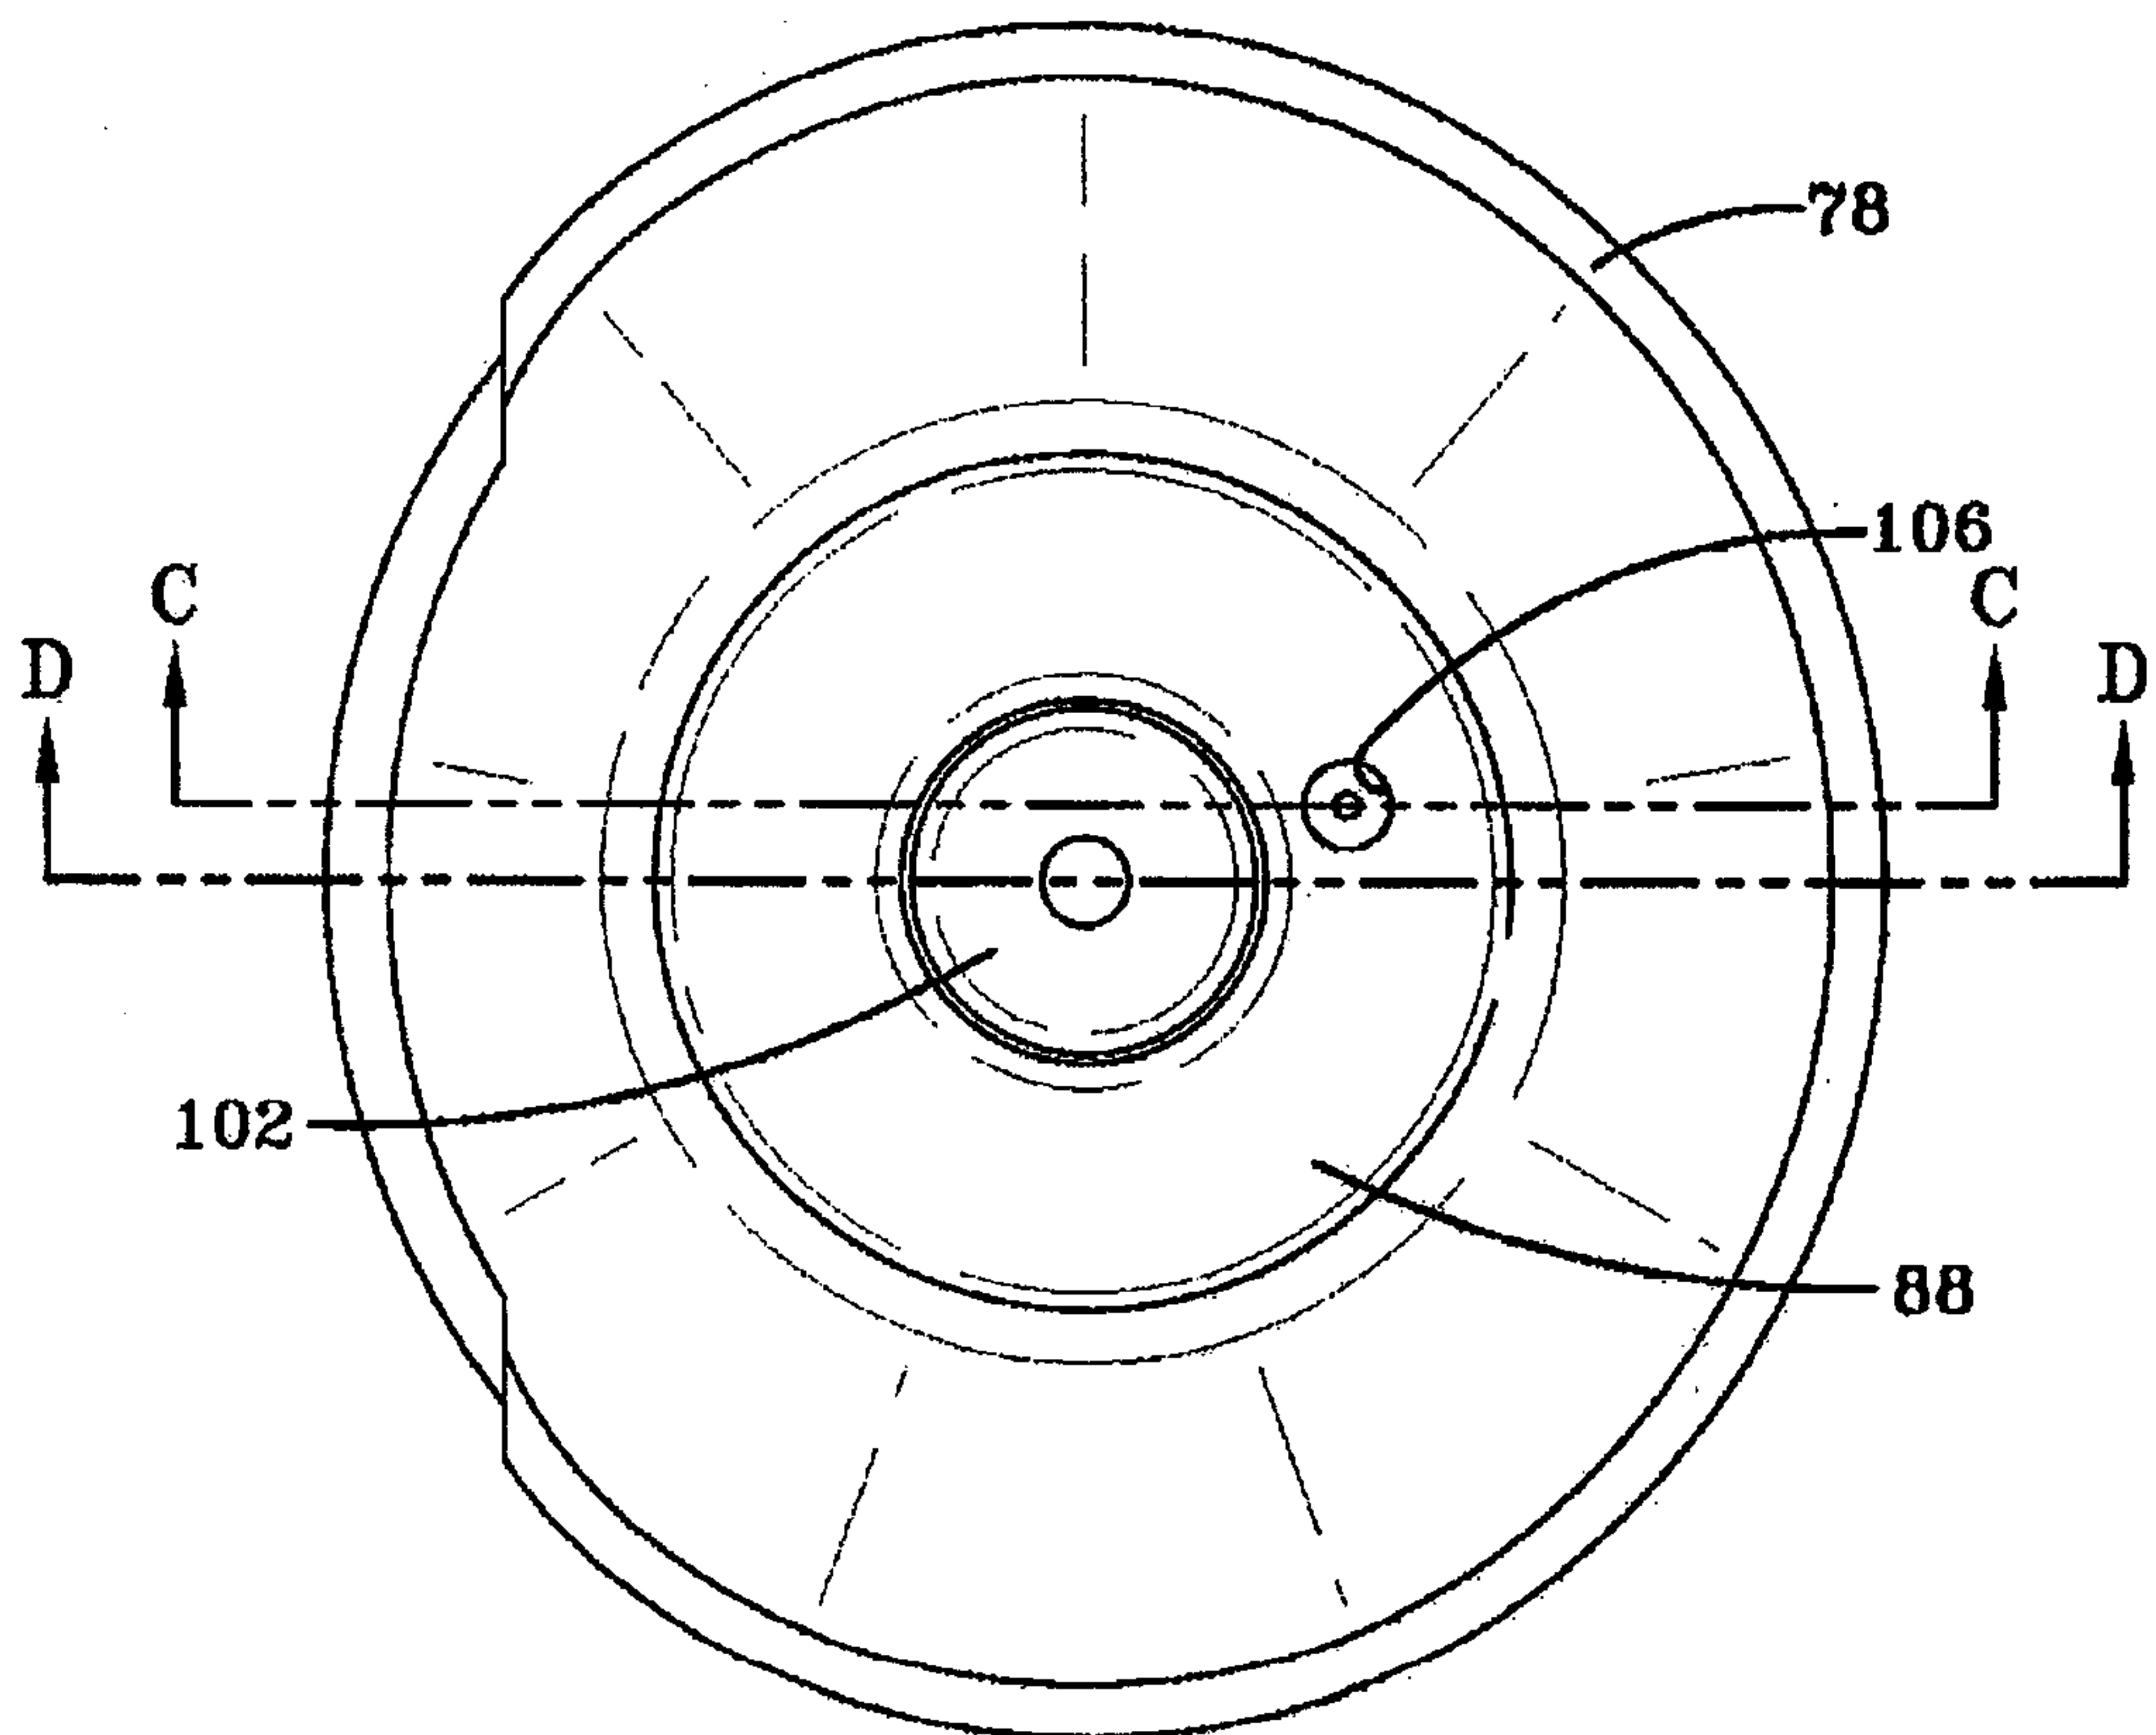


FIG-8

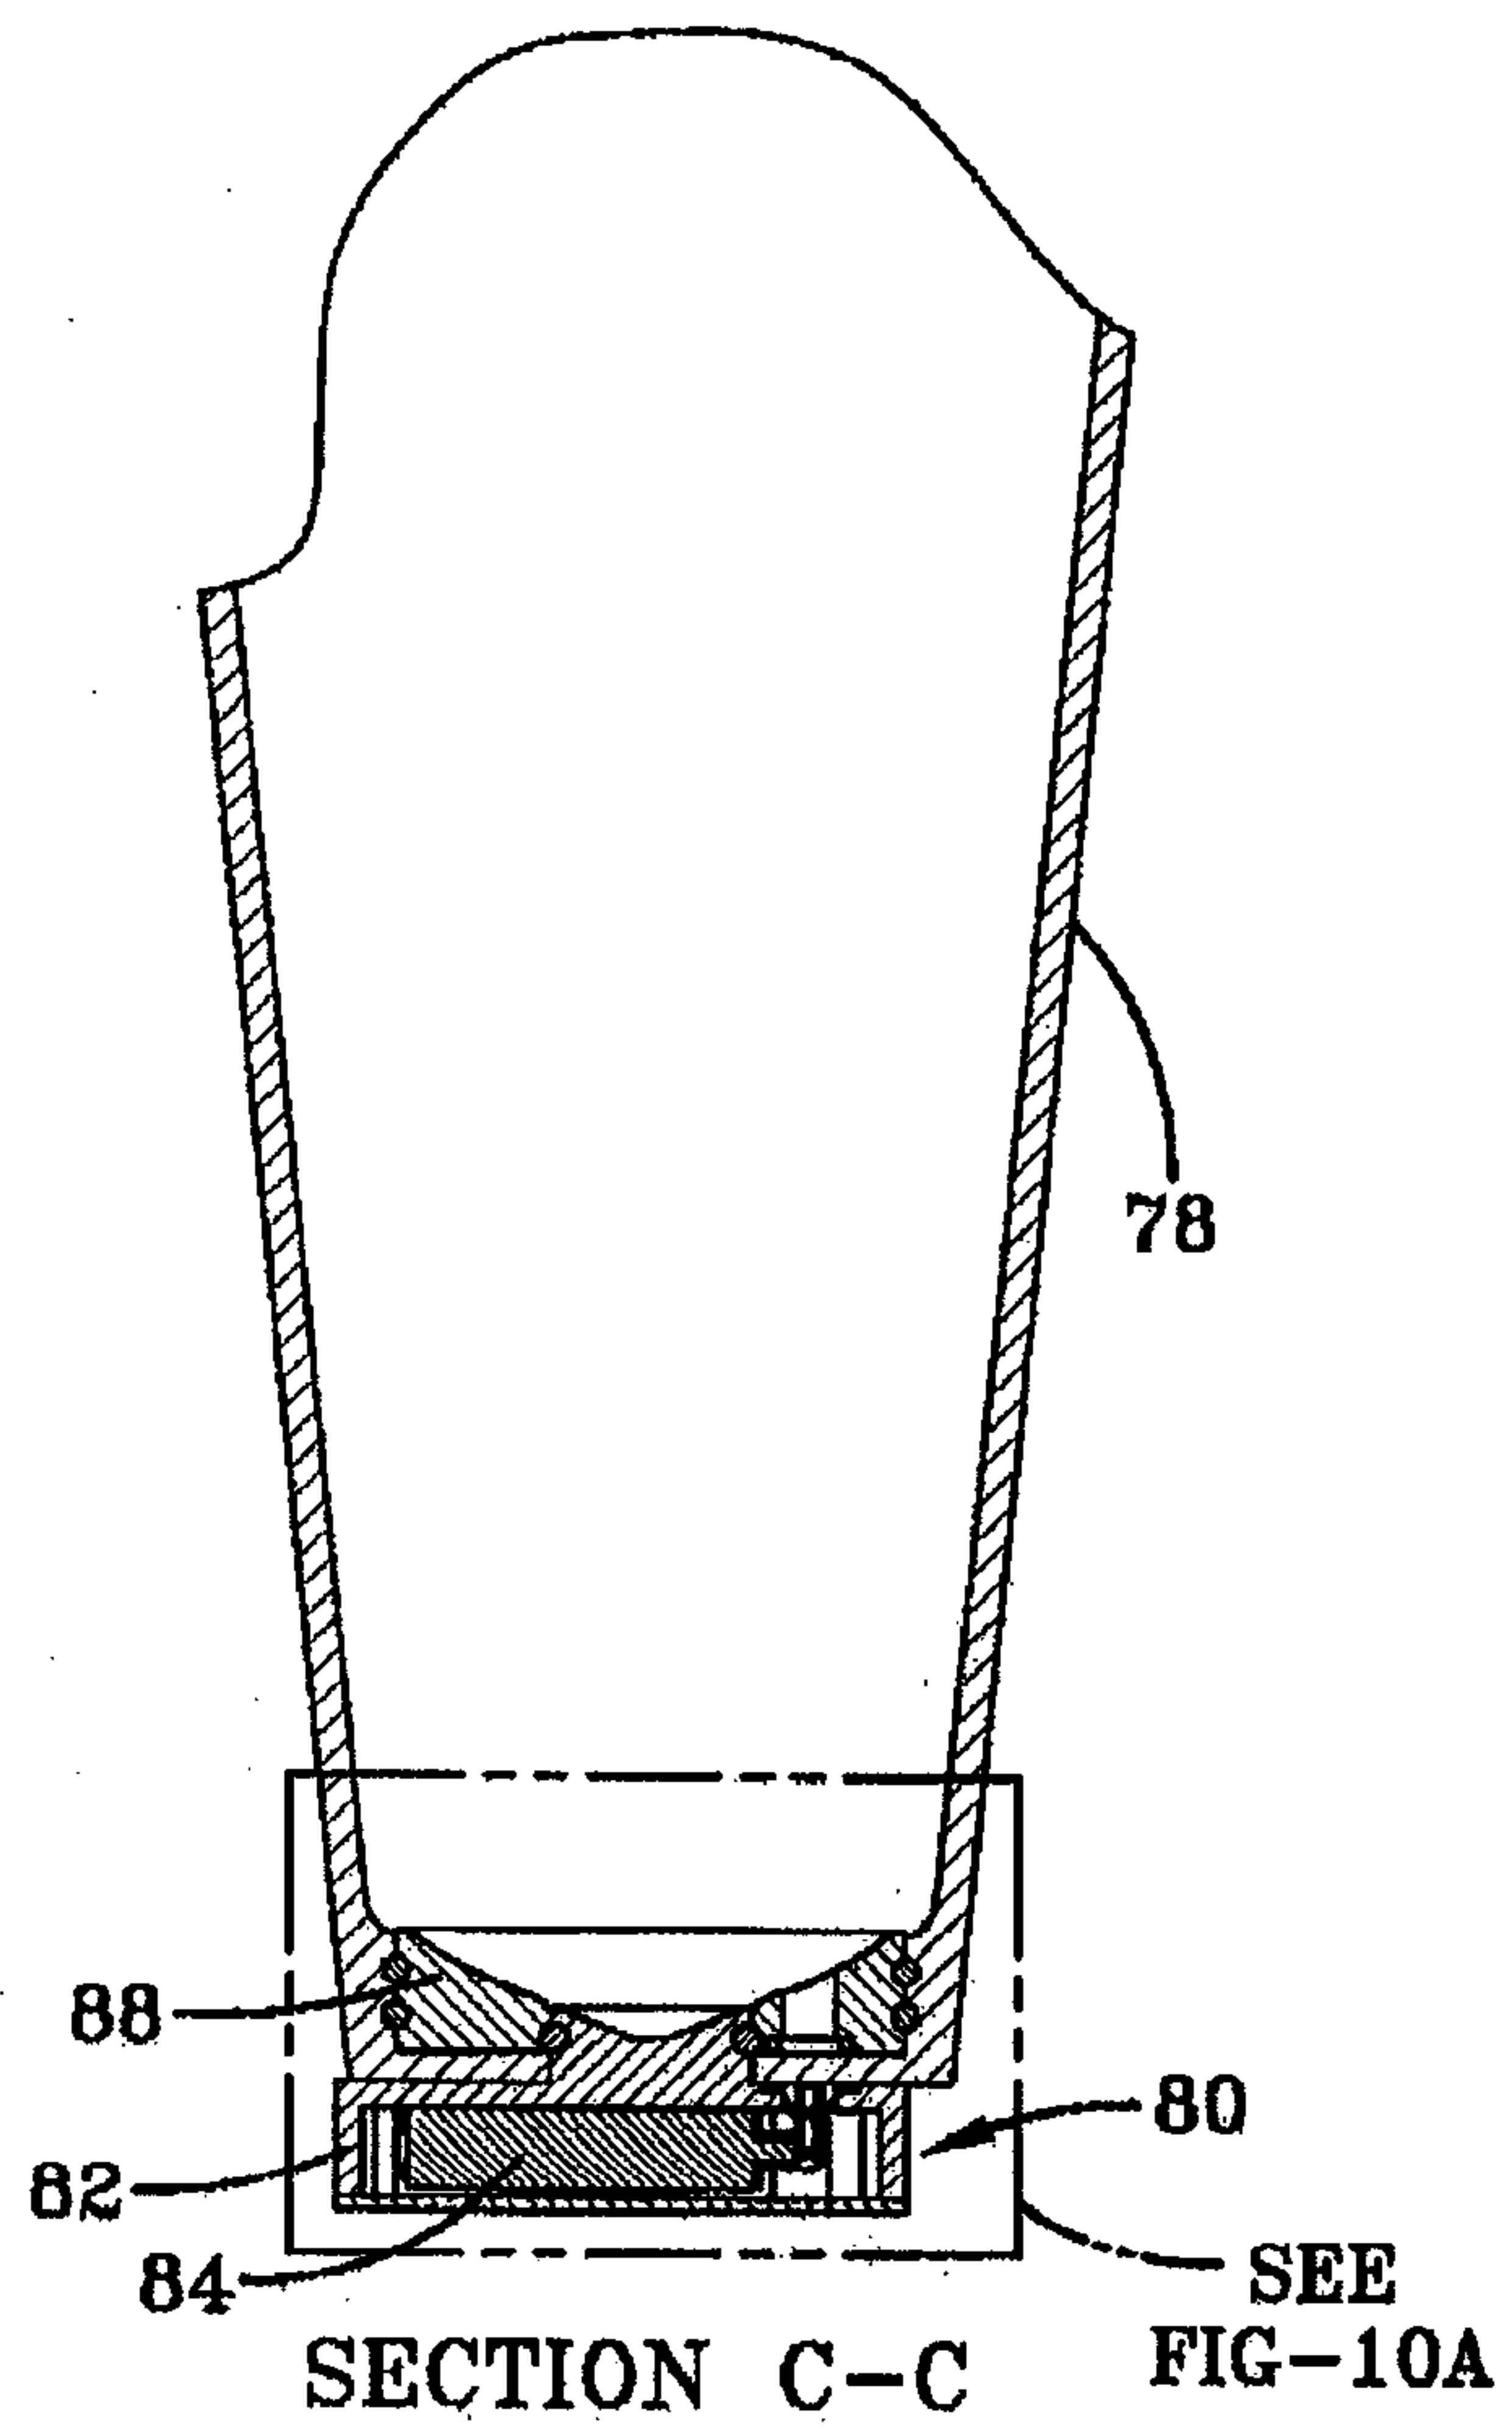


FIG-9

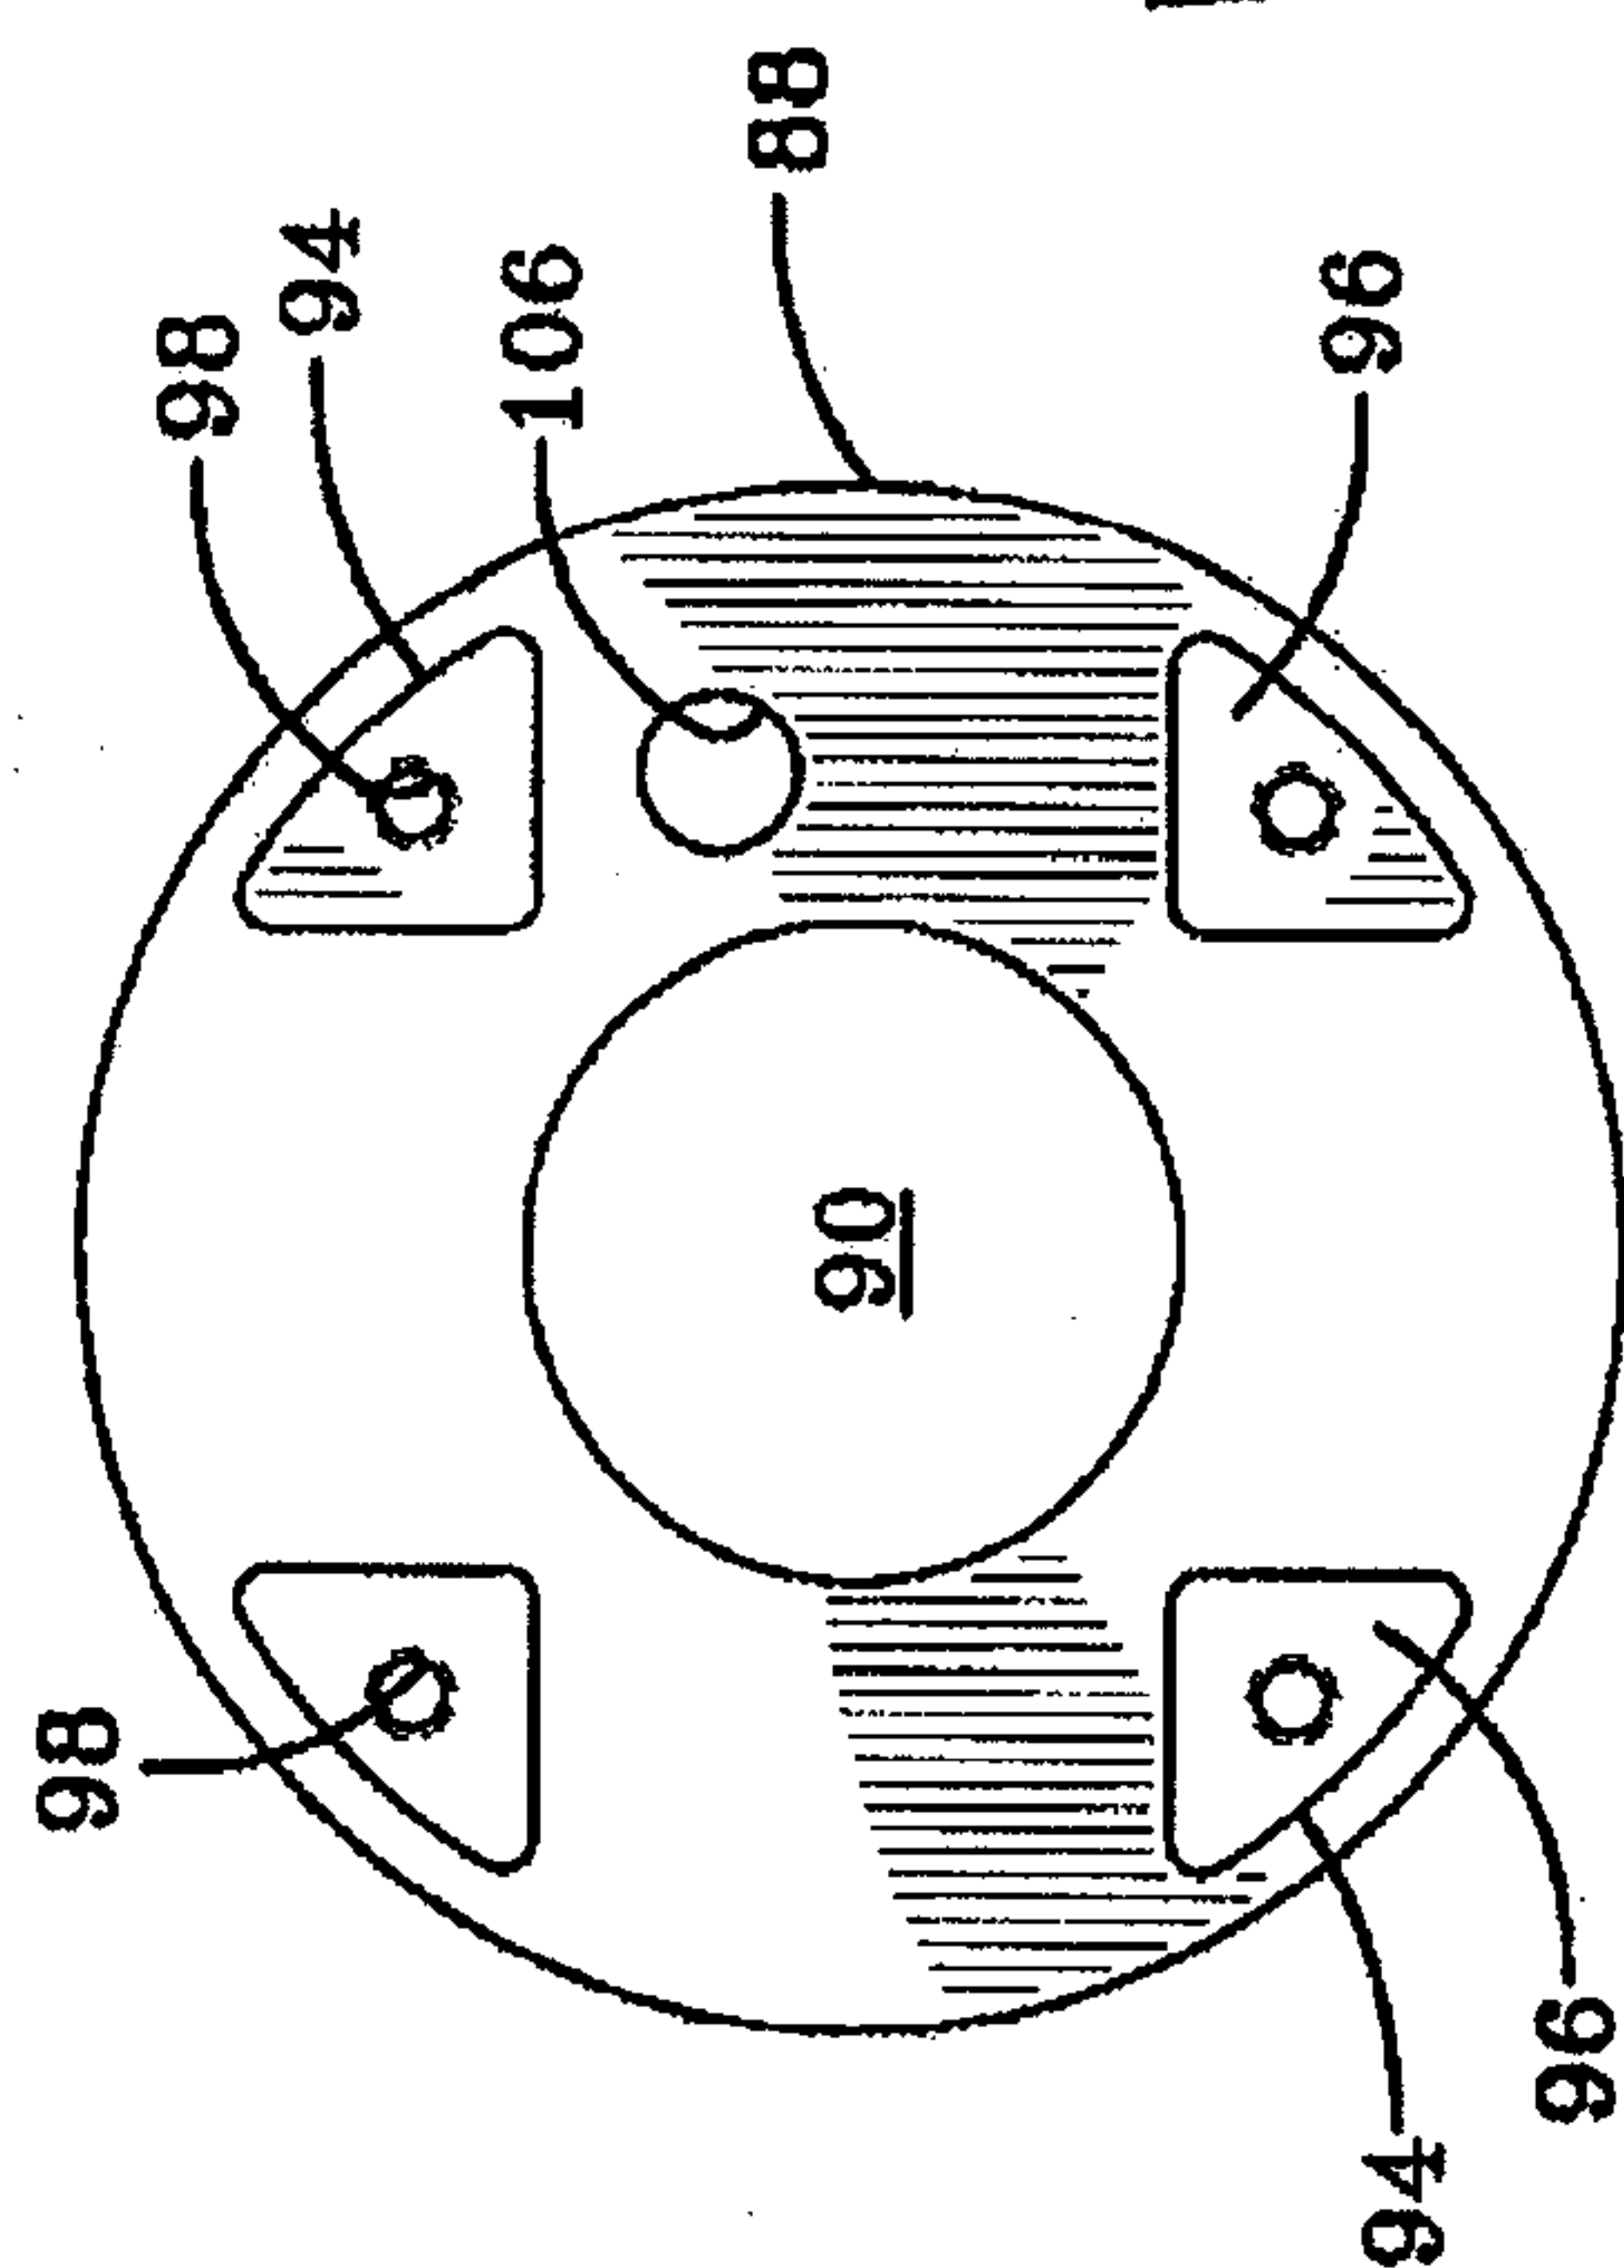


FIG-10B

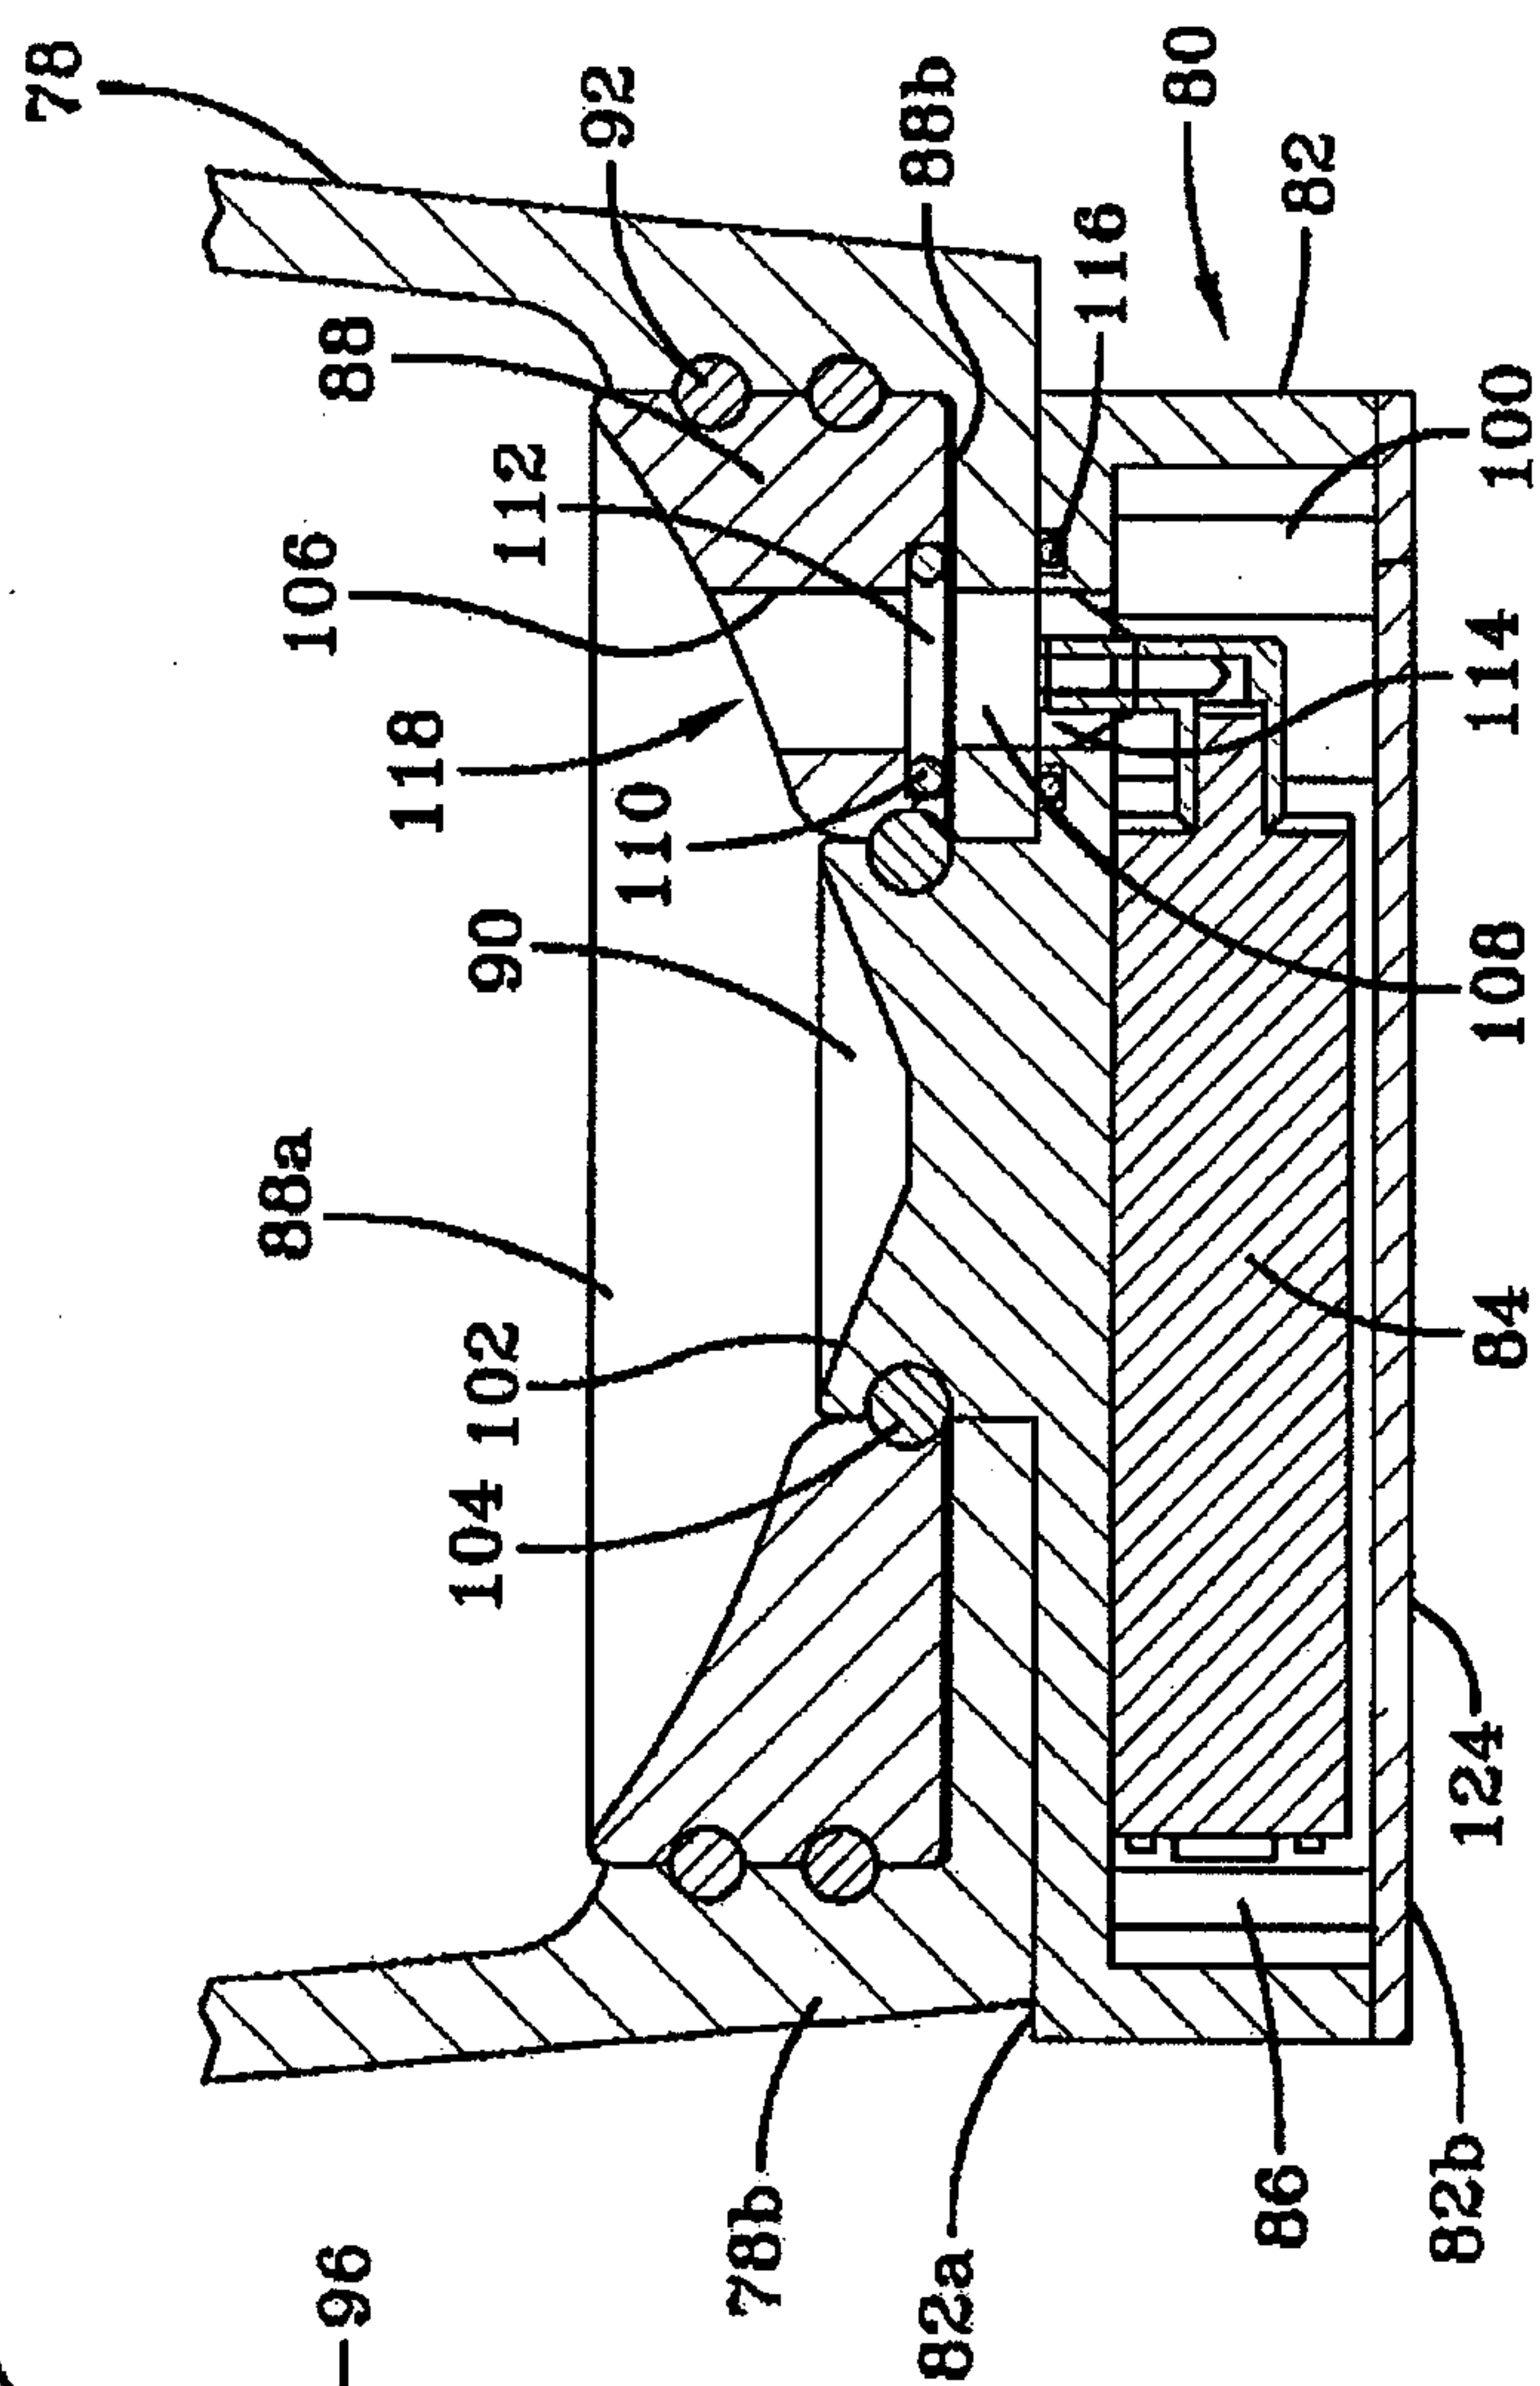


FIG-10A

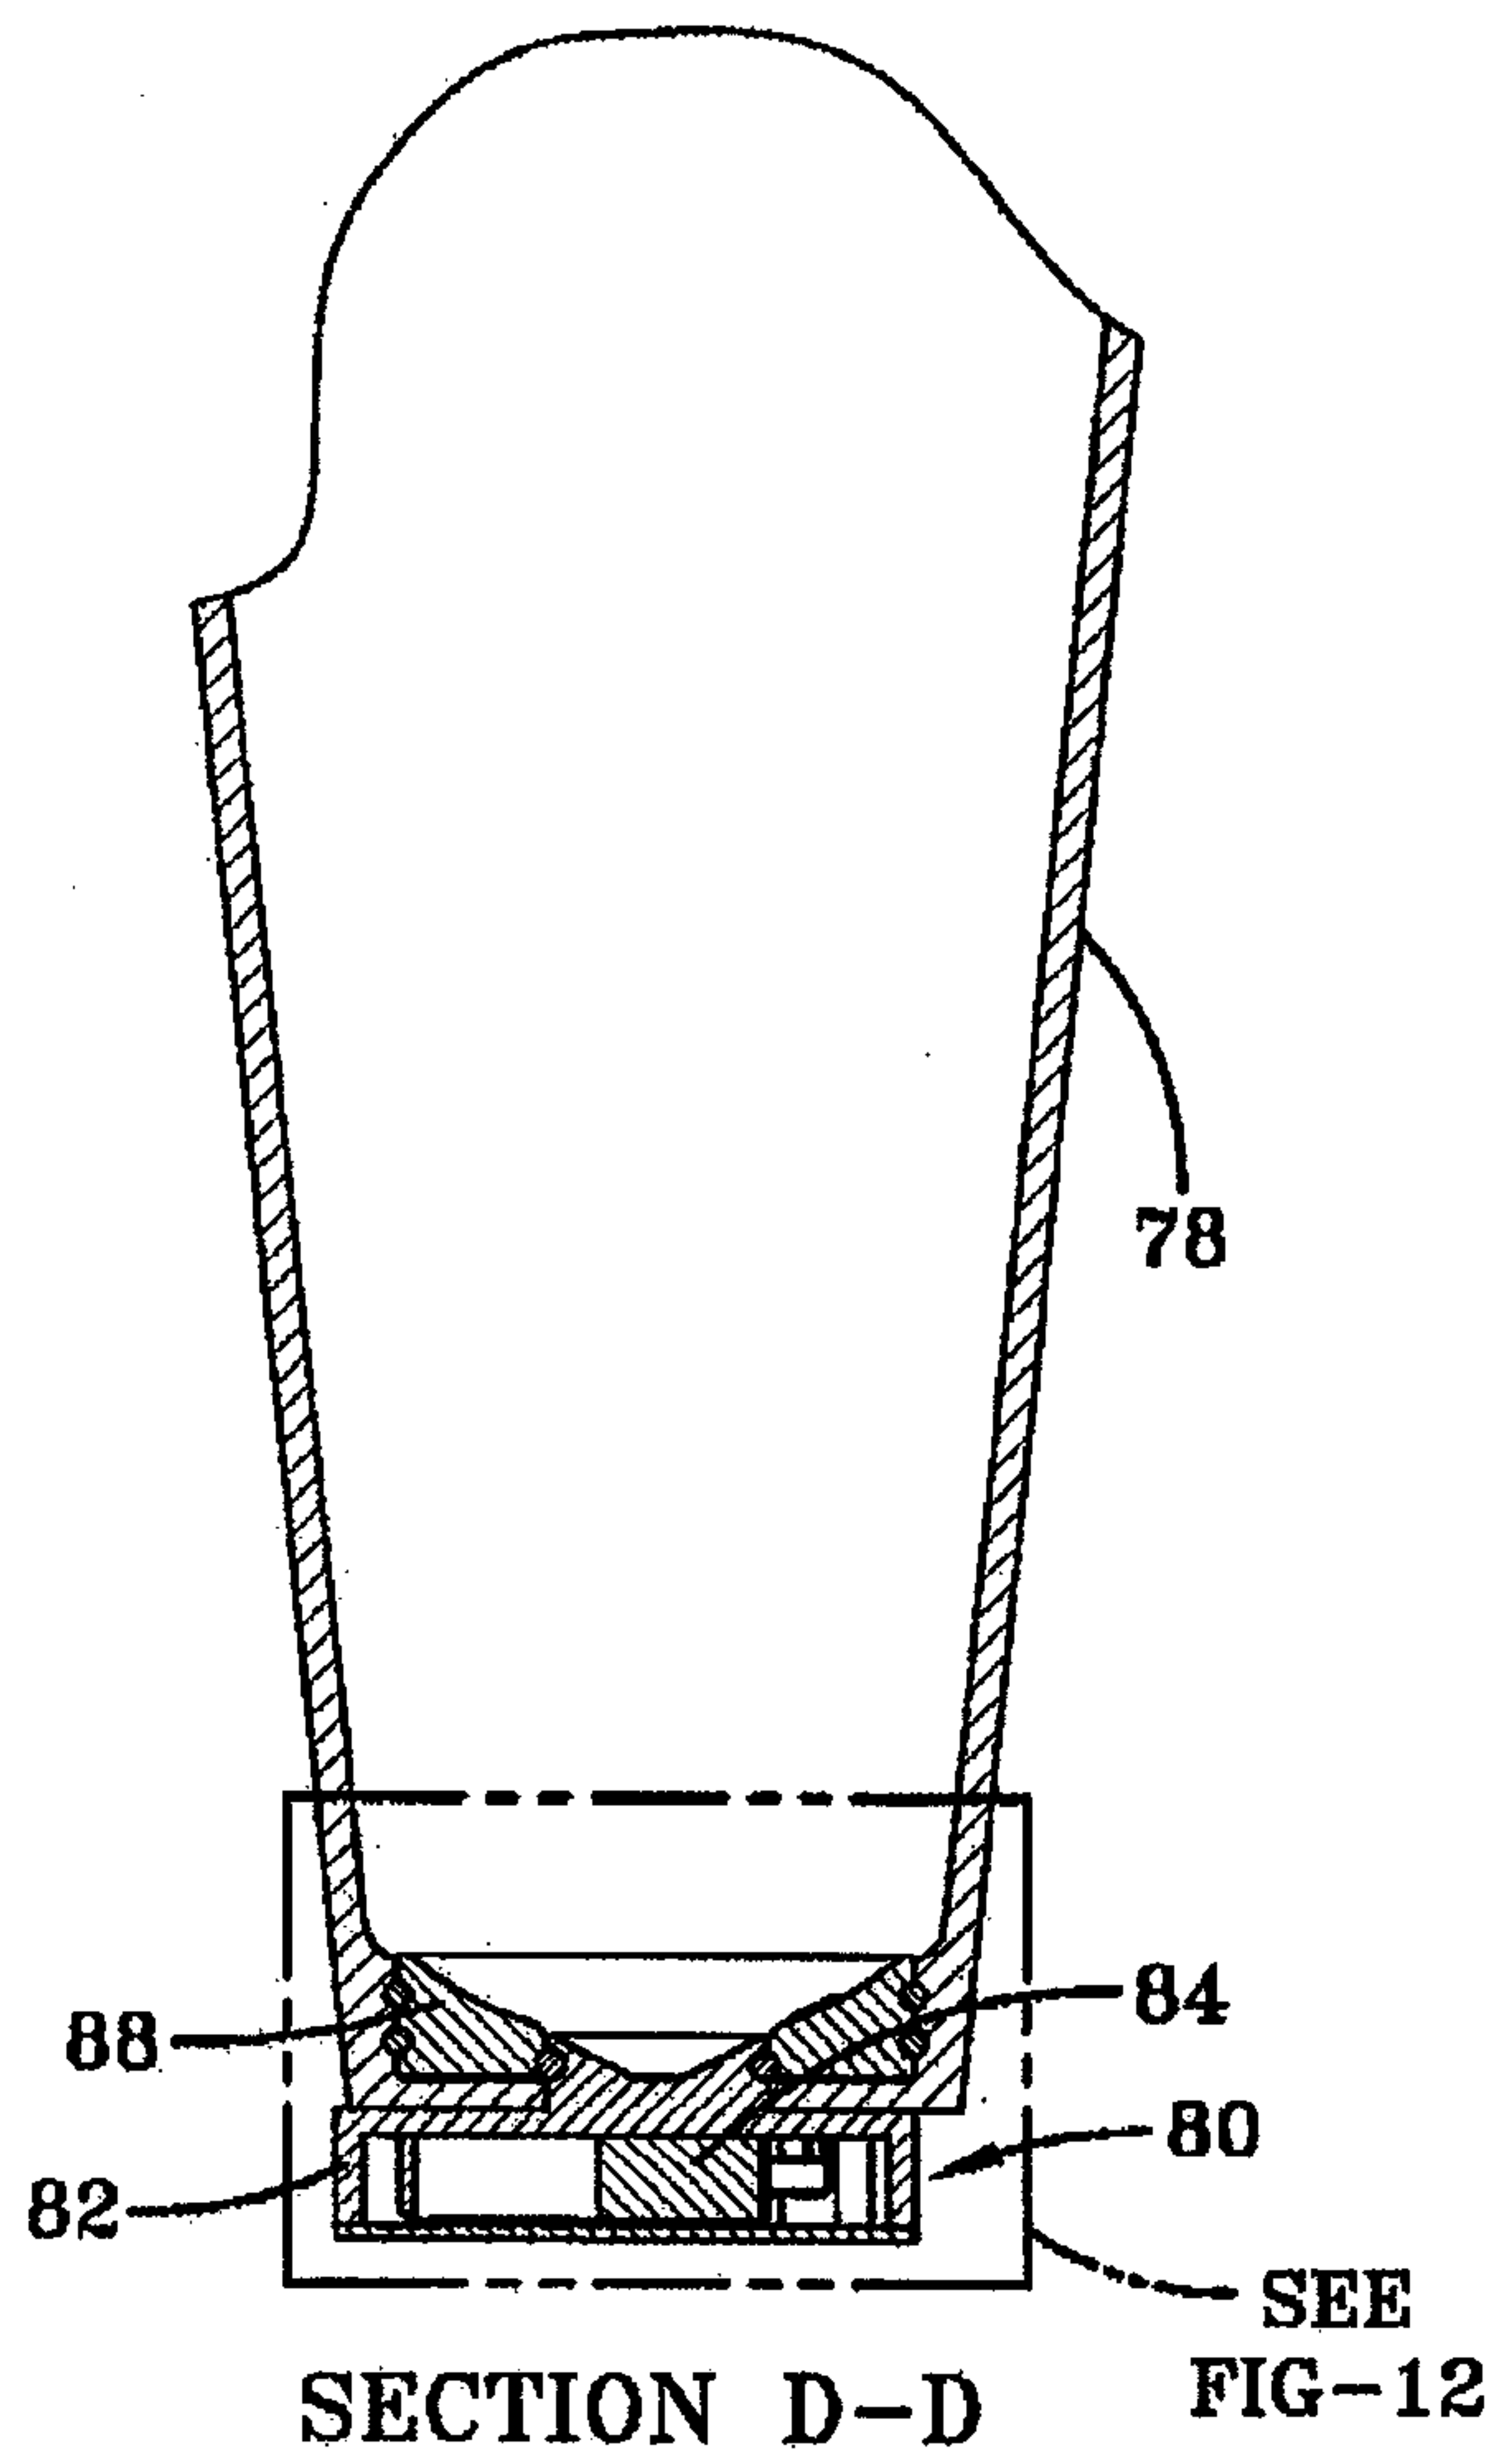


FIG-11

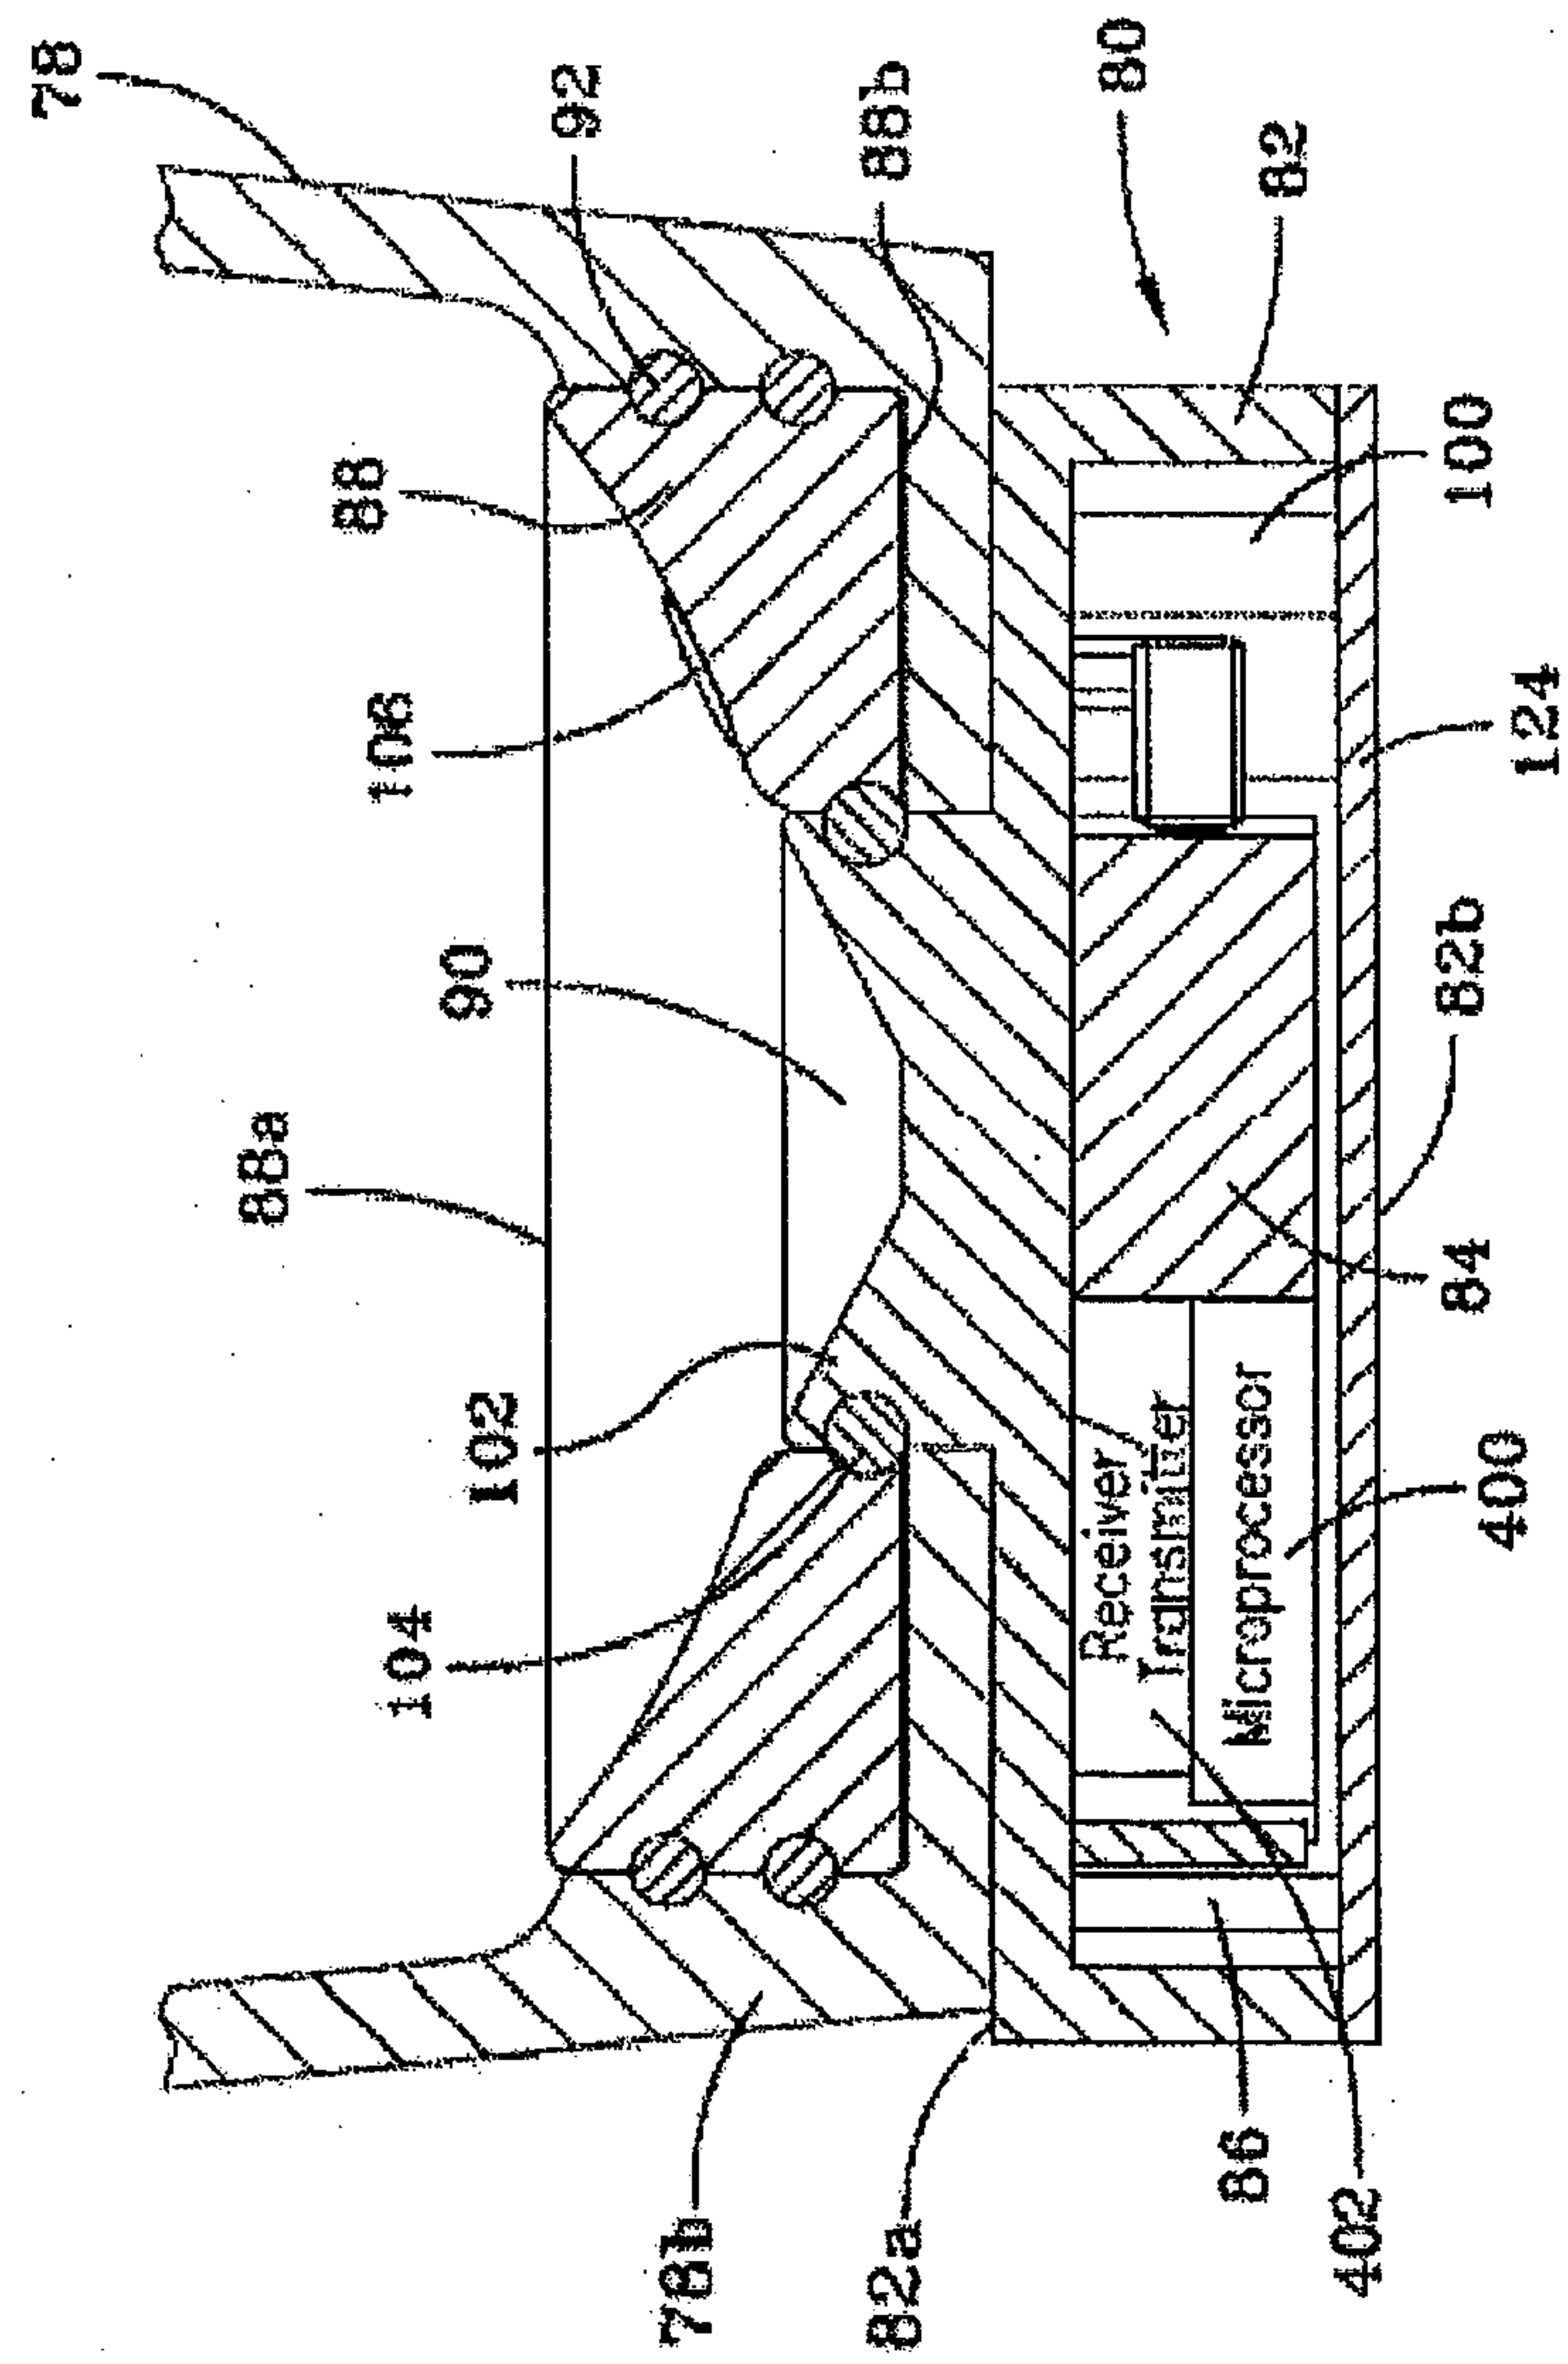


FIG-12

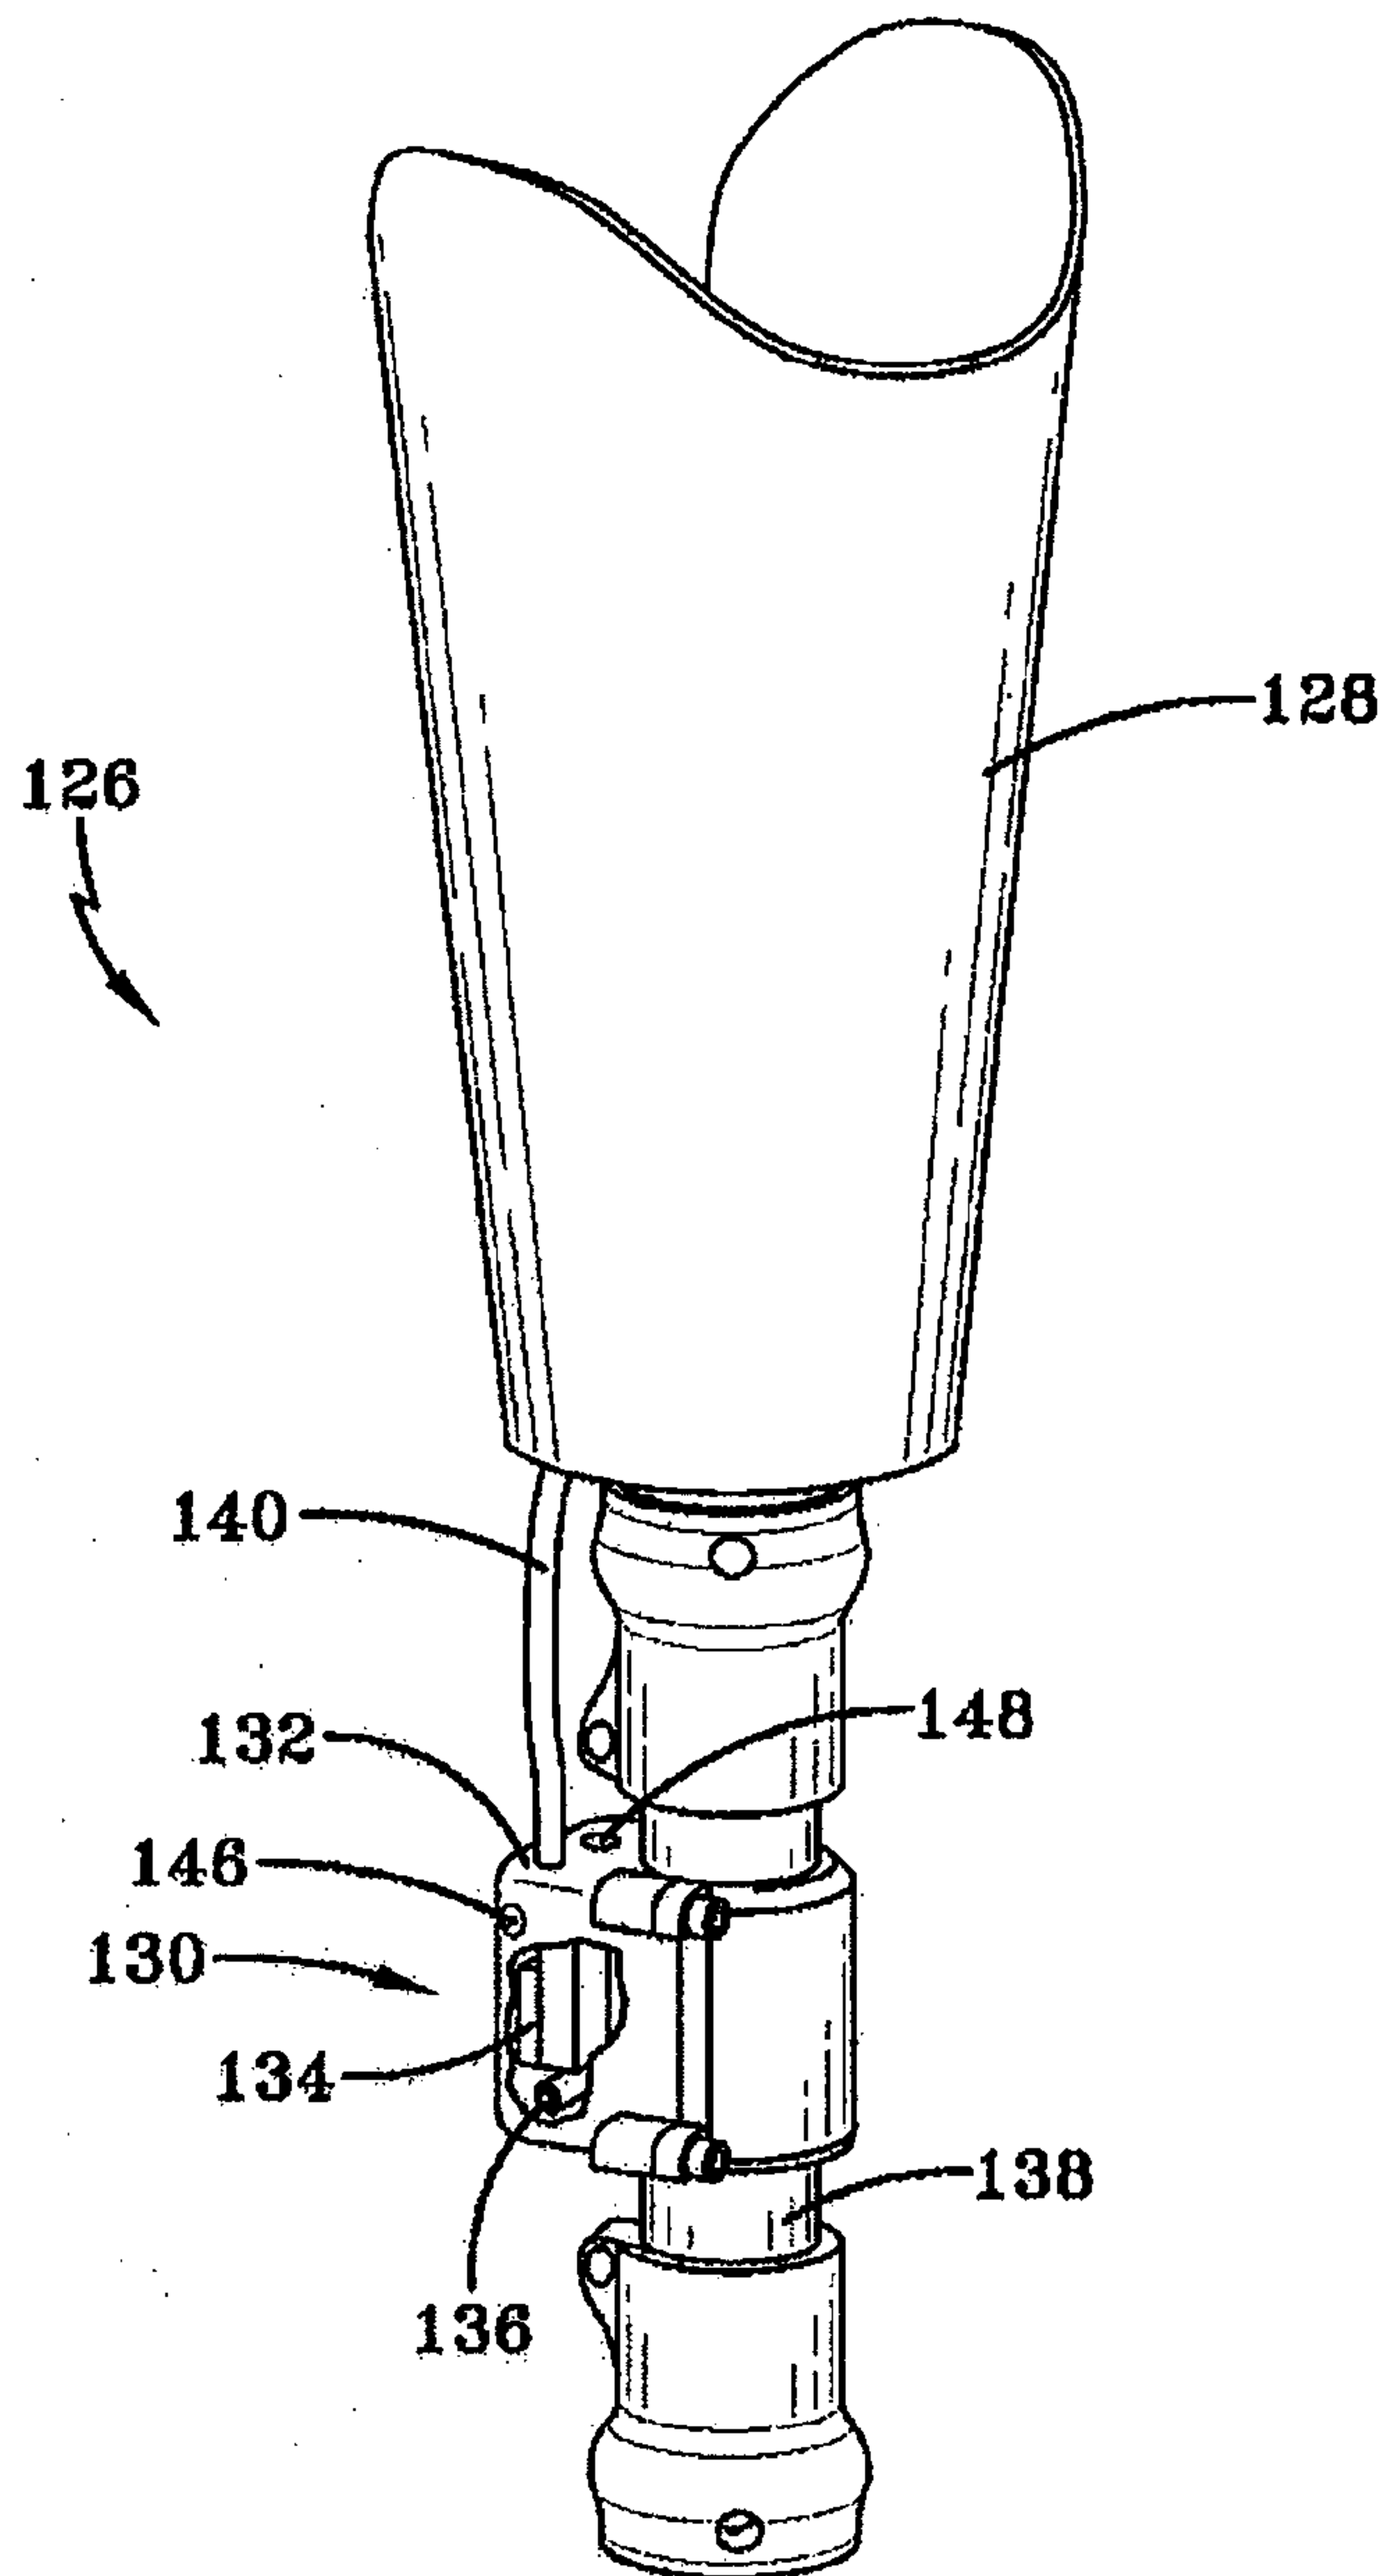


FIG-13

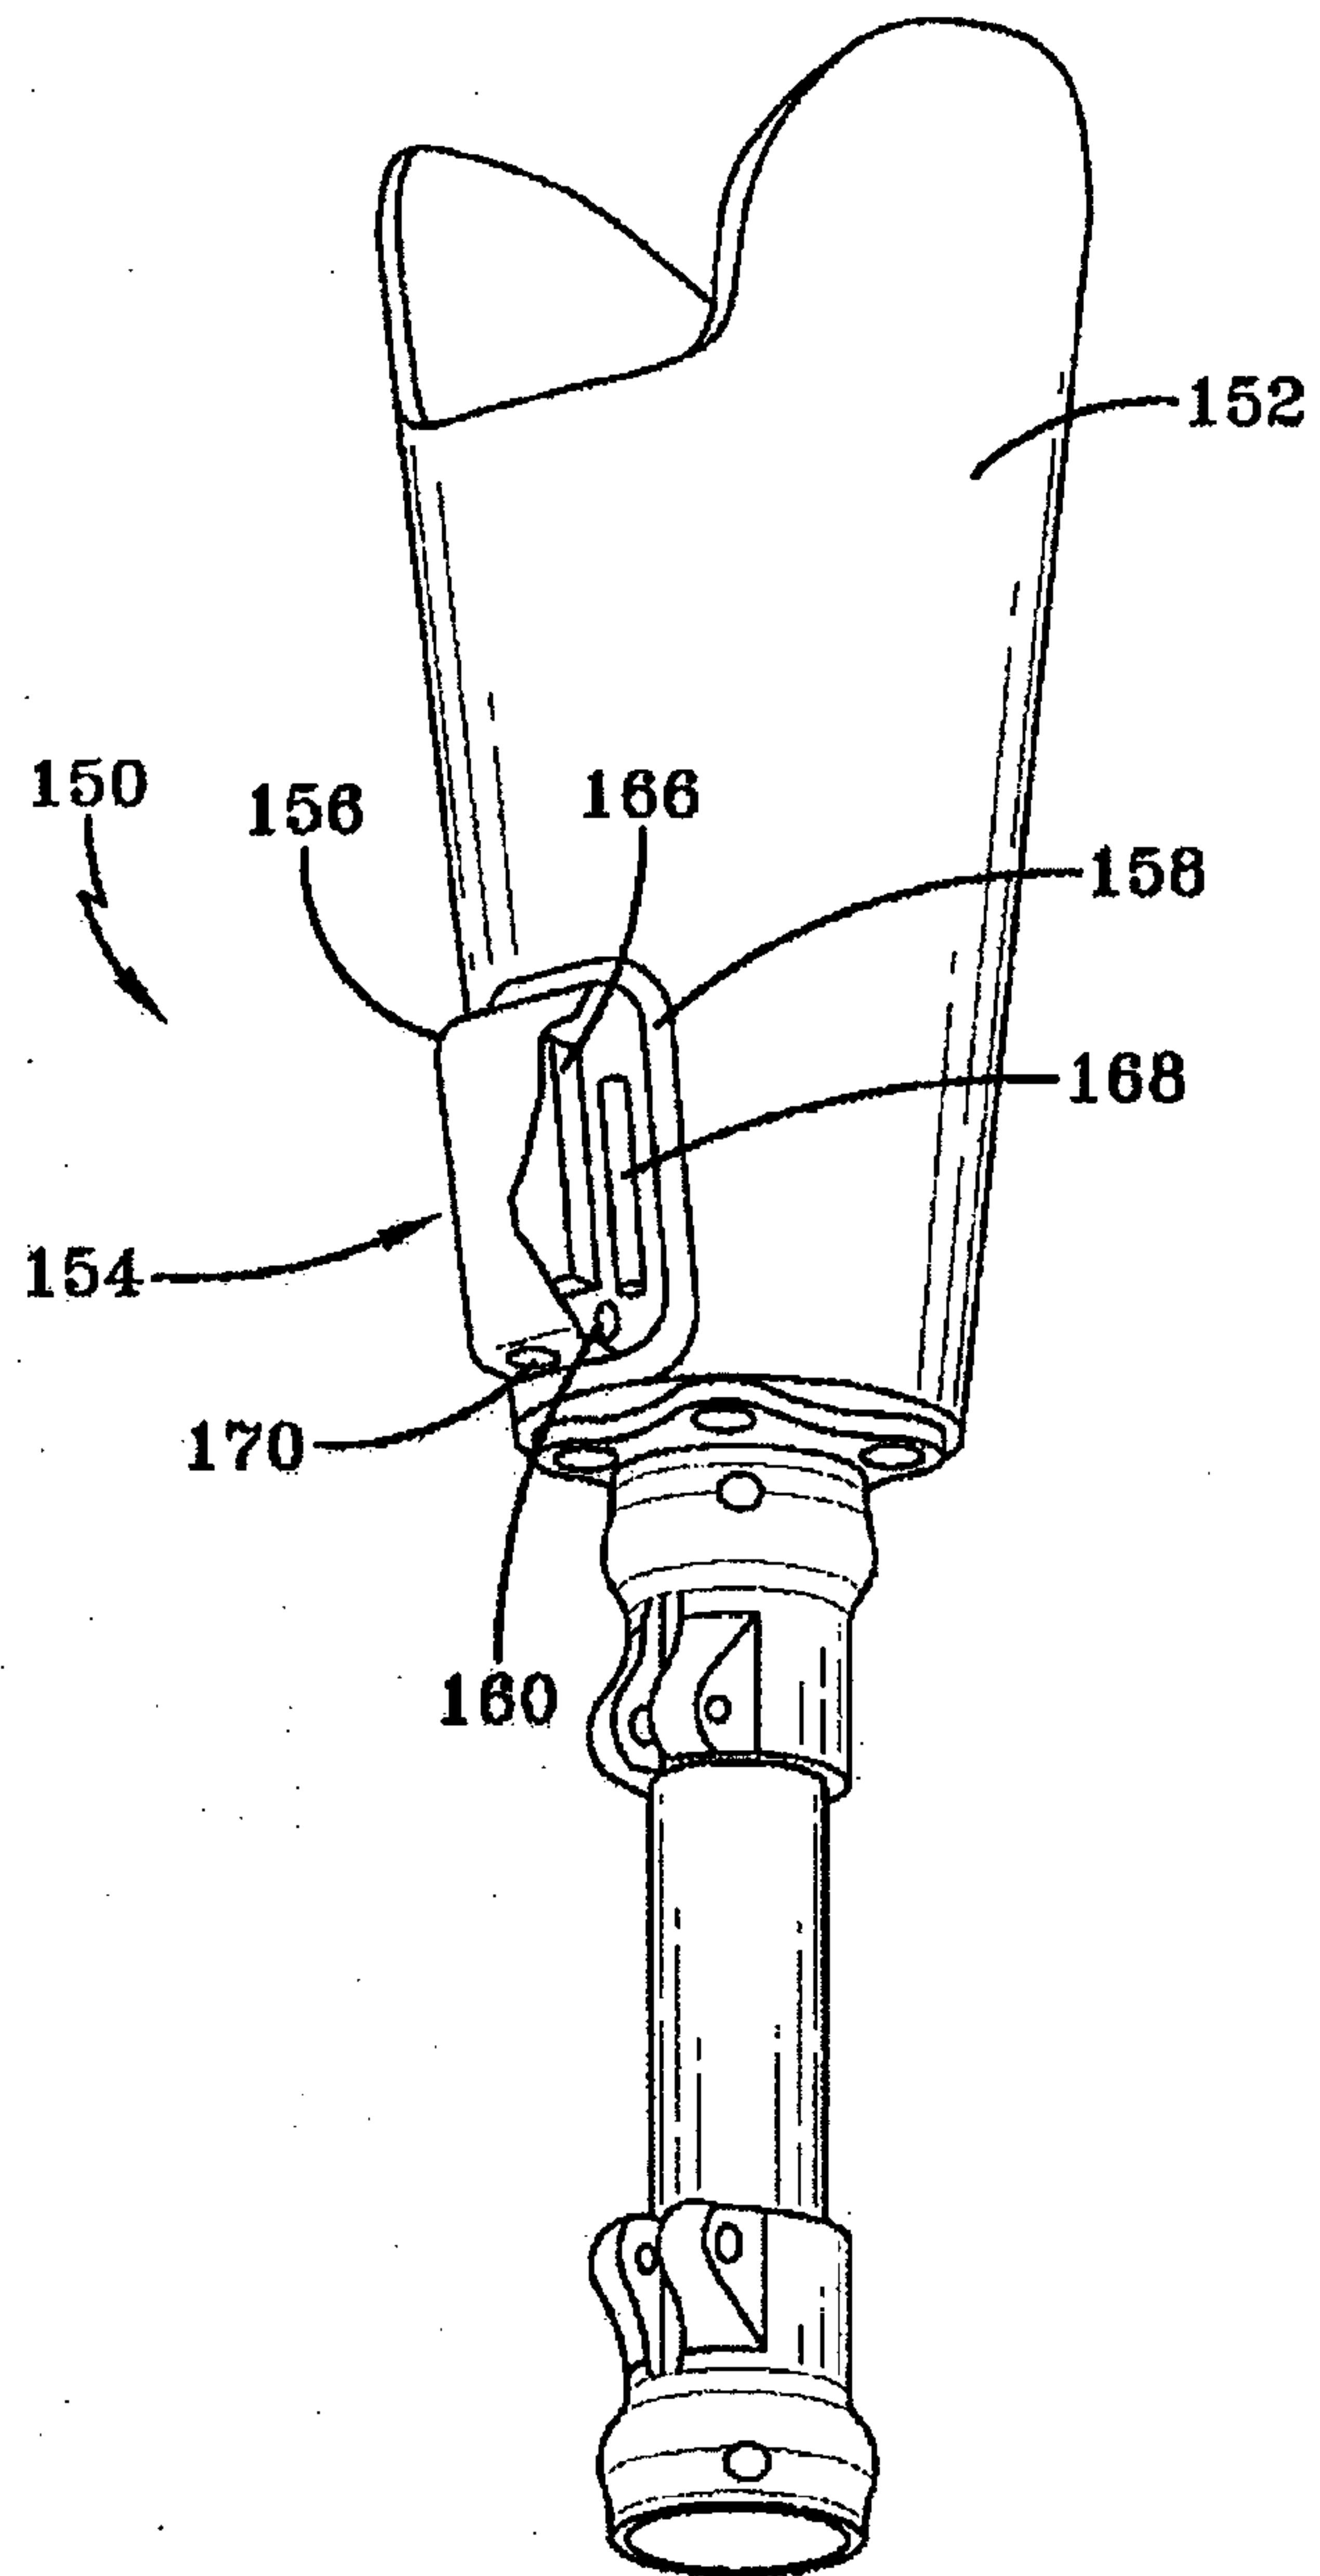


FIG-14A

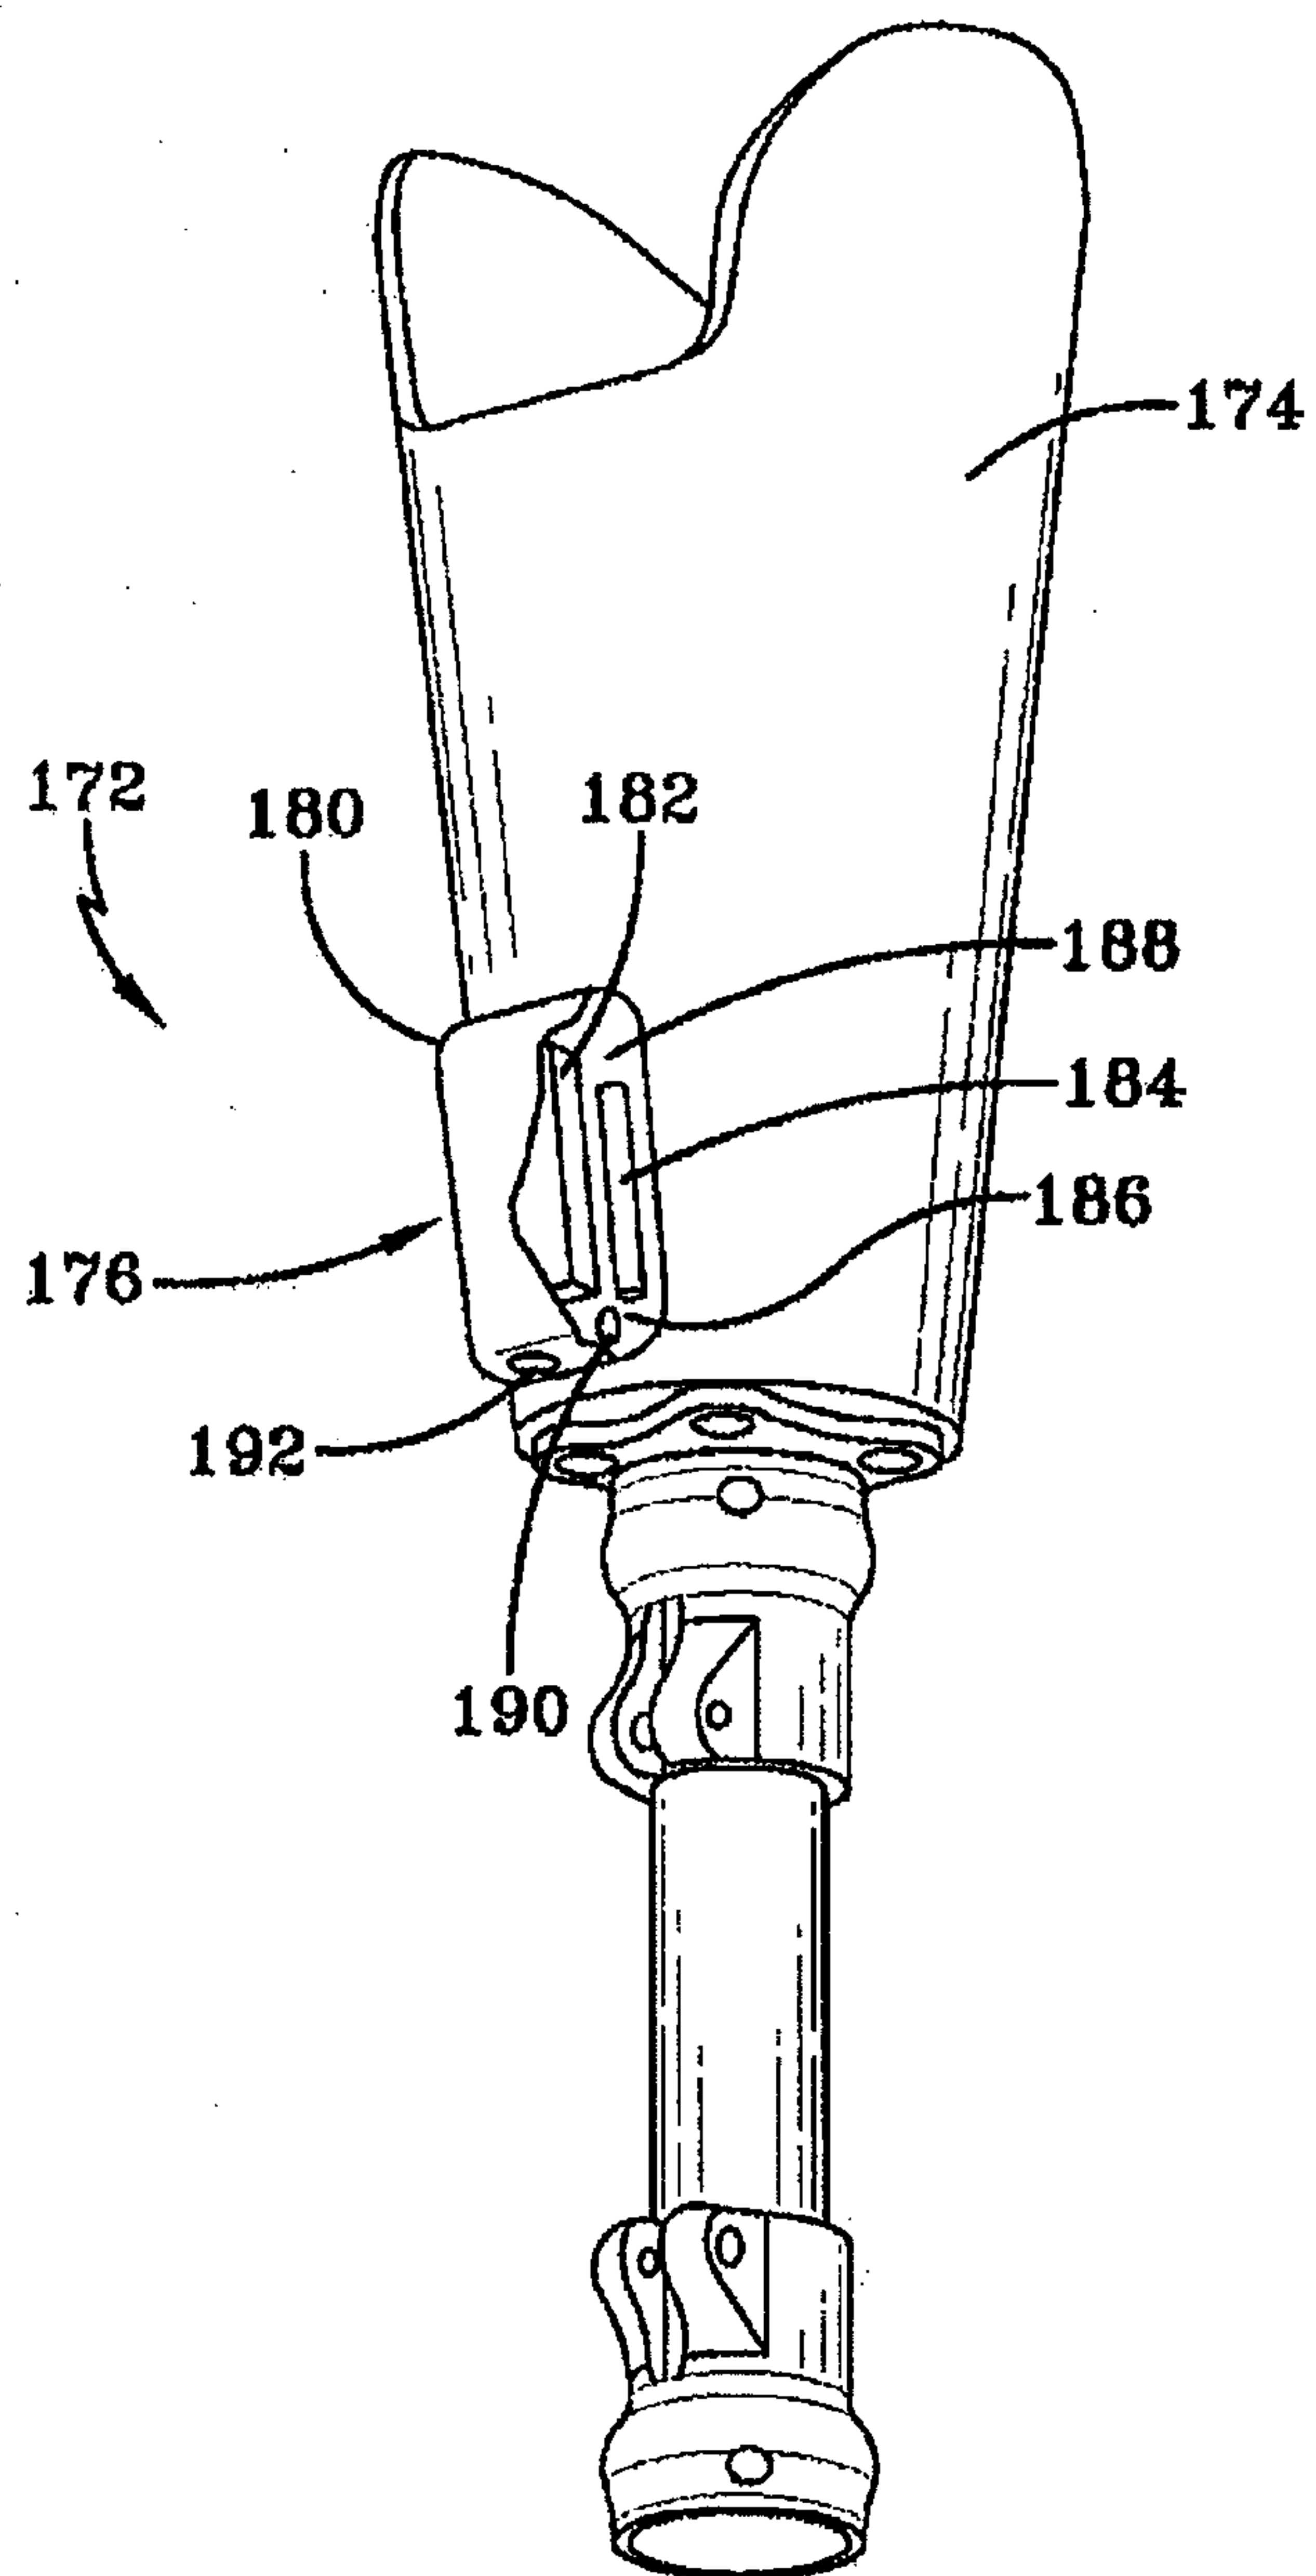


FIG-14B

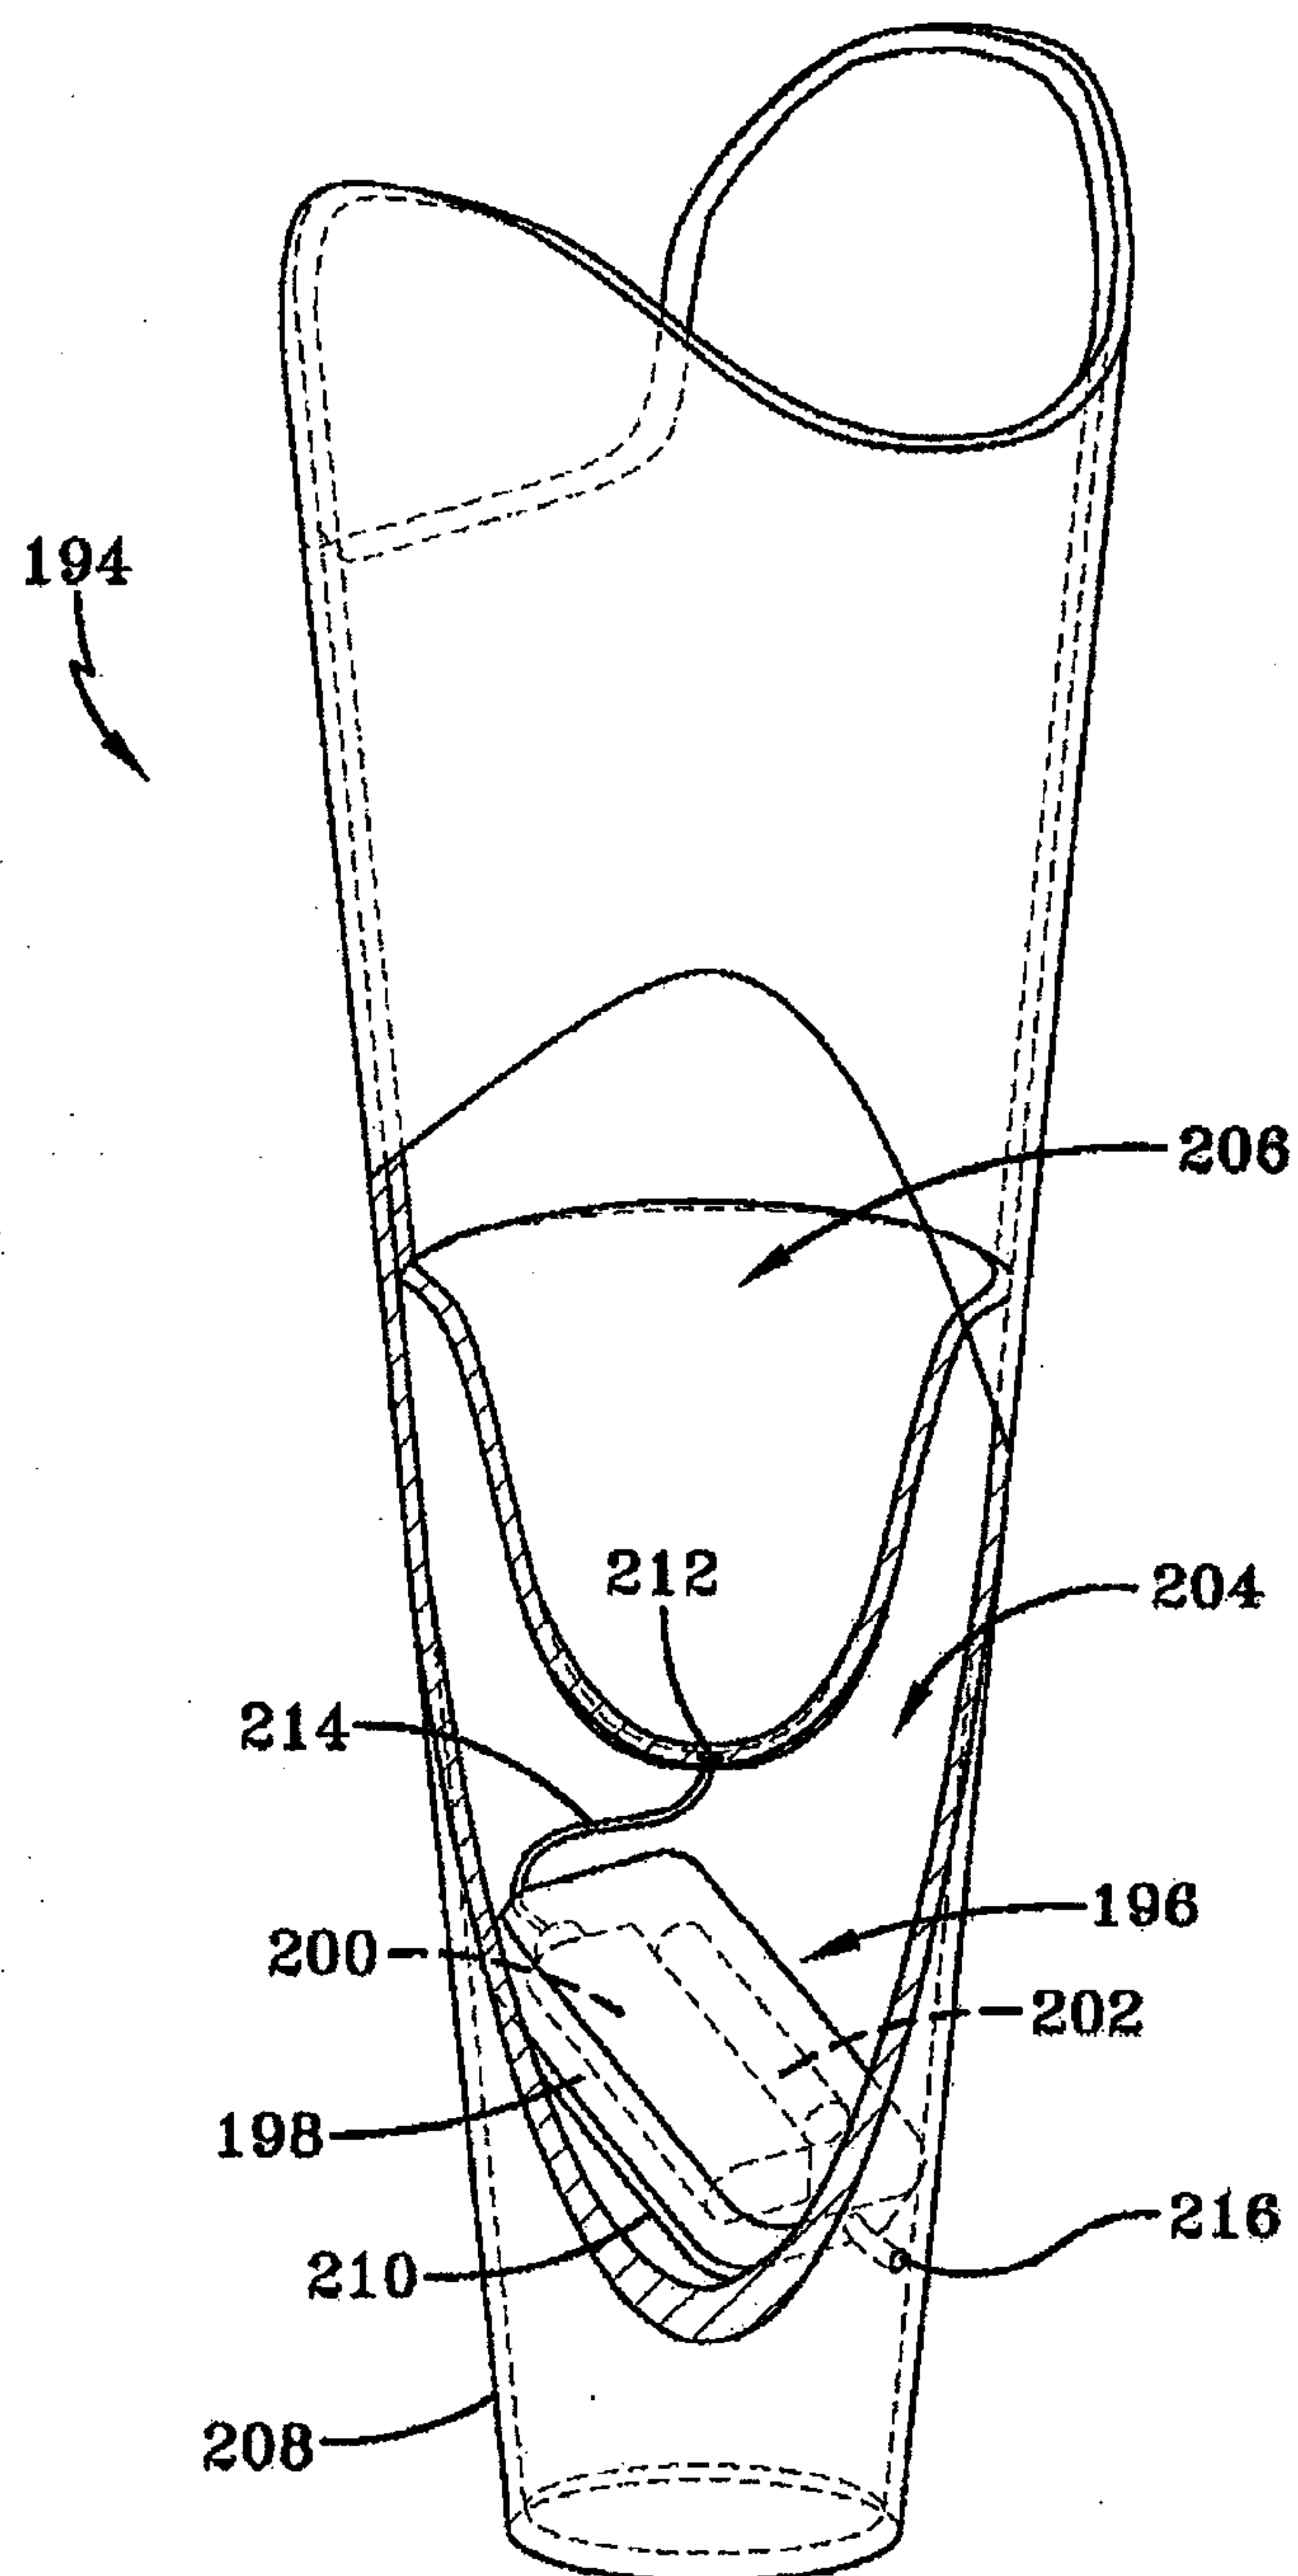
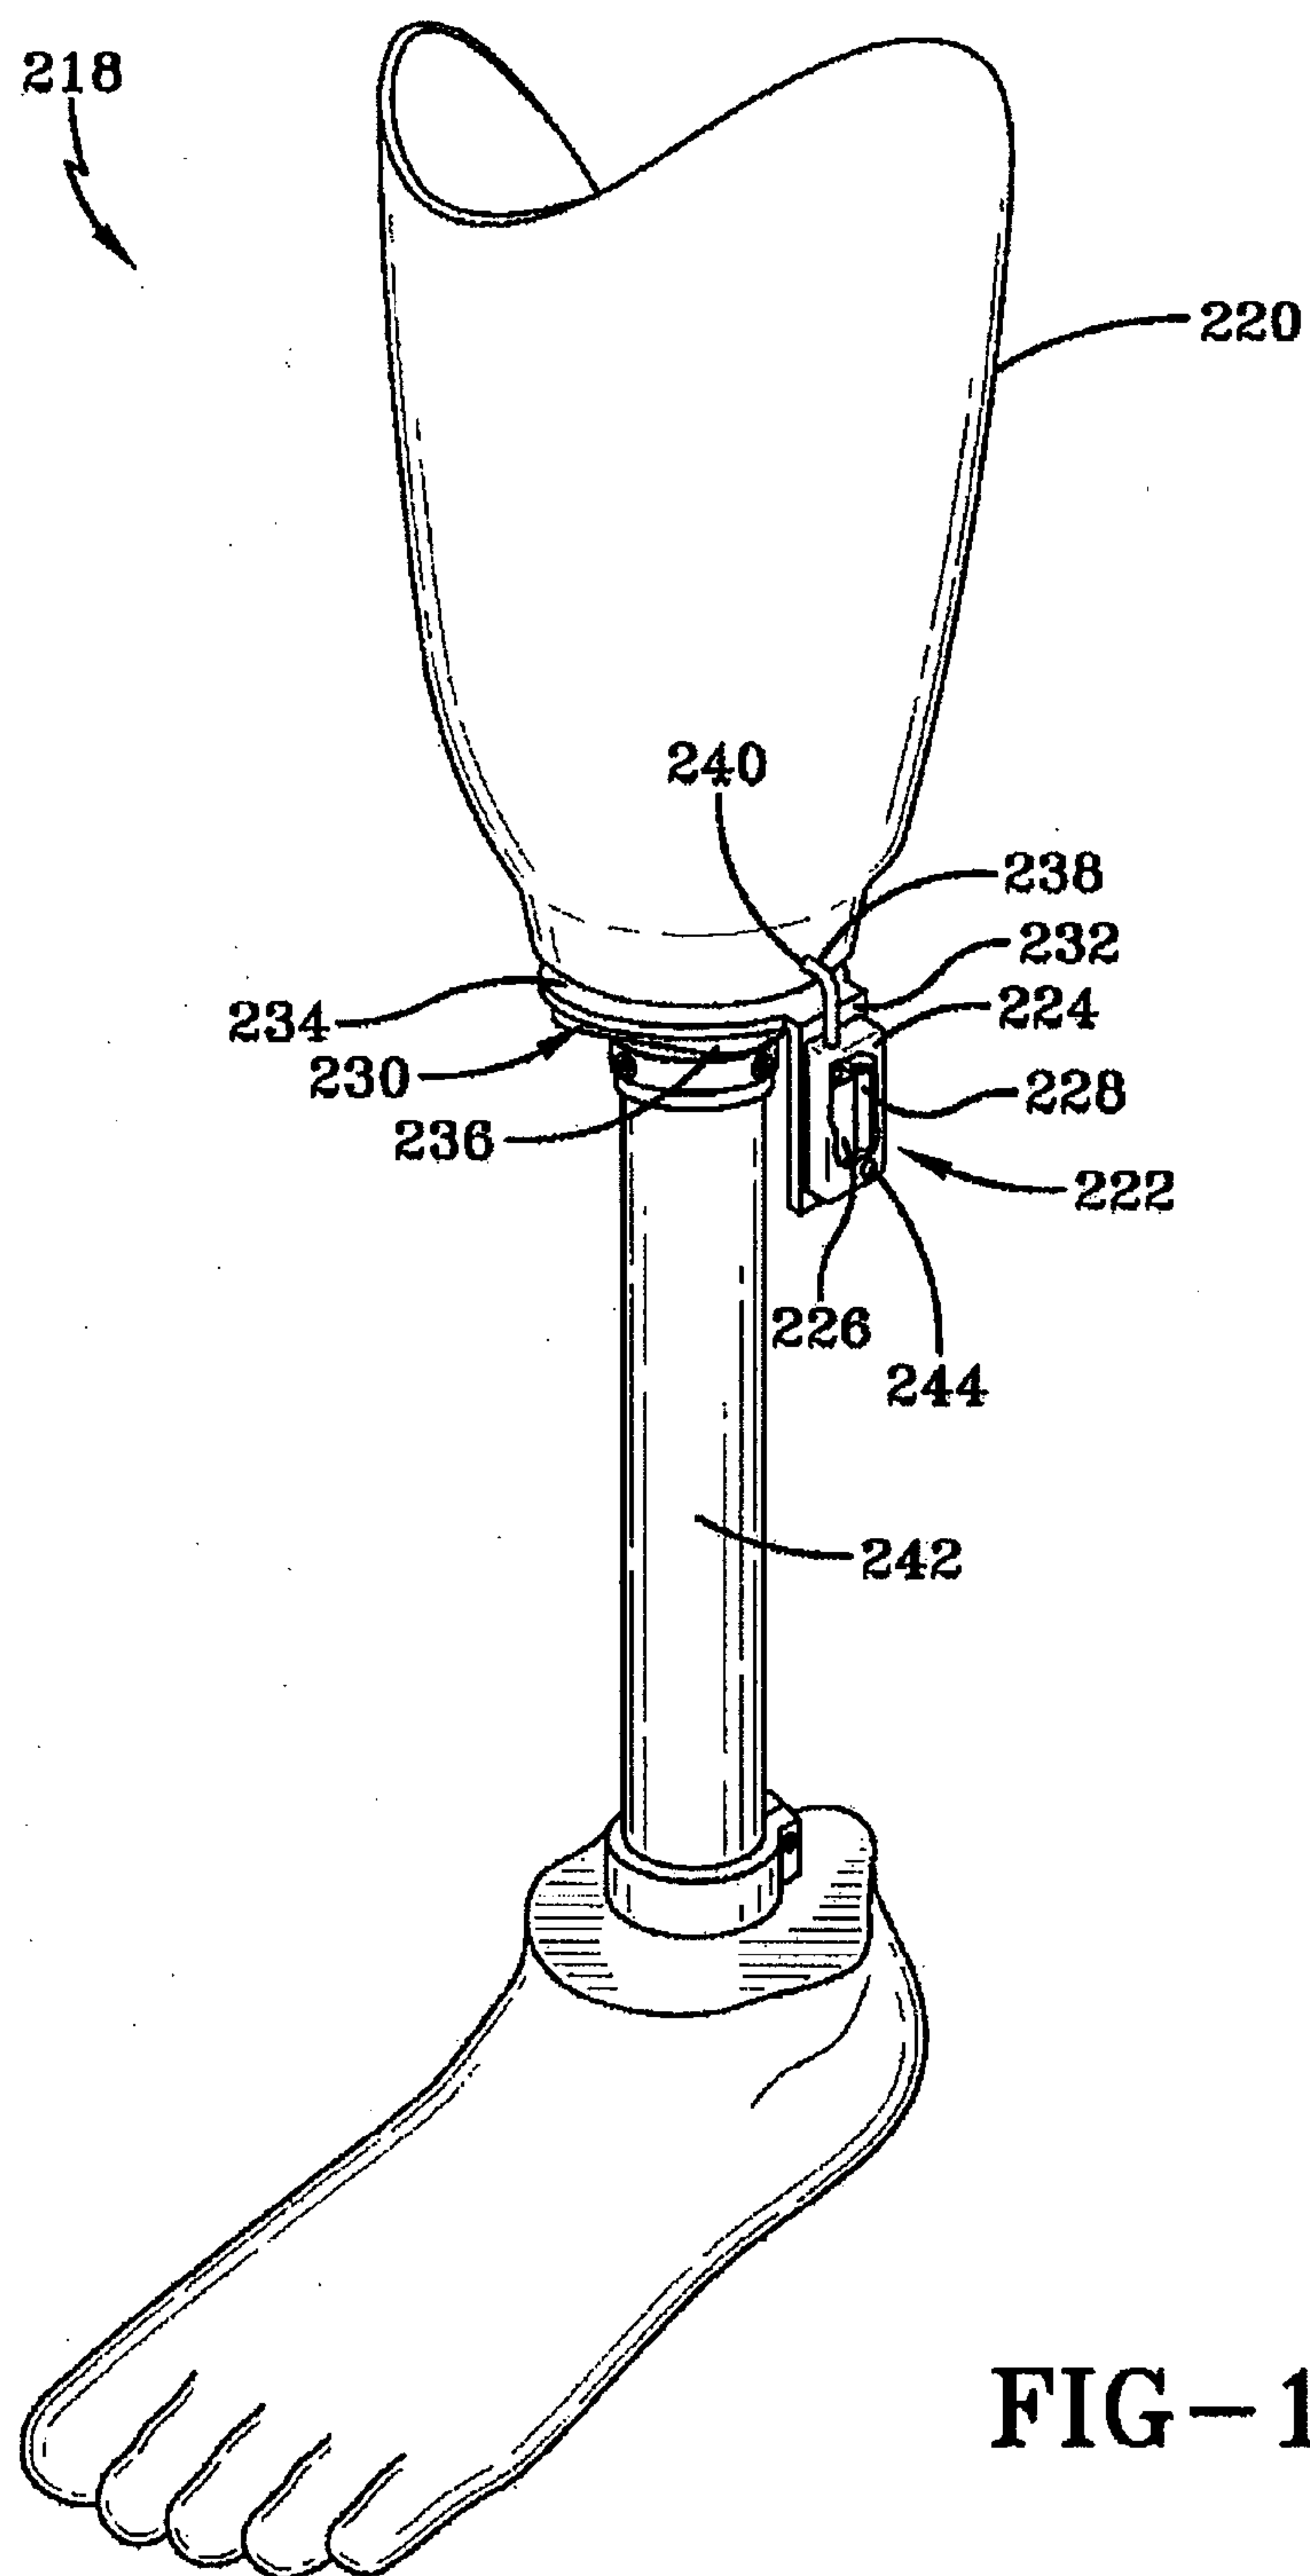


FIG-15



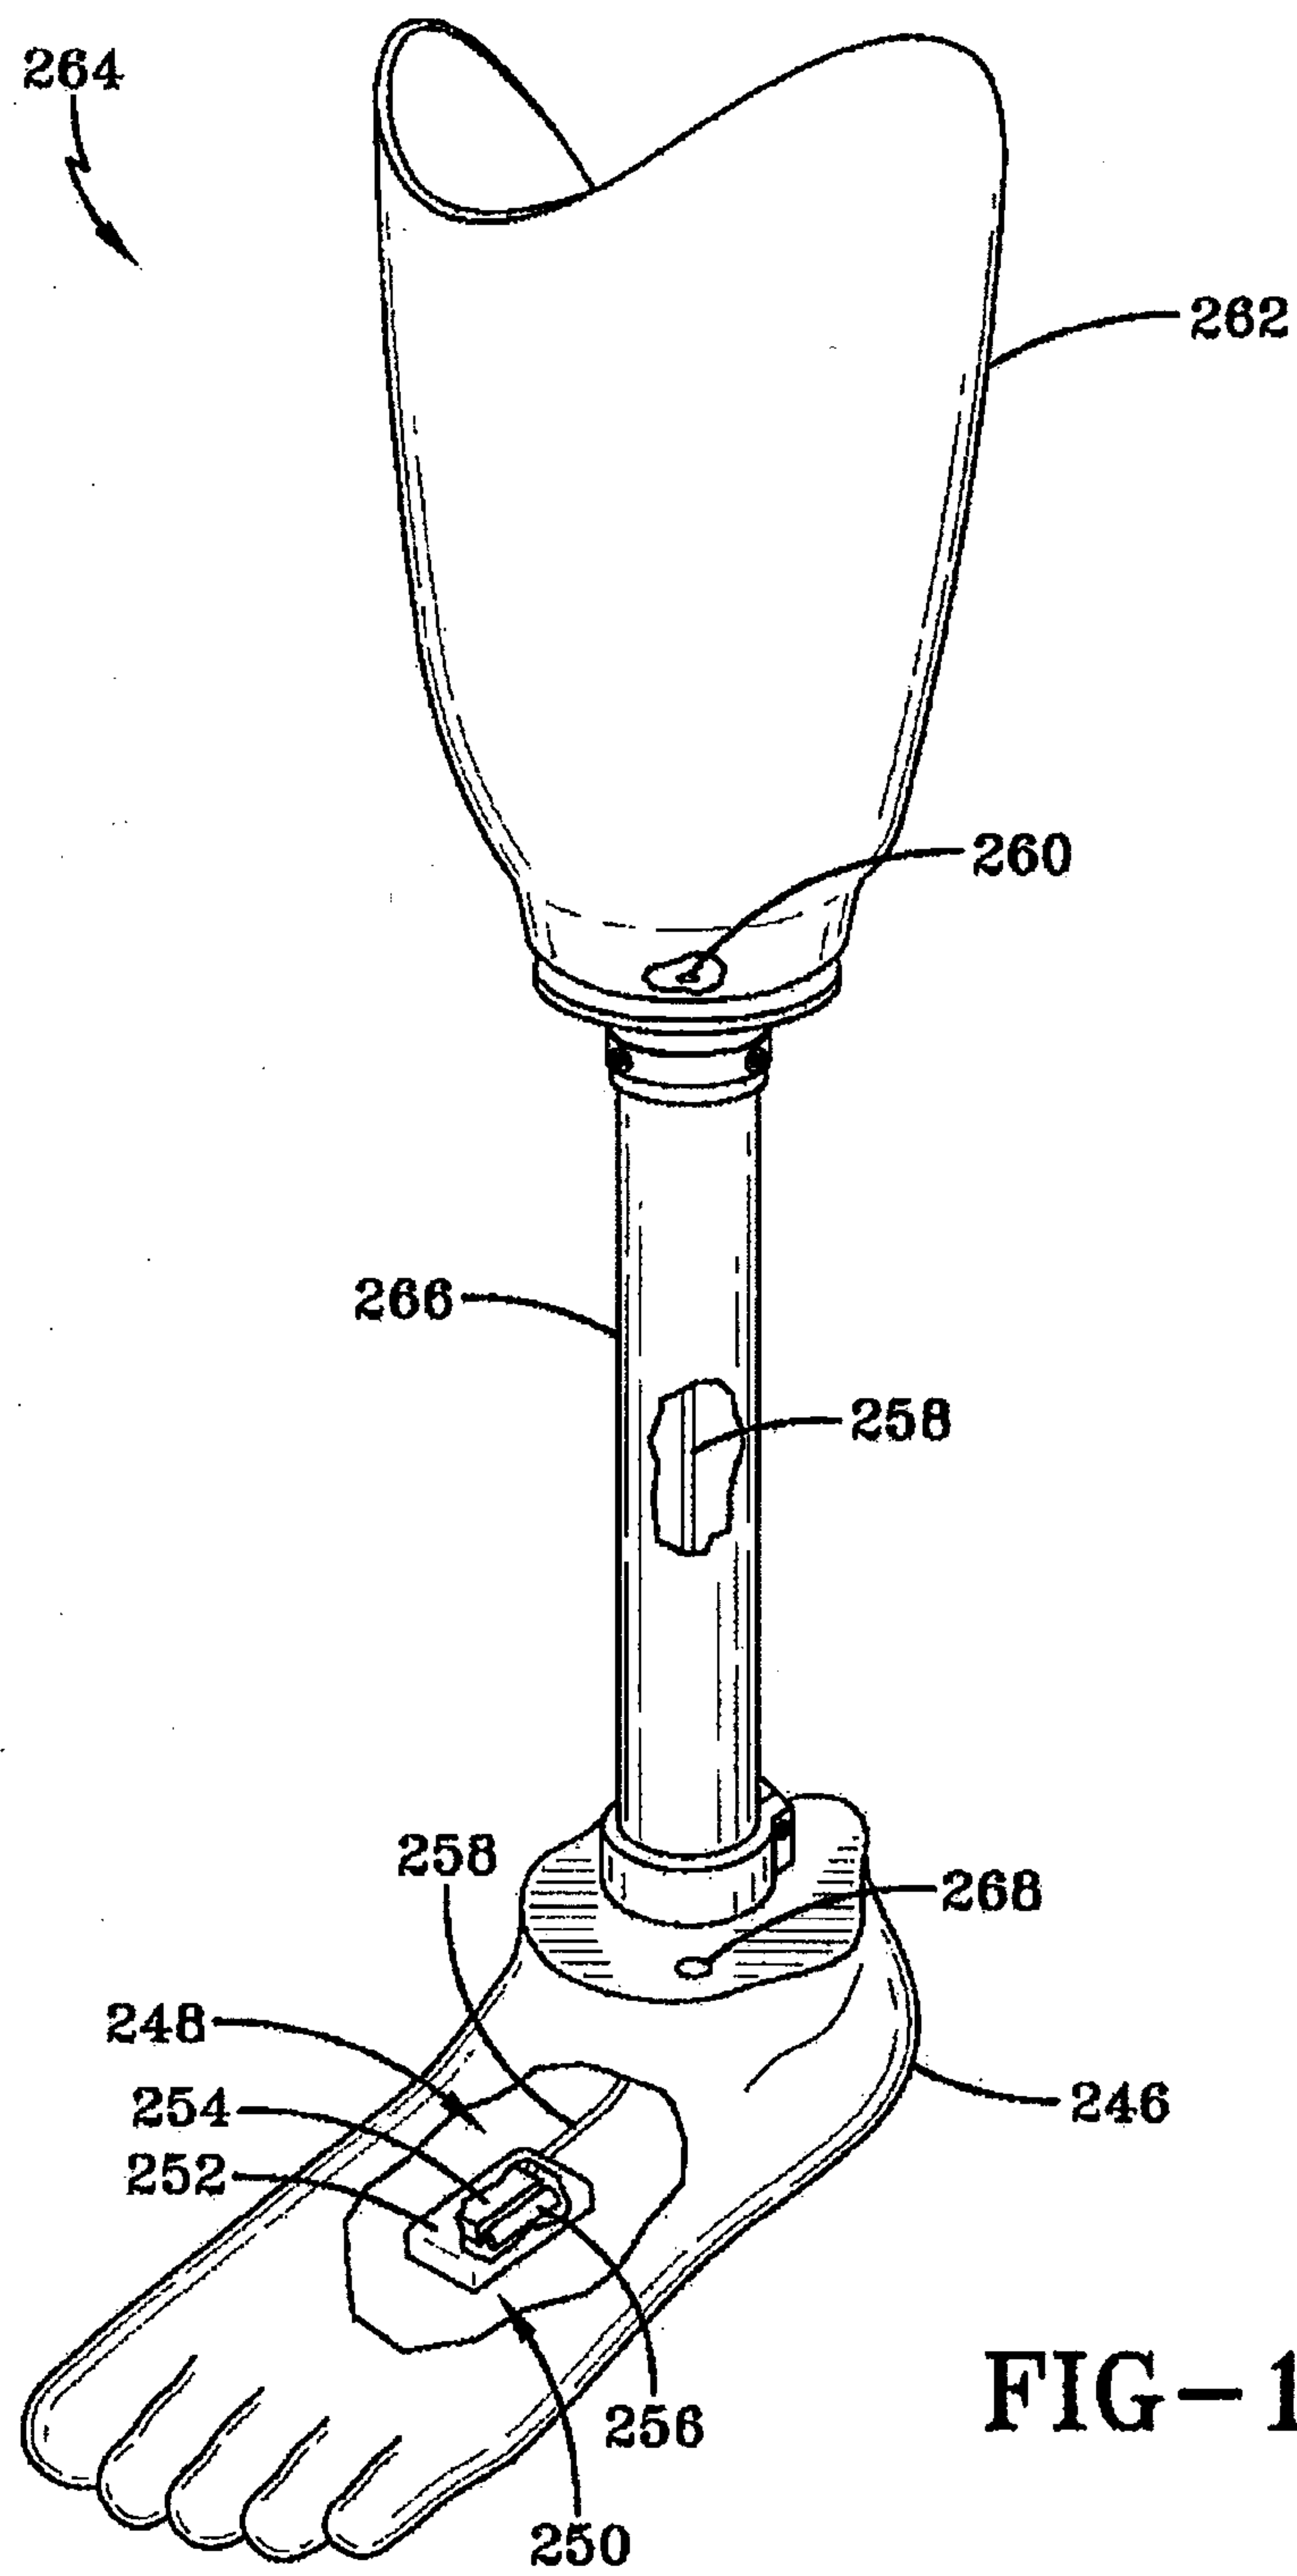
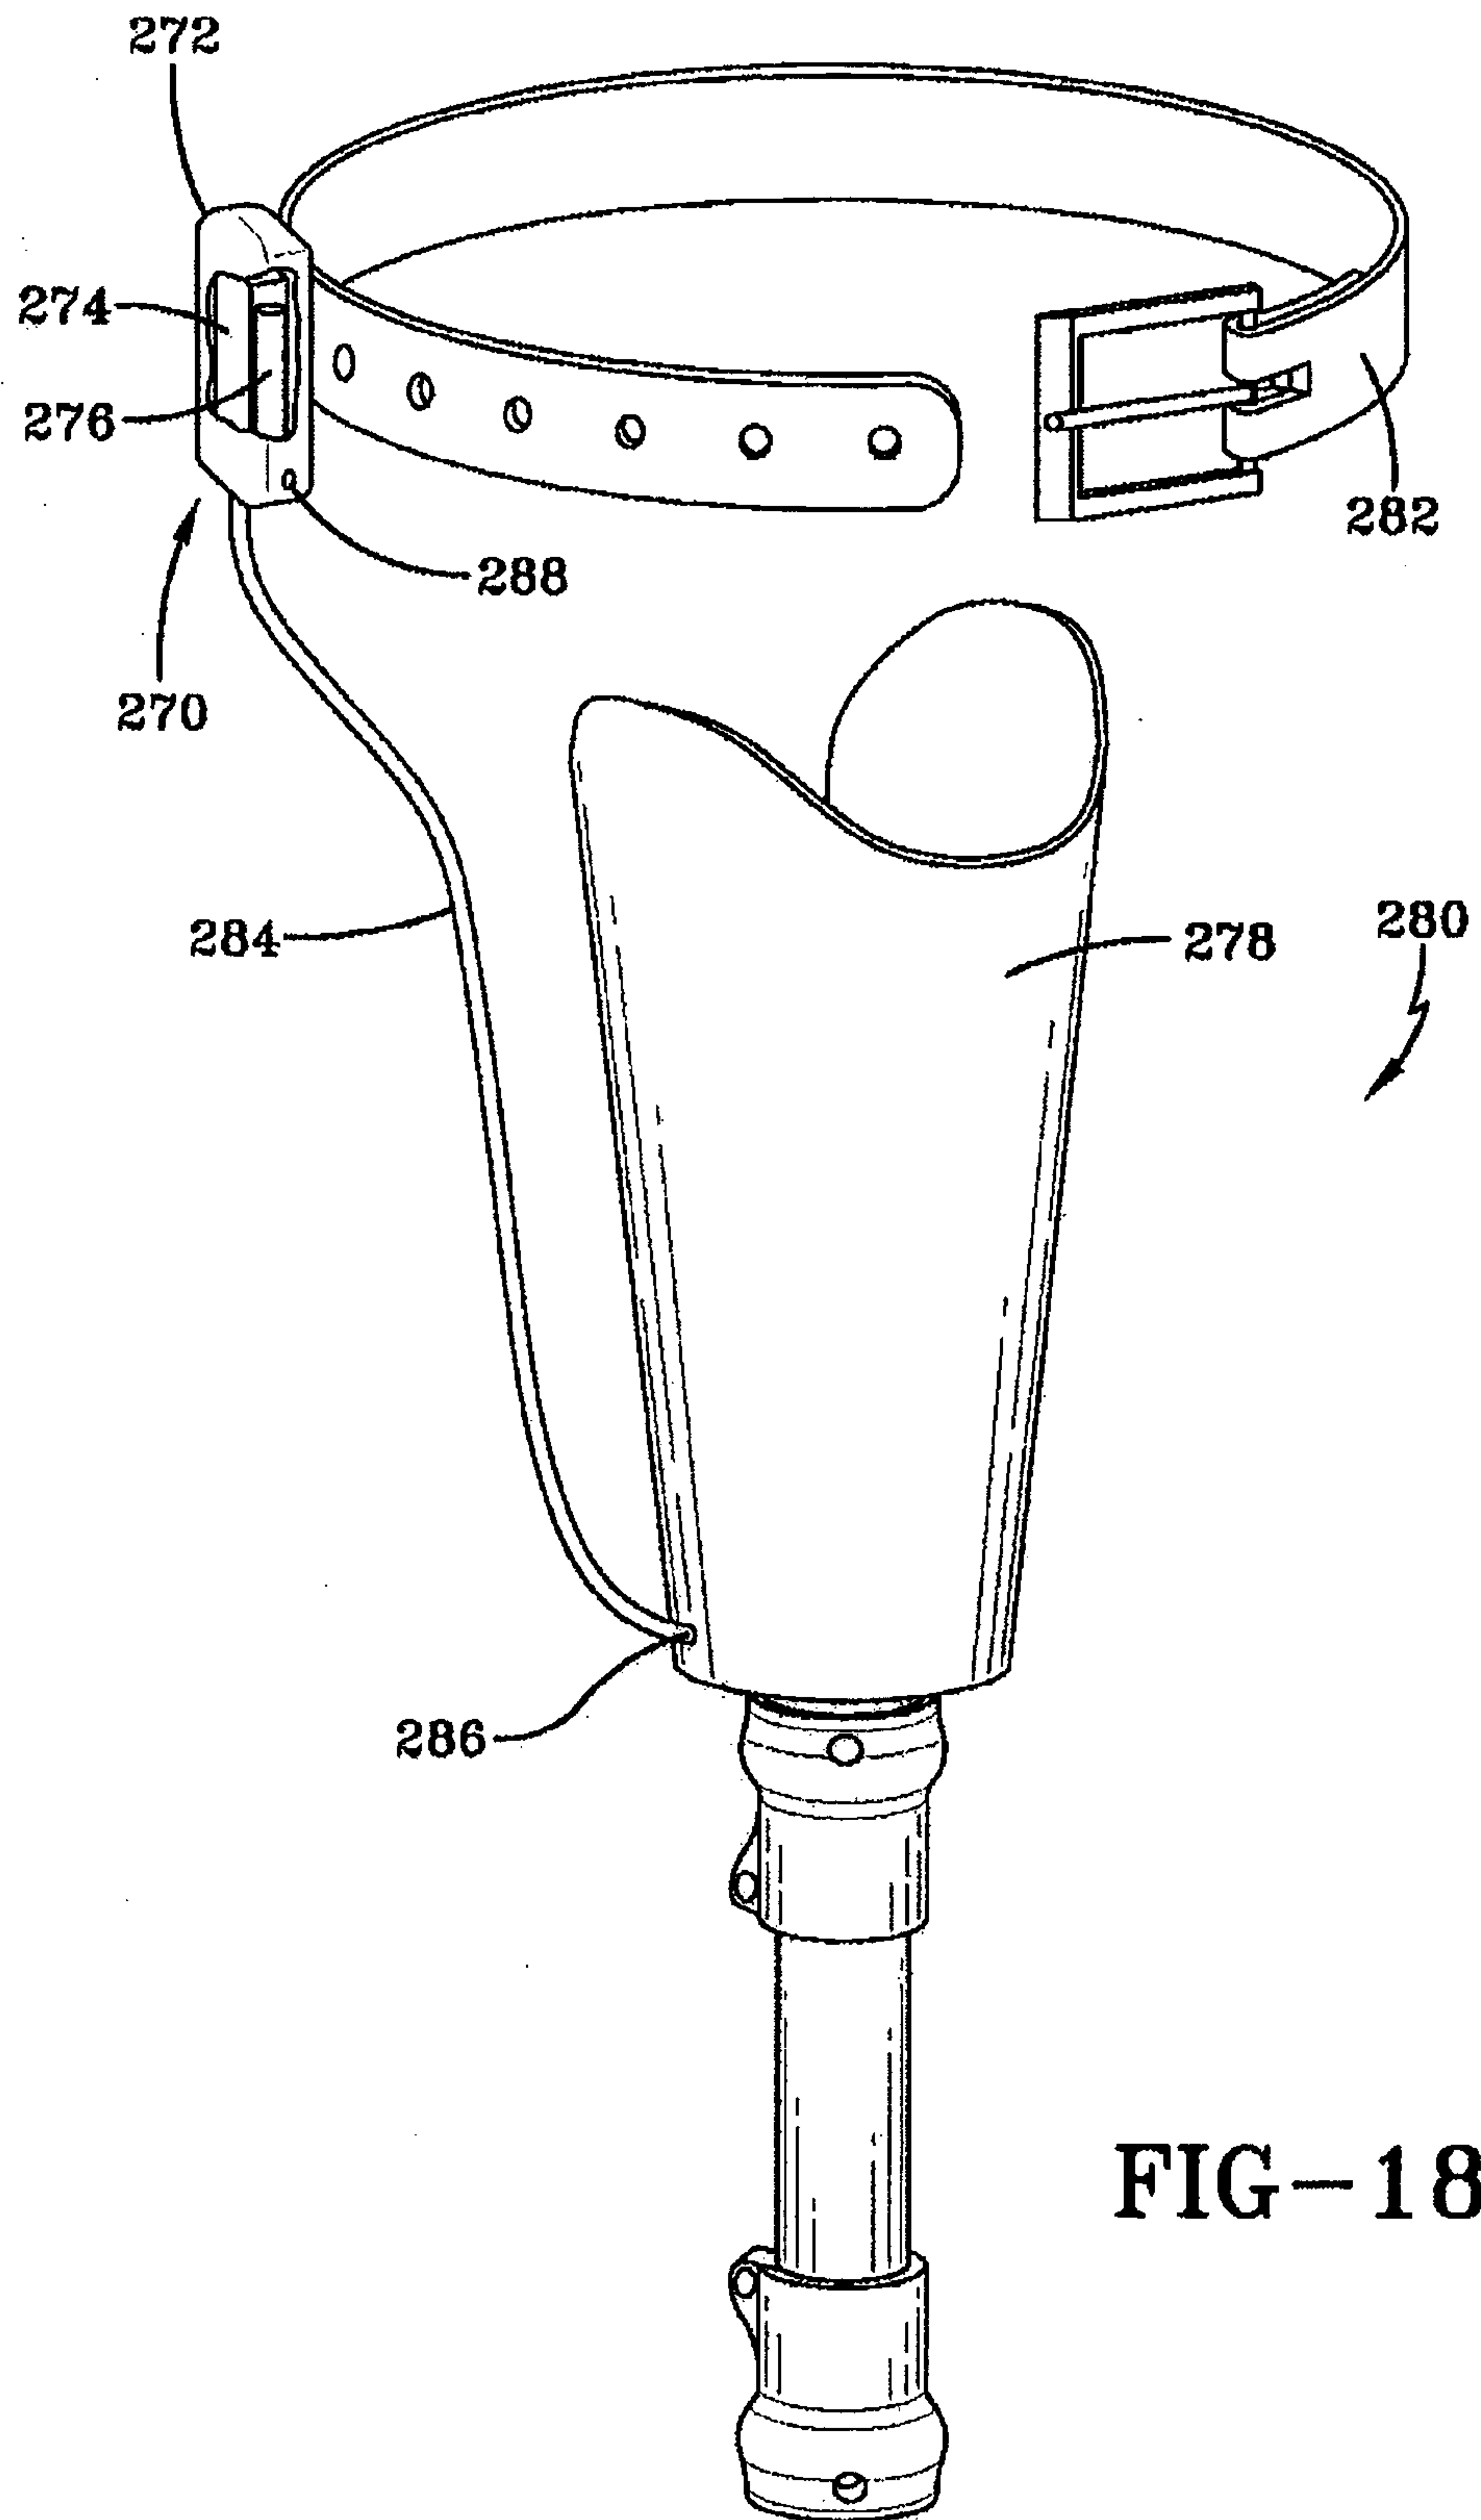


FIG-17



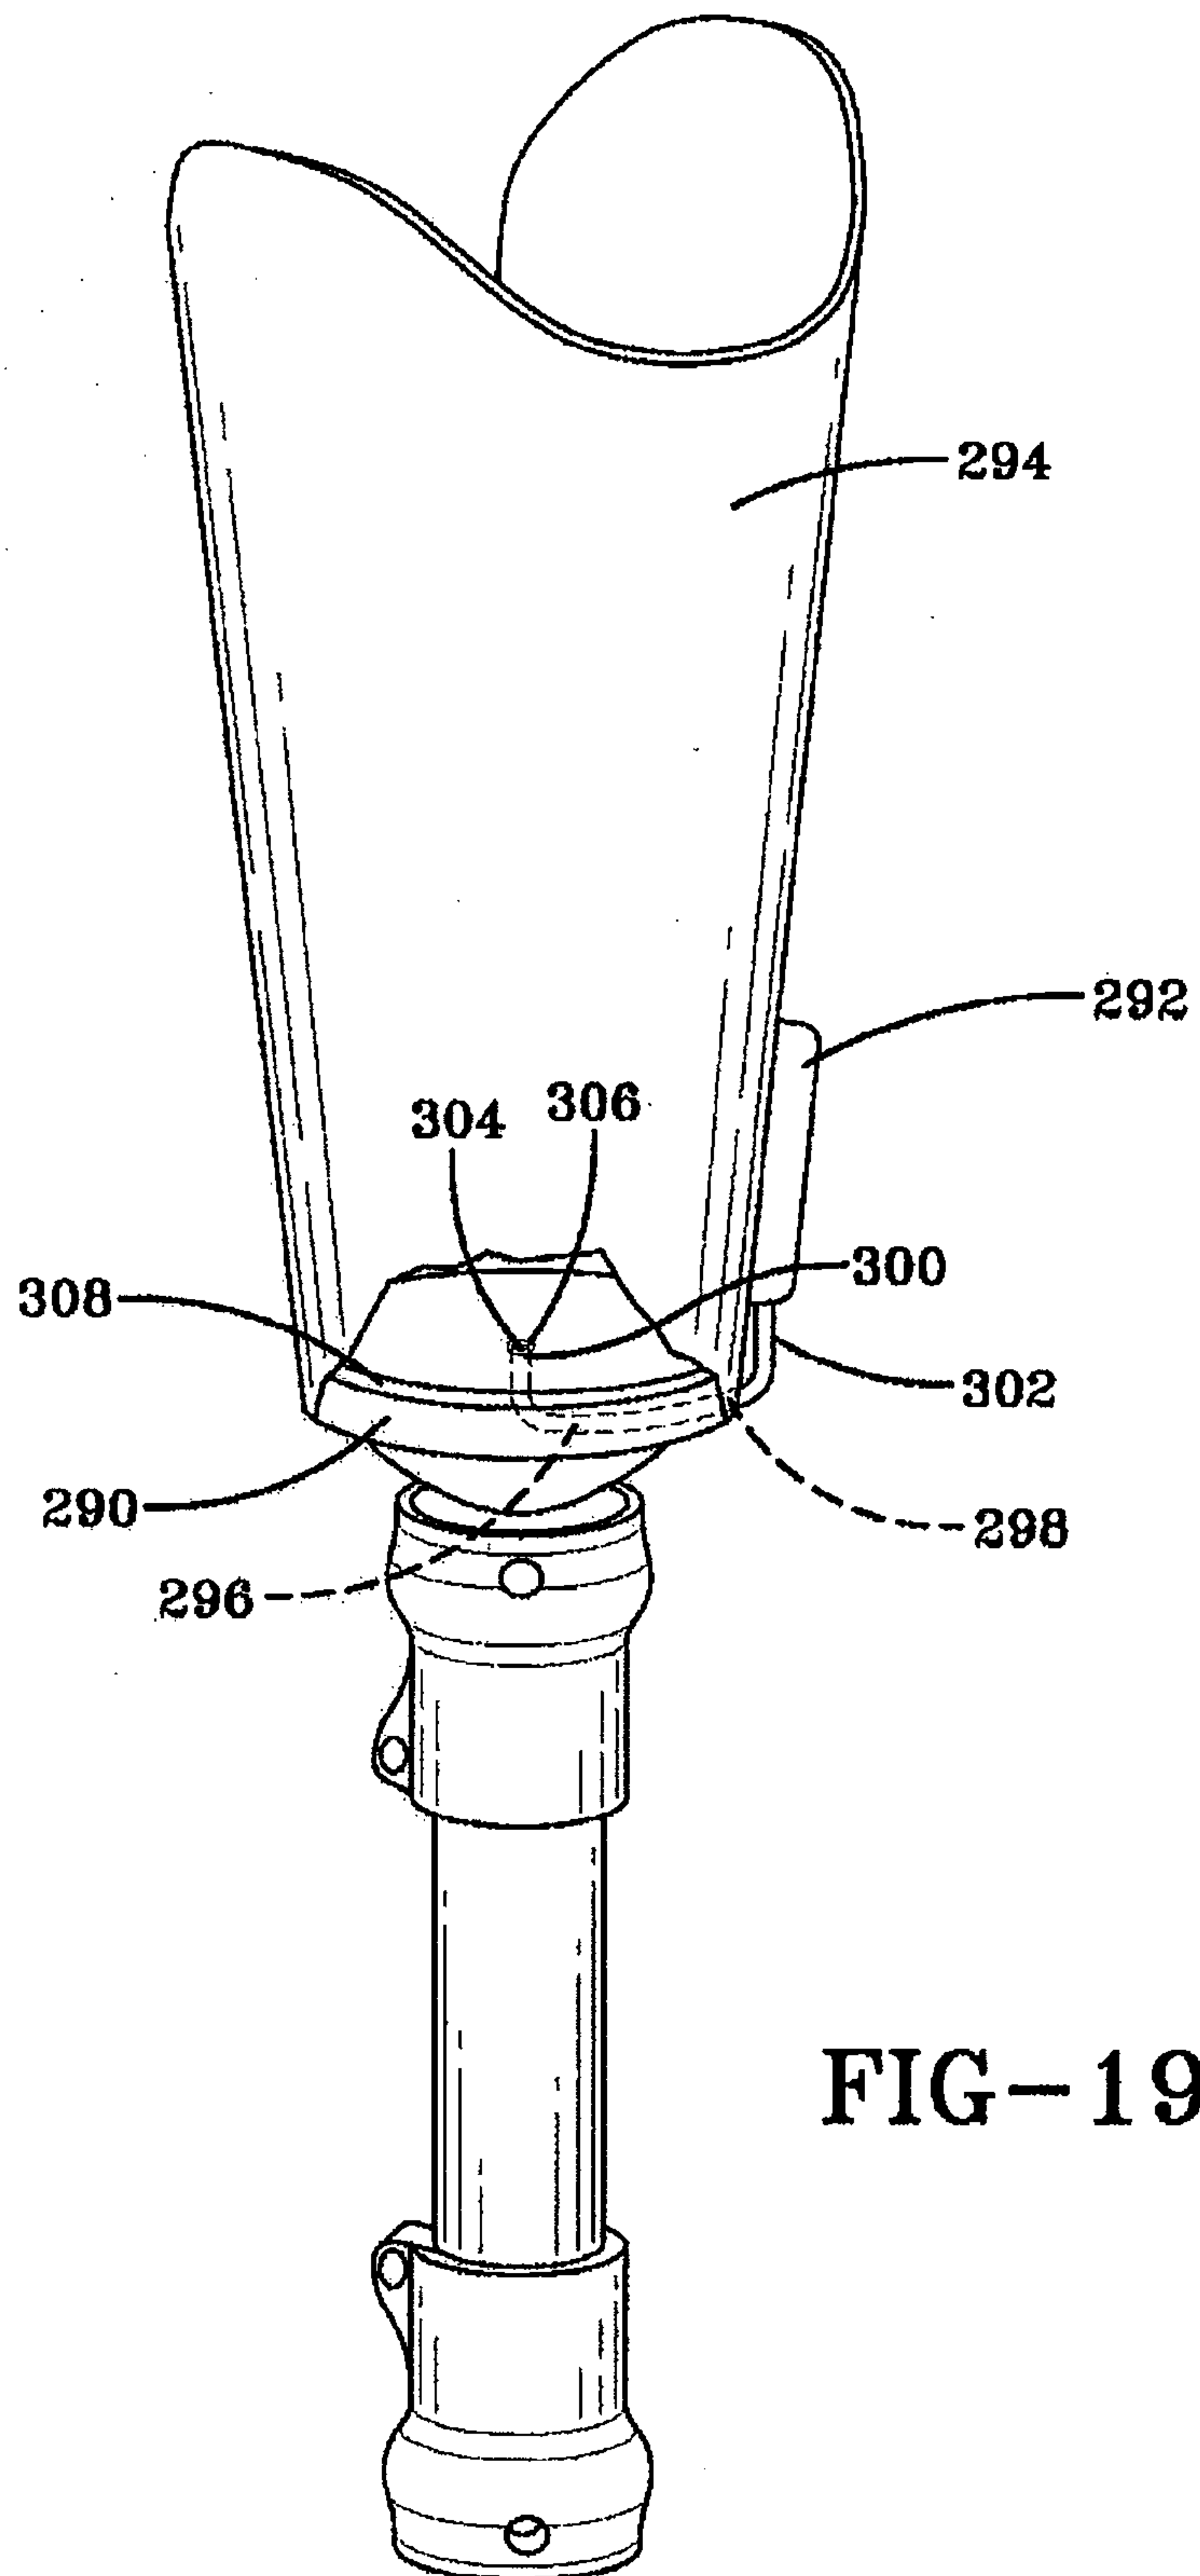


FIG-19

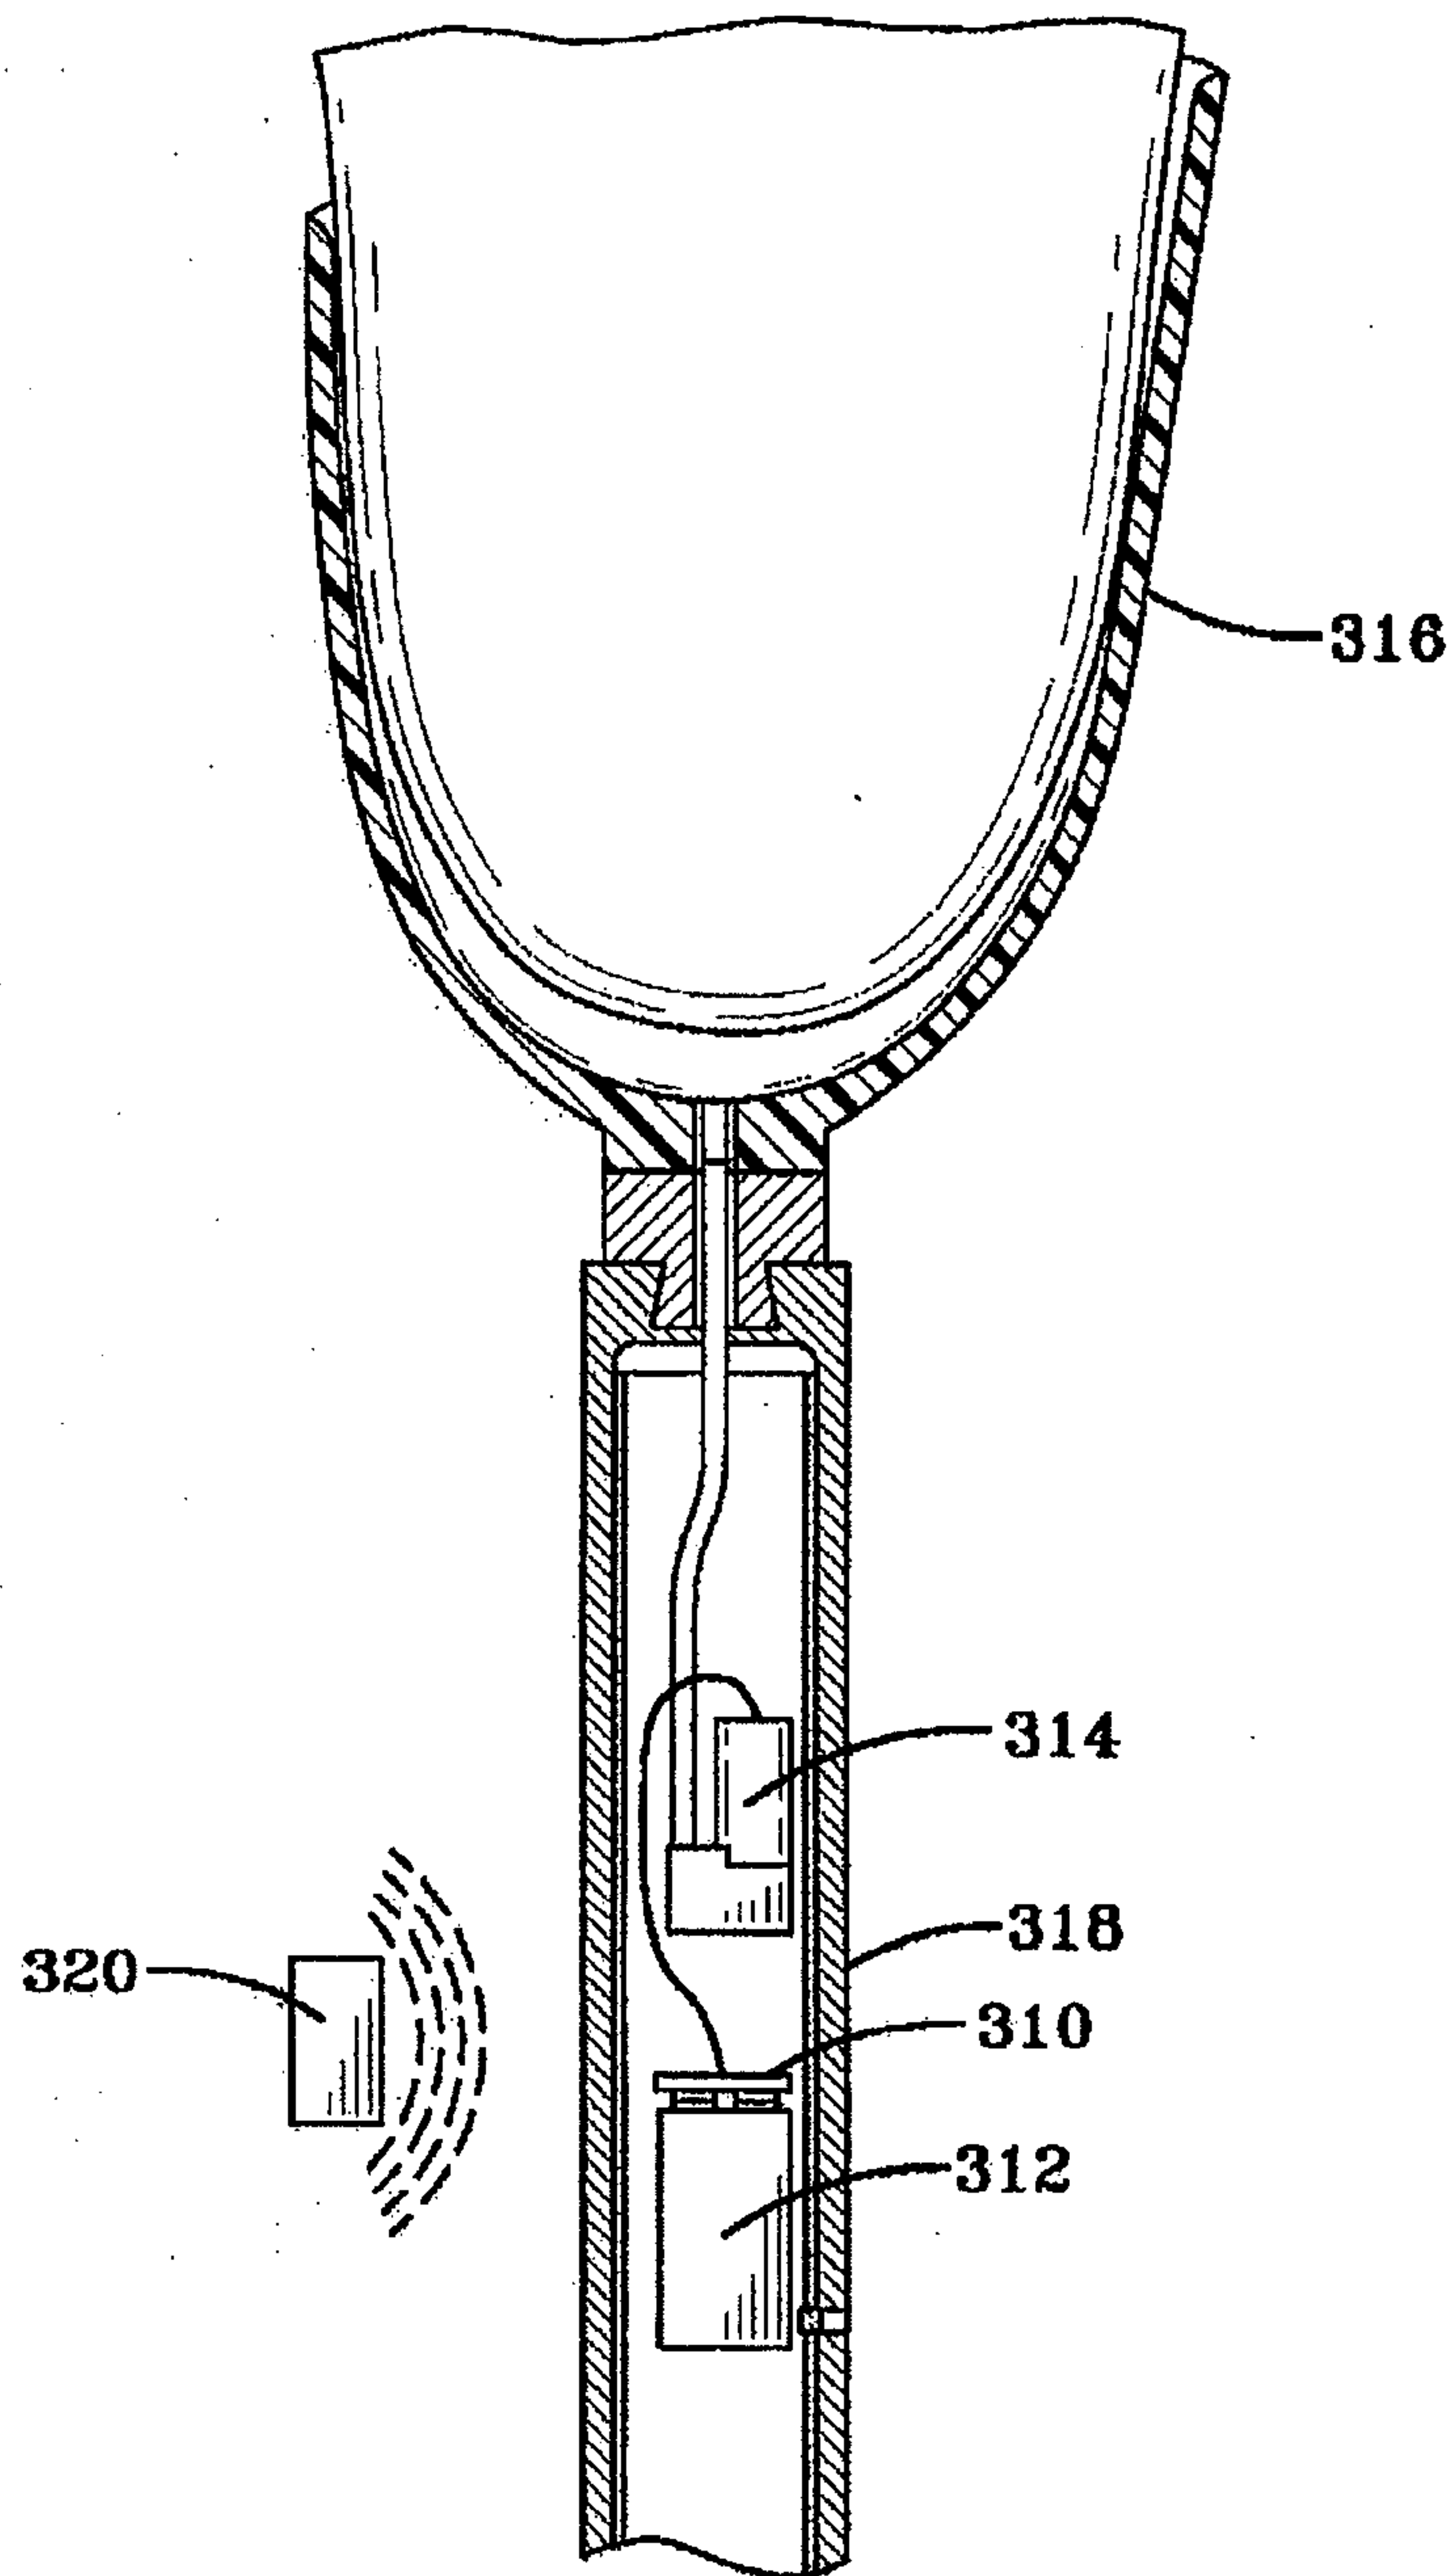


FIG-20

