




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : A63F 1/00, 1/18, 1/06	A1	(11) International Publication Number: WO 99/49946 (43) International Publication Date: 7 October 1999 (07.10.99)
(21) International Application Number: PCT/US99/06649 (22) International Filing Date: 26 March 1999 (26.03.99)  (30) Priority Data: 09/050,687 30 March 1998 (30.03.98) US  (71) Applicant: PYYKKONEN, Steven, R. [US/US]; 1168 Maple Cove, Leonard, MI 48367 (US).  (71)(72) Applicant and Inventor: BROWN, J., Breck [US/US]; 191 La Alba Street, Henderson, NV 89014 (US).  (74) Agents: MILTON, Harold, W. et al.; Howard & Howard Attorneys, P.C., Suite 101, 1400 North Woodward Avenue, Bloomfield Hills, MI 48304 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report. With amended claims.

(54) Title: GAME MACHINE WAGER SENSOR

## (57) Abstract

A game board for playing a game upon which wagers are made. The board comprises an upper playing surface presenting a plurality of player areas with at least one wager indicator. Each wager indicator includes a lens (27) substantially flush with the playing surface and a sensor (28) with a photocell centered underneath the lens (27) for sensing the presence of a chip on the lens (27). The lens (27) is circular and is surrounded by a light (30) which comprises a plurality of light emitting diodes in a circular tube that is disposed around the circumference of the lens (27) and sensor (28). The light (30) is controlled by a switching device and indicates the presence of a chip. A light shield (54) is disposed between the sensor (28) and the light (30) for preventing light rays from the light (30) from reaching the sensor (28).

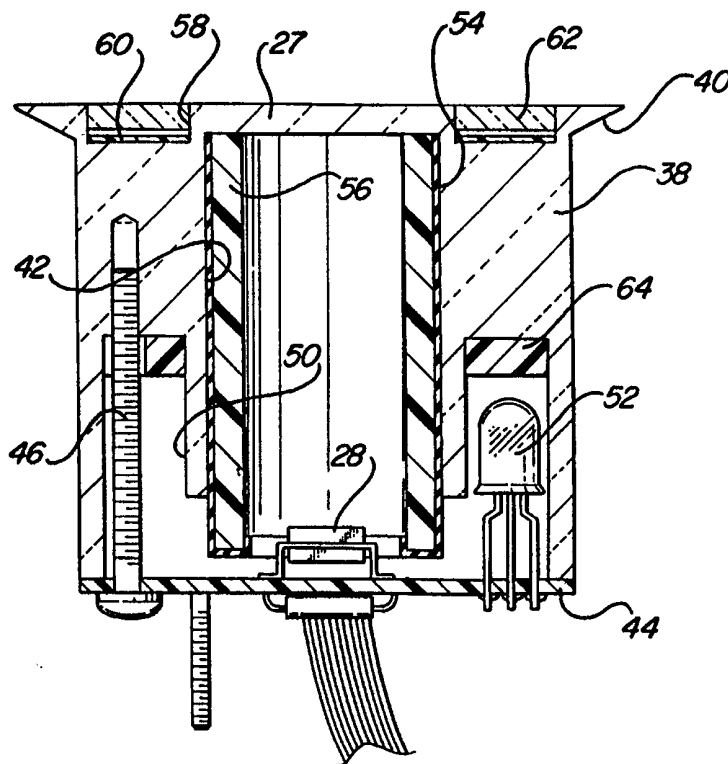

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## GAME MACHINE WAGER SENSOR

### TECHNICAL FIELD

5           The subject invention relates to a game in which a wager is made by placing a chip on the surface of a game board, such as a table.

### BACKGROUND OF THE INVENTION

10           There are various card games in which a wager is placed on the table by placing one or more chips on a designated spot on the gaming surface. There are various games in which a coin or chip is inserted into a slot and the wager is indicated by a light. Such systems are shown in the United States Patents 3,819,186 to Hinterstocker; 4,838,557 to Floyhar; 5,536,016 to  
15 Thompson; 5,364,104 to Jones et al, 5,377,994 to Jones, 5,393,067 to Paulsen et al, and 5,573,249 to Johnson. In some games it is often desirable to remove the chips after the bet is made. In other words, it is often desirable for a player to place a bet, yet allow a dealer to remove the chips from the betting area while the bet remains in force during play.

20

### SUMMARY OF THE INVENTION AND ADVANTAGES

          A game board for playing a game upon which wagers are made. The board has an upper playing surface presenting a plurality of player areas with  
25 each player area including at least one wager indicator. The wager indicator is characterized by including a lens substantially flush with the playing surface and a sensor for sensing the presence of a chip on the lens. The sensor comprises a photo-cell under each of the lens and in the center thereof for sensing the presence of a chip on the lens and a light surrounds each of the  
30 sensors for indicating that a wager has been placed on the lens of the wager

indicator. A light shield is disposed between the photo-cell and the light for preventing light rays from the light from reaching photo-cell.

### DESCRIPTION OF THE DRAWINGS

5

Other advantages of the present invention will be readily appreciated as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

10

Figure 1 is a plan view of a table top or game board implementing the subject invention;

Figure 2 is a schematic view of the subject invention;

Figure 3 is an enlarged fragmentary view taken along line 3-3 of Figure 1;

15

Figure 4 is a fragmentary plan view of one player area;

Figure 5 is a perspective view of the indicator of the subject invention;

and

Figure 6 is a cross sectional view taken substantially along line 6-6 of Figure 5.

20

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to the Figures, wherein like numerals indicate like or corresponding parts throughout the several views, an amusement device for combining the play of twenty-one and craps is generally shown in Figure 1. The device takes the form of a game board, mat, table cloth or cover, place mat, or the like, and may even be implemented in a computer program producing images for a monitor. In any case the device comprises a presenter for positioning at least two cards for each player and a craps wager indicator for each player to indicate the craps wager based upon the roll of two dice by each player having only two cards equaling twenty-one.

30

As illustrated, the device is a game board generally indicated at **10** for combining the play of twenty-one based upon at least one card deck having fifty-two cards divided into four suites of duces through aces and the play of craps based upon two dice each having six faces numbered one to six. The board **10** comprises an upper playing surface **12** which presents a semicircular playing arena, defined by the semi-circular periphery **14** and the straight diameter **16**. A dealer playing area is disposed adjacent the straight diameter **16** of the semicircular playing arena. More specifically, the dealer playing area is in the area between the indicia portraying the chip holder and chips and the indicia indicating that the dealer must stand on a card count of 17 and take a card on a card count of 16. This is a dealer presentation area for presenting the dealer's cards.

The board also defines a plurality of player areas spaced about the circumference of the circular periphery **14** of the semi-circular playing arena and opposed to the dealer playing area. Each of the player areas comprises a rectangular card box **18** defining a player presentation area for each player to present the player cards. A plurality of craps wager indicators **20**, **22** and **24** are disposed adjacent each player card rectangle **18** to divide the numbers 2 through 12 into a plurality of groups for wagering at different odds for each group. More specifically, a plurality of three craps wager indicators **20**, **22** and **24** are presented for each player with each indicator presenting different odds for different total dice numbers. A first **20** of die indicators presents the numerals *7 and 11* for first odds of five for one, a second **22** of the indicators presents the numerals *2, 3 and 12* for second odds of nine for one, and a third **24** of the indicators presents the remaining numbers for third odds of three for two.

The game board **10** presents an odds area **26** centrally located and indicating the first, second and third odds for the respective wager areas **20**, **22** and **24**. That is, the table pay-off odds of five chips for one chip bet on a natural *7 or 11*, the second table pay-off odds of nine chips for one chip bet

on craps 2, 3 or 12, and the third table pay-off odds of three chips for two chips bet on the point numbers 4, 5, 6, 8, 9 or 10. The first true odds are three and one half to one for a natural 7 or 11, the second true odds are eight to one for craps 2, 3 or 12, and the third true odds are one to two for point numbers 4, 5, 6, 8, 9 or 10.

The invention, therefore, includes a method of combining the play of twenty-one and craps comprising the basic steps of presenting at least two cards to each player followed by then offering a craps wager based upon the roll of two dice to a player having two cards equaling twenty-one, i.e., to each player having a blackjack. Each player having blackjack and beating the dealer then places a craps wager and rolls the dice; the wagers are then settled based upon the outcome of the roll of the dice. The offering of the craps wager includes the offer of a plurality of alternative dice number combinations in groups having different betting odds. More specifically, the offering of the wager combinations are divided into the dice number combinations of the natural 7 or 11 at first odds, the dice number combinations of any craps 2, 3 or 12 at second odds, and the remaining dice number combinations of the point numbers 4, 5, 6, 8, 9, or 10 at different third odds. For example, the numerals 7 and 11 may be at first odds of nine for two, the numerals 2, 3 and 12 may be at second odds of nine for one, and the remaining numbers of 4, 5, 6, 8, 9, and 10 may be at third odds of three for two. Of course, these odds may vary as in accordance with individual house rules.

The play of twenty-one is based upon at least one card deck having fifty-two cards divided into four suites of duces through aces and the play of craps based upon two dice each having six faces numbered one to six. It involves the placing of a blackjack wager on behalf of each player to beat a dealer player by placing chips in front of the card boxes 18. The dealer, or machine, presents two cards to each player including the dealer player by placing the cards on the card boxes 18 in sequence about the semi-circle 14. As is normal in the game of blackjack, additional cards are sequentially

presented to each player in response to a request for same from that player. Thereafter, the blackjack wagers are paid or settled in the absence of requests for additional cards. The opportunity or option to roll two dice is then presented to each player beating the dealer player with a blackjack consisting of only two cards equaling twenty-one. However, before the roll of the dice, each player establishes a craps wager, if the player wishes to participate, based upon the roll of the two dice by placing chips on one of the three circles **20**, **22**, or **24** to indicate the numbers and odds of the roll. The blackjack winner then rolls the dice once and each craps wager is settled based the outcome of the roll of the dice.

Accordingly, at one seating a player may play blackjack and qualify to further bet on a craps roll of the dice each time a player is dealt a blackjack.

An accumulated pot variation which may be combined with or substituted for the wager entitlement which occurs upon a player having two cards equaling twenty-one. In either case, the two are completely independent as the wagers on the accumulated pot are accumulated separately and paid out on independent criteria. However, in the preferred embodiment, the accumulated pot is played along with or in conjunction with the craps wager entitlement. More specifically, the accumulated pot variation is played by offering an accumulative pot wager based upon the roll of two dice prior to presenting the cards to the players. In other words, the entire game is initiated by each player placing a pot wager on one or more of the craps wager indicator areas **20**, **22** and **24**.

The invention is characterized by each wager indicator including a lens **27** substantially flush with said playing surface, i.e., the upper surface of the lens is flush enough with the upper surface **12** of the game board **10** to prevent cards from hanging up or being prevented from sliding over the lens. A sensor **28** is included for sensing the presence of a chip on the lens **27**. The lens **27** is clear or opaque to allow light to pass through and the sensor **28** senses the absence of such light when a chip covers the center of the lens **27**. Each sensor **28** comprises a photo-cell supported centrally under each lens **27**.

by a bracket **32** secured to the bottom of the table or board **12**. Each wager indicator also includes a light **30** for indicating that a wager has been placed on the lens of the wager indicator. The light **30** surrounds the sensor **28** under each lens **27** and comprises at least one light emitting diode. As illustrated, each lens **27** is circular and each light **30** comprises a plurality of light emitting diodes disposed about the circumference of the circular lens **27** and around the sensor **28** in the middle of that lens. Each light **30** comprises a tube of light with a longitudinal axis disposed in circle about the circumference of the lens **27** and around the sensor **28**. The diodes may be equally spaced within the tube or the tube may be of the florescent type. In addition, the lights are of a plurality of colors, e.g., each indicator may be of a different color or each indicator may include a plurality of diodes each of a different color. The numbers *7 and 11* are disposed in circle about the photo-cell and above the light of the first indicator **20**, the numbers *2, 3 and 12* are disposed in circle about the photo-cell and above the light of the second indicator **22**, and the numbers *4, 5, 6, 8, 9 and 10* are disposed in circle about the photo-cell and above the light of the third indicator **24**.

The system will include a register **34** for storing the pot wager placed by each player upon the craps wager indicators **20**, **22** and **24**, i.e., the register **34** will indicate the one or ones of the three craps wager indicator areas **20**, **22** and **24** upon which each player has placed a pot wager. In addition to the register **34**, each wager indicator **20**, **22** and **24** has a sensor **28** for electronically counting the chip wagered on the pot with an indicator light **30** to indicate the indicator upon a chip was wagered. More specifically, a switching device **36** is disposed between each group of indicators for each player and the register **34** for switching the light **30** on when the sensor **28** associated therewith senses a chip and maintains that light in the on or illuminated condition after the dealer removes the chips from the table. In other words, the switching device **36** maintains the light for each indicator illuminated after the chip is removed from the lens **30** and during the play of



blackjack until play is over or a player becomes qualified by being dealt a predetermined blackjack, in which case, that qualified player rolls the dice for the accumulated pot or pots upon which the player initially placed a wager.

5 As illustrated in Figures 5 and 6, each of the indicators **20**, **22** and **24** has a cylindrical body **38** with the lens **27** at an upper end thereof and presenting an open lower end. The lens **27** has an annular periphery extending radially outwardly from the cylindrical body **38** and is tapered or conical **40** to engage a beveled countersunk hole in the playing surface **12**.

10 The cylindrical body **38** has a central cavity **42** extending from the open bottom to the lens **27**. A circuit board **44** is secured to the bottom of the cylindrical body **38** by threaded fasteners **46** which extend through the circuit board **44** and are threaded into the cylindrical body **38** for securing the circuit board **44** to the body **38**. The photo-cell **28** is disposed on the circuit board **44** and is axially aligned with the central cavity **42**. The body **38** includes a depending skirt **48** to define the lower end of the cavity **42** and to define an annular space **50** in the open bottom of the body **38**.

The light **30** comprises a plurality of LED lights **52** supported about a circle on the circuit board **44** and extending into the annular space **50** in the open bottom of the cylindrical body **38**.

20 A light shield **54** is disposed in the cavity **42** around the photo-cell **28** and between the photo-cell **28** and the light for preventing light rays from the light from reaching the photo-cell **28**. The shield **54** is tubular with an upper end adjacent the lens **27** and a lower end adjacent and surrounding the photo-cell **28**. The shield **54** comprises a light impervious layer supported on and around a plastic tube **56**, both of which are press fit into the central cavity **42**.

25 The lens **27** presents an annular recess **58**. A wafer **60** with indicia thereon is disposed in the recess **58** and an opaque ring **62** fills the recess **58** over or above the wafer **60** whereby the indicia on the wafer **60** is visible through the wafer **60**. More specifically and as best shown in Figure 4, a first of the wafers **60** for the first **20** of the indicators for each player area presents

30

the numbers *7 and 11* for first odds, a second of the wafers **60** for a second **22** of the indicators for each player area presents the numbers *2, 3 and 12* for second odds, and a third of the wafers **60** for a third **24** of the indicators for each player area presents the numbers *4, 5, 6, 8, 9 and 10* for third odds.

5 The numbers *7 and 11* are disposed in circle about the lens of the first indicator **20**, the numbers *2, 3 and 12* are disposed in circle about the lens of the second indicator **22**, and the numbers *4, 5, 6, 8, 9 and 10* are disposed in circle about the lens of the third indicator **24**. The numbers *7 and 11* are disposed vertically above the lights **52** of the first indicator **20**, the numbers  
10 *2, 3 and 12* are disposed vertically above the lights **52** of the second indicator **22**, and the numbers *4, 5, 6, 8, 9 and 10* are disposed vertically above the lights **52** of the third indicator **24**.

Further to enhance the assembly, a light dispersion ring **64** is disposed in the annular space **50**. around the skirt **50** and around the light shield **54** and  
15 above the light and vertically below the opaque ring **62** for dispersing light around the opaque ring **62**. In other words, the dispersion ring **64** evens the light around the opaque ring **62** to provide an evenly lite opaque ring **62**.

Accordingly, the light shield **54** prevents light from reaching the photo-cell **28** when a chip or coin is disposed on the lens **27**, i.e., the photo-cell  
20 produces a signal when light is cut off from the photo-cell, which then indicates that a wager has been made by illuminating the lights.

The game proceeds as described above with the craps wager indicator areas **20**, **22** and **24** used by the players to place wagers in the event one of the players gets twenty-one. Successive hands are dealt and played while  
25 accumulating the pot wagers without payout until a player becomes a qualified player by having two cards of a predetermined combination to make a predetermined blackjack equaling twenty-one. In other words, when a player receives a predetermined blackjack, e.g., a predetermined combination of an Ace and a Jack of the same suit or different suits, or specifically the Ace of  
30 hearts and the Jack of spades, that player becomes a qualified player eligible

to win a portion of the accumulated pot. The register **34** has retained the count as to which indicators each player has placed an accumulated pot wager; thus, accumulating the total in each accumulated pot from hand to hand. The lights **30** and **52** indicate the wagers and allow the qualified player with the  
5 predetermined blackjack to roll the dice for that particular accumulated pot.

The qualified player rolls the dice to match his initial pot wager placed at the beginning of the game and which the register light **30** has indicated throughout the play. If the player placed wagers on more than one indicator, the player rolls the dice once for each different indicator upon which the  
10 player placed a wager. Accordingly, an or at least a portion of the accumulated pot is paid out to the qualified player in response to the registered pot wager by the qualified player covering the outcome of the roll of the dice. That is, the accumulated pot is paid to the player if the roll of the dice for a certain indicator matches any of the numbers in that indicator. The  
15 accumulated pot is divided into three different payout portions each corresponding to one of the craps wager indicators **20**, **22** and **24**. Hence, the pot wager is made on the dice number combinations of 2, 3 and 12 at the greatest payout portion and dice number combinations of 7 and 11 at a lesser payout portion and the remaining dice number combinations at the smallest  
20 payout portion.

Although the invention has been described in connection with a game combining craps and blackjack, it may be used effectively with any card game where wagers are placed upon a table, e.g., poker, baccarat, and the like.

The invention has been described in an illustrative manner, and it is to be understood that the terminology which has been used is intended to be in  
25 the nature of words of description rather than of limitation. Obviously, many modifications and variations of the present invention are possible in light of the above teachings. It is, therefore, to be understood that within the scope of the appended claims, wherein reference numerals are merely for convenience and  
30 are not to be in any way limiting the invention may be practiced otherwise than as specifically described.

## CLAIMS

What is claimed is:

5           1.     A game board for playing a game upon which wagers are made, said board comprising:

          an upper playing surface (12) presenting a plurality of player areas, each of said player areas includes first, second and third wager indicators (20, 22, 24), each of said wager indicators (20, 22, 24) including a lens (27)  
10       substantially flush with said playing surface (12) and a sensor (28) for sensing the presence of a chip on said lens (27),

          said sensor comprising a photo-cell under each of said lens (27) and in the center thereof for sensing the presence of a chip on said lens (27), and a light (30) surrounding each of said sensors for indicating that a wager has been  
15       placed on said lens of said wager indicator (20, 22, 24), and

          a light shield (54) disposed between said photo-cell and said light for preventing light rays from said light from reaching said photo-cell.

20           2.     A game board as set forth in claim 1 wherein said shield (54) is tubular with an upper end adjacent said lens and a lower end adjacent said photo-cell.

25           3.     A game board as set forth in claim 1 wherein said lens presents an annular recess (58), a wafer (60) with indicia thereon disposed in said recess (58), and an opaque ring (62) filling said recess (58) over said wafer (60) whereby the indicia on said wafer (60) is visible through said wafer (60).

30           4.     A game board as set forth in claim 3 wherein a first of said wafers (60) for said first (20) of said indicators for each player area presents the numbers 7 and an 11 for first odds, a second of said wafers (60) for a

second (22) of said indicators for each player area presents the numbers 2, 3 and 12 for second odds, and a third of said wafers (60) for a third (24) of said indicators for each player area presents the numbers 4, 5, 6, 8, 9 and 10 for third odds.

5

5. A game board as set forth in claim 1 wherein each of said indicators has a cylindrical body (38) with said lens at an upper end thereof and presenting an open lower end.

10

6. A game board as set forth in claim 5 said lens having an annular periphery extending radially outwardly from said cylindrical body (38).

15

7. A game board as set forth in claim 6 wherein said periphery of said lens is tapered (40) to engage a beveled countersunk hole in said playing surface.

8. A game board as set forth in claim 5 including a circuit board (44) secured to said bottom of said cylindrical body (38).

20

9. A game board as set forth in claim 8 wherein said light comprises a plurality of lights (52) supported about a circle on said circuit board (44) and extending into said open bottom of said cylindrical body (38).

25

10. A game board as set forth in claim 9 wherein said cylindrical body (38) has a central cavity (42) extending from said open bottom to said lens, said photo-cell being disposed on said circuit board (44) axially aligned with said central cavity (42), light shield (54) disposed in said cavity (42) around said photo-cell and between said photo-cell and said light for preventing light rays from said light from reaching said photo-cell.

30

11. A game board as set forth in claim 10 wherein said shield (54) comprises a light impervious layer and a tube surrounded by said light impervious layer.

5 12. A game board as set forth in claim 10 including fasteners (46) extending through said circuit board (44) and into said cylindrical body (38) for securing said circuit board (44) to said body (38).

10 13. A game board as set forth in claim 10 wherein said lens presents an annular recess (58), a wafer (60) with indicia thereon disposed in said recess (58), and an opaque ring (62) filling said recess (58) over said wafer (60) whereby the indicia on said wafer (60) is visible through said wafer (60).

15 14. A game board as set forth in claim 13 including a light dispersion ring (64) disposed around said light shield (54) and above said light and below said opaque ring (62) for dispersing light around said opaque ring (62).

20 15. A game board (44) as set forth in claim 14 wherein said body (38) includes a depending skirt (48) to define the lower end of said cavity (42) and to define an annular space (50) in the open bottom of said body (38), said light dispersion ring (64) being disposed in said annular space (50).

**AMENDED CLAIMS**

[received by the International Bureau on 31 August 1999 (31.08.99);  
original claims 1 and 2 amended;  
remaining claims unchanged (1 page)]

5                   1. A game board for playing a game upon which wagers are made,  
said board comprising:

an upper playing surface (12) presenting a plurality of player areas,  
each of said player areas includes first, second and third wager indicators (20,  
22, 24), each of said wager indicators (20, 22, 24) including a lens (27)  
10 substantially flush with said playing surface (12) and a sensor (28) for sensing  
the presence of a chip on said lens (27),

said sensor comprising a photo-cell under each of said lens (27) and in  
the center thereof for sensing the presence of a chip on said lens (27), and a  
light (30) surrounding each of said sensors for indicating that a wager has been  
15 placed on said lens of said wager indicator (20, 22, 24) and

a light shield (54) having a lower end adjacent said photo-cell and an  
upper end adjacent said lens for preventing light rays from said light from  
reaching said photo-cell.

20                   2. A game board as set forth in claim 1 wherein said shield (54)  
is cylindrical.

3. A game board as set forth in claim 1 wherein said lens presents  
an annular recess (58), a wafer (60) with indicia thereon disposed in said  
25 recess (58), and an opaque ring (62) filling said recess (58) over said wafer  
(60) whereby the indicia on said wafer (60) is visible through said wafer (60).

4. A game board as set forth in claim 3 wherein a first of said  
wafers (60) for said first (20) of said indicators for each player area presents  
30 the numbers 7 and an 11 for first odds, a second of said wafers (60) for a

1/4

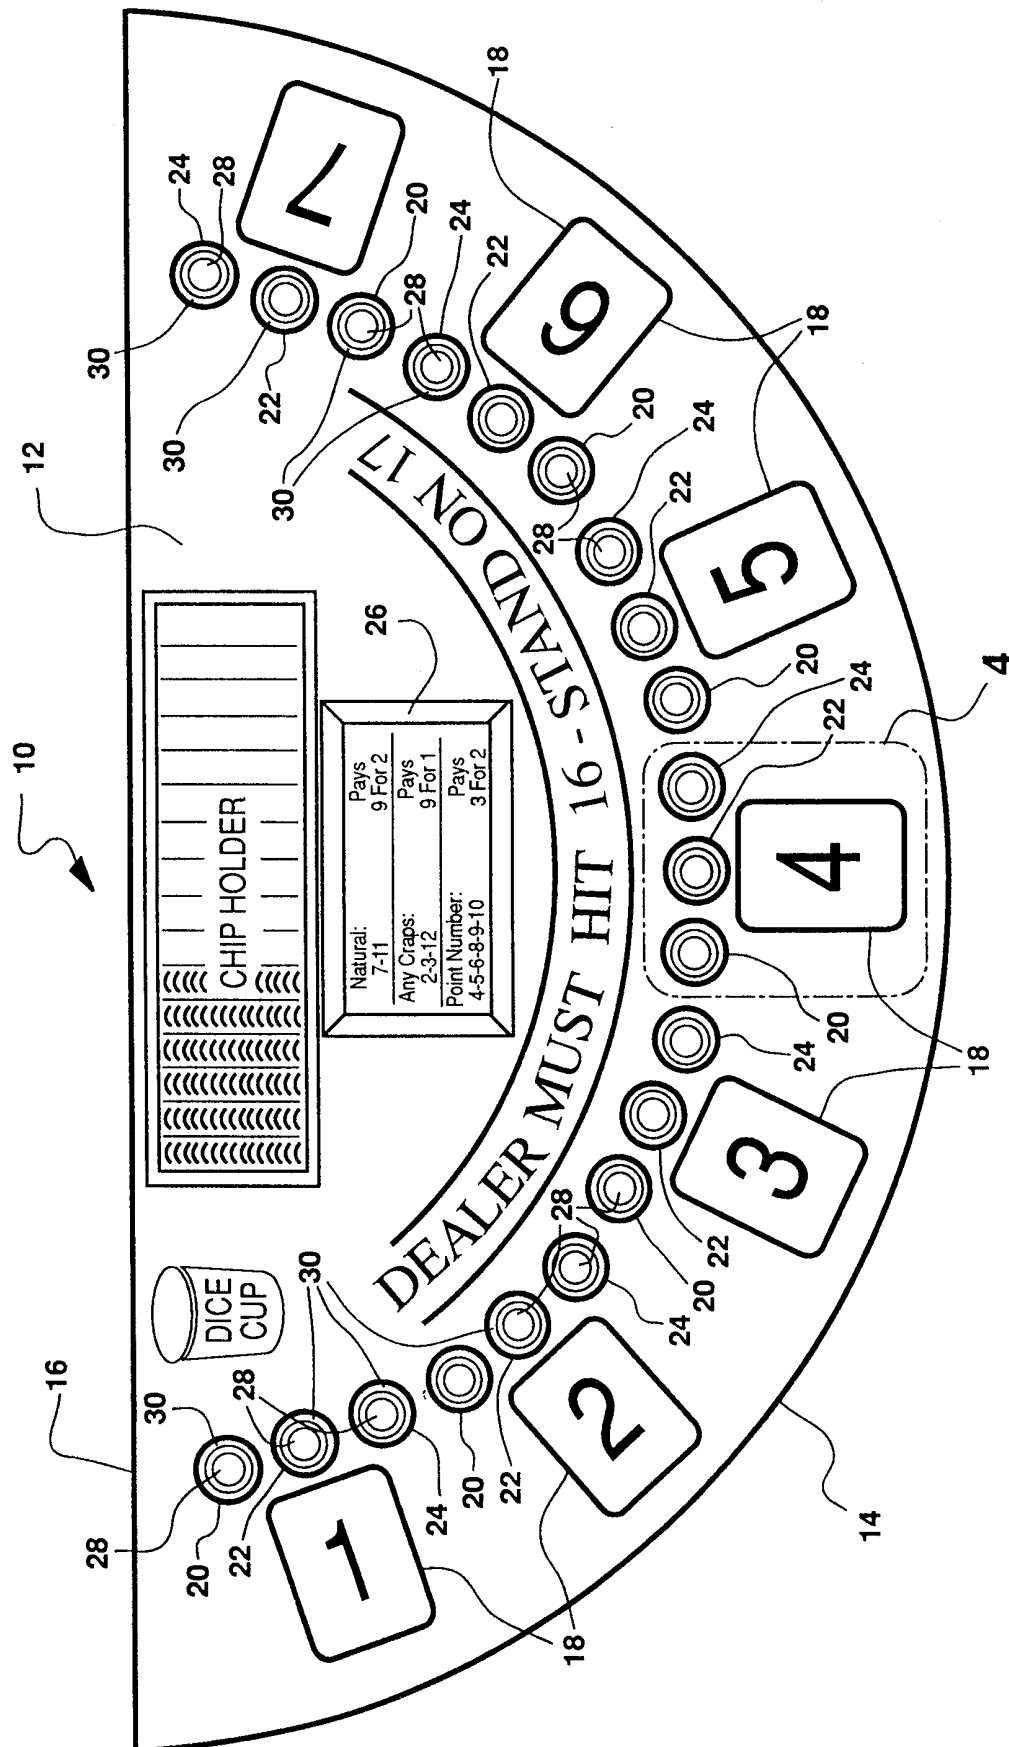


FIG - 1



2/4

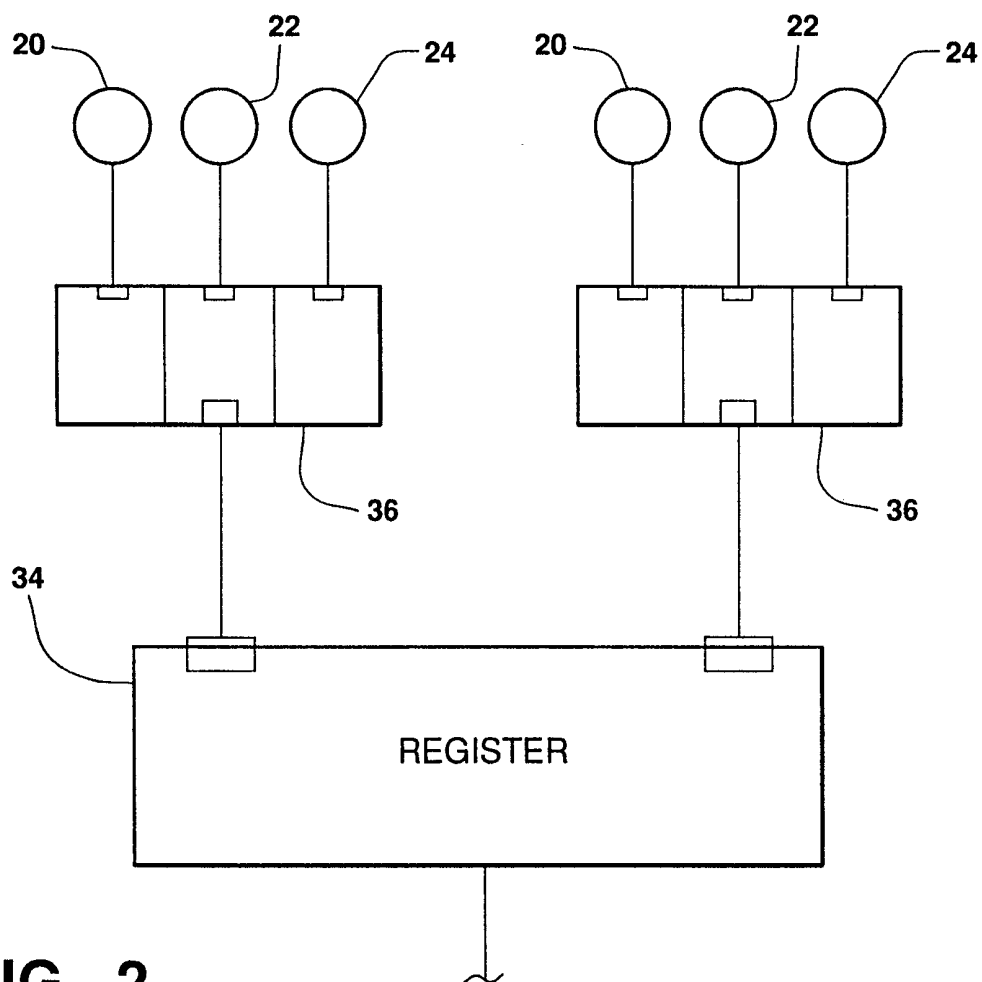


FIG - 2

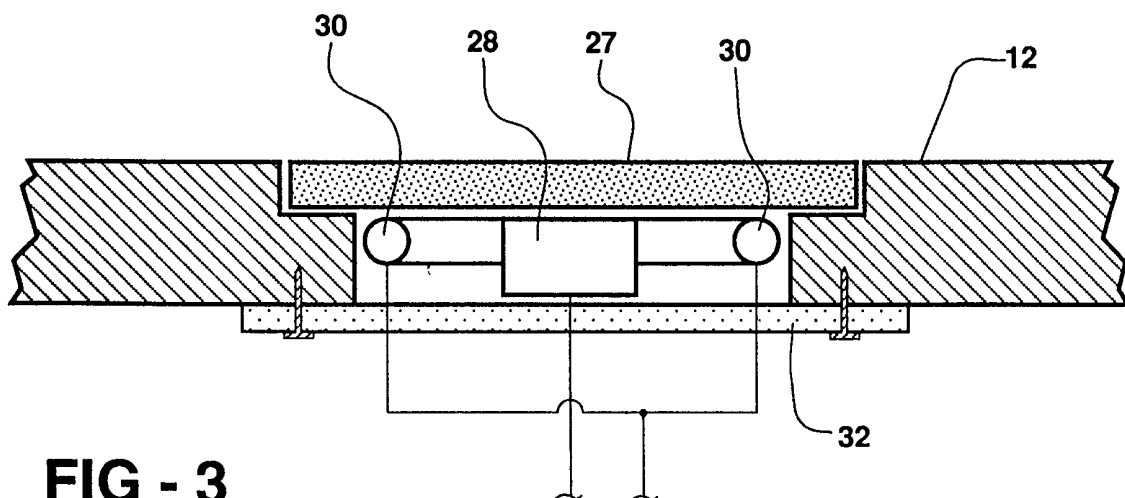


FIG - 3



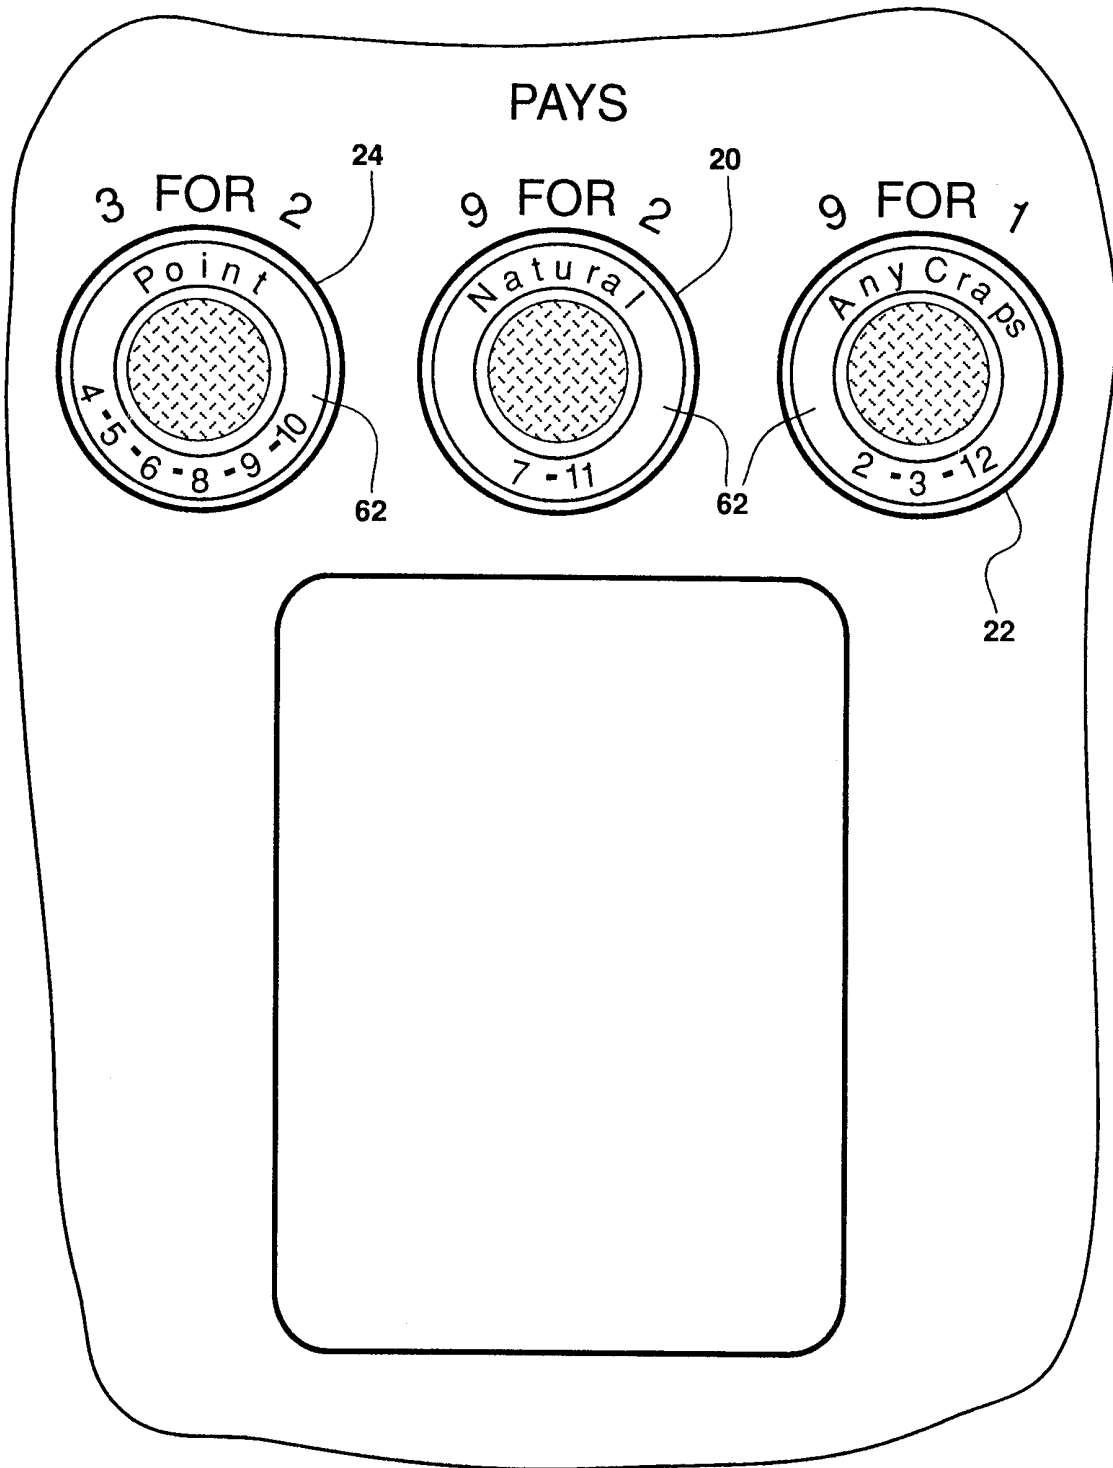


FIG - 4

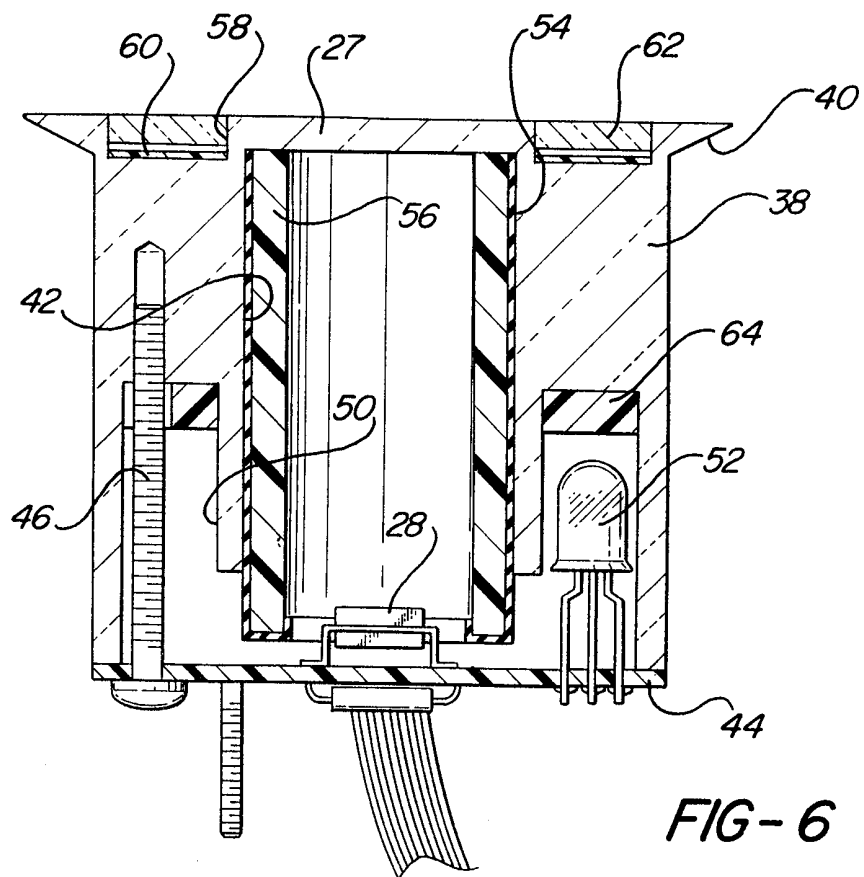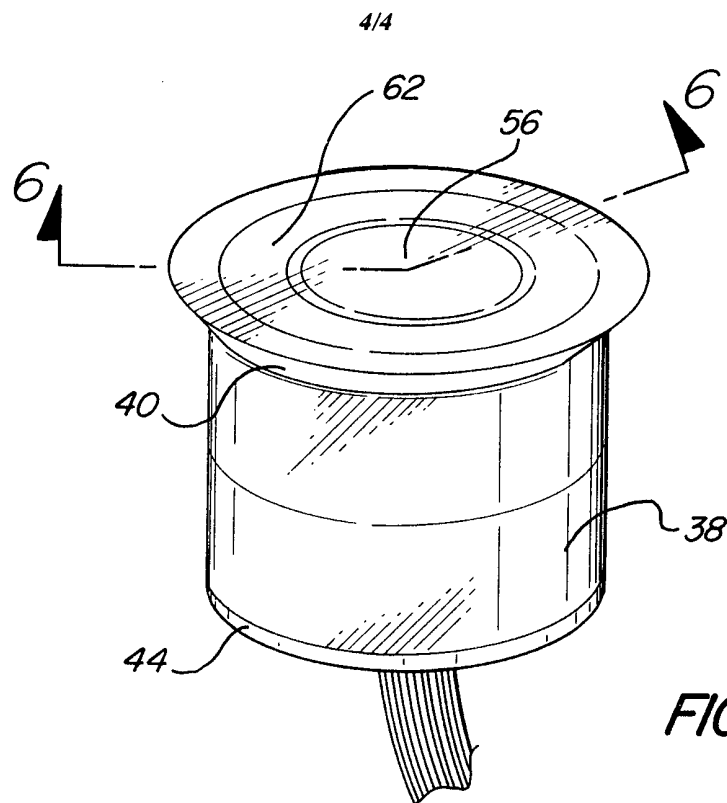

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/06649

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : A63F 1/00, 1/18, 1/06

US CL : 273/292,309; 463/29

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 273/292,309,274,148R; 463/29,12,25,26,47; 194/239,328,344,351

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS: search terms "gambling, bet, sensor, light"

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,393,067 A (PAULSEN et al.) 28 February 1995, see Figure 3.	1
---		---
A		2-15
A, P	US 5,735,525 A (MCCREA) 07 April 1998, see Figure 13.	1-15
A, P	US 5,823,875 A (TARANTINO) 30 October 1998, complete document.	1-15
A, P	US 5,836,818 A (JONES et al.) 17 November 1998, see complete document.	1-15
A	US 5,669,816 A (GARCZYNSKI et al.), 23 September 1997, see Figure 3.	1-15

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents.	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

22 JUNE 1999

Date of mailing of the international search report

02 AUG 1999

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

Wm. LaMarca/R.J. Apley

Telephone No. 703-308-3591