

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 October 2008 (02.10.2008)

PCT

(10) International Publication Number
WO 2008/117121 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/IB2007/004539

(22) International Filing Date:
6 November 2007 (06.11.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/864,474 6 November 2006 (06.11.2006) US

(71) Applicant (for all designated States except US): **MAGNITUDE SPAS** [FR/FR]; Centre Regain, Route de Marseille, F-04220 Sainte Tulle (FR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BERGERY, Guillaume, B.** [FR/FR]; 2620 chemin de Maliverny, F-13540 Puyricard (FR).

(74) Agent: **CABINET GERMAIN & MAUREAU**; B.P. 6153, F-69466 Lyon Cedex 06 (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

(54) Title: SYSTEM, METHOD AND COMPUTER PROGRAM PRODUCT FOR STACKING SEISMIC NOISE DATA TO ANALYZE SEISMIC EVENTS

FIG. 1

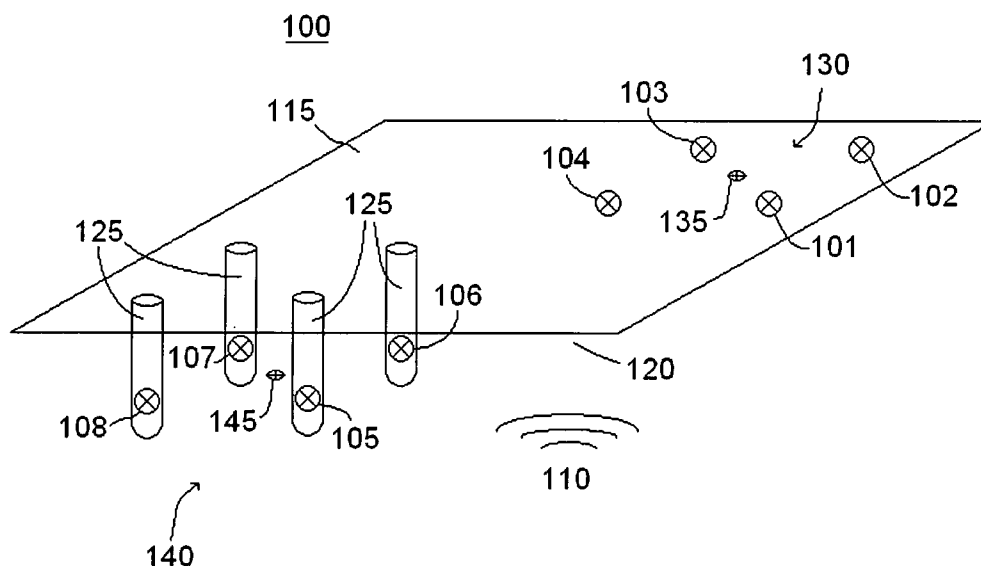

(57) Abstract: Disclosed is a method for determining seismic event data from indications of seismic noise, the method including receiving seismic trace data from a plurality of locations, and providing a virtual trace value (E_{virtual}) as seismic event data for a virtual trace location from the seismic trace data. A system and computer program product for determining seismic event data is also disclosed.

WO 2008/117121 A2

**SYSTEM, METHOD AND COMPUTER PROGRAM PRODUCT FOR
STACKING SEISMIC NOISE DATA TO ANALYZE SEISMIC EVENTS**

Guillaume B. Bergery

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] Under 35 U.S.C. §119(e), this application claims the benefit of U.S. Provisional Application No. 60/864,474, filed 11/06/2006, the entire disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0002] The teachings herein relate to seismic tools used in subterranean exploration, in particular, to techniques for minimizing noise and providing for detection of microseismic events.

2. Background of the Related Art

[0003] Subterranean formations may be monitored using one or more seismic receivers. The receivers may be geophones placed at the surface or submerged in wells or on the ocean floor. Also, the receivers may be hydrophones placed in those same locations, but sensitive to only certain types of waves. The receivers placed in wells may be shallow (usually above the formation of interest) or deep (at or below the formation of interest). Seismic receivers may be sensitive to seismic waves along a certain axis or those traveling on any axis. Likewise, the receivers may be sensitive to only certain types of seismic waves, or to several types. Those sensitive to certain axes of travel, called directional receivers, may be coupled with other directional receivers, for example, in a set of three orthogonal receivers which collect information about the waves in three dimensions. This three-dimensional information may be rotated mathematically through the use of trigonometric functions in order to derive information as to wave travel in the x-axis, y-axis, and z-axis relative to gravity. Alternatively, mathematical rotation may provide translation of the data relative to a wellbore, a cardinal direction, or any other reference point.

[0004] Microseismic monitoring concerns passively monitoring a formation for seismic events which are very small. Such events may include the seismic effects

generated in a formation by fracturing, depletion, flooding, treatment, fault movement, collapse, water breakthrough, compaction or other similar subterranean interventions or effects. One of the main problems with microseismic monitoring, as with other forms of seismic monitoring, is that of noise. With microseismic events, however, the problem is emphasized because the signal strength is generally very small. This means, in turn, that a small amount of noise which would not cause any significant effect as to a regular, active seismic survey causes a significant degradation of the signal to noise ratio in the microseismic survey.

[0005] Microseismic surveys include tasks such as receiving data from a receiver, locating data which exceeds some threshold, and analyzing those over-threshold data in order to determine information about certain events. Data which does not meet the threshold may be considered noise data, and may be discarded or simply not recorded.

[0006] Microseismic data may be analyzed as a set, with several receivers providing data for a joint analysis. Data is collected from a receiver and related to the other data collected from other receivers in order to derive additional information about the formation. Information from three receivers, for example, may be triangulated in order to estimate the location of a seismic event.

[0007] What are needed are a method and a system to make use of seismic data, such as microseismic data previously thought to contain only noise data, in order to derive information about events.

SUMMARY OF THE INVENTION

[0008] Disclosed is a method for determining seismic event data from indications of seismic noise, the method including receiving seismic trace data from a plurality of locations, and providing a virtual trace value (E_{Rvirtual}) as seismic event data for a virtual trace location from the seismic trace data.

[0009] Also disclosed is a system for determining seismic event data from indications of seismic noise, the system including a plurality of seismic receivers for providing seismic trace data, at least two of the plurality of seismic receivers arranged to provide for a virtual trace location, and at least one processor adapted for receiving the seismic trace data from the at least two seismic receivers as input information and

for performing a method comprising providing a virtual trace value (E_{Rvirtual}) as seismic event data for the virtual trace location.

[0010] Further disclosed is a computer program product including machine readable instructions stored on machine readable media. The instructions are for determining seismic event data by implementing a method including receiving seismic trace data from a plurality of locations, and providing a virtual trace value (E_{Rvirtual}) as seismic event data for a virtual trace location from the seismic trace data.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The subject matter which is regarded as the invention is particularly pointed out and distinctly claimed in the claims at the conclusion of the specification. The foregoing and other objects, features, and advantages of the invention are apparent from the following detailed description taken in conjunction with the accompanying drawings in which:

FIG. 1 illustrates a system for seismic monitoring.

FIG. 2 illustrates an embodiment of a processing unit for processing data indicative of seismic activity.

FIG. 3 is a flowchart illustrating exemplary aspects of a method for monitoring seismic events.

DETAILED DESCRIPTION OF THE INVENTION

[0012] Subterranean formations are of interest for a variety of reasons. Such formations may be used for the production of hydrocarbons, the storage of hydrocarbons or other substances, mining operations or a variety of other uses. One method used to obtain information regarding subterranean formations is to use acoustic or seismic waves to interrogate the formation. Seismic waves may be generated into the formation and the resulting reflected waves received and analyzed in order to provide information about the geology of the formation. Such interrogations are referred to as active seismic surveys.

[0013] Microseismic monitoring concerns passively monitoring a formation for seismic events which are very small. In passive monitoring, the formation is not interrogated, per se, but seismic receivers are placed to receive directly any seismic waves generated by events occurring within the formation. Such events may include the seismic effects generated in a formation by fracturing, depletion, flooding, treatment, fault movement, collapse, water breakthrough, compaction or other similar subterranean interventions or effects. This additional information about these events may be very useful in determining certain interventions in order to enhance the use of the formation or provide additional safety measures in certain situations. For example, it is common in the hydrocarbon production industry to fracture or “frac” a formation. During this operation, fluid and propanant is pumped down a well at high pressure in order to generate additional fracturing within a zone of the well. The propanant is pumped into these fractures and maintains them after the pressure is removed. Monitoring the seismic waves generated during and immediately after a frac operation can provide critical information about the operation, such as the direction and extent of the fractures being generated.

[0014] In yet another exemplary application, microseismic monitoring may be used to provide long-term monitoring for subterranean storage facilities and formations from which hydrocarbons or water is being produced. Under certain conditions, the integrity of these formations may become compromised, causing collapse. Such collapses may pose a safety concern for those on the surface, as entire sections of ground may fall into the collapse. However, often certain characteristic small seismic waves may precede such failures, permitting remedial measures to delay the collapse and ultimately warn of the impending collapse to allow for isolation of any dangerous areas from personnel.

[0015] Referring to **FIG. 1**, there are shown aspects of an exemplary embodiment of a system for seismic monitoring **100**. In one embodiment, one or more subterranean formations are monitored using one or more seismic receivers **101-108**. Each receiver **101-108** receives seismic waves **110** generated by seismic activity and generates seismic trace data representing the waves **110** and indicative of the seismic activity. In this embodiment, seismic receivers are passive seismic receivers. Each receiver **101-108** may be a geophone (as shown in **FIG. 1**) and/or a hydrophone submerged in

wells or on the ocean floor. Each receiver **101-108** may be an analog or digital receiver. Other types of seismic receivers known now or in the future may also be used. As shown in **FIG. 1**, the receivers **101-108** may be placed in a location on a surface **115** of the earth **120** surrounding the formations, and may also be disposed in a location within one or more wellbores **125** that have been drilled into the earth **120** and may extend into and/or through the formations. In the present embodiment, receivers **101, 102, 103** and **104** are placed on the surface **115**, and receivers **105, 106, 107** and **108** are submerged in the wellbores **125**. The number and position of the receivers **101-108** are merely exemplary. Any number or configuration of receivers may be used, at various desired depths.

[0016] The receivers **101-108** may be placed in shallow wells (usually above the formation of interest), deep wells (for example, at or below the formation of interest) or at the surface **115**. The receivers **101-108** may be sensitive to seismic waves **110** along a certain axis or those traveling on any axis. Likewise, the receivers **101-108** may be sensitive to only certain types of seismic waves, or several types. Those receivers **101-108** sensitive to certain axes of travel, called directional receivers **101-108**, may be coupled with other directional receivers **101-108**. For example, multiple directional receivers **101-108** may be coupled together in a set of three orthogonal receivers which collect information about the waves **110** in three dimensions. This three-dimensional information may be rotated mathematically through the use of trigonometric functions in order to derive information as to wave travel in the x-axis, y-axis, and z-axis relative to gravity. Alternatively, mathematical rotation may provide translation of the data relative to the wellbore **125**, a cardinal direction, or any other reference point.

[0017] In one embodiment, the receivers **101-108** may be represented as one or more pluralities of receivers. For example, the receivers **101, 102, 103** and **104** may represent a first plurality **130**, and the receivers **105, 106, 107** and **108** may represent a second plurality **140**. In one embodiment, the receivers **101-104** of the first plurality **130** are arranged to provide for a first virtual trace location **135**, and the receivers **105-108** of the second plurality **140** are arranged to provide for a second virtual trace location **145**.

[0018] Referring to **FIG. 2**, each receiver **101-108** may be coupled to a processing unit **200** such as a computer (or data from receivers **101-108** may be provided to a computer) for analysis. The processing unit **200** may include, without limitation, at least one power supply **205**, an input / output bus **210**, a processor **215**, a memory device or system **220**, a clock **225** or other time measurement device, and other components (not shown) such as an input device and an output device. The power supply **205** may be incorporated in a housing along with other components of the processing unit **200**, or may be connected remotely such as by a wired connection. Other components may be included as deemed suitable.

[0019] Generally, the processing unit **200** receives trace data from one or more of the receivers **101-108** and processes the trace data, such as by the methods described herein. Each receiver **101-108** may be coupled in communication with the processing unit **200** by a direct connection, such as a wired connection. In one embodiment, one or more components of the processing unit **200** may be incorporated with one or more of the receivers **101-108** in a common housing, and/or may be positioned with or near one or more of the receivers **101-108**. In another embodiment, each receiver **101-108** may be coupled in communication with the processing unit **200** via a wireless connection. The wireless connection may be provided for by an antenna (and other suited wireless equipment) for generation of a wireless communications signal. The illustrations of **FIGS. 1** and **2** are non-limiting and merely exemplary of one embodiment of the network **100**.

[0020] The seismic waves of interest for microseismic monitoring are generally of very small amplitude. Accordingly, a small amount of noise may cause a significant degradation of the signal to noise ratio in a microseismic survey. It has been discovered, however, that analyzing several sets of waves **110** which have a very poor signal to noise ratio yields useful information and may lead to the detection of events which were previously undetectable as being below threshold values for detection.

[0021] There is provided a system and method for analyzing seismic data, such as microseismic data, that incorporates seismic trace data from a plurality of seismic receivers **101-108**, and detects microseismic events. The microseismic trace data may be analyzed as a set, with several of the receivers **101-108** providing trace data for a joint analysis. Trace data is collected from a plurality of the receivers **101-108** and

computed to form a single virtual point. The virtual point may then be examined in order to determine if there has been a microseismic event. The results from several virtual points may be triangulated in order to determine the location of the event. Although the systems and methods described herein are described in conjunction with microseismic monitoring, the systems and methods may also be used for active monitoring and/or other types of passive monitoring.

[0022] FIG. 3 illustrates a method 300 for monitoring seismic events, which may be utilized in, but is not limited to, microseismic passive monitoring. The method 300 includes one or more stages 305, 310, 315, 320 and 325. The method 300 is described herein in conjunction with the plurality 130 of receivers 101-104, although the method may be performed in conjunction with any number and configuration of receivers.

[0023] In the first stage 305, a stream of trace data from each of a plurality of the receivers 101-104 is received, such as by processor 215. Trace data may include data regarding seismic events and data that is considered noise. Each stream of trace data includes a plurality of data points generated by a respective receiver 101-104 during a selected duration of time or time window. The plurality of data points from a single receiver 101-104 over the selected duration of time is referred to as a "trace". These data points may also be referred to as a "trace data stream".

[0024] In one embodiment, the plurality of receivers used to generate a virtual point includes each of the receivers 101-104, and thus includes four (4) receivers. However, the plurality of receivers may be two receivers, three receivers, or any number and any combination of the receivers 101-108. Furthermore, when multiple virtual points are calculated from multiple pluralities of receivers 101-108, the individual receivers in each plurality may be selected from any number of receivers 101-108, and may include receivers that are selected for other pluralities, i.e., multiple pluralities may share common receivers.

[0025] In the second stage 310, the values received from the receivers 101-104 may be normalized to achieve a scale value, such as a scale value having a maximum of one (1). In one embodiment, normalization may be achieved by a method including division of the values received from the receivers 101-104 by the standard deviation.

[0026] In the third stage **315**, the traces received from each of the receivers **101-104** are used to calculate a virtual trace value.

[0027] In one embodiment, a value for each trace received from each respective receiver **101-104**, i.e., a “trace value”, may be computed by adding the values of the data points in the trace for the respective receiver **101-104**, i.e., the value of each data point generated by the respective receiver **101-104** within the selected duration of time.

[0028] The following naming and numbering convention is provided to illustrate the method **300** described herein. The naming and number convention provided is arbitrarily chosen, and is provided for explanation only.

[0029] “ R_n ” corresponds to a specific receiver number in the plurality of receivers, at a given location at the surface or downhole in a wellbore, such as wellbore **125**. For example, receivers **101**, **102**, **103** and **104** may correspond to R_1 , R_2 , R_3 and R_4 , respectively. “ E_{R_n} ” corresponds to a trace value of a receiver having a corresponding receiver number. “ $E_{R_{\text{virtual}}}$ ” corresponds to a virtual trace value calculated from the plurality of receivers. “ Trace_x ” corresponds to each of a plurality of data points in a specific trace in a specific time window.

[0030] The plurality of data points (trace_x) collected from each receiver (R_n) may be used to compute a trace value (E_{R_n}). Using multiple trace values, e.g., $E(R_1, R_2, R_3 \dots R_n)$, the virtual trace value ($E_{R_{\text{virtual}}}$) may be determined.

[0031] In one embodiment, each trace value (E_{R_n}) may be achieved by simply adding the values of each data point (trace_x) in each trace, e.g., in each trace received from respective receivers **101-104**. In other embodiments, each trace value (E_{R_n}) may be calculated using methods that include statistical analysis, data fitting, and data modeling. Examples of statistical analysis include calculation of a summation, an average, a variance, a standard deviation, t-distribution, a confidence interval, and others. Examples of data fitting include various regression methods, such as linear regression, least squares, segmented regression, hierarchical linear modeling, and others. Examples of data modeling include direct seismic modeling, indirect seismic modeling, and others.

[0032] In one embodiment, the trace values (E_{Rn}) from the plurality (e.g., a plurality 130) of receivers 101-104 are summed to determine a virtual trace value ($E_{Rvirtual}$).

[0033] The virtual trace value ($E_{Rvirtual}$) may be calculated from any number of trace values (E_{Rn}). Such a calculation may be represented by the equation:

$$1. \quad E_{Rvirtual} = [E_{R1} + \dots E_{Rn}]$$

[0034] This equation [$E_{R1} + \dots E_{Rn}$] represents a sum of the trace values (E_{Rn}) from a plurality of receivers (Rn). The plurality includes a first receiver represented by " E_{R1} ", and any number of additional receivers represented by " E_{Rn} ". The number of additional receivers (E_{Rn}) is potentially infinite and limited only by the ability to process and present reliable data.

[0035] An example of a calculation of the virtual trace value is provided. In this example, the virtual trace value ($E_{Rvirtual}$) is represented by the equation:

$$i. \quad E_{Rvirtual} = [E_{R1} + E_{R2} + E_{R3} + E_{R4} \dots + E_{Rn}]$$

where

$$ii. \quad E_{Rn} = \Sigma[(trace_x)^2].$$

[0036] In this embodiment, the trace value (E_{Rn}) for each receiver 101-104 is calculated by summing the square of each of the plurality of data points ($trace_x$) for the respective receiver 101-104. In the embodiment shown in Figure 1, for example, the trace value computed for each of the receivers 101, 102, 103 and 104 is represented by E_{R1} , E_{R2} , E_{R3} , and E_{R4} , respectively.

[0037] In the fourth stage 320, a virtual point may be created having a location, and a trace value ($E_{Rvirtual}$) provided by the virtual trace.

[0038] In one embodiment, the resulting virtual trace value ($E_{Rvirtual}$) (such as the sum of the normalized traces from each of the receivers 101-104, having a maximum of four (4)) is then plotted as a virtual point 135 in the center of the four real receiver points 101-104. This analysis is referred to as CBSF, for "Coherence Bruit Sismique de Fond", translated as "Background Seismic Noise Consistency". The virtual point 135 has a virtual trace value ($E_{Rvirtual}$) determined as described above, and has a virtual

trace location based on the locations of each of the receivers **101-104**. The virtual point and analysis described herein is merely exemplary. The numbers and configurations of the receivers used in this analysis are not limited.

[0039] Multiple virtual traces values may be calculated for various sets of receivers. For example, a virtual point **145** may also be calculated based on the trace values from the plurality **140** of the receivers **105-108**. Additional virtual points may also be calculated from any combination of receivers 101-108. That is, each “plurality” is receivers may be selected from any combination of the receivers 101-108. Also, as indicated above, multiple pluralities may share common receivers.

[0040] In the fifth stage **325**, seismic events may then be detected among the virtual points by comparing one or more virtual trace values (E_{Rn}) to a threshold value. In one embodiment, values in excess of the threshold from several proximate virtual points may indicate an event, whose location may be triangulated from the locations of the virtual points. In another embodiment, the threshold value may also be compared to the trace values (E_{Rn}).

[0041] In one embodiment, the plurality of receivers form a geometric shape, which may be represented by a shape formed by the locations of each receiver in the plurality. The shape may be one-dimensional, such as a line between two locations, two-dimensional or three dimensional. The virtual point may be located between or amongst the plurality of receivers. In one embodiment, the virtual point is located at a center of the receivers. The “center” may include a geometric center of the shape, also referred to as a “geometric centroid”, or a center of gravity of the shape. For example, the center of gravity for the shape may be calculated for an object forming the shape, under the assumption that the object has uniform density throughout.

[0042] For example, receivers **101-104**, which are described in an exemplary embodiment of the method described above, four traces representing data locations from the four receivers **101-104** forming a square are used, and the resulting virtual point is located in the center, i.e., centroid, of the square formed by the locations of the receivers **101-104**. This embodiment may assume a constant velocity model within the area of the four receivers.

[0043] Any number of receivers may be used to compose the virtual trace value (E_{Rvirtual}) based on the methods described herein. In one embodiment, if a shape formed by the locations of the receivers form an equilateral geometric shape, the virtual point may be located at the center of the shape. In another embodiment, a plurality of receivers forming non-equilateral configurations may be used to calculate a virtual point, but the resulting virtual point location may need to be adjusted to the resulting effective center, such by computing the center of gravity for the shape.

[0044] In one embodiment, traces from disparate velocity models may be used, but the resulting location of the virtual point may need to be adjusted to compensate for the variances in the velocity model. Also, variances in the velocity model may cause adjustment to the amplitude and frequency of the real traces prior to their use in the method.

[0045] In another embodiment, the methodology described may be nested. That is, several virtual points (e.g., virtual points 135 and 145) may be treated as real traces and combined into a single, super virtual point using the methods described herein. Similarly, overlapping pluralities of real traces may be used, so that a single real trace may participate in the computation of more than one virtual trace.

[0046] The methods described herein may be used in a system that operates in real time or near real time in order to provide timely information to personnel at the site of a formation. This information may then be used in order to influence interventions or to provide additional safety measures, as previously described.

[0047] Each seismic receiver 101-108 may include supporting equipment, such as a memory system suitable to recording data from events detected by the sensor over a relatively long period of time, a clock suitable for noting the time at which data is received from a receiver, a microprocessor suitable to basic pre-processing or processing of data from the receiver or the memory, as well as other such equipment.

[0048] Any memory devices or systems provided may be one of several types. Conventional or hardened hard drives may be used, depending upon the environment where the receiver is to be placed. Random access memory (RAM), including SRAM or DRAM, may be used in order to provide a more compact or more robust package.

Read only memories may also be used, such as EPROMs or the like. Further, optical storage may be utilized.

[0049] In one embodiment, the methods described herein are embodied in a system including a dense field of receivers, so that several virtual points may be compared to detect variances. Providing a large number of virtual points allows for the provision of a reliable baseline of information from which to determine potential seismic events.

[0050] In support of the teachings herein, various analysis components may be used, including digital and/or analog systems. The system may be implemented in software, firmware, hardware or some combination thereof. The system may have components such as a processor, storage media, memory, input, output, communications link (wired, wireless, pulsed mud, optical or other), user interfaces, software programs, signal processors (digital or analog) and other such components (such as resistors, capacitors, inductors and others) to provide for operation and analyses of the system and methods disclosed herein in any of several manners. It is considered that these teachings may be, but need not be, implemented in conjunction with a set of computer executable instructions stored on a computer readable medium, including memory (ROMs, RAMs), optical (CD-ROMs), or magnetic (disks, hard drives), or any other type that when executed causes a computer or processor to implement the method of the present invention. These instructions may provide for equipment operation, control, data collection and analysis and other functions deemed relevant by a system designer, owner, user or other such personnel, in addition to the functions described in this disclosure.

[0051] Further, various other components may be included and called upon for providing for aspects of the teachings herein. For example, a power supply (e.g., at least one of a generator, a remote supply and a battery), motive force (such as a translational force, propulsional force or a rotational force), magnet, electromagnet, sensor, electrode, transmitter, receiver, transceiver, antenna, controller, optical unit, electrical unit or electromechanical unit may be included in support of the various aspects discussed herein or in support of other functions beyond this disclosure.

[0052] Various components or technologies may provide certain necessary or beneficial functionality or features. Accordingly, these functions and features as may

be needed in support of the appended claims and variations thereof, are recognized as being inherently included as a part of the teachings herein and a part of the invention disclosed.

[0053] While the invention has been described with reference to exemplary embodiments, it will be understood that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications will be appreciated by those skilled in the art to adapt a particular instrument, situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the invention will include all embodiments falling within the scope of the appended claims.

CLAIMS

What is claimed is

1. A method for determining seismic event data from indications of seismic noise, the method comprising:
 - (a) receiving seismic trace data from a plurality of locations; and
 - (b) providing a virtual trace value (E_{Rvirtual}) as seismic event data for a virtual trace location from the seismic trace data.
2. The method of claim 1, further comprising determining the virtual trace location by calculating at least one of a geometric center and a center of gravity of a shape formed by the plurality of seismic receivers.
3. The method of claim 1, further comprising:
normalizing the seismic trace data.
4. The method of claim 1, further comprising:
 - (a) receiving a plurality of data points (trace_x) from each of the plurality of locations; and
 - (b) calculating a trace value (E_{Rn}) for each of the plurality of locations.
5. The method of claim 4, wherein the trace value (E_{Rn}) is calculated using the equation:
$$E_{\text{Rn}} = \Sigma[(\text{trace}_x)^2]$$
wherein “ trace_x ” represents each of the plurality of data points.
6. The method of claim 4, wherein calculating the trace value (E_{Rn}) comprises performing on the plurality of data points (trace_x) one of: a statistical analysis, a data fitting, and a data modeling.

7. The method of claim 4, further comprising:
 - (a) receiving seismic trace data from another plurality of locations; providing another virtual trace value as seismic event data for another virtual trace location; and
 - (b) comparing the virtual trace value (E_{Rvirtual}) and the another virtual trace value to a threshold value to determine a location of a seismic event.
8. The method of claim 4, further comprising:
 - (a) calculating the virtual trace value (E_{Rvirtual}) using the equation:
$$E_{\text{Rvirtual}} = [E_{\text{R1}} + \dots E_{\text{Rn}}]$$
 - (b) wherein " $E_{\text{R1}} \dots E_{\text{Rn}}$ " represents the trace value for each of the plurality of locations.
9. The method of claim 8, further comprising:
determining a threshold value indicative of a seismic event.
10. The method of claim 9, further comprising:
comparing the threshold value to at least one of the virtual trace value (E_{Rvirtual}) and the trace value (E_{Rn}) to determine whether a seismic event has occurred.
11. A system for determining seismic event data from indications of seismic noise, the system comprising:
 - (a) a plurality of seismic receivers for providing seismic trace data, at least two of the plurality of seismic receivers arranged to provide for a virtual trace location; and
 - (b) at least one processor adapted for receiving the seismic trace data from the at least two seismic receivers as input information and for performing a method comprising providing a virtual trace value (E_{Rvirtual}) as seismic event data for the virtual trace location.
12. The system of claim 11, wherein each of the plurality of seismic receivers is selected from at least one of a geophone and a hydrophone.
13. The system of claim 11, wherein each of the plurality of seismic receivers is disposed in a location selected from at least one of a surface location, and a location within a wellbore.

14. The system of claim 11, wherein the virtual trace location is selected from at least one of a geometric center and a center of gravity of a shape formed by the at least two seismic receivers.
15. The system of claim 11, wherein the processor is adapted for comparing a threshold value to the virtual trace value (E_{Rvirtual}) to determine whether a seismic event has occurred.
16. The system of claim 11, further comprising at least two other receivers of the plurality of seismic receivers arranged to provide another virtual trace location, wherein the processor is adapted for comparing the virtual trace value (E_{Rvirtual}) and another virtual trace value to a threshold value to determine a location of a seismic event.
17. The system of claim 11, further comprising a processing unit in communication with the at least two seismic receivers by a connection selected from at least one of a direct connection and a wireless connection.
18. The system of claim 17, wherein the processing unit comprises at least one of the processor, a power supply, an input / output device, a memory device, and a time measurement device.
19. A computer program product comprising machine readable instructions stored on machine readable media, the instructions for determining seismic event data by implementing a method comprising:
 - (a) receiving seismic trace data from a plurality of locations; and
 - (b) providing a virtual trace value (E_{Rvirtual}) as seismic event data for a virtual trace location from the seismic trace data.

20. The computer program product of claim 19, wherein the method further comprises:

- (a) calculating a trace value (E_{Rn}) for each of the plurality of locations;
- (b) calculating the virtual trace value ($E_{Rvirtual}$) using the equation:

$$E_{Rvirtual} = [E_{R1} + \dots E_{Rn}]$$

wherein " $E_{R1} \dots E_{Rn}$ " represents the trace value for each of the plurality of locations.

1/3

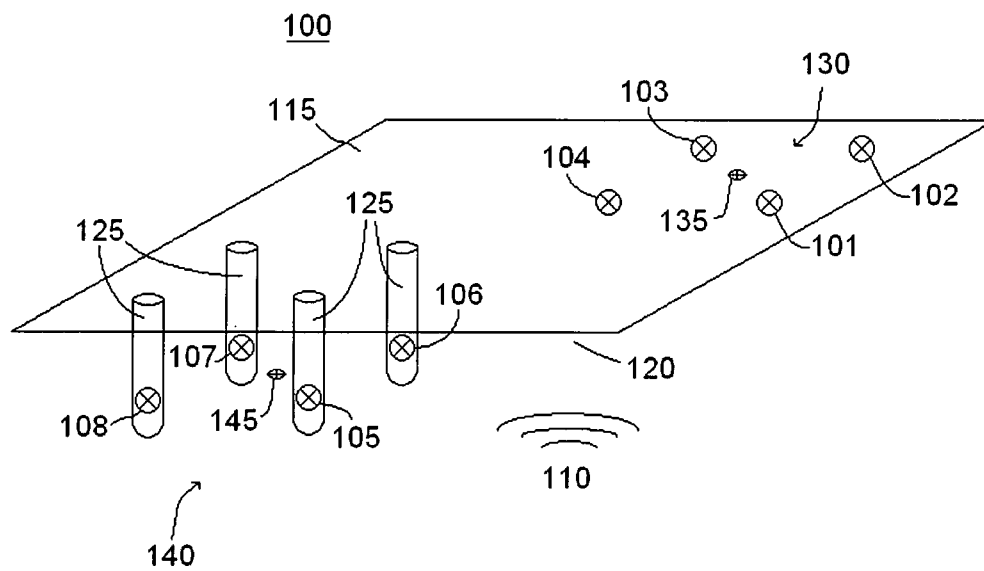


FIG. 1

2/3

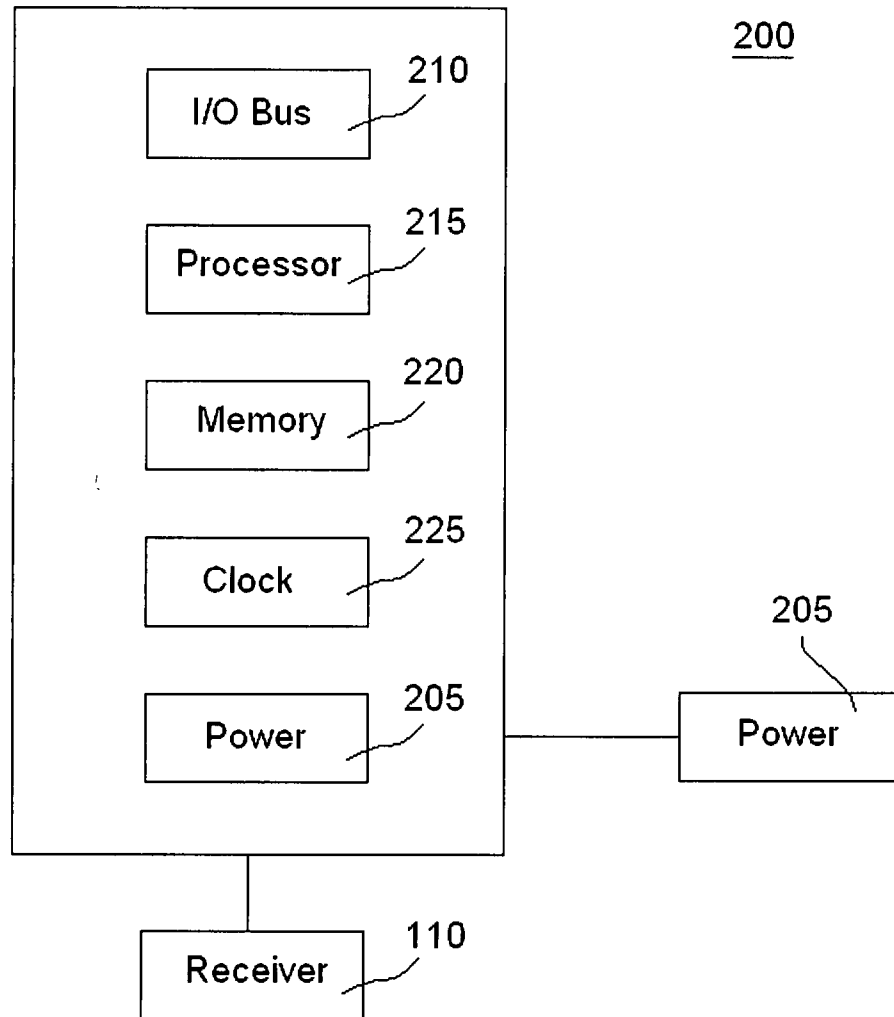


FIG. 2

3/3

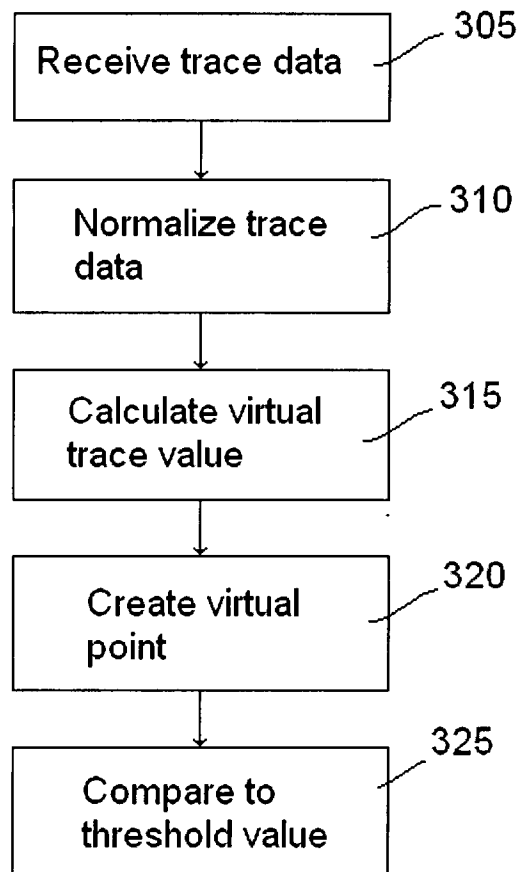


FIG. 3