

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



WIPO | PCT



(10) International Publication Number

WO 2014/004016 A1

(43) International Publication Date
3 January 2014 (03.01.2014)

(51) International Patent Classification:
B05C 17/00 (2006.01)

(21) International Application Number:
PCT/US2013/044421

(22) International Filing Date:
6 June 2013 (06.06.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/663,959 25 June 2012 (25.06.2012) US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors; and

(71) Applicants : **ELIASON, Kevin M.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **ESCOTO, John I., Jr.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **HAGER, Patrick J.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **JOSEPH, Stephen C. P.** [GB/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **PIT-**

ERA, Dominic M. [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **RAPHAELSON, Steven R.** [US/US]; 444 Mount Auburn Street, #6, Watertown, Massachusetts 02472 (US). **SCHLEIF, Larry A.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **SCHWAB, Jeffrey J.** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(74) Agents: **MEDVED, Aleksander** et al.; 3M Center, Office of Intellectual Property Counsel Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: DEVICES FOR COATING CONTOURED SURFACES

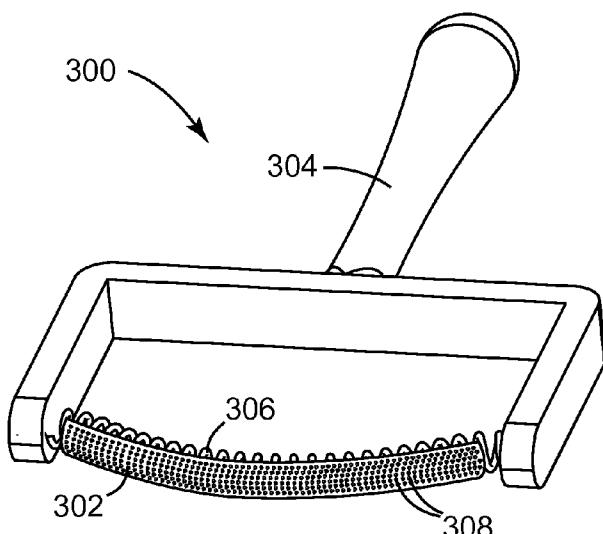


FIG. 8

(57) Abstract: Provided are devices for coating (300) a contoured surface or a three-dimensional structure, and methods of making and using the same. The devices have geometries (308) that are in point contact with the contoured surface. The geometries are substantially rigid and are provided by a flexible applicator(306). In this way, the flexible applicator permits conformance to the surface contours, along with rigid point contact that provides uniform and consistent coverage of liquid material. Specifically, the devices comprise a handle (302) and an applicator (304) pliantly affixed to the handle, the applicator comprising a plurality of spaced geometries (308). The devices meter film-forming coating liquids onto contoured surfaces or three-dimensional structures to form uniform coatings and resulting uniform films.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*

DEVICES FOR COATING CONTOURED SURFACES

TECHNICAL FIELD

[0001] This disclosure relates to devices for coating surfaces, such as contoured surfaces. Devices are hand-held and have an applicator pliantly affixed to a handle, the applicator comprising a plurality of spaced geometries. Upon contact with a contoured surface, the geometries are in point contact with the contoured surface.

BACKGROUND

[0002] A number of products exist today that are designed to temporarily protect various surfaces or articles from incidental damage and/or environmental contaminants. Protection of automotive surfaces is of particular interest as the repair process associated with any damage to clear coats can be extensive and expensive. A current common method of protecting vehicle surfaces is with pressure sensitive adhesive backed films that are applied directly to and in intimate contact with the surface to be protected. Although these types of films (i.e. transit tapes, paint protection films) can be effective at protecting the surface from physical damage and environmental fallout (dust, insects, tar, rocks, sand, pollen, rail dust, etc.), they are very difficult to apply. These pressure sensitive adhesive backed films are two-dimensional, and when applied to typical three-dimensional vehicle surfaces, wrinkles and bubbles are formed. These wrinkles and bubbles can, and frequently are, the source of clear coat deformation issues. Also, just the presence of a pressure sensitive adhesive in intimate contact with a substrate can cause substrate deformation.

[0003] Additional products on the market include materials that can be applied to modify the appearance of the vehicle surface without painting it. Matte black films, for example, exist to change the gloss and color of the vehicle or portions of it. These films are wrought with the same application difficulties as any two dimensional film. These typically have to be applied by a professional to obtain results that are visually acceptable, and tend to be rather expensive.

[0004] Liquid-applied film-forming coatings can be used to solve some of the problems associated with applying pre-formed films onto surfaces. Liquids are infinitely conformable and, therefore, are easily applied onto a three-dimensional vehicle surface. This is a significant application advantage relative to any two dimensional pressure sensitive adhesive backed films.

[0005] Use of liquid materials, however, posses a challenge in applying it to three-dimensional surfaces of an automobile while maintaining a consistent coating thickness, especially across the entire automobile. Traditional coating applicators, including but not limited, to paint brushes, paint rollers, paint pads, standard automated paint pumps, foam rollers, foam brushes, adhesive rollers, putty knives, squeegees, and the like do not provide uniform coatings. Meyer rods,

in particular, are for single-plane applications and lack suitable conformability to coat three-dimensional surfaces.

[0006] Spraying is a typical coating process for applying liquid coatings to a substrate; in particular, the body panels of an automobile. Spray application techniques and pieces of equipment include airless sprayers, air assisted airless sprayers, conventional air spray guns, HVLP air spray guns, automotive seam sealer guns, automotive Schutz guns (for undercoatings), aerosol sprayers, compressed cylinder (Northstar) sprayers, trigger bottles, and hand pump sprayers. Proper spray technique can produce a uniform and consistent coating thickness on three-dimensional substrates. With spray application of a coating, however overspray is always produced, sometimes in significant amounts. As a result, surrounding areas must be masked off to prevent the deposition of overspray droplets when spray coating a panel of interest. On automobiles, in particular, the entire vehicle is typically covered with masking to protect all adjacent surfaces. This masking process can be prohibitively expensive and time-consuming.

[0007] Therefore, it is of substantial value to be able to apply a liquid coating to a three-dimensional substrate, such as a contoured surface, uniformly and in such a way that eliminates the need for masking time and materials.

SUMMARY

[0008] Provided are devices for coating a contoured surface or a three-dimensional structure, and methods of making and using the same. The devices have geometries that are in point contact with the contoured surface. The geometries are substantially rigid and are provided by a flexible applicator. In this way, the flexible applicator permits conformance to the surface contours, along with rigid point contact that provides uniform and consistent coverage of liquid material.

[0009] In a first aspect, a device for coating a contoured surface comprises: a handle; an applicator pliantly affixed to the handle, the applicator comprising a plurality of spaced geometries; wherein upon contact with the contoured surface, the geometries are in point contact with the contoured surface.

[0010] In one embodiment, the applicator comprises a flexible microreplicated material that comprises the plurality of geometries. The geometries are rigid. The geometries of the flexible microreplicated material can be selected from the group consisting of pins, posts, cones, cylinders, pyramids, mushroom heads, cube corners, and J-hooks. Material of construction and geometry configurations can be chosen to accommodate the needs of a particular application. In one or more detailed embodiments, the geometries have a height in the range of 50 to 2000 microns (~2 to 80 mil), and/or a base diameter or width in the range of 100 to 2000 microns (~4 to 80 mil), and/or a density in the range of 50-2000 geometries per square inch (~7-310 geometries per square centimeter).

[0011] In another embodiment, the applicator comprises a spring and the geometries comprise coils of the spring. The springs can be coated to provide a non-scratch surface. Devices formed with a spring application can further comprise a biaser, which facilitates coating of concave surfaces. Exemplary biasers include another spring perpendicular to the applicator spring to provide an outward force. Another biaser can be a support structure, such as tubing, within the coils of the spring. Such devices can also further comprise a tensioner that is effective to vary coil-to-coil distance of the spring.

[0012] In embodiments provided herein, the geometries are effective to meter a substantially uniform layer of a film-forming coating liquid onto the contoured surface.

[0013] The geometries are also effective to avoid marring the contoured surfaces. For coating of vehicle panels, the devices do not scratch the clear coat.

[0014] In a detailed aspect, provided are devices for coating a contoured surface comprising: a handle; a microreplicated flexible material on a non-rigid backing, the microreplicated flexible material being pliantly affixed to the handle by the non-rigid backing and having a plurality of spaced geometries; wherein upon contact with the contoured surface, the geometries are in point contact with the contoured surface. In one embodiment, the non-rigid backing comprises a foamed pad. In another embodiment, the non-rigid backing comprises a spring.

[0015] Another aspect provides a method for coating a contoured surface, the method comprising: providing a device comprising a handle and an applicator pliantly affixed to the handle, the applicator comprising a plurality of spaced geometries; and using the device to apply a film-forming coating liquid to the contoured surface, wherein the geometries are in point contact with the contoured surface. The geometries are effective to meter a uniform layer of the film-forming coating liquid onto the contoured surface.

[0016] A further aspect provides a method for forming a uniform film on a three-dimensional structure, the method comprising: loading a device with a film-forming coating liquid, the device comprising a handle and an applicator pliantly affixed to the handle, the applicator comprising a plurality of spaced geometries; metering the film-forming coating liquid onto the three-dimensional substrate with the device, wherein the geometries are in point contact with the contoured surface to form a uniform liquid coating; and drying the uniform liquid coating to form a uniform film.

[0017] These and other aspects of the invention are described in the detailed description below. In no event should the above summary be construed as a limitation on the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The disclosure may be more completely understood in consideration of the following detailed description of various embodiments of the disclosure in connection with the accompanying drawings, in which:

[0019] FIG. 1 is schematic of a device according an embodiment;

[0020] FIG. 2 is a microphotograph of a pin geometry that is on an applicator according to one embodiment;

[0021] FIG. 3 shows a schematic of a cone geometry that is on an applicator according to one embodiment;

[0022] FIG. 4 shows a schematic of a device according to another embodiment;

[0023] FIG. 5 shows the use of the embodiment of FIG. 4 to coat a contoured surface;

[0024] FIG. 6 is a schematic of another embodiment of a device;

[0025] FIG. 7 is a schematic of another embodiment of a device; and

[0026] FIG. 8 is a schematic of another embodiment of a device.

DETAILED DESCRIPTION

[0027] Before describing several exemplary embodiments of the invention, it is to be understood that the invention is not limited to the details of construction or process steps set forth in the following description. The invention is capable of other embodiments and of being practiced or being carried out in various ways.

[0028] Devices provided herein apply liquid coatings to three-dimensional structures, such as contoured surfaces of vehicle panels or industrial equipment such as fan blades, uniformly and efficiently. In this way, the inefficiencies and difficulties that accompany the use of pre-formed films or spraying can be avoided.

[0029] The following terms shall have, for the purposes of this application, the respective meanings set forth below.

[0030] "Geometries" refers to a series of structures of the same shape that are effective to be in point contact with a contoured surface. Examples of geometries include, but are not limited to, coils of a spring, upstanding stems or projections or ridges of a film layer such as pins, posts, cones, cylinders, pyramids, mushroom heads, cube corners, and J-hooks. Tips of these geometries can be configured as needed, for example, concave tips may be beneficial under certain circumstances, whereas convex tips may be beneficial under others. Geometries are rigid, that is, they generally retain their shape upon contact with the contoured surface. This is in contrast to devices, such as paint brushes or paint pads, that use bristles or filaments or napping, whose shapes are deformable.

[0031] "Pliantly affixed" means that the applicator is able to move in at least two and possibly even all three translational motions (up and down, left and right, forward and backward) while being maneuvered by the handle. For example, a spring attached at each end to two posts of a handle is pliantly affixed. Also, a flexible microreplicated material that is attached to a handle is also pliantly affixed. As needed, the flexible microreplicated material could be on a non-rigid backing. A spring attached at each end to two posts of a handle can provide a non-rigid backing. Also a foam pad on a plane of a handle can provide a non-rigid backing. Other examples of non-rigid backings

include, but are not limited to silicone gel pads, nonwoven polymeric pads, paint brush bristles, and the like.

[0032] "Point contact" means that individual surfaces of the geometries of the applicator are substantially in contact with the contoured surface at individual points. This is in contrast to "line contact" where there would be a continuous line of contact between an applicator and a surface.

[0033] "Microreplicated material" refers to a material with a major surface containing raised features that are arrayed in patterns. The raised features can be outwardly projecting elastomeric elements. Suitable materials include but are not limited to polypropylene and high density polyethylene. The raised features of the microreplicated material can include the geometries discussed herein. Exemplary disclosures of how to make a microreplicated material are U.S. Patent No. 7,703,179 and U.S. Patent Appln. Pub. No. 2011/0129644, both of which are herein incorporated by reference, commonly-owned by the applicant herein, 3M Innovative Properties Co.

[0034] A "biaser" is a structure that lends support to the applicator and provides a positive force to keep the applicator in contact with the substrate. The biaser is particularly useful to facilitate coating of concave surfaces by keeping the geometries substantially in point contact with the concave surface. A biaser can be a spring or adjustable rod or other device that pushes or biases the applicator outward from the handle.

[0035] A "tensioner" is a movable structure such as one or more slidable arms that changes the distances between coils of a spring applicator.

[0036] A "uniform" liquid coating and/or layer and/or film is one that is visually consistent in thickness and weight. Minor surface striations, undulations, or variations still render a liquid coating and/or film one that is uniform.

[0037] Reference to "meter" means that the film-forming coating liquid is supplied to the contoured surface in a measured or regulated amount. The resulting coating thickness is directly related to the configuration of the applicator. That is, for the applicators made from microreplicated material, the size of the geometries and their spacings can be tailored to deliver a desired amount of liquid to achieve a desired thickness of dried film. For applicators that are springs, the diameter of the wire forming the spring along with the spacings of the coil determine the amount of liquid to be delivered. Support structures within the spring will also impact the delivery amount.

Devices

[0038] Turning to the figures, FIG. 1 is schematic of a device 100 according an embodiment where applicator 102 is pliantly affixed to the handle 104. The applicator 102 can be affixed to the handle directly (not shown) or by a non-rigid backing 106. The applicator 102 of this embodiment is a microreplicated material formed from a desired polymer such as polypropylene or high density polyethylene. FIG. 2 is a micrograph of a pin geometry 108a that is on the microreplicated material according to one embodiment. FIG. 3 is a schematic of a cone geometry 108b according to another

embodiment. The geometries can have a height in the range of 50 to 2000 microns (~2 to 80 mil), or 100 to 1800 microns (~4 to 71 mil), or even 250 to 1300 microns (~8 to 30 mil). The geometries can have a base diameter or width in the range of 100 to 2000 microns (~4 to 80 mil), or 150 to 1800 microns (~6 to 71 mil), or even 50 to 800 microns (~2 to 30 mil). The geometries can be on the flexible microreplicated material at a rate in the range of 50-2000 geometries per square inch (~7-310 geometries per square centimeter).

[0039] Affixing the applicator to a non-rigid backing can be done according to need. That is, the applicator can be integral to a non-rigid backing, or permanently affixed, or even removably affixed by, for example, pressure-sensitive adhesive (PSA). In one or more embodiments, the applicator can be disposable while the handle, and non-rigid backing as needed, can be reusable.

[0040] In FIGS. 4 and 6, another device 200 is shown, providing an applicator 202 in the form of a spring that is pliantly affixed to handle 204. The geometries 208 of the spring are coils of desired spacing, diameter, and wire diameter. A biasser 210 pushes the spring out to facilitate coating of concave surfaces. In FIG. 5, use of device 200 is shown for applying coating 216 onto a contoured surface 214. In FIG. 7, spring applicator 202 is pliantly affixed to handle 204 and to a tensioner 218 that is movable to a new position 218' to vary the coil-to-coil distance. Spring configuration can be chosen to accommodate the needs of a particular application. Exemplary and non-limiting configurations are provided as follows. The springs can be formed of wires having a diameter in the range of 0.25-5 mm. The springs can have coil diameters in the range of 5-50 mm. The spacings of the coils can be in the range of 0.25-10 mm. The springs can be coated to provide a non-scratch surface.

[0041] FIG. 8 shows another device 300 where applicator 302 is a microreplicated material located on a non-rigid backing 306 that is a spring. The microreplicated material is pliantly affixed to handle 304 by the spring.

Film-Forming Coating Liquids and Films

[0042] Useful film-forming coating liquids are those containing a polymeric dispersion and additives as desired. For example, useful polymeric materials can include styrene, butadiene, acrylic, vinyl acetate, ethylene vinyl acetate, polyurethane, or combinations thereof. A preferred polymer is an aliphatic polyether urethane provided by Stahl USA under the trade designation "RU 13-825". The aqueous polymeric dispersion can be part of a formulated system that comprises a defoamer and/or a thickener. In particular embodiments, the polymer is non-cross-linked, and the system is free of a cross-linking agent. The formulated system can further comprise a slip aid, a dispersing agent, a UV adsorber, a hindered-amine light stabilizer, and/or an antioxidant as desired to facilitate stability, durability, and/or integrity of the resulting film.

[0043] The films themselves can vary in function, thickness, and composition based on need. For example, they can provide a protective coating on vehicles for use during transit of the vehicles.

The films can also provide a tint to a substrate, for example, a window, while remaining clear to avoid visual distortion when looking through the film. One such suitable film is formed by a film-forming liquid tint material disclosed in a concurrently-filed application under Applicant's designation of Case No. 69626US002, which is incorporated herein by reference.

[0044] Unless otherwise indicated, all numbers expressing quantities of ingredients, properties such as molecular weight, reaction conditions, and so forth used in the specification and claims are to be understood as being modified in all instances by the term "about." Accordingly, unless indicated to the contrary, the numerical parameters set forth in the following specification and attached claims are approximations that may vary depending upon the desired properties sought to be obtained by the present disclosure. At the very least, and not as an attempt to limit the application of the doctrine of equivalents to the scope of the claims, each numerical parameter should at least be construed in light of the number of reported significant digits and by applying ordinary rounding techniques.

[0045] Notwithstanding that the numerical ranges and parameters setting forth the broad scope of the disclosure are approximations, the numerical values set forth in the specific examples are reported as precisely as possible. Any numerical value, however, inherently contain certain errors necessarily resulting from the standard deviation found in their respective testing measurements.

EXAMPLES

[0046] Unless otherwise noted, all parts, percentages, ratios, etc. in the examples and the rest of the specification are by weight, and all reagents used in the examples were obtained, or are available, from general chemical suppliers such as, for example, Sigma-Aldrich Company, Saint Louis, Mo., or may be synthesized by conventional methods.

[0047] The following abbreviations are used to describe the examples:

°C:	degrees Centigrade
cps:	centipoise
°F:	degrees Fahrenheit
g/cm ² :	grams per square centimeter
g/m ² :	grams per square meter
in ² :	square inch
lb/in ² :	pounds per square inch
mil:	10 ⁻³ inches
mL:	milliliter
m/min:	meters per minute
μm:	micrometers
nm:	nanometers

N: Newtons
oz: ounce
Pa.s: Pascal second

Paint Protection Liquid (PPL)

[0048] The following components were used to make PPL-1 and PPL-2:

[0049] 316G30SP: A polyethylene wax, obtained under the trade designation "316G30SP" from Chemcor, Chester, New York.

[0050] D-655: A dispersant, obtained under the trade designation "TEGO DISPERS D655" from Evonik Degussa Corporation, Parsippany, New Jersey.

[0051] DF-1760: A defoamer, obtained under the trade designation "DAPRO DF-1760" from Elementis Specialties, Inc., Hightstown, New Jersey.

[0052] DF-3163: A defoamer, obtained under the trade designation "DAPRO DF-3163" from Elementis Specialties, Inc.

[0053] RM-8W: A non-ionic rheology modifier, obtained under the trade designation "ACRYSOL RM-8W" from Dow Chemical Company, Midland, Michigan.

[0054] WHD-9507: A white pigment, obtained under the trade designation "SUNSPERSE WHITE 6 WHD-9507" from Sun Chemical Corporation, Parsippany, New Jersey.

[0055] RU-13-825: An aqueous polyurethane dispersion, obtained under the trade designation "PERMUTEX RU-13-825" from Stahl USA, Inc., Peabody, Massachusetts.

[0056] PPL-1: 89.5 parts by weight RU-13-825 was added to a mixing kettle at 21°C. With continuous stirring, the following components were added in 5 minute intervals: 0.52 parts DF-3163; 3.25 parts WHD-9507; 0.60 parts DF-1760; 2.91 parts 316G30SP; 2.73 parts D-655 and 0.52 parts RM-8W, after which the dispersion was mixed at high speed for 10 minutes. The resulting paint protection liquid MS-44 had a dynamic viscosity of 9,960 cps (9.96 Pa.s).

[0057] PPL-2: A paint protection liquid was prepared according to the general procedure for making PPL-1, wherein the D-655 was reduced to 0.68 parts, RM-8W was increased to 0.59 parts, and the balance made up with 1.91 parts water. The dynamic viscosity was 9,300 cps (9.3 Pa.s).

Stem Web Applicators

[0058] Sheets of thermoplastic stem web having various stem heights, density and geometry were prepared as follows. A polypropylene resin, obtained under the trade designation "3868PP" from Dow Chemical Company, Midland, Michigan, was extruded using a Davis Standard Extruder DS-25, 2.5 inch extruder, serial number P7061, Screw Number XA281368LTR8332 obtained from Merritt Davis Corp., Hamden, Connecticut, at 210-218°C, into the cavities of mild steel patterned rolls at 21°C, according to the conditions listed in Table 1. The solidified stem web, having a target base

thickness of 8 mils (203 μm), was converted to 6 by 1.5 inch sectioned (15.2 by 3.8 cm) sheets. Reference to "rounded conical" means a tapered body with a convex tip.

Table 1

Stem Web	Extruder Conditions				Stem		
	Speed (m/min.)	Extruder Temp. (°C)	Nip Pressure MA (kPa)	Nip Pressure OP (kPa)	Density (stems/cm ²)	Geometry	Height (mm)
A	3.81	218.3	137.9	137.9	31.0	Rounded conical	0.46
B	3.50	210.0	206.8	206.8	31.0	Rounded conical	0.48
C	3.35	218.3	182.7	182.7	31.0	Rounded conical	0.56
D	3.66	218.3	206.8	206.8	31.0	Rounded conical	0.61
E	3.05	218.3	413.7	413.7	31.0	Rounded conical	0.76
F	3.66	218.3	275.8	275.8	31.0	Rounded conical	0.79
G	3.81	218.3	137.9	137.9	46.5	Rounded conical	0.46
H	3.50	210.0	206.8	206.8	46.5	Rounded conical	0.48
I	3.35	218.3	182.7	182.7	46.5	Rounded conical	0.56
J	3.66	218.3	206.8	206.8	46.5	Rounded conical	0.61
K	3.05	218.3	413.7	413.7	46.5	Rounded conical	0.76
L	3.66	218.3	275.8	275.8	46.5	Rounded conical	0.79
M	5.18	232.2	565.4	413.7	89.4	Rounded conical	0.41

[0059] Hard foam hand sanding blocks having the following open cell foam back up pads were obtained from Rogers Foam Corporation, Somerville, Massachusetts:

[0060] G-15A: $\frac{1}{4}$ inch (6.35 mm) thick, having an Indentation Force Deflection (IFD) of 1.80 lbs/in² (126.6 g/cm²) at 25% compression.

[0061] G-15B: $\frac{1}{2}$ inch (12.7 mm) thick, IFD of 1.80 lbs/in² (126.6 g/cm²) at 25% compression.

[0062] G-60: $\frac{1}{2}$ inch (12.7 mm) thick, IFD of 1.20 lbs/in² (84.4 g/cm²) at 25% compression.

[0063] 1544: $\frac{3}{4}$ inch (19.05 mm) thick, IFD of 0.88 lbs/in² (61.9 g/cm²) at 25% compression.

[0064] 1235: $\frac{3}{4}$ inch (19.05 mm) thick, IFD of 0.70 lbs/in² (49.2 g/cm²) at 25% compression.

[0065] The stem web samples were cemented to the face of the foam back up pad using a 2-part adhesive, obtained under the trade designation "PLASTIC REPAIR SEALER" from 3M Company.

[0066] Various applicator constructions were used to apply paint protection liquids onto a 12 by 12 inch (25.4 by 25.4 cm) painted and clear coated steel test panel, type "APR 50405" obtained from ACT Laboratories, Inc., Hillsdale, Michigan. The resulting coating thickness, using a wet film thickness gauge, and coating quality, subjectively ranked on a scale of 1-5, wherein the higher number represented higher coating quality, are reported in Table 2.

Table 2

Stem Web	Foam	PPL	Average Wet Thickness (mm)	Coating Quality Scale 1-5 (poor-excellent)
A	G-15B	PPL-1	0.36	5.0
B	G-15B	PPL-1	0.31	3.0
C	G-60	PPL-1	0.32	4.0
D	G-60	PPL-1	0.24	5.0
E	G-15B	PPL-1	0.29	3.0
F	G-60	PPL-1	0.33	4.5
G	G-15B	PPL-1	0.29	4.5
H	G-15B	PPL-1	0.24	4.0
I	G-60	PPL-1	0.19	4.0
J	G-60	PPL-1	0.20	4.0
K	G-15B	PPL-1	0.24	4.0
L	G-60	PPL-1	0.28	5.0
M	1544	PPL-1	0.25	4.0
M	G-15A	PPL-1	0.25	5.0
D	G-60	PPL-2	0.23	3.0
H	G-60	PPL-2	0.28	2.0

Spring Applicators

[0067] The following springs were obtained from Century Spring Corporation located at 222 E. 16th Street P.O. Box 15287, Los Angeles, CA 90015 a division of MW Industries, Inc. Springs were used to construct various applicators, according to the coil dimensions listed in Table 3:

[0068] SA-01: A extension spring obtained from Century Spring Corporation;

[0069] SA-02: A compression spring obtained from Century Spring Corporation;

[0070] SA-03: A extension spring obtained from Century Spring Corporation; and

[0071] SA-04: A extension spring obtained from Century Spring Corporation.

Table 3

Applicator ID	Spring Stock #	Dimensions				Physical Characteristics	
		OD (mm)	Free Length (mm)	Wire Diameter (mm)	Extension or Compression Length (mm)	Spring Rate (N/m)	Material
SA-01	CSC 5833	15.8	171.5	1.37	228.6	11.21	Hard Drawn
SA-02	CSC S-3182*	12.29	304.8	0.79	132.08	17.51	Stainless
SA-03	CSC 137	22.23	222.3	1.57	323.85	57.80	Hard Drawn Powder Coated
SA-04-0 Extension = 0 in	CSC 119	11.10	215.9	1.19	215.9	127.84	Hard Drawn
SA-04-2 Extension = 2 in (50.8 mm)	CSC 119	11.10	215.9	1.19	266.7	127.84	Hard Drawn
SA-04-4 Extension = 4 in (101.6 mm)	CSC 119	11.10	215.9	1.19	317.5	127.84	Hard Drawn
SA-04-6 Extension = 6 in (152.4 mm)	CSC 119	11.10	215.9	1.19	368.3	127.84	Hard Drawn

*free length cut to 5.6in (142.2 mm) for SA-02

[0072] Using the spring applicators above, paint protection liquids MS-44 (PPL-1) were applied to various contoured surfaces of vehicles. The coating variables, and corresponding wet thickness and coating quality, are listed in Table 4.

Table 4

Spring Applicator	Body Panel	Wet Thickness mm	Coating Quality Scale 1-5 (poor-excellent)
SA-01	Hood	0.25	4.5
SA-02	Hood	0.28	5.0
SA-03	Hood	0.28	5.0
SA-04-0	Flat Panel	0.08	5.0
SA-04-02	Flat Panel	0.18	5.0
SA-04-04	Flat Panel	0.23	5.0
SA-04-06	Flat Panel	0.36	5.0

[0073] Reference throughout this specification to "one embodiment," "certain embodiments," "one or more embodiments" or "an embodiment" means that a particular feature, structure, material, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. Thus, the appearances of the phrases such as "in one or more embodiments," "in certain embodiments," "in one embodiment" or "in an embodiment" in various places throughout this specification are not necessarily referring to the same embodiment of the invention. Furthermore, the particular features, structures, materials, or characteristics may be combined in any suitable manner in one or more embodiments.

[0074] Although the invention herein has been described with reference to particular embodiments, it is to be understood that these embodiments are merely illustrative of the principles and applications of the present invention. It will be apparent to those skilled in the art that various modifications and variations can be made to the method and apparatus of the present invention without departing from the spirit and scope of the invention. Thus, it is intended that the present invention include modifications and variations that are within the scope of the appended claims and their equivalents.

What is claimed is:

1. A device for coating a contoured surface comprising:
 - a handle;
 - an applicator pliantly affixed to the handle, the applicator comprising a plurality of spaced geometries;
 - wherein upon contact with the contoured surface, the geometries are in point contact with the contoured surface.
2. The device of claim 1, wherein the applicator comprises a flexible microreplicated material that comprises the plurality of geometries.
3. The device of claim 2, wherein the geometries are selected from the group consisting of pins, posts, cones, cylinders, pyramids, mushroom heads, cube corners, and J-hooks.
4. The device of claim 2, wherein the geometries have a height in the range of 50 to 2000 microns.
5. The device of claim 2, wherein the geometries have a base diameter or width in the range of 100 to 2000 microns.
6. The device of claim 2, wherein the geometries are on the flexible microreplicated material at a rate in the range of 50-2000 geometries per square inch.
7. The device of claim 2, wherein the geometries are rigid.
8. The device of claim 1, wherein the applicator comprises a spring and the geometries comprise coils of the spring.
9. The device of claim 7 further comprising a biaser.
10. The device of claim 7 further comprising a tensioner that is effective to vary coil-to-coil distance of the spring.
11. The device of claim 1, wherein upon contact with the contoured surface, the geometries are effective to meter a substantially uniform layer of a film-forming coating liquid onto the contoured surface.

12. The device of claim 1, wherein the geometries are effective to avoid marring the contoured surface.

13. A device for coating a contoured surface comprising:

a handle;

a microreplicated flexible material on a non-rigid backing, the microreplicated flexible material being pliantly affixed to the handle by the non-rigid backing and having a plurality of spaced geometries;

wherein upon contact with the contoured surface, the geometries are in point contact with the contoured surface.

14. The device of claim 12, wherein the non-rigid backing comprises a foamed pad.

15. The device of claim 12, wherein the non-rigid backing comprises a spring.

16. The device of claim 12, wherein the geometries are selected from the group consisting of pins, posts, cones, cylinders, pyramids, mushroom heads, cube corners, and J-hooks.

17. A method for coating a contoured surface, the method comprising:

providing a device comprising a handle and an applicator pliantly affixed to the handle, the applicator comprising a plurality of spaced geometries; and

using the device to apply a film-forming coating liquid to the contoured surface, wherein the geometries are in point contact with the contoured surface.

18. The method of claim 16, wherein the geometries are effective to meter a uniform layer of the film-forming coating liquid onto the contoured surface.



19. A method for forming a uniform film on a three-dimensional structure, the method comprising:

loading a device with a film-forming coating liquid, the device comprising a handle and an applicator pliantly affixed to the handle, the applicator comprising a plurality of spaced geometries;

metering the film-forming coating liquid onto the three-dimensional substrate with the device, wherein the geometries are in point contact with the contoured surface to form a uniform liquid coating; and

drying the uniform liquid coating to form a uniform film.

20. The method of claim 18, wherein the applicator comprises a microreplicated flexible material on a non-rigid backing, the microreplicated flexible material being pliantly affixed to the handle by the non-rigid backing.

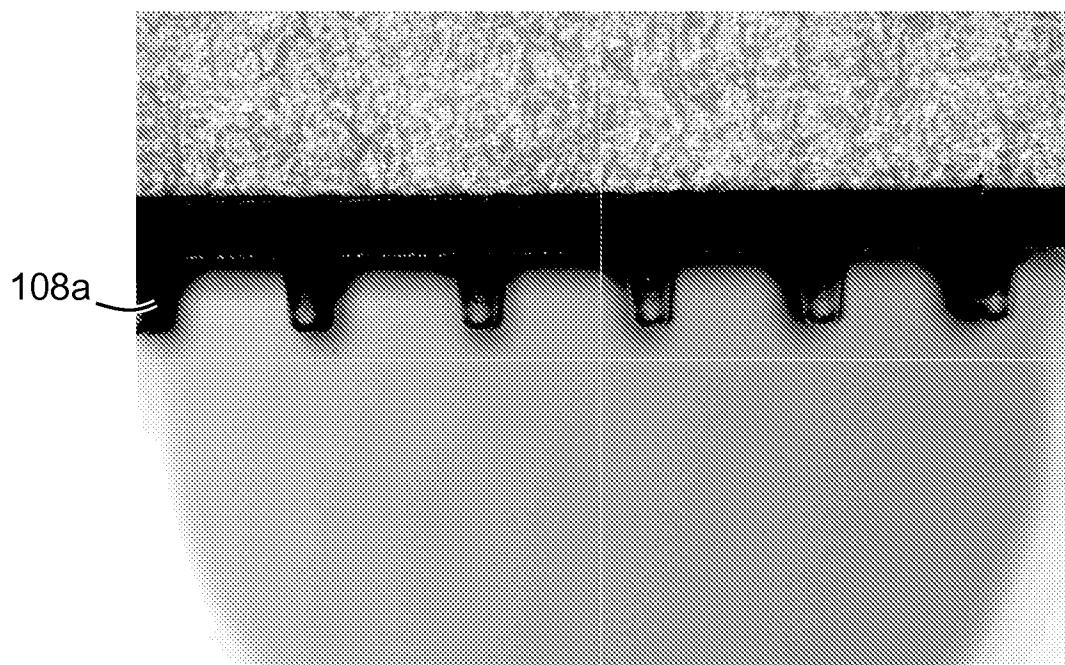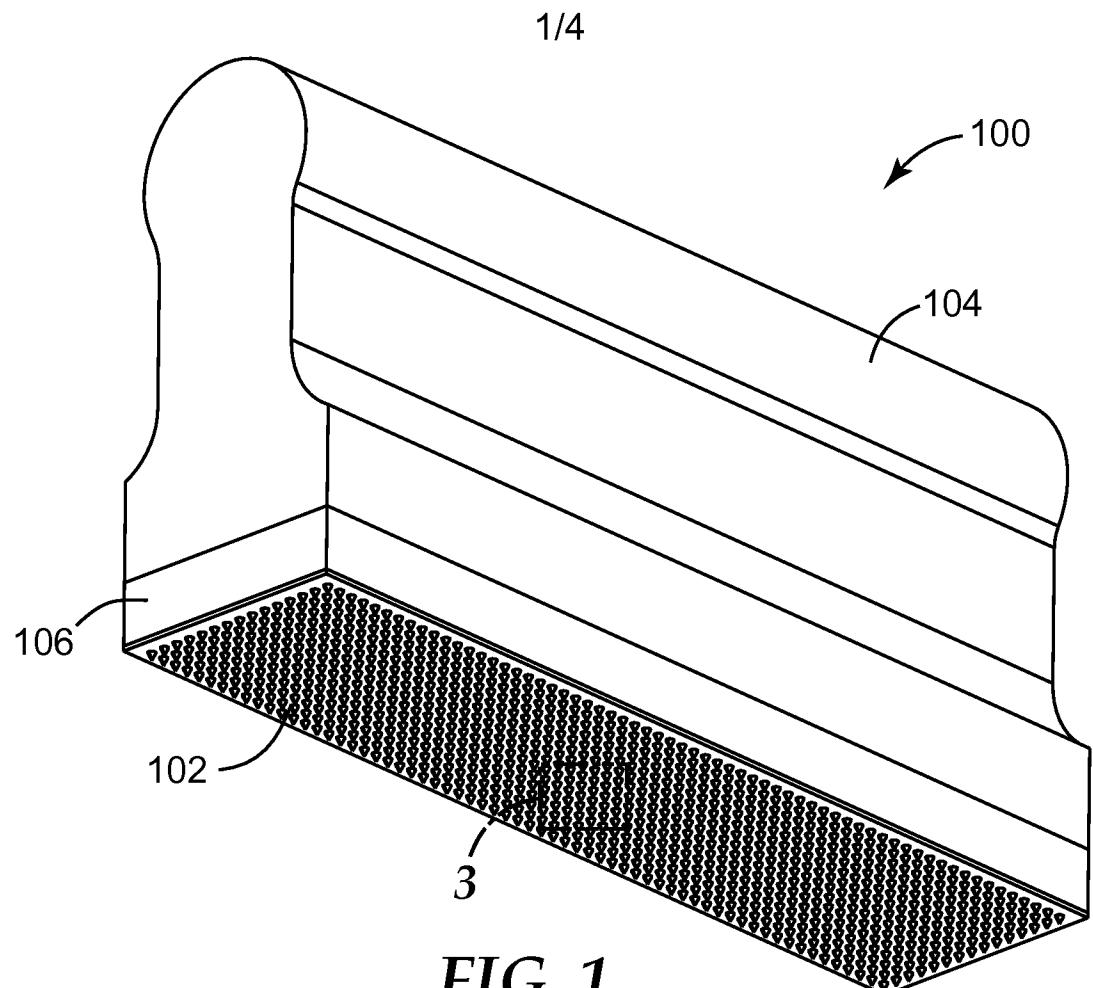

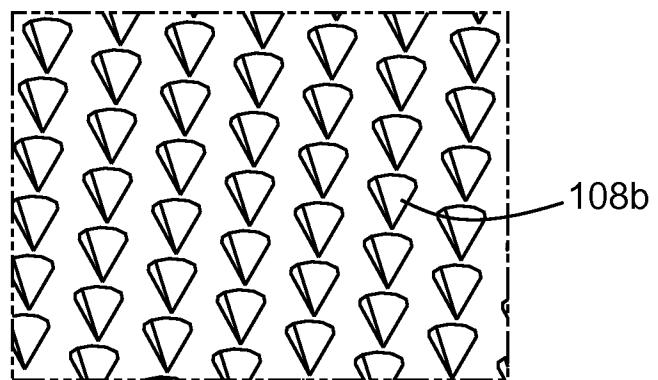


FIG. 3





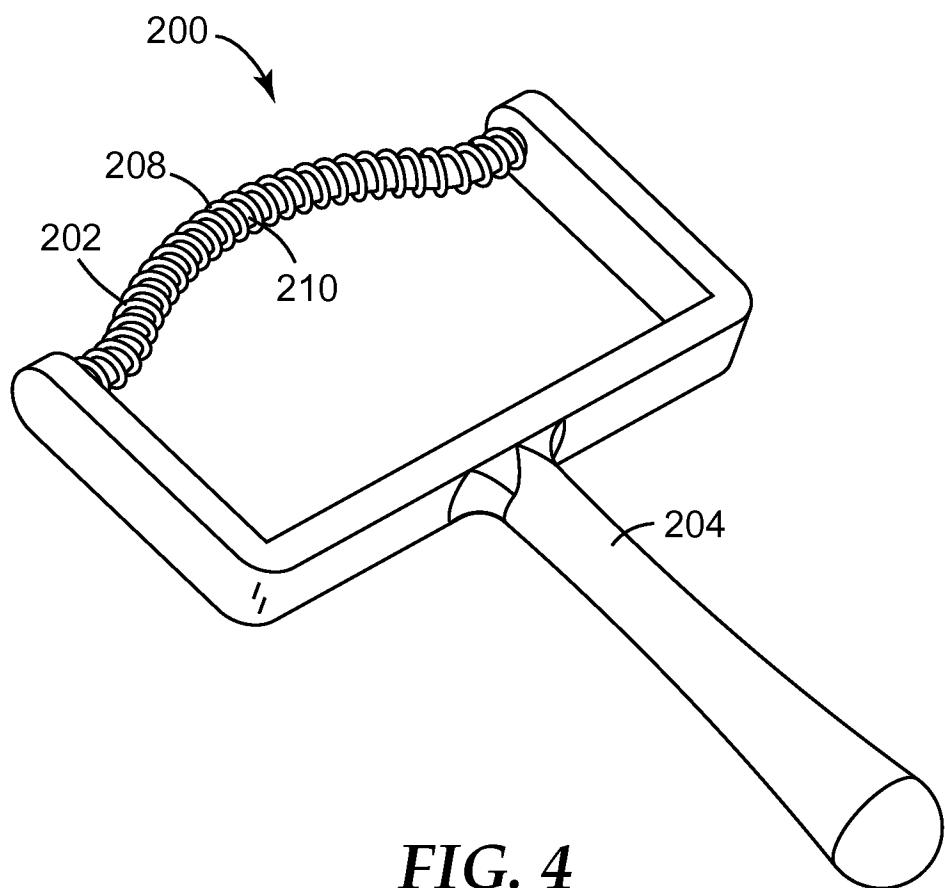


FIG. 4

3/4

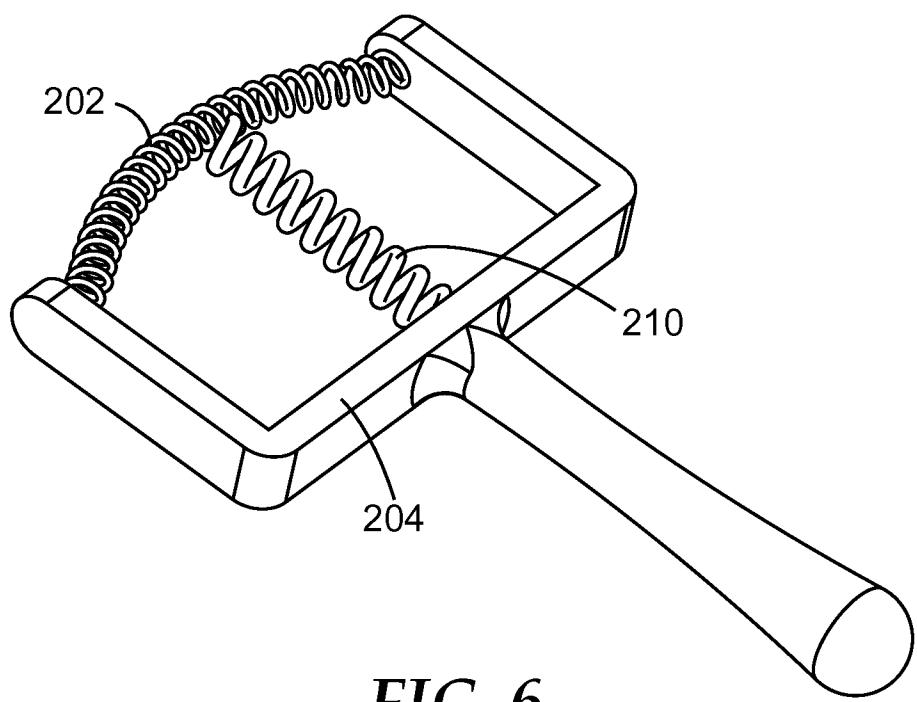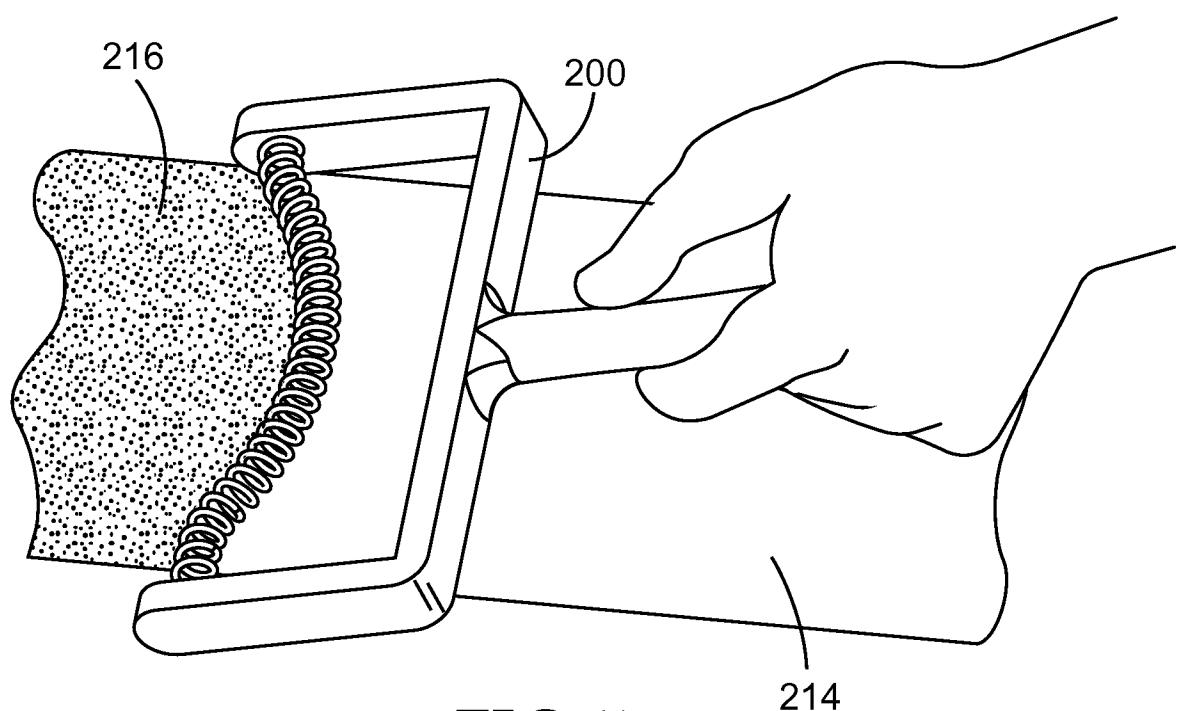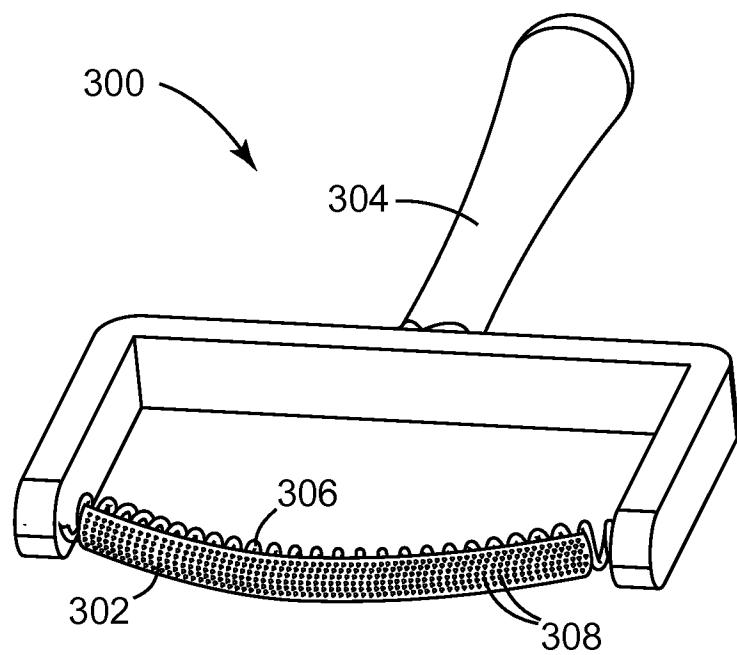

4/4

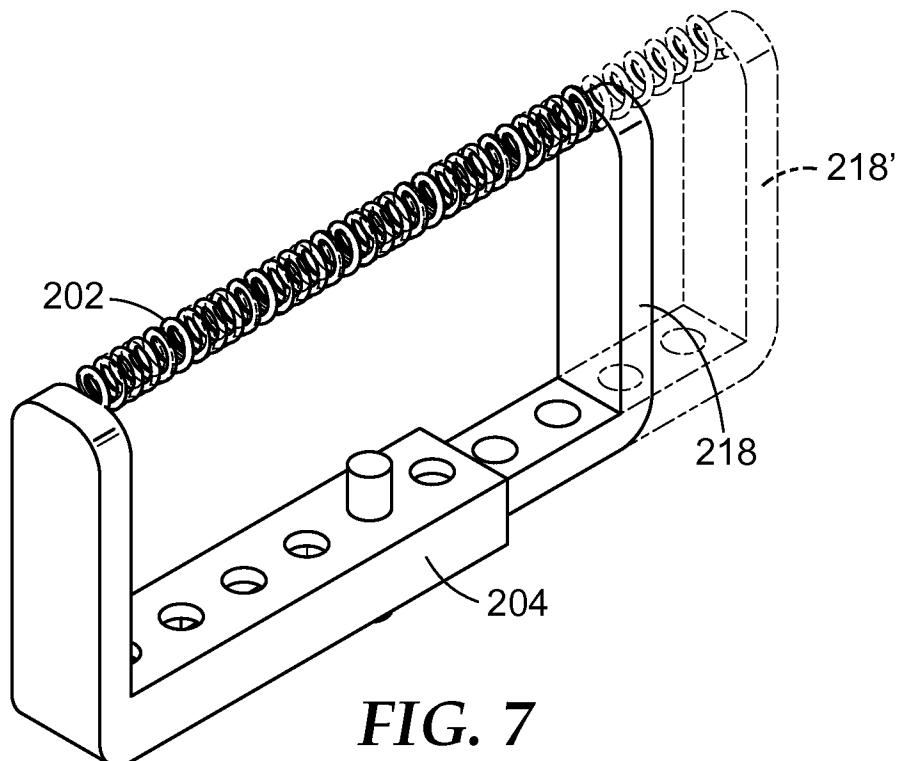

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/044421

A. CLASSIFICATION OF SUBJECT MATTER
INV. B05C17/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
B05B B05C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 037 946 A (HAWKINS R D) 16 July 1980 (1980-07-16) the whole document -----	1,2,13, 17-20
A	GB 848 193 A (JOSEPH GEORGE GRANT) 14 September 1960 (1960-09-14) the whole document -----	9
A	US 4 201 801 A (HORI KIYOSHI [JP]) 6 May 1980 (1980-05-06) the whole document -----	1,2



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

30 August 2013

06/09/2013

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Moroncini, Alessio

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/044421

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2037946	A	16-07-1980	NONE	
GB 848193	A	14-09-1960	NONE	
US 4201801	A	06-05-1980	NONE	